

TEST REPORT

Reference No. : WTD22D12256981W002
FCC ID..... : NZ3-WN0005
Applicant..... : Winstars Technology Limited
Address : Block 4, Taisong Industrial Park, Dalang Street, Longhua Town,
Bao'an District, Shenzhen, China
Manufacturer : Winstars Technology Limited
Address : Block 4, Taisong Industrial Park, Dalang Street, Longhua Town,
Bao'an District, Shenzhen, China
Product..... : AX1800M Wireless Dual Band USB3.0 Adapter
Model(s)..... : WS-WN690X1, WL-WN690X1, USB-WIFIAX
Standards..... : CFR47 FCC Part 15 E Section 15.407
Date of Receipt sample..... : 2022-12-23
Date of Test..... : 2022-12-23 to 2023-02-06
Date of Issue : 2023-03-10
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:


Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

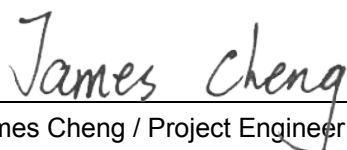
James Cheng / Project Engineer

Approved by:


Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 General Description of E.U.T.....	5
4.2 Details of E.U.T.....	5
4.3 Channel List.....	6
5 TEST MODE DESCRIPTION	7
5.1 Test Facility.....	8
5.2 Subcontracted.....	8
5.3 Abnormalities from Standard Conditions.....	8
6 EQUIPMENT USED DURING TEST	9
6.1 Equipments List.....	9
6.2 Description of Support Units.....	10
6.3 Measurement Uncertainty.....	10
6.4 Test Equipment Calibration.....	10
7 TEST SUMMARY	11
8 CONDUCTED EMISSION	12
8.1 E.U.T. Operation.....	12
8.2 EUT Setup.....	12
8.3 Measurement Description.....	12
8.4 Conducted Emission Test Result.....	13
9 DUTY CYCLE	15
9.1 Test Results.....	15
10 RADIATED EMISSIONS	18
10.1 EUT Operation.....	18
10.2 Test Setup.....	19
10.3 Spectrum Analyzer Setup.....	20
10.4 Test Procedure.....	21
10.5 Corrected Amplitude & Margin Calculation.....	21
10.6 Summary of Test Results.....	21
11 BAND EDGE	34
11.1 Test Produce.....	34
11.2 Test Result.....	34
12 6 DB BANDWIDTH	39
12.1 Test Procedure:.....	39
12.2 Test Result:.....	39
13 EMISSION BANDWIDTH (EBW) AND 99% OCCUPIED BANDWIDTH	43
13.1 Test Procedure:.....	43
13.2 Test Result:.....	44
14 CONDUCTED OUTPUT POWER	51
14.1 Test Procedure:.....	51
14.2 Test Result:.....	51

15	POWER SPECTRAL DENSITY	65
15.1	Test Procedure:	65
15.2	Test Result:.....	66
16	FREQUENCY STABILITY	81
16.1	Test Procedure:	81
16.2	Test Result:.....	81
17	ANTENNA REQUIREMENT	83
18	RF EXPOSURE	83
19	PHOTOGRAPHS OF TEST SETUP AND EUT.....	83

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD22D12256981W002	2022-12-23	2022-12-23 to 2023-02-06	2023-03-10	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	AX1800M Wireless Dual Band USB3.0 Adapter
Model(s):	WS-WN690X1, WL-WN690X1, USB-WIFIAX
Model Description:	The models are same in all respects. Only the model names are different. The model of test sample is WS-WN690X1.
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac (VHT20/40/80)
Hardware Version:	WS-WN690X1-A
Software Version:	5001.15.116.0

4.2 Details of E.U.T.

Operation Frequency:	U-NII-1 802.11a/n(HT20)/ac(VHT20), 5180-5240MHz 4CH 802.11n(HT40)/ac(VHT40), 5190-5230MHz 2CH 802.11ac(VHT80), 5210MHz 1CH U-NII-3 802.11a/n(HT20)/ac(VHT20), 5745-5825MHz 5CH 802.11n(HT40)/ac(VHT40), 5755-5795MHz 2CH 802.11ac(VHT80), 5775MHz 1CH
Conducted output power:	U-NII-1: Ant. 1: 26.25dBm Ant.2: 25.51dBm Total: 28.91dBm Max. U-NII-3: Ant. 1: 26.10dBm Ant.2: 27.15dBm Total: 29.67dBm Max.
Type of Modulation:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Antenna installation:	PCB printed antenna
Antenna Gain:	U-NII-1: 3.0dBi U-NII-3: 3.0dBi
Ratings:	DC 5V
DFS Function:	Not support
TPC Function:	Not support

4.3 Channel List

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		

U-NII-3 (5.725-5.85GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	151	5755
153	5765	155	5775
157	5785	159	5795
161	5805	165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(VHT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	157	5785
165	5825		

For 802.11n(HT40)/ac(VHT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795

For 802.11ac(VHT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

5 Test Mode Description

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final-end product.

Test Items	Mode	Data Rate	TX/RX
Radiated Emissions	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
Duty Cycle	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
Band Edge	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
6dB Bandwidth	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
Conducted Output Power	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
Power Spectral Density	802.11a (HT20)	6 Mbps	TX
	802.11n (HT20/40)	MCS0	TX
	802.11ac(VHT20/40/80)	MCS0	TX
Frequency Stability	Un-modulation	/	TX

5.1 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5.2 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

5.3 Abnormalities from Standard Conditions

None.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	101155	2022-08-01	2023-07-31
2	LISN	SCHWARZBECK	NSLK 8128	8128-259	2022-08-08	2023-08-07
3	Limiter	CYBERTEK	EM5010	261115-001-0024	2022-08-01	2023-07-31
4	Cable	Laplace	RF300	-	2022-08-08	2023-08-07
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2022-04-28	2023-04-27
2	Amplifier	Agilent	8447D	2944A10178	2022-08-01	2023-07-31
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2022-08-07	2023-08-06
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2022-04-28	2023-04-27
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2022-04-28	2023-04-27
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2022-07-29	2023-07-28
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2022-04-28	2023-04-27
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2022-08-01	2023-07-31
9	Microwave Broadband Preamplifier	SCHWARZBECK	BBV 9721	100472	2022-08-01	2023-07-31
10	Spectrum Analyzer	R&S	FSP40	100501	2022-08-01	2023-07-31
11	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2022-08-01	2023-07-31
12	Test software	EZ-EMC	RA-03A1-1	-	N/A	N/A
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2022-04-28	2023-04-27
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2022-10-30	2023-10-29
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2022-05-02	2023-05-01
4	Amplifier	ANRITSU	MH648A	M43381	2022-04-28	2023-04-27
5	Cable	HUBER+SUHNER	CBL2	525178	2022-04-28	2023-04-27

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSP40	100501	2022-08-01	2023-07-31
2.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2022-04-28	2023-04-27

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Adapter	/	SYS1649-6012-T3	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a) 15.407(b)(9)	PASS
Radiated Emissions	15.407(b) (9) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	PASS
6dB Bandwidth	15.407(e)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)(l)	PASS
Restricted bands around fundamental frequency	15.407(b)	PASS
Frequency stability	15.407(g)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207
 Test Method: ANSI C63.10:2013
 Test Result: PASS
 Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50


*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.3 °C
 Humidity: 38.5 % RH
 Atmospheric Pressure: 101.2kPa
 Test Voltage: AC 120V, 60Hz
 EUT Operation: Please refer to section 5.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

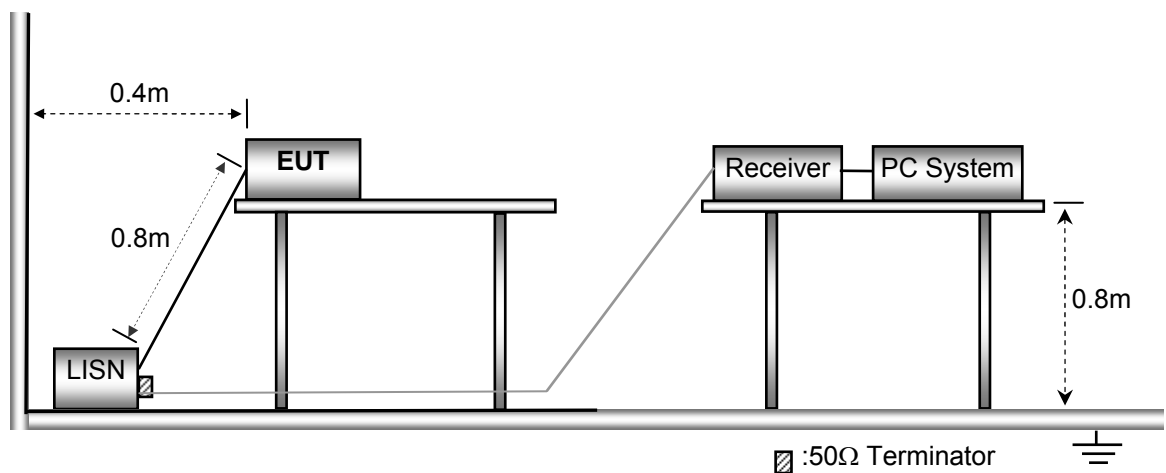


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: An initial pre-scan was performed on the live and neutral lines, only the worst data (U-NII-1 802.11n(HT20) mode High channel mode) were reported.

Live line:

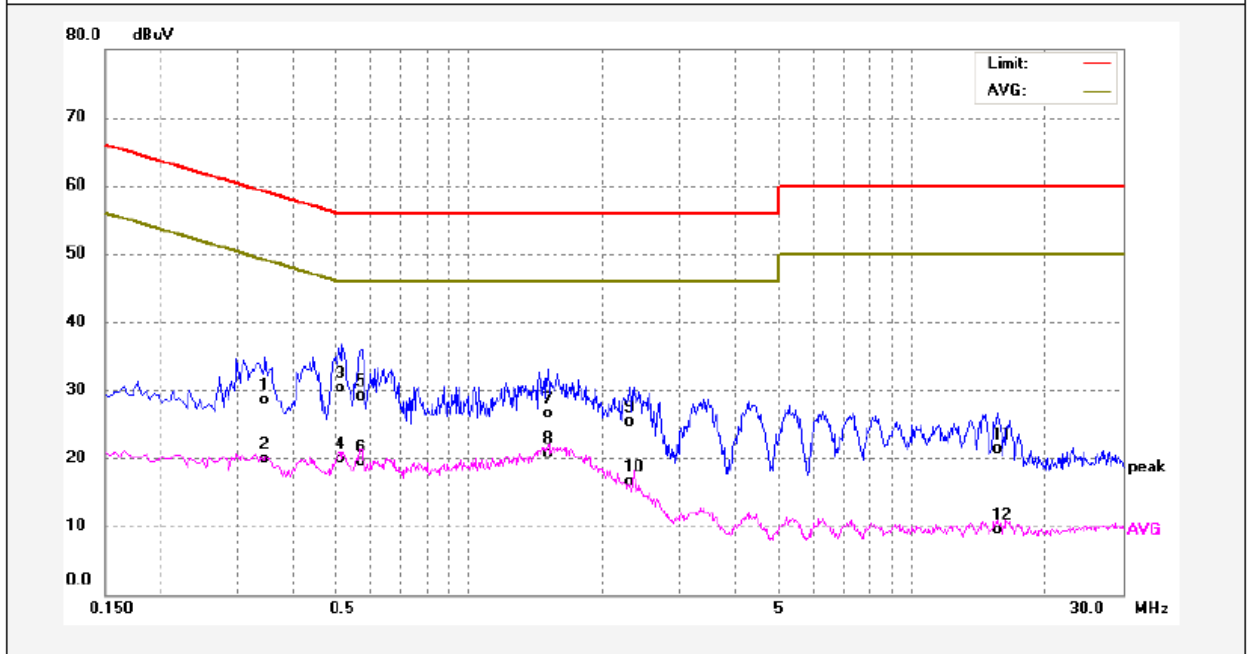

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3460	18.21	10.21	28.42	59.06	-30.64	QP	
2	0.3460	9.73	10.21	19.94	49.06	-29.12	AVG	
3	0.5180	20.13	10.13	30.26	56.00	-25.74	QP	
4	0.5180	9.75	10.13	19.88	46.00	-26.12	AVG	
5	0.5740	18.96	10.09	29.05	56.00	-26.95	QP	
6	0.5740	9.36	10.09	19.45	46.00	-26.55	AVG	
7	1.5060	16.60	9.90	26.50	56.00	-29.50	QP	
8	1.5060	10.75	9.90	20.65	46.00	-25.35	AVG	
9	2.3020	15.36	9.92	25.28	56.00	-30.72	QP	
10	2.3020	6.68	9.92	16.60	46.00	-29.40	AVG	
11	15.6060	10.50	10.75	21.25	60.00	-38.75	QP	
12	15.6060	-1.19	10.75	9.56	50.00	-40.44	AVG	

Neutral line:

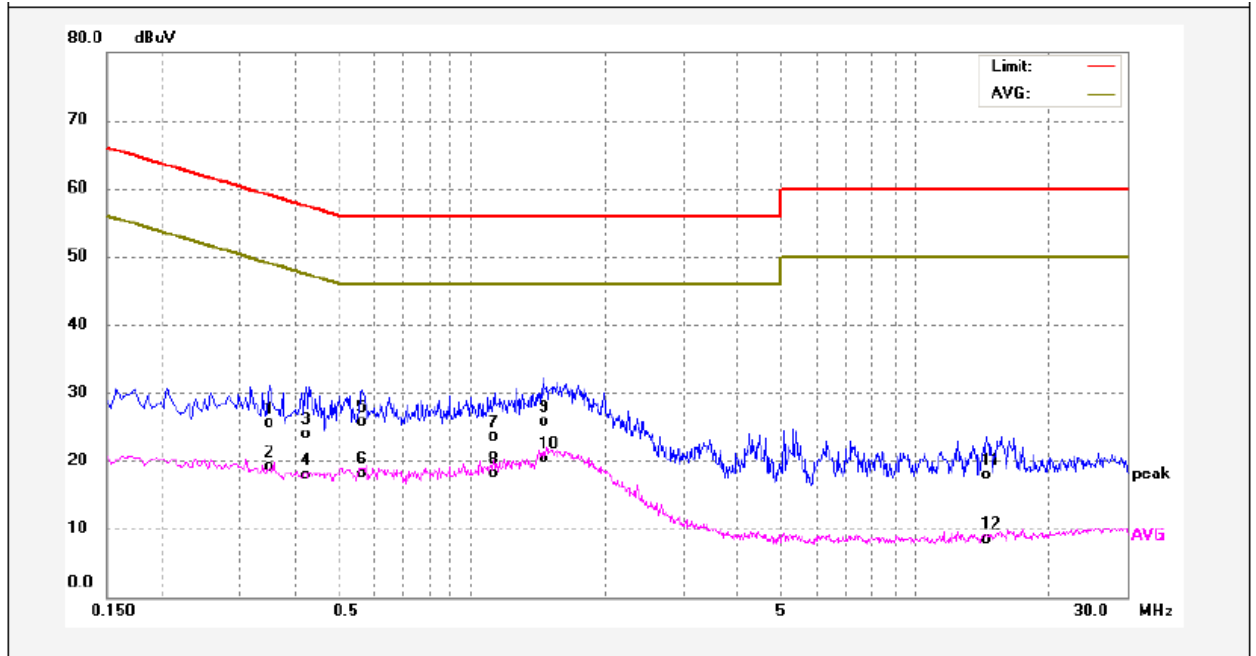

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3500	15.16	10.27	25.43	58.96	-33.53	QP	
2	0.3500	8.88	10.27	19.15	48.96	-29.81	AVG	
3	0.4220	13.70	10.25	23.95	57.41	-33.46	QP	
4	0.4220	7.75	10.25	18.00	47.41	-29.41	AVG	
5	0.5660	15.56	10.17	25.73	56.00	-30.27	QP	
6	0.5660	7.87	10.17	18.04	46.00	-27.96	AVG	
7	1.1260	13.62	9.95	23.57	56.00	-32.43	QP	
8	1.1260	8.22	9.95	18.17	46.00	-27.83	AVG	
9	1.4460	15.68	9.99	25.67	56.00	-30.33	QP	
10	1.4460	10.27	9.99	20.26	46.00	-25.74	AVG	
11	14.4700	7.07	10.87	17.94	60.00	-42.06	QP	
12	14.4700	-2.28	10.87	8.59	50.00	-41.41	AVG	

9 Duty Cycle

Test Requirement: FCC part 15 section15.407
 Test Method: ANSI C63.10:2013
 KDB 789033 D02 General UNII Test Procedures New Rules v02r01
 Section B
 Test Limit: N/A
 Test Result: PASS
 Remark: Through Pre-scan, the duty cycle set for channel low, middle and high are same, and the duty cycle test is performed at channel low only.

9.1 Test Results

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
U-NII-1 802.11a	1.35	3.86	0.35	34.97	4.56	-9.13
U-NII-1 802.11n(HT20)	1.15	3.64	0.32	31.59	5.00	-10.01
U-NII-1 802.11n(HT40)	0.55	3.08	0.18	17.86	7.48	-14.96
U-NII-1 802.11ac (VHT20)	1.13	3.66	0.31	30.87	5.10	-10.21
U-NII-1 802.11ac (VHT40)	0.55	3.08	0.18	17.86	7.48	-14.96
U-NII-1 802.11ac (VHT80)	0.27	2.80	0.10	9.64	10.16	-20.32
U-NII-3 802.11a	1.35	3.84	0.35	35.16	4.54	-9.08
U-NII-3 802.11n(HT20)	1.15	3.64	0.32	31.59	5.00	-10.01
U-NII-3 802.11n(HT40)	0.57	3.08	0.19	18.51	7.33	-14.65
U-NII-3 802.11ac (VHT20)	1.15	3.66	0.31	31.42	5.03	-10.06
U-NII-3 802.11ac (VHT40)	0.57	3.08	0.19	18.51	7.33	-14.65
U-NII-3 802.11ac (VHT80)	0.29	2.80	0.10	10.36	9.85	-19.70

Remark:

Duty cycle=On Time/period;


Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


Test result plots shown as follows:

U-NII-1

802.11a Low channel

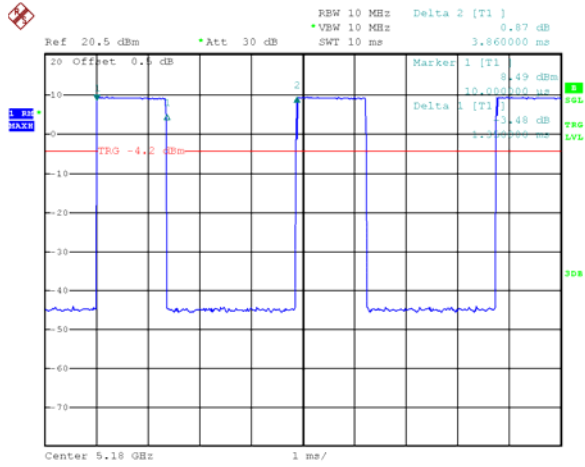


802.11n(HT20) Low channel

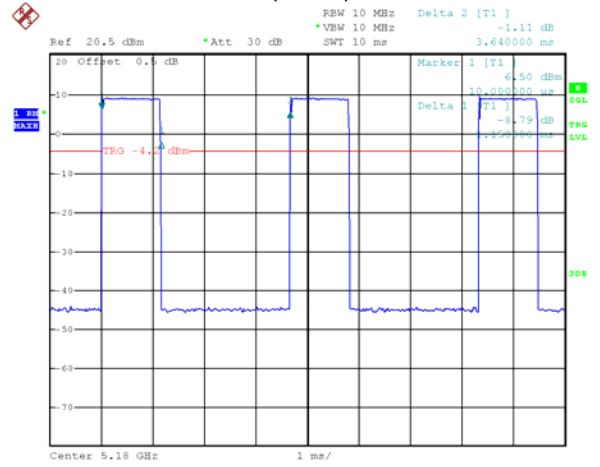


Date: 1.FEB.2023 14:56:29

Date: 1.FEB.2023 14:55:52

802.11n(HT40) Low channel

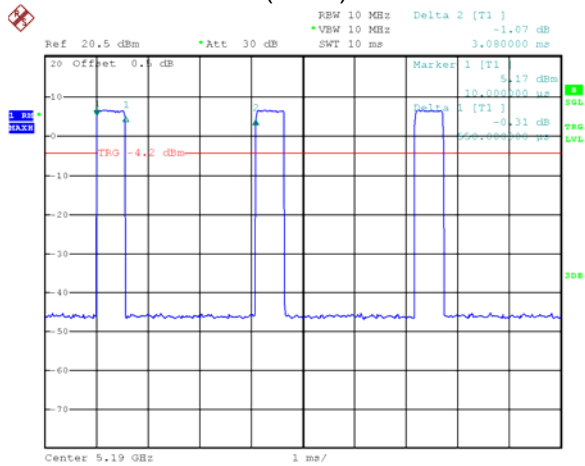


802.11ac(VHT20) Low channel

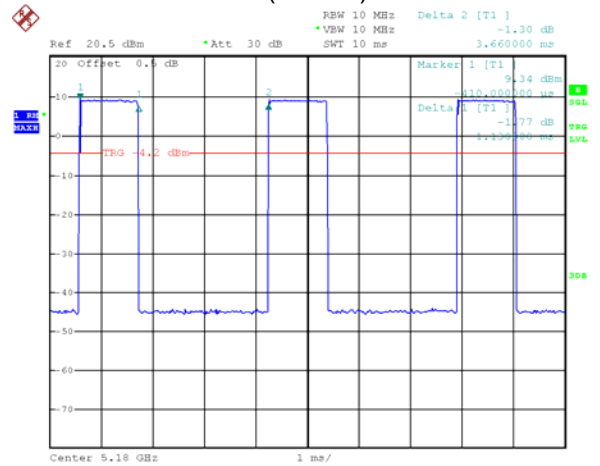


Date: 1.FEB.2023 14:57:19

Date: 1.FEB.2023 14:54:26

802.11ac(VHT40) Low channel

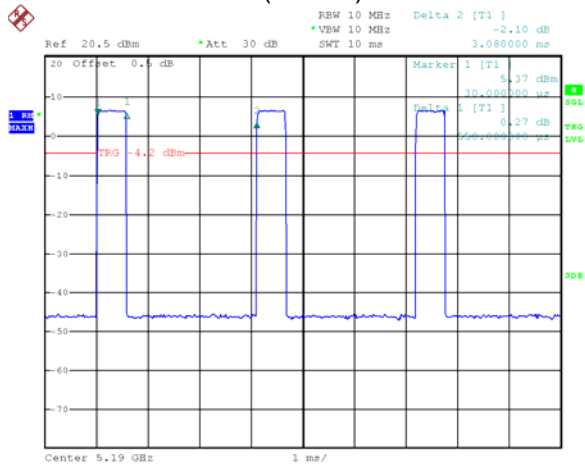

802.11ac(VHT80) Low channel

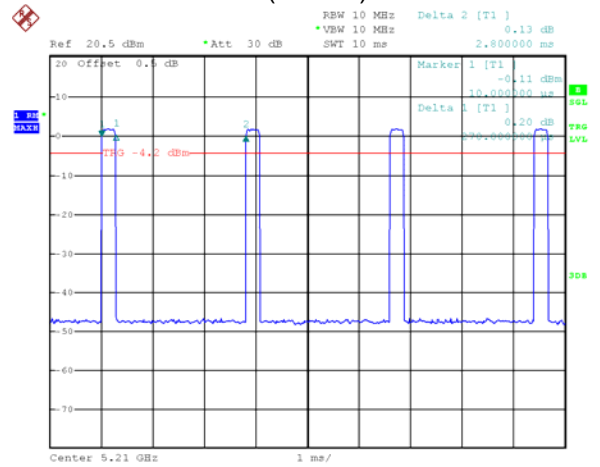


Date: 1.FEB.2023 14:57:57


Date: 1.FEB.2023 14:59:03

U-NII-3

802.11a Low channel

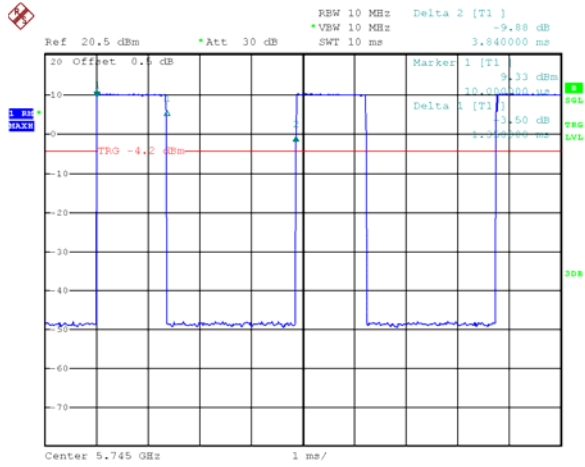


802.11n(HT20) Low channel

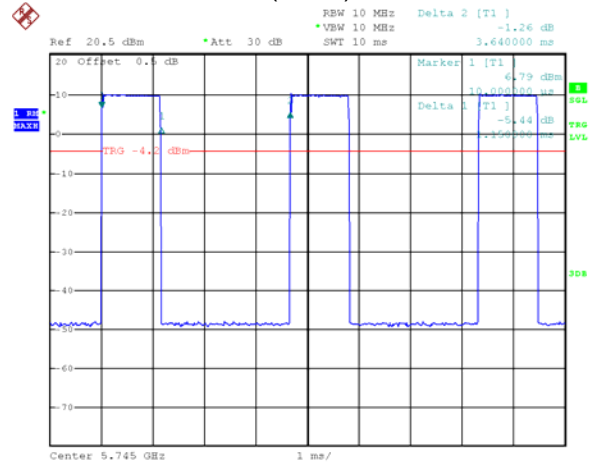


Date: 1.FEB.2023 14:51:27

Date: 1.FEB.2023 14:52:30

802.11n(HT40) Low channel

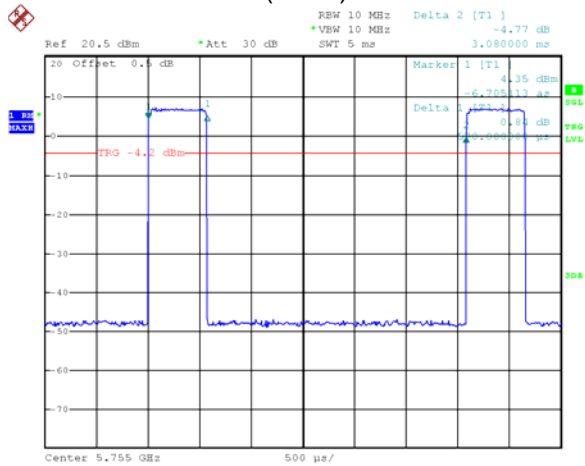


802.11ac(VHT20) Low channel

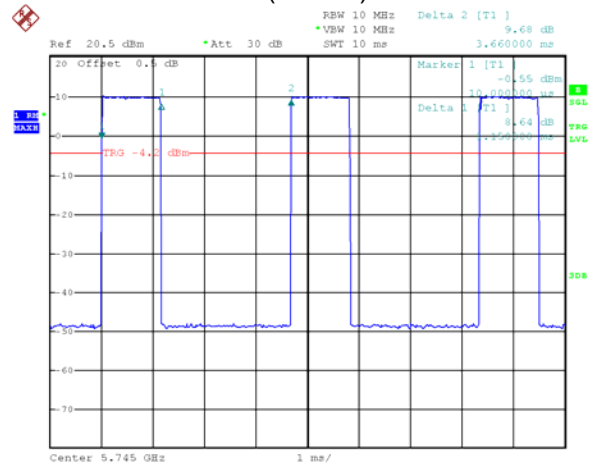


Date: 1.FEB.2023 14:49:37

Date: 1.FEB.2023 14:53:12

802.11ac(VHT40) Low channel

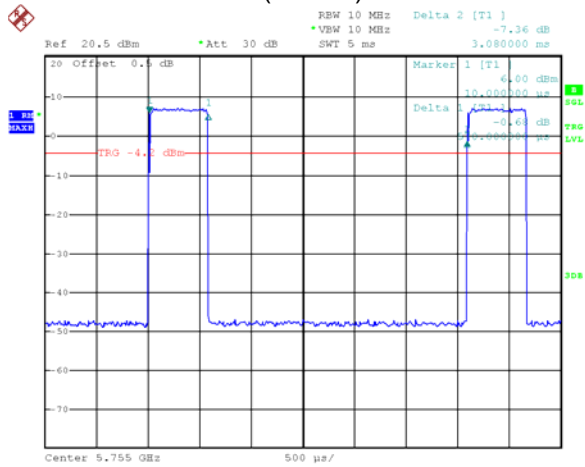

802.11ac(VHT80) Low channel

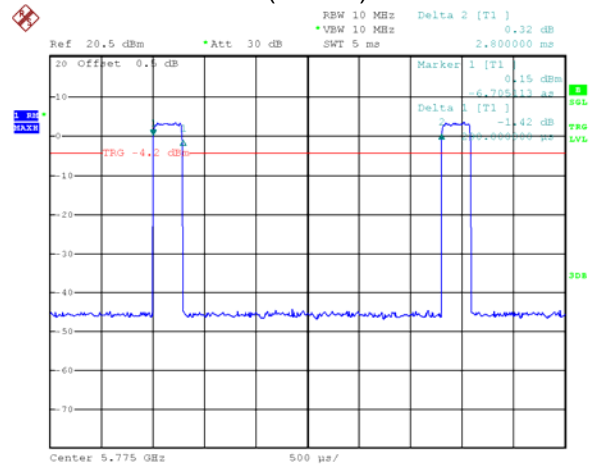

Date: 1.FEB.2023 14:50:13

Date: 1.FEB.2023 14:48:23

10 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407
KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

10.1 EUT Operation

Operating Environment:

Temperature: 23.8 °C

Humidity: 52.5 % RH

Atmospheric Pressure: 101.3kPa


EUT Operation:

The test was performed in transmitting mode, the test data were shown in the report.


10.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

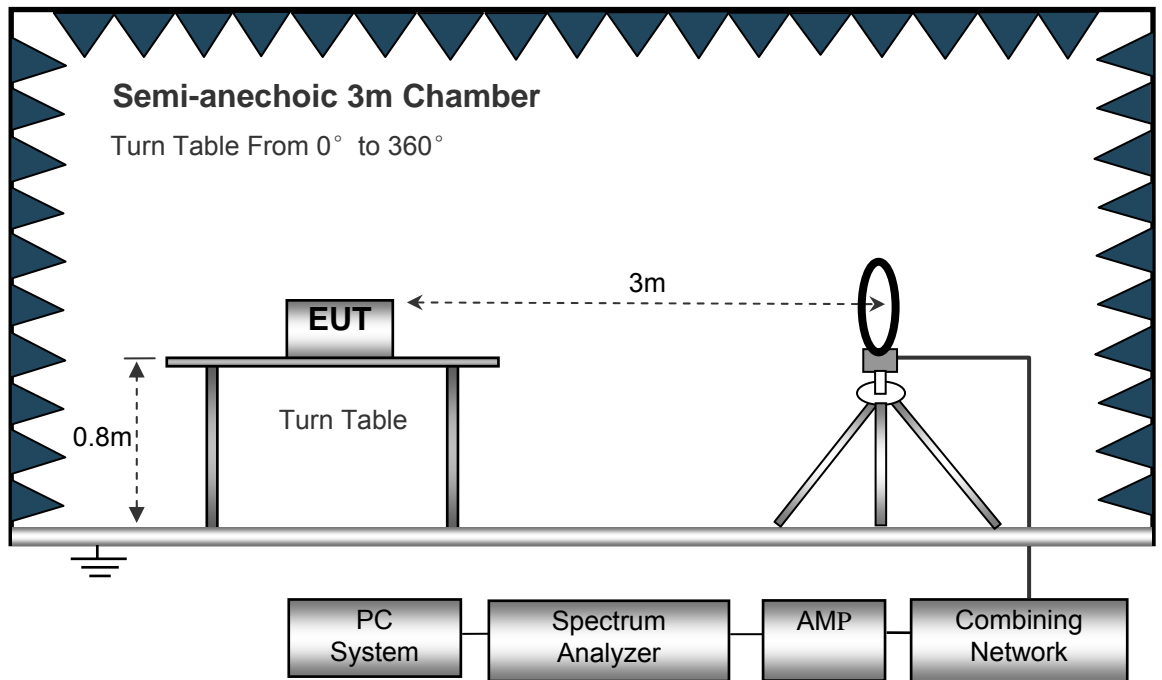

The test setup for emission measurement from 30 MHz to 1 GHz.

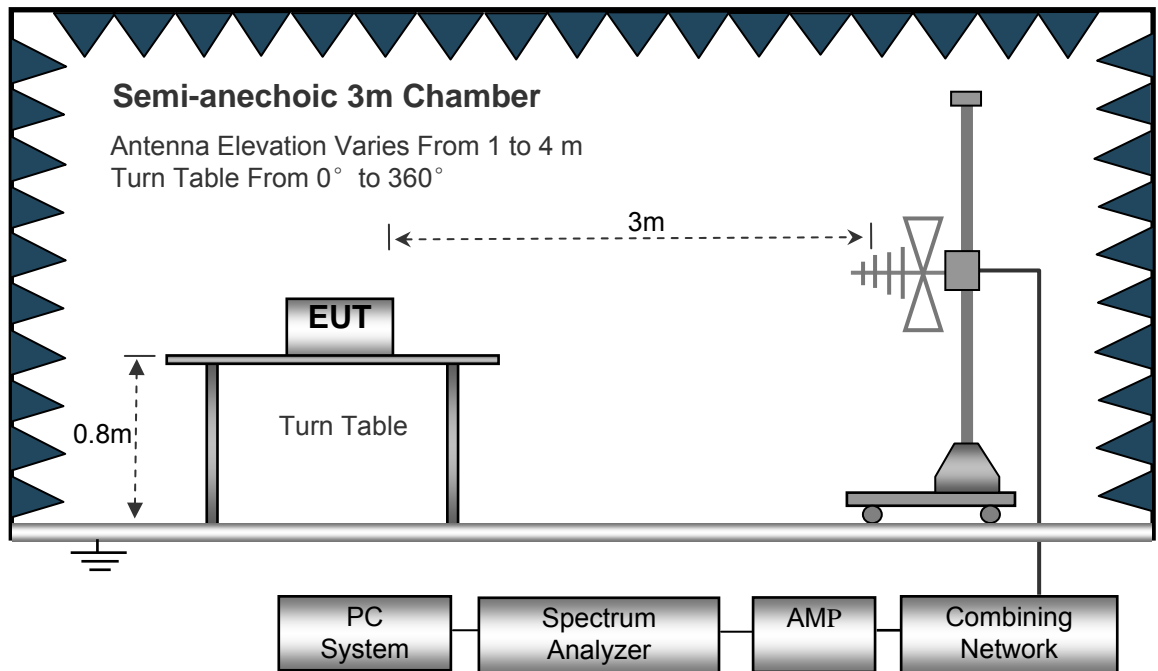

The test setup for emission measurement above 1 GHz.

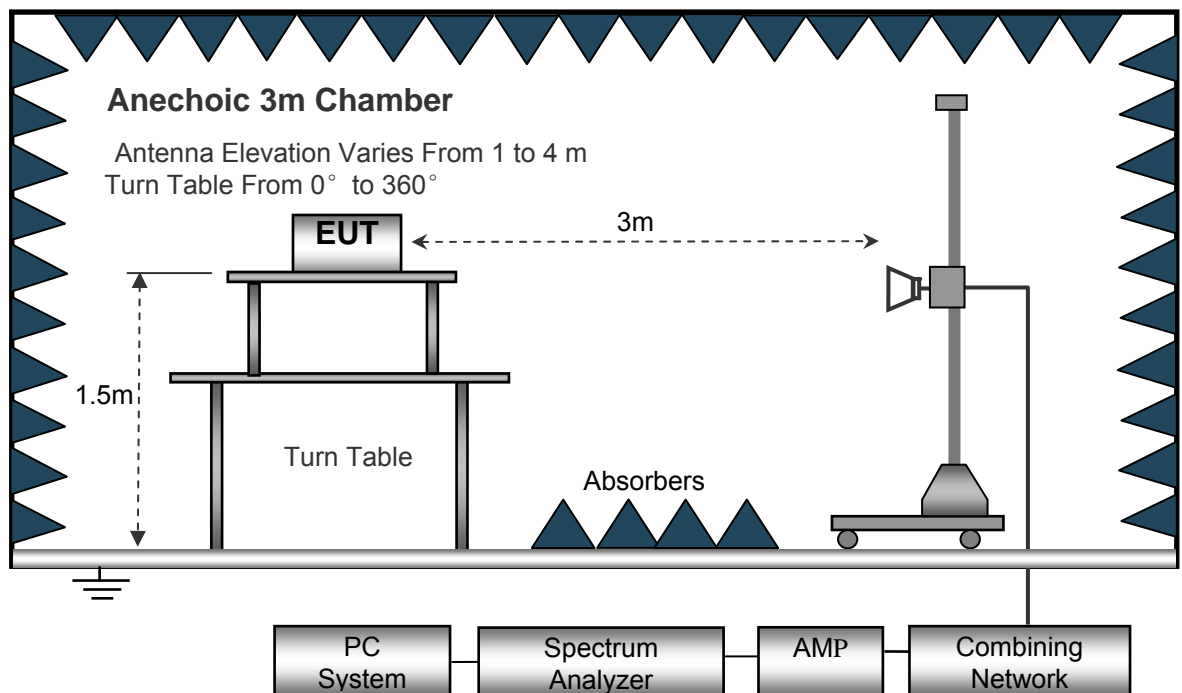

10.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

10.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X, Y and Z axis positioning (X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

10.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

10.6 Summary of Test Results

Note:

All test mode were tested, and only the worst-case were record in the report.

Test Mode: TX (Ant. 1+ Ant. 2)

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
302.54	42.72	QP	133	1.5	H	-11.62	31.10	46.00	-14.90
302.54	39.83	QP	309	1.7	V	-11.62	28.21	46.00	-17.79
4516.82	53.45	PK	241	1.2	H	-2.03	51.42	74.00	-22.58
4516.82	44.29	Ave	241	1.2	H	-2.03	42.26	54.00	-11.74
5148.44	53.74	PK	86	2.0	H	-1.02	52.72	74.00	-21.28
5148.44	44.57	Ave	86	2.0	H	-1.02	43.55	54.00	-10.45
10360.00	41.84	PK	1	1.7	H	5.33	47.17	74.00	-26.83
10360.00	37.92	Ave	1	1.7	H	5.33	43.25	54.00	-10.75
802.11a U-NII-1 Middle channel 5200MHz									
302.54	42.35	QP	161	1.5	H	-11.62	30.73	46.00	-15.27
302.54	40.54	QP	84	2.0	V	-11.62	28.92	46.00	-17.08
4520.23	54.60	PK	327	1.6	H	-1.94	52.66	74.00	-21.34
4520.23	44.93	Ave	327	1.6	H	-1.94	42.99	54.00	-11.01
5126.53	52.83	PK	246	1.2	H	-1.06	51.77	74.00	-22.23
5126.53	44.33	Ave	246	1.2	H	-1.06	43.27	54.00	-10.73
10400.00	42.73	PK	99	1.9	H	5.21	47.94	74.00	-26.06
10400.00	38.82	Ave	99	1.9	H	5.21	44.03	54.00	-9.97
802.11a U-NII-1 High channel 5240MHz									
302.54	41.88	QP	264	1.9	H	-11.62	30.26	46.00	-15.74
302.54	40.59	QP	217	1.7	V	-11.62	28.97	46.00	-17.03
4524.03	54.65	PK	112	1.0	H	-2.24	52.41	74.00	-21.59
4524.03	45.30	Ave	112	1.0	H	-2.24	43.06	54.00	-10.94
5125.94	52.18	PK	54	1.7	H	-1.09	51.09	74.00	-22.91
5125.94	45.25	Ave	54	1.7	H	-1.09	44.16	54.00	-9.84
10480.00	43.17	PK	16	1.5	H	5.14	48.31	74.00	-25.69
10480.00	39.27	Ave	16	1.5	H	5.14	44.41	54.00	-9.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20 U-NII-1 Low Channel 5180MHz									
302.54	41.94	QP	264	1.4	H	-11.62	30.32	46.00	-15.68
302.54	40.06	QP	239	1.9	V	-11.62	28.44	46.00	-17.56
4508.70	53.36	PK	6	1.9	H	-2.14	51.22	74.00	-22.78
4508.70	44.29	Ave	6	1.9	H	-2.14	42.15	54.00	-11.85
5125.82	47.66	PK	60	1.7	H	-1.06	46.60	74.00	-27.40
5125.82	37.83	Ave	60	1.7	H	-1.06	36.77	54.00	-17.23
10360.00	41.69	PK	179	1.9	H	5.33	47.02	74.00	-26.98
10360.00	37.98	Ave	179	1.9	H	5.33	43.31	54.00	-10.69
802.11n HT20 U-NII-1 Middle channel 5200MHz									
302.54	43.10	QP	216	1.7	H	-11.62	31.48	46.00	-14.52
302.54	38.75	QP	245	1.5	V	-11.62	27.13	46.00	-18.87
4502.78	51.98	PK	223	1.7	H	-2.12	49.86	74.00	-24.14
4502.78	44.57	Ave	223	1.7	H	-2.12	42.45	54.00	-11.55
5149.11	49.10	PK	344	1.6	H	-1.06	48.04	74.00	-25.96
5149.11	38.87	Ave	344	1.6	H	-1.06	37.81	54.00	-16.19
10400.00	40.78	PK	305	1.1	H	5.21	45.99	74.00	-28.01
10400.00	38.93	Ave	305	1.1	H	5.21	44.14	54.00	-9.86
802.11n HT20 U-NII-1 High channel 5240MHz									
302.54	43.13	QP	171	1.8	H	-11.62	31.51	46.00	-14.49
302.54	40.18	QP	291	1.3	V	-11.62	28.56	46.00	-17.44
4521.85	51.40	PK	331	1.3	H	-1.96	49.44	74.00	-24.56
4521.85	43.64	Ave	331	1.3	H	-1.96	41.68	54.00	-12.32
5140.23	48.86	PK	126	1.4	H	-1.06	47.80	74.00	-26.20
5140.23	39.49	Ave	126	1.4	H	-1.06	38.43	54.00	-15.57
10480.00	40.24	PK	330	1.3	H	5.14	45.38	74.00	-28.62
10480.00	37.57	Ave	330	1.3	H	5.14	42.71	54.00	-11.29

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n HT40 U-NII-1 Low Channel 5190MHz									
302.54	40.30	QP	131	1.8	H	-11.62	28.68	46.00	-17.32
302.54	41.05	QP	252	1.8	V	-11.62	29.43	46.00	-16.57
4526.04	40.73	PK	268	1.2	H	-1.89	38.84	74.00	-35.16
4526.04	35.39	Ave	268	1.2	H	-1.89	33.50	54.00	-20.50
5114.05	45.68	PK	45	1.9	H	-1.06	44.62	74.00	-29.38
5114.05	37.10	Ave	45	1.9	H	-1.06	36.04	54.00	-17.96
10380.00	39.40	PK	130	1.6	H	5.26	44.66	74.00	-29.34
10380.00	35.27	Ave	130	1.6	H	5.26	40.53	54.00	-13.47
802.11n HT40 U-NII-1 High channel 5230MHz									
302.54	41.17	QP	182	1.9	H	-11.62	29.55	46.00	-16.45
302.54	43.15	QP	213	1.1	V	-11.62	31.53	46.00	-14.47
4510.60	45.67	PK	276	1.4	H	-1.94	43.73	74.00	-30.27
4510.60	32.92	Ave	276	1.4	H	-1.94	30.98	54.00	-23.02
5128.13	45.66	PK	150	1.6	H	-1.06	44.60	74.00	-29.40
5128.13	39.96	Ave	150	1.6	H	-1.06	38.90	54.00	-15.10
10460.00	40.74	PK	217	1.9	H	5.28	46.02	74.00	-27.98
10460.00	36.60	Ave	217	1.9	H	5.28	41.88	54.00	-12.12

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac VHT20 U-NII-1 Low Channel 5180MHz									
302.54	39.16	QP	173	1.7	H	-11.62	27.54	46.00	-18.46
302.54	39.75	QP	81	1.6	V	-11.62	28.13	46.00	-17.87
4528.17	46.44	PK	5	1.6	H	-1.86	44.58	74.00	-29.42
4528.17	35.87	Ave	5	1.6	H	-1.86	34.01	54.00	-19.99
5119.44	39.10	PK	330	1.7	H	-1.06	38.04	74.00	-35.96
5119.44	38.93	Ave	330	1.7	H	-1.06	37.87	54.00	-16.13
10360.00	46.42	PK	279	1.0	H	5.33	51.75	74.00	-22.25
10360.00	37.99	Ave	279	1.0	H	5.33	43.32	54.00	-10.68
802.11ac VHT20 U-NII-1 Middle channel 5200MHz									
302.54	39.29	QP	153	1.1	H	-11.62	27.67	46.00	-18.33
302.54	39.87	QP	126	1.9	V	-11.62	28.25	46.00	-17.75
4509.88	46.13	PK	178	1.7	H	-1.82	44.31	74.00	-29.69
4509.88	38.97	Ave	178	1.7	H	-1.82	37.15	54.00	-16.85
5147.17	42.36	PK	202	1.6	H	-1.06	41.30	74.00	-32.70
5147.17	38.42	Ave	202	1.6	H	-1.06	37.36	54.00	-16.64
10400.00	42.78	PK	93	1.9	H	5.21	47.99	74.00	-26.01
10400.00	38.49	Ave	93	1.9	H	5.21	43.70	54.00	-10.30
802.11ac VHT20 U-NII-1 High channel 5240MHz									
302.54	38.59	QP	99	1.5	H	-11.62	26.97	46.00	-19.03
302.54	38.11	QP	180	1.7	V	-11.62	26.49	46.00	-19.51
4526.10	47.27	PK	92	1.8	H	-1.81	45.46	74.00	-28.54
4526.10	37.66	Ave	92	1.8	H	-1.81	35.85	54.00	-18.15
5119.43	39.46	PK	247	1.4	H	-1.06	38.40	74.00	-35.60
5119.43	40.96	Ave	247	1.4	H	-1.06	39.90	54.00	-14.10
10480.00	41.61	PK	7	1.7	H	5.14	46.75	74.00	-27.25
10480.00	37.34	Ave	7	1.7	H	5.14	42.48	54.00	-11.52

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac VHT40 U-NII-1 Low Channel 5190MHz									
302.54	40.58	QP	234	1.3	H	-11.62	28.96	46.00	-17.04
302.54	43.97	QP	5	1.6	V	-11.62	32.35	46.00	-13.65
4514.75	36.96	PK	307	1.9	H	-1.91	35.05	74.00	-38.95
4514.75	29.28	Ave	307	1.9	H	-1.91	27.37	54.00	-26.63
5113.83	47.39	PK	335	1.1	H	-1.06	46.33	74.00	-27.67
5113.83	41.01	Ave	335	1.1	H	-1.06	39.95	54.00	-14.05
10380.00	40.42	PK	346	1.6	H	5.26	45.68	74.00	-28.32
10380.00	35.36	Ave	346	1.6	H	5.26	40.62	54.00	-13.38
802.11ac VHT40 U-NII-1 High channel 5230MHz									
302.54	40.76	QP	268	1.8	H	-11.62	29.14	46.00	-16.86
302.54	44.68	QP	305	1.1	V	-11.62	33.06	46.00	-12.94
4521.93	36.34	PK	171	1.1	H	-1.93	34.41	74.00	-39.59
4521.93	29.79	Ave	171	1.1	H	-1.93	27.86	54.00	-26.14
5130.92	49.27	PK	344	1.7	H	-1.06	48.21	74.00	-25.79
5130.92	40.93	Ave	344	1.7	H	-1.06	39.87	54.00	-14.13
10460.00	42.74	PK	199	1.0	H	5.28	48.02	74.00	-25.98
10460.00	37.49	Ave	199	1.0	H	5.28	42.77	54.00	-11.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac VHT80 U-NII-1 Middle channel 5210MHz									
302.54	40.66	QP	114	1.2	H	-11.62	29.04	46.00	-16.96
302.54	33.77	QP	265	1.3	V	-11.62	22.15	46.00	-23.85
4501.37	31.72	PK	109	1.2	H	-1.88	29.84	74.00	-44.16
4501.37	42.72	Ave	109	1.2	H	-1.88	40.84	54.00	-13.16
5136.35	38.94	PK	340	2.0	H	-1.06	37.88	74.00	-36.12
5136.35	46.26	Ave	340	2.0	H	-1.06	45.20	54.00	-8.80
10420.00	40.68	PK	232	1.2	H	4.65	45.33	74.00	-28.67
10420.00	36.24	Ave	232	1.2	H	4.65	40.89	54.00	-13.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-3 Low Channel 5745MHz									
302.54	43.04	QP	19	1.4	H	-11.62	31.42	46.00	-14.58
302.54	40.09	QP	144	2.0	V	-11.62	28.47	46.00	-17.53
4526.13	51.81	PK	108	1.5	H	-2.06	49.75	74.00	-24.25
4526.13	44.15	Ave	108	1.5	H	-2.06	42.09	54.00	-11.91
5378.96	45.93	PK	339	1.9	H	-1.25	44.68	74.00	-29.32
5378.96	39.32	Ave	339	1.9	H	-1.25	38.07	54.00	-15.93
11490.00	41.55	PK	216	1.6	H	5.93	47.48	74.00	-26.52
11490.00	35.87	Ave	216	1.6	H	5.93	41.80	54.00	-12.20
802.11a U-NII-3 Middle channel 5785MHz									
302.54	43.83	QP	313	1.1	H	-11.62	32.21	46.00	-13.79
302.54	40.18	QP	50	1.1	V	-11.62	28.56	46.00	-17.44
4523.02	51.63	PK	218	1.0	H	-2.03	49.60	74.00	-24.40
4523.02	45.00	Ave	218	1.0	H	-2.03	42.97	54.00	-11.03
5387.23	46.47	PK	276	1.4	H	-1.22	45.25	74.00	-28.75
5387.23	39.47	Ave	276	1.4	H	-1.22	38.25	54.00	-15.75
11570.00	43.32	PK	133	1.2	H	5.81	49.13	74.00	-24.87
11570.00	35.73	Ave	133	1.2	H	5.81	41.54	54.00	-12.46
802.11a U-NII-3 High channel 5825MHz									
302.54	44.25	QP	14	1.6	H	-11.62	32.63	46.00	-13.37
302.54	40.26	QP	226	1.0	V	-11.62	28.64	46.00	-17.36
4538.30	52.22	PK	42	1.0	H	-1.84	50.38	74.00	-23.62
4538.30	44.48	Ave	42	1.0	H	-1.84	42.64	54.00	-11.36
5357.77	45.13	PK	339	1.4	H	-1.30	43.83	74.00	-30.17
5357.77	39.85	Ave	339	1.4	H	-1.30	38.55	54.00	-15.45
11650.00	41.77	PK	122	1.2	H	5.84	47.61	74.00	-26.39
11650.00	37.52	Ave	122	1.2	H	5.84	43.36	54.00	-10.64

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20 U-NII-3 Low Channel 5745MHz									
302.54	40.02	QP	150	1.6	H	-11.62	28.40	46.00	-17.60
302.54	48.49	QP	358	1.5	V	-11.62	36.87	46.00	-9.13
4514.21	49.02	PK	309	1.9	H	-2.06	46.96	74.00	-27.04
4514.21	46.32	Ave	309	1.9	H	-2.06	44.26	54.00	-9.74
5373.16	45.52	PK	205	1.3	H	-1.25	44.27	74.00	-29.73
5373.16	39.65	Ave	205	1.3	H	-1.25	38.40	54.00	-15.60
11490.00	35.54	PK	1	1.5	H	5.93	41.47	74.00	-32.53
11490.00	39.58	Ave	1	1.5	H	5.93	45.51	54.00	-8.49
802.11n HT20 U-NII-3 Middle channel 5785MHz									
302.54	41.19	QP	63	1.3	H	-11.62	29.57	46.00	-16.43
302.54	42.59	QP	25	1.9	V	-11.62	30.97	46.00	-15.03
4519.91	50.08	PK	140	2.0	H	-2.03	48.05	74.00	-25.95
4519.91	45.22	Ave	140	2.0	H	-2.03	43.19	54.00	-10.81
5389.80	46.30	PK	275	1.9	H	-1.22	45.08	74.00	-28.92
5389.80	38.54	Ave	275	1.9	H	-1.22	37.32	54.00	-16.68
11570.00	35.82	PK	135	1.1	H	5.81	41.63	74.00	-32.37
11570.00	37.81	Ave	135	1.1	H	5.81	43.62	54.00	-10.38
802.11n HT20 U-NII-3 High channel 5825MHz									
302.54	41.70	QP	144	1.6	H	-11.62	30.08	46.00	-15.92
302.54	43.41	QP	330	1.3	V	-11.62	31.79	46.00	-14.21
4514.76	48.92	PK	234	1.8	H	-1.84	47.08	74.00	-26.92
4514.76	44.00	Ave	234	1.8	H	-1.84	42.16	54.00	-11.84
5386.66	45.55	PK	158	1.1	H	-1.30	44.25	74.00	-29.75
5386.66	37.58	Ave	158	1.1	H	-1.30	36.28	54.00	-17.72
11650.00	35.64	PK	213	1.5	H	5.84	41.48	74.00	-32.52
11650.00	40.02	Ave	213	1.5	H	5.84	45.86	54.00	-8.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n HT40 U-NII-3 Low Channel 5755MHz									
302.54	39.60	QP	92	1.6	H	-11.62	27.98	46.00	-18.02
302.54	39.46	QP	82	1.5	V	-11.62	27.84	46.00	-18.16
4530.92	37.61	PK	121	1.4	H	-1.96	35.65	74.00	-38.35
4530.92	32.10	Ave	121	1.4	H	-1.96	30.14	54.00	-23.86
5386.35	46.49	PK	1	1.5	H	-1.01	45.48	74.00	-28.52
5386.35	38.37	Ave	1	1.5	H	-1.01	37.36	54.00	-16.64
11510.00	39.73	PK	146	1.1	H	5.88	45.61	74.00	-28.39
11510.00	34.92	Ave	146	1.1	H	5.88	40.80	54.00	-13.20
802.11n HT40 U-NII-3 High channel 5795MHz									
302.54	39.95	QP	113	1.3	H	-11.62	28.33	46.00	-17.67
302.54	40.08	QP	357	1.6	V	-11.62	28.46	46.00	-17.54
4511.89	37.12	PK	356	1.8	H	-1.92	35.20	74.00	-38.80
4511.89	31.62	Ave	356	1.8	H	-1.92	29.70	54.00	-24.30
5373.75	45.30	PK	163	1.1	H	-1.04	44.26	74.00	-29.74
5373.75	37.49	Ave	163	1.1	H	-1.04	36.45	54.00	-17.55
11590.00	41.25	PK	173	1.4	H	5.63	46.88	74.00	-27.12
11590.00	36.28	Ave	173	1.4	H	5.63	41.91	54.00	-12.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac VHT20 U-NII-3 Low Channel 5745MHz									
302.54	40.40	QP	185	1.1	H	-11.62	28.78	46.00	-17.22
302.54	39.33	QP	209	1.1	V	-11.62	27.71	46.00	-18.29
4507.16	42.91	PK	328	1.2	H	-1.92	40.99	74.00	-33.01
4507.16	37.21	Ave	328	1.2	H	-1.92	35.29	54.00	-18.71
5351.08	45.11	PK	243	1.9	H	-1.03	44.08	74.00	-29.92
5351.08	39.07	Ave	243	1.9	H	-1.03	38.04	54.00	-15.96
11490.00	39.47	PK	161	1.6	H	5.93	45.40	74.00	-28.60
11490.00	35.09	Ave	161	1.6	H	5.93	41.02	54.00	-12.98
802.11ac VHT20 U-NII-3 Middle channel 5785MHz									
302.54	41.02	QP	176	1.7	H	-11.62	29.40	46.00	-16.60
302.54	39.26	QP	23	1.2	V	-11.62	27.64	46.00	-18.36
4539.22	43.69	PK	96	1.7	H	-1.97	41.72	74.00	-32.28
4539.22	37.51	Ave	96	1.7	H	-1.97	35.54	54.00	-18.46
5368.62	45.91	PK	139	1.5	H	-1.05	44.86	74.00	-29.14
5368.62	37.81	Ave	139	1.5	H	-1.05	36.76	54.00	-17.24
11570.00	42.80	PK	58	1.9	H	5.81	48.61	74.00	-25.39
11570.00	36.58	Ave	58	1.9	H	5.81	42.39	54.00	-11.61
802.11ac VHT20 U-NII-3 High channel 5825MHz									
302.54	40.58	QP	201	1.3	H	-11.62	28.96	46.00	-17.04
302.54	38.63	QP	222	1.5	V	-11.62	27.01	46.00	-18.99
4534.45	42.92	PK	227	1.4	H	-1.88	41.04	74.00	-32.96
4534.45	36.64	Ave	227	1.4	H	-1.88	34.76	54.00	-19.24
5359.10	45.53	PK	196	1.4	H	-1.06	44.47	74.00	-29.53
5359.10	38.47	Ave	196	1.4	H	-1.06	37.41	54.00	-16.59
11650.00	41.51	PK	214	1.0	H	5.84	47.35	74.00	-26.65
11650.00	37.61	Ave	214	1.0	H	5.84	43.45	54.00	-10.55

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac VHT40 U-NII-3 Low Channel 5755MHz									
302.54	41.65	QP	77	1.1	H	-11.62	30.03	46.00	-15.97
302.54	38.35	QP	72	1.5	V	-11.62	26.73	46.00	-19.27
4523.65	37.25	PK	37	1.8	H	-1.92	35.33	74.00	-38.67
4523.65	25.87	Ave	37	1.8	H	-1.92	23.95	54.00	-30.05
5386.31	45.72	PK	205	1.5	H	-1.07	44.65	74.00	-29.35
5386.31	38.57	Ave	205	1.5	H	-1.07	37.50	54.00	-16.50
11510.00	40.82	PK	119	1.4	H	5.88	46.70	74.00	-27.30
11510.00	34.85	Ave	119	1.4	H	5.88	40.73	54.00	-13.27
802.11ac VHT40 U-NII-3 High channel 5795MHz									
302.54	42.15	QP	302	1.4	H	-11.62	30.53	46.00	-15.47
302.54	38.86	QP	260	1.8	V	-11.62	27.24	46.00	-18.76
4513.59	38.17	PK	256	1.2	H	-1.86	36.31	74.00	-37.69
4513.59	25.51	Ave	256	1.2	H	-1.86	23.65	54.00	-30.35
5382.44	46.52	PK	62	1.4	H	-1.03	45.49	74.00	-28.51
5382.44	39.24	Ave	62	1.4	H	-1.03	38.21	54.00	-15.79
11590.00	43.08	PK	303	1.0	H	5.63	48.71	74.00	-25.29
11590.00	37.86	Ave	303	1.0	H	5.63	43.49	54.00	-10.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac VHT80 U-NII-3 Middle channel 5775MHz									
302.54	39.78	QP	153	1.6	H	-11.62	28.16	46.00	-17.84
302.54	28.71	QP	141	1.1	V	-11.62	17.09	46.00	-28.91
4536.22	40.10	PK	40	2.0	H	-1.85	38.25	74.00	-35.75
4536.22	41.10	Ave	40	2.0	H	-1.85	39.25	54.00	-14.75
5374.86	46.55	PK	177	1.7	H	-1.14	45.41	74.00	-28.59
5374.86	37.61	Ave	177	1.7	H	-1.14	36.47	54.00	-17.53
11550.00	40.77	PK	172	1.9	H	4.83	45.60	74.00	-28.40
11550.00	37.73	Ave	172	1.9	H	4.83	42.56	54.00	-11.44

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

11 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407 KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013
Test Method:	ANSI C63.10 2013
Test Limit:	For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz. Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following: a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.
Test Result:	PASS

11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1000 kHz and VBW of spectrum analyzer to 3000 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


Note: Both Ant. 1 and Ant. 2 have been tested separately, and the report only shows the worst case.

Test plots shown as follows:

Ant. 1


U-NII-1

802.11a Band edge-left side

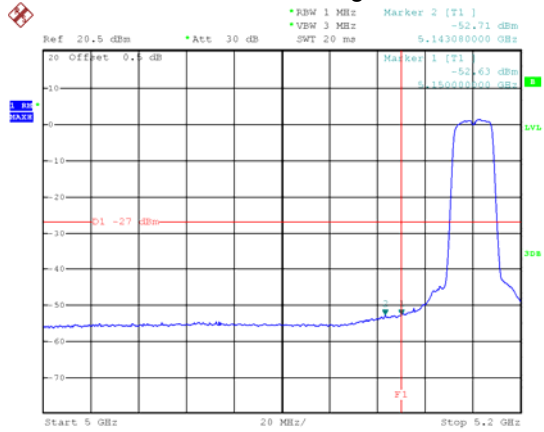


Date: 1.FEB.2023 15:19:03

802.11a Band edge-right side

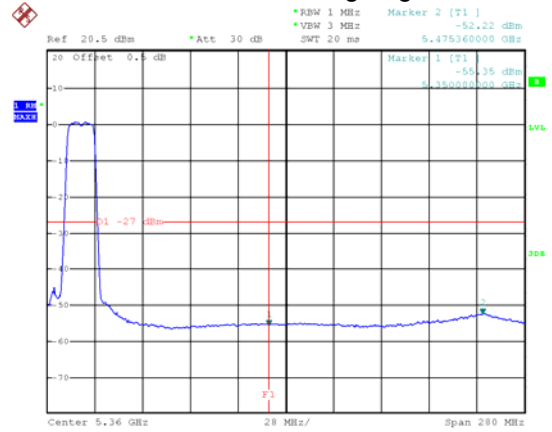


Date: 1.FEB.2023 15:27:04

802.11n(HT20) Band edge-left side

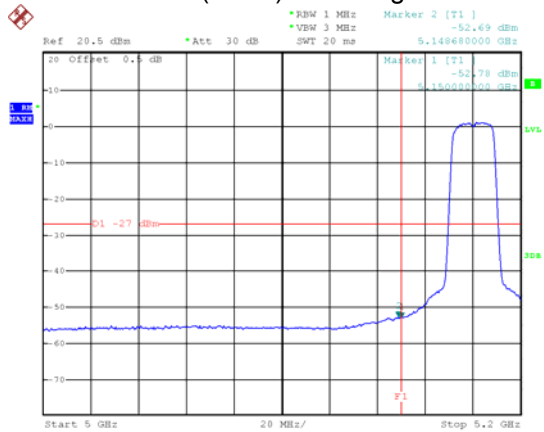


Date: 1.FEB.2023 15:19:52

802.11n(HT20) Band edge-right side

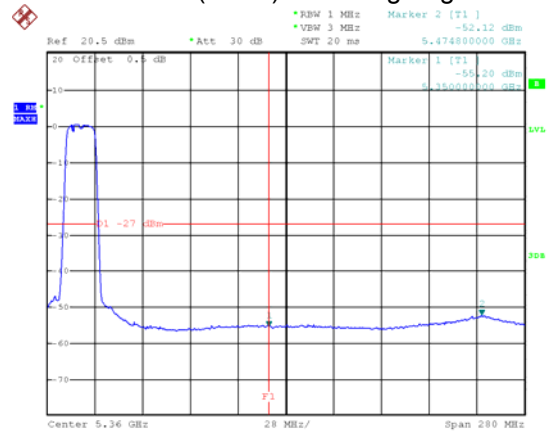


Date: 1.FEB.2023 15:26:19

802.11n(HT40) Band edge-left side

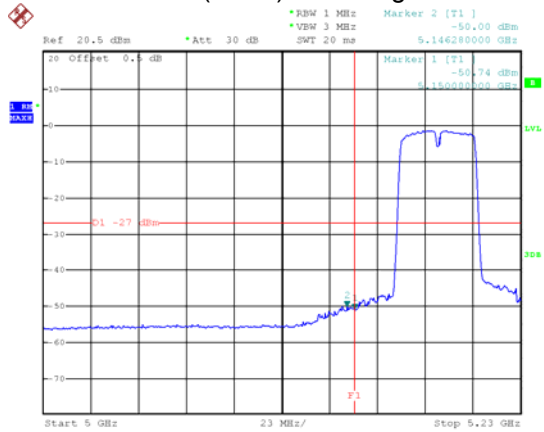


Date: 1.FEB.2023 15:16:11

802.11n(HT40) Band edge-right side

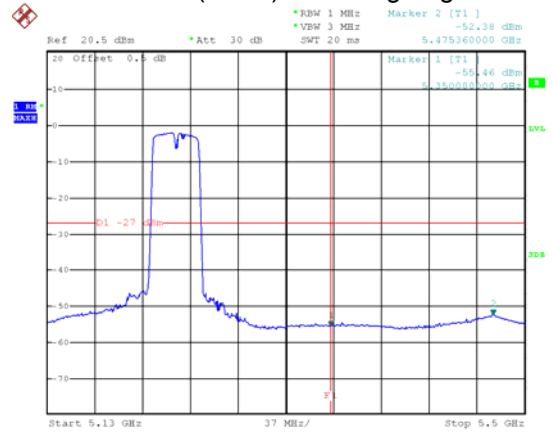


Date: 1.FEB.2023 15:28:42

802.11ac (VHT20) Band edge-left side

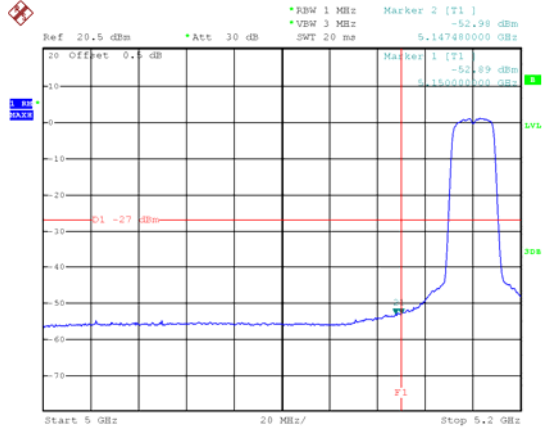


Date: 1.FEB.2023 15:20:44

802.11ac (VHT20) Band edge-right side

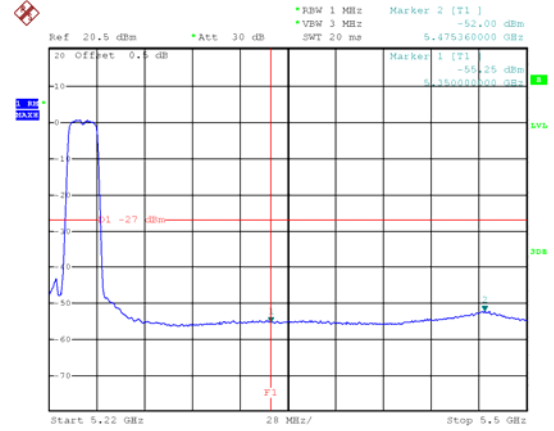


Date: 1.FEB.2023 15:22:06

802.11ac (VHT40) Band edge-left side

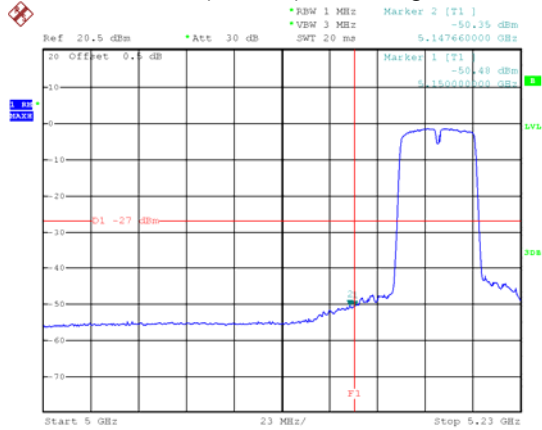


Date: 1.FEB.2023 15:15:30

802.11ac (VHT40) Band edge-right side

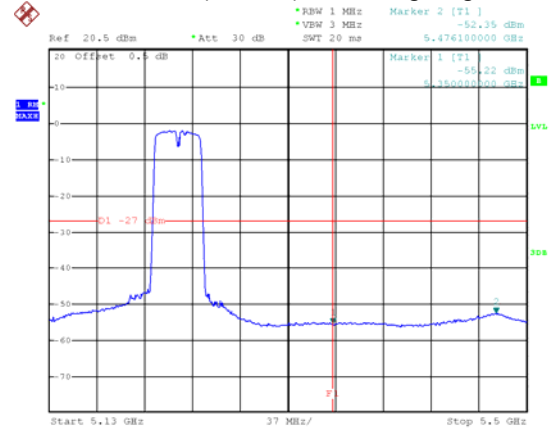


Date: 1.FEB.2023 15:29:22

802.11ac (VHT80) Band edge-left side

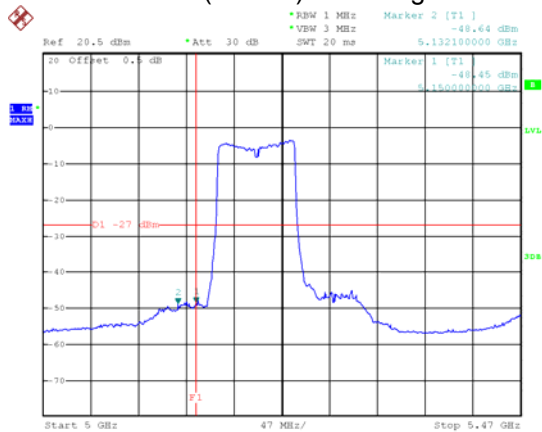

Date: 1.FEB.2023 15:12:56


802.11ac (VHT80) Band edge-right side

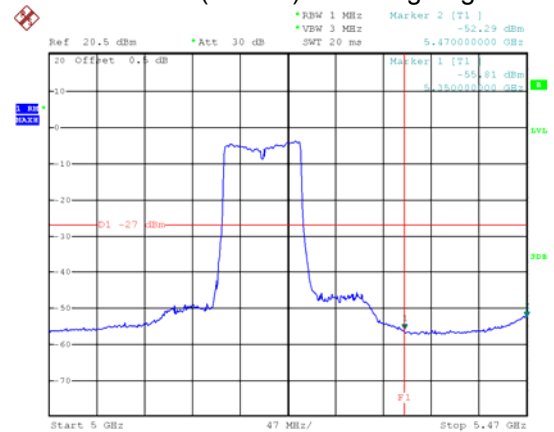

Date: 1.FEB.2023 15:30:03


U-NII-3

802.11a Band edge-left side

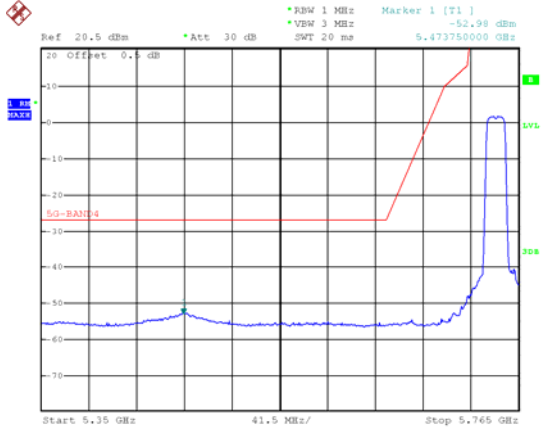


Date: 1.FEB.2023 19:23:36

802.11a Band edge-right side

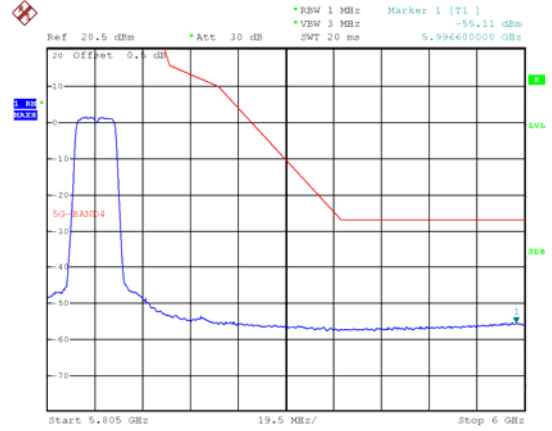


Date: 1.FEB.2023 19:13:42

802.11n(HT20) Band edge-left side

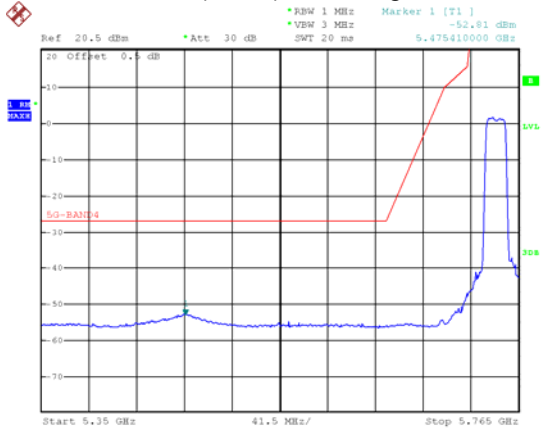


Date: 1.FEB.2023 19:24:04

802.11n(HT20) Band edge-right side

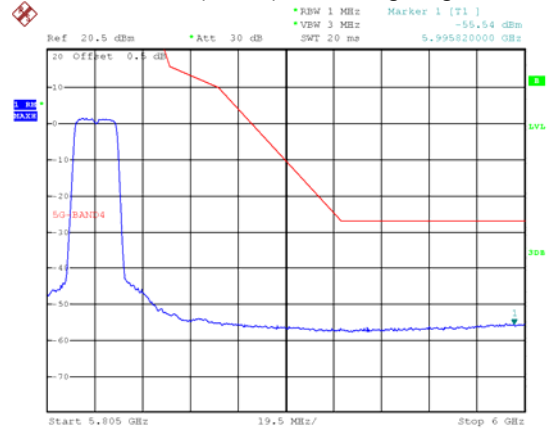


Date: 1.FEB.2023 19:14:24

802.11n(HT40) Band edge-left side

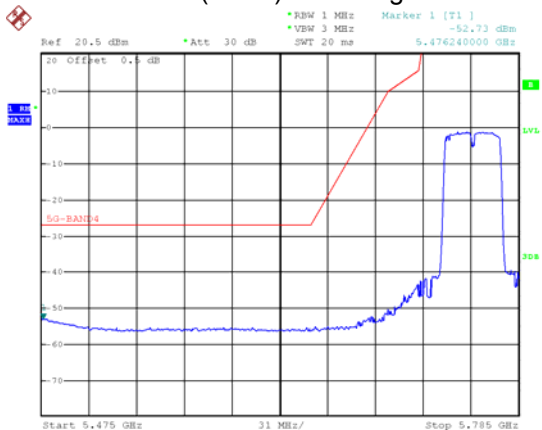


Date: 1.FEB.2023 19:22:25

802.11n(HT40) Band edge-right side

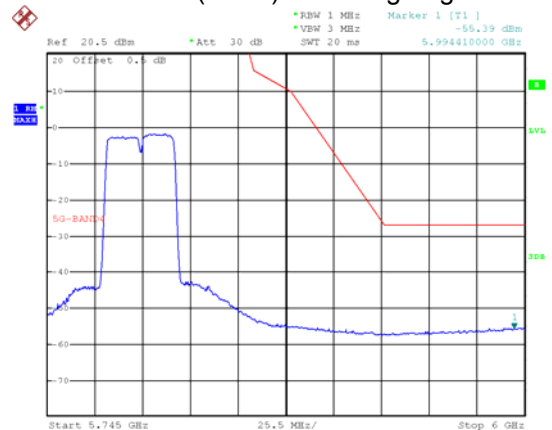


Date: 1.FEB.2023 19:16:09

802.11ac (VHT20) Band edge-left side

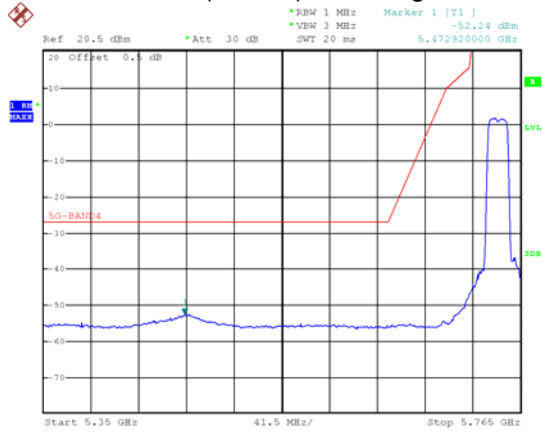


Date: 1.FEB.2023 19:24:37

802.11ac (VHT20) Band edge-right side

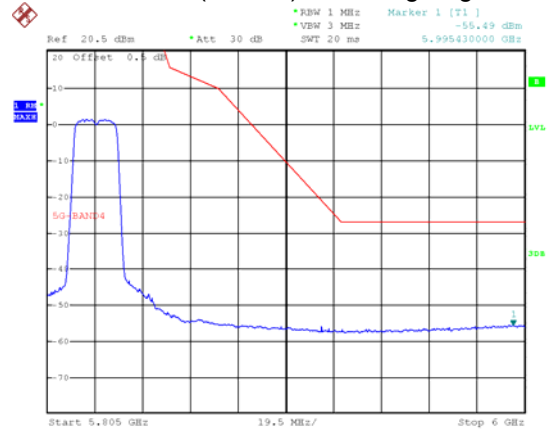


Date: 1.FEB.2023 19:14:56

802.11ac (VHT40) Band edge-left side

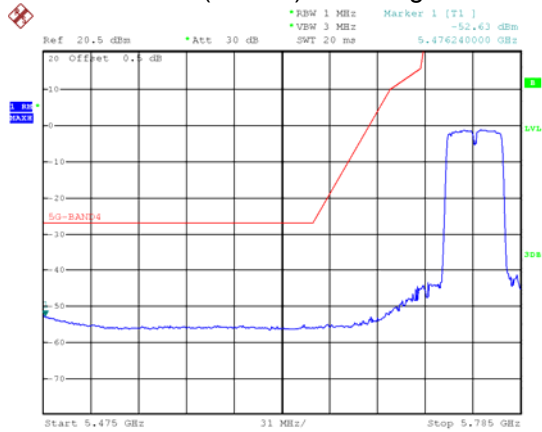


Date: 1.FEB.2023 19:22:51

802.11ac (VHT40) Band edge-right side

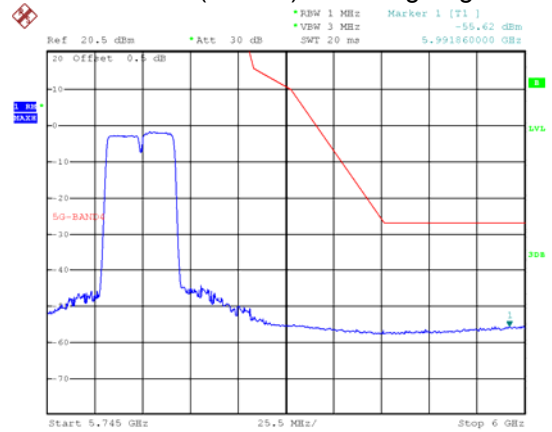


Date: 1.FEB.2023 19:16:39

802.11ac (VHT80) Band edge-left side

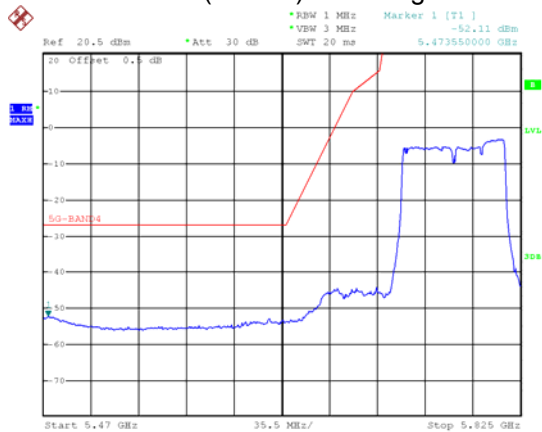

Date: 1.FEB.2023 19:20:00

802.11ac (VHT80) Band edge-right side

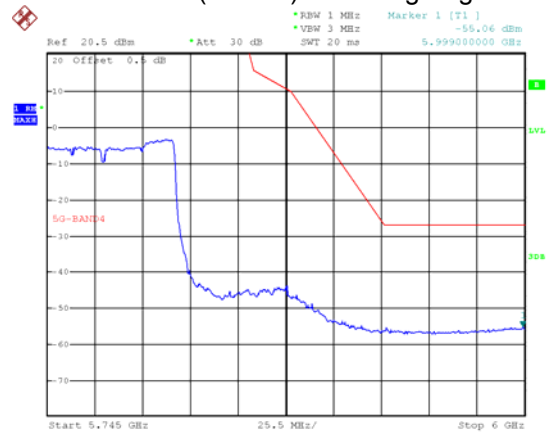

Date: 1.FEB.2023 19:17:40

12 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. The following procedure shall be used for measuring this bandwidth:
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) ≥ 3 times RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.2 Test Result:

Ant. 1


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.32	16.30	16.33
	802.11n(HT20)	17.28	17.12	16.97
	802.11n(HT40)	36.14	/	36.01
	802.11ac (VHT20)	17.54	17.52	17.22
	802.11ac (VHT40)	36.16	/	36.18
	802.11ac (VHT80)	/	76.22	/

Note: Both Ant. 1 and Ant. 2 have been tested separately, and the report only shows the worst case.


Test plots refer to next page:

Test result plot:


802.11a U-NII-3 Low channel

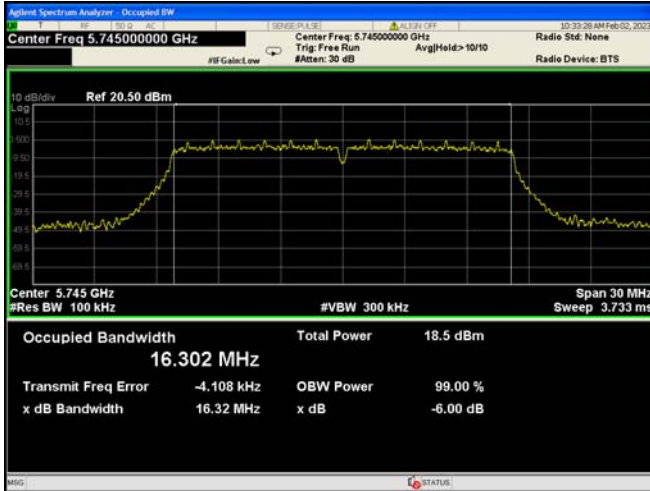


802.11a U-NII-3 Middle channel

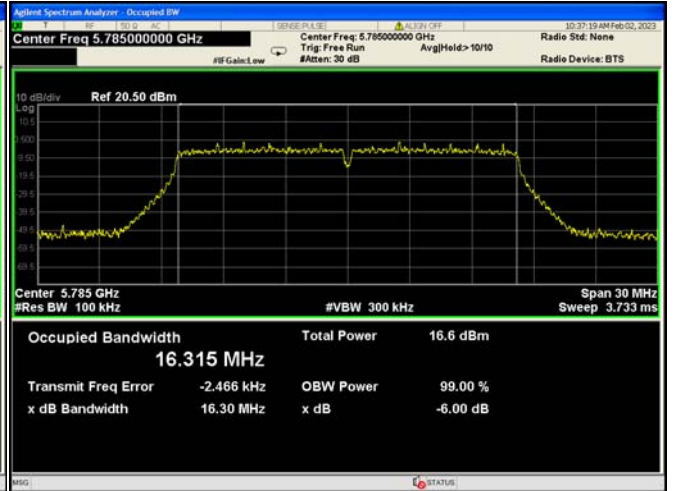


802.11a U-NII-3 High channel

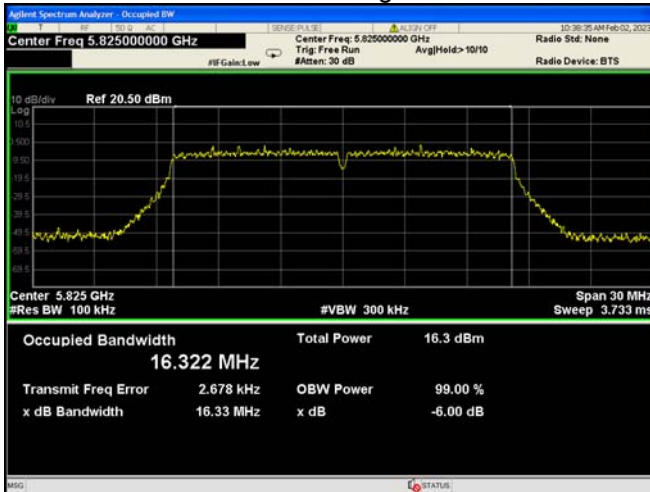


802.11n HT20 U-NII-3 Low channel

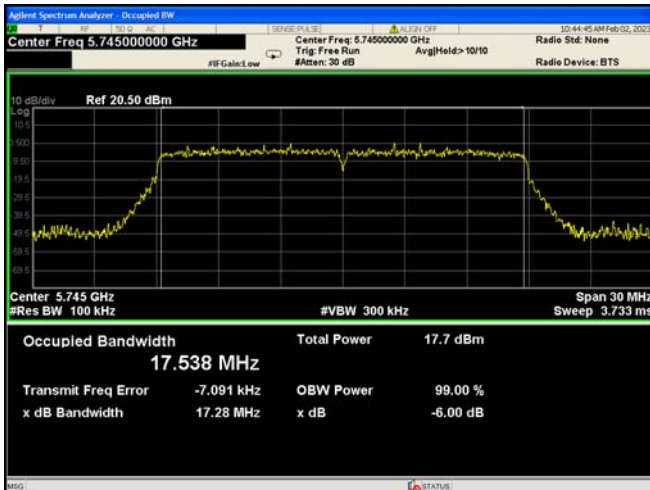


802.11n HT20 U-NII-3 Middle channel

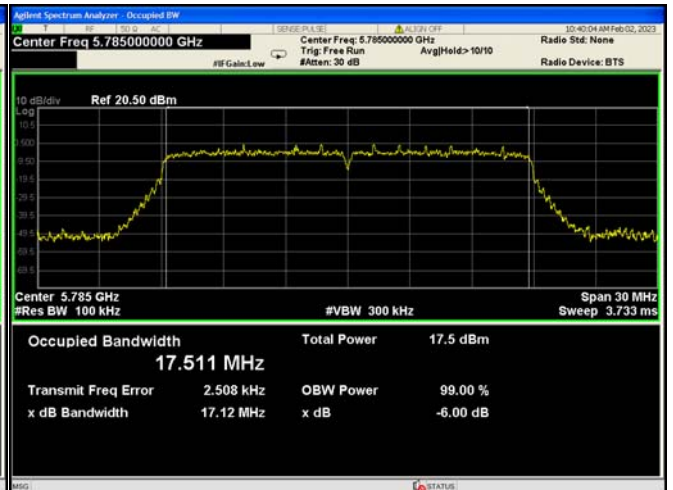


802.11n HT20 U-NII-3 High channel

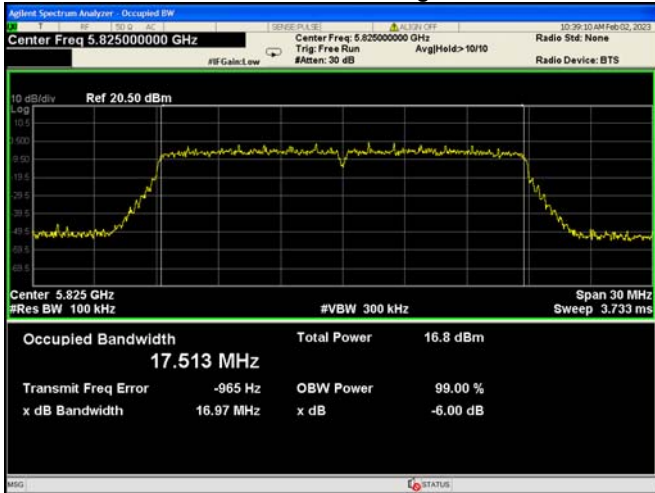


802.11ac VHT20 U-NII-3 Low channel

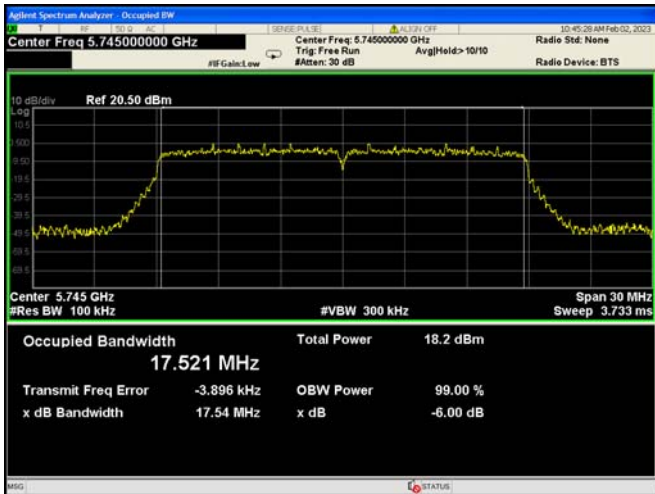


802.11ac VHT20 U-NII-3 Middle channel

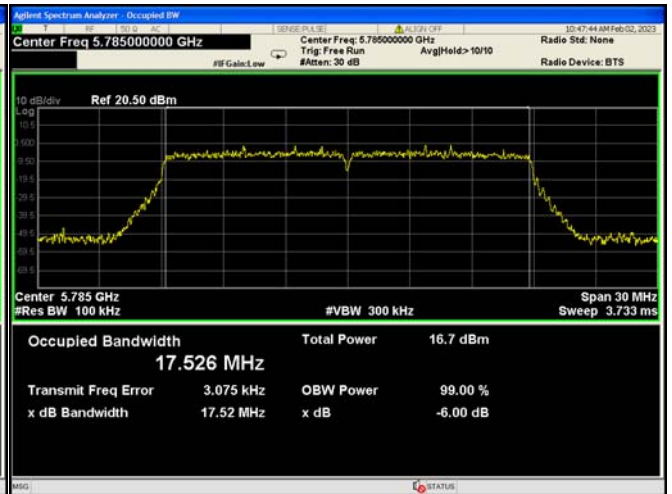


802.11ac VHT20 U-NII-3 High channel

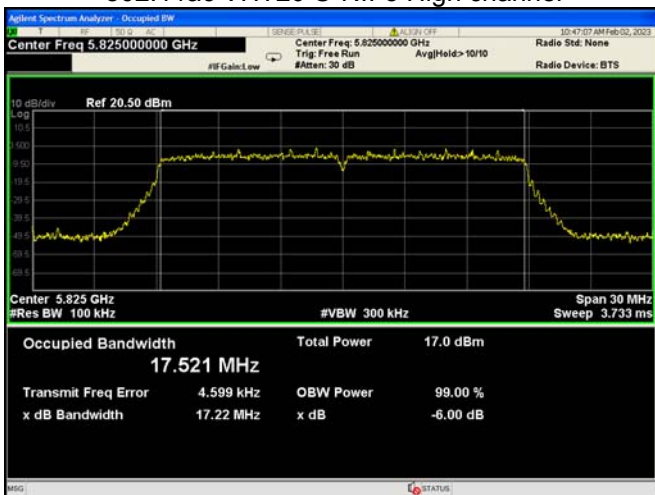


802.11n HT40 U-NII-3 Low channel

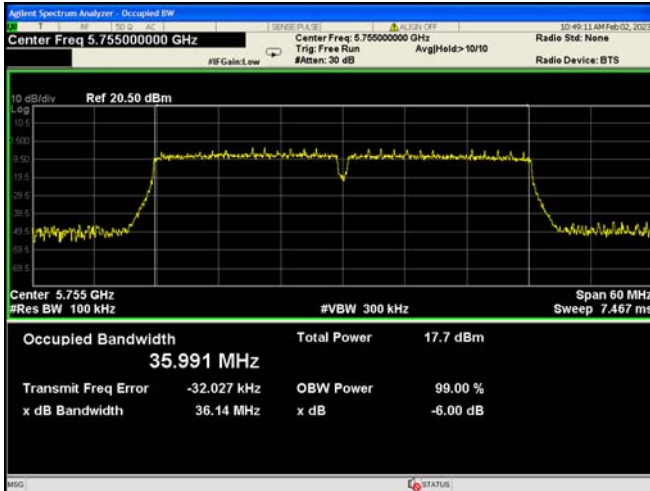


802.11n HT40 U-NII-3 High channel

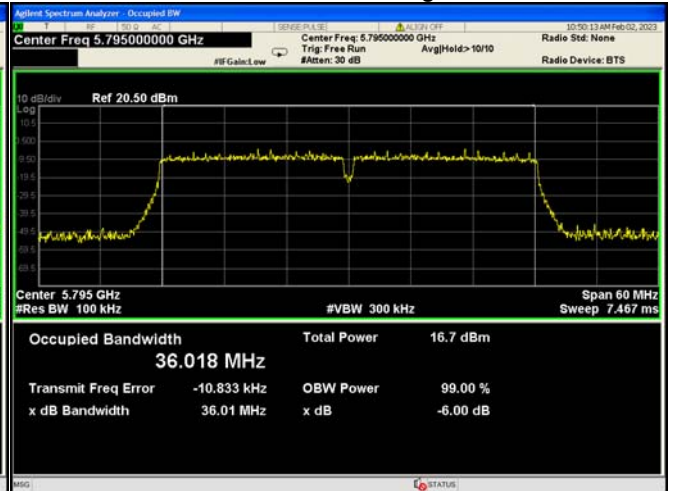


802.11ac VHT40 U-NII-3 Low channel

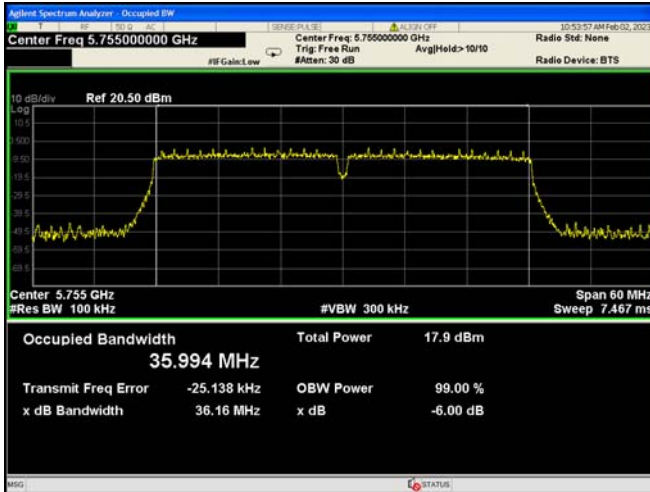

802.11ac VHT40 U-NII-3 High channel

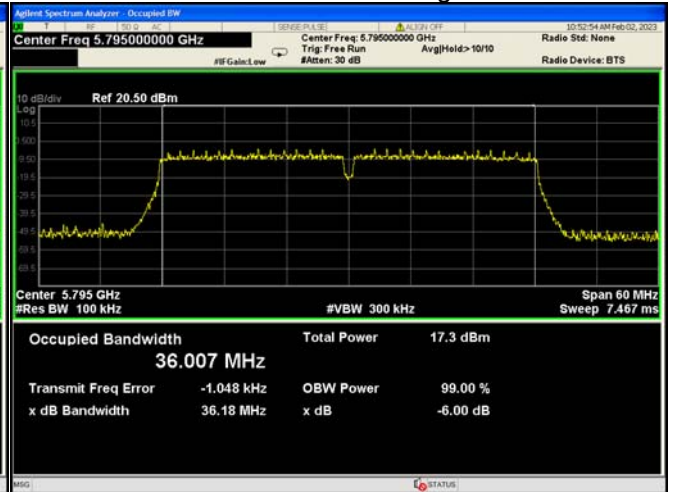

802.11ac VHT80 U-NII-3 Middle channel

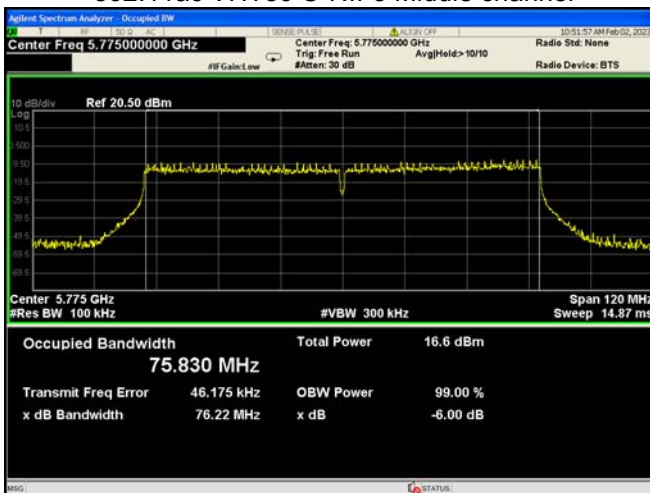

13 Emission Bandwidth (EBW) and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section C&D
Test Limit:	No restriction limits
Test Result:	PASS

13.1 Test Procedure:

Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth

The following procedure shall be used for measuring (99%) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1% to 5% of the OBW
- Set VBW \geq 3 times RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available).
- If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: For devices that use channel aggregation refer to III.A and III.C for determining 99% bandwidth.

13.2 Test Result:**Ant. 1**


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	18.30	18.34	18.31	16.325	16.360	16.333
	802.11n(HT20)	19.28	19.33	19.32	17.519	17.537	17.528
	802.11n(HT40)	38.54	/	38.68	36.028	/	36.039
	802.11ac (VHT20)	19.34	19.21	19.35	17.506	17.519	17.512
	802.11ac (VHT40)	38.67	/	38.46	36.026	/	36.072
	802.11ac (VHT80)	/	85.54	/	/	76.032	/
U-NII-3	802.11a	/	/	/	16.351	16.342	16.351
	802.11n(HT20)	/	/	/	17.483	17.505	17.531
	802.11n(HT40)	/	/	/	35.015	/	36.069
	802.11ac (VHT20)	/	/	/	17.530	17.530	17.522
	802.11ac (VHT40)	/	/	/	36.062	/	36.021
	802.11ac (VHT80)	/	/	/	/	76.25	/

Note: Both Ant. 1 and Ant. 2 have been tested separately, and the report only shows the worst case.


Test plots refer to next page:

U-NII-1


802.11a Low channel

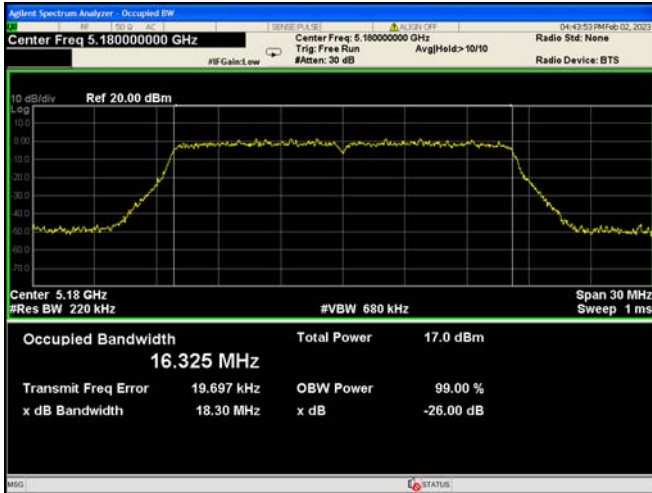


802.11a Middle channel

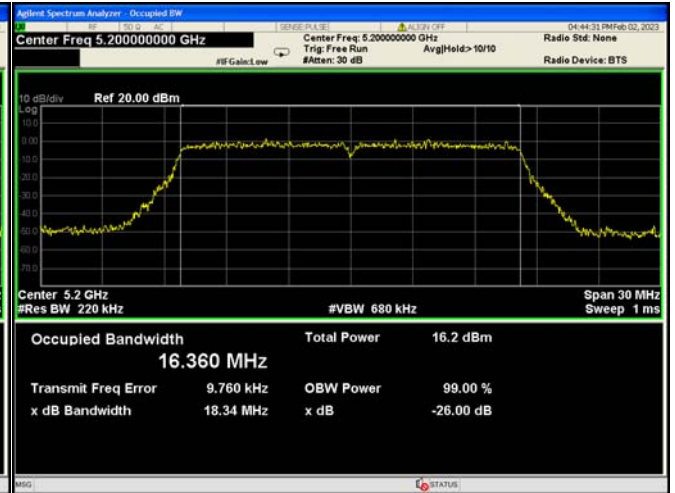


802.11a High channel

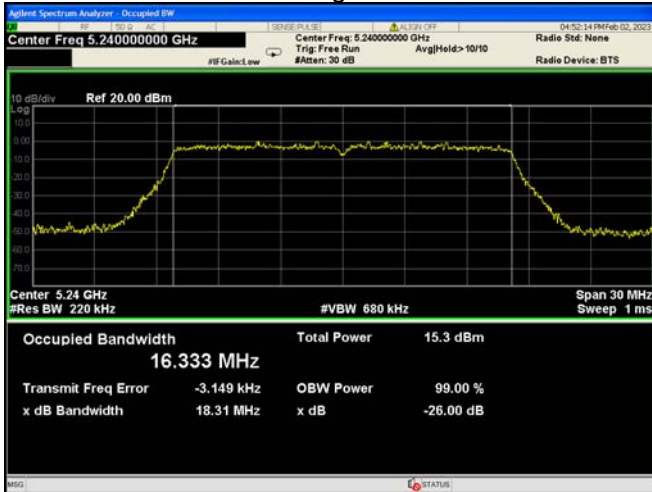


802.11n HT20 Low channel

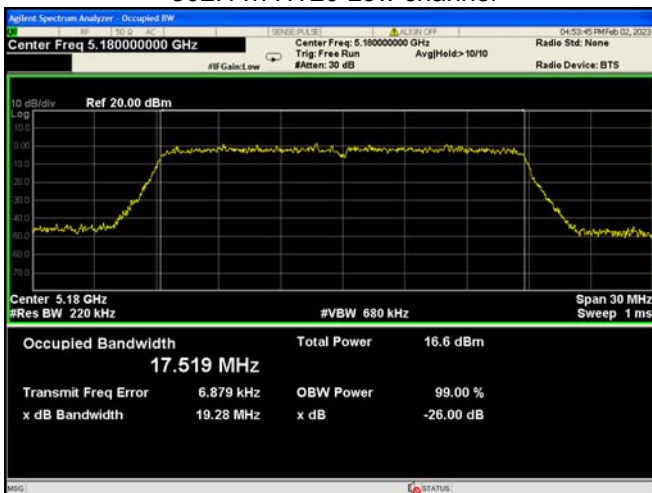


802.11n HT20 Middle channel

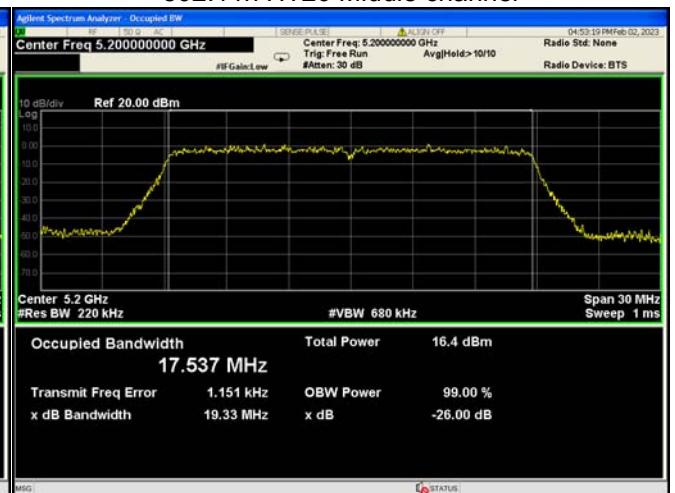


802.11n HT20 High channel

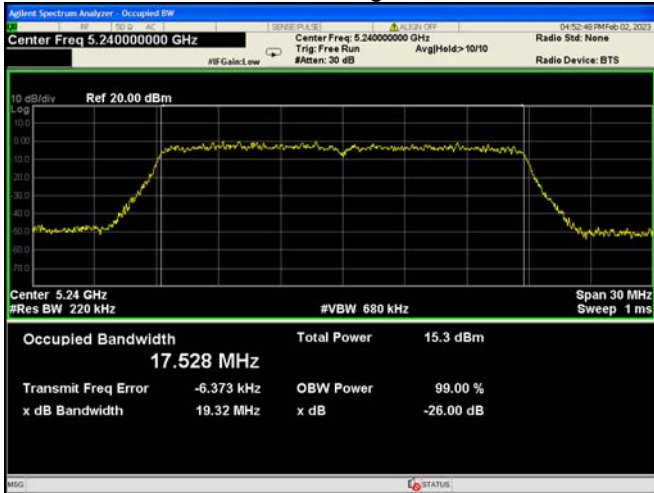


802.11ac VHT20 Low channel

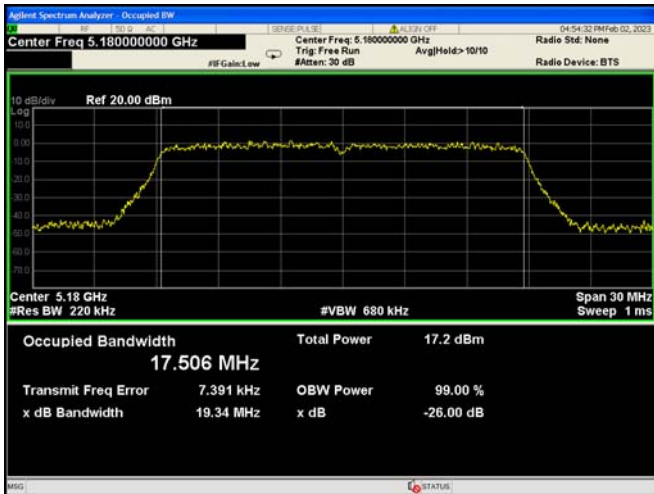


802.11ac VHT20 Middle channel

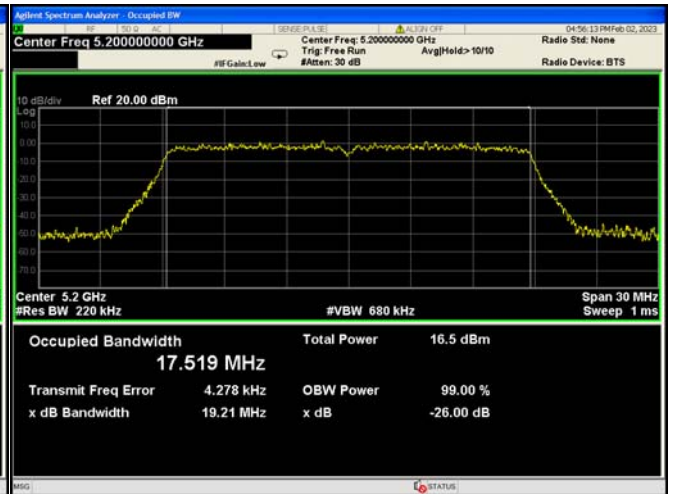


802.11ac VHT20 High channel

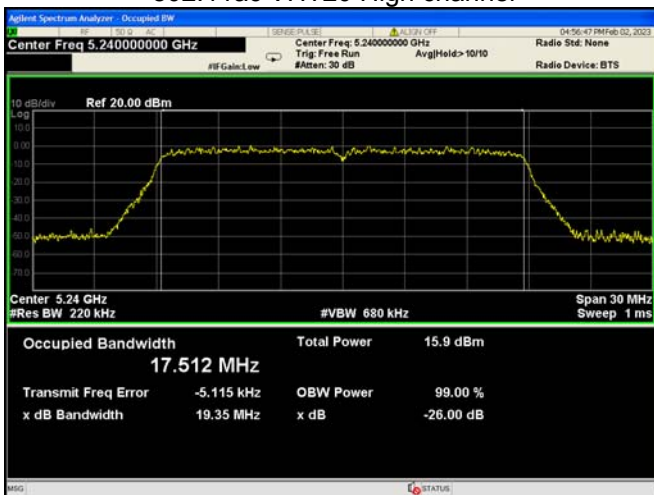


802.11n HT40 Low channel

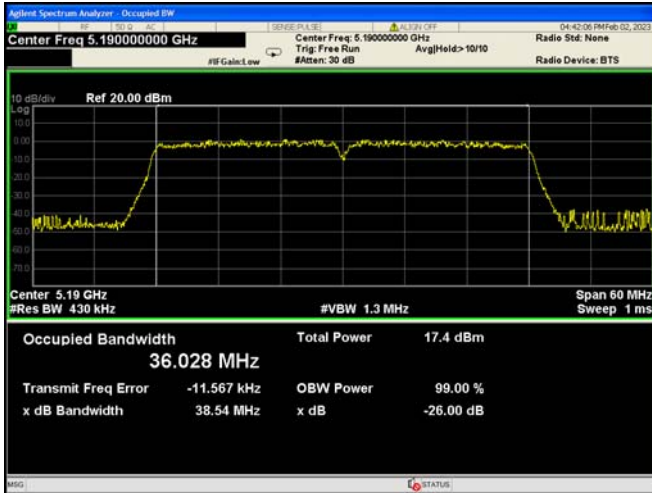


802.11n HT40 High channel

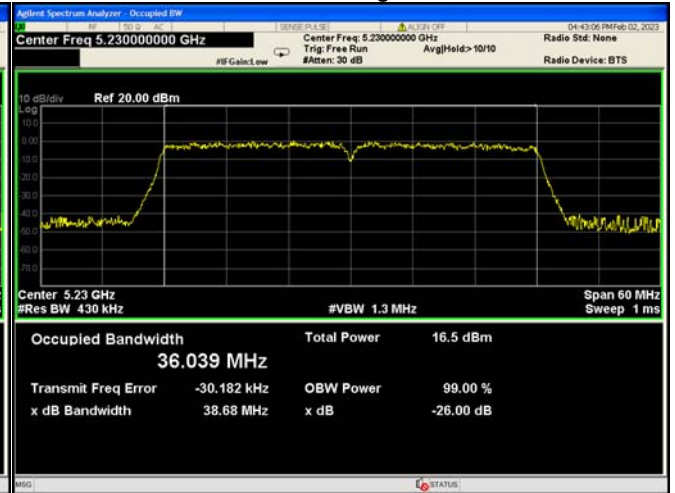

802.11ac VHT40 Low channel

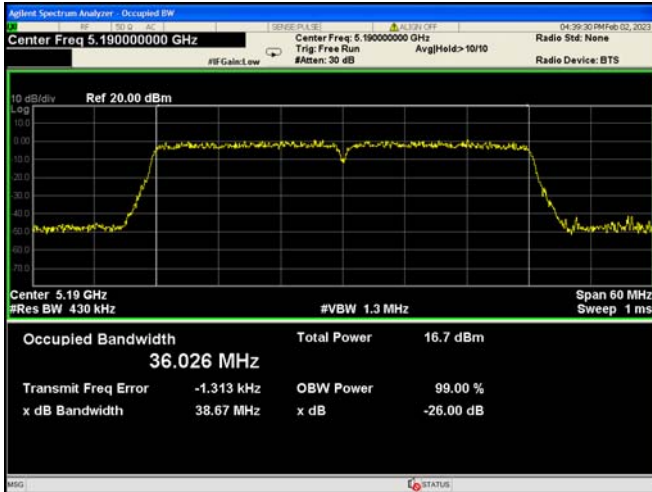

802.11ac VHT40 High channel

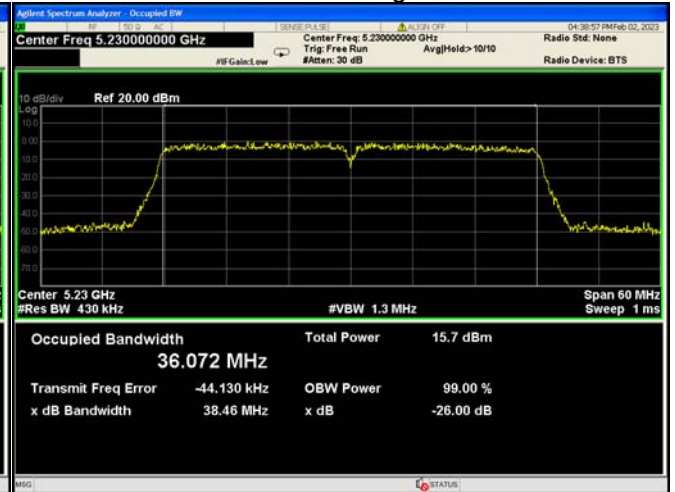


802.11ac VHT80 Middle channel




U-NII-3


802.11a Low channel

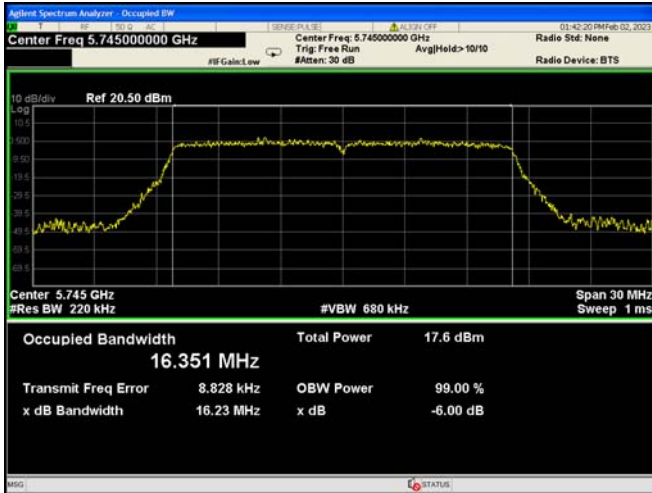


802.11a Middle channel

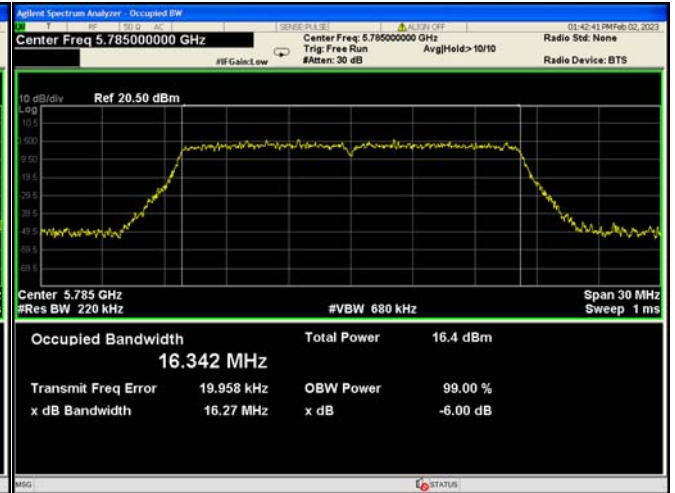

802.11a High channel

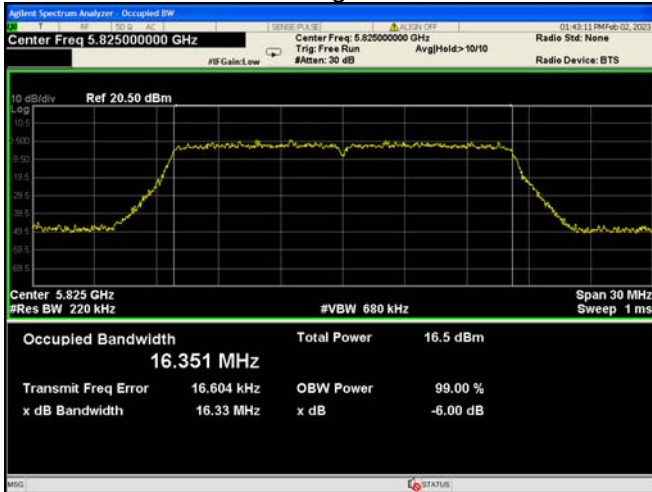


802.11n HT20 Low channel

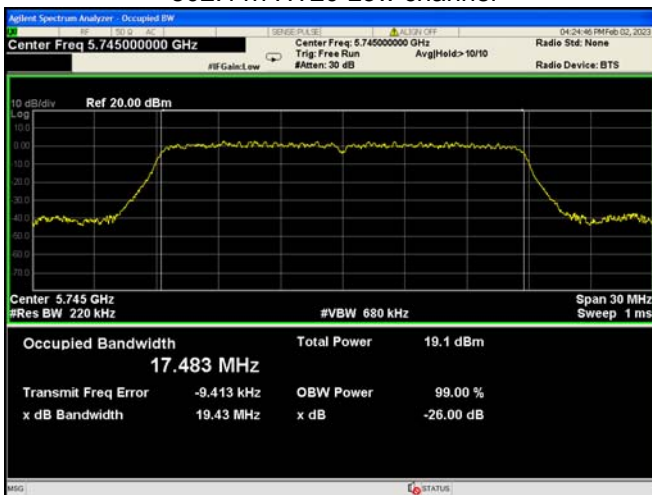


802.11n HT20 Middle channel




802.11n HT20 High channel

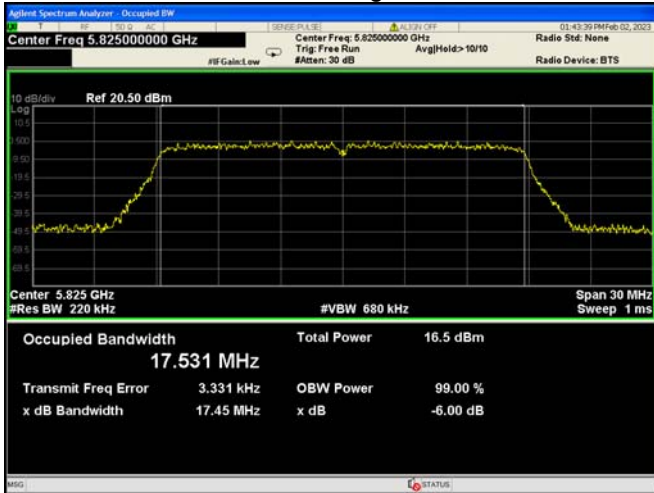


802.11ac VHT20 Low channel

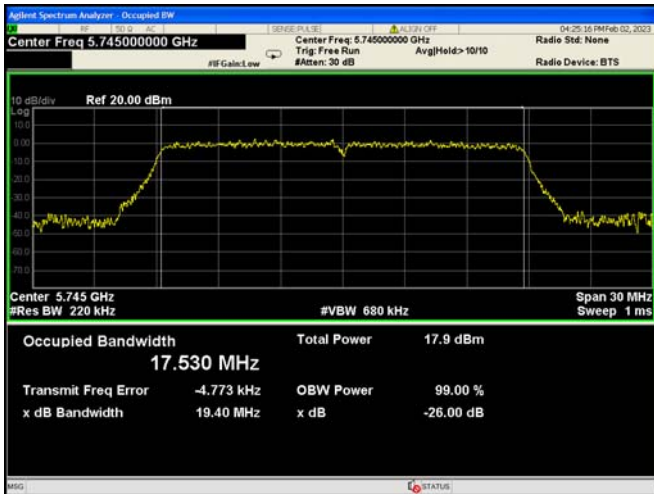


802.11ac VHT20 Middle channel

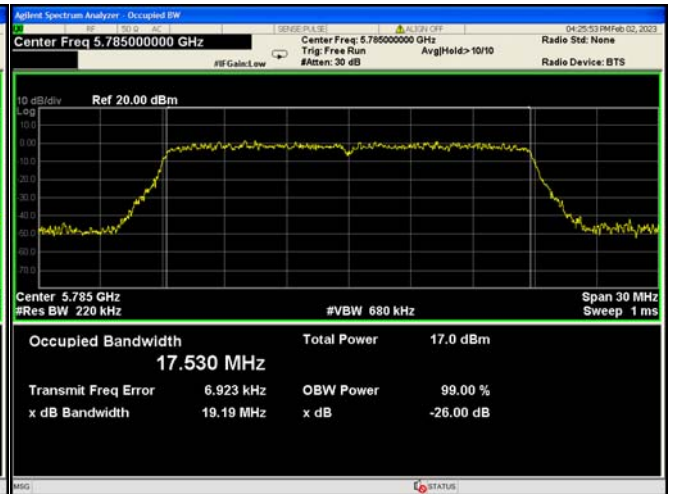


802.11ac VHT20 High channel

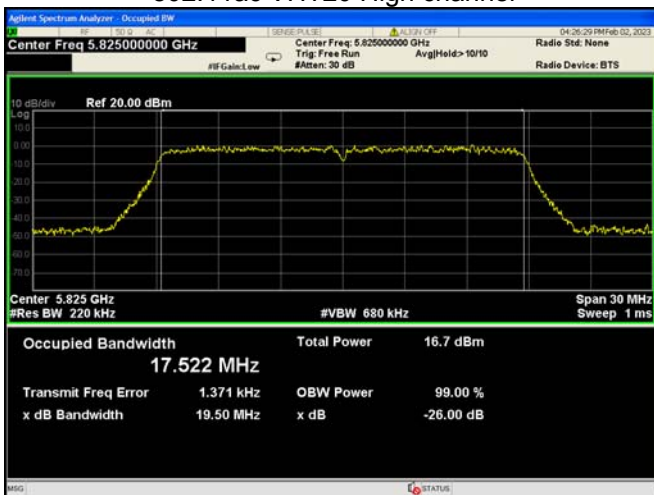


802.11n HT40 Low channel

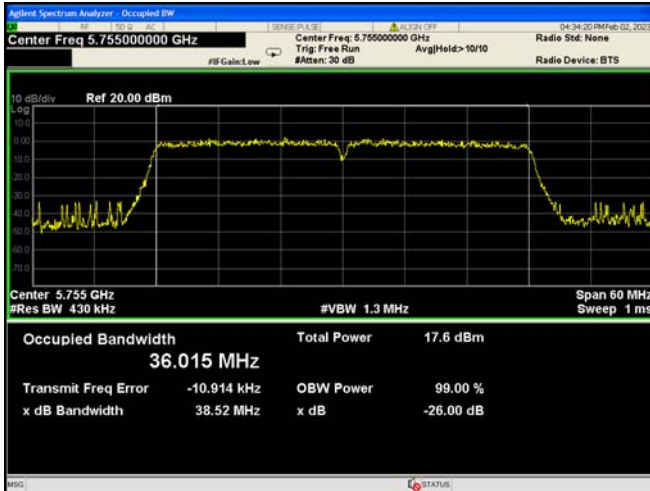


802.11n HT40 High channel

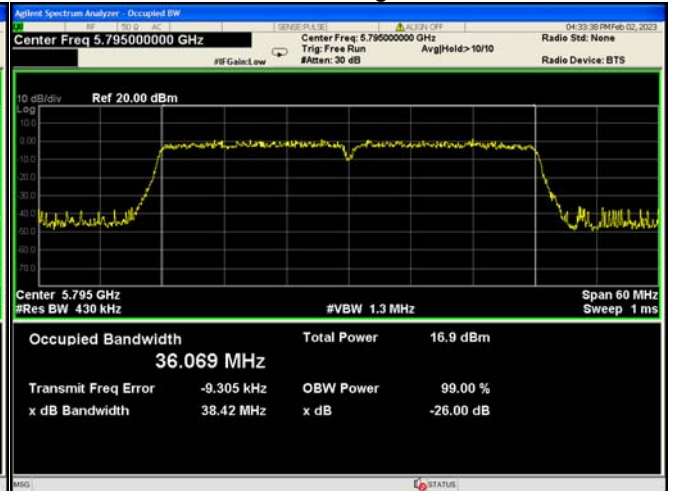

802.11ac VHT40 Low channel

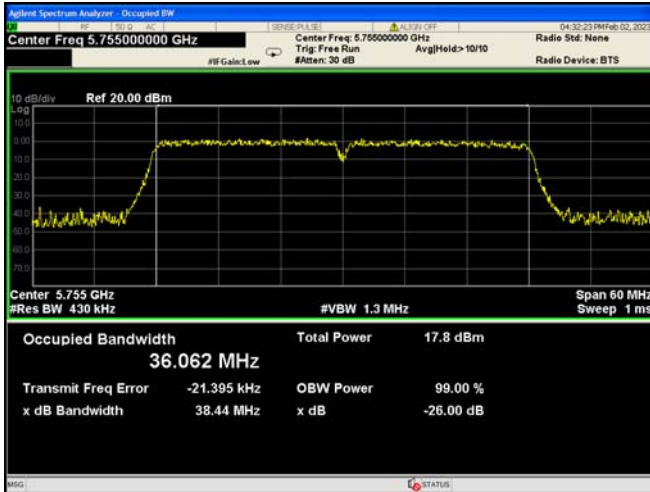

802.11ac VHT40 High channel

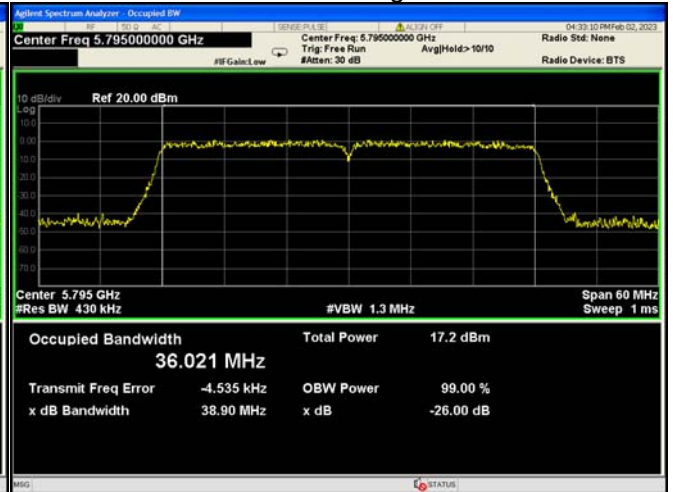

802.11ac VHT80 Middle channel



14 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 Section E ANSI C63.10:2013
Test Limit:	For the band 5.15-5.25 GHz For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. For the band 5.725-5.850 GHz For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
Test Result:	PASS

14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
2. Refer to section 4 of this report, according to KDB 789033 and ANSI C63.10, select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each).
3. Record the test results and calculate the final test data.

14.2 Test Result:

Note:

Conducted Output Power = Measurements + Duty Cycle Factor

According to ANSI C63.10 clause 14.4.3.1,

Directional gain=antenna gain + 10log(N)

N is number of array elements or staves

According to ANSI C63.10 clause 11.7,

For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:

$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{TX}} - 6)$$

For U-NII-1: the Directional gain is 6.01dBi that greater than 6dBi, Limit of power (SUM) is **29.99dBm**.


For U-NII-3: the Directional gain is 6.01dBi that greater than 6dBi, Limit of power (SUM) is **29.99dBm**.

Band	Operation mode	Channel	Duty Cycle Factor (dB)	Conducted Output Power (dBm)			
				Ant. 1	Ant. 2	SUM	Limit
U-NII-1	802.11a	Low	4.56	20.13	18.66	/	30dBm
		Middle		20.68	18.57	/	30dBm
		High		19.66	19.53	/	30dBm
	802.11n(HT20)	Low	5.00	20.60	19.92	23.28	29.99dBm
		Middle		21.01	19.77	23.44	29.99dBm
		High		20.71	20.58	23.66	29.99dBm
	802.11ac(VHT20)	Low	5.10	20.99	19.49	23.31	29.99dBm
		Middle		21.02	19.72	23.43	29.99dBm
		High		20.07	20.84	23.48	29.99dBm
	802.11n(HT40)	Low	7.48	23.74	22.00	25.97	29.99dBm
High		22.60		22.58	25.60	29.99dBm	
802.11ac(VHT40)	Low	7.48	23.62	22.35	26.04	29.99dBm	
	High		23.01	22.40	25.73	29.99dBm	
802.11ac(VHT80)	Middle	10.16	26.25	25.51	28.91	29.99dBm	
U-NII-3	802.11a	Low	4.54	21.83	21.11	/	30dBm
		Middle		20.35	20.80	/	30dBm
		High		20.50	20.26	/	30dBm
	802.11n(HT20)	Low	5.00	20.98	21.42	24.22	29.99dBm
		Middle		22.01	21.20	24.63	29.99dBm
		High		21.61	21.20	24.42	29.99dBm
	802.11ac(VHT20)	Low	5.03	22.87	22.20	25.56	29.99dBm
		Middle		21.82	20.97	24.43	29.99dBm
		High		21.47	21.29	24.39	29.99dBm
	802.11n(HT40)	Low	7.33	24.70	24.59	27.66	29.99dBm
High		23.69		23.37	26.54	29.99dBm	
802.11ac(VHT40)	Low	7.33	24.88	23.77	27.37	29.99dBm	
	High		23.32	22.79	26.07	29.99dBm	
802.11ac(VHT80)	Middle	9.85	26.10	27.15	29.67	29.99dBm	


Test plots refer to next page:

Ant. 1
U-NII-1


802.11a Low channel

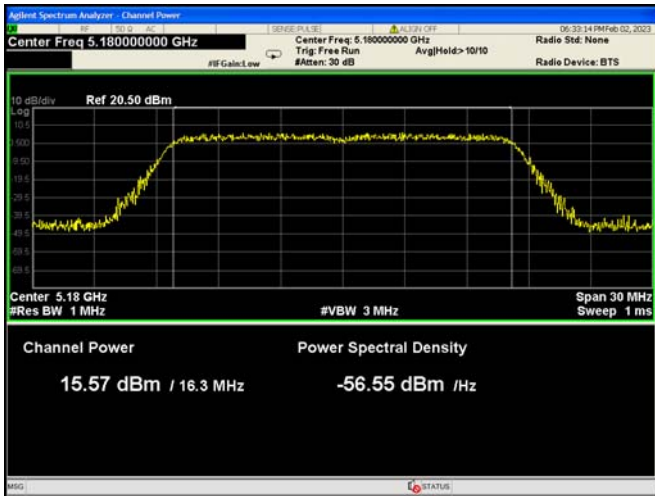


802.11a Middle channel

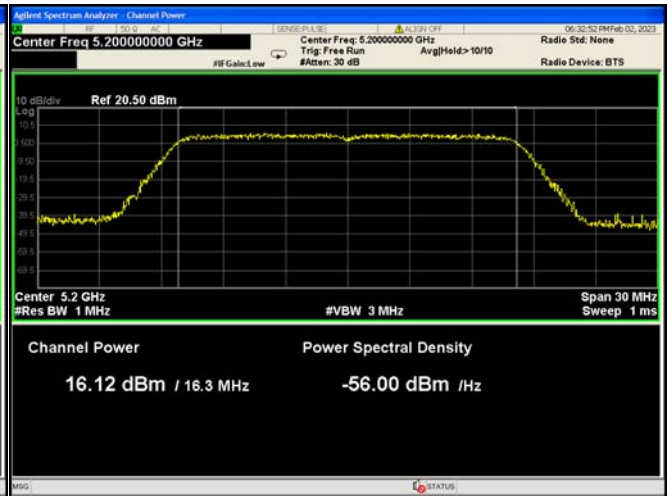


802.11a High channel

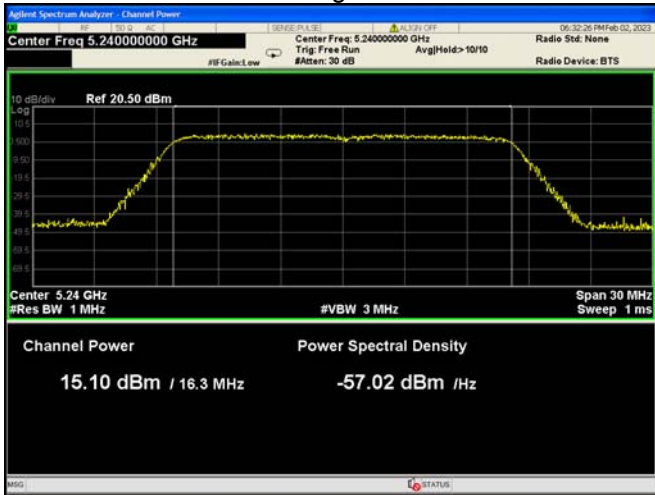


802.11n HT20 Low channel

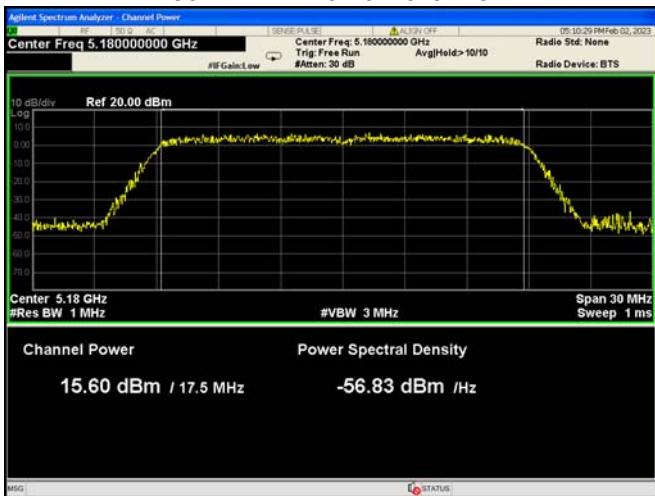


802.11n HT20 Middle channel

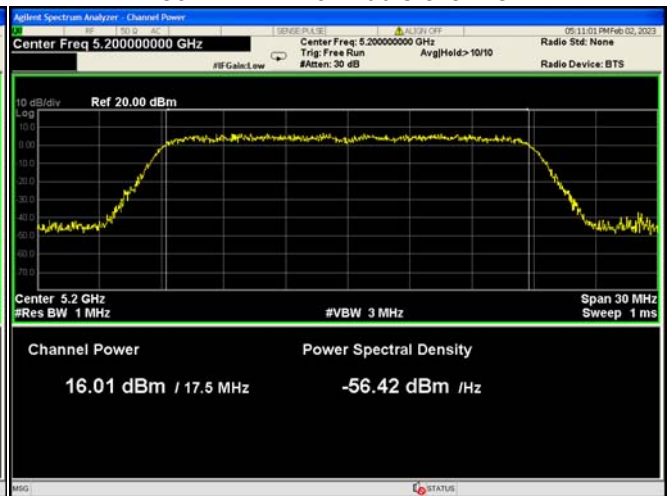


802.11n HT20 High channel

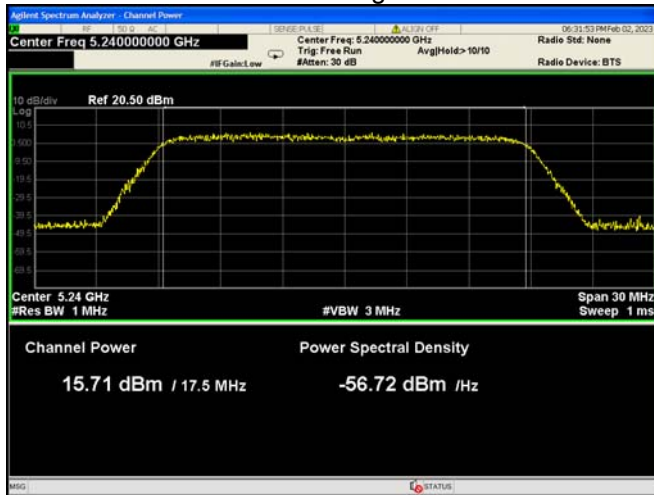


802.11ac VHT20 Low channel

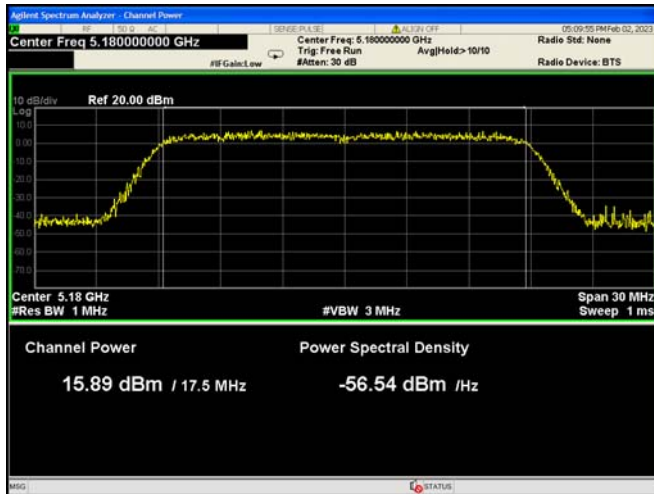


802.11ac VHT20 Middle channel

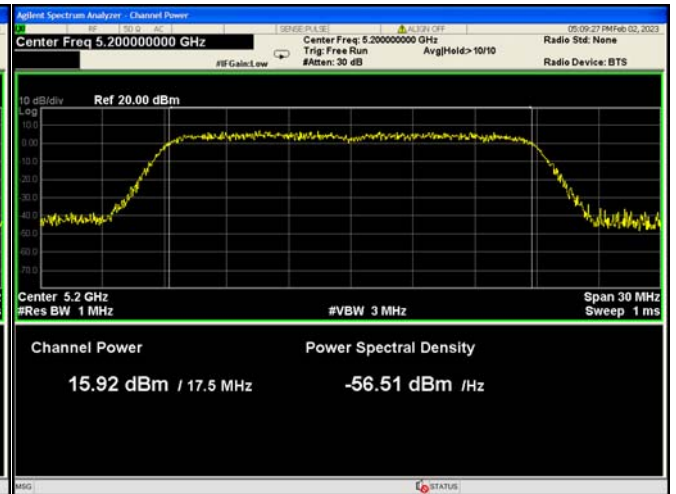


802.11ac VHT20 High channel

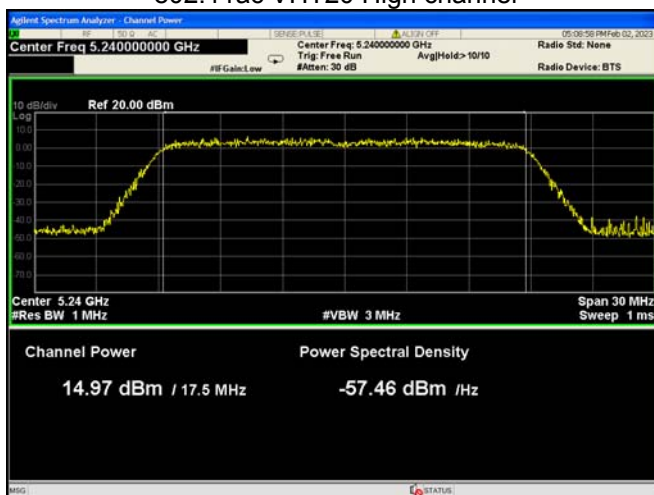


802.11n HT40 Low channel

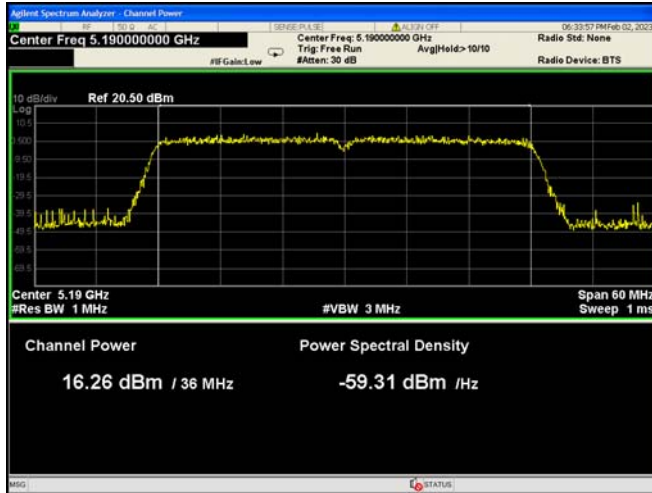


802.11n HT40 High channel

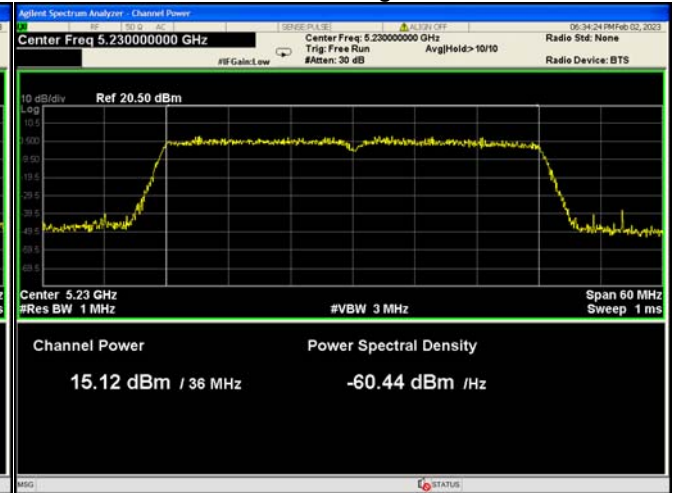


802.11ac VHT40 Low channel

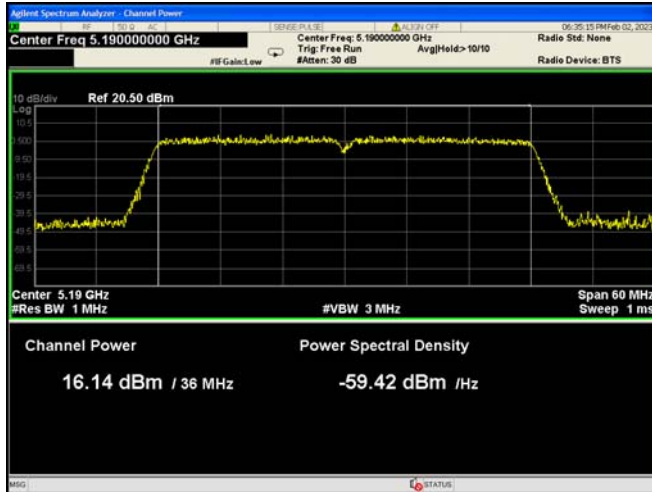

802.11ac VHT40 High channel

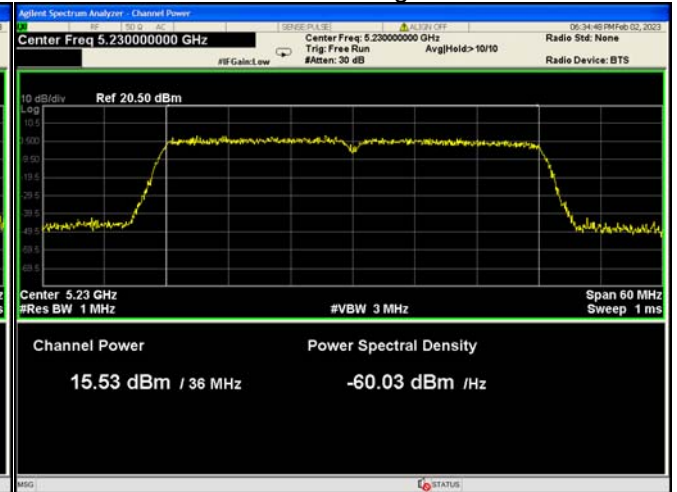


802.11ac VHT80 Middle channel

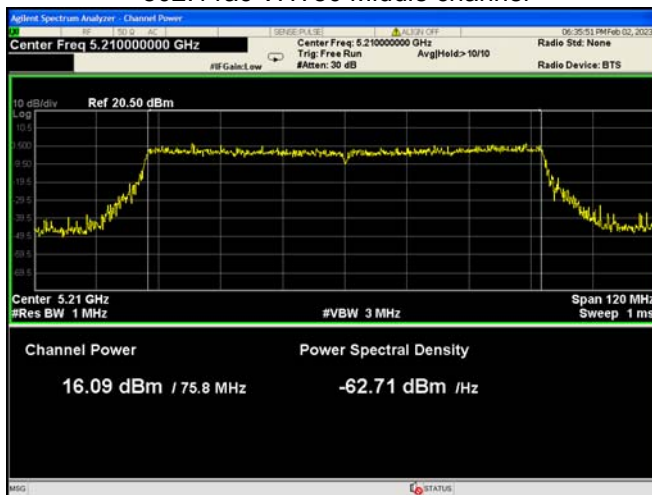


U-NII-3


802.11a Low channel

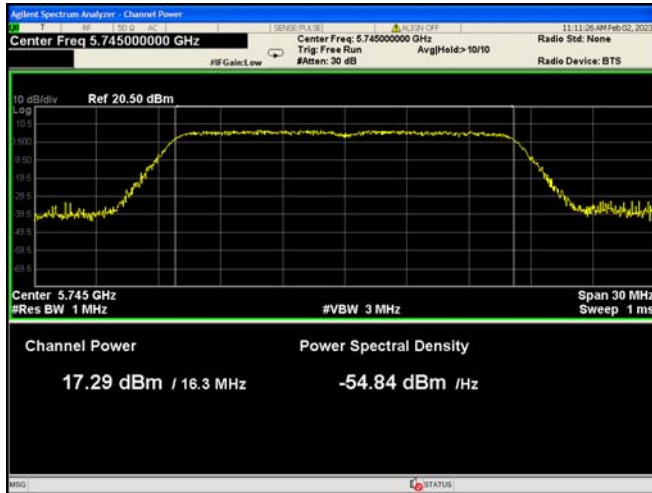


802.11a Middle channel

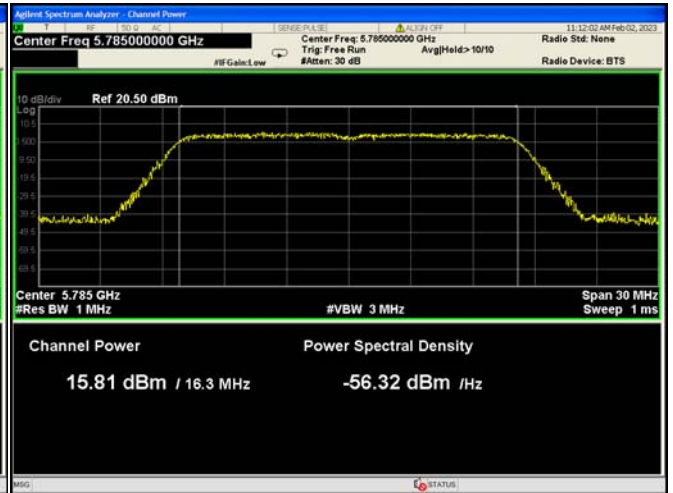


802.11a High channel

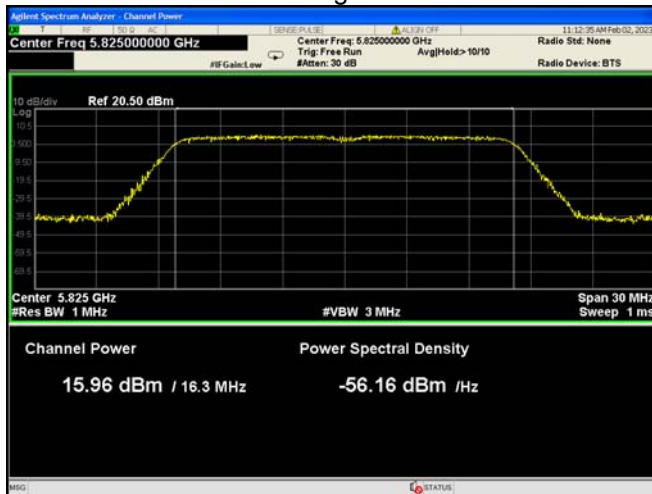


802.11n HT20 Low channel

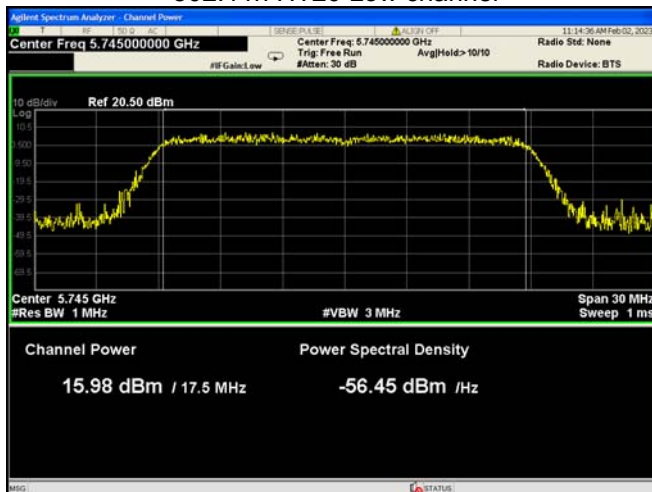


802.11n HT20 Middle channel

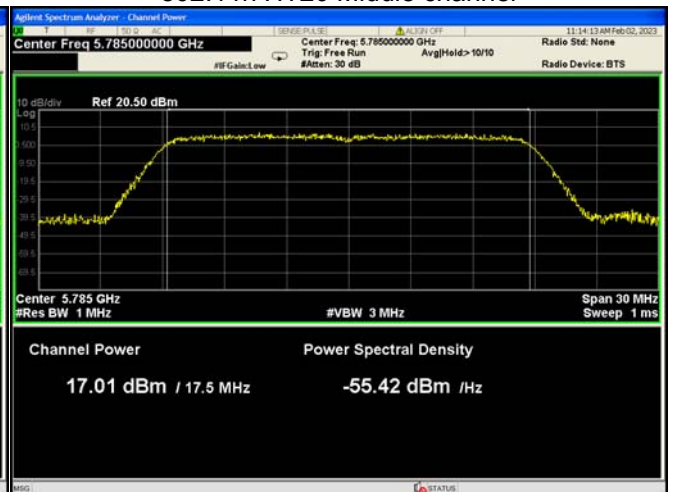


802.11n HT20 High channel

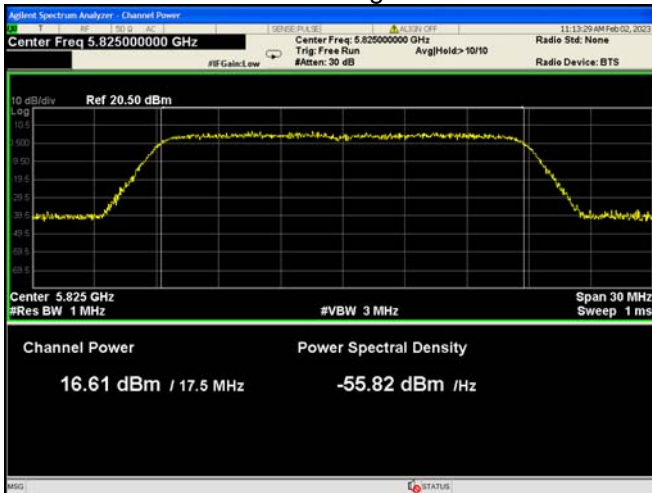


802.11ac VHT20 Low channel

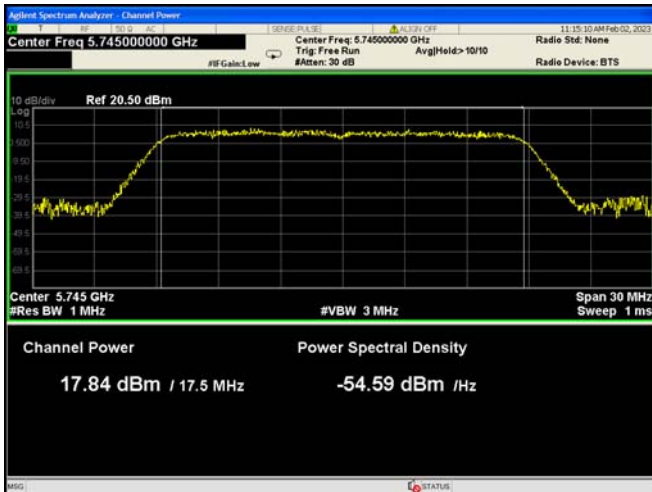


802.11ac VHT20 Middle channel

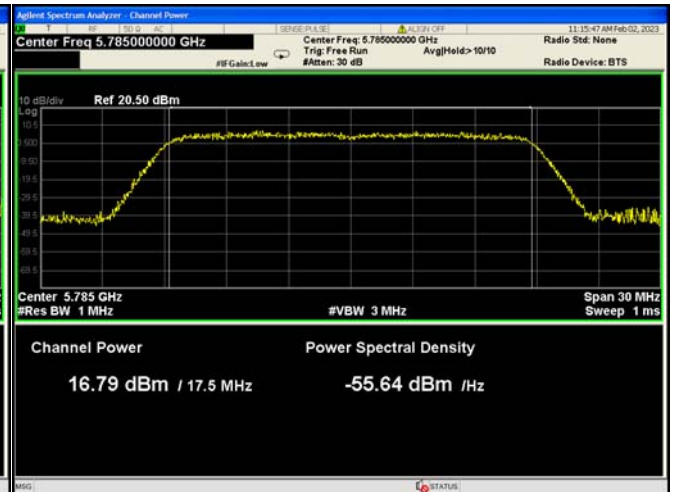


802.11ac VHT20 High channel

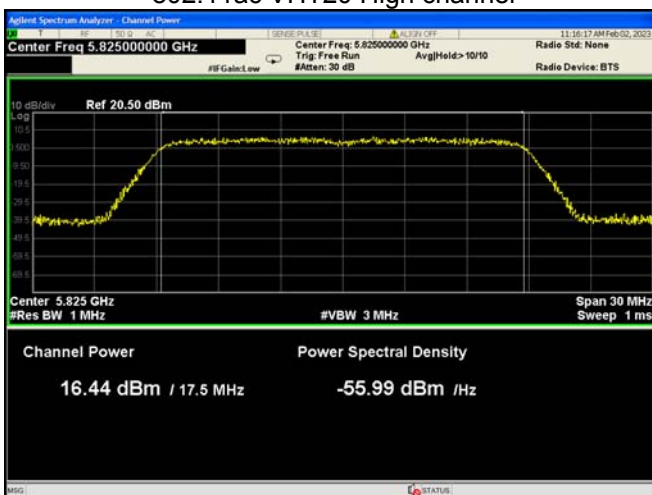


802.11n HT40 Low channel

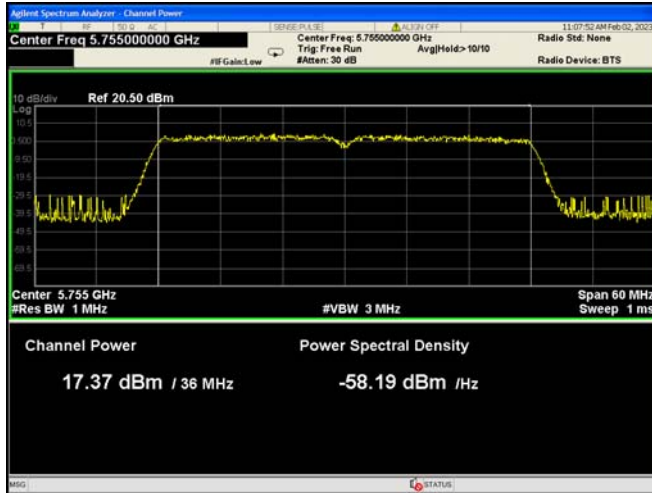


802.11n HT40 High channel

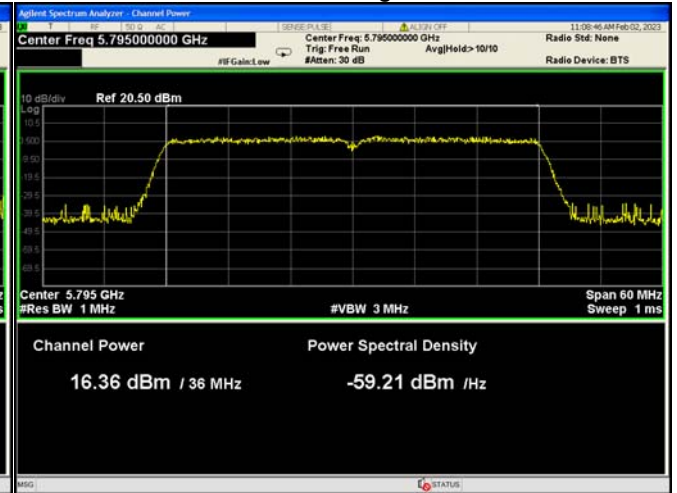


802.11ac VHT40 Low channel

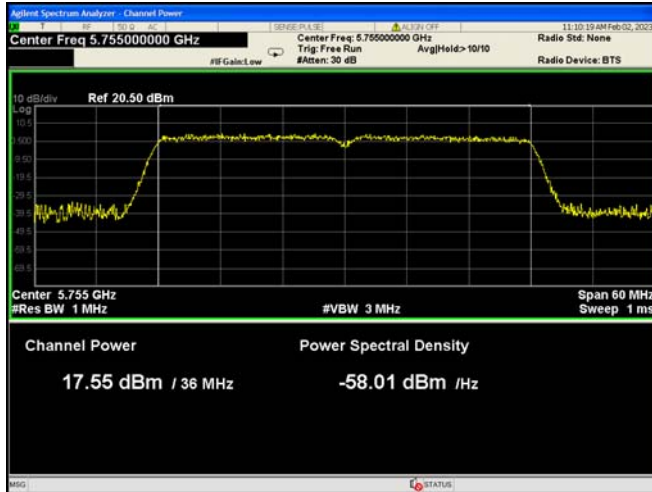

802.11ac VHT40 High channel

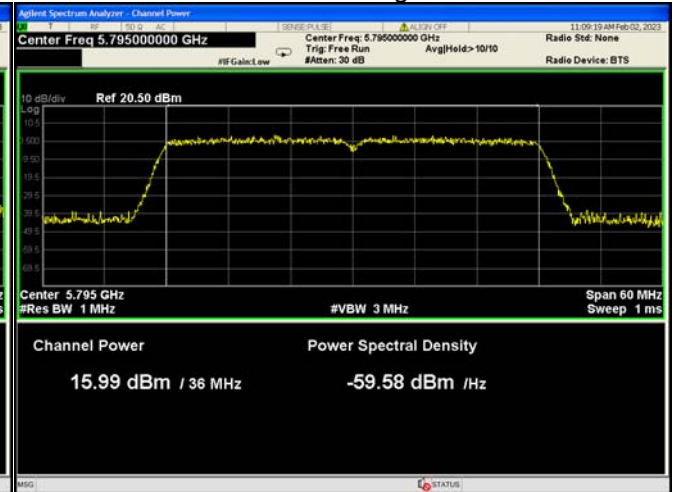


802.11ac VHT80 Middle channel

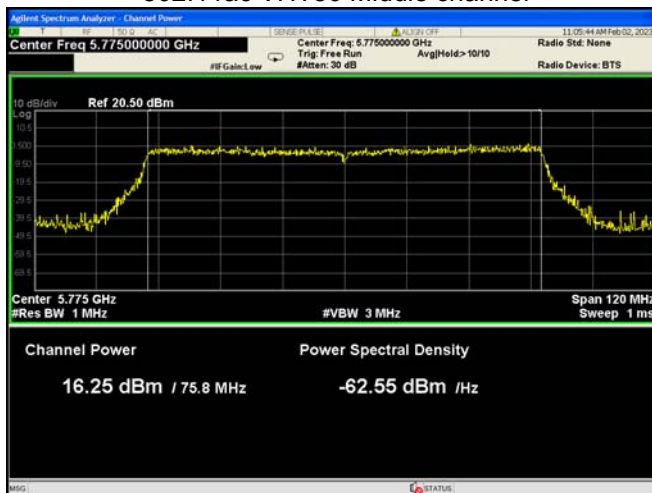


Ant. 2
U-NII-1


802.11a Low channel

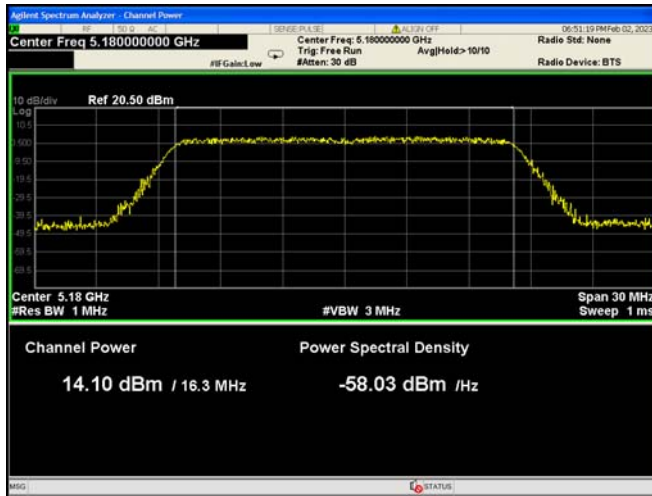


802.11a Middle channel

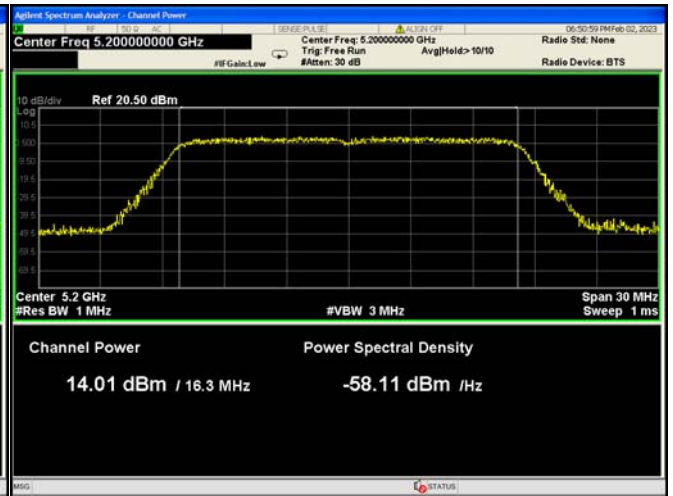


802.11a High channel

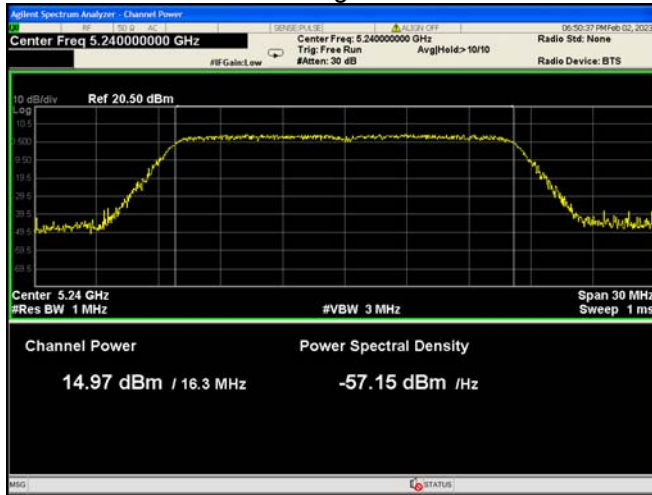


802.11n HT20 Low channel

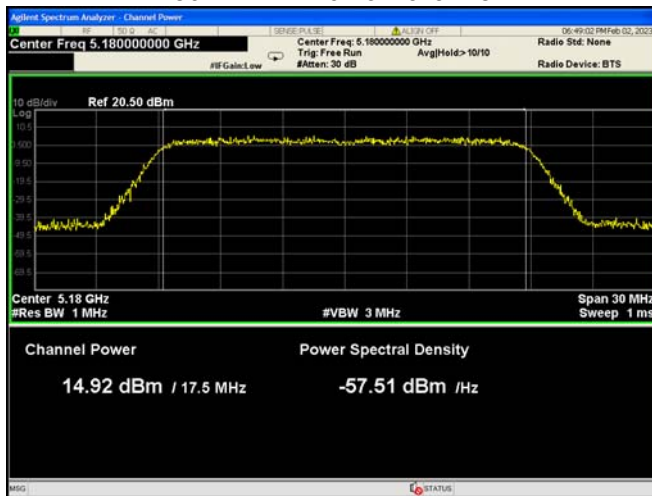


802.11n HT20 Middle channel

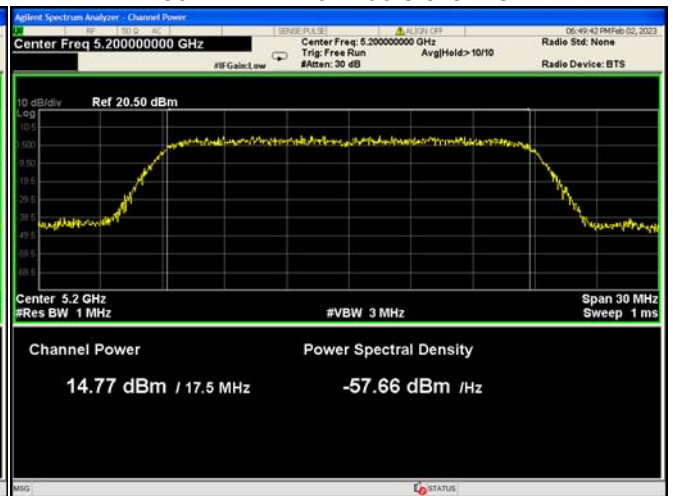


802.11n HT20 High channel

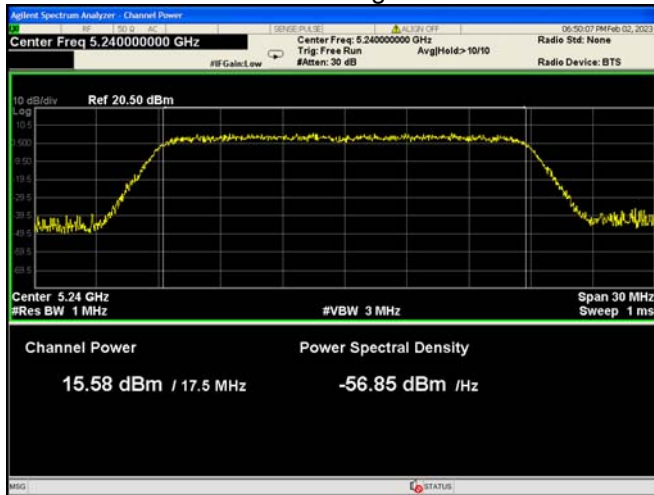

802.11ac VHT20 Low channel

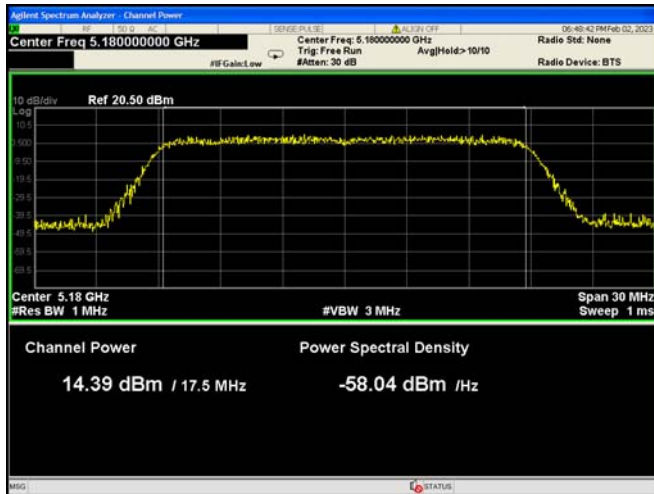


802.11ac VHT20 Middle channel

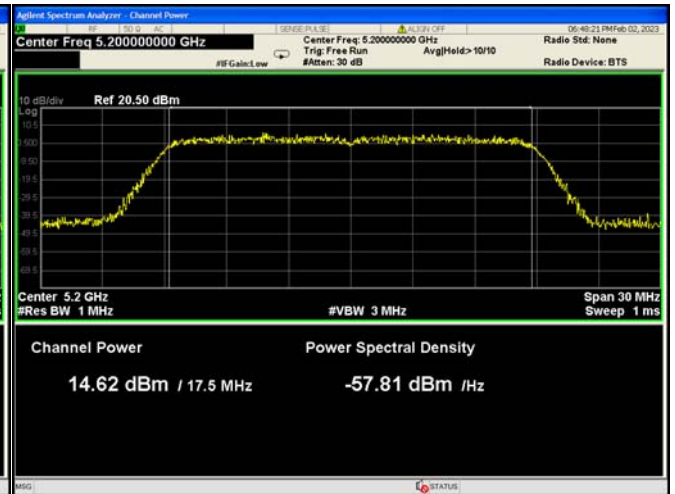


802.11ac VHT20 High channel




802.11n HT40 Low channel

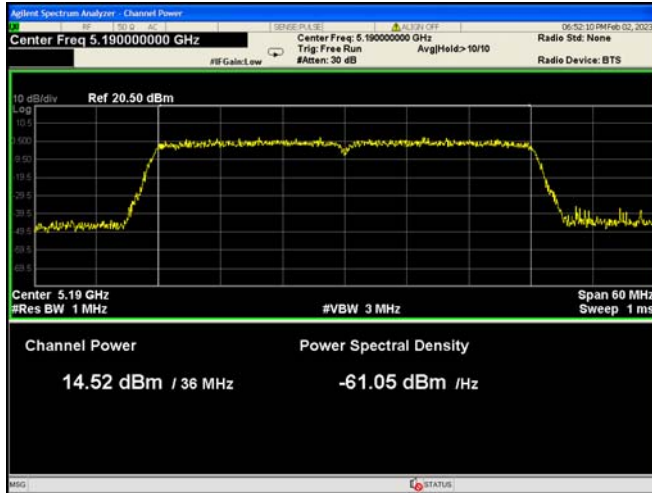


802.11n HT40 High channel

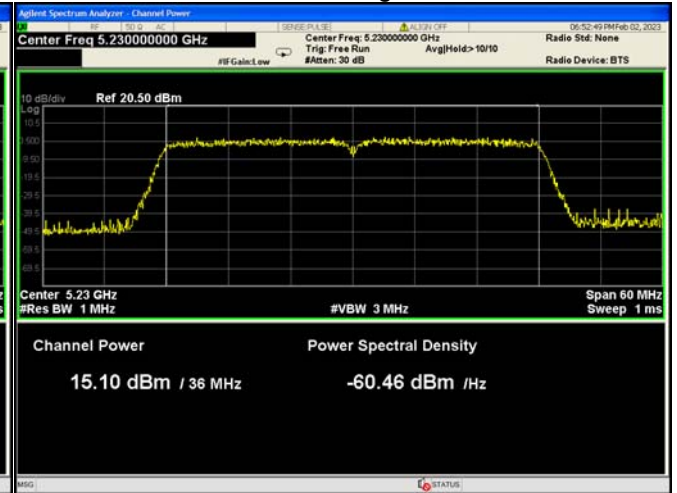


802.11ac VHT40 Low channel

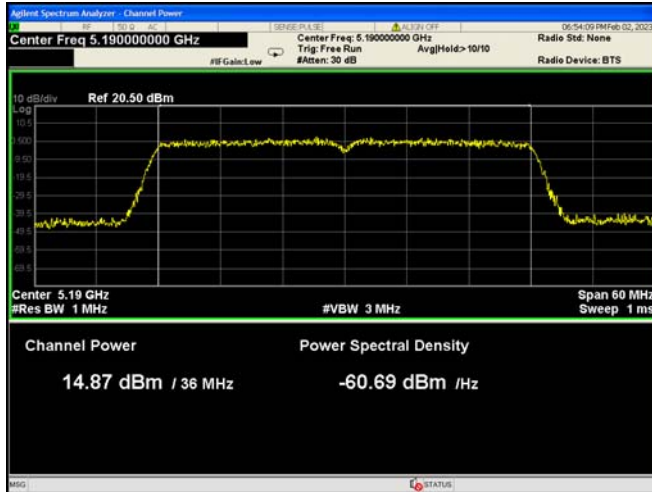

802.11ac VHT40 High channel

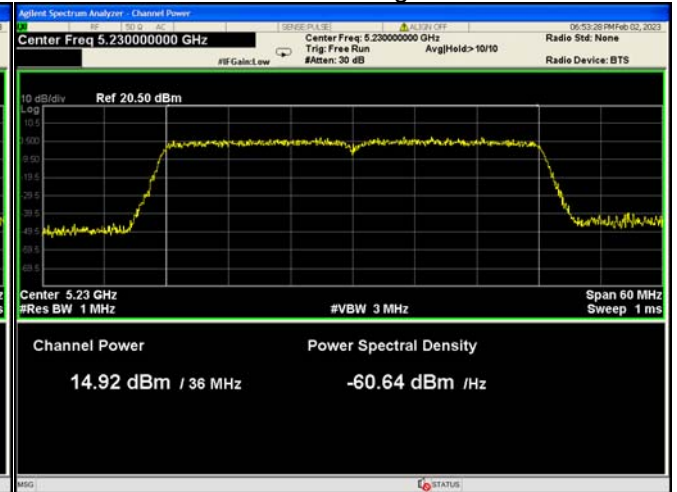


802.11ac VHT80 Middle channel

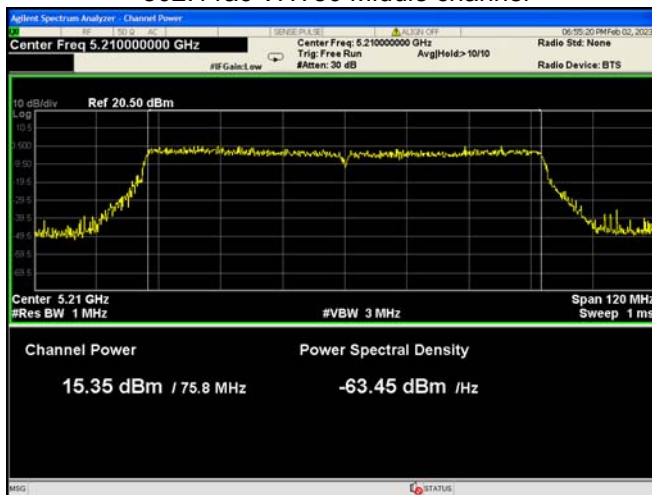


U-NII-3


802.11a Low channel

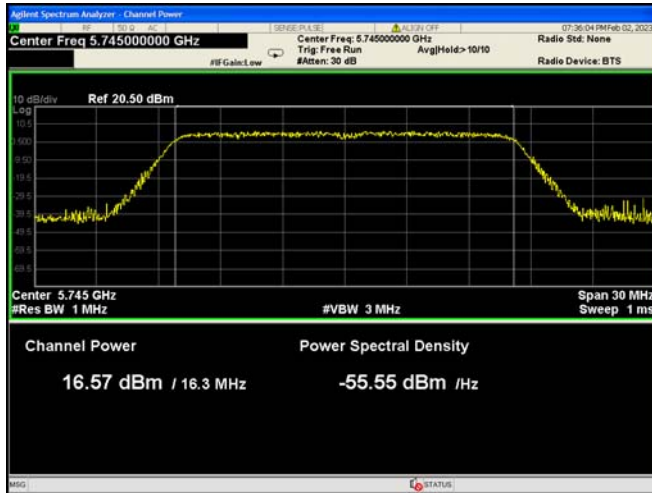


802.11a Middle channel

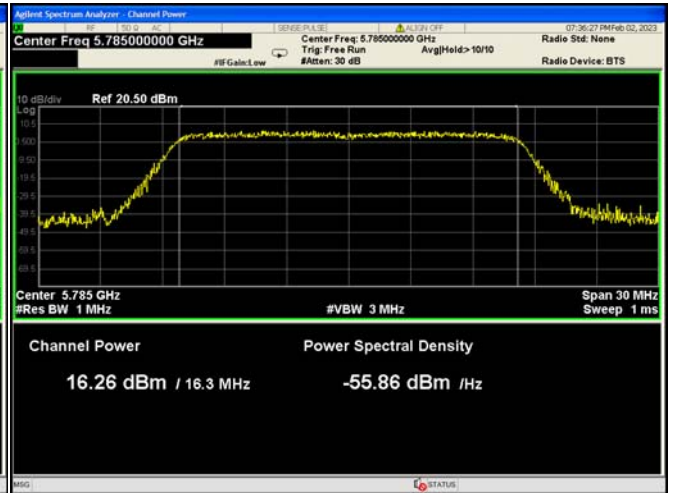


802.11a High channel

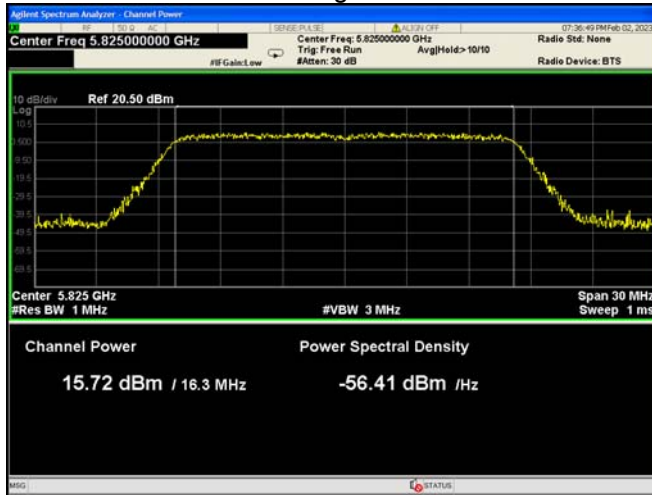


802.11n HT20 Low channel

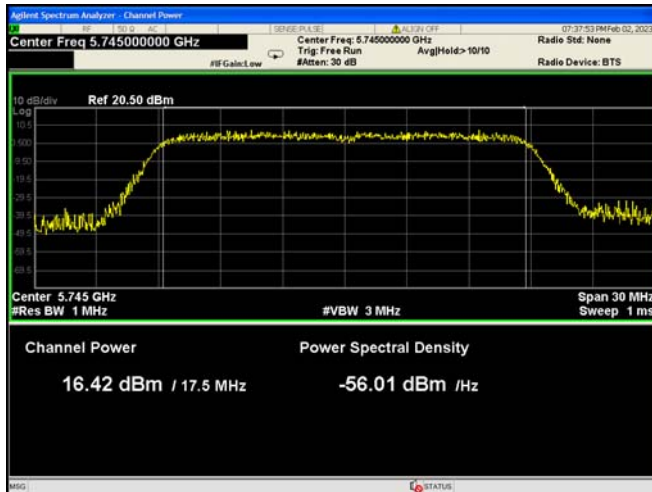


802.11n HT20 Middle channel

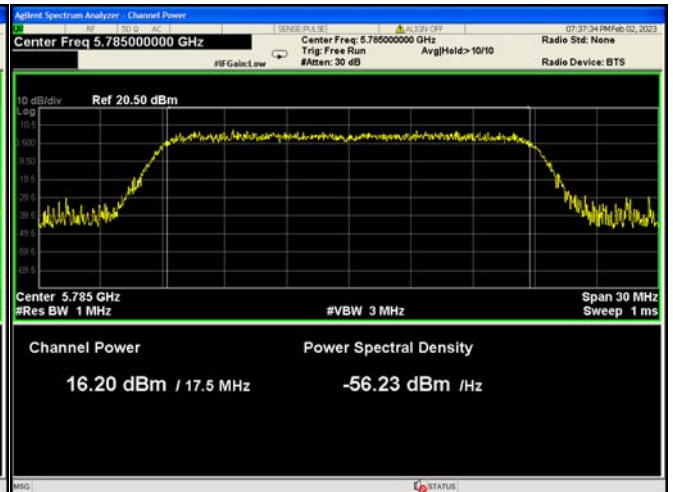


802.11n HT20 High channel

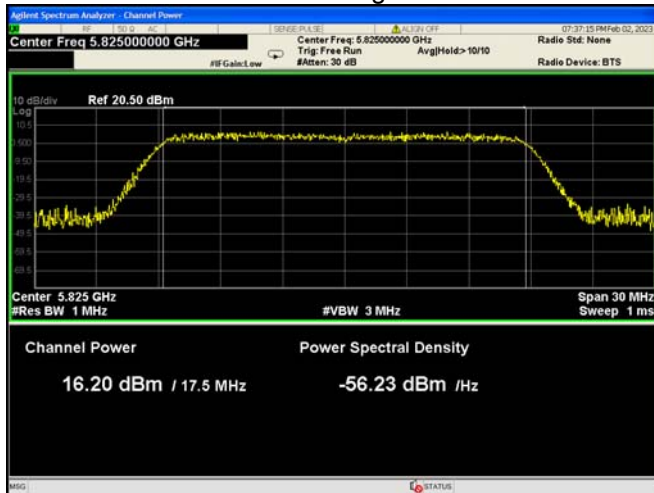


802.11ac VHT20 Low channel

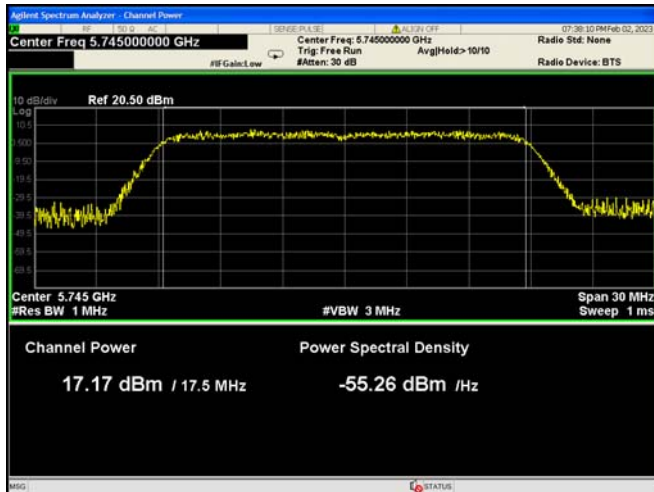


802.11ac VHT20 Middle channel

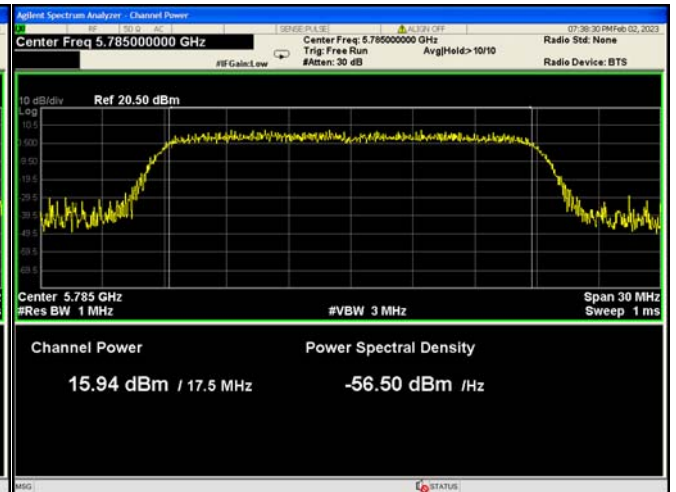


802.11ac VHT20 High channel

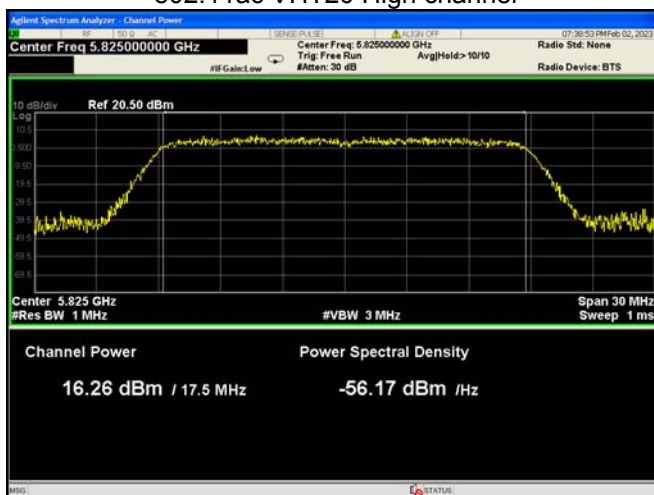


802.11n HT40 Low channel

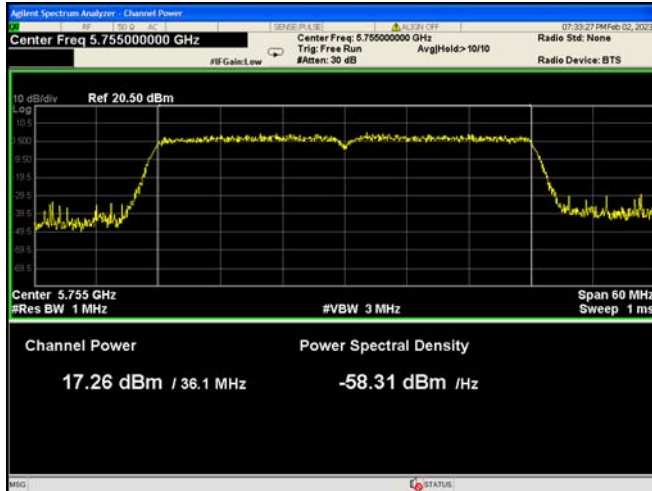


802.11n HT40 High channel

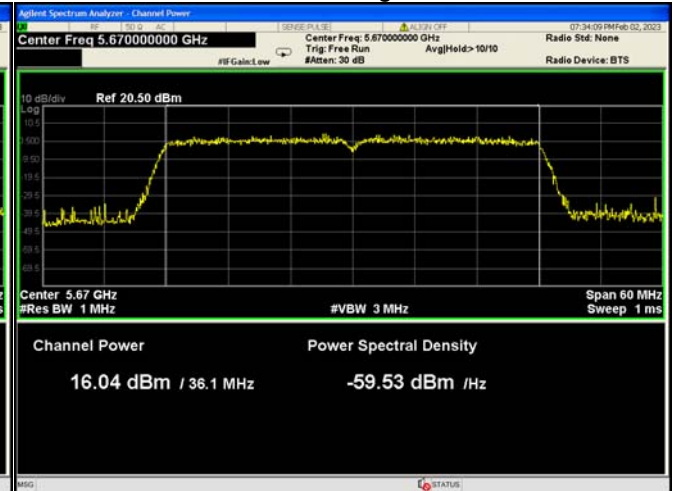


802.11ac VHT40 Low channel

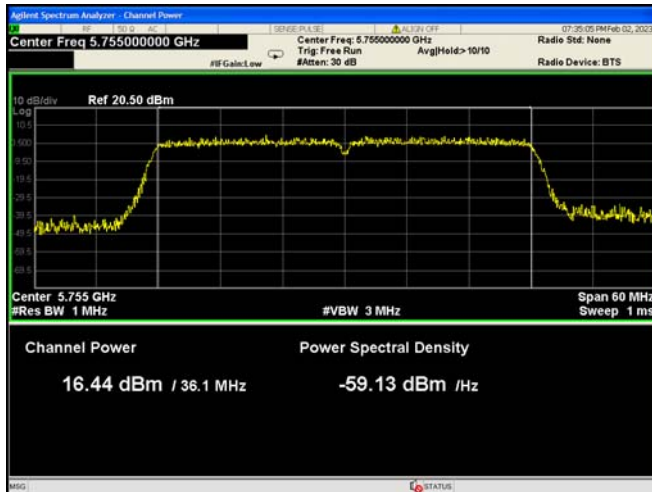

802.11ac VHT40 High channel

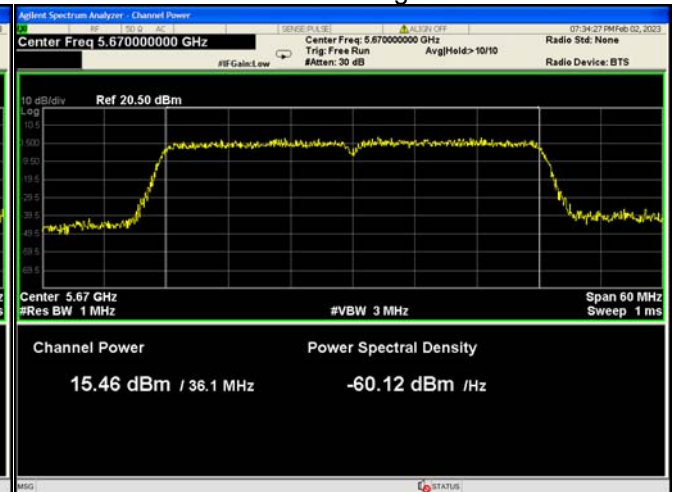

802.11ac VHT80 Middle channel

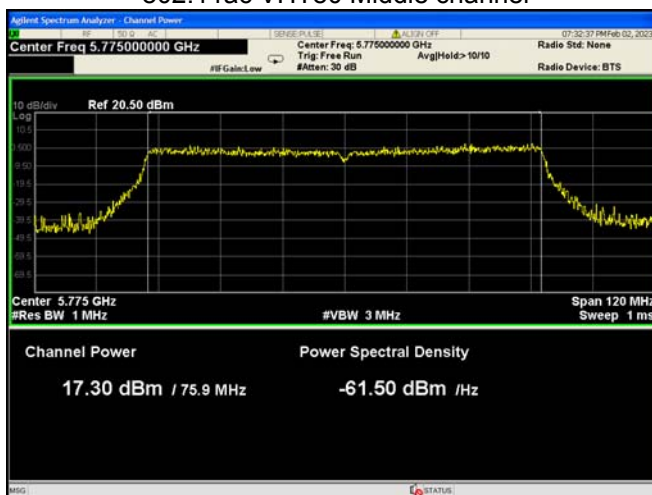

15 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB 662911 D01 Multiple Transmitter Output v02r01, October 31, 2013 ANSI C63.10:2013
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Section F
Test Limit:	For the band 5.15-5.25 GHz For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. For the band 5.725-5.850 GHz The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.
Test Result:	PASS

15.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
2. Refer to section 4 of this report, according to KDB 789033 and ANSI C63.10, select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each).
3. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
4. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
5. The result is the Maximum PSD over 1 MHz reference bandwidth.
6. For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

15.2 Test Result:

Band	Operation mode	Channel	Duty Cycle Factor (dB)	Power Spectral density (dBm)			
				Ant. 1	Ant. 2	SUM	Limit
U-NII-1	802.11a	Low	4.56	5.90	4.74	/	17dBm/MHz
		Middle		5.60	4.50	/	17dBm/MHz
		High		4.82	4.54	/	17dBm/MHz
	802.11n(HT20)	Low	5.00	5.96	4.63	8.36	16.99dBm/MHz
		Middle		5.95	4.73	8.39	16.99dBm/MHz
		High		5.28	4.79	8.05	16.99dBm/MHz
	802.11ac(VHT20)	Low	5.10	5.90	4.83	8.41	16.99dBm/MHz
		Middle		6.10	4.80	8.51	16.99dBm/MHz
		High		5.28	4.59	7.96	16.99dBm/MHz
	802.11n(HT40)	Low	7.48	6.06	4.40	8.32	16.99dBm/MHz
		High		5.59	4.47	8.08	16.99dBm/MHz
	802.11ac(VHT40)	Low	7.48	5.93	4.22	8.17	16.99dBm/MHz
High		5.33		4.40	7.90	16.99dBm/MHz	
802.11ac(VHT80)	Middle	10.16	6.09	4.85	8.52	16.99dBm/MHz	
U-NII-3	802.11a	Low	4.54	6.32	6.08	/	30dBm/500kHz
		Middle		5.08	6.09	/	30dBm/500kHz
		High		4.98	5.06	/	30dBm/500kHz
	802.11n(HT20)	Low	5.00	6.72	6.45	9.60	29.99dBm/500kHz
		Middle		5.78	6.85	9.35	29.99dBm/500kHz
		High		5.47	5.97	8.74	29.99dBm/500kHz
	802.11ac(VHT20)	Low	5.03	6.67	6.29	9.49	29.99dBm/500kHz
		Middle		5.90	6.80	9.39	29.99dBm/500kHz
		High		5.57	5.56	8.57	29.99dBm/500kHz
	802.11n(HT40)	Low	7.33	6.37	6.41	9.40	29.99dBm/500kHz
		High		5.49	5.26	8.38	29.99dBm/500kHz
	802.11ac(VHT40)	Low	7.33	6.19	6.37	9.29	29.99dBm/500kHz
		High		5.46	5.52	8.50	29.99dBm/500kHz
	802.11ac(VHT80)	Middle	9.85	6.13	6.87	9.52	29.99dBm/500kHz

Note:**Conducted Output Power = Measurements + Duty Cycle Factor**

According to ANSI C63.10 clause 14.4.3.1,

$$\text{Directional gain} = \text{antenna gain} + 10\log(N)$$

N is number of array elements or staves

According to ANSI C63.10 clause 11.7,

For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:

$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{TX}} - 6)$$

For U-NII-1: the Directional gain is 6.01dBi that greater than 6dBi, Limit of PSD (SUM) is

16.99dBm/MHz.


For U-NII-3: the Directional gain is 6.01dBi that greater than 6dBi, Limit of PSD (SUM) is

29.99dBm/500kHz.

Test plots refer to next page:


**Ant. 1
U-NII-1**

802.11a Low channel

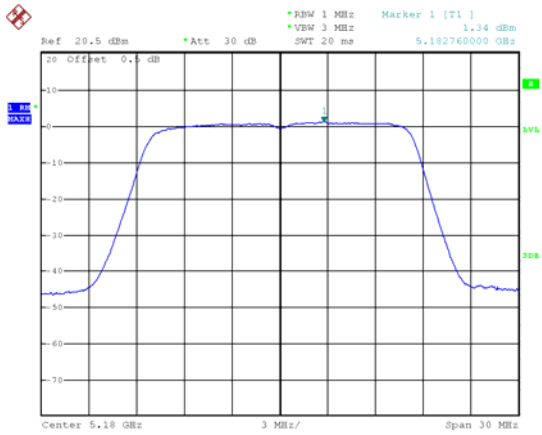


Date: 1.FEB.2023 19:54:10

802.11a Middle channel

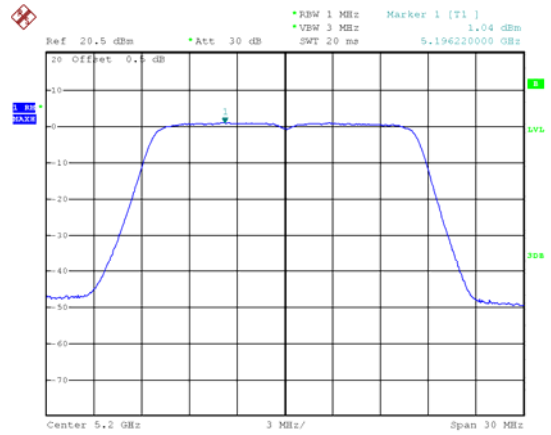


Date: 1.FEB.2023 19:54:40

802.11a High channel

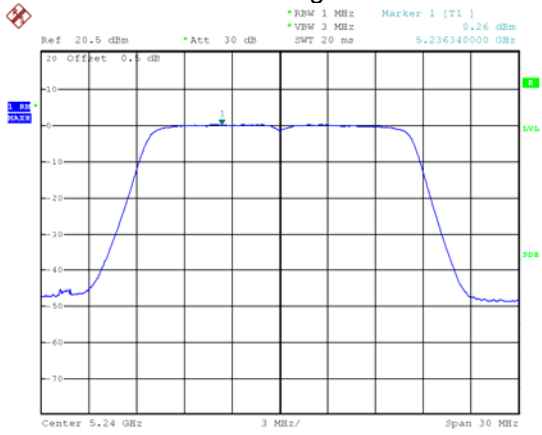


Date: 1.FEB.2023 19:55:07

802.11n HT20 Low channel

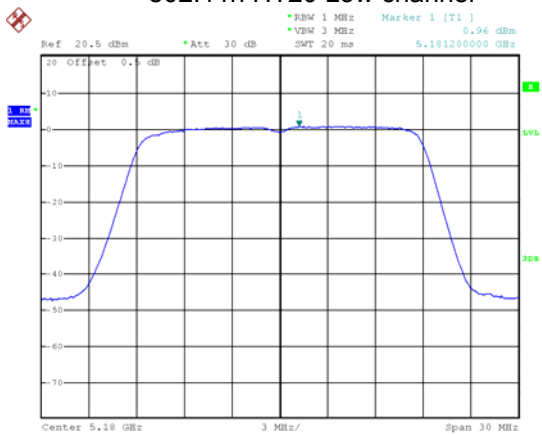


Date: 1.FEB.2023 19:56:34

802.11n HT20 Middle channel

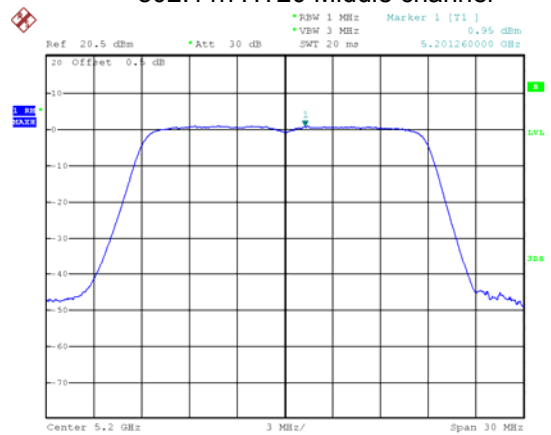


Date: 1.FEB.2023 19:56:03

802.11n HT20 High channel

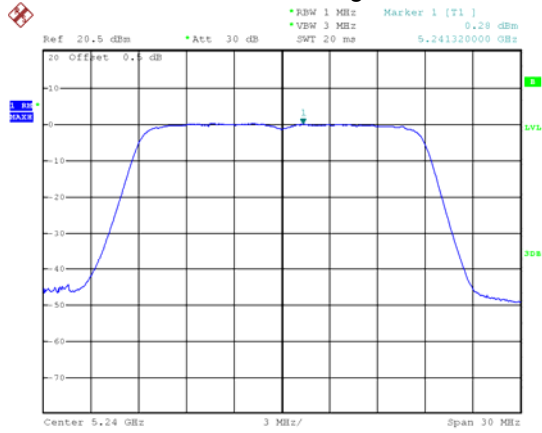


Date: 1.FEB.2023 19:55:34

802.11ac VHT20 Low channel

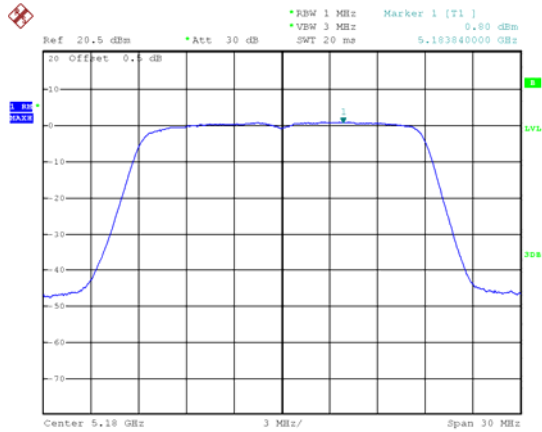


Date: 1.FEB.2023 19:56:59

802.11ac VHT20 Middle channel

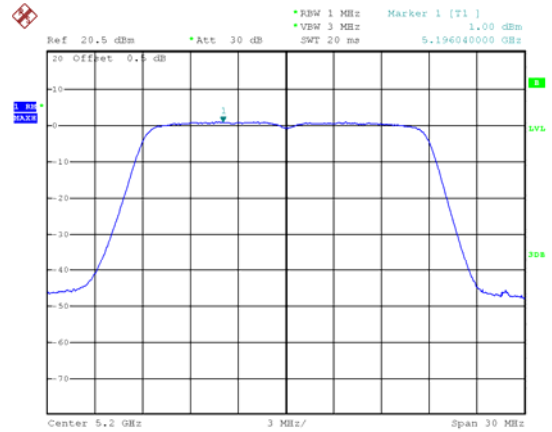


Date: 1.FEB.2023 19:57:22

802.11ac VHT20 High channel

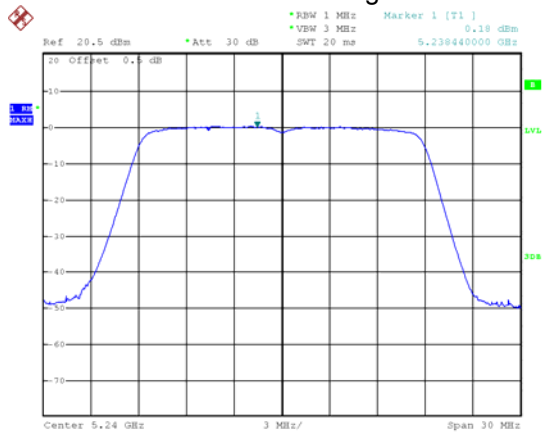


Date: 1.FEB.2023 19:57:46

802.11n HT40 Low channel

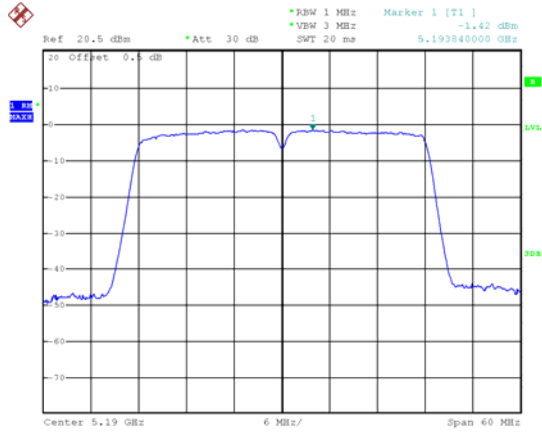


Date: 1.FEB.2023 19:53:43

802.11n HT40 High channel

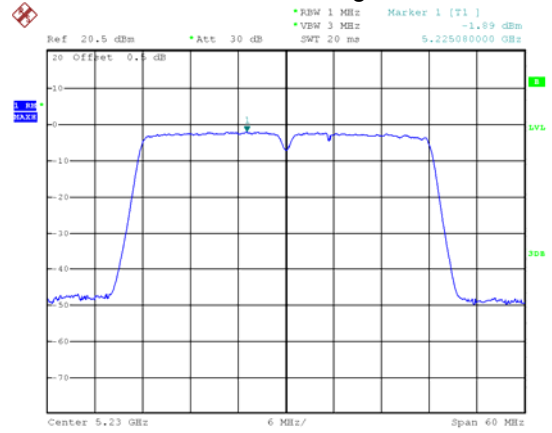


Date: 1.FEB.2023 19:53:15

802.11ac VHT40 Low channel

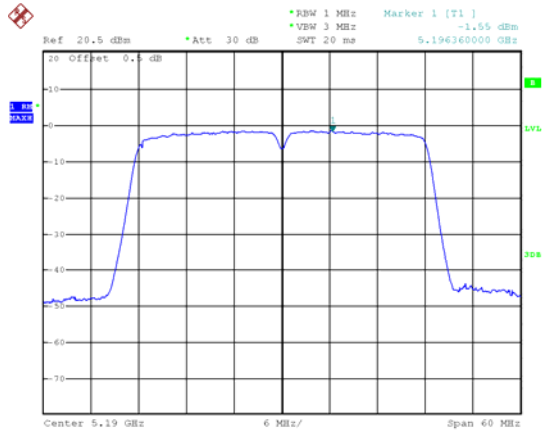


Date: 1.FEB.2023 19:52:16

802.11ac VHT40 High channel

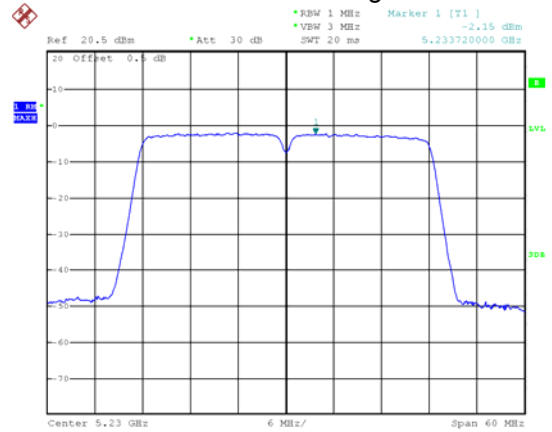


Date: 1.FEB.2023 19:52:43

802.11ac VHT80 Middle channel

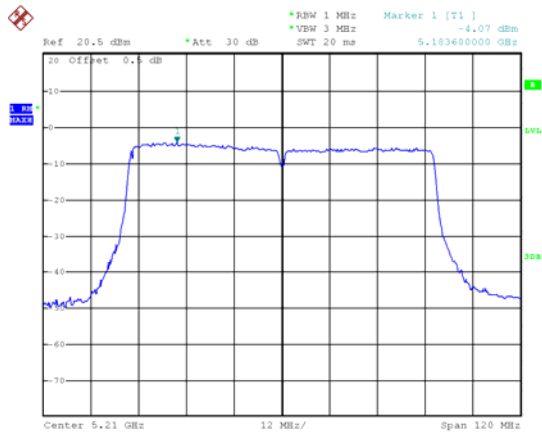


Date: 1.FEB.2023 19:50:24

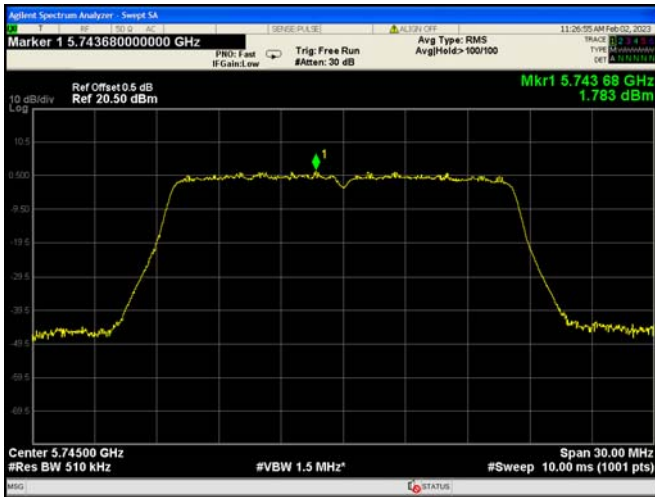


U-NII-3


802.11a Low channel

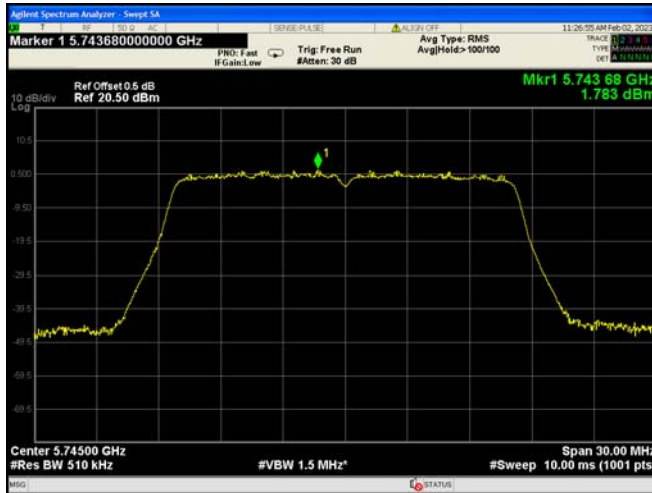


802.11a Middle channel

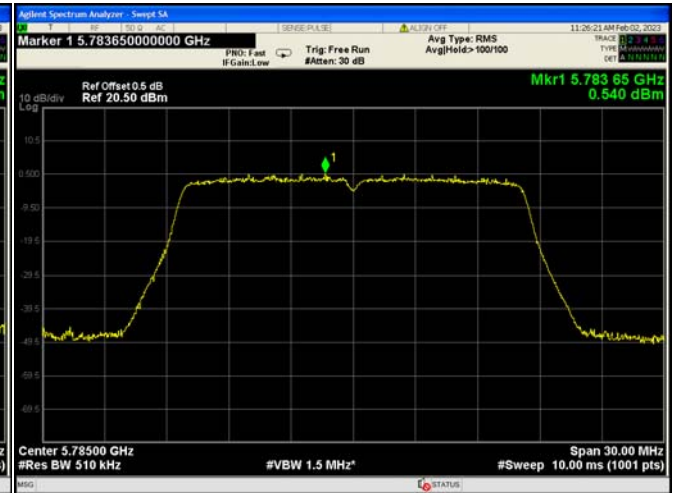


802.11a High channel

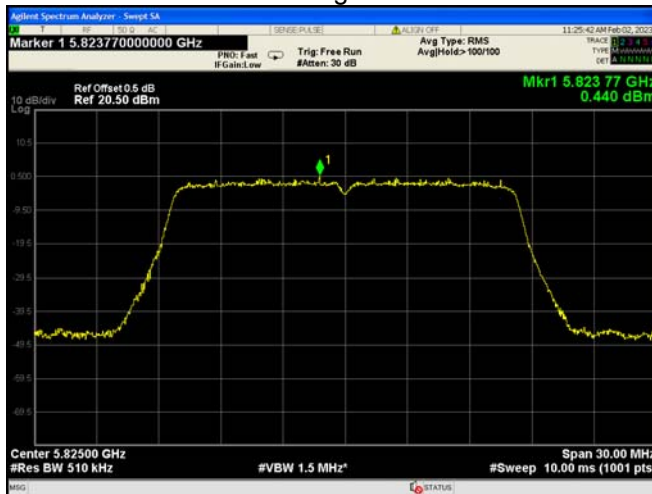


802.11n HT20 Low channel

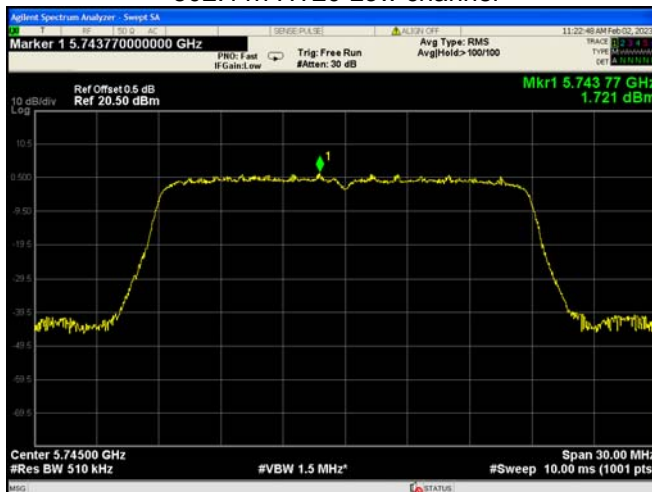


802.11n HT20 Middle channel

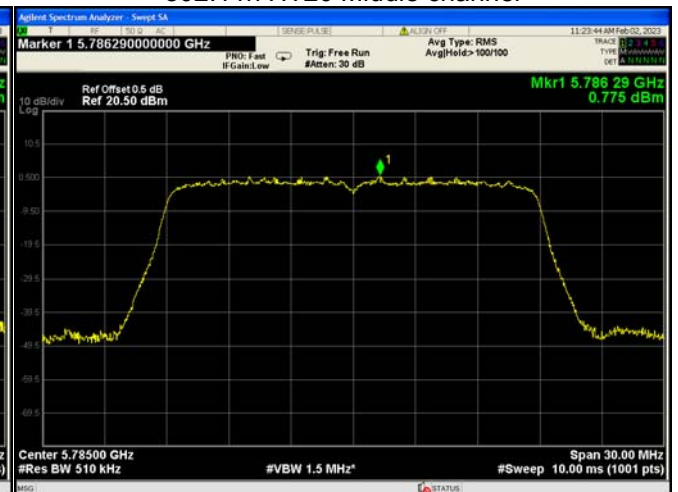


802.11n HT20 High channel

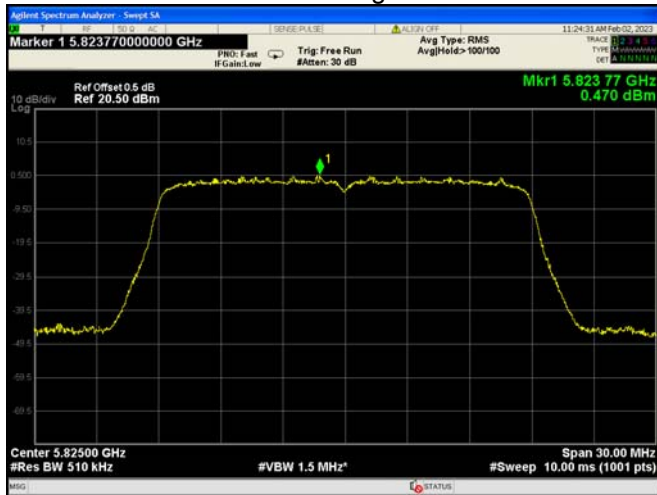


802.11ac VHT20 Low channel

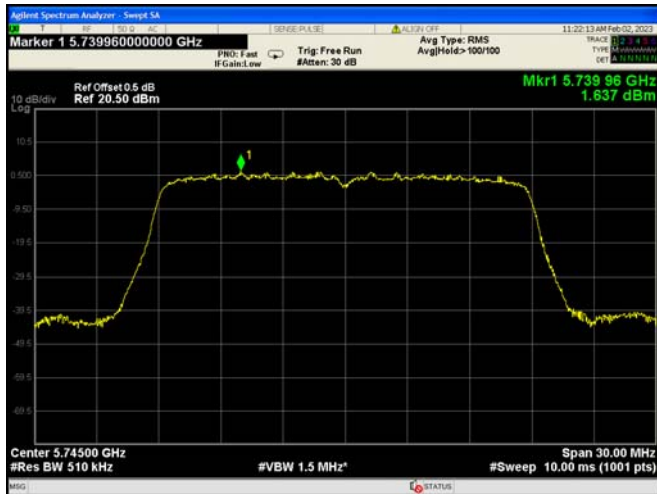


802.11ac VHT20 Middle channel

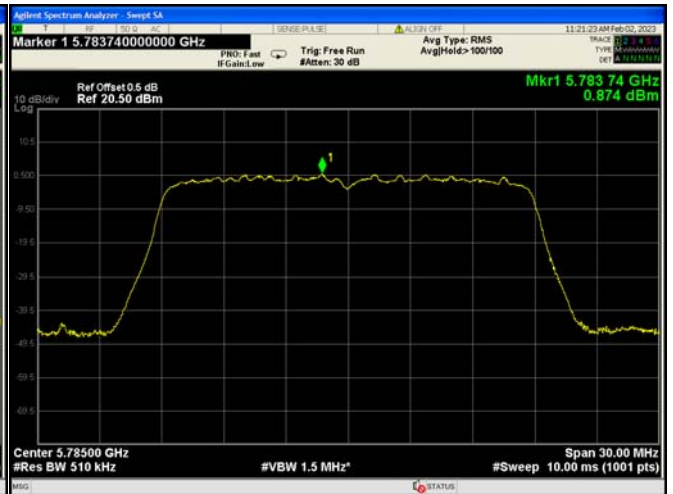


802.11ac VHT20 High channel

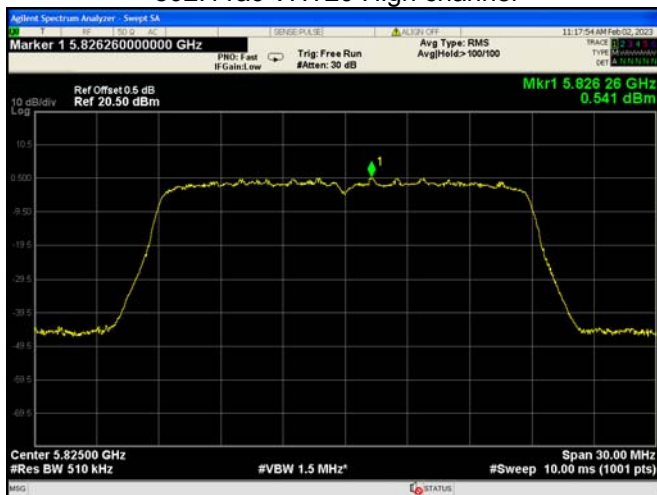


802.11n HT40 Low channel

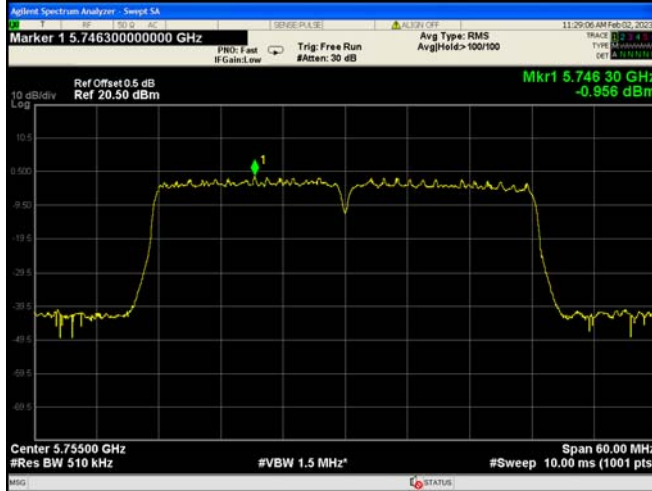


802.11n HT40 High channel

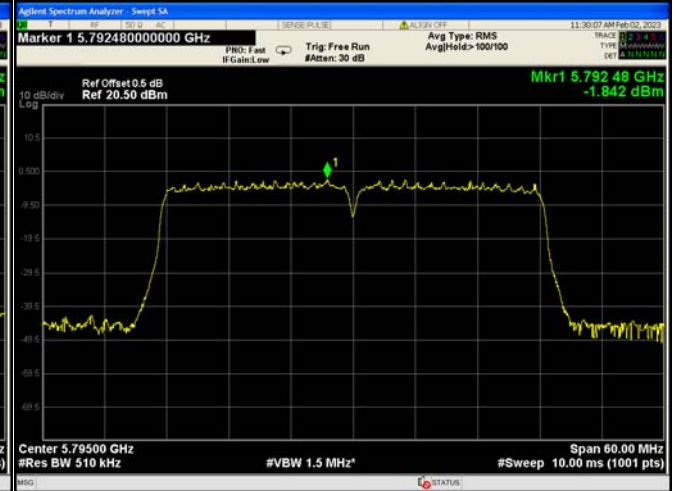


802.11ac VHT40 Low channel

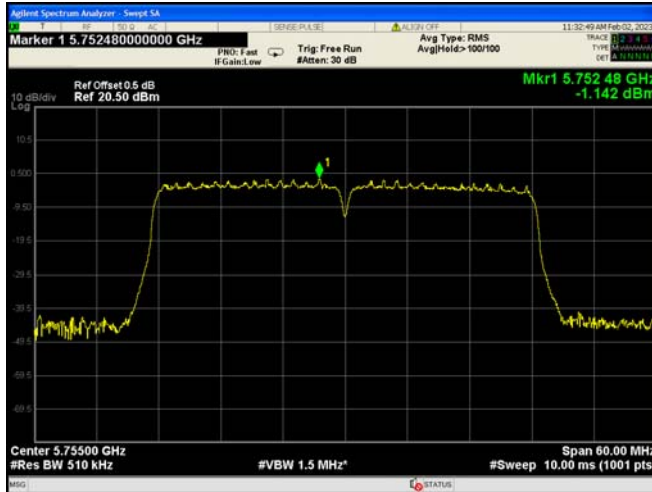

802.11ac VHT40 High channel

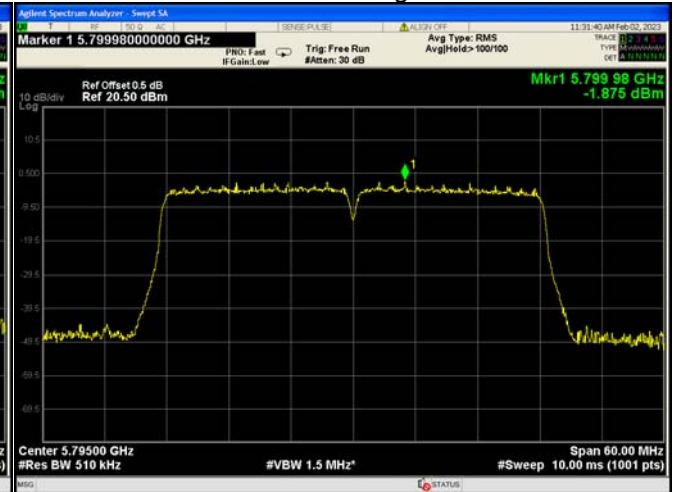


802.11ac VHT80 Middle channel

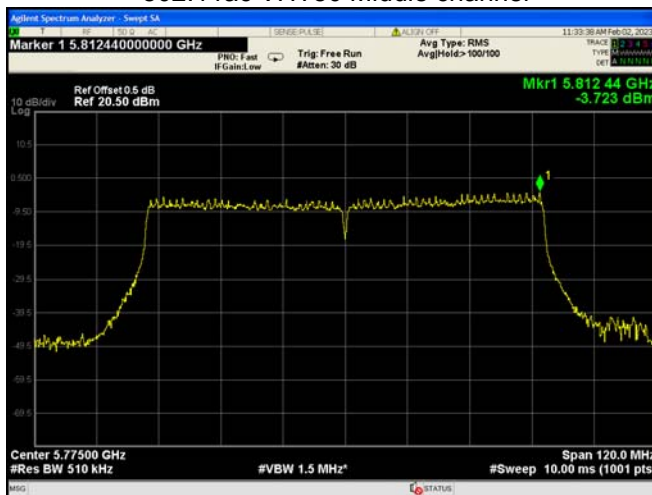


**Ant. 2
U-NII-1**

802.11a Low channel

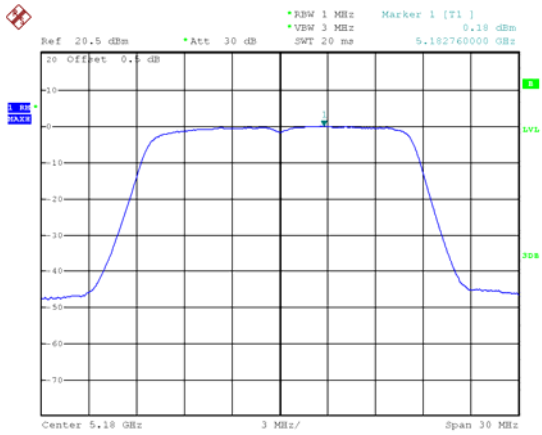


Date: 1.FEB.2023 19:38:11

802.11a Middle channel

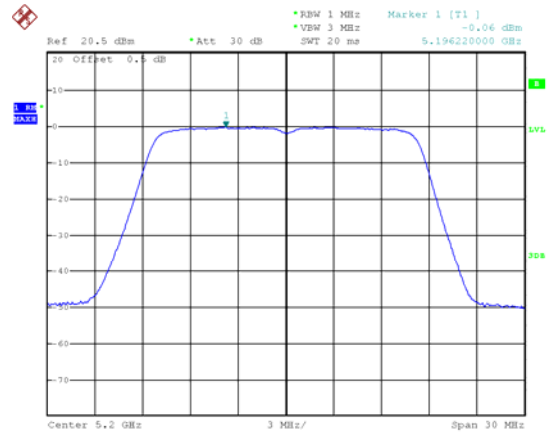


Date: 1.FEB.2023 19:38:36

802.11a High channel

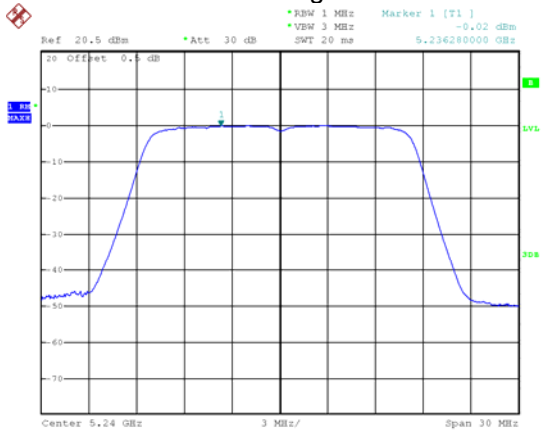


Date: 1.FEB.2023 19:40:59

802.11n HT20 Low channel

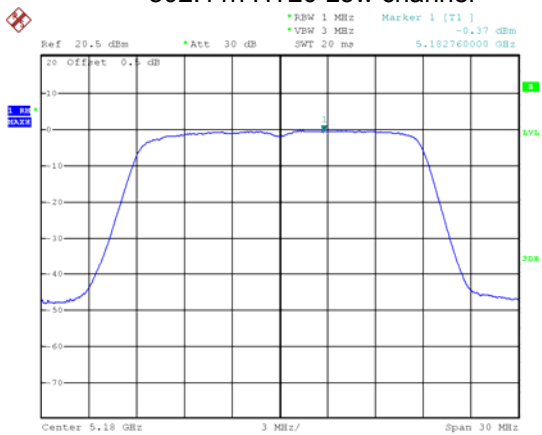


Date: 1.FEB.2023 19:43:10

802.11n HT20 Middle channel

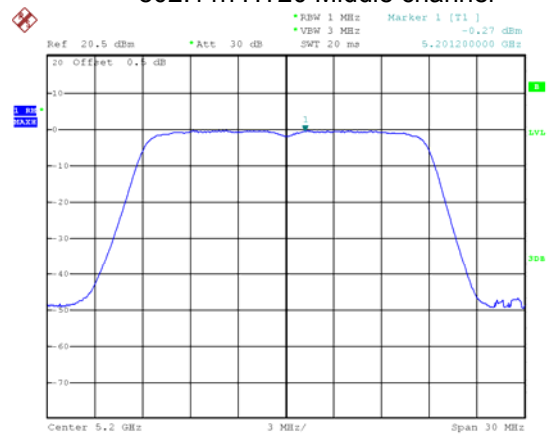


Date: 1.FEB.2023 19:42:37

802.11n HT20 High channel

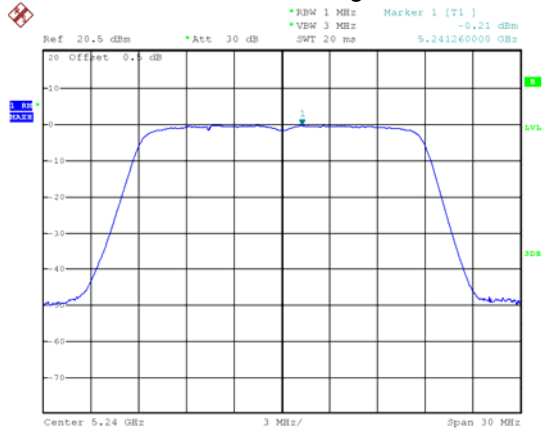


Date: 1.FEB.2023 19:42:04

802.11ac VHT20 Low channel

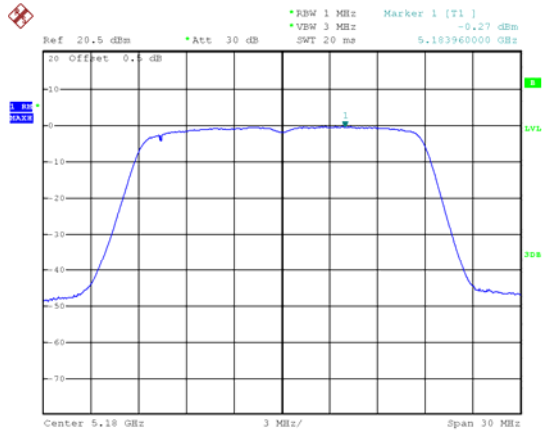


Date: 1.FEB.2023 19:43:40

802.11ac VHT20 Middle channel

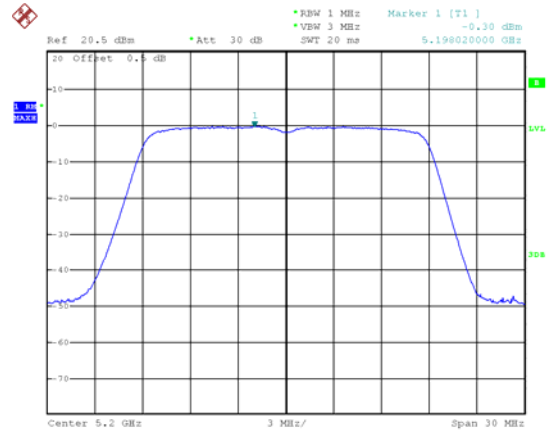


Date: 1.FEB.2023 19:44:15

802.11ac VHT20 High channel

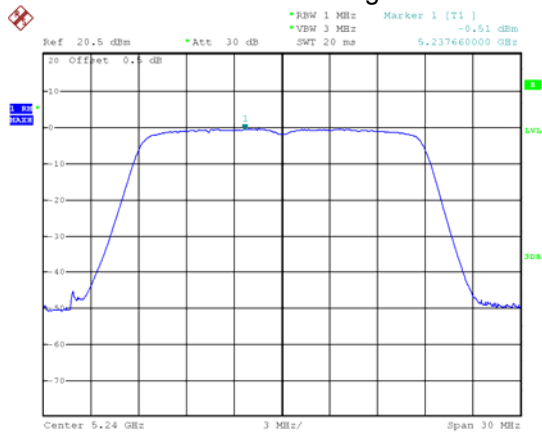


Date: 1.FEB.2023 19:44:36

802.11n HT40 Low channel

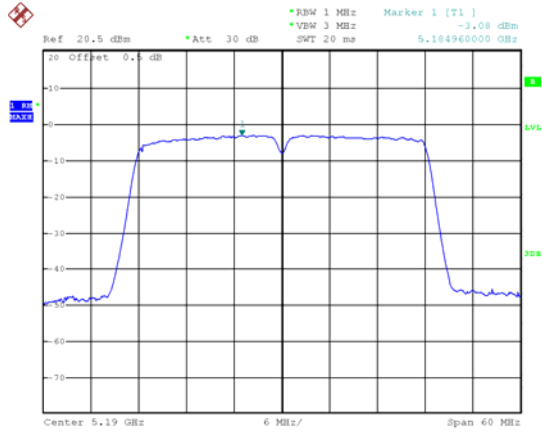


Date: 1.FEB.2023 19:45:13

802.11n HT40 High channel

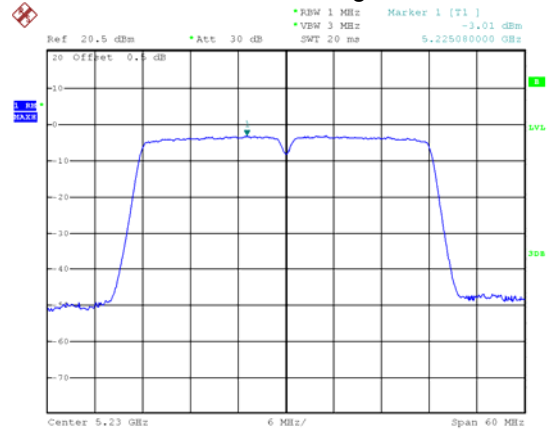


Date: 1.FEB.2023 19:45:37

802.11ac VHT40 Low channel

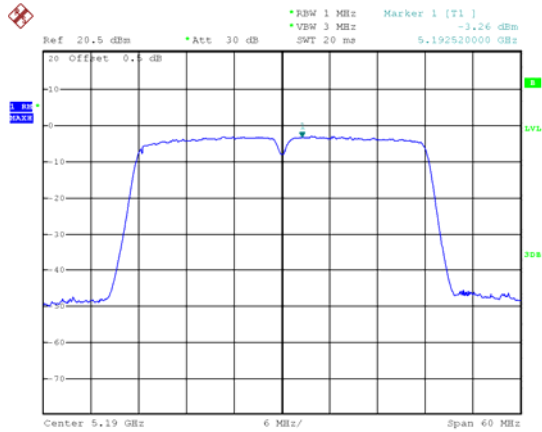


Date: 1.FEB.2023 19:46:41

802.11ac VHT40 High channel

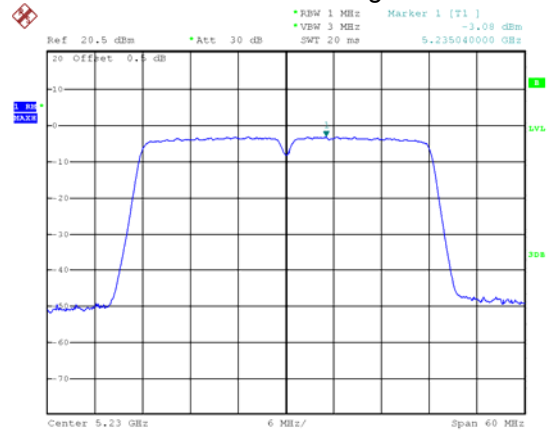

Date: 1.FEB.2023 19:46:16


802.11ac VHT80 Middle channel

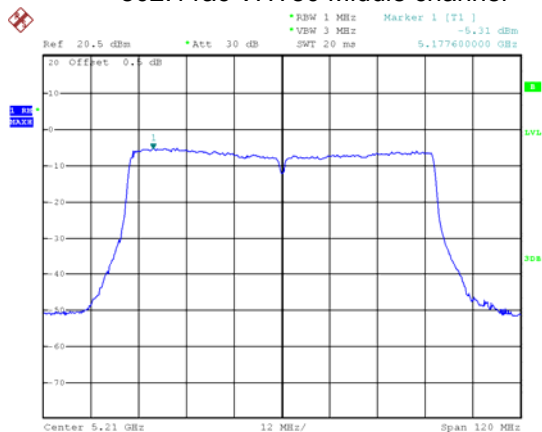


Date: 1.FEB.2023 19:47:18

U-NII-3


802.11a Low channel

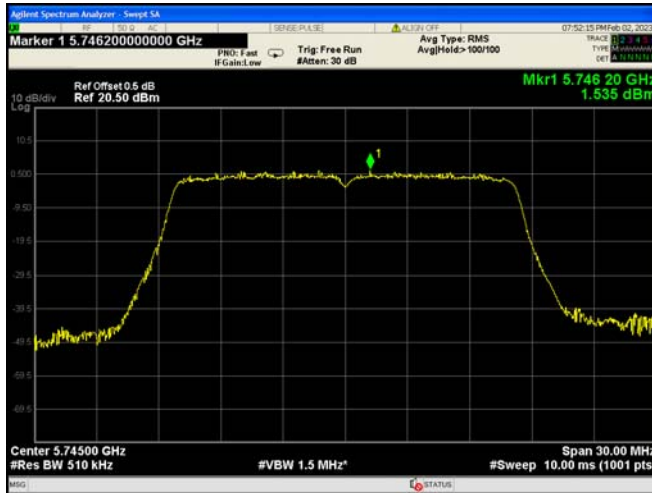

802.11a Middle channel

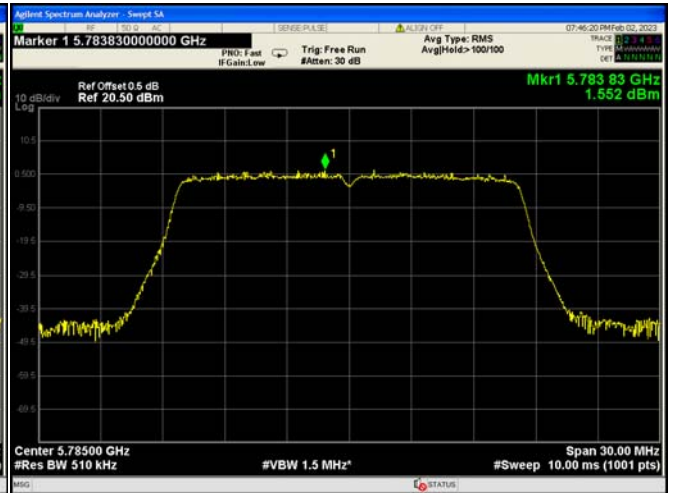


802.11a High channel

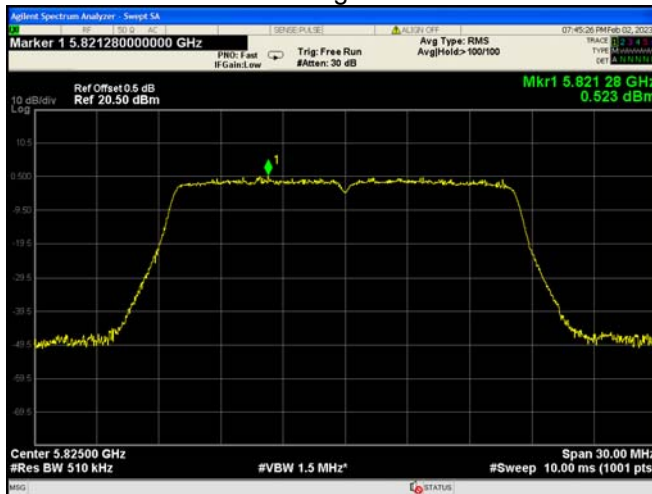

802.11n HT20 Low channel




802.11n HT20 Middle channel

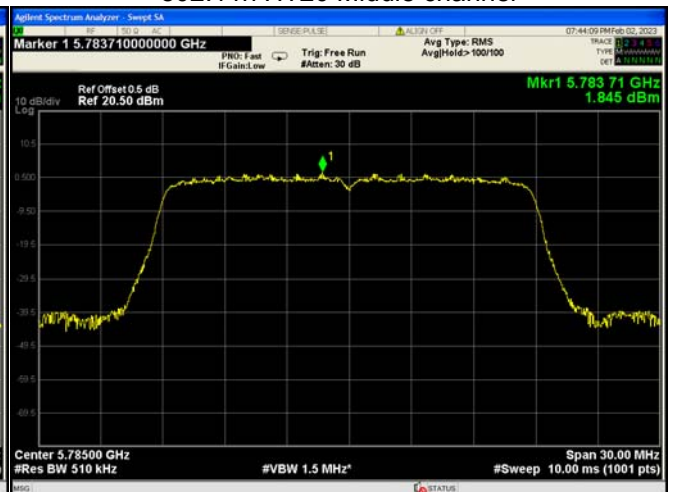


802.11n HT20 High channel




802.11ac VHT20 Low channel

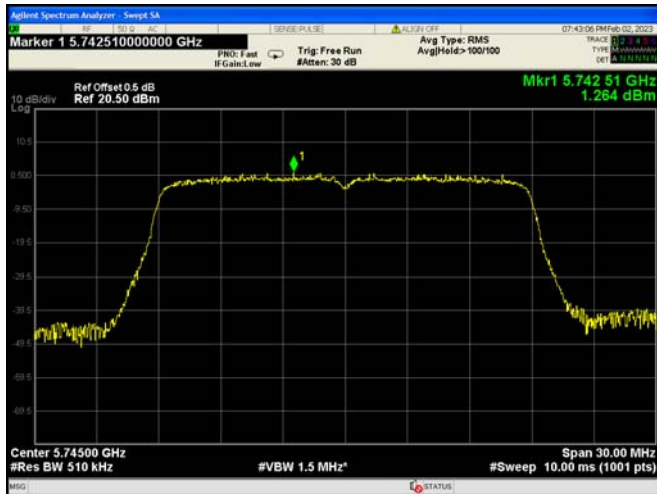

802.11ac VHT20 Middle channel

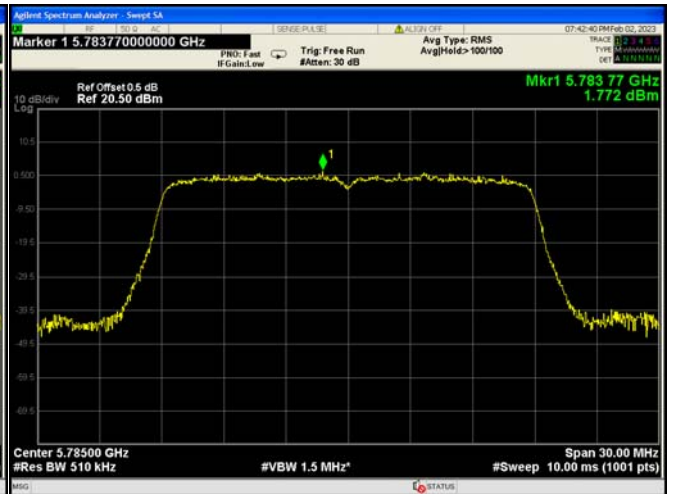


802.11ac VHT20 High channel

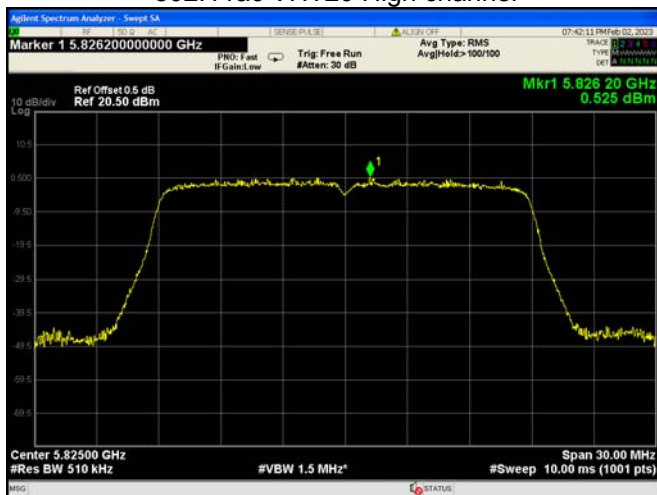


802.11n HT40 Low channel




802.11n HT40 High channel

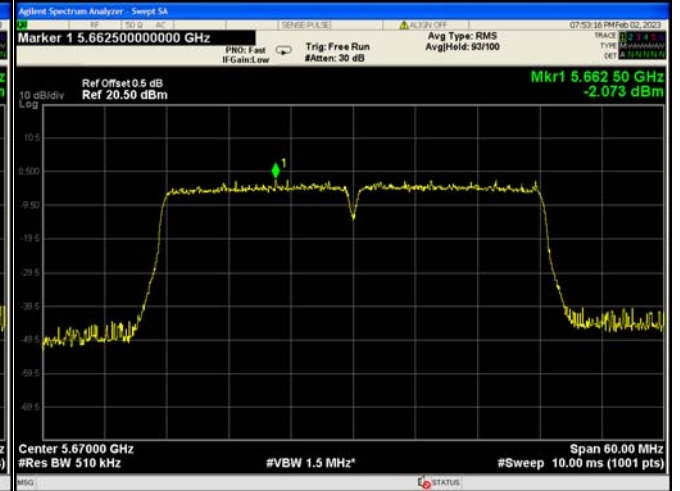


802.11ac VHT40 Low channel

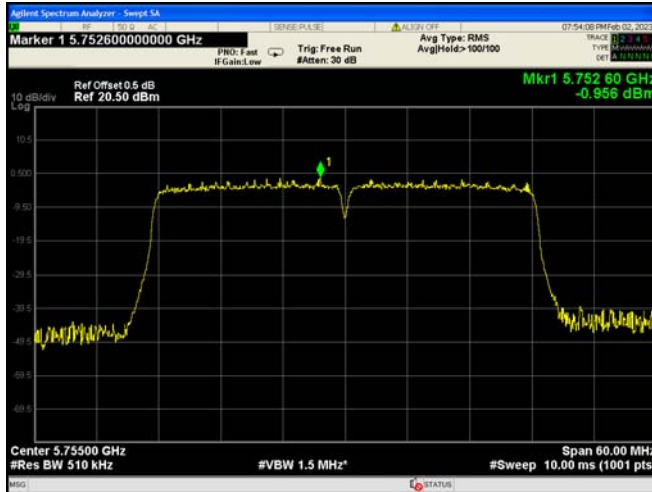

802.11ac VHT40 High channel

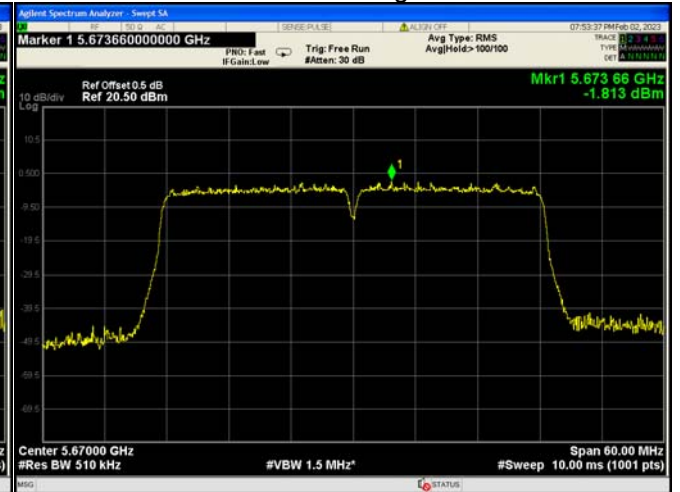

802.11ac VHT80 Middle channel

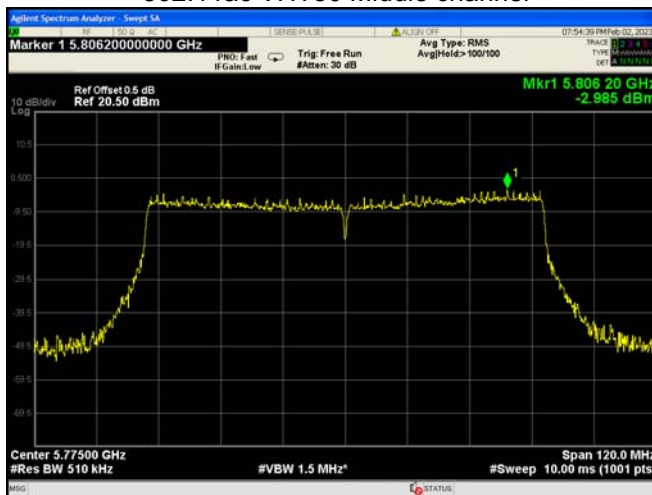

16 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g) ANSI C63.10:2013
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Test Limit:	According to 47CFR part 15 subpart E section 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.
Test Result:	PASS

16.1 Test Procedure:

According to § 2.1055 Measurements required: Frequency stability, the following test procedure was performed.

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of unmodulation signal and fixed channelise.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_C is declaring of channel frequency.
6. Then the frequency stability formula is $(f_C-f) / f_C \times 10^6$ ppm.
7. Extreme temperature rule is $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.
8. Extreme voltage is 85 to 115 percent of the nominal value.

16.2 Test Result:

Note: the manufacturer declared that the maximum frequency stability is below 20ppm.

Both Ant. 1 and Ant. 2 have been tested separately, and the report only shows the worst case.

Ant. 1

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (VAC)	Frequency deviation (MHz)	Frequency deviation (ppm)	Limit (ppm)
50	120	/	/	/
40		0.0015	0.29	20
30		-0.0005	-0.10	20
20		0.0015	0.29	20
10		-0.0008	-0.16	20
0		0.0023	0.44	20
-10		/	/	/
-20		/	/	/
-30		/	/	/
20		102	-0.0037	-0.71
20	138	0.0020	0.38	20

U-NII-3 Test Frequency:5785MHz				
Temperature (°C)	Power Supply (VAC)	Frequency deviation (MHz)	Frequency deviation (ppm)	Limit (ppm)
50	120	/	/	/
40		0.0048	0.93	20
30		-0.0033	-0.63	20
20		0.0017	0.33	20
10		0.0054	1.05	20
0		0.0091	1.75	20
-10		/	/	/
-20		/	/	/
-30		/	/	/
20		102	0.0030	0.59
20	138	-0.0044	-0.84	20

17 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has two PCB printed antennas and Gain is (U-NII-1: 3.0dBi, U-NII-3: 3.0dBi) fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

18 RF Exposure

Note: Please refer to RF Exposure Report: WTD23X02031358W002

19 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- WS-WN690X1-Photos.

=====**End of Report**=====