

TEST REPORT

Reference No. : WTS18S07118518-1W
FCC ID : NZ3-WN536A8
Applicant : Winstars Technology Limited
Address : Block 4, TaiSong Industrial Park, DaLang Street, LongHua Town,
Bao'an district, Shenzhen, China
Manufacturer : Winstars Technology Limited
Address : Block 4, TaiSong Industrial Park, DaLang Street, LongHua Town,
Bao'an district, Shenzhen, China
Product : Wi-Fi Router
Model(s) : WS-WN536A8, ARK T6, WS-WN533A8, Quantum Max, Quantum T10,
Quantum T12, Quantum D4C, Quantum D4, Quantum D6Q, Quantum
D6, Quantum T8, Quantum T6
Standards : FCC CFR47 Part 15 C Section 15.247: 2017
Date of Receipt sample : 2018-07-19
Date of Test : 2018-07-20 to 2018-08-09
Date of Issue : 2018-08-13
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Tested by:

Frank Yin

Frank Yin / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2. Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	CNAS (Registration No.: L3110)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2. LABORATORIES INTRODUCTION.....	2
2.1 TEST FACILITY.....	3
3 CONTENTS	4
3. REVISION HISTORY	5
4 GENERAL INFORMATION.....	6
4.1 GENERAL DESCRIPTION OF E.U.T	6
4.2 DETAILS OF E.U.T.....	6
4.3 CHANNEL LIST.....	7
4.4 TEST MODE	8
5 EQUIPMENT USED DURING TEST	9
5.1 EQUIPMENTS LIST	9
5.2 MEASUREMENT UNCERTAINTY	10
5.3 TEST EQUIPMENT CALIBRATION	10
6 TEST SUMMARY	11
7 CONDUCTED EMISSION	12
7.1 E.U.T. OPERATION	12
7.2 EUT SETUP.....	12
7.3 MEASUREMENT DESCRIPTION	12
7.4 CONDUCTED EMISSION TEST RESULT	13
8 RADIATED EMISSIONS.....	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP	16
8.3 SPECTRUM ANALYZER SETUP	17
8.4 TEST PROCEDURE	18
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
8.6 SUMMARY OF TEST RESULTS	19
9 BAND EDGE MEASUREMENT	31
9.1 TEST PROCEDURE.....	31
9.2 TEST RESULT	32
10 BANDWIDTH MEASUREMENT.....	40
10.1 TEST PROCEDURE:.....	40
10.2 TEST RESULT:	40
11 MAXIMUM PEAK OUTPUT POWER	53
11.1 TEST PROCEDURE:.....	53
11.2 TEST RESULT:	53
12 POWER SPECTRAL DENSITY	55
12.1 TEST PROCEDURE:.....	55
12.2 TEST RESULT:	55
13 ANTENNA REQUIREMENT	69
14 RF EXPOSURE EVALUATION.....	70
15 PHOTOGRAPHS – TEST SETUP PHOTOS AND EUT.....	71

3. Revision History

Test report #	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S07118518-1W	2018-07-19	2018-07-20 to2018-08-09	2018-08-13	Original	-	Valid

4 General Information

4.1 General Description of E.U.T

Product:	Wi-Fi Router
Model(s):	WS-WN536A8, ARK T6, WS-WN533A8, Quantum Max, Quantum T10, Quantum T12, Quantum D4C, Quantum D4, Quantum D6Q, Quantum D6, Quantum T8, Quantum T6
Model Description:	Only the model name and appearance is different. The test sample is WS-WN536A8
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz 802.11n HT40: 2422MHz~2452MHz
RF output power	Wifi: 13.17dBm
Antenna installation:	Integrated Antenna
Antenna Gain:	5.0dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)

4.2 Details of E.U.T

Ratings	Input: AC 100~240V, 50/60Hz, 0.6A Output: 5V, 4A
Adapter	Model: P050W4000U

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limitter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2018-04-29	2019-04-28
2	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018-04-13	2019-04-12
5	Spectrum Analyzer	R&S	FSP40	100501	2017-10-20	2018-10-19
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2017-09-14	2018-09-13
7	Microwave Broadband Preamplifier	SCHWARZBECK	BBV 9721	100472	2017-10-25	2018-10-24
8	Cable	Top	18GHz-40GHz	-	2017-10-25	2018-10-24
3m Semi-anechoic Chamber for Radiation Emissions Test site						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Ative Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-10-17	2018-10-16
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-08	2019-04-07
4	Amplifier	ANRITSU	MH648A	M43381	2018-04-13	2019-04-12
5	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12
6	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	2017-09-14	2018-09-13

	(9k~26.5GHz)					
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11
4.	Coaxial Cable (10Hz-30GHz)	/	/	/	2017-09-12	2018-09-11
5.	Antenna Connector*	/	/	/	2017-09-12	2018-09-11

“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.247 15.205(a) 15.209(a)	C
Conducted Emissions	15.207(a)	C
Conducted Spurious Emissions	15.247	C
Bandwidth	15.247(a)(2)	C
Maximum Peak Output Power	15.247(b)(3),(4)	C
Power Spectral Density	15.247(e)	C
Band Edge	15.247(d)	C
Antenna Requirement	15.203	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :

Temperature:	21.5 °C
Humidity:	51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation : Transmitting mode

The test was performed in Transmitting mode(For WIFI), Only the worst case 802.11b mode were record in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

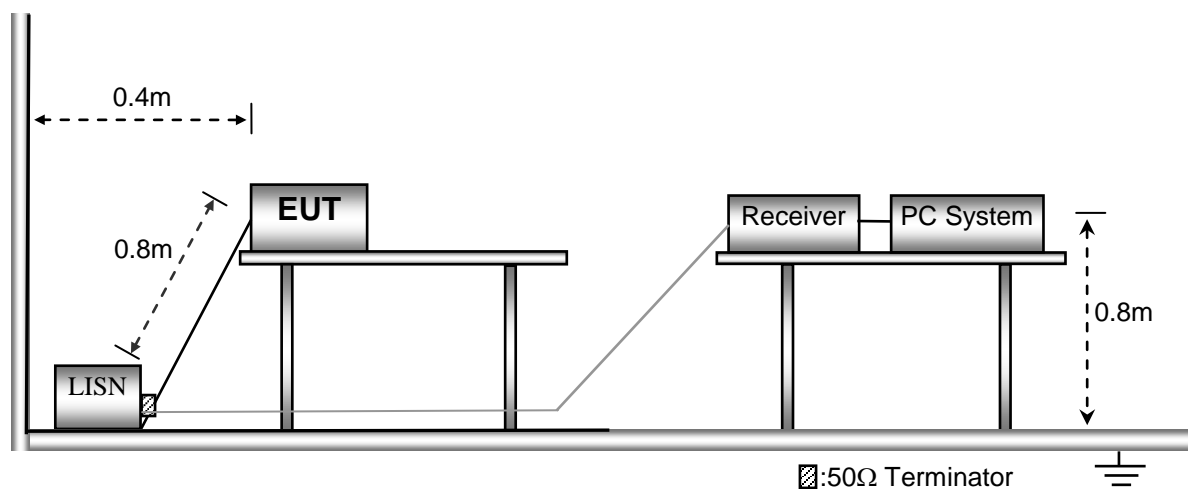


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

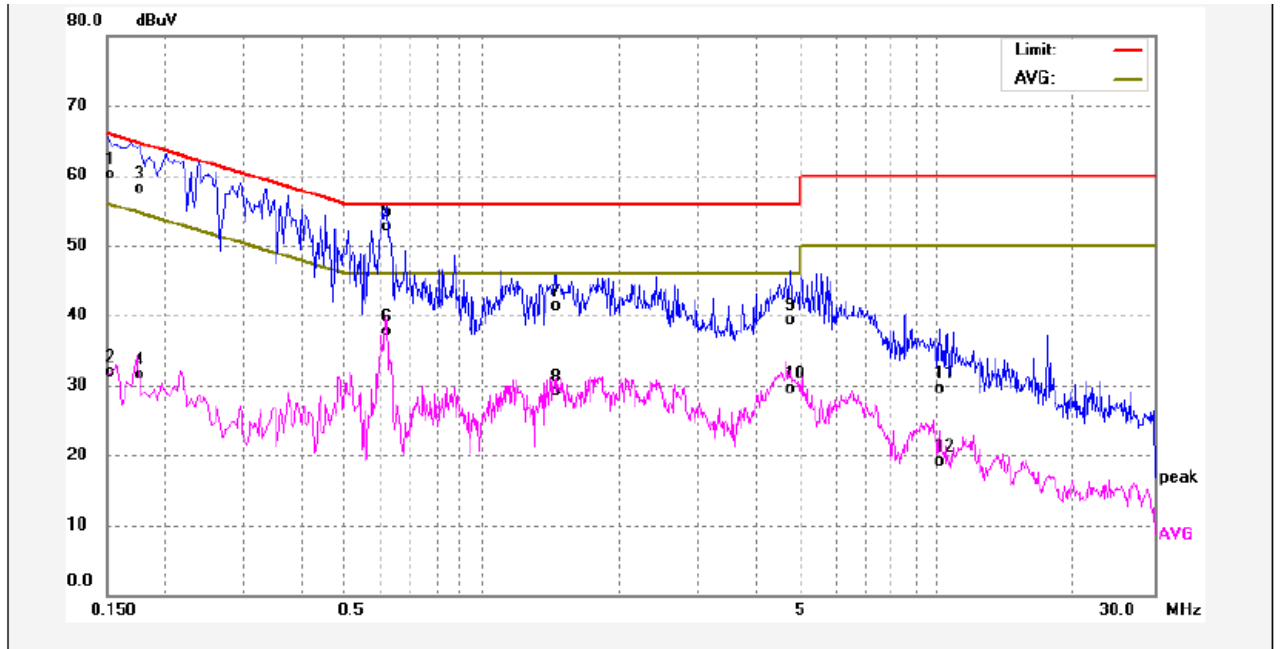

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	50.33	9.75	60.08	65.99	-5.91	QP	
2	0.1500	22.19	9.75	31.94	55.99	-24.05	AVG	
3	0.1780	48.32	9.78	58.10	64.57	-6.47	QP	
4	0.1780	21.75	9.78	31.53	54.57	-23.04	AVG	
5	0.6180	42.96	9.84	52.80	56.00	-3.20	QP	
6	0.6180	27.85	9.84	37.69	46.00	-8.31	AVG	
7	1.4460	31.48	9.90	41.38	56.00	-14.62	QP	
8	1.4460	19.24	9.90	29.14	46.00	-16.86	AVG	
9	4.7940	29.23	10.05	39.28	56.00	-16.72	QP	
10	4.7940	19.53	10.05	29.58	46.00	-16.42	AVG	
11	10.1340	19.54	10.06	29.60	60.00	-30.40	QP	
12	10.1340	8.95	10.06	19.01	50.00	-30.99	AVG	

Neutral line:

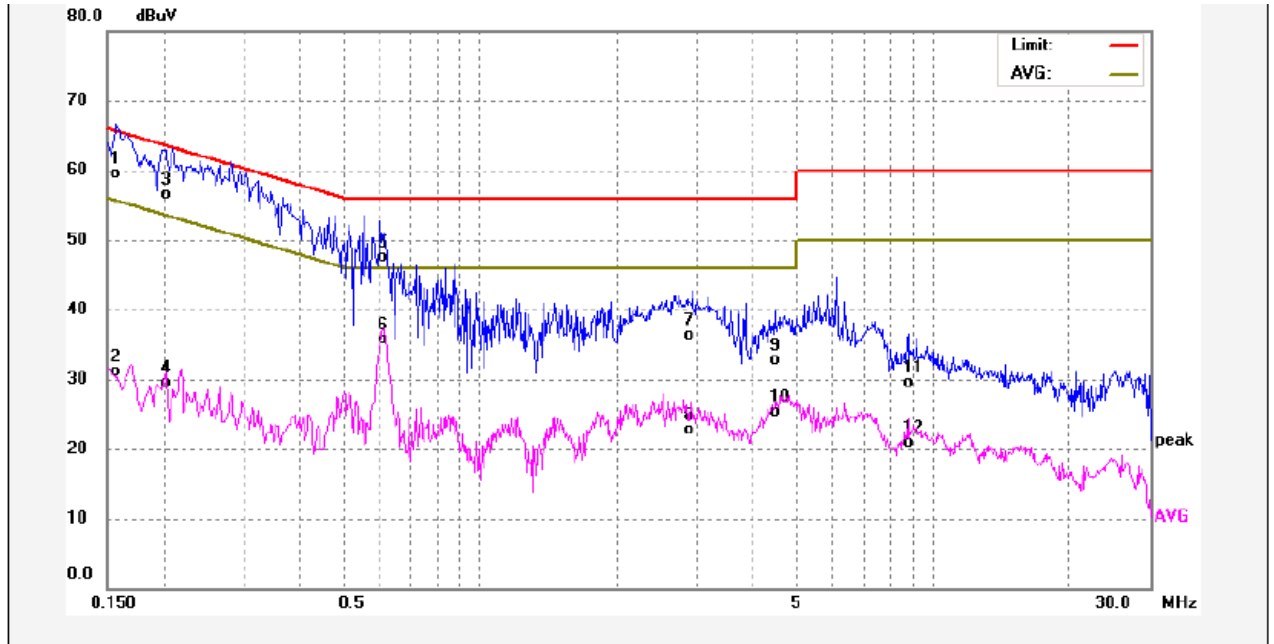

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	49.71	9.76	59.47	65.56	-6.09	QP	
2	0.1580	21.34	9.76	31.10	55.56	-24.46	AVG	
3	0.2020	46.75	9.77	56.52	63.52	-7.00	QP	
4	0.2020	19.66	9.77	29.43	53.52	-24.09	AVG	
5	0.6020	37.75	9.84	47.59	56.00	-8.41	QP	
6	0.6020	25.84	9.84	35.68	46.00	-10.32	AVG	
7	2.9420	26.43	9.93	36.36	56.00	-19.64	QP	
8	2.9420	12.72	9.93	22.65	46.00	-23.35	AVG	
9	4.4699	22.71	10.01	32.72	56.00	-23.28	QP	
10	4.4699	15.23	10.01	25.24	46.00	-20.76	AVG	
11	8.7780	19.38	10.08	29.46	60.00	-30.54	QP	
12	8.7780	10.89	10.08	20.97	50.00	-29.03	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

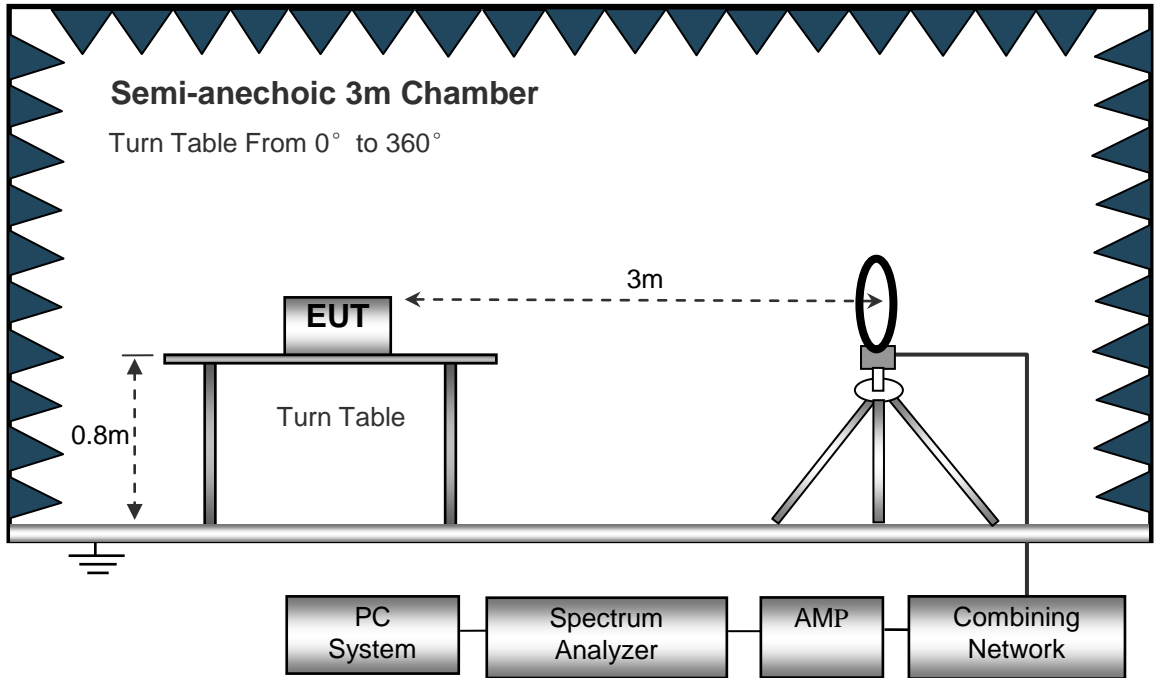

The test setup for emission measurement from 30 MHz to 1 GHz.

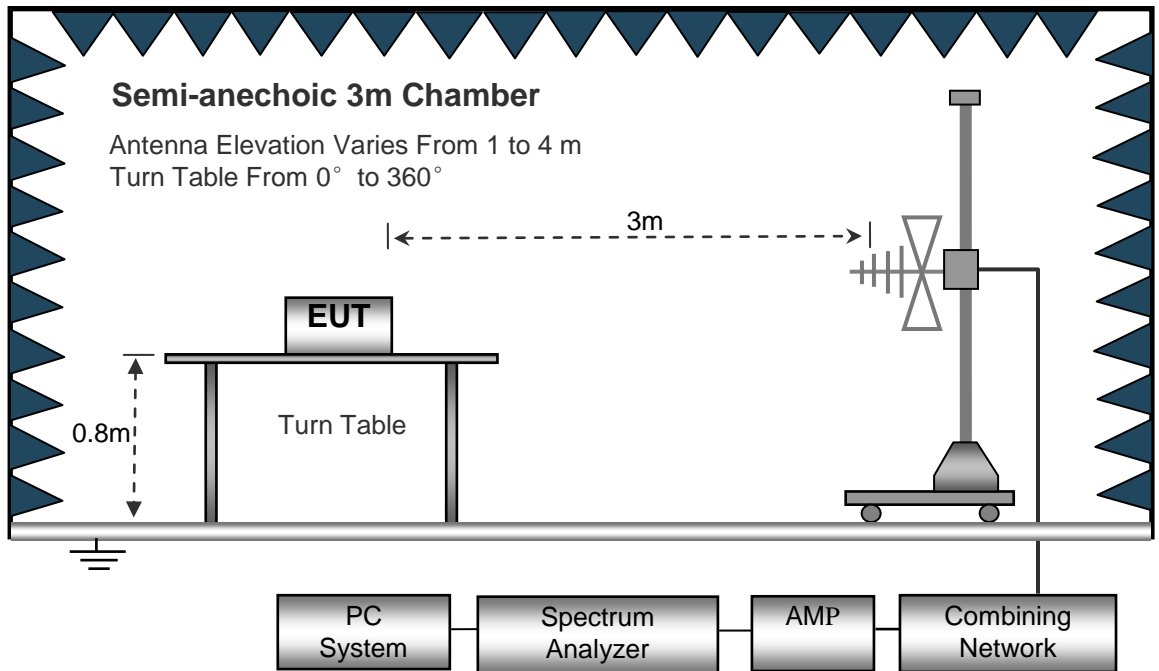

The test setup for emission measurement above 1 GHz.

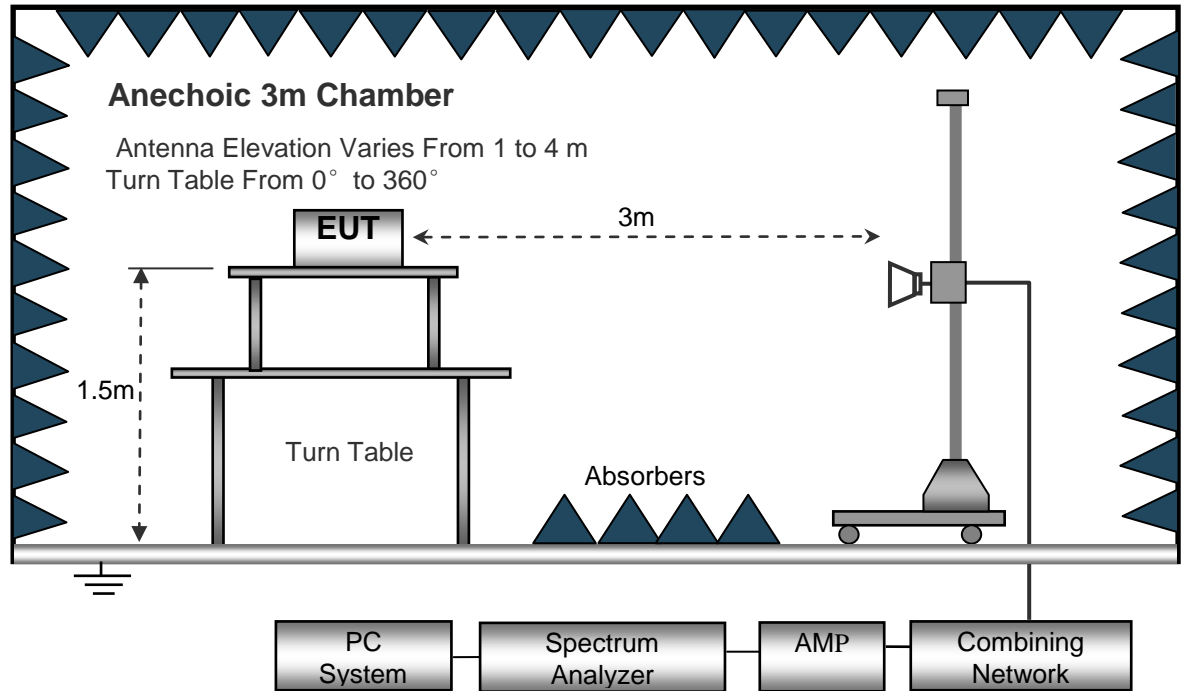

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the EUT in X axis,so the worst data were shown as follow.
8. A 2.4GHz high-pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency : 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
37.81	53.13	PK	136	1.3	H	-17.46	35.67	40.00	-4.33
37.81	35.70	PK	235	1.4	V	-17.46	18.24	40.00	-21.76
4824.00	53.12	PK	235	1.9	V	-1.05	52.07	74.00	-21.93
4824.00	42.10	Ave	235	1.9	V	-1.05	41.05	54.00	-12.95
7236.00	48.65	PK	292	1.7	H	1.34	49.99	74.00	-24.01
7236.00	38.69	Ave	292	1.7	H	1.34	40.03	54.00	-13.97
2341.26	46.13	PK	256	1.9	V	-13.19	32.94	74.00	-41.06
2341.26	37.60	Ave	256	1.9	V	-13.19	24.41	54.00	-29.59
2357.97	42.42	PK	299	1.7	H	-13.15	29.27	74.00	-44.73
2357.97	38.14	Ave	299	1.7	H	-13.15	24.99	54.00	-29.01
2496.12	42.10	PK	318	1.8	V	-13.08	29.02	74.00	-44.98
2496.12	38.62	Ave	318	1.8	V	-13.08	25.54	54.00	-28.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
37.81	52.19	PK	73	1.3	H	-17.46	34.73	40.00	-5.27
37.81	35.48	PK	189	1.6	V	-17.46	18.02	40.00	-21.98
4874.00	50.76	PK	232	1.0	V	-0.63	50.13	74.00	-23.87
4874.00	42.77	Ave	232	1.0	V	-0.63	42.14	54.00	-11.86
7311.00	51.57	PK	63	1.7	H	2.21	53.78	74.00	-20.22
7311.00	41.39	Ave	63	1.7	H	2.21	43.60	54.00	-10.40
2311.57	46.79	PK	26	1.4	V	-13.19	33.60	74.00	-40.40
2311.57	39.35	Ave	26	1.4	V	-13.19	26.16	54.00	-27.84
2357.34	44.21	PK	6	1.6	H	-13.14	31.07	74.00	-42.93
2357.34	38.64	Ave	6	1.6	H	-13.14	25.50	54.00	-28.50
2495.06	43.96	PK	44	1.9	V	-13.09	30.87	74.00	-43.13
2495.06	36.71	Ave	44	1.9	V	-13.09	23.62	54.00	-30.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
37.81	51.80	PK	10	1.2	H	-17.46	34.34	40.00	-5.66
37.81	34.51	PK	235	1.9	V	-17.46	17.05	40.00	-22.95
4924.00	49.37	PK	295	1.8	V	-0.25	49.12	74.00	-24.88
4924.00	44.77	Ave	295	1.8	V	-0.25	44.52	54.00	-9.48
7386.00	52.59	PK	86	1.0	H	2.85	55.44	74.00	-18.56
7386.00	40.93	Ave	86	1.0	H	2.85	43.78	54.00	-10.22
2316.12	46.66	PK	238	1.2	V	-13.19	33.47	74.00	-40.53
2316.12	37.31	Ave	238	1.2	V	-13.19	24.12	54.00	-29.88
2368.20	43.64	PK	146	1.4	H	-13.14	30.50	74.00	-43.50
2368.20	38.73	Ave	146	1.4	H	-13.14	25.59	54.00	-28.41
2495.25	43.01	PK	210	1.3	V	-13.09	29.92	74.00	-44.08
2495.25	36.64	Ave	210	1.3	V	-13.09	23.55	54.00	-30.45

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
37.81	53.60	PK	137	1.3	H	-17.46	36.14	40.00	-3.86
37.81	34.75	PK	163	1.3	V	-17.46	17.29	40.00	-22.71
4824.00	48.03	PK	34	1.2	V	-1.06	46.97	74.00	-27.03
4824.00	37.25	Ave	34	1.2	V	-1.06	36.19	54.00	-17.81
7236.00	49.63	PK	8	1.1	H	1.35	50.98	74.00	-23.02
7236.00	43.90	Ave	8	1.1	H	1.35	45.25	54.00	-8.75
2329.20	45.29	PK	78	1.3	V	-13.19	32.10	74.00	-41.90
2329.20	39.02	Ave	78	1.3	V	-13.19	25.83	54.00	-28.17
2354.05	42.82	PK	70	1.4	H	-13.14	29.68	74.00	-44.32
2354.05	37.49	Ave	70	1.4	H	-13.14	24.35	54.00	-29.65
2496.59	44.05	PK	357	1.2	V	-13.08	30.97	74.00	-43.03
2496.59	38.59	Ave	357	1.2	V	-13.08	25.51	54.00	-28.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
37.81	51.77	PK	289	1.8	H	-17.46	34.31	40.00	-5.69
37.81	37.16	PK	101	1.9	V	-17.46	19.70	40.00	-20.30
4874.00	50.81	PK	331	1.2	V	-0.62	50.19	74.00	-23.81
4874.00	44.14	Ave	331	1.2	V	-0.62	43.52	54.00	-10.48
7311.00	48.80	PK	153	1.4	H	2.20	51.00	74.00	-23.00
7311.00	35.58	Ave	153	1.4	H	2.20	37.78	54.00	-16.22
2321.97	45.65	PK	331	2.0	V	-13.19	32.46	74.00	-41.54
2321.97	37.17	Ave	331	2.0	V	-13.19	23.98	54.00	-30.02
2358.74	42.89	PK	163	1.6	H	-13.15	29.74	74.00	-44.26
2358.74	37.64	Ave	163	1.6	H	-13.15	24.49	54.00	-29.51
2489.87	44.50	PK	149	1.0	V	-13.09	31.41	74.00	-42.59
2489.87	37.97	Ave	149	1.0	V	-13.09	24.88	54.00	-29.12

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
37.81	53.74	PK	176	1.8	H	-17.46	36.28	40.00	-3.72
37.81	35.48	PK	238	1.5	V	-17.46	18.02	40.00	-21.98
4924.00	53.27	PK	68	1.3	V	-0.25	53.02	74.00	-20.98
4924.00	45.09	Ave	68	1.3	V	-0.25	44.84	54.00	-9.16
7386.00	46.40	PK	53	1.2	H	2.86	49.26	74.00	-24.74
7386.00	35.80	Ave	53	1.2	H	2.86	38.66	54.00	-15.34
2341.56	45.36	PK	72	1.8	V	-13.19	32.17	74.00	-41.83
2341.56	37.27	Ave	72	1.8	V	-13.19	24.08	54.00	-29.92
2384.52	43.91	PK	225	1.2	H	-13.14	30.77	74.00	-43.23
2384.52	37.50	Ave	225	1.2	H	-13.14	24.36	54.00	-29.64
2486.82	44.36	PK	53	1.2	V	-13.08	31.28	74.00	-42.72
2486.82	37.23	Ave	53	1.2	V	-13.08	24.15	54.00	-29.85

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Low Channel 2412MHz									
37.81	52.04	PK	337	2.0	H	-17.46	34.58	40.00	-5.42
37.81	34.41	PK	87	1.7	V	-17.46	16.95	40.00	-23.05
4824.00	46.87	PK	235	1.3	V	-1.06	45.81	74.00	-28.19
4824.00	41.05	Ave	235	1.3	V	-1.06	39.99	54.00	-14.01
7236.00	47.67	PK	25	1.8	H	1.34	49.01	74.00	-24.99
7236.00	39.49	Ave	25	1.8	H	1.34	40.83	54.00	-13.17
2337.05	45.72	PK	85	1.5	V	-13.19	32.53	74.00	-41.47
2337.05	39.56	Ave	85	1.5	V	-13.19	26.37	54.00	-27.63
2387.92	42.01	PK	262	1.8	H	-13.14	28.87	74.00	-45.13
2387.92	38.49	Ave	262	1.8	H	-13.14	25.35	54.00	-28.65
2497.29	42.53	PK	138	1.4	V	-13.08	29.45	74.00	-44.55
2497.29	37.19	Ave	138	1.4	V	-13.08	24.11	54.00	-29.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Middle Channel 2437MHz									
37.81	52.42	PK	144	1.7	H	-17.46	34.96	40.00	-5.04
37.81	35.99	PK	316	1.8	V	-17.46	18.53	40.00	-21.47
4874.00	50.58	PK	313	1.0	V	-0.61	49.97	74.00	-24.03
4874.00	41.68	Ave	313	1.0	V	-0.61	41.07	54.00	-12.93
7311.00	46.68	PK	293	1.0	H	2.21	48.89	74.00	-25.11
7311.00	40.79	Ave	293	1.0	H	2.21	43.00	54.00	-11.00
2331.26	46.19	PK	100	1.7	V	-13.19	33.00	74.00	-41.00
2331.26	39.22	Ave	100	1.7	V	-13.19	26.03	54.00	-27.97
2363.76	44.56	PK	260	1.8	H	-13.14	31.42	74.00	-42.58
2363.76	37.77	Ave	260	1.8	H	-13.14	24.63	54.00	-29.37
2497.86	43.37	PK	48	1.7	V	-13.09	30.28	74.00	-43.72
2497.86	36.52	Ave	48	1.7	V	-13.09	23.44	54.00	-30.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: High Channel 2462MHz									
37.81	53.10	PK	132	1.8	H	-17.46	35.64	40.00	-4.36
37.81	34.81	PK	310	1.4	V	-17.46	17.35	40.00	-22.65
4924.00	50.92	PK	149	1.3	V	-0.24	50.68	74.00	-23.32
4924.00	42.95	Ave	149	1.3	V	-0.24	42.71	54.00	-11.29
7386.00	48.88	PK	65	1.8	H	2.83	51.71	74.00	-22.29
7386.00	41.55	Ave	65	1.8	H	2.83	44.38	54.00	-9.62
2333.42	46.84	PK	25	1.5	V	-13.19	33.65	74.00	-40.35
2333.42	37.43	Ave	25	1.5	V	-13.19	24.24	54.00	-29.76
2368.79	44.06	PK	291	1.1	H	-13.14	30.92	74.00	-43.08
2368.79	38.96	Ave	291	1.1	H	-13.14	25.82	54.00	-28.18
2491.79	43.37	PK	359	1.8	V	-13.08	30.29	74.00	-43.71
2491.79	37.25	Ave	359	1.8	V	-13.08	24.17	54.00	-29.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: Low Channel 2422MHz									
37.81	53.78	PK	36	1.8	H	-17.46	36.32	40.00	36.32
37.81	35.48	PK	110	1.8	V	-17.46	18.02	40.00	18.02
4844.00	43.87	PK	157	1.6	V	-1.06	42.81	74.00	42.81
4844.00	36.06	Ave	157	1.6	V	-1.06	35.00	54.00	35.00
7266.00	44.42	PK	155	1.9	H	1.34	45.76	74.00	45.76
7266.00	35.57	Ave	155	1.9	H	1.34	36.91	54.00	36.91
2345.62	45.59	PK	158	1.7	V	-13.19	32.40	74.00	32.40
2345.62	38.15	Ave	158	1.7	V	-13.19	24.96	54.00	24.96
2377.55	42.59	PK	162	1.4	H	-13.14	29.45	74.00	29.45
2377.55	36.57	Ave	162	1.4	H	-13.14	23.43	54.00	23.43
2487.68	44.59	PK	149	1.7	V	-13.08	31.51	74.00	31.51
2487.68	37.53	Ave	149	1.7	V	-13.08	24.45	54.00	24.45

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: Middle Channel 2437MHz									
37.81	52.34	PK	64	1.1	H	-17.46	34.88	40.00	-5.12
37.81	36.14	PK	206	1.5	V	-17.46	18.68	40.00	-21.32
4874.00	46.79	PK	287	2.0	V	-0.61	46.18	74.00	-27.82
4874.00	36.86	Ave	287	2.0	V	-0.61	36.25	54.00	-17.75
7311.00	38.50	PK	169	1.2	H	2.21	40.71	74.00	-33.29
7311.00	33.27	Ave	169	1.2	H	2.21	35.48	54.00	-18.52
2323.66	45.35	PK	259	1.8	V	-13.19	32.16	74.00	-41.84
2323.66	37.63	Ave	259	1.8	V	-13.19	24.44	54.00	-29.56
2374.21	44.71	PK	212	1.3	H	-13.14	31.57	74.00	-42.43
2374.21	37.57	Ave	212	1.3	H	-13.14	24.43	54.00	-29.57
2490.81	44.82	PK	141	1.2	V	-13.09	31.73	74.00	-42.27
2490.81	36.88	Ave	141	1.2	V	-13.09	23.79	54.00	-30.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: High Channel 2452MHz									
37.81	53.69	PK	50	1.2	H	-17.46	36.23	40.00	-3.77
37.81	35.16	PK	30	1.7	V	-17.46	17.70	40.00	-22.30
4904.00	49.31	PK	338	1.2	V	-0.24	49.07	74.00	-24.93
4904.00	38.34	Ave	338	1.2	V	-0.24	38.10	54.00	-15.90
7356.00	36.63	PK	180	1.7	H	2.83	39.46	74.00	-34.54
7356.00	30.78	Ave	180	1.7	H	2.83	33.61	54.00	-20.39
2333.88	45.80	PK	252	1.6	V	-13.19	32.61	74.00	-41.39
2333.88	37.78	Ave	252	1.6	V	-13.19	24.59	54.00	-29.41
2354.49	43.16	PK	321	1.2	H	-13.14	30.02	74.00	-43.98
2354.49	37.62	Ave	321	1.2	H	-13.14	24.48	54.00	-29.52
2491.98	44.28	PK	153	1.9	V	-13.08	31.20	74.00	-42.80
2491.98	38.76	Ave	153	1.9	V	-13.08	25.68	54.00	-28.32

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded.

9 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance V04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result

Test result plots shown as follows:


ANT1:

TX 11b: Band edge-left side

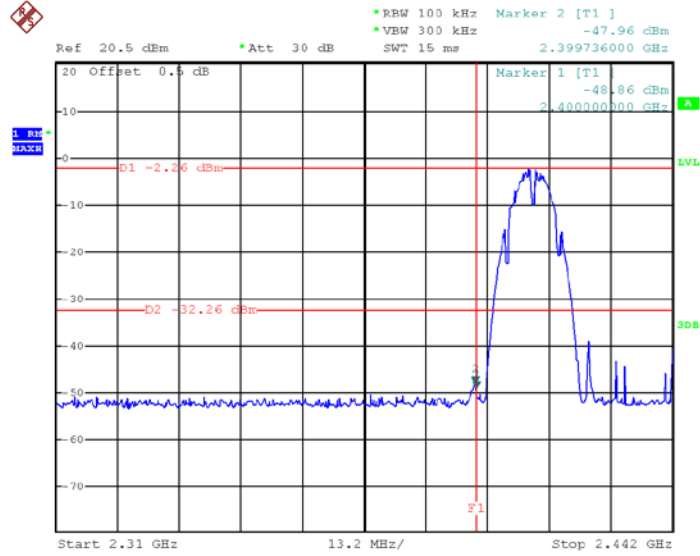


Date: 30.JUL.2018 07:55:23

TX 11b: Band edge-right side

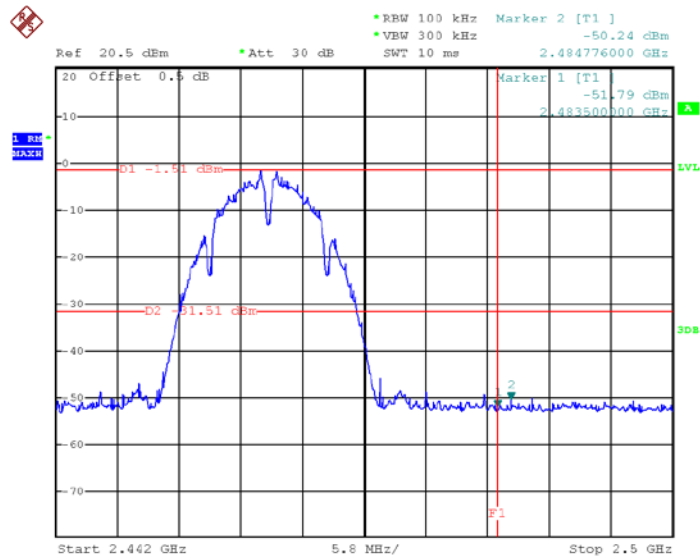


Date: 30.JUL.2018 07:45:13

TX 11g: Band edge-left side

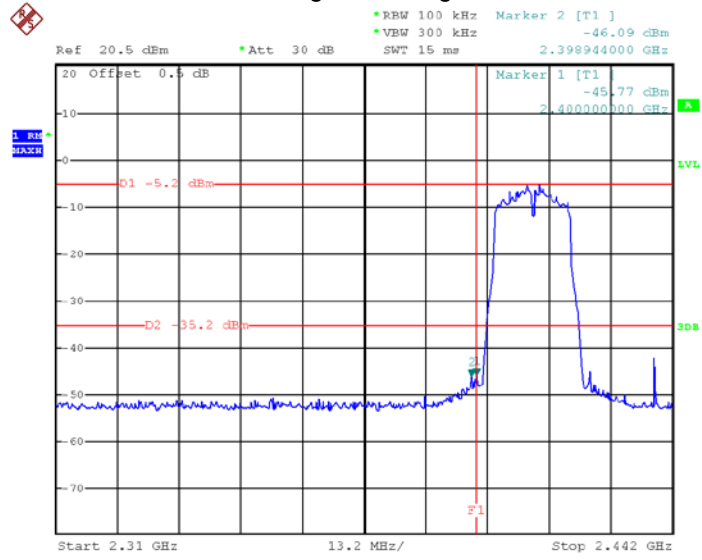


Date: 30.JUL.2018 07:58:48

TX 11g: Band edge-right side

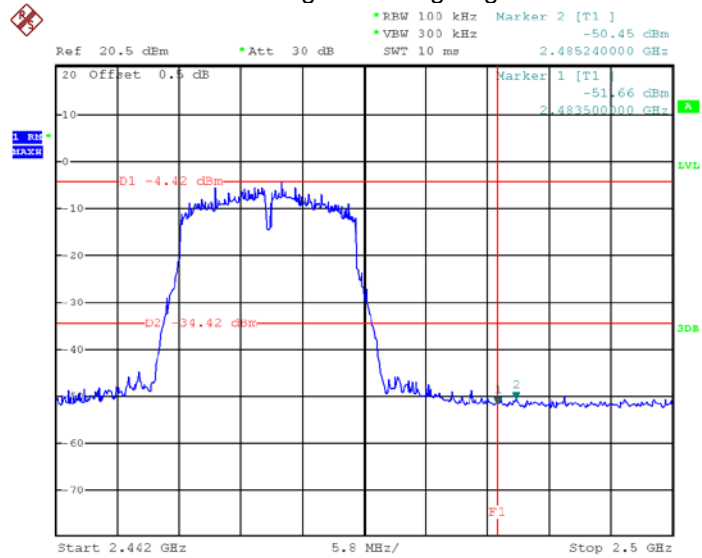


Date: 30.JUL.2018 07:37:55

TX 11n HT20: Band edge-left side

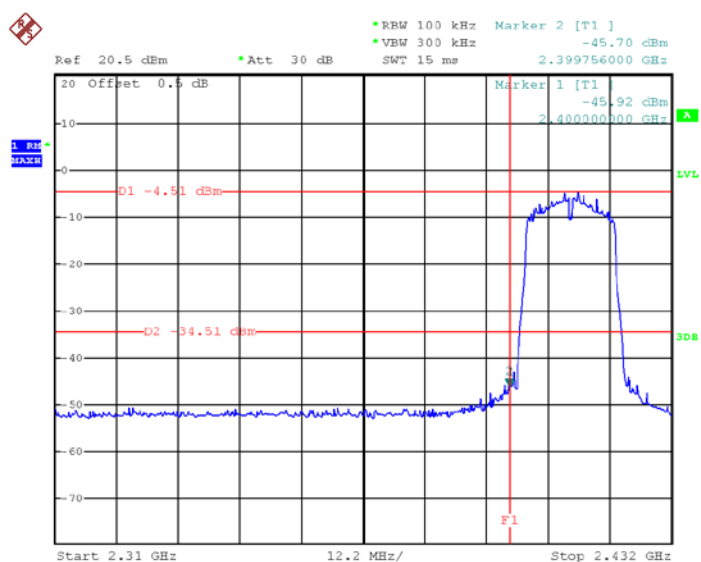


Date: 30.JUL.2018 07:31:19

TX 11n HT20: Band edge-right side

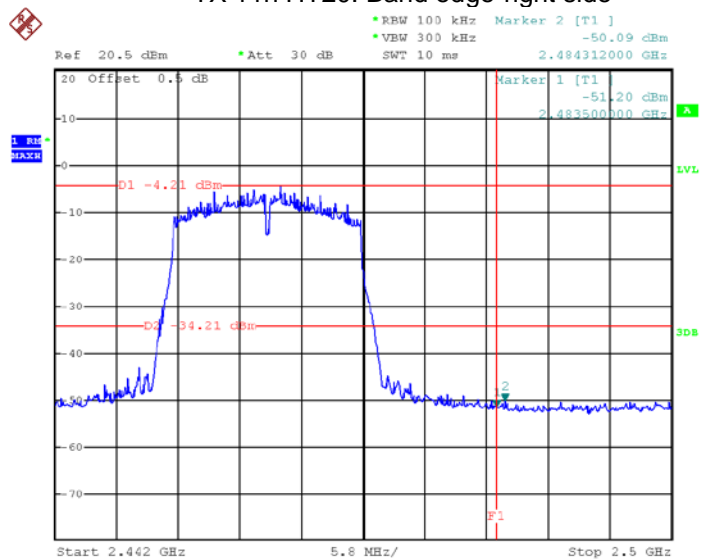


Date: 30.JUL.2018 07:34:25

TX 11n HT40: Band edge-left side

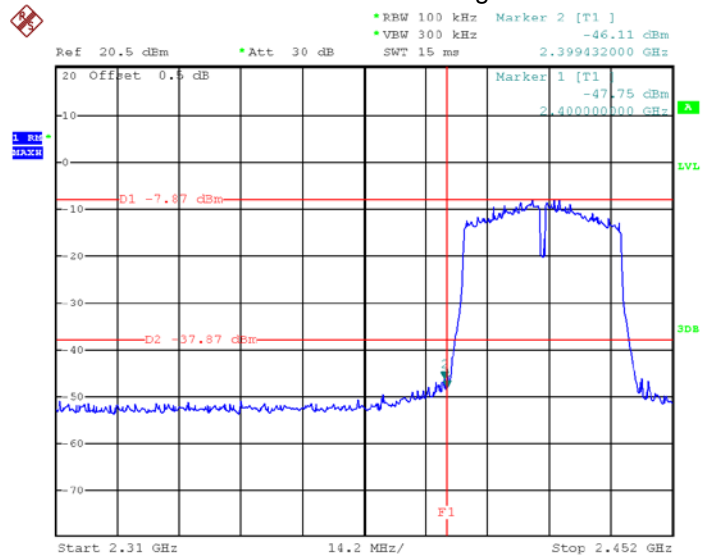

Date: 30.JUL.2018 07:23:25


TX 11n HT40: Band edge-right side

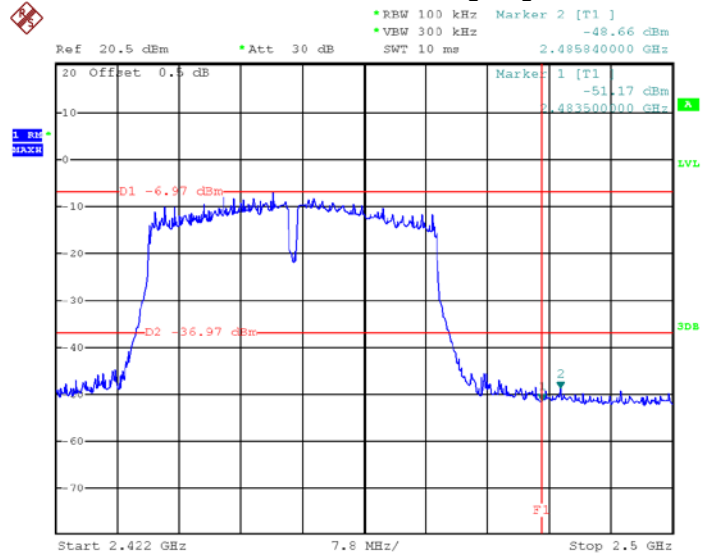

Date: 30.JUL.2018 07:14:44


ANT2:

TX 11b: Band edge-left side

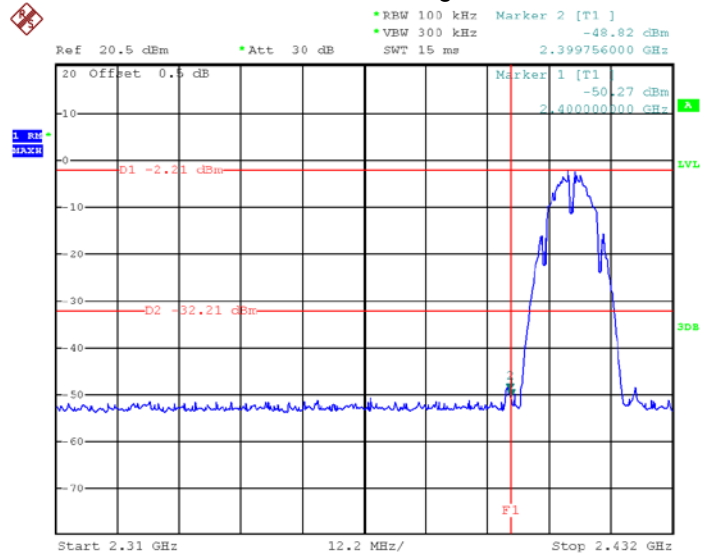


Date: 30.JUL.2018 21:45:41

TX 11b: Band edge-right side

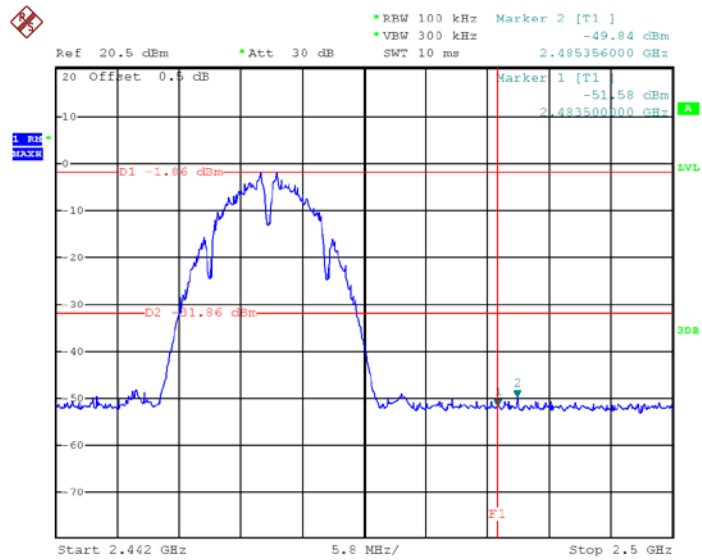


Date: 30.JUL.2018 21:47:41

TX 11g: Band edge-left side

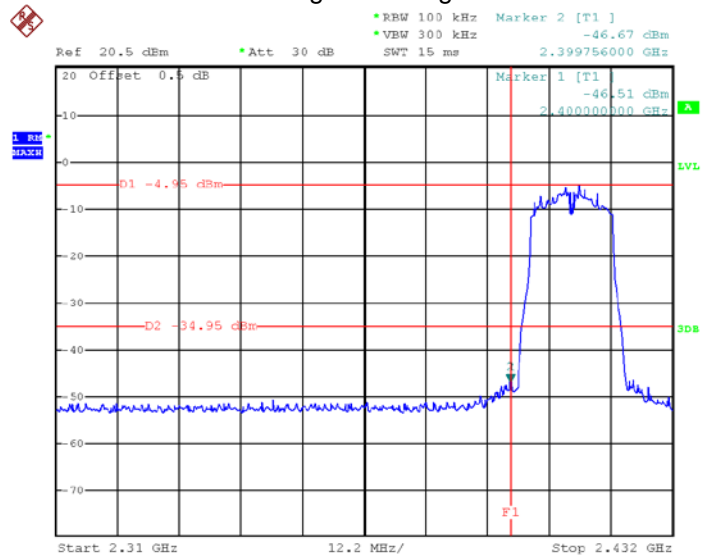


Date: 30.JUL.2018 21:44:12

TX 11g: Band edge-right side

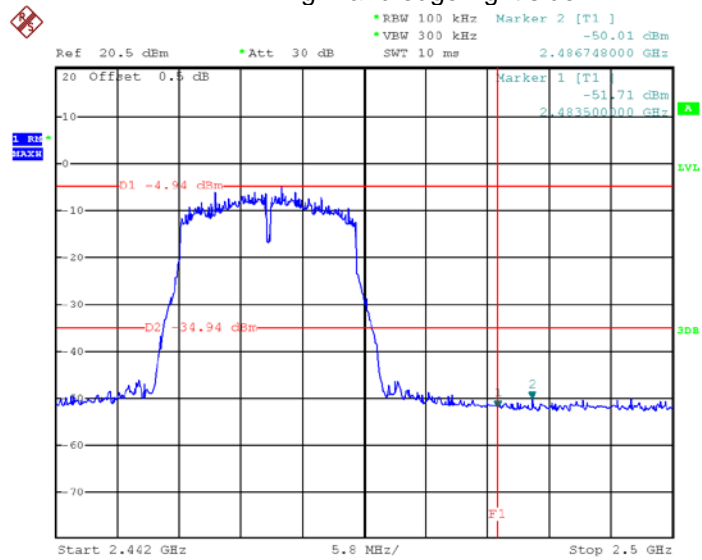


Date: 30.JUL.2018 21:50:04

TX 11n HT20: Band edge-left side

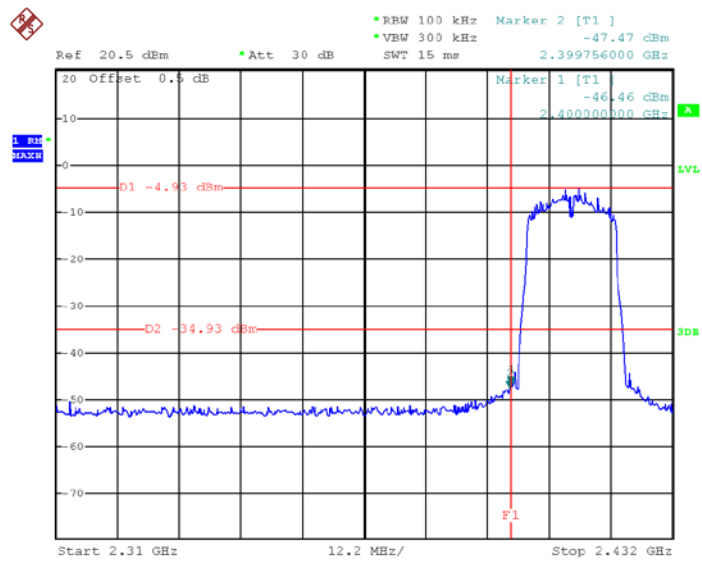


Date: 30.JUL.2018 21:41:31

TX 11n HT20: Band edge-right side

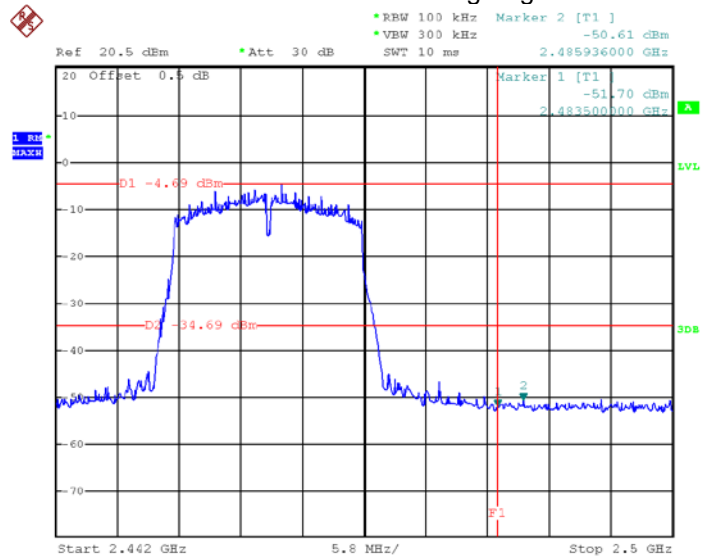


Date: 30.JUL.2018 21:51:36

TX 11n HT40: Band edge-left side

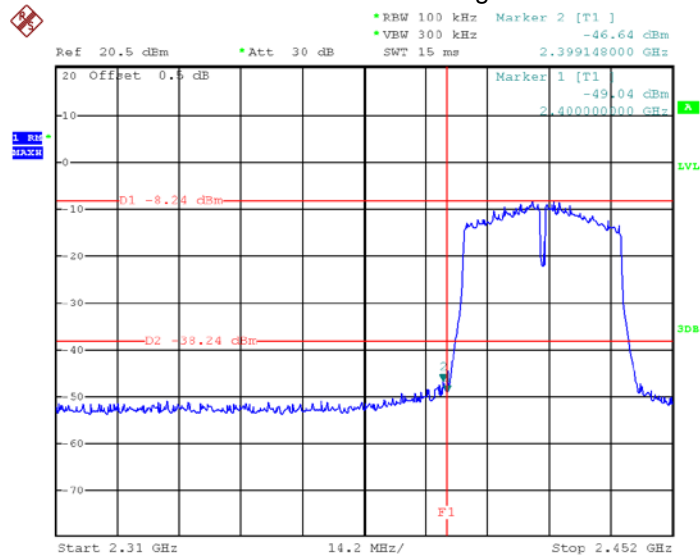

Date: 30.JUL.2018 21:38:46

TX 11n HT40: Band edge-right side

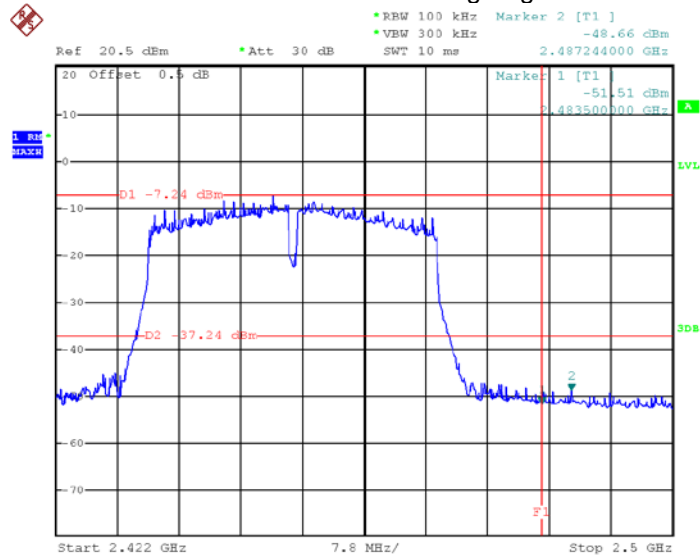

Date: 30.JUL.2018 21:36:33

10 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

10.2 Test Result:

ANT1:


Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	8.000	8.080	8.080	12.640	12.600	12.600
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.150	15.150	15.150	16.350	16.300	16.300
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.174	15.120	15.120	17.496	17.496	17.496
TX 11n HT40	Channel 3	Channel 6	Channel 9	Channel 3	Channel 6	Channel 9
	35.180	35.200	35.160	35.750	35.750	35.750

ANT2:

Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	8.080	8.560	8.040	12.600	12.640	12.600
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.150	15.150	15.160	16.350	16.300	16.300
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.120	15.120	15.120	17.496	17.496	17.496
TX 11n HT40	Channel 3	Channel 6	Channel 9	Channel 3	Channel 6	Channel 9
	35.240	35.200	35.200	35.860	35.750	35.750


ANT1

Mode: TX 11b channel 1

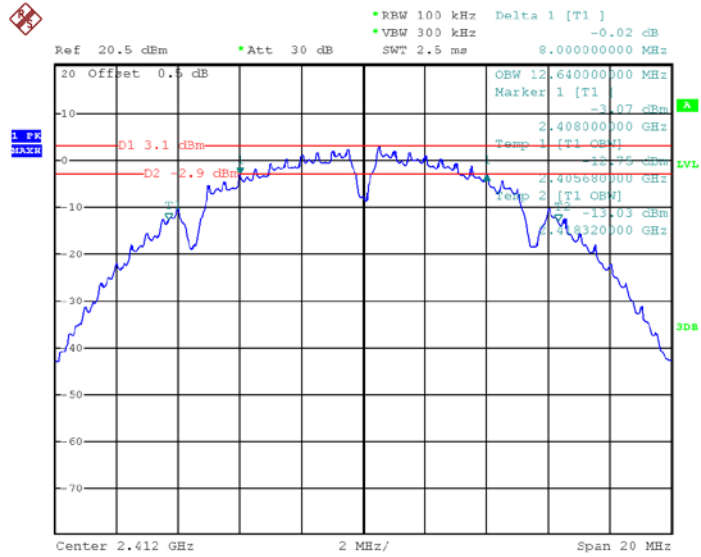


Date: 30.JUL.2018 05:55:04

Mode: TX 11b channel 6

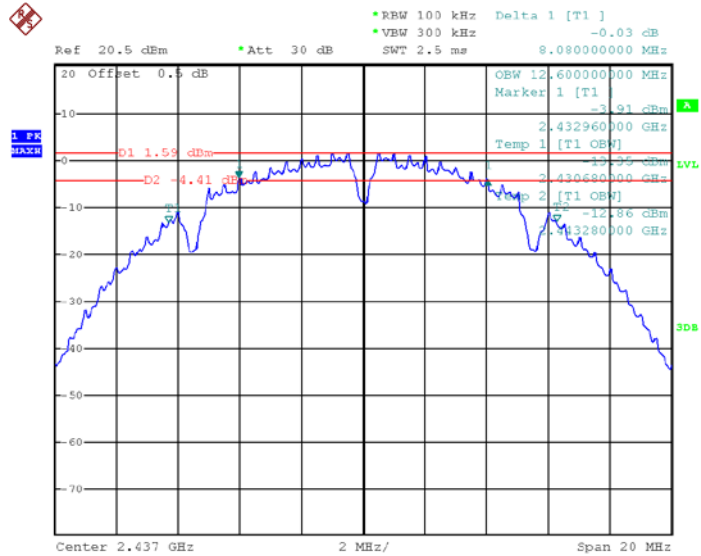


Date: 30.JUL.2018 05:56:43

Mode: TX 11b channel 11

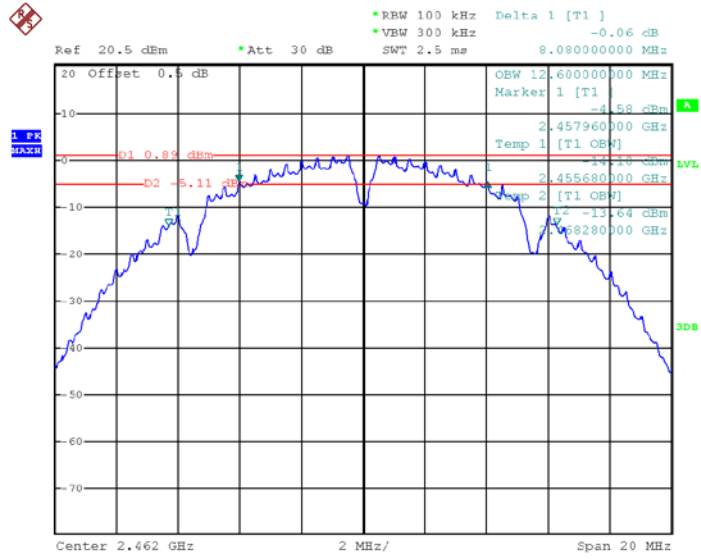


Date: 30.JUL.2018 05:58:19

Mode: TX 11g channel 1

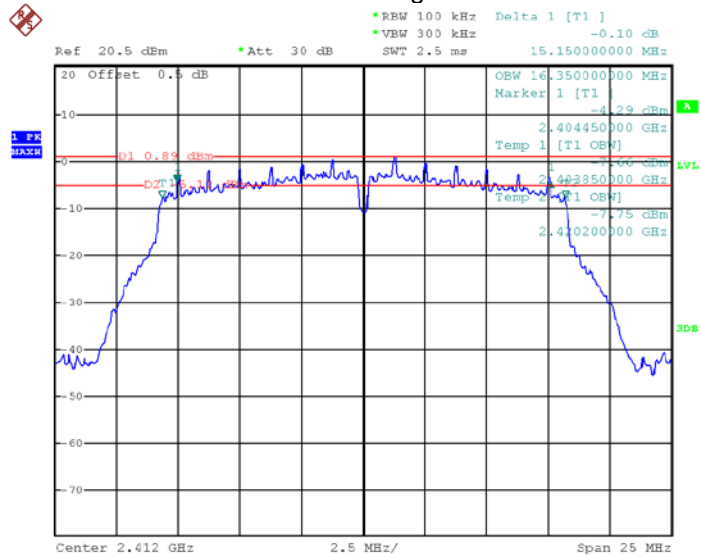


Date: 30.JUL.2018 06:00:21

Mode: TX 11g channel 6

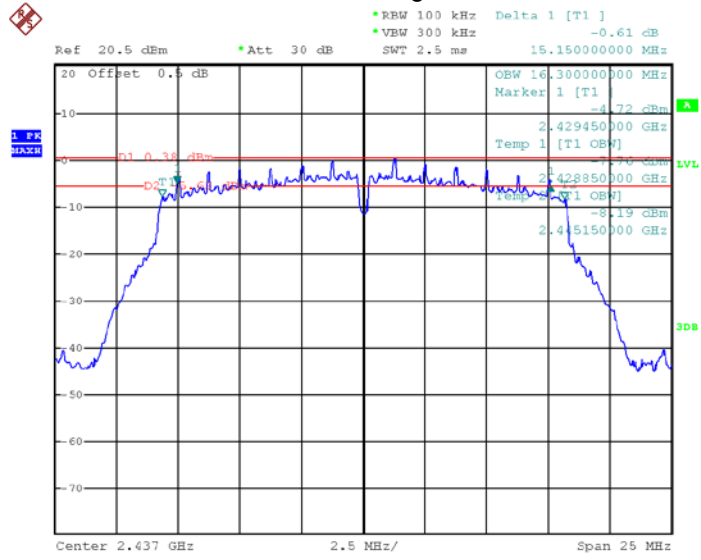


Date: 30.JUL.2018 06:02:17

Mode: TX 11g channel 11

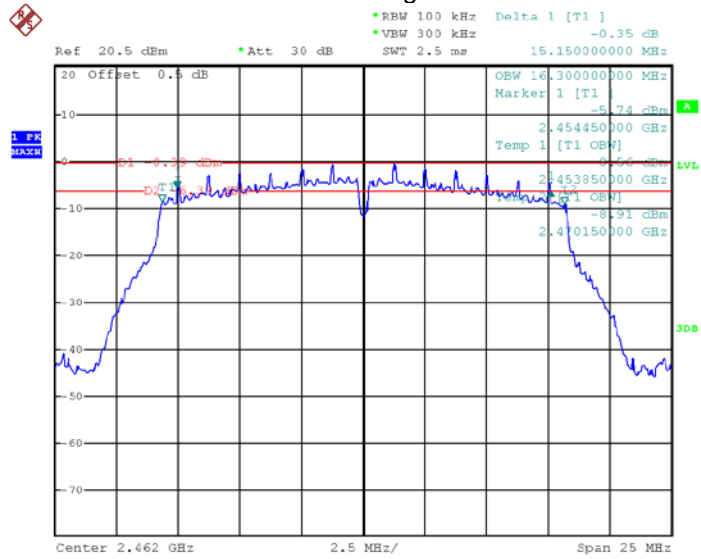


Date: 30.JUL.2018 06:04:15

Mode: TX 11n HT20 channel 1

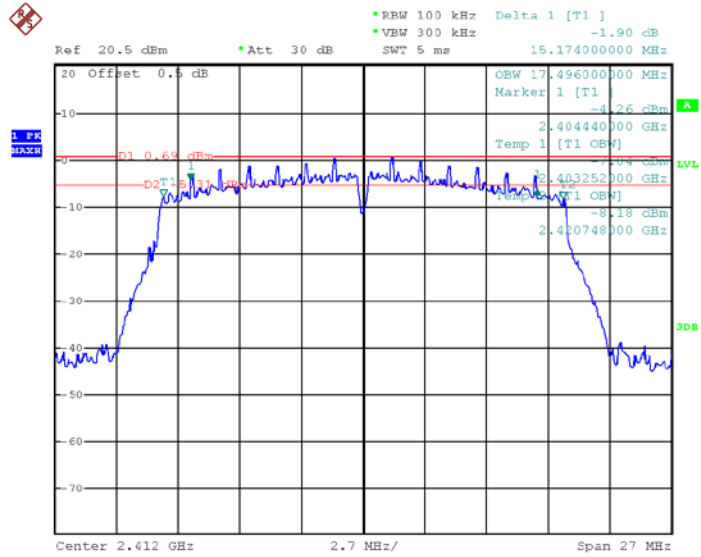


Date: 30.JUL.2018 06:06:23

Mode: TX 11n HT20 channel 6

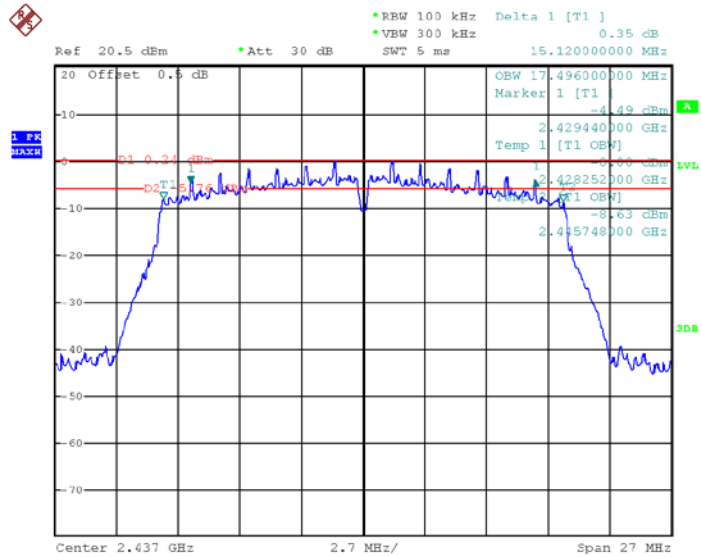


Date: 30.JUL.2018 06:08:30

Mode: TX 11n HT20 channel 11

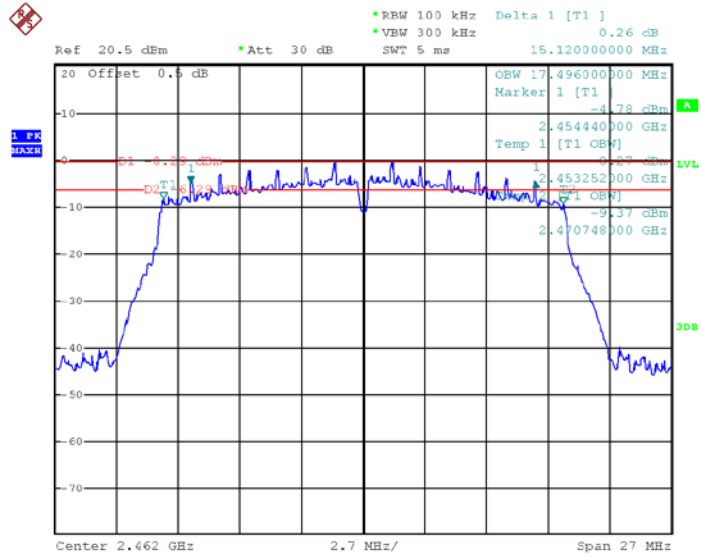


Date: 30.JUL.2018 06:10:06

Mode: TX 11n HT40 channel 3

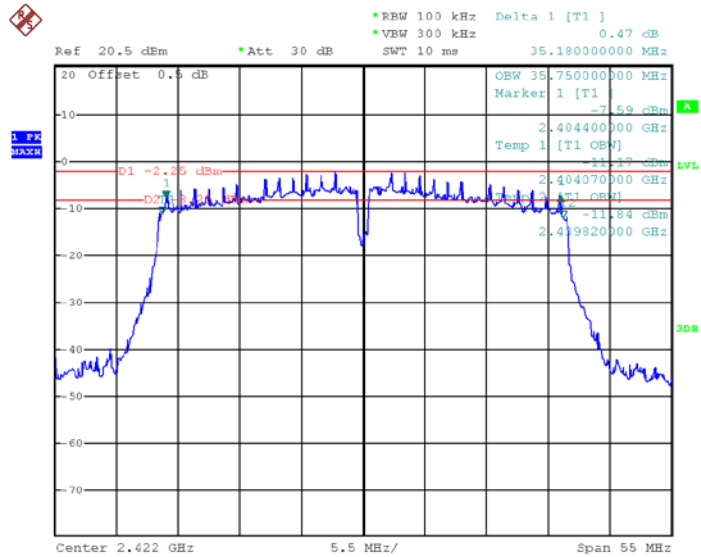


Date: 30.JUL.2018 06:12:25

Mode: TX 11n HT40 channel 6

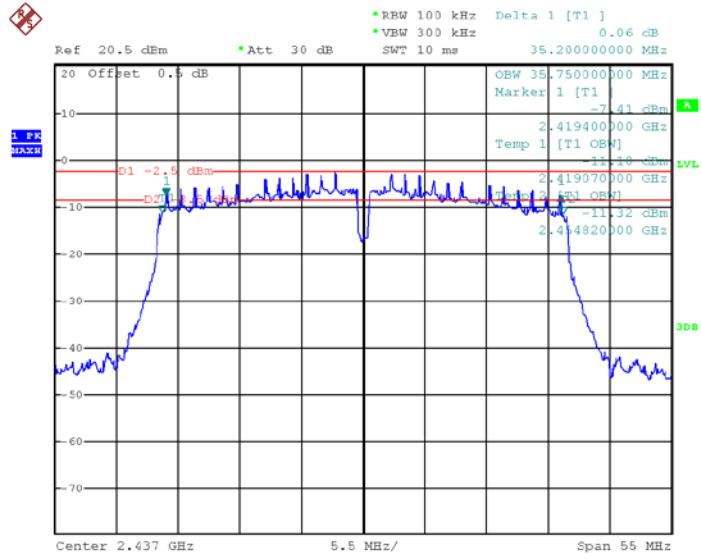

Date: 30.JUL.2018 06:15:25


Mode: TX 11n HT40 channel 9

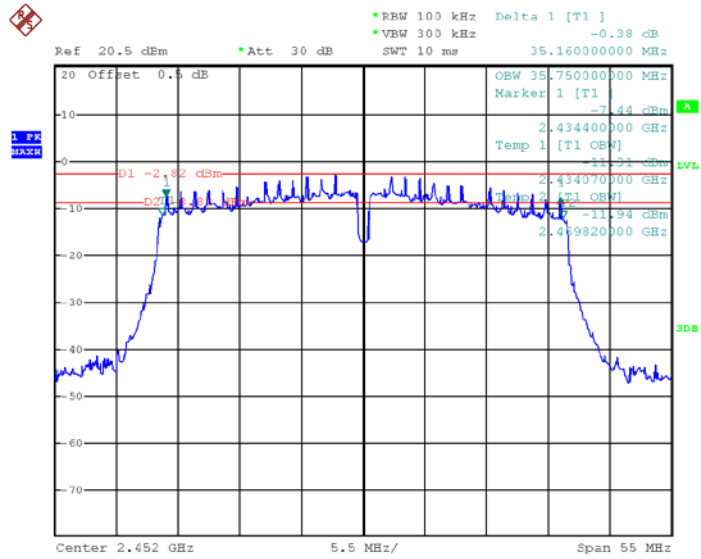

Date: 30.JUL.2018 06:17:10


ANT2

Mode: TX 11b channel 1

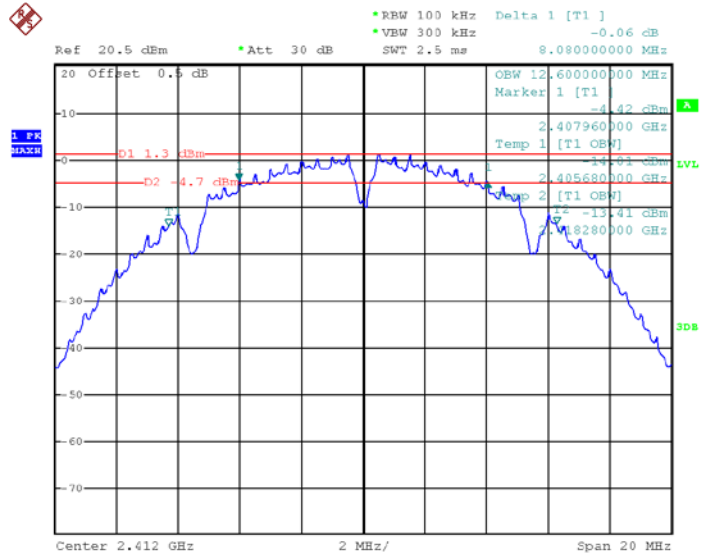


Date: 30.JUL.2018 20:00:22

Mode: TX 11b channel 6

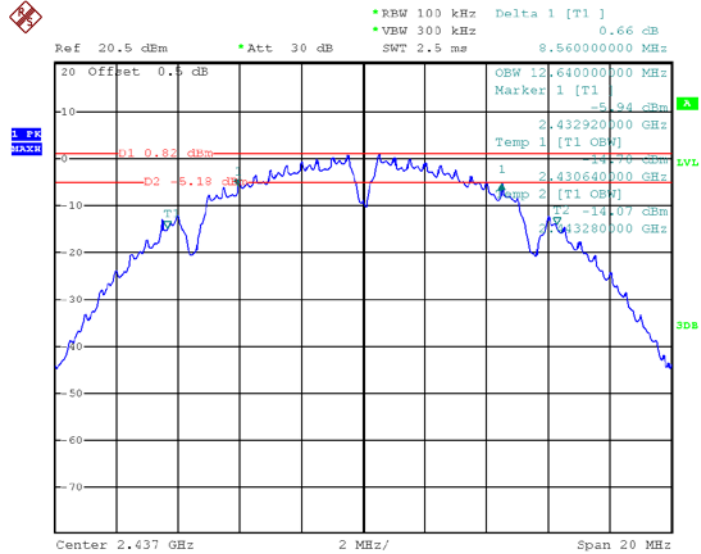


Date: 30.JUL.2018 20:02:32

Mode: TX 11b channel 11

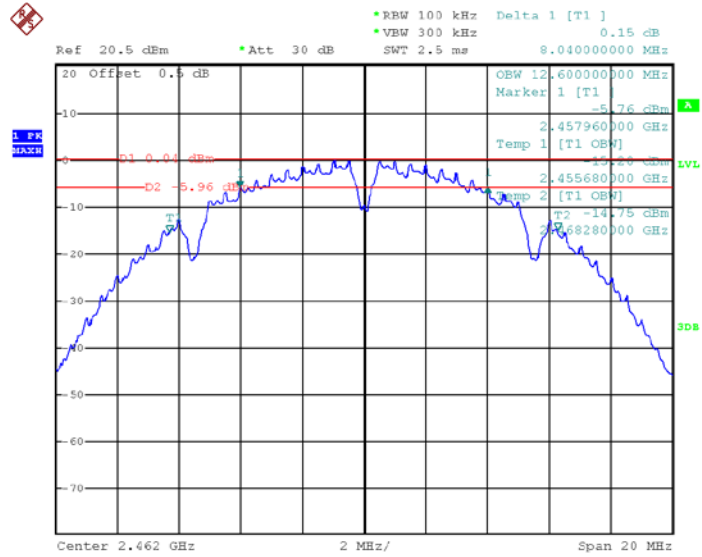


Date: 30.JUL.2018 20:04:38

Mode: TX 11g channel 1

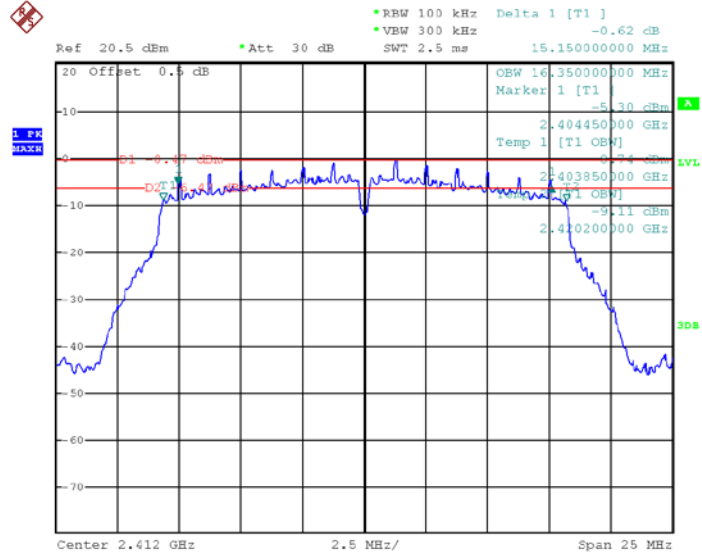


Date: 30.JUL.2018 20:13:20

Mode: TX 11g channel 6

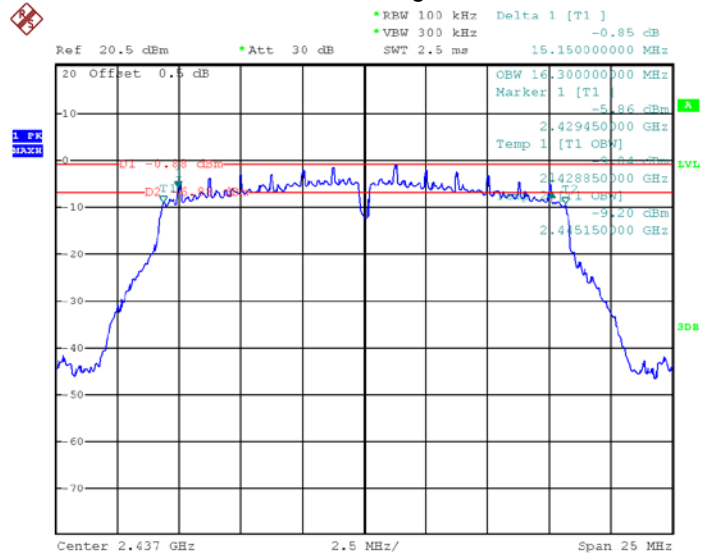


Date: 30.JUL.2018 20:11:39

Mode: TX 11g channel 11

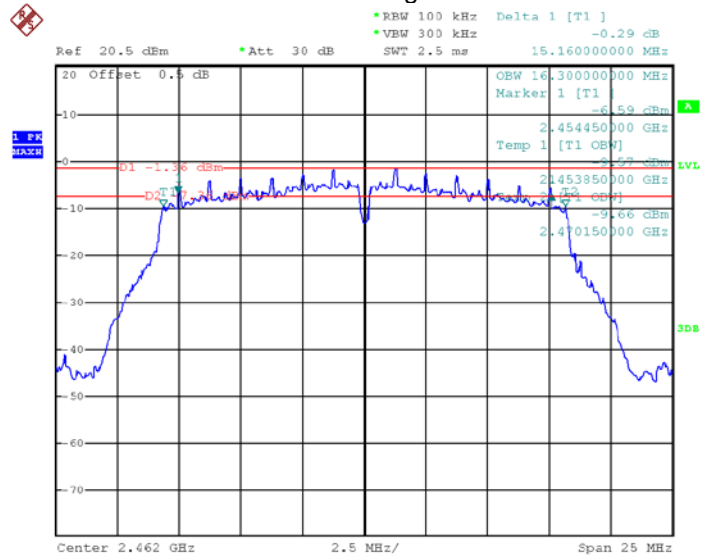


Date: 30.JUL.2018 20:08:58

Mode: TX 11n HT20 channel 1

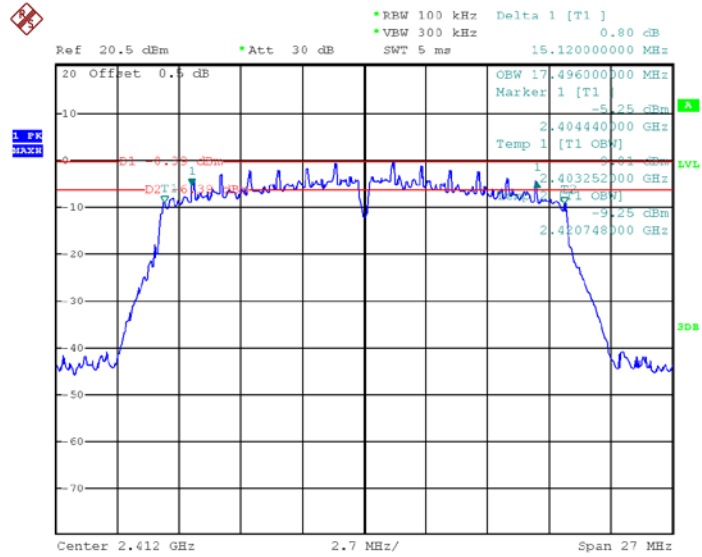


Date: 30.JUL.2018 20:15:48

Mode: TX 11n HT20 channel 6

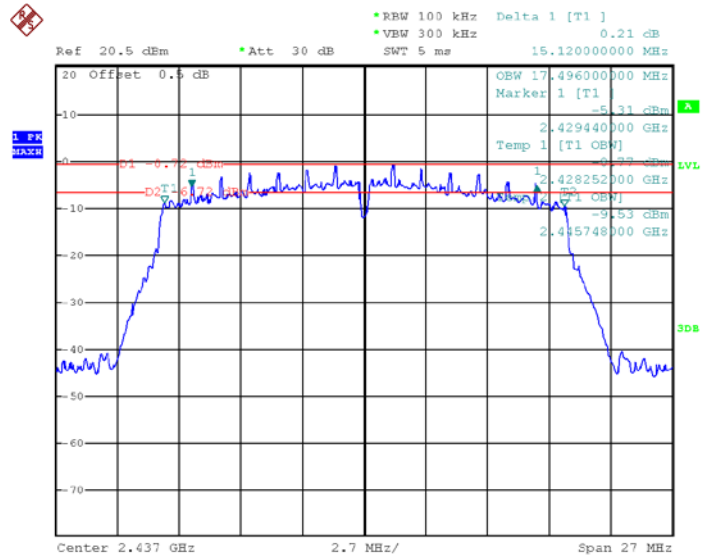


Date: 30.JUL.2018 20:18:43

Mode: TX 11n HT20 channel 11

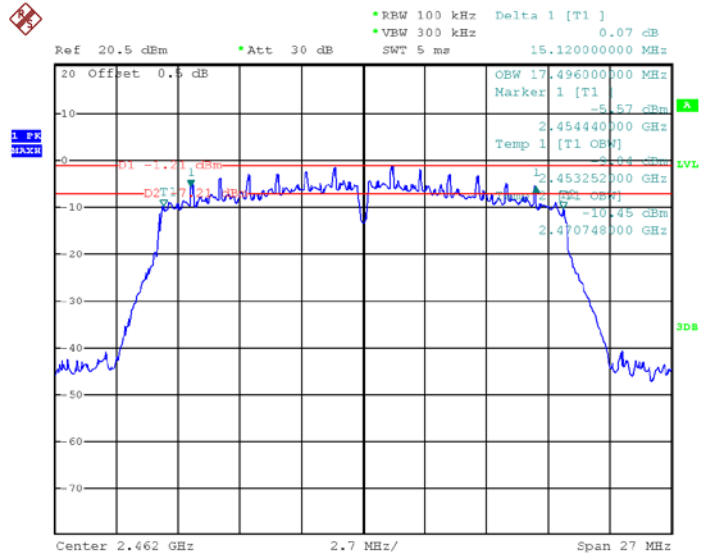


Date: 30.JUL.2018 20:20:00

Mode: TX 11n HT40 channel 3

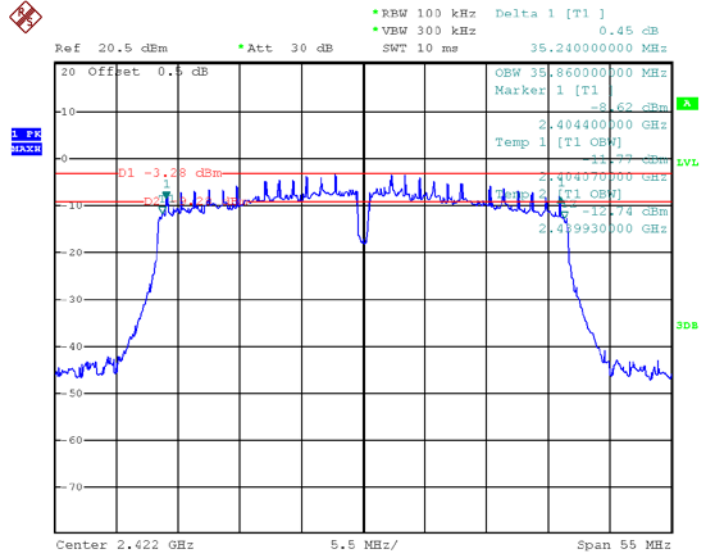


Date: 30.JUL.2018 20:34:24

Mode: TX 11n HT40 channel 6

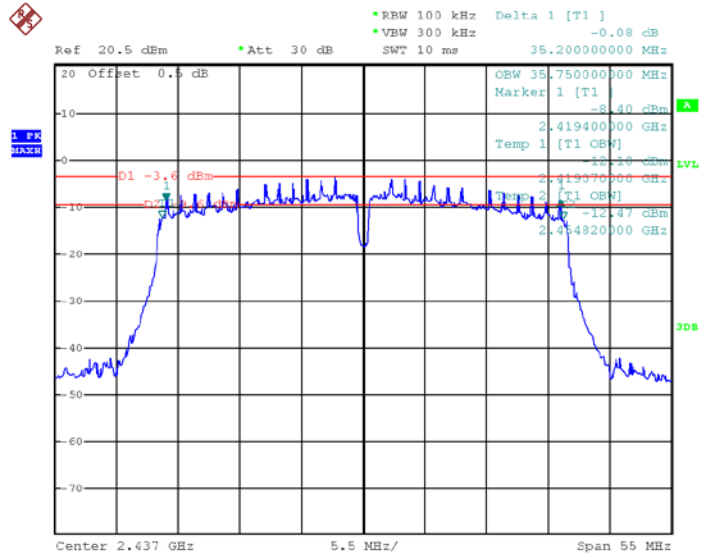

Date: 30.JUL.2018 20:30:53

Mode: TX 11n HT40 channel 9

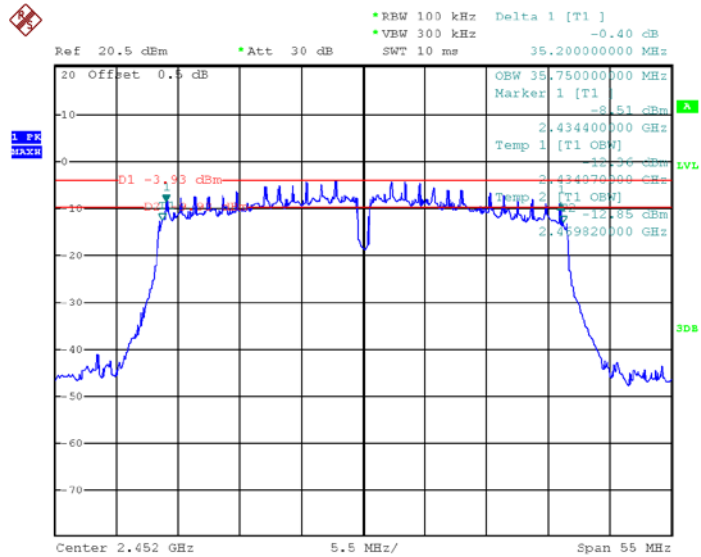

Date: 30.JUL.2018 20:25:31

11 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

11.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result:

ANT1:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.82	10.73	10.76
Limit: 1W/30dBm		
Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.27	10.21	10.30
Limit: 1W/30dBm		
Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.13	10.17	10.10
Limit: 1W/30dBm		
Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.67	9.82	9.83
Limit: 1W/30dBm		

ANT2:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.80	10.92	10.95
Limit: 1W/30dBm		
Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.23	10.32	10.27
Limit: 1W/30dBm		
Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
10.12	10.14	10.08
Limit: 1W/30dBm		
Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.84	9.76	9.79
Limit: 1W/30dBm		

ANT1+ANT2:

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
13.14	13.17	13.10
Limit: 1W/30dBm		
Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
12.77	12.80	12.82
Limit: 1W/30dBm		

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

12.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Result:

ANT1:

Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-14.32	-14.68	-15.18
Limit: 8dBm per 3kHz		
Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-15.82	-15.92	-17.27
Limit: 8dBm per 3kHz		
Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-15.60	-16.65	-15.30
Limit: 8dBm per 3kHz		
Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-18.07	-18.92	-19.04
Limit: 8dBm per 3kHz		

ANT2:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-15.99	-16.13	-17.07
Limit: 8dBm per 3kHz		
Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-16.75	-16.73	-17.62
Limit: 8dBm per 3kHz		
Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-15.69	-13.97	-16.97
Limit: 8dBm per 3kHz		
Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-18.57	-19.16	-19.63
Limit: 8dBm per 3kHz		

ANT1+ANT2:

Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-12.63	-12.10	-13.04
Limit: 8dBm per 3kHz		
Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-15.30	-16.03	-16.31
Limit: 8dBm per 3kHz		


ANT1:

Model: TX 11b Low Channel

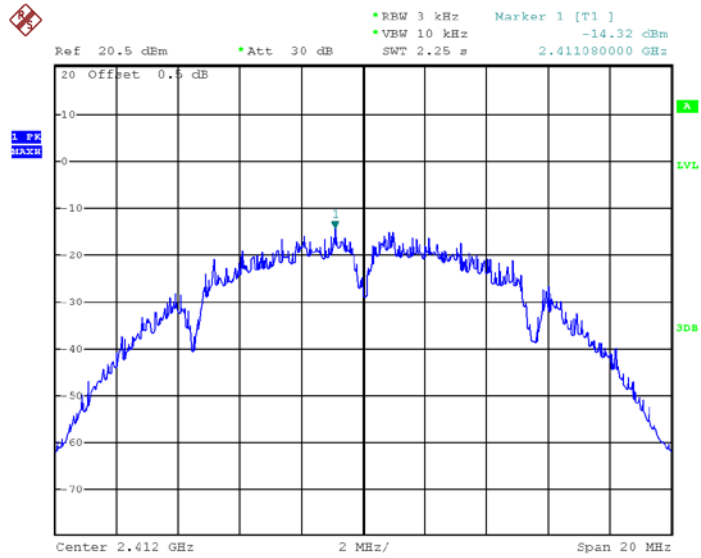


Date: 30.JUL.2018 06:52:15

Model: TX 11b Middle channel

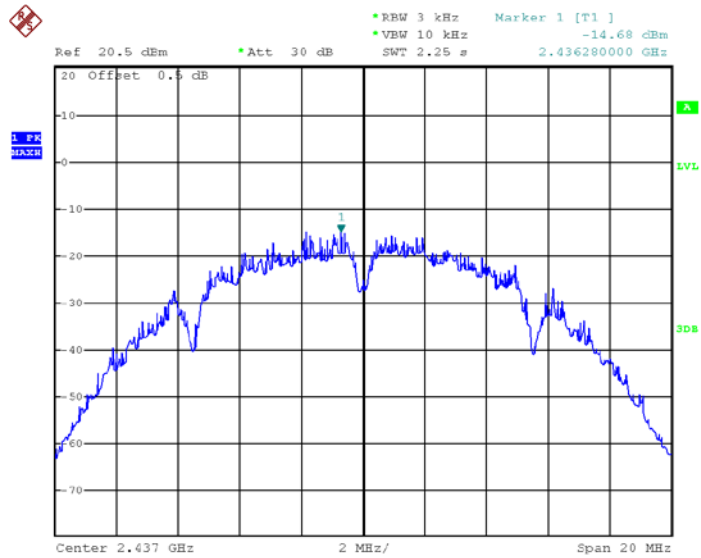


Date: 30.JUL.2018 06:53:21

Model: TX 11b High channel

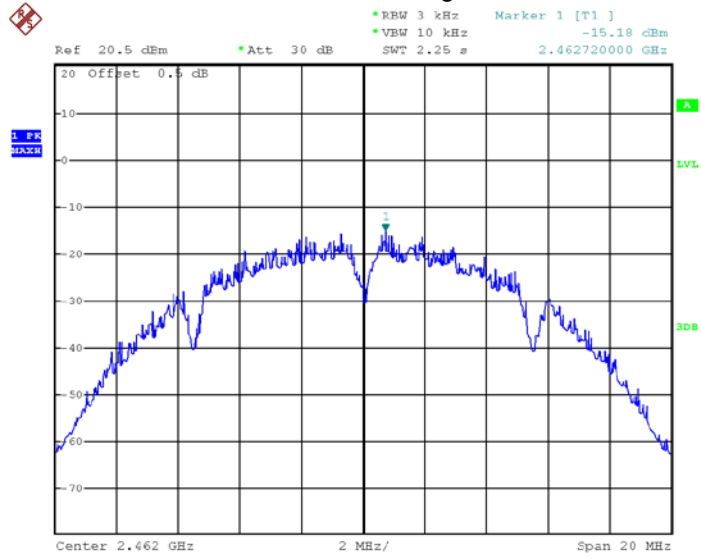


Date: 30.JUL.2018 06:55:22


Mode :TX 11g 2412MHz

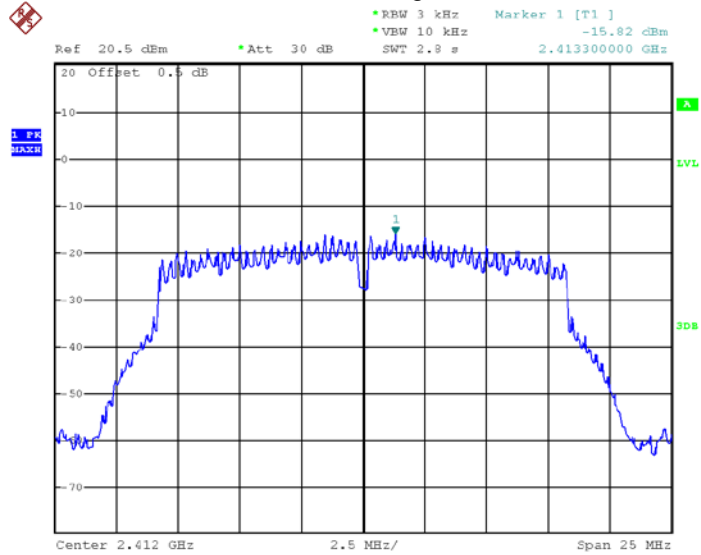

Date: 30.JUL.2018 06:57:03

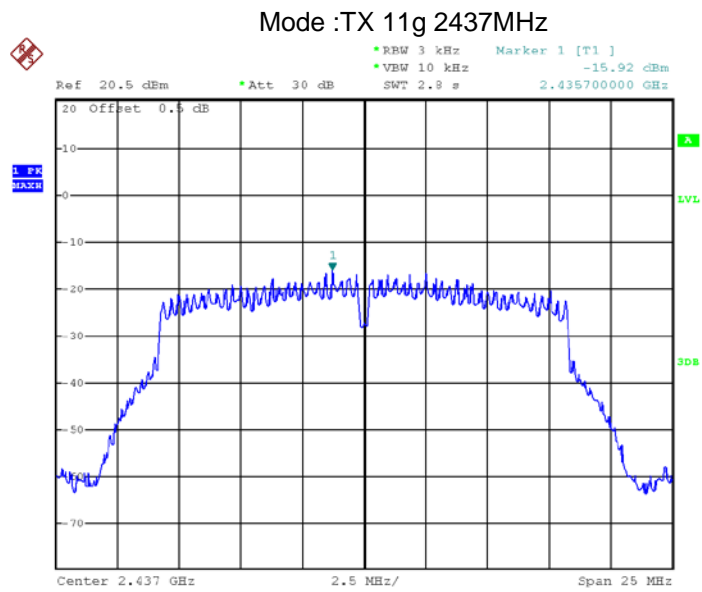


Date: 30.JUL.2018 06:58:28

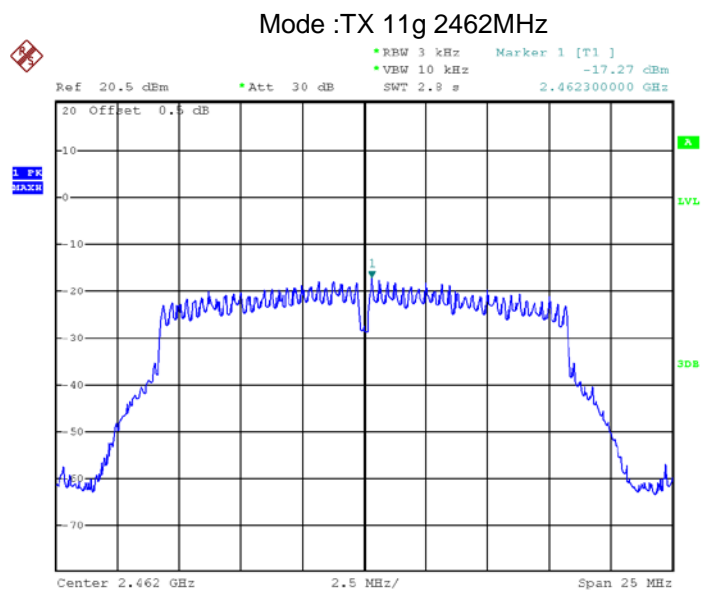


Date: 30.JUL.2018 06:59:38

Mode: TX 11n HT20 2412MHz

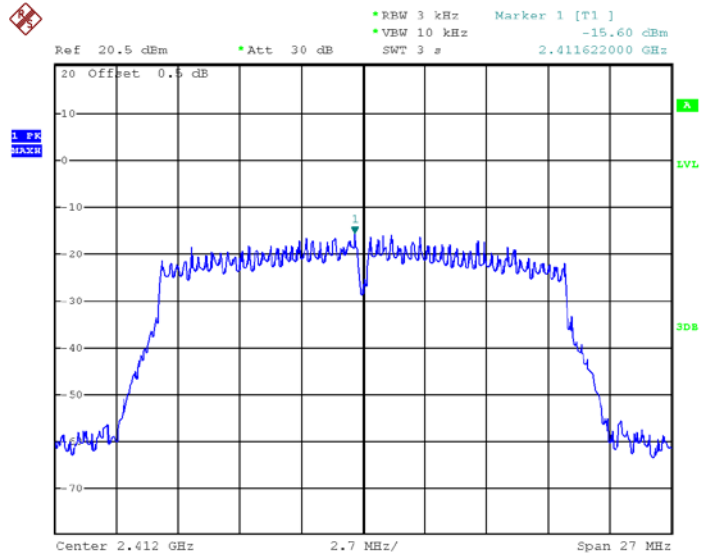


Date: 30.JUL.2018 07:00:43

Mode: TX 11n HT20 2437MHz

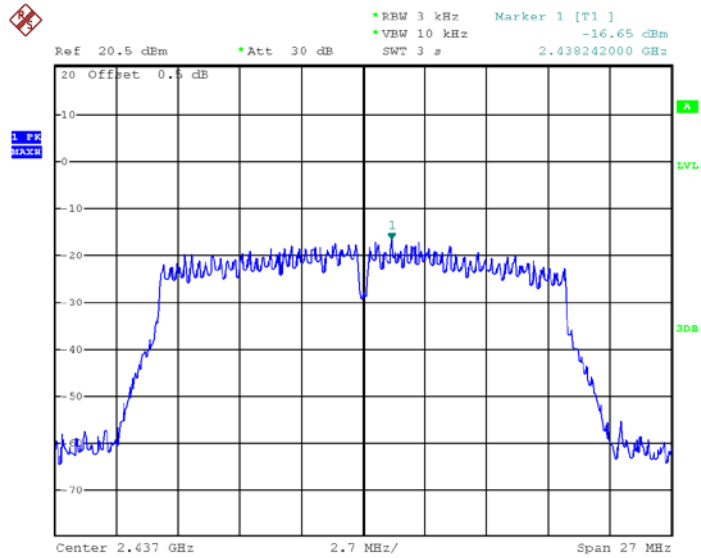


Date: 30.JUL.2018 07:01:19

Mode: TX 11n HT20 2462MHz

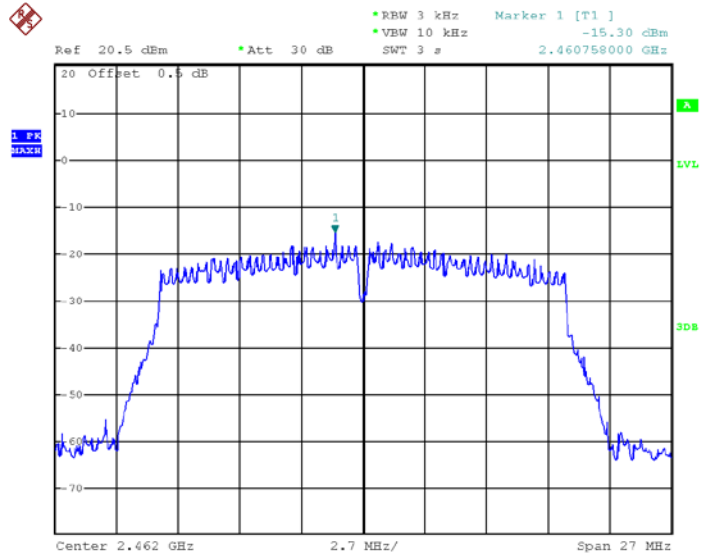


Date: 30.JUL.2018 07:02:08

Mode: TX 11n HT40 2422MHz

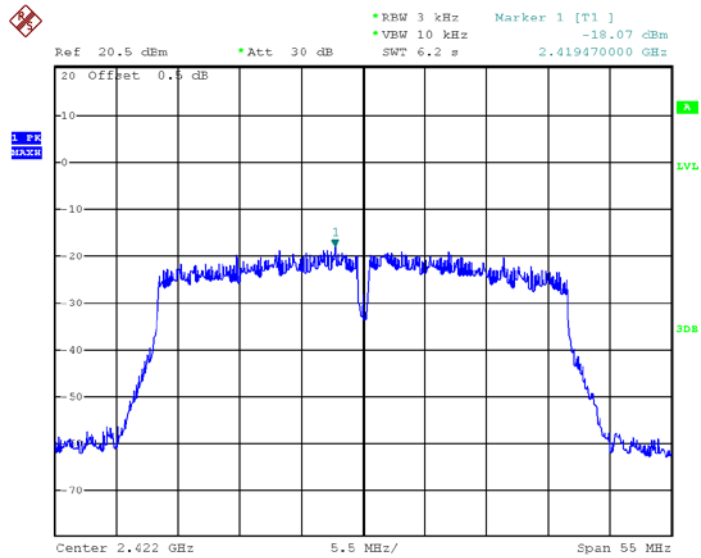


Date: 30.JUL.2018 07:07:30

Mode: TX 11n HT40 2437MHz

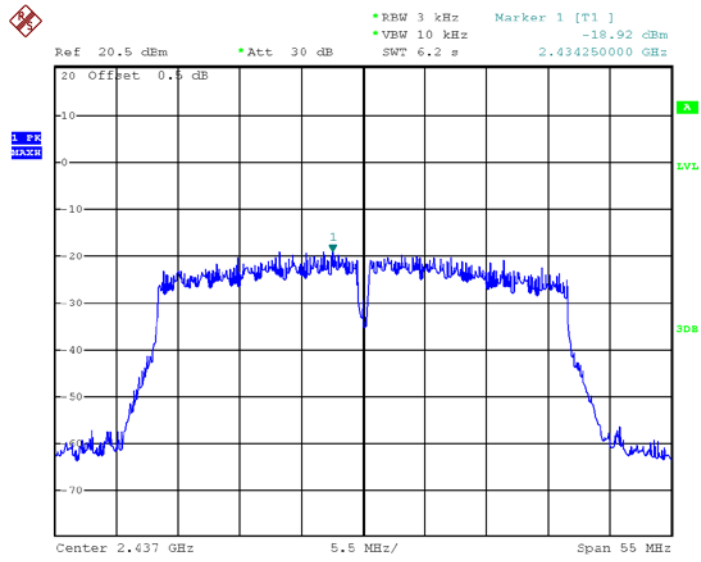

Date: 30.JUL.2018 07:09:23


Mode: TX 11n HT40 2452MHz

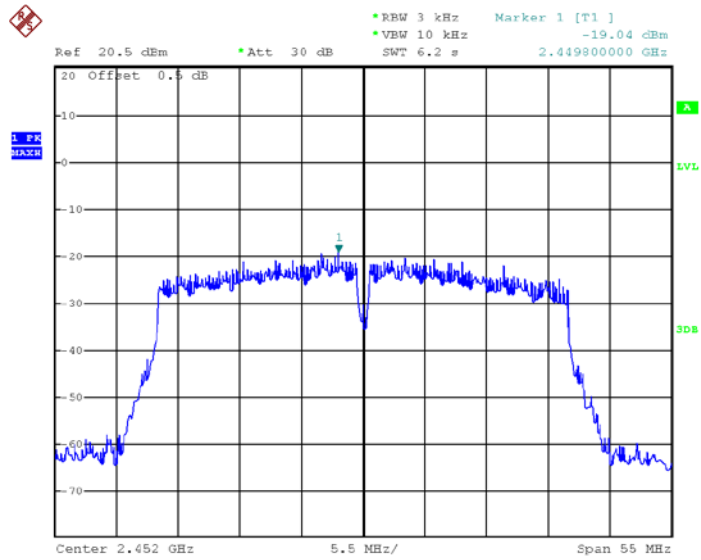

Date: 30.JUL.2018 07:09:58


ANT2:

Model: TX 11b Low Channel

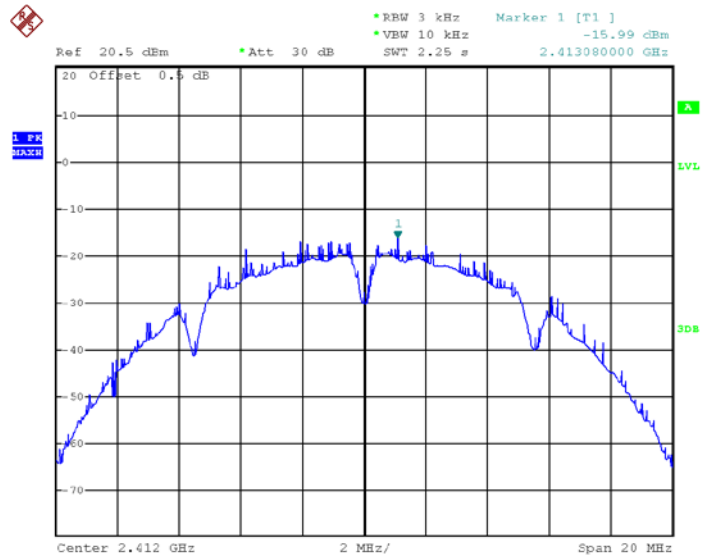


Date: 30.JUL.2018 21:21:25

Model: TX 11b Middle channel

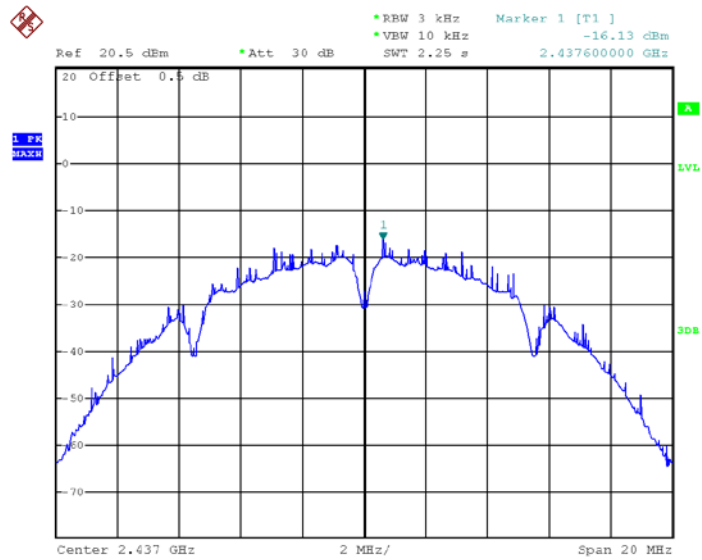


Date: 30.JUL.2018 21:22:08

Model: TX 11b High channel

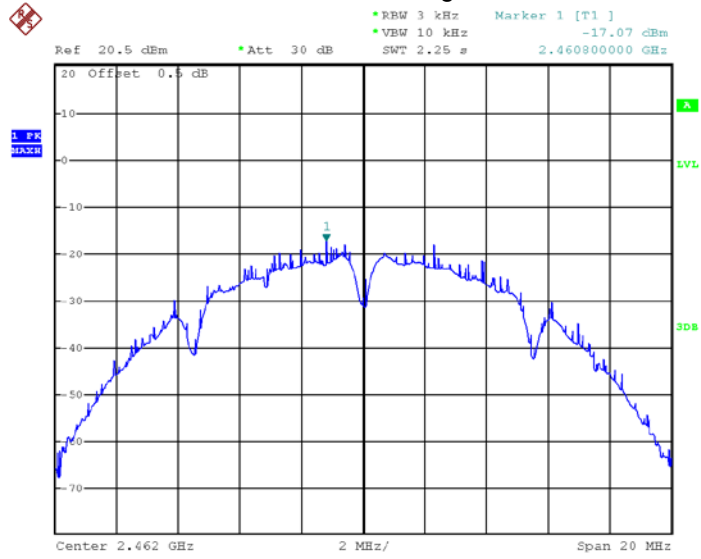


Date: 30.JUL.2018 21:22:43


Mode :TX 11g 2412MHz

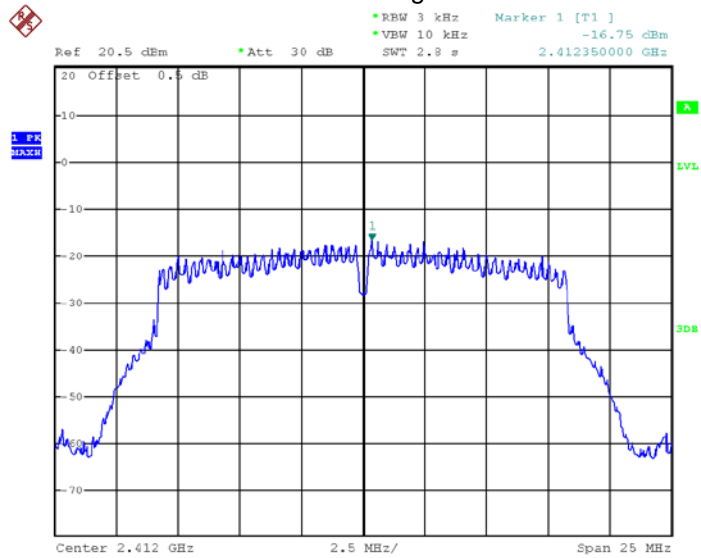

Date: 30.JUL.2018 21:23:44

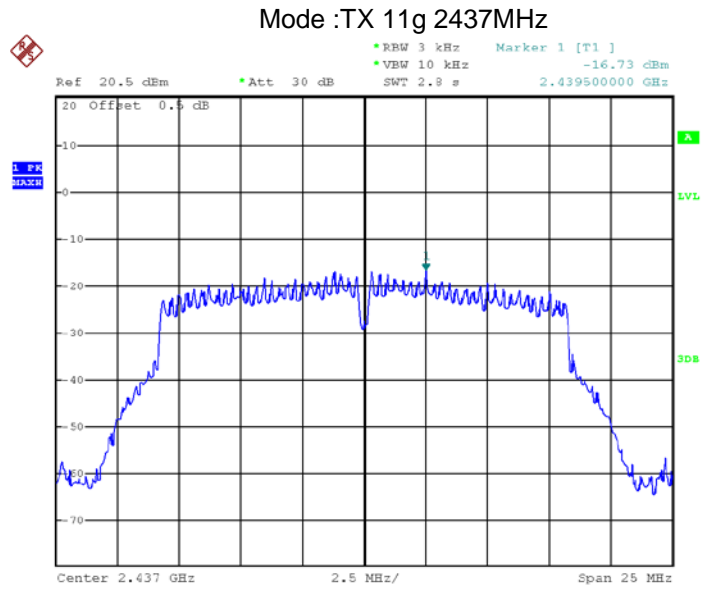


Date: 30.JUL.2018 21:24:33

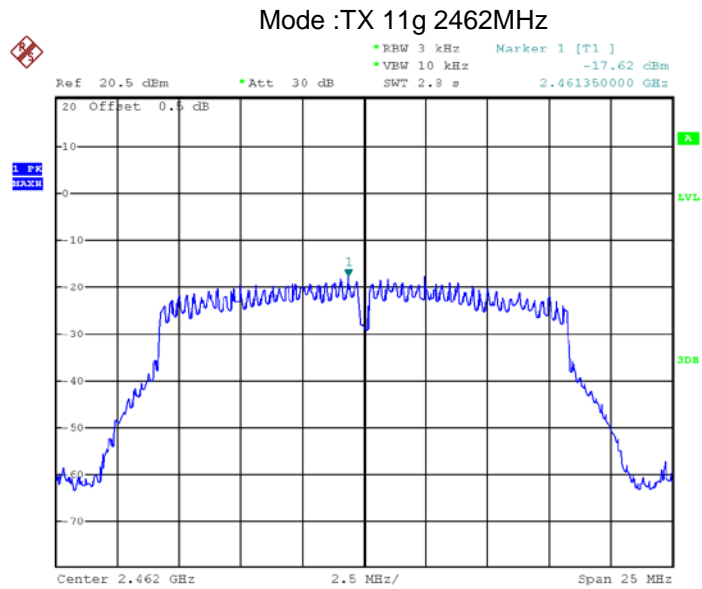


Date: 30.JUL.2018 21:25:39

Mode: TX 11n HT20 2412MHz

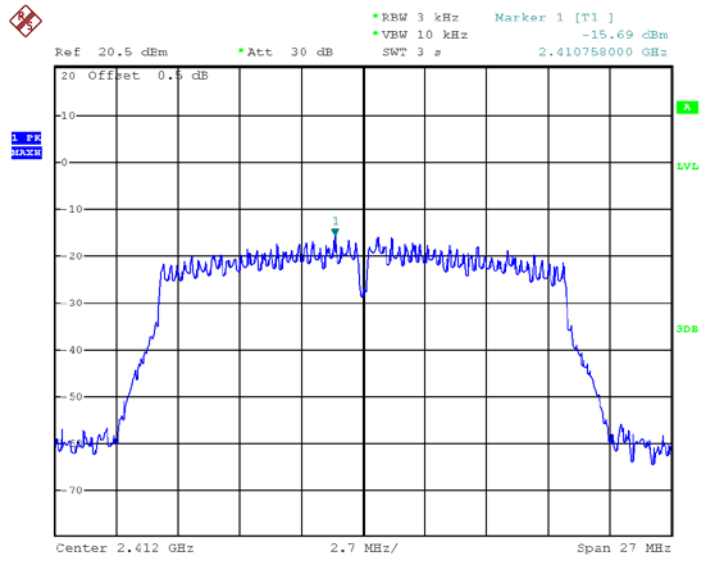


Date: 30.JUL.2018 21:27:13


Mode: TX 11n HT20 2437MHz

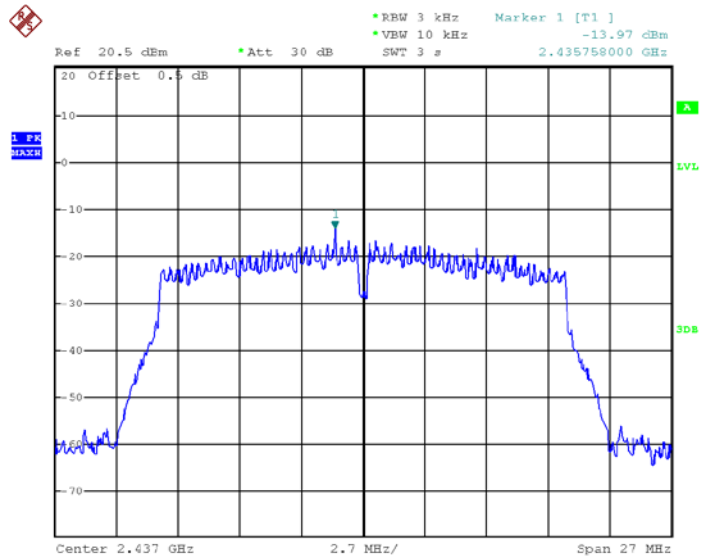

Date: 30.JUL.2018 21:28:25

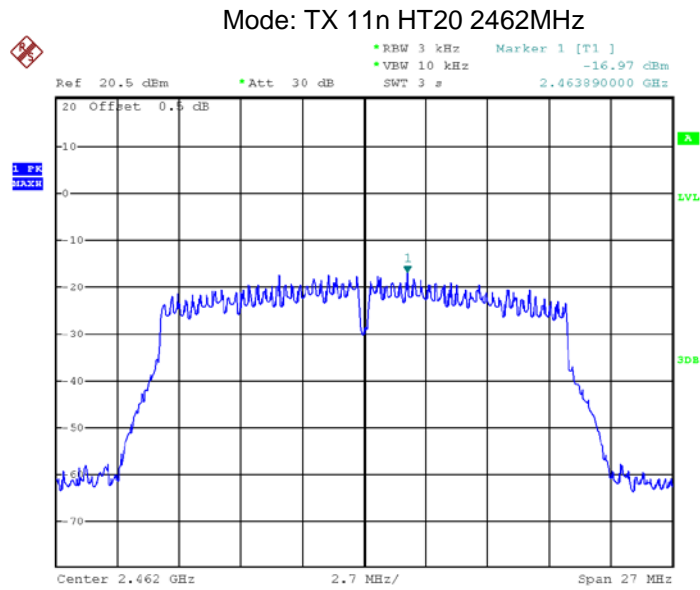


Date: 30.JUL.2018 21:29:25

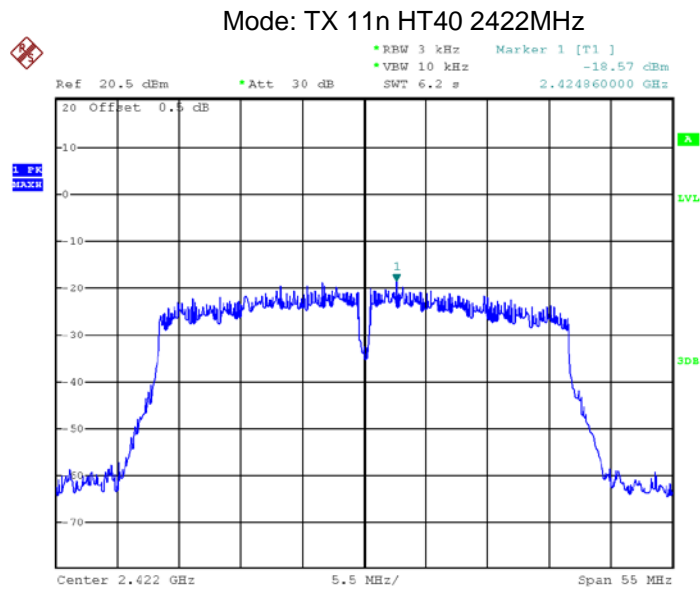


Date: 30.JUL.2018 21:31:07

Mode: TX 11n HT40 2437MHz

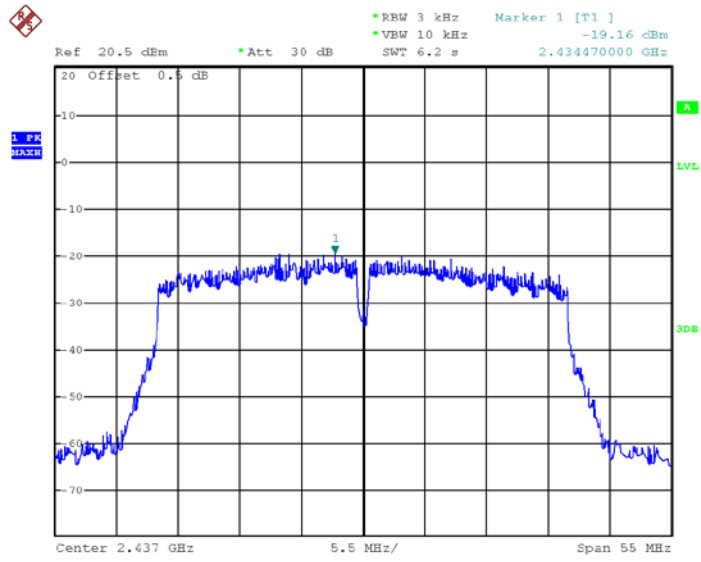

Date: 30.JUL.2018 21:32:24

Mode: TX 11n HT40 2452MHz

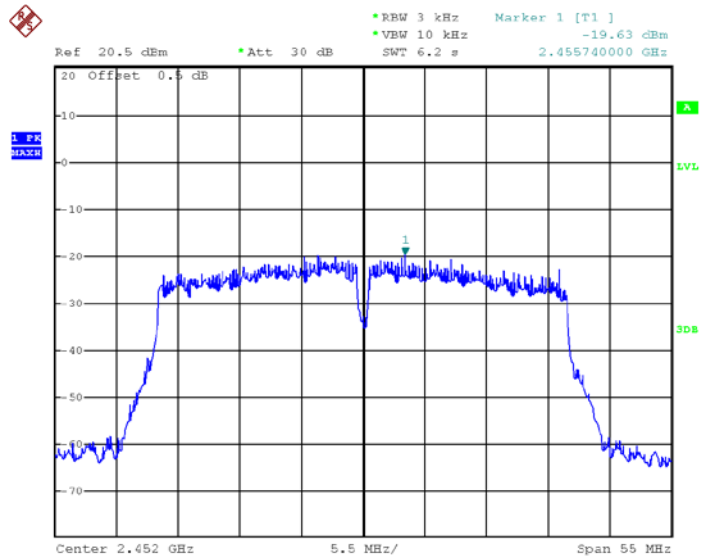

Date: 30.JUL.2018 21:33:31


13 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT have two Integrated Antenna, meets the requirements of FCC 15.203.

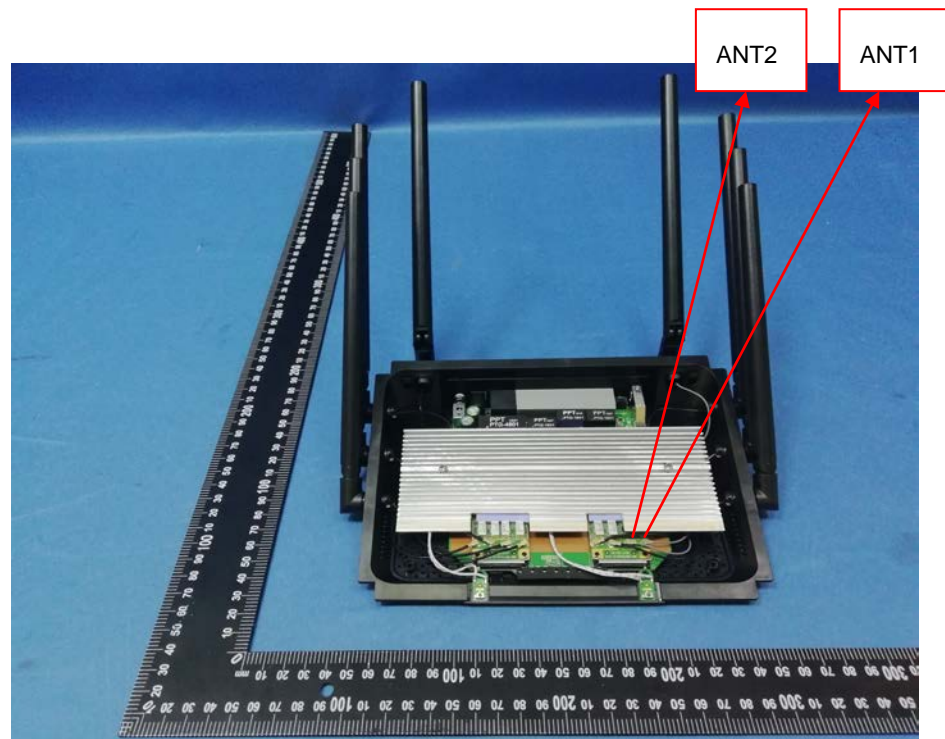

14 RF Exposure Evaluation

Please refer to RF Exposure report.

15 Photographs – Test Setup Photos and EUT

Refer to the file WS-WN536A8_External Photos, WS-WN536A8_Internal Photos and WS-WN536A8_Test Setup Photos.

=====End of Report=====