



FCC 47 CFR PART 15 SUBPART C

for

Wireless N USB Adapter 300Mbps

Model: WS-WN683N2P,U12-43870

Brand: ULTRA

Test Report Number:

C140808Z13-RP1

Issued Date: August 28, 2014

Issued for

Winstars Technology Limited

Block 4, TaiSong Industrial Park, Dalang Street, LongHua Town,

Bao' an district, Shenzhen, China

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 28, 2014	Initial Issue	ALL	Nancy Fu



TABLE OF CONTENTS

1 TEST CERTIFICATION 4

2 TEST RESULT SUMMARY 5

3 EUT DESCRIPTION 6

4 TEST METHODOLOGY 7

 4.1. DESCRIPTION OF TEST MODES 7

5 SETUP OF EQUIPMENT UNDER TEST 8

 5.1. DESCRIPTION OF SUPPORT UNITS 8

 5.2. CONFIGURATION OF SYSTEM UNDER TEST 8

6 FACILITIES AND ACCREDITATIONS 9

 6.1. FACILITIES 9

 6.2. ACCREDITATIONS 9

 6.3. MEASUREMENT UNCERTAINTY 9

7 FCC PART 15.247 REQUIREMENTS 10

 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT 10

 7.2. SPURIOUS EMISSIONS MEASUREMENT 14

 7.3. 6dB BANDWIDTH MEASUREMENT 64

 7.4. PEAK OUTPUT POWER 79

 7.5. BAND EDGES MEASUREMENT 83

 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT 88



1 TEST CERTIFICATION

Product	Wireless N USB Adapter 300Mbps
Model	WS-WN683N2P,U12-43870
Brand	ULTRA
Tested	August 8~ August 27, 2014
Applicant	Winstars Technology Limited Block 4, TaiSong Industrial Park, Dalang Street, LongHua Town, Bao' an district, Shenzhen, China
Manufacturer	Winstars Technology Limited Block 4, TaiSong Industrial Park, Dalang Street, LongHua Town, Bao' an district, Shenzhen, China

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	<ul style="list-style-type: none"> ● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

- Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Wireless N USB Adapter 300Mbps
Model Number	WS-WN683N2P,U12-43870
Brand	ULTRA
Model Discrepancy	All models are identical to each other except their model names.
Buyer	Streak Products Inc.
Serial Number	C140808Z13-RP1
Received Date	August 8, 2014
Power Supply	DC5V powered by PC
Transmit Power	IEEE 802.11b mode: 18.73dBm (Antenna 1) IEEE 802.11b mode: 18.72dBm (Antenna 2) IEEE 802.11g mode: 23.26dBm (Antenna 1) IEEE 802.11g mode: 24.07dBm (Antenna 2) IEEE 802.11n HT20 MHz mode: 25.65dBm (Combine with Antenna 1 and Antenna 2) IEEE 802.11n HT40 MHz mode: 24.93dBm (Combine with Antenna 1 and Antenna 2)
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 130Mbps with fall back rates of 130/117/104/78/52/39/26/13Mbps IEEE 802.11n HT40: 270Mbps with fall back rates of 270/243/216/162/108/81/54/27Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Integrated Antenna with 3dBi gain (Max)
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
Temperature Range	0°C ~ +40°C
Hardware Version	WS-WN683N2P-B-V1.0
Software Version	RTLWlanU_1026.8.0211.2014_UI_1.00.0239

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: NZ3-WSWN683N2P filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal	Mode 1
Radiated Emission	Mode 1: TX	Mode 1

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 27Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	PC	OPTIPLEX780	C7X53X	N/A	DELL	N/A	Unshielded 1.80m
2	Monitor	S2440LB	CN0N5XDC74261 31EOGZQ	N/A	DELL	Shielded 1.20m	Unshielded 1.80m
3	Printer	D1668	CN9CKCB2RG	N/A	HP	Shielded 1.50m	Unshielded 1.50m
4	Modem	DU-562M	DU562MSG.B1	N/A	D-LINK	Shielded 1.50m	N/A
5	Mouse	MS111-P	J1101ANN	N/A	DELL	Shielded 1.80m	N/A
6	Keyboard	KB212-B	CNOK6KPN71616	N/A	DELL	Shielded 1.45m	N/A

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2014	04/19/2015
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2014	03/03/2015
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

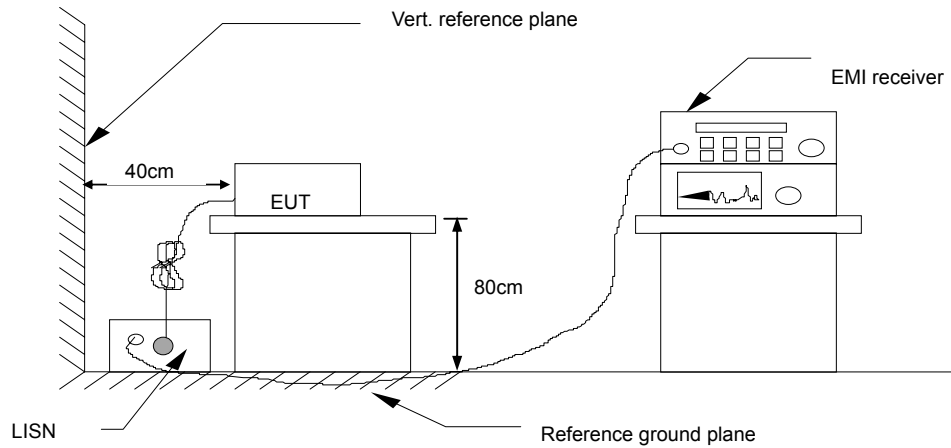

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	WS-WN683N2P	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L1
Test Date	August 12, 2014		

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	37.12	20.66	9.58	46.70	30.24	65.99	56.00	-19.29	-25.76	Pass
0.2100	27.80	18.76	9.69	37.49	28.45	63.20	53.21	-25.71	-24.76	Pass
0.7019	23.31	20.55	9.79	33.10	30.34	56.00	46.00	-22.90	-15.66	Pass
1.6860	27.53	20.57	9.72	37.25	30.29	56.00	46.00	-18.75	-15.71	Pass
8.6380	26.67	19.78	9.82	36.49	29.60	60.00	50.00	-23.51	-20.40	Pass
12.0140	40.95	10.02	9.89	50.84	19.91	60.00	50.00	-9.16	-30.09	Pass

Model No.	WS-WN683N2P	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L2
Test Date	August 12, 2014		

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	39.31	23.44	9.78	49.09	33.22	65.99	56.00	-16.90	-22.78	Pass
0.2100	28.20	21.85	9.79	37.99	31.64	63.20	53.21	-25.21	-21.57	Pass
0.2819	23.37	20.10	9.76	33.13	29.86	60.76	50.76	-27.63	-20.90	Pass
1.6900	28.15	15.53	9.75	37.90	25.28	56.00	46.00	-18.10	-20.72	Pass
11.2739	27.88	12.50	9.83	37.71	22.33	60.00	50.00	-22.29	-27.67	Pass
21.7580	26.13	10.84	9.75	35.88	20.59	60.00	50.00	-24.12	-29.41	Pass

REMARKS: L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




7.2.1.4. TEST RESULTS


Test Plot

IEEE 802.11b mode (Antenna 1)

CH Low (30MHz ~26.5GHz)

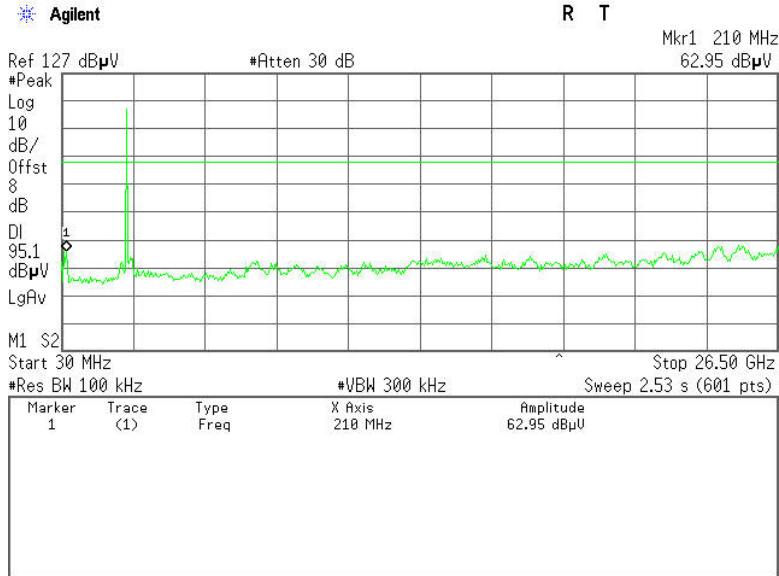


CH Low (2.31GHz ~2.43GHz)

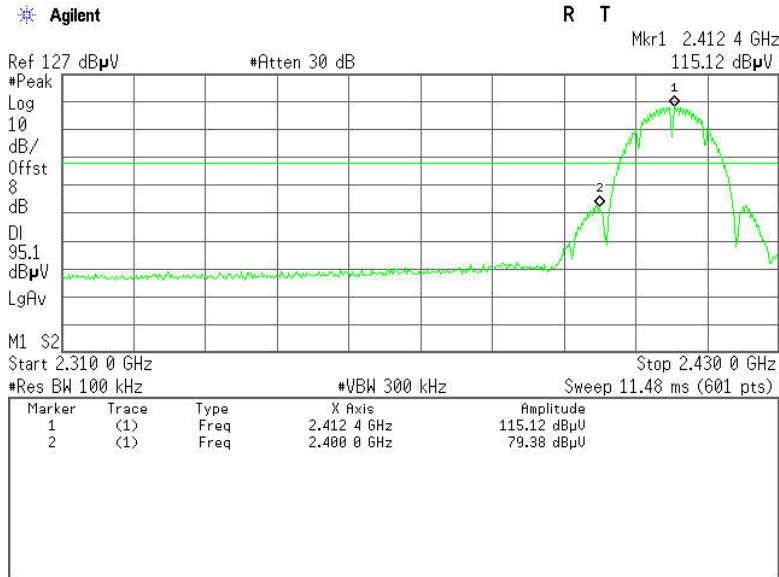




CH Mid (30MHz ~26.5GHz)

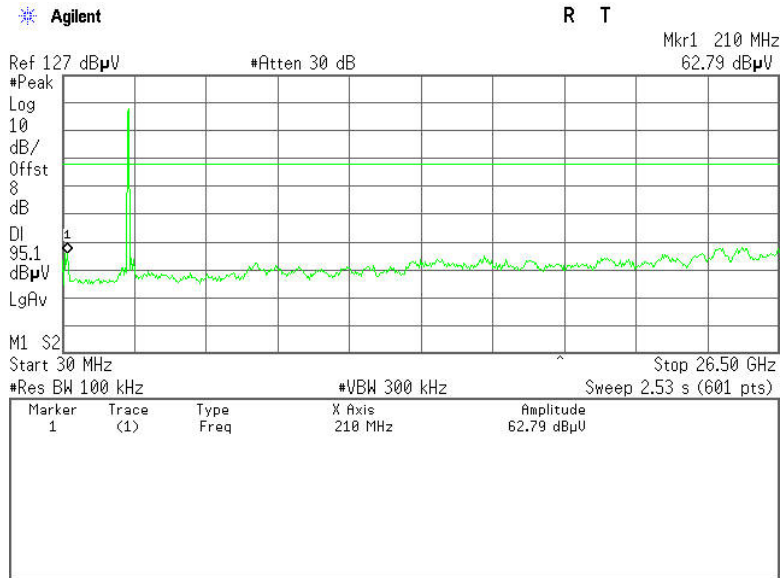




CH High (30MHz ~26.5GHz)

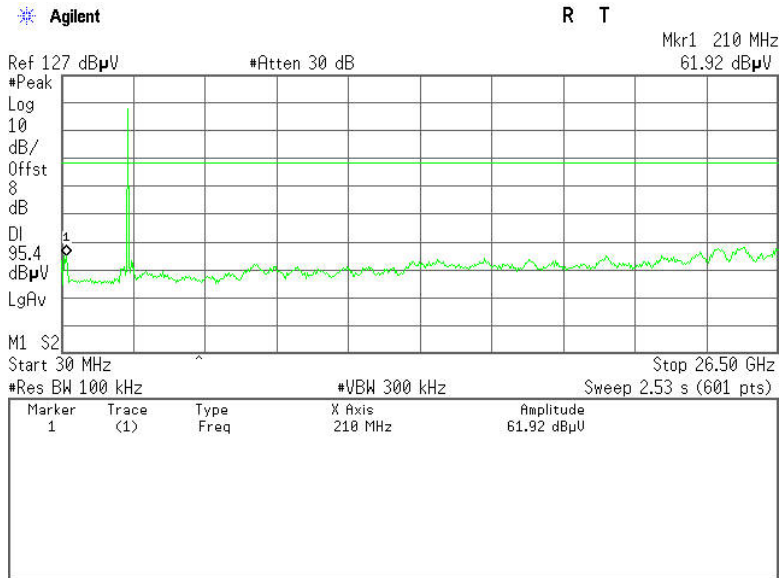


CH High (2.45GHz ~2.5GHz)

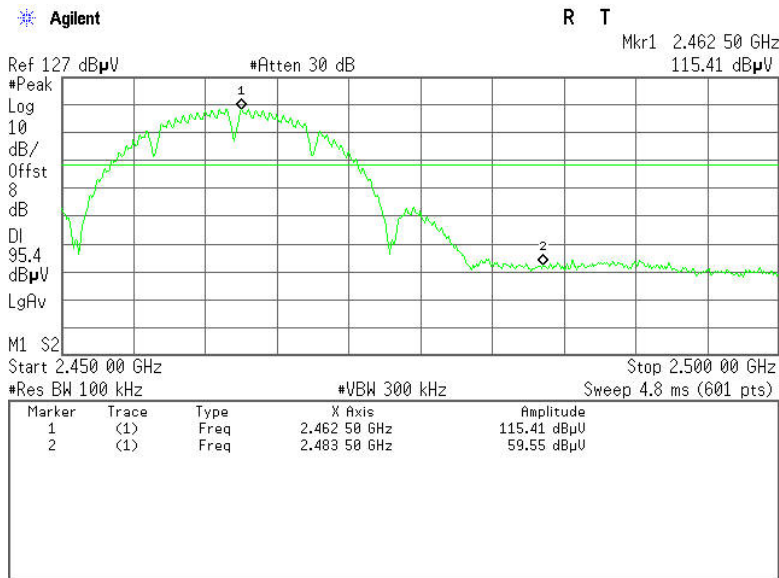




IEEE 802.11b mode (Antenna 2)

CH Low (30MHz ~26.5GHz)

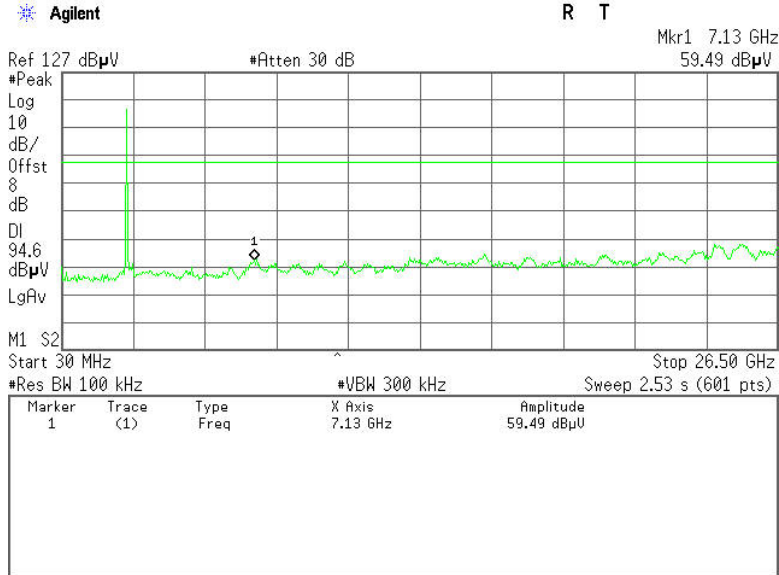


CH Low (2.31GHz ~2.43GHz)

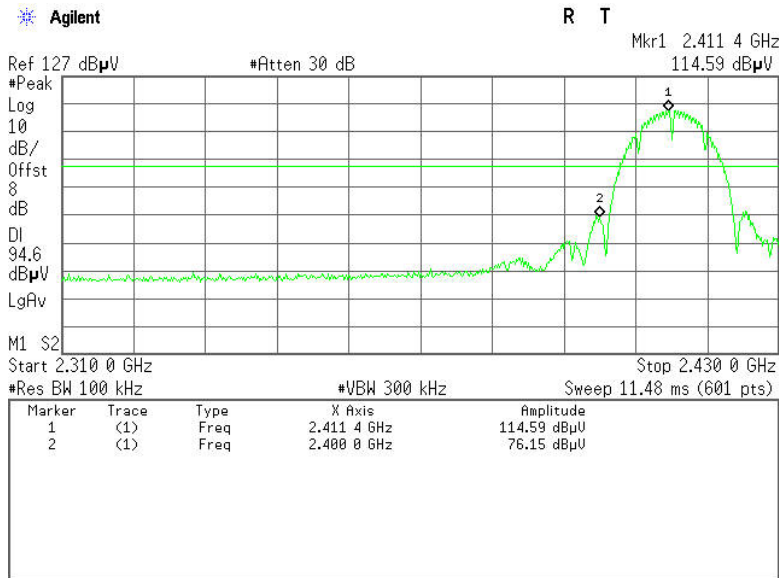




CH Mid (30MHz ~26.5GHz)

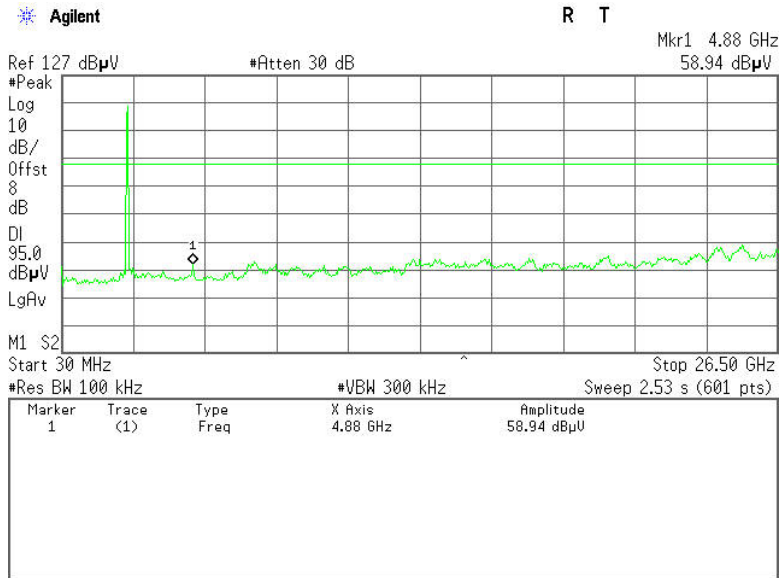




CH High (30MHz ~26.5GHz)

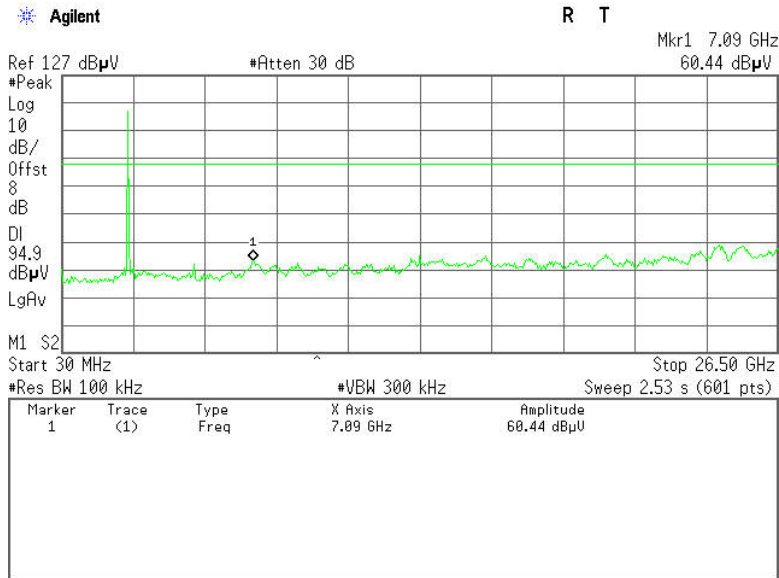


CH High (2.45GHz ~2.5GHz)

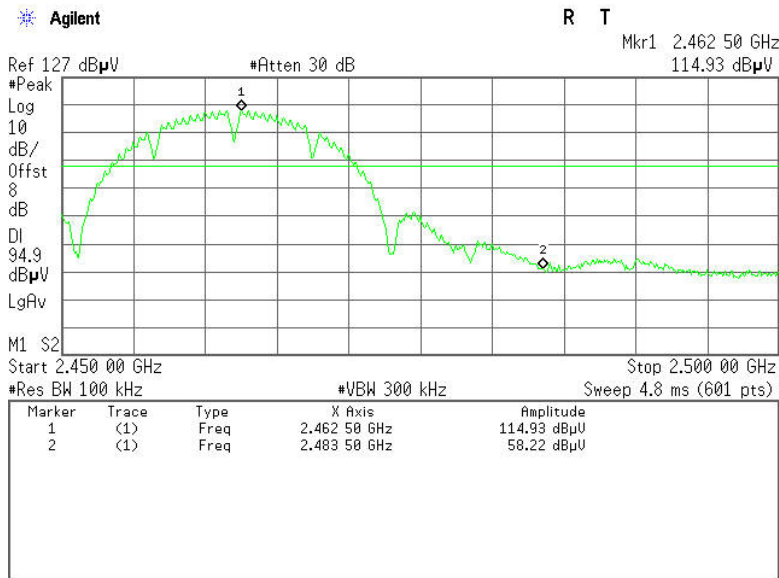




IEEE 802.11g mode (Antenna 1)

CH Low (30MHz ~26.5GHz)

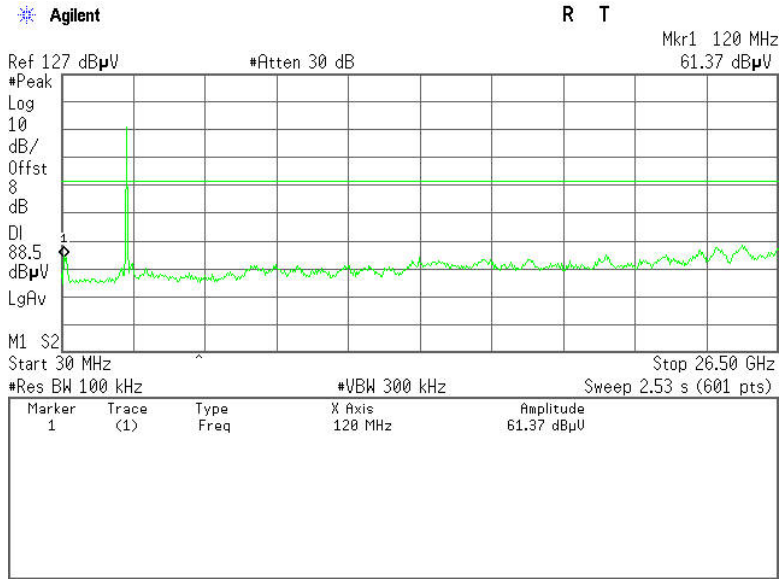


CH Low (2.31GHz ~2.43GHz)

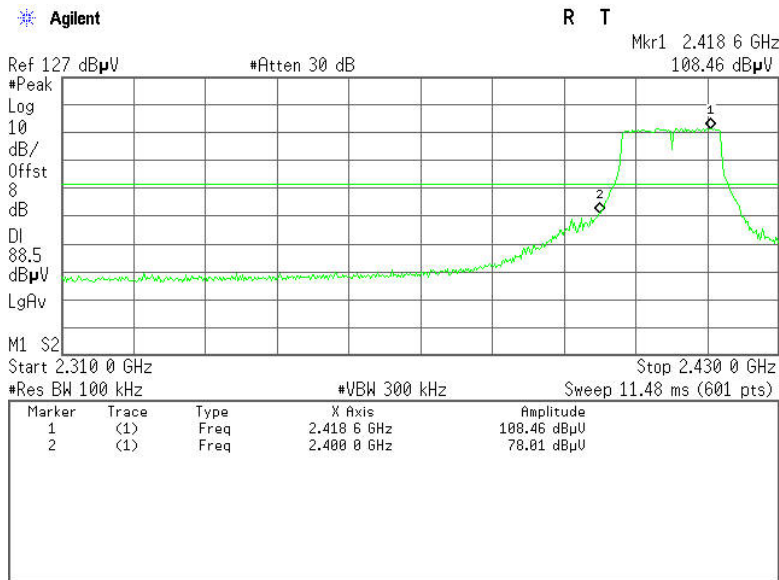




CH Mid (30MHz ~26.5GHz)

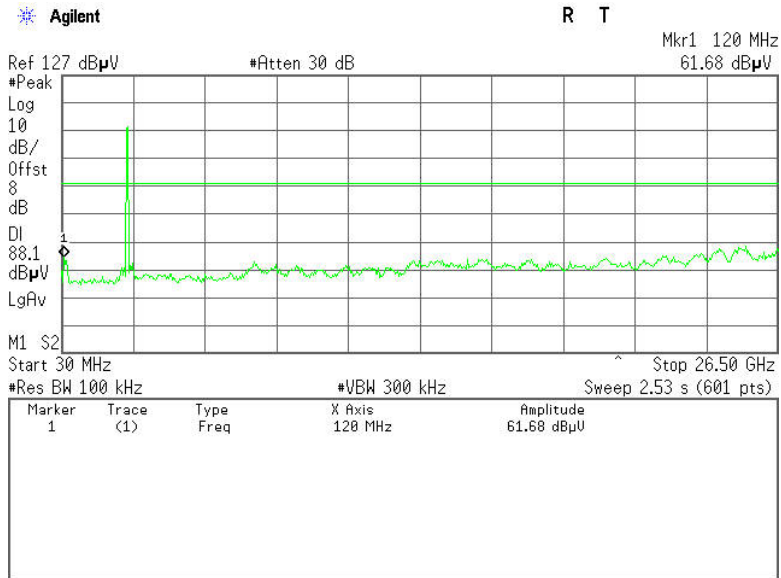




CH High (30MHz ~26.5GHz)

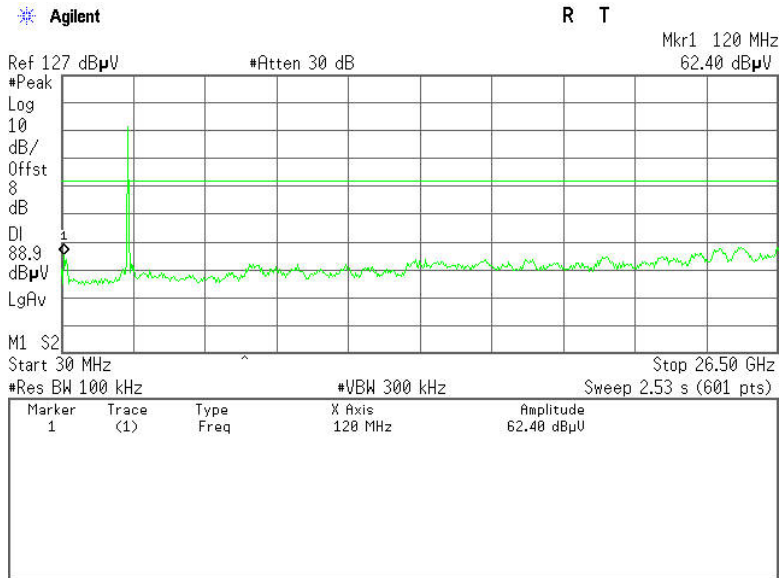


CH High (2.45GHz ~2.5GHz)

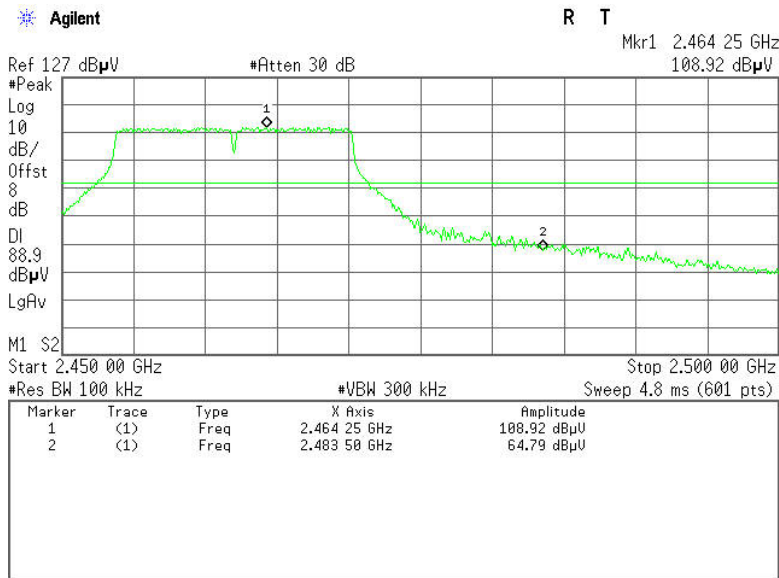




IEEE 802.11g mode (Antenna 2)

CH Low (30MHz ~26.5GHz)

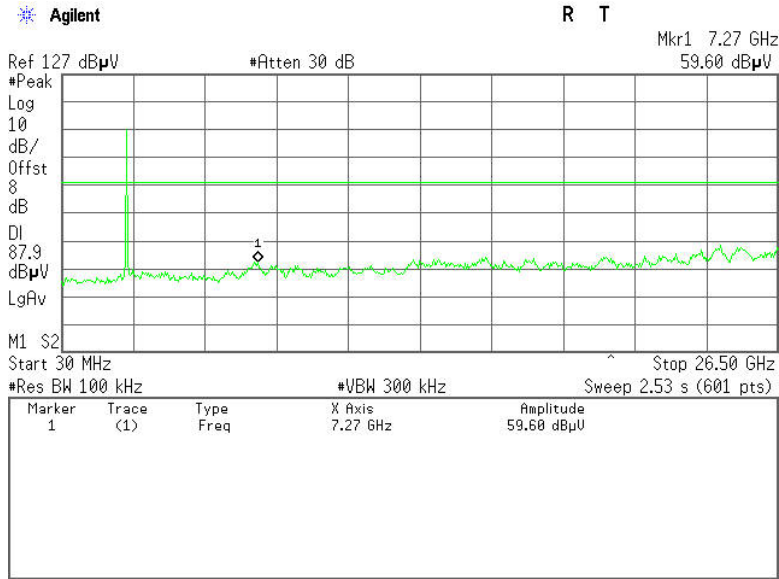


CH Low (2.31GHz ~2.43GHz)

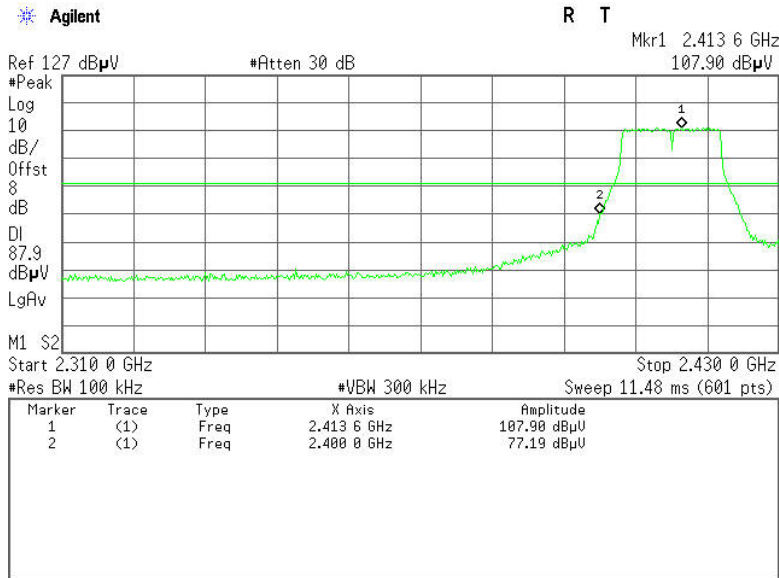




CH Mid (30MHz ~26.5GHz)

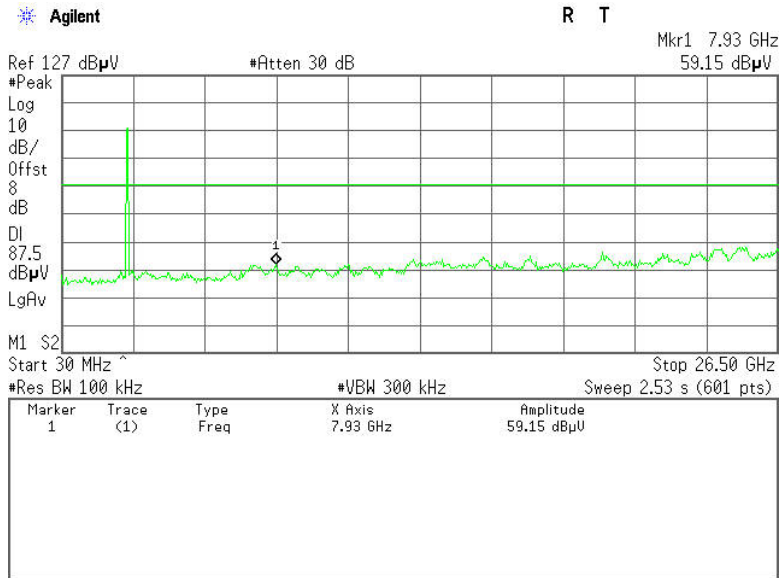




CH High (30MHz ~26.5GHz)

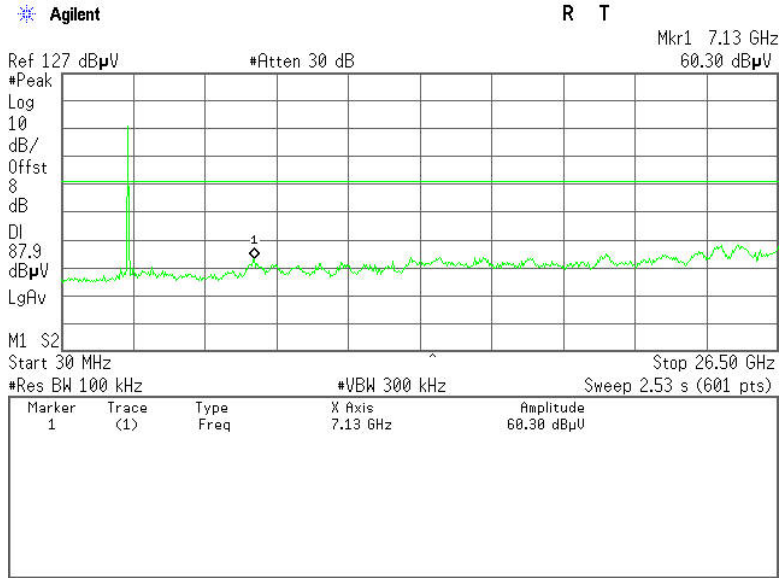


CH High (2.45GHz ~2.5GHz)

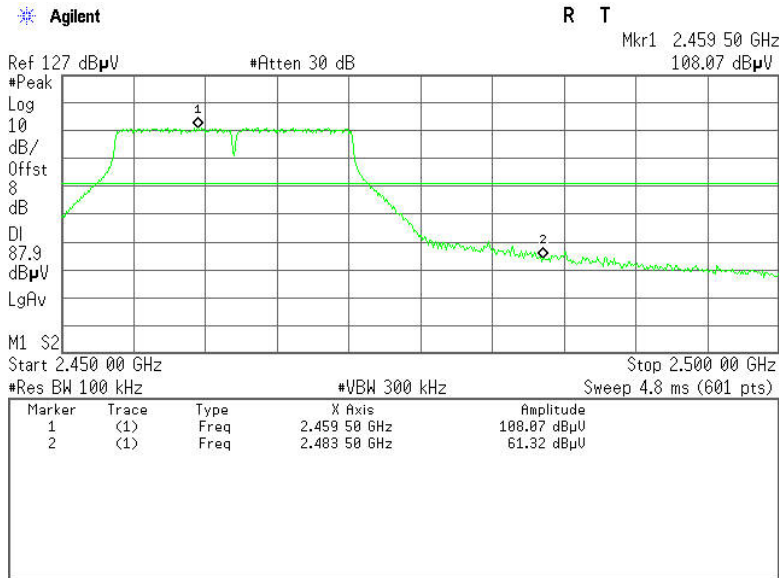




IEEE 802.11n HT20 MHz mode (Antenna 1)

CH Low (30MHz ~26.5GHz)

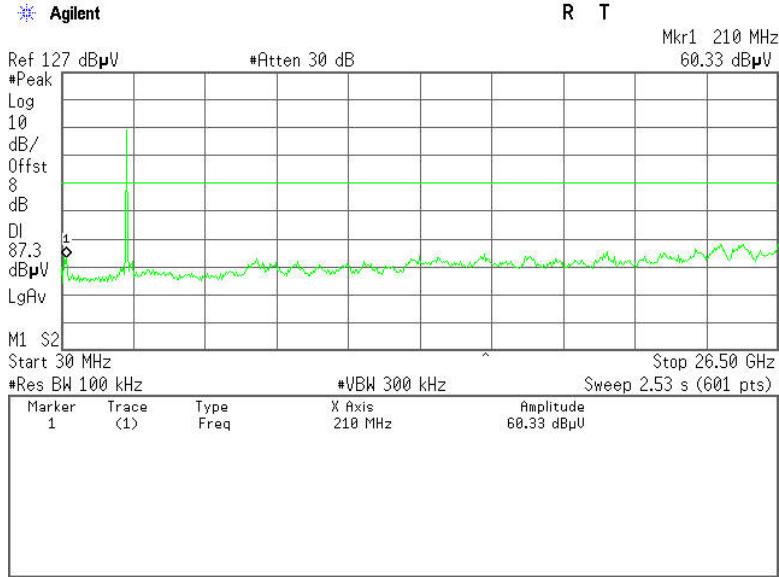


CH Low (2.31GHz ~2.43GHz)

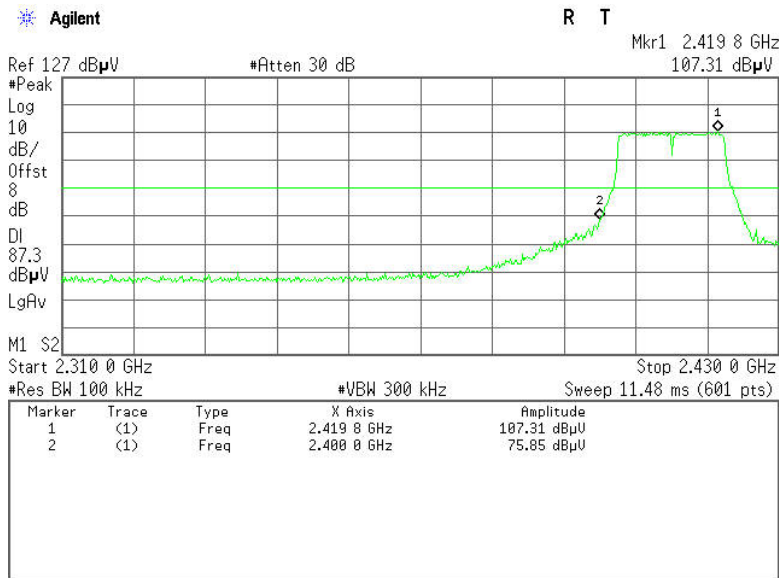




CH Mid (30MHz ~26.5GHz)

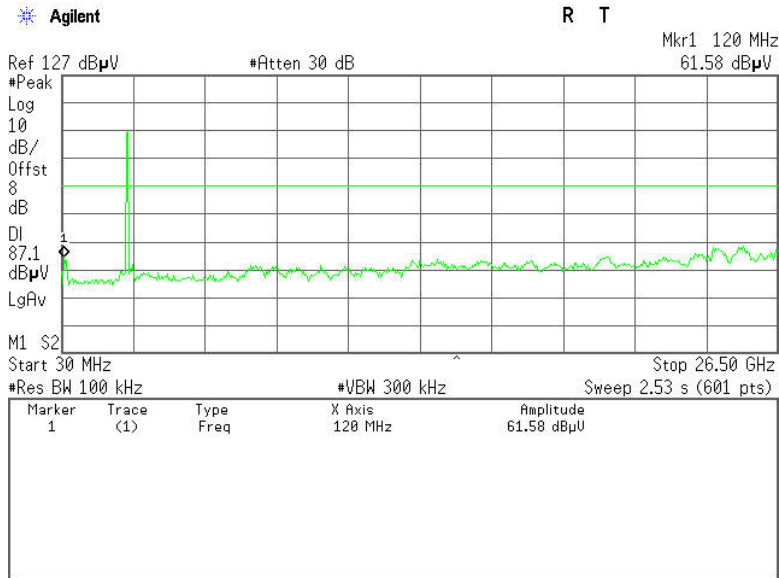




CH High (30MHz ~26.5GHz)

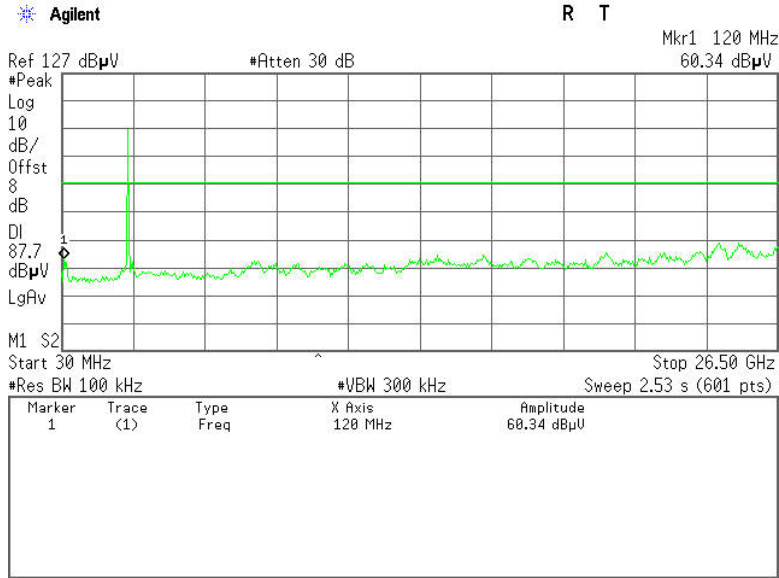


CH High (2.45GHz ~2.5GHz)

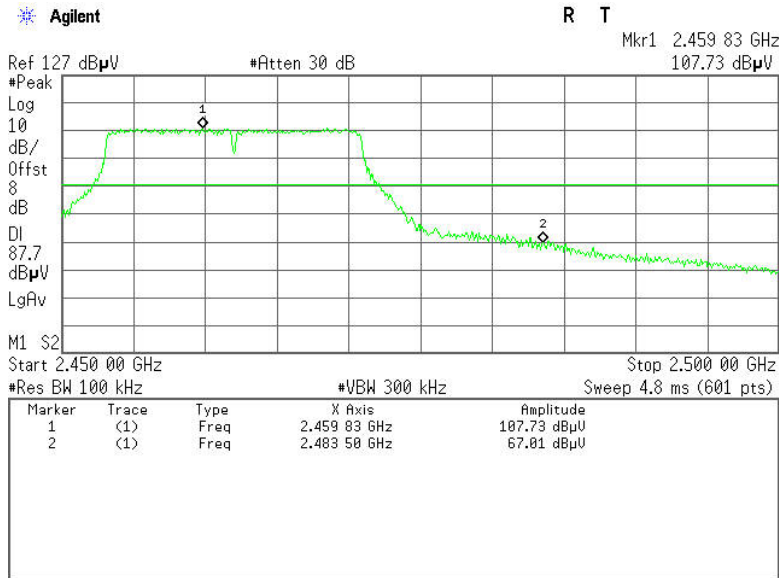




IEEE 802.11n HT20 MHz mode (Antenna 2)

CH Low (30MHz ~26.5GHz)

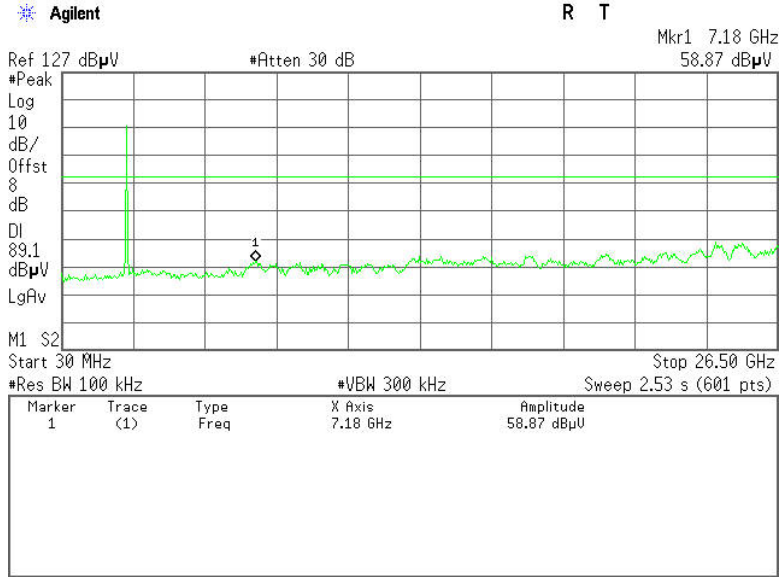


CH Low (2.31GHz ~2.43GHz)

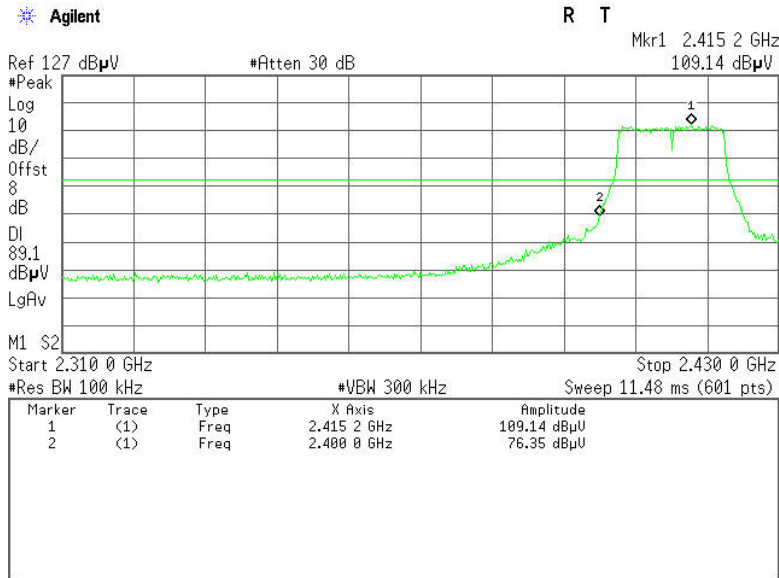




CH Mid (30MHz ~26.5GHz)

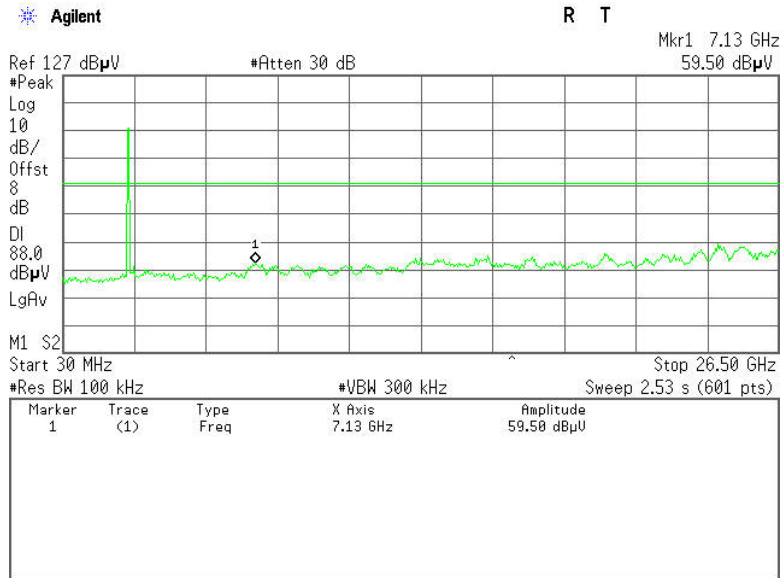




CH High (30MHz ~26.5GHz)

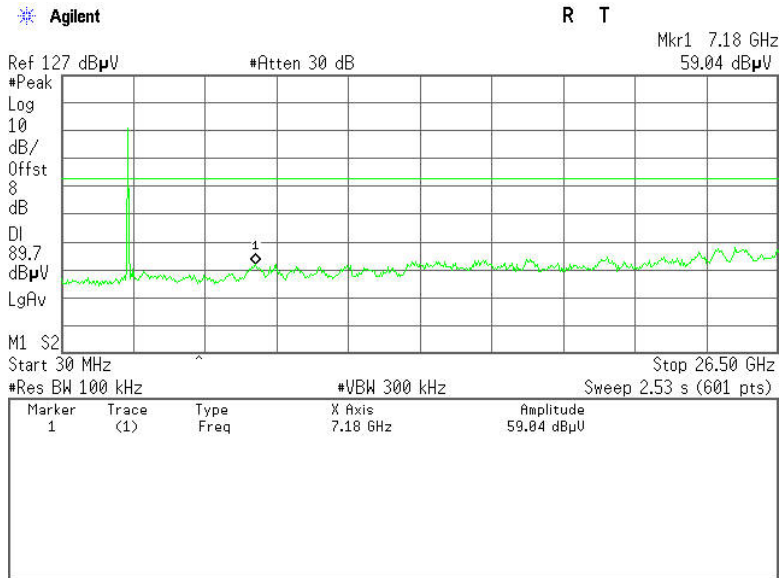


CH High (2.45GHz ~2.5GHz)

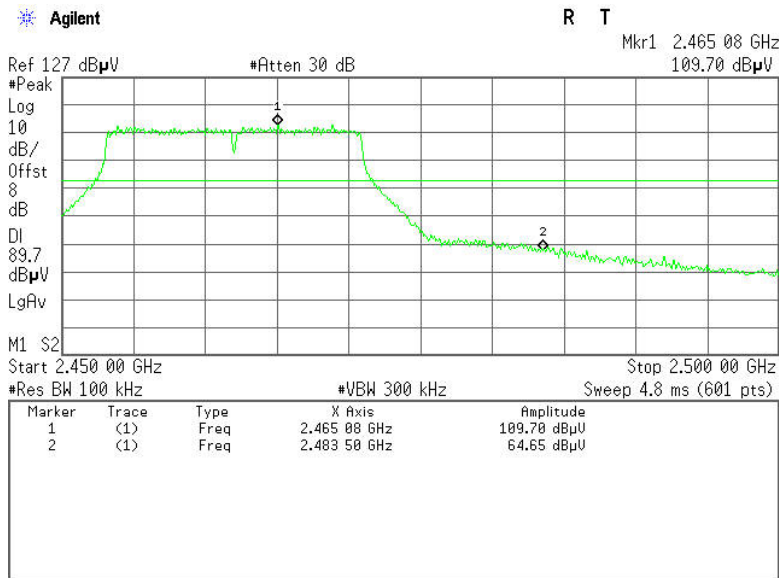




IEEE 802.11n HT40 MHz mode (Antenna 1)

CH Low (30MHz ~26.5GHz)

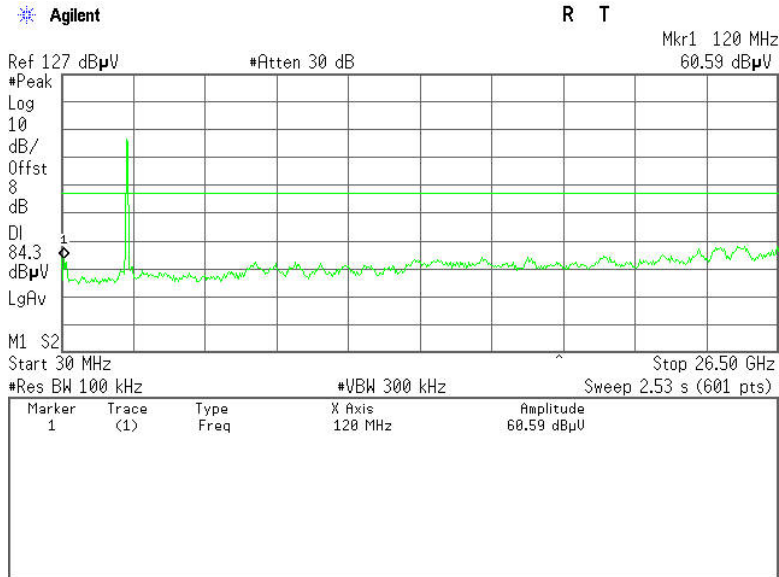


CH Low (2.31GHz ~2.45GHz)

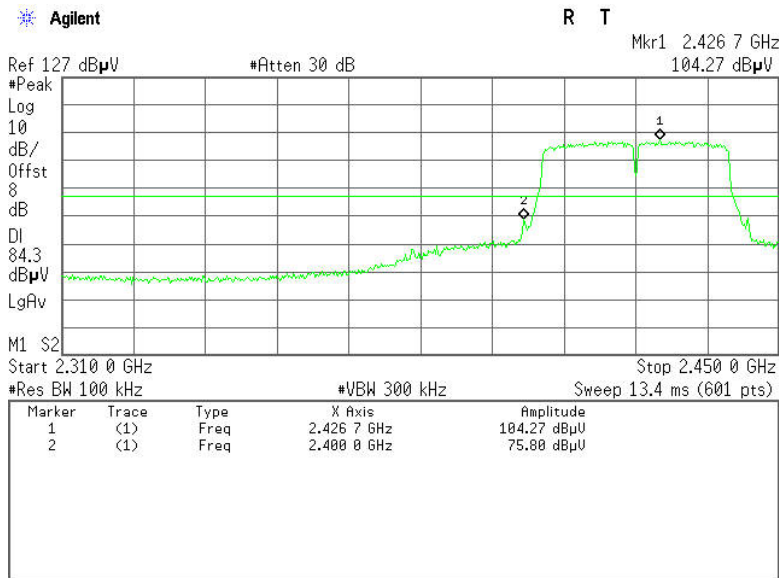




CH Mid (30MHz ~26.5GHz)

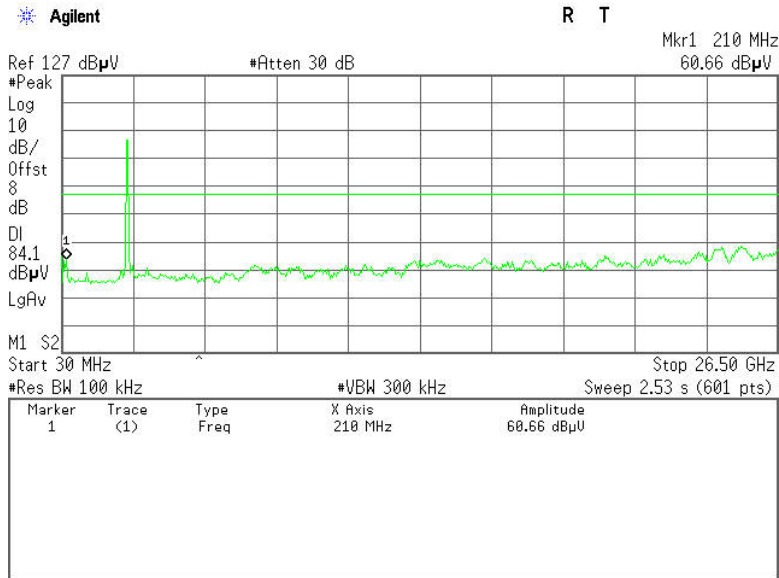




CH High (30MHz ~26.5GHz)

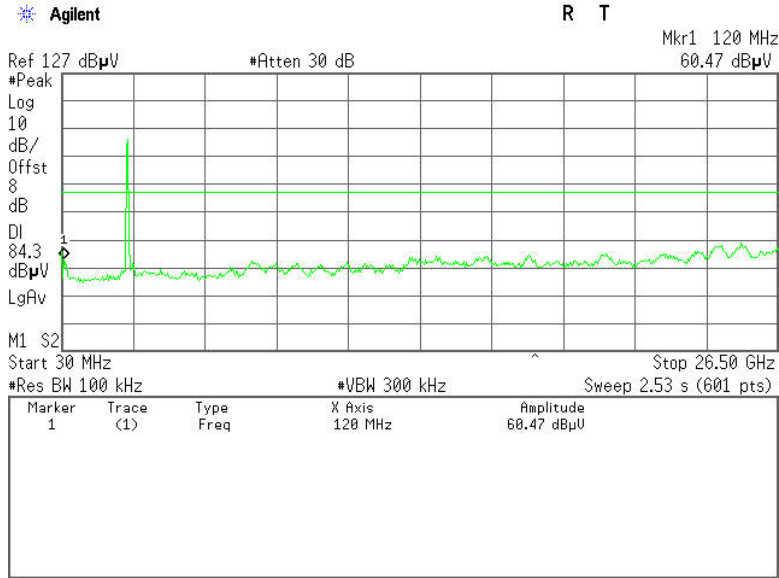


CH High (2.43GHz ~2.5GHz)

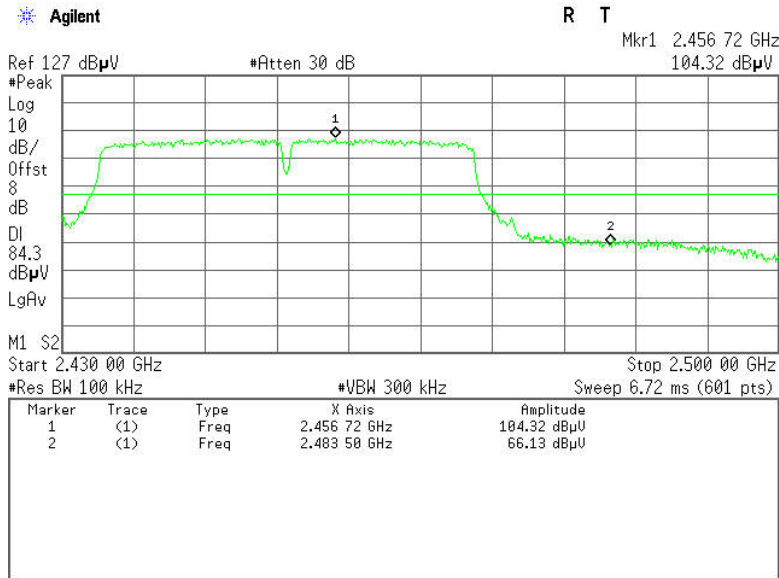




IEEE 802.11n HT40 MHz mode (Antenna 2)

CH Low (30MHz ~26.5GHz)

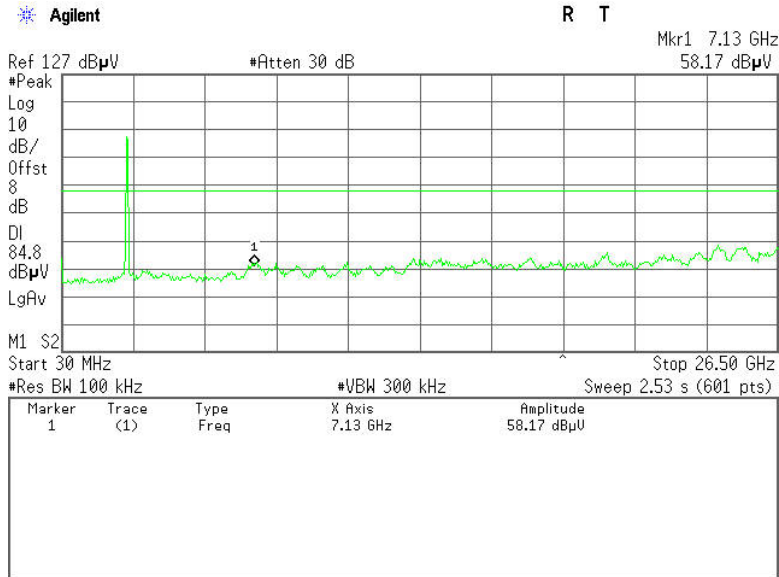


CH Low (2.31GHz ~2.45GHz)

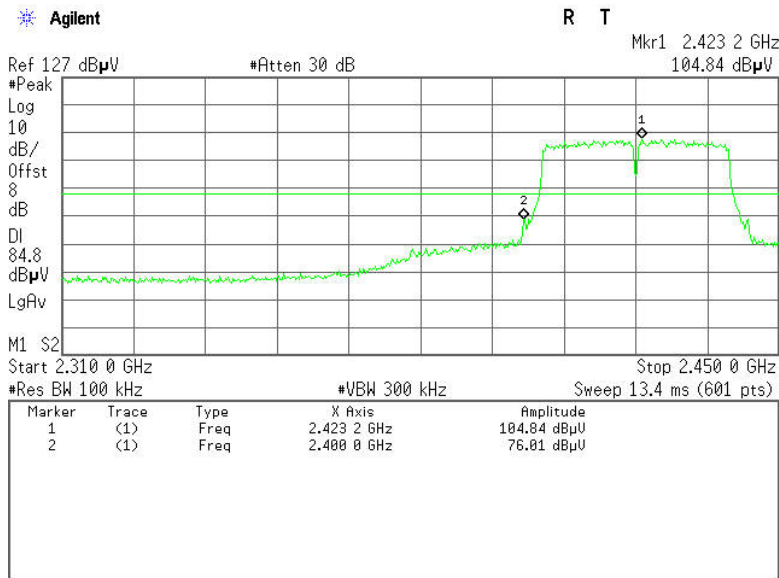




CH Mid (30MHz ~26.5GHz)

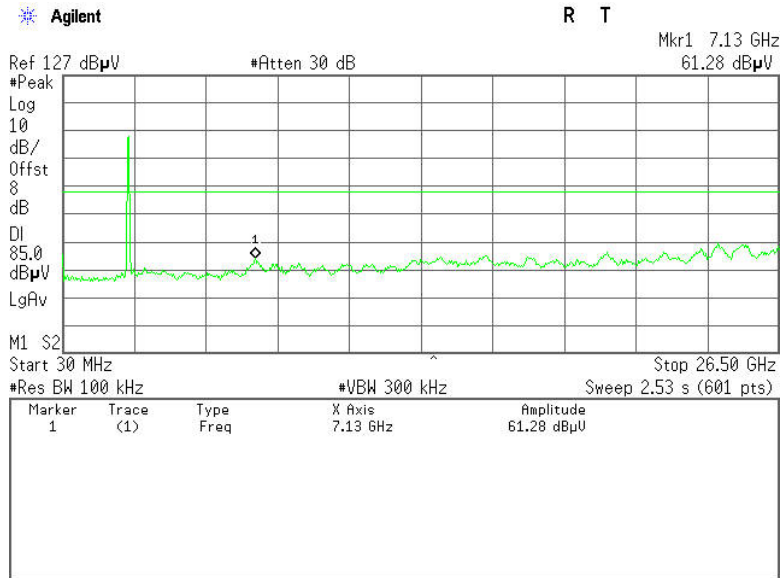




CH High (30MHz ~26.5GHz)

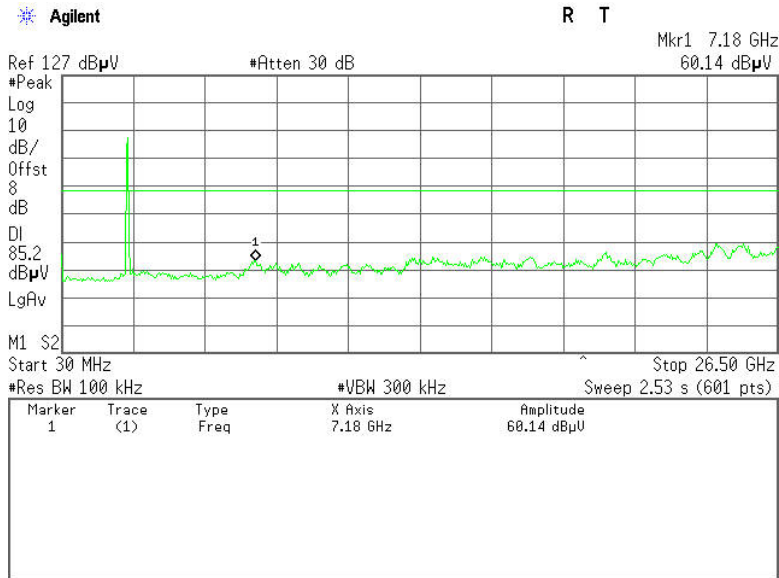

CH High (2.43GHz ~2.5GHz)

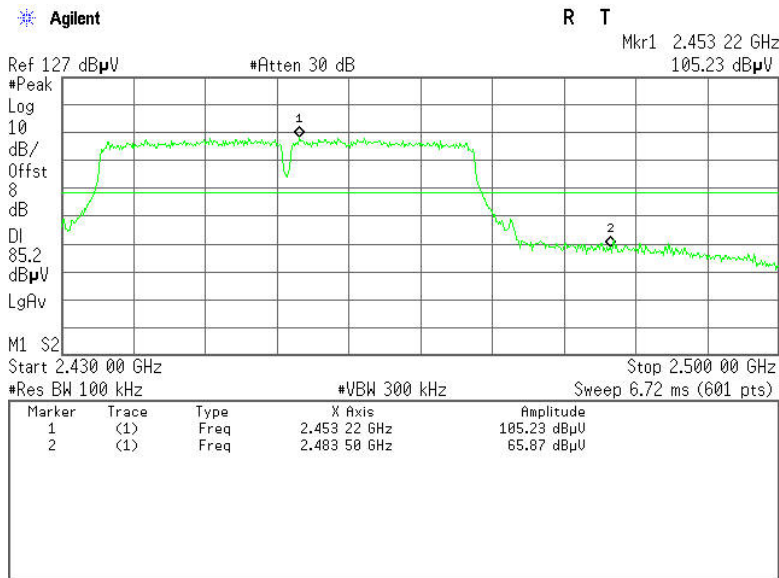



7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).



7.2.2.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	A、 R、 A	PLA-1030/B	1029	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.




7.2.2.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
 - Below 1GHz:
 - RBW=100kHz / VBW=300kHz / Sweep=AUTO
 - Above 1GHz:
 - (a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.




7.2.2.4. TEST SETUP

Below 30MHz

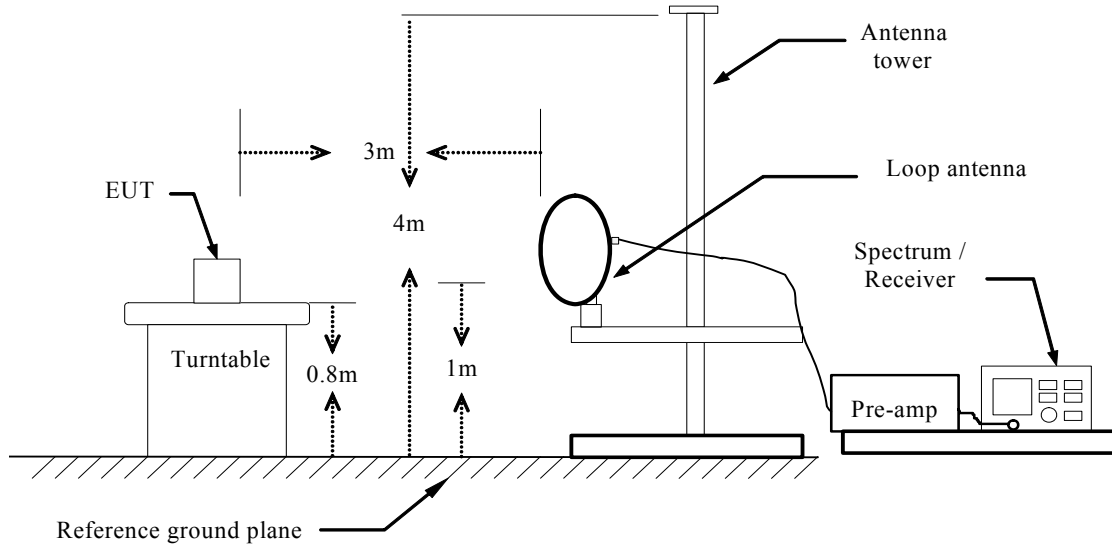


Below 1 GHz

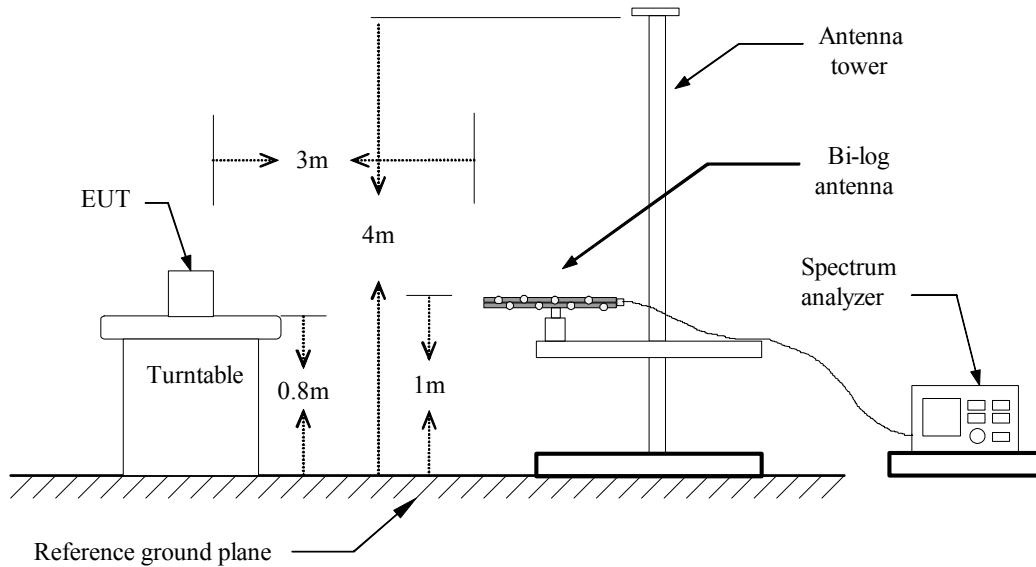



Above 1 GHz

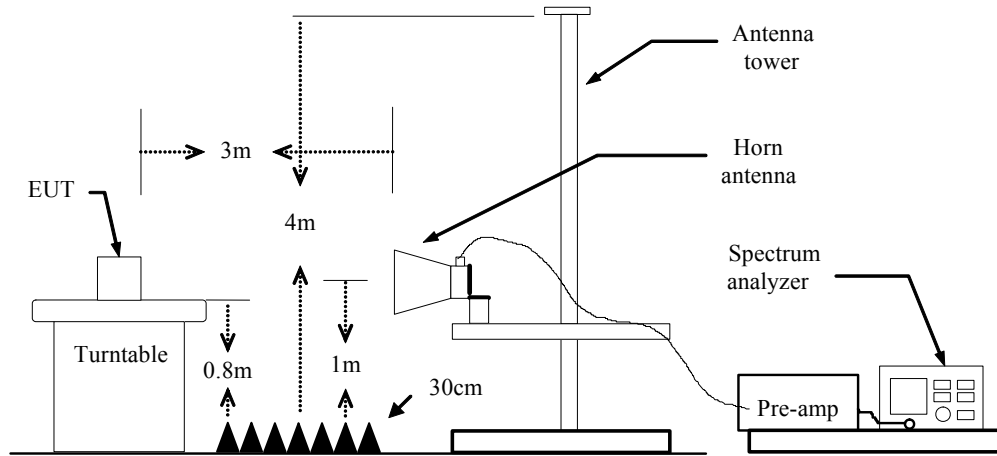

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.5. DATA SAPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.2.6. TEST RESULTS

Below 1 GHz

Operation Mode: TX

Test Date: August 19, 2014

Temperature: 24°C

Tested by: Eve Wang

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
99.8400	57.58	-23.70	33.88	43.50	-9.62	V	QP
199.7500	55.76	-22.73	33.03	43.50	-10.47	V	QP
399.5700	45.27	-16.10	29.17	46.00	-16.83	V	QP
597.4500	43.73	-12.91	30.82	46.00	-15.18	V	QP
770.1100	46.96	-11.13	35.83	46.00	-10.17	V	QP
900.0900	42.41	-9.83	32.58	46.00	-13.42	V	QP
99.8400	51.00	-23.70	27.30	43.50	-16.20	H	QP
166.7700	55.00	-22.80	32.20	43.50	-11.30	H	QP
199.7500	57.94	-22.73	35.21	43.50	-8.29	H	QP
394.7200	48.39	-16.27	32.12	46.00	-13.88	H	QP
751.6800	45.79	-11.16	34.63	46.00	-11.37	H	QP
899.1200	42.93	-9.84	33.09	46.00	-12.91	H	QP

**Remark: No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

- Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
- | | |
|------------------------|--|
| Frequency (MHz). | = Emission frequency in MHz |
| Reading (dBµV/m) | = Receiver reading |
| Correction Factor (dB) | = Antenna factor + Cable loss – Amplifier gain |
| Limit (dBµV/m) | = Limit stated in standard |
| Margin (dB) | = Measured (dBµV/m) – Limits (dBµV/m) |
| Antenna Pole (H/V) | = Current carrying line of reading |



Above 1 GHz

Antenna 1

Test Mode: TX / IEEE 802.11b (CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.53	-11.12	38.41	74.00	-35.59	V	Peak
1999.000	50.36	-8.31	42.05	74.00	-31.95	V	Peak
3322.000	43.37	-3.21	40.16	74.00	-33.84	V	Peak
4276.000	42.96	-0.23	42.73	74.00	-31.27	V	Peak
5140.000	41.18	2.52	43.70	74.00	-30.30	V	Peak
6094.000	39.83	3.80	43.63	74.00	-30.37	V	Peak
1027.000	46.96	-9.44	37.52	74.00	-36.48	H	Peak
1999.000	47.30	-8.31	38.99	74.00	-35.01	H	Peak
2800.000	45.29	-4.76	40.53	74.00	-33.47	H	Peak
3799.000	42.93	-1.78	41.15	74.00	-32.85	H	Peak
5284.000	41.41	2.53	43.94	74.00	-30.06	H	Peak
7129.000	40.78	7.95	48.73	74.00	-25.27	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	50.27	-11.12	39.15	74.00	-34.85	V	peak
1999.000	51.01	-8.31	42.70	74.00	-31.30	V	peak
3322.000	43.37	-3.21	40.16	74.00	-33.84	V	peak
4303.000	41.71	-0.15	41.56	74.00	-32.44	V	peak
4870.000	42.52	1.97	44.49	74.00	-29.51	V	peak
6139.000	40.47	3.99	44.46	74.00	-29.54	V	peak
1000.0000	46.94	-8.82	38.12	74.00	-35.88	H	Peak
1999.000	52.21	-8.31	43.90	74.00	-30.10	H	Peak
2539.000	47.23	-6.01	41.22	74.00	-32.78	H	Peak
3799.000	43.28	-1.78	41.50	74.00	-32.50	H	Peak
4870.000	46.18	1.97	48.15	74.00	-25.85	H	Peak
6076.000	41.68	3.72	45.40	74.00	-28.60	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1504.000	50.30	-11.05	39.25	74.00	-34.75	V	peak
1999.000	51.07	-8.31	42.76	74.00	-31.24	V	peak
3331.000	44.73	-3.20	41.53	74.00	-32.47	V	peak
3871.000	42.78	-1.52	41.26	74.00	-32.74	V	peak
4924.000	44.04	2.19	46.23	74.00	-27.77	V	peak
6067.000	41.44	3.68	45.12	74.00	-28.88	V	peak
1990.000	47.16	-8.32	38.84	74.00	-35.16	H	Peak
2233.000	46.64	-7.33	39.31	74.00	-34.69	H	Peak
3313.000	43.26	-3.23	40.03	74.00	-33.97	H	Peak
4141.000	41.91	-0.63	41.28	74.00	-32.72	H	Peak
4924.000	49.14	2.19	51.33	74.00	-22.67	H	Peak
6292.000	40.06	4.65	44.71	74.00	-29.29	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Antenna 2

Test Mode: TX / IEEE 802.11b (CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.29	-11.12	38.17	74.00	-35.83	V	Peak
1999.000	50.24	-8.31	41.93	74.00	-32.07	V	Peak
2863.000	44.51	-4.46	40.05	74.00	-33.95	V	Peak
3799.000	43.01	-1.78	41.23	74.00	-32.77	V	Peak
4798.000	42.28	1.67	43.95	74.00	-30.05	V	Peak
5446.000	40.97	2.55	43.52	74.00	-30.48	V	Peak
1999.000	48.66	-8.31	40.35	74.00	-33.65	H	Peak
3313.000	44.24	-3.23	41.01	74.00	-32.99	H	Peak
3583.000	43.78	-2.58	41.20	74.00	-32.80	H	Peak
4240.000	42.13	-0.33	41.80	74.00	-32.20	H	Peak
4825.000	43.38	1.78	45.16	74.00	-28.84	H	Peak
5743.000	41.46	2.96	44.42	74.00	-29.58	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.90	-11.12	38.78	74.00	-35.22	V	peak
1999.000	50.06	-8.31	41.75	74.00	-32.25	V	peak
2845.000	45.20	-4.54	40.66	74.00	-33.34	V	peak
3331.000	43.62	-3.20	40.42	74.00	-33.58	V	peak
4276.000	42.63	-0.23	42.40	74.00	-31.60	V	peak
4870.000	44.22	1.97	46.19	74.00	-27.81	V	peak
2188.000	46.31	-7.52	38.79	74.00	-35.21	H	Peak
2575.000	45.64	-5.84	39.80	74.00	-34.20	H	Peak
3043.000	43.38	-3.72	39.66	74.00	-34.34	H	Peak
3880.000	42.31	-1.48	40.83	74.00	-33.17	H	Peak
4870.000	51.20	1.97	53.17	74.00	-20.83	H	Peak
4870.000	49.45	1.97	51.42	54.00	-2.58	H	AVG
5095.000	41.89	2.52	44.41	74.00	-29.59	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.31	-11.12	38.19	74.00	-35.81	V	peak
1999.000	49.90	-8.31	41.59	74.00	-32.41	V	peak
2926.000	43.97	-4.16	39.81	74.00	-34.19	V	peak
3871.000	43.03	-1.52	41.51	74.00	-32.49	V	peak
4924.000	44.71	2.19	46.90	74.00	-27.10	V	peak
5905.000	40.41	3.23	43.64	74.00	-30.36	V	peak
1729.000	46.37	-9.22	37.15	74.00	-36.85	H	Peak
2224.000	47.40	-7.36	40.04	74.00	-33.96	H	Peak
3205.000	43.84	-3.43	40.41	74.00	-33.59	H	Peak
4474.000	41.80	0.35	42.15	74.00	-31.85	H	Peak
4924.000	53.22	2.19	55.41	74.00	-18.59	H	Peak
4924.000	49.66	2.19	51.85	54.00	-2.15	H	AVG
5977.000	40.40	3.35	43.75	74.00	-30.25	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Antenna 1

Test Mode: TX / IEEE 802.11g (CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1657.000	49.57	-9.84	39.73	74.00	-34.27	V	Peak
1999.000	50.43	-8.31	42.12	74.00	-31.88	V	Peak
3331.000	43.82	-3.20	40.62	74.00	-33.38	V	Peak
4231.000	42.10	-0.36	41.74	74.00	-32.26	V	Peak
5014.000	41.15	2.51	43.66	74.00	-30.34	V	Peak
6121.000	40.84	3.91	44.75	74.00	-29.25	V	Peak
1999.000	47.41	-8.31	39.10	74.00	-34.90	H	Peak
2521.000	46.40	-6.10	40.30	74.00	-33.70	H	Peak
3313.000	43.48	-3.23	40.25	74.00	-33.75	H	Peak
4285.000	41.62	-0.20	41.42	74.00	-32.58	H	Peak
5284.000	40.99	2.53	43.52	74.00	-30.48	H	Peak
5635.000	41.97	2.78	44.75	74.00	-29.25	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	50.34	-11.12	39.22	74.00	-34.78	V	Peak
1999.000	50.39	-8.31	42.08	74.00	-31.92	V	Peak
3313.000	44.45	-3.23	41.22	74.00	-32.78	V	Peak
4033.000	43.22	-0.94	42.28	74.00	-31.72	V	Peak
4609.000	42.31	0.88	43.19	74.00	-30.81	V	Peak
4969.000	41.94	2.38	44.32	74.00	-29.68	V	Peak
2233.000	46.12	-7.33	38.79	74.00	-35.21	H	Peak
3034.000	44.10	-3.74	40.36	74.00	-33.64	H	Peak
3448.000	43.87	-2.98	40.89	74.00	-33.11	H	Peak
4861.000	42.49	1.93	44.42	74.00	-29.58	H	Peak
5680.000	41.36	2.85	44.21	74.00	-29.79	H	Peak
6544.000	41.05	5.73	46.78	74.00	-27.22	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBUV)	Correction Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	50.42	-11.12	39.30	74.00	-34.70	V	Peak
1999.000	50.69	-8.31	42.38	74.00	-31.62	V	Peak
3331.000	45.16	-3.20	41.96	74.00	-32.04	V	Peak
3970.000	42.20	-1.15	41.05	74.00	-32.95	V	Peak
4924.000	41.98	2.19	44.17	74.00	-29.83	V	Peak
5311.000	41.36	2.53	43.89	74.00	-30.11	V	Peak
1999.000	47.70	-8.31	39.39	74.00	-34.61	H	Peak
2575.000	46.16	-5.84	40.32	74.00	-33.68	H	Peak
3313.000	43.89	-3.23	40.66	74.00	-33.34	H	Peak
4465.000	43.04	0.33	43.37	74.00	-30.63	H	Peak
4924.000	44.37	2.19	46.56	74.00	-27.44	H	Peak
6076.000	40.08	3.72	43.80	74.00	-30.20	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBUV/m) – Average limit (dBUV/m).



Antenna 2

Test Mode: TX / IEEE 802.11g (CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	50.17	-11.12	39.05	74.00	-34.95	V	Peak
1999.000	51.44	-8.31	43.13	74.00	-30.87	V	Peak
2800.000	44.88	-4.76	40.12	74.00	-33.88	V	Peak
3214.000	44.82	-3.41	41.41	74.00	-32.59	V	Peak
3862.000	43.13	-1.55	41.58	74.00	-32.42	V	Peak
5383.000	41.17	2.54	43.71	74.00	-30.29	V	Peak
1000.0000	47.07	-8.82	38.25	74.00	-35.75	H	Peak
1999.000	46.99	-8.31	38.68	74.00	-35.32	H	Peak
2809.000	44.67	-4.72	39.95	74.00	-34.05	H	Peak
3241.000	43.73	-3.36	40.37	74.00	-33.63	H	Peak
4438.000	42.55	0.25	42.80	74.00	-31.20	H	Peak
4942.000	40.92	2.27	43.19	74.00	-30.81	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.66	-11.12	38.54	74.00	-35.46	V	Peak
1729.000	50.87	-9.22	41.65	74.00	-32.35	V	Peak
1999.000	52.76	-8.31	44.45	74.00	-29.55	V	Peak
3331.000	45.03	-3.20	41.83	74.00	-32.17	V	Peak
4177.000	43.08	-0.52	42.56	74.00	-31.44	V	Peak
4942.000	41.82	2.27	44.09	74.00	-29.91	V	Peak
1999.000	46.43	-8.31	38.12	74.00	-35.88	H	Peak
2818.000	44.95	-4.67	40.28	74.00	-33.72	H	Peak
3880.000	43.56	-1.48	42.08	74.00	-31.92	H	Peak
4879.000	47.73	2.01	49.74	74.00	-24.26	H	Peak
5455.000	40.86	2.55	43.41	74.00	-30.59	H	Peak
6922.000	41.19	7.36	48.55	74.00	-25.45	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBUV)	Correction Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.32	-11.12	38.20	74.00	-35.80	V	Peak
1999.000	51.45	-8.31	43.14	74.00	-30.86	V	Peak
3331.000	43.41	-3.20	40.21	74.00	-33.79	V	Peak
4429.000	42.31	0.22	42.53	74.00	-31.47	V	Peak
4906.000	41.77	2.12	43.89	74.00	-30.11	V	Peak
5239.000	41.05	2.53	43.58	74.00	-30.42	V	Peak
1999.000	47.65	-8.31	39.34	74.00	-34.66	H	Peak
2818.000	44.12	-4.67	39.45	74.00	-34.55	H	Peak
3583.000	42.32	-2.58	39.74	74.00	-34.26	H	Peak
4204.000	41.79	-0.44	41.35	74.00	-32.65	H	Peak
4924.000	47.25	2.19	49.44	74.00	-24.56	H	Peak
5779.000	40.28	3.02	43.30	74.00	-30.70	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBUV/m) – Average limit (dBUV/m).



Combine with Antenna 1 and Antenna 2

Test Mode: TX / IEEE 802.11n HT20 MHz(CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1666.000	48.29	-9.76	38.53	74.00	-35.47	V	Peak
1999.000	50.27	-8.31	41.96	74.00	-32.04	V	Peak
3313.000	44.49	-3.23	41.26	74.00	-32.74	V	Peak
4393.000	42.31	0.12	42.43	74.00	-31.57	V	Peak
4825.000	45.24	1.78	47.02	74.00	-26.98	V	Peak
6913.000	41.86	7.33	49.19	74.00	-24.81	V	Peak
1234.000	48.97	-13.17	35.80	74.00	-38.20	H	Peak
2206.000	47.13	-7.44	39.69	74.00	-34.31	H	Peak
2557.000	46.09	-5.93	40.16	74.00	-33.84	H	Peak
3448.000	43.23	-2.98	40.25	74.00	-33.75	H	Peak
4816.000	47.90	1.74	49.64	74.00	-24.36	H	Peak
6121.000	40.11	3.91	44.02	74.00	-29.98	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz(CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.000	50.30	-8.31	41.99	74.00	-32.01	V	Peak
2791.000	44.64	-4.80	39.84	74.00	-34.16	V	Peak
3403.000	43.97	-3.07	40.90	74.00	-33.10	V	Peak
4375.000	41.96	0.06	42.02	74.00	-31.98	V	Peak
4870.000	42.06	1.97	44.03	74.00	-29.97	V	Peak
6004.000	40.28	3.41	43.69	74.00	-30.31	V	Peak
1999.000	47.31	-8.31	39.00	74.00	-35.00	H	Peak
2584.000	47.48	-5.80	41.68	74.00	-32.32	H	Peak
3403.000	43.42	-3.07	40.35	74.00	-33.65	H	Peak
4168.000	42.74	-0.55	42.19	74.00	-31.81	H	Peak
4870.000	48.84	1.97	50.81	74.00	-23.19	H	Peak
6076.000	40.65	3.72	44.37	74.00	-29.63	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz(CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	49.89	-11.12	38.77	74.00	-35.23	V	Peak
1999.000	50.57	-8.31	42.26	74.00	-31.74	V	Peak
3043.000	44.27	-3.72	40.55	74.00	-33.45	V	Peak
3403.000	44.24	-3.07	41.17	74.00	-32.83	V	Peak
4924.000	42.69	2.19	44.88	74.00	-29.12	V	Peak
5212.000	41.49	2.53	44.02	74.00	-29.98	V	Peak
1999.000	46.32	-8.31	38.01	74.00	-35.99	H	Peak
2224.000	45.84	-7.36	38.48	74.00	-35.52	H	Peak
3034.000	43.16	-3.74	39.42	74.00	-34.58	H	Peak
3871.000	42.31	-1.52	40.79	74.00	-33.21	H	Peak
4924.000	46.60	2.19	48.79	74.00	-25.21	H	Peak
6040.000	40.57	3.56	44.13	74.00	-29.87	H	Peak
7759.000	41.36	9.18	50.54	74.00	-23.46	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Combine with Antenna 1 and Antenna 2

Test Mode: TX / IEEE 802.11n HT40 MHz(CH Low)

Tested by: Eve Wang

Ambient temperature: 24°C **Relative humidity:** 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1504.000	51.81	-11.05	40.76	74.00	-33.24	V	Peak
1999.000	50.50	-8.31	42.19	74.00	-31.81	V	Peak
3331.000	43.74	-3.20	40.54	74.00	-33.46	V	Peak
4213.000	43.57	-0.41	43.16	74.00	-30.84	V	Peak
4987.000	41.85	2.46	44.31	74.00	-29.69	V	Peak
5977.000	41.17	3.35	44.52	74.00	-29.48	V	Peak
1999.000	47.63	-8.31	39.32	74.00	-34.68	H	Peak
2485.000	46.15	-6.26	39.89	74.00	-34.11	H	Peak
3223.000	43.51	-3.39	40.12	74.00	-33.88	H	Peak
4033.000	42.00	-0.94	41.06	74.00	-32.94	H	Peak
4852.000	42.88	1.89	44.77	74.00	-29.23	H	Peak
5851.000	40.32	3.14	43.46	74.00	-30.54	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT40 MHz(CH Mid)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1711.000	53.00	-9.38	43.62	74.00	-30.38	V	Peak
1972.000	48.45	-8.35	40.10	74.00	-33.90	V	Peak
3322.000	45.10	-3.21	41.89	74.00	-32.11	V	Peak
4078.000	41.65	-0.81	40.84	74.00	-33.16	V	Peak
4969.000	40.88	2.38	43.26	74.00	-30.74	V	Peak
6121.000	40.07	3.91	43.98	74.00	-30.02	V	Peak
1990.000	46.47	-8.32	38.15	74.00	-35.85	H	Peak
2584.000	45.17	-5.80	39.37	74.00	-34.63	H	Peak
3043.000	43.77	-3.72	40.05	74.00	-33.95	H	Peak
3880.000	42.89	-1.48	41.41	74.00	-32.59	H	Peak
4879.000	45.15	2.01	47.16	74.00	-26.84	H	Peak
5320.000	41.04	2.54	43.58	74.00	-30.42	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT40 MHz(CH High)

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52 % RH

Date: August 19, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.000	48.35	-11.12	37.23	74.00	-36.77	V	Peak
1999.000	49.73	-8.31	41.42	74.00	-32.58	V	Peak
3214.000	43.08	-3.41	39.67	74.00	-34.33	V	Peak
4105.000	42.08	-0.73	41.35	74.00	-32.65	V	Peak
4537.000	42.33	0.58	42.91	74.00	-31.09	V	Peak
5077.000	41.29	2.52	43.81	74.00	-30.19	V	Peak
1000.0000	46.77	-8.82	37.95	74.00	-36.05	H	Peak
2233.000	46.80	-7.33	39.47	74.00	-34.53	H	Peak
2539.000	45.80	-6.01	39.79	74.00	-34.21	H	Peak
3970.000	41.85	-1.15	40.70	74.00	-33.30	H	Peak
4915.000	43.60	2.16	45.76	74.00	-28.24	H	Peak
6247.000	41.51	4.45	45.96	74.00	-28.04	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. TEST SETUP





7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	10.102	>500	PASS
Mid	2437	10.089		PASS
High	2462	10.104		PASS

Test mode: IEEE 802.11b (Antenna 2)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	10.085	>500	PASS
Mid	2437	10.097		PASS
High	2462	10.098		PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16.621	>500	PASS
Mid	2437	16.617		PASS
High	2462	16.617		PASS

Test mode: IEEE 802.11g (Antenna 2)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16.614	>500	PASS
Mid	2437	16.619		PASS
High	2462	16.612		PASS



Test mode: IEEE 802.11n HT20 MHz (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17.857	>500	PASS
Mid	2437	17.854		PASS
High	2462	17.856		PASS

Test mode: IEEE 802.11n HT20 MHz (Antenna 2)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17.788	>500	PASS
Mid	2437	17.758		PASS
High	2462	17.742		PASS

Test mode: IEEE 802.11n HT40 MHz (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36.453	>500	PASS
Mid	2437	36.471		PASS
High	2452	36.488		PASS

Test mode: IEEE 802.11n HT40 MHz (Antenna 2)


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36.378	>500	PASS
Mid	2437	36.404		PASS
High	2452	36.460		PASS



Test Plot


IEEE 802.11b mode (Antenna 1)

6dB Bandwidth (CH Low)

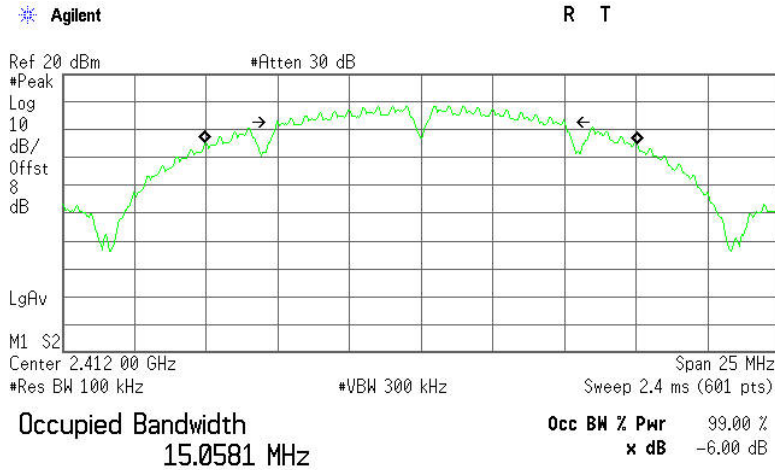

Transmit Freq Error 7.556 kHz
x dB Bandwidth 10.102 MHz


6dB Bandwidth (CH Mid)

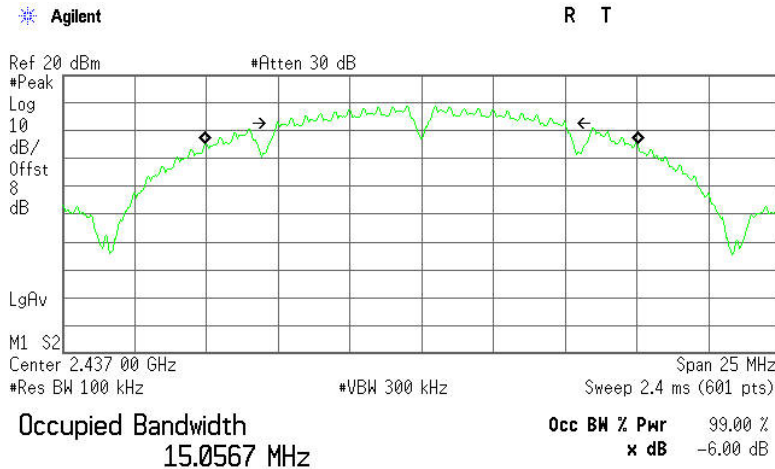

Transmit Freq Error -3.243 kHz
x dB Bandwidth 10.089 MHz




6dB Bandwidth (CH High)

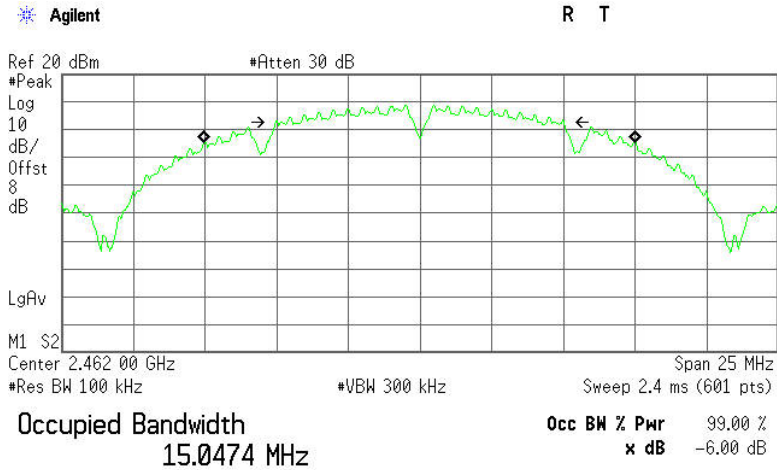

Transmit Freq Error -4.000 kHz
x dB Bandwidth 10.104 MHz

IEEE 802.11b mode (Antenna 2)


6dB Bandwidth (CH Low)

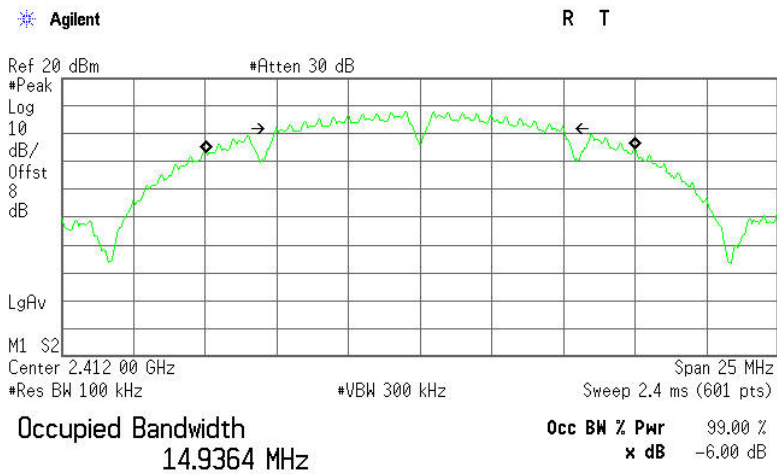


Transmit Freq Error 14.565 kHz
x dB Bandwidth 10.085 MHz



6dB Bandwidth (CH Mid)

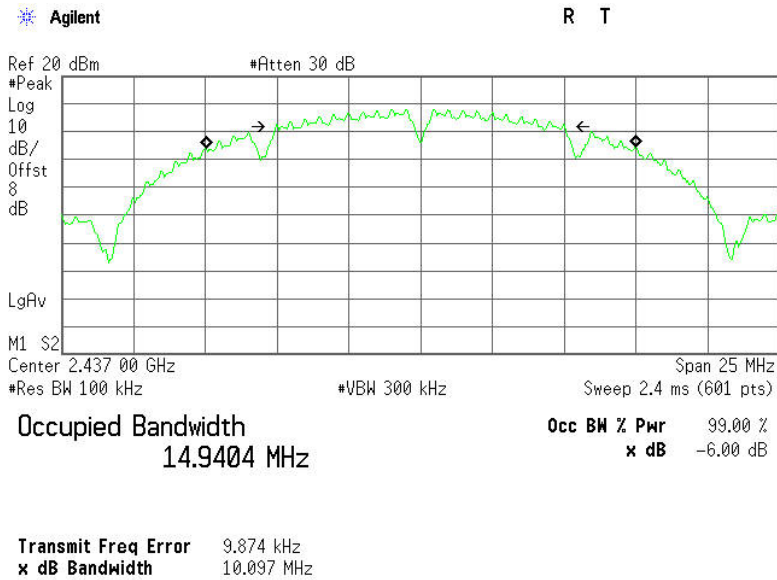


6dB Bandwidth (CH High)

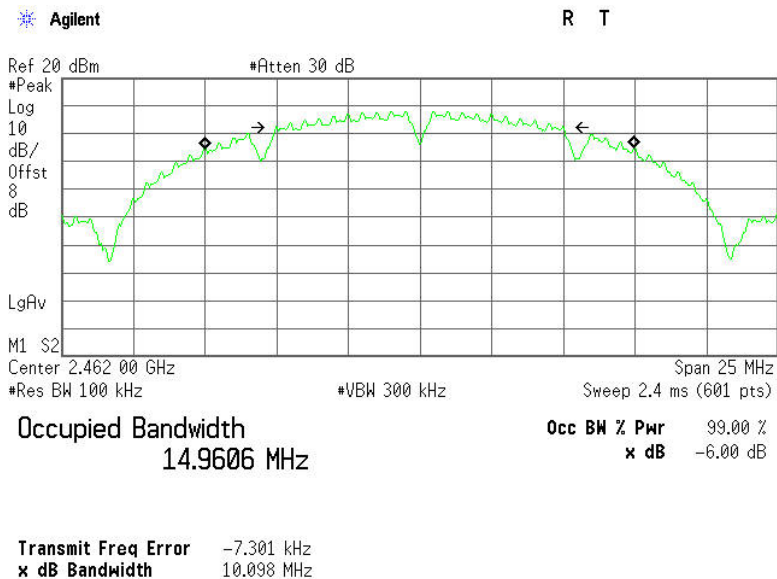




IEEE 802.11g mode (Antenna 1)

6dB Bandwidth (CH Low)

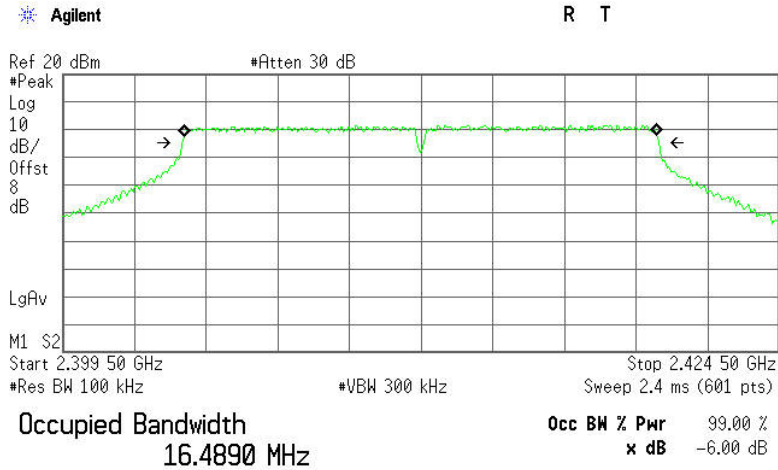

Transmit Freq Error -20.714 kHz
x dB Bandwidth 16.621 MHz


6dB Bandwidth (CH Mid)

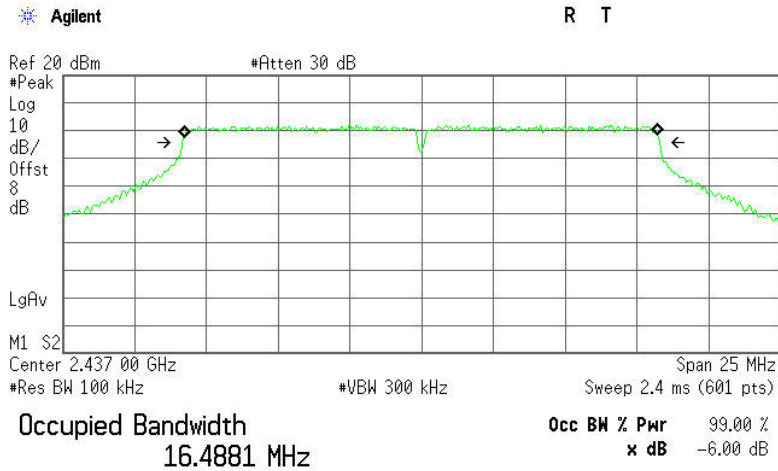

Transmit Freq Error -24.557 kHz
x dB Bandwidth 16.617 MHz




6dB Bandwidth (CH High)

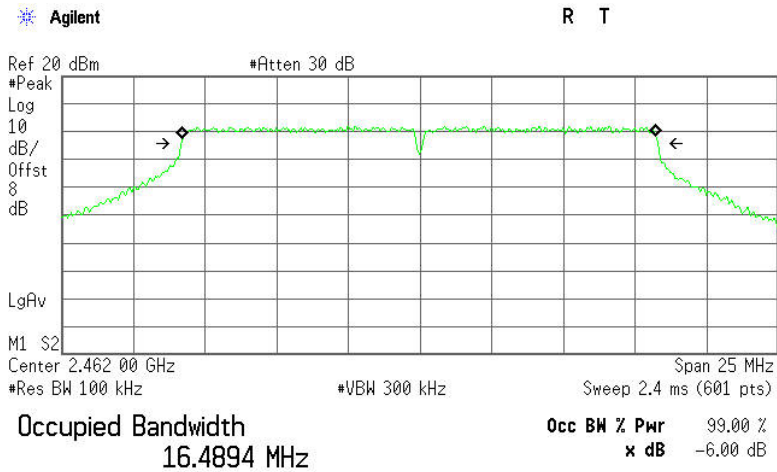

Transmit Freq Error -28.457 kHz
x dB Bandwidth 16.617 MHz

IEEE 802.11g mode (Antenna 2)


6dB Bandwidth (CH Low)

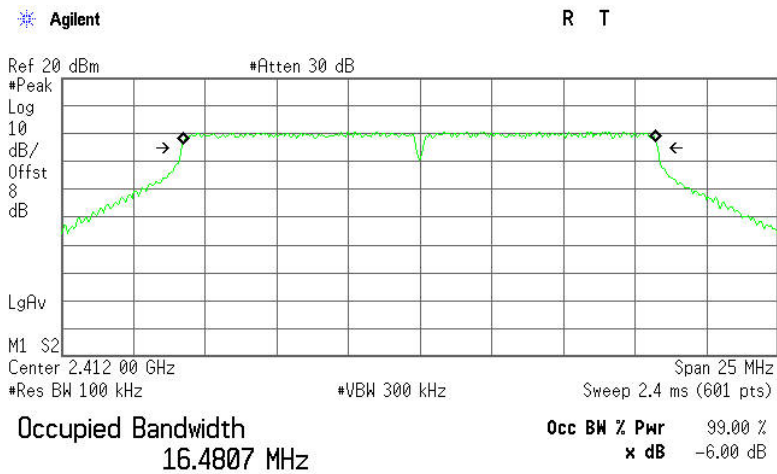


Transmit Freq Error -24.457 kHz
x dB Bandwidth 16.614 MHz



6dB Bandwidth (CH Mid)

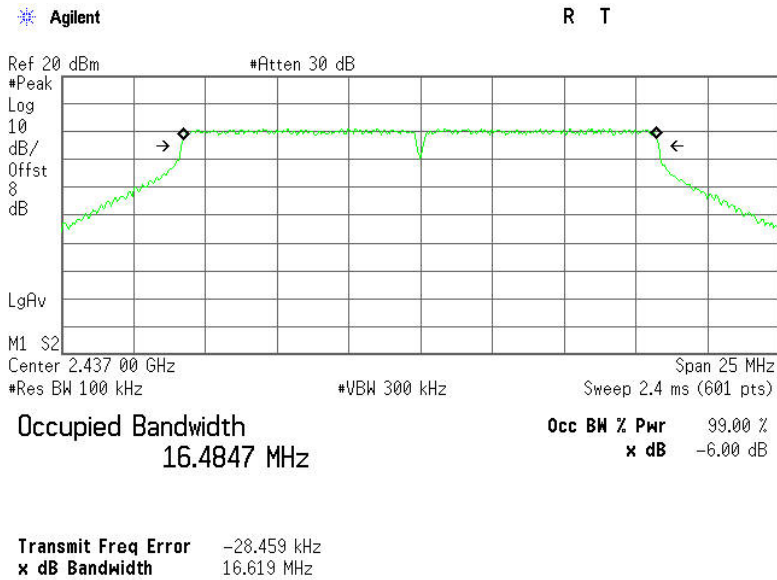


6dB Bandwidth (CH High)

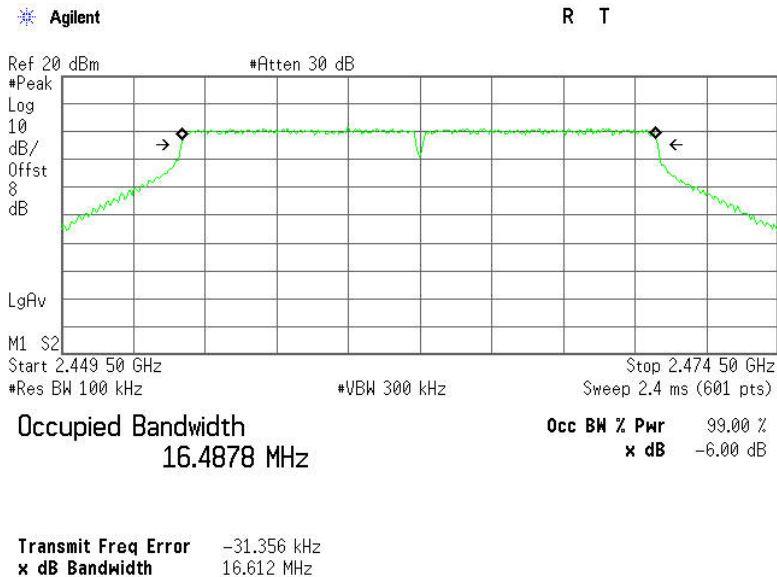




IEEE 802.11n HT20 MHz mode (Antenna 1)

6dB Bandwidth (CH Low)

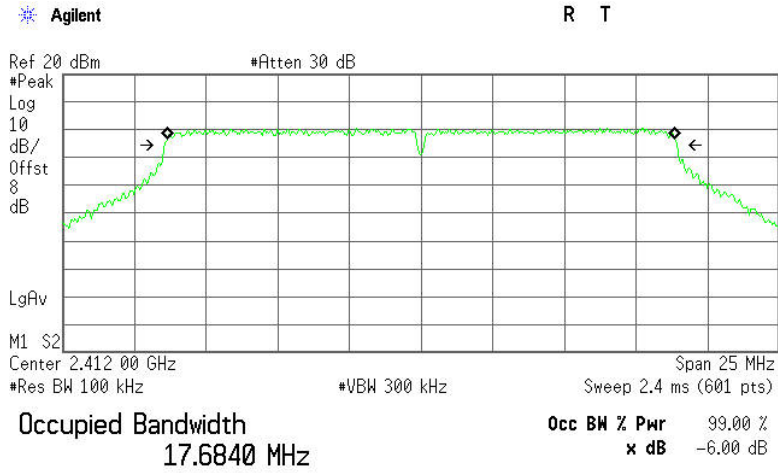

Transmit Freq Error 7.209 kHz
 x dB Bandwidth 17.857 MHz


6dB Bandwidth (CH Mid)

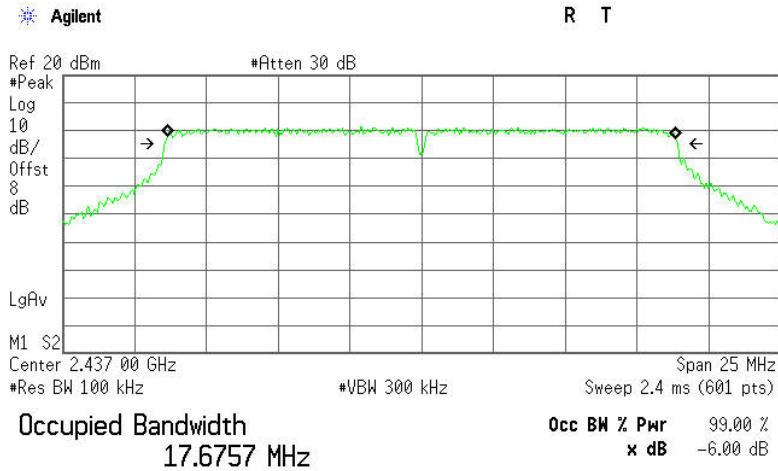

Transmit Freq Error 1.164 kHz
 x dB Bandwidth 17.854 MHz




6dB Bandwidth (CH High)

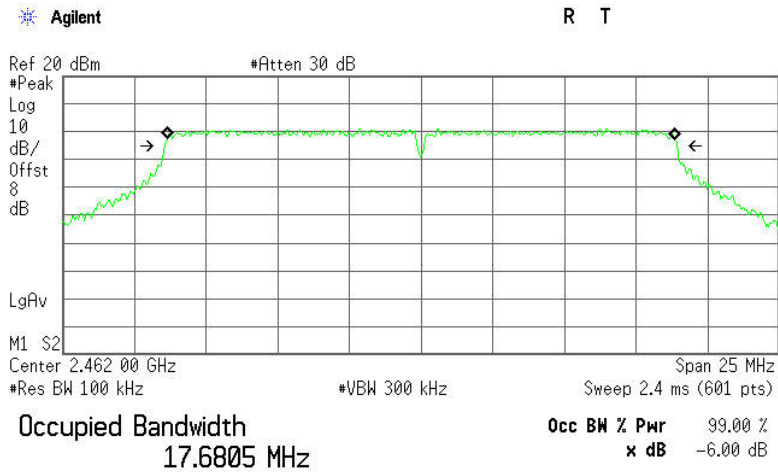

Transmit Freq Error 4.968 kHz
x dB Bandwidth 17.856 MHz

IEEE 802.11n HT20 MHz mode (Antenna 2)


6dB Bandwidth (CH Low)

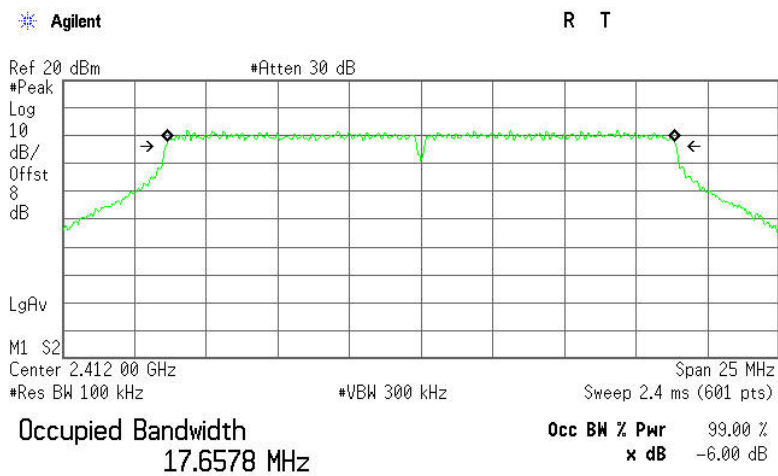


Transmit Freq Error -5.503 kHz
x dB Bandwidth 17.788 MHz



6dB Bandwidth (CH Mid)

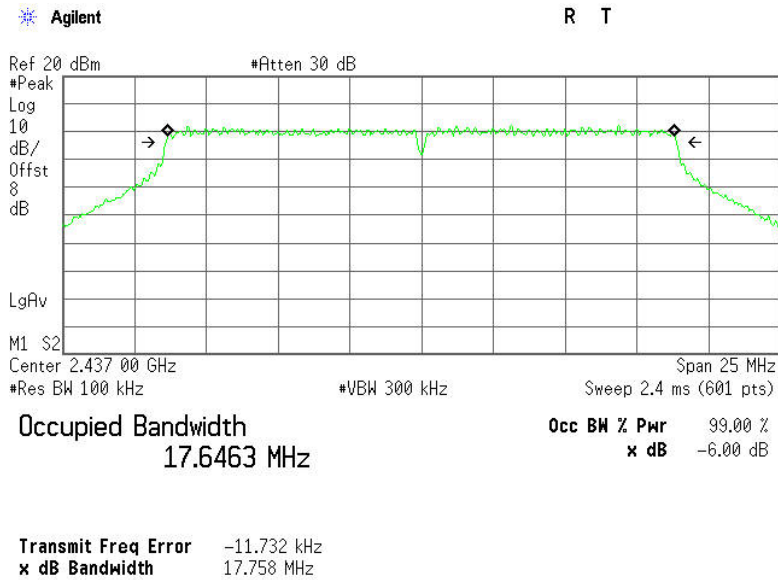


6dB Bandwidth (CH High)

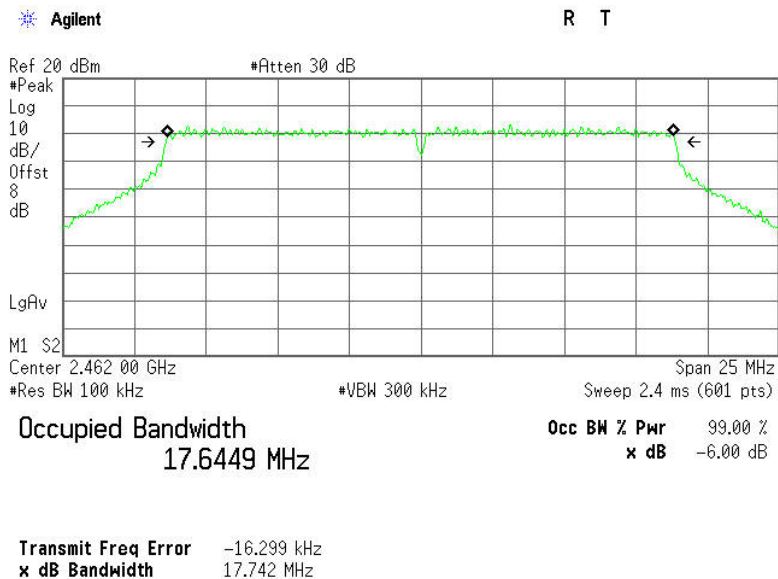




IEEE 802.11n HT40 MHz mode (Antenna 1)

6dB Bandwidth (CH Low)

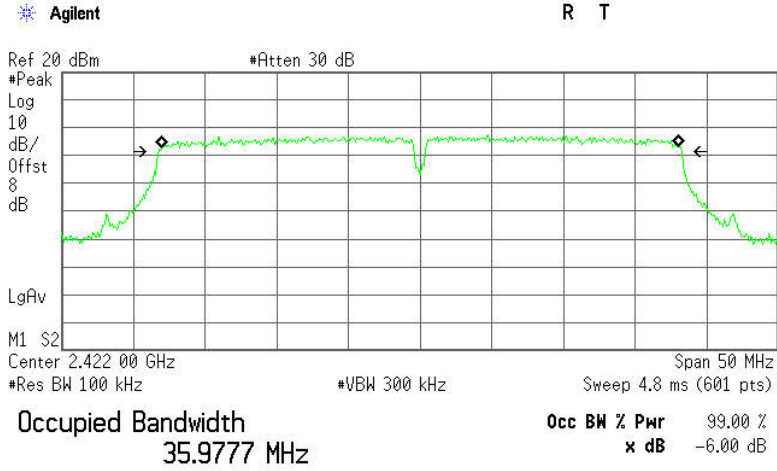

Transmit Freq Error 17.474 kHz
x dB Bandwidth 36.453 MHz


6dB Bandwidth (CH Mid)

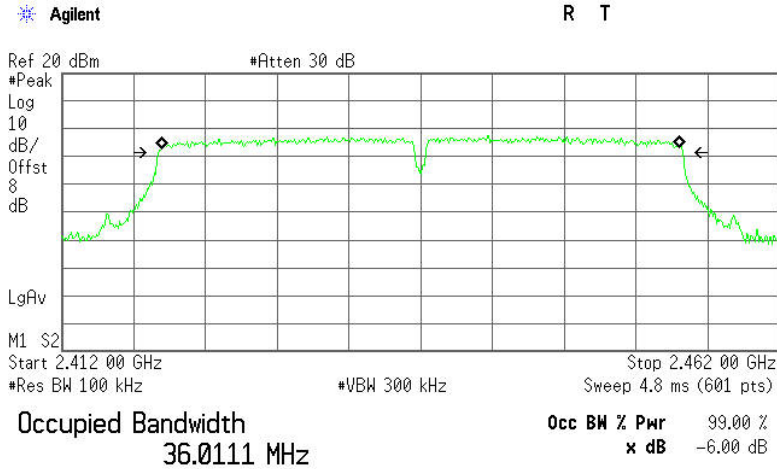

Transmit Freq Error 12.515 kHz
x dB Bandwidth 36.471 MHz




6dB Bandwidth (CH High)

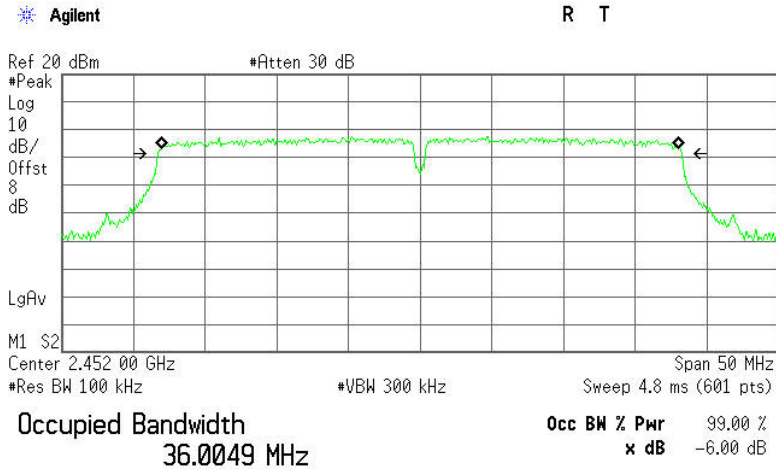

Transmit Freq Error -214.401 Hz
x dB Bandwidth 36.488 MHz

IEEE 802.11n HT40 MHz mode (Antenna 2)


6dB Bandwidth (CH Low)

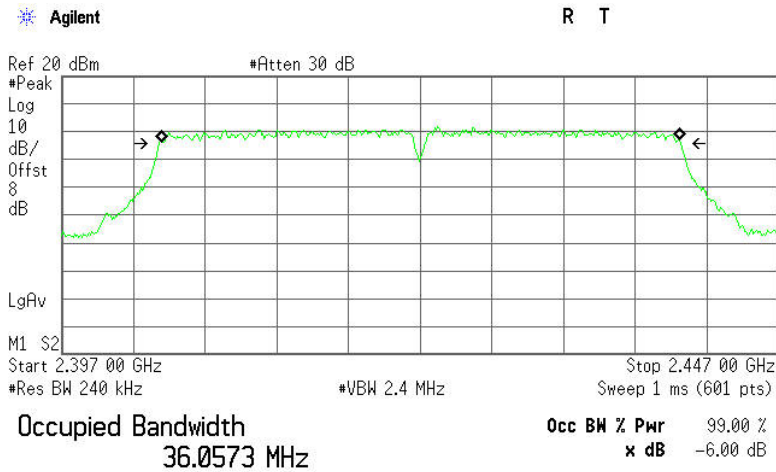


Transmit Freq Error 14.578 kHz
x dB Bandwidth 36.378 MHz



6dB Bandwidth (CH Mid)

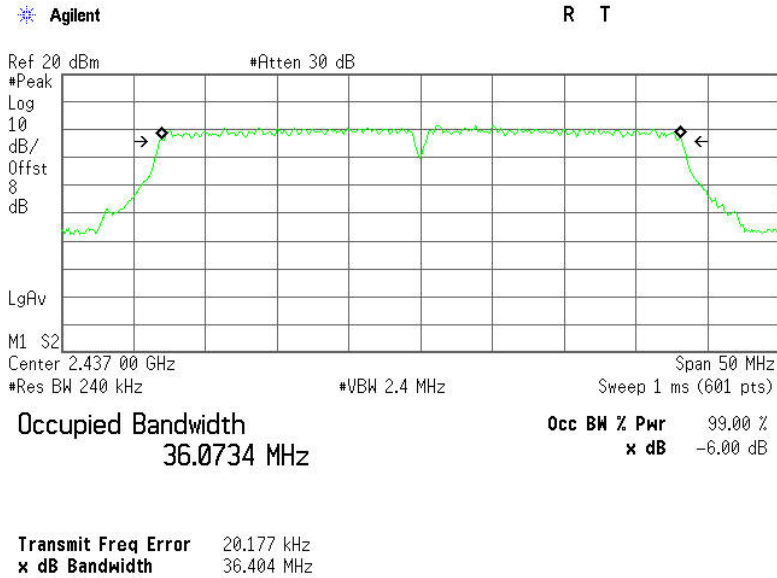

6dB Bandwidth (CH High)

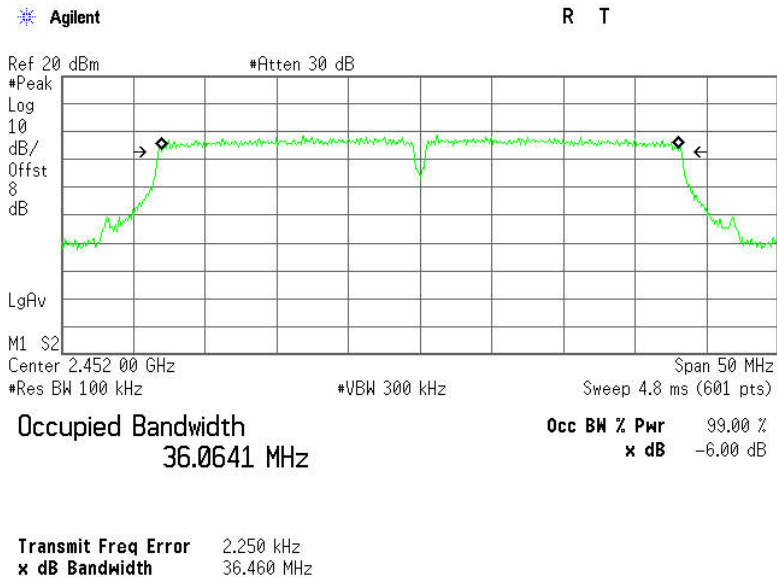



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	03/09/2014	03/08/2015
Power Sensor	Anritsu	MA2411B	1126150	03/09/2014	03/08/2015
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.4.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW ≥ DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW ≥ *DTS bandwidth*.
- b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



9.1.2 Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.

- a) Set the RBW = 1 MHz.
- b) Set the VBW ≥ 3 RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.4.4. TEST SETUP

