

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Rugged Smart Phone

ISSUED TO
Trimble Europe BV

Meerheide, 45 Eersel 5521 NETHERLANDS



Tested by: Zou Liu

Zou Liu
(Engineer)

Date: Dec. 29, 2018

Approved by: Wei Yanguan

Wei Yanguan
(Chief Engineer)

Date: Dec. 29, 2018

Report No.: BL-EC18B0415-601
EUT Name: Rugged Smart Phone
Model Name: TDC600 (refer section 2.4)
Brand Name: Trimble, Spectra Geospatial
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 5, April 2018)
RSS-247 (Issue 2, February 2017)
FCC ID: NZI-11705900
ISED Number: 9288A-11705900
Test conclusion: Pass
Test Date: Nov. 30, 2018 ~ Dec. 17, 2018
Date of Issue: Dec. 29, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Dec. 26, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Dec. 29, 2018</u>	<u>Modify the limits on page 40</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	6
1.1	Identification of the Testing Laboratory	6
1.2	Identification of the Responsible Testing Location	6
1.3	Laboratory Condition	6
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Ancillary Equipment	7
2.6	Technical Information	8
2.7	Additional Instructions	10
3	SUMMARY OF TEST RESULTS	11
3.1	Test Standards	11
3.2	Verdict	12
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments	13
4.2	Test Equipment List	13
4.3	Measurement Uncertainty	14
4.4	Description of Test Setup	15
4.4.1	For Antenna Port Test	15
4.4.2	For AC Power Supply Port Test	15
4.4.3	For Radiated Test (Below 30 MHz)	16
4.4.4	For Radiated Test (30 MHz-1 GHz)	16
4.4.5	For Radiated Test (Above 1 GHz)	17
4.5	Measurement Results Explanation Example	18

4.5.1	For conducted test items:	18
5	TEST ITEMS.....	19
5.1	Antenna Requirements.....	19
5.1.1	Relevant Standards.....	19
5.1.2	Antenna Anti-Replacement Construction	19
5.1.3	Antenna Gain	20
5.2	Frequency Hopping Systems	21
5.2.1	Relevant Standards.....	21
5.2.2	Description of the systems	21
5.3	Number of Hopping Frequencies	22
5.3.1	Limit.....	22
5.3.2	Test Setup	22
5.3.3	Test Procedure.....	22
5.3.4	Test Result	22
5.4	Peak Output Power and E.I.R.P.....	23
5.4.1	Test Limit.....	23
5.4.2	Test Setup	23
5.4.3	Test Procedure.....	23
5.4.4	Test Result	23
5.5	Occupied Bandwidth	24
5.5.1	Limit.....	24
5.5.2	Test Setup	24
5.5.3	Test Procedure.....	24
5.5.4	Test Result	24
5.6	Carrier Frequency Separation	25
5.6.1	Limit.....	25
5.6.2	Test Setup	25
5.6.3	Test Procedure.....	25
5.6.4	Test Result	25
5.7	Time of Occupancy (Dwell time)	26
5.7.1	Limit.....	26
5.7.2	Test Setup	26
5.7.3	Test Procedure.....	26

5.7.4	Test Result	27
5.8	Conducted Spurious Emission & Authorized-band band-edge	28
5.8.1	Limit.....	28
5.8.2	Test Setup	28
5.8.3	Test Procedure.....	28
5.8.4	Test Result	28
5.9	Conducted Emission	29
5.9.1	Limit.....	29
5.9.2	Test Setup	29
5.9.3	Test Procedure.....	29
5.9.4	Test Result	29
5.10	Radiated Spurious Emission	30
5.10.1	Limit.....	30
5.10.2	Test Setup	30
5.10.3	Test Procedure.....	30
5.10.4	Test Result	31
5.11	Band Edge (Restricted-band band-edge).....	32
5.11.1	Limit.....	32
5.11.2	Test Setup	32
5.11.3	Test Procedure.....	32
5.11.4	Test Result	32
ANNEX A	TEST RESULT	33
A.1	Number of Hopping Frequency	33
A.2	Peak Output Power and E.I.R.P.....	34
A.3	20 dB and 99% bandwidth	37
A.4	Hopping Frequency Separation.....	40
A.5	Average Time of Occupancy	41
A.6	Conducted Spurious Emissions & Authorized-band band-edge	44
A.7	Conducted Emissions.....	51
A.8	Radiated Spurious Emission	53
A.9	Band Edge (Restricted-band band-edge).....	89
ANNEX B	TEST SETUP PHOTOS	101
ANNEX C	EUT EXTERNAL PHOTOS.....	101



ANNEX D EUT INTERNAL PHOTOS 101

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Trimble Europe BV
Address	Meerheide, 45 Eersel 5521 NETHERLANDS

2.2 Manufacturer Information

Manufacturer	Trimble Europe BV
Address	Meerheide, 45 Eersel 5521 NETHERLANDS

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Rugged Smart Phone
Model Name Under Test	TDC600
Series Model Name	TDC600, MobileMapper60
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only different on model name, brand name and colors.
Hardware Version	C601_V1.00_PCB
Software Version	TDC600.53.80.10
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA7800
	Serial No.	N/A
	Capacity	8000 mAh
	Rated Voltage	3.8 V
	Limited Voltage	4.35 V
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ASUC71w-050912300
	Serial No.	N/A
	Rated Input	100-240 V~, 50/60 Hz, 0.7 A
	Rated Output	5 V= 3 A or 9 V= 2 A or 12 V= 1.5 A
Ancillary Equipment 3	USB Cable	
	Length (Approx.)	1.0 m

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/900/1800/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8 TD-SCDMA Band 34/39 4G Network FDD LTE Band 1/2/3/4/5/7/8/12/13/17/20/25/28 TDD LTE Band 38/39/40/41 Bluetooth 4.0 (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11n(HT20) and 802.11ac NFC, GPS, GLONASS, BDS, Galileo
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	0.10 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna Impedance	50 Ω
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.7 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	QRCT3		
Support Units (Software installation media)	Description	Manufacturer	Model
		Notebook	Lenovo
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 8
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

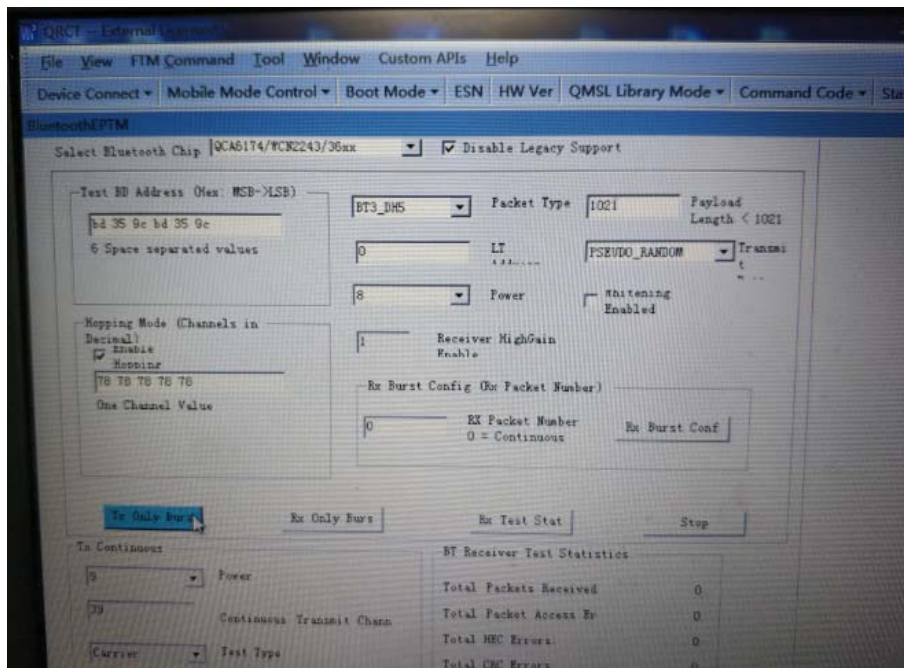

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	RSS-Gen (Issue 5, April 2018)	General Requirements for Compliance of Radio Apparatus
3	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	2018.10.10	2019.01.09
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	2018.10.10	2019.01.09
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
Software	BALUN	BL410	-	-	-
Cable	ROHDE&SCHWARZ	JUNFLON	APR0914004	2018.10.10	2019.01.09

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	± 1 °C
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

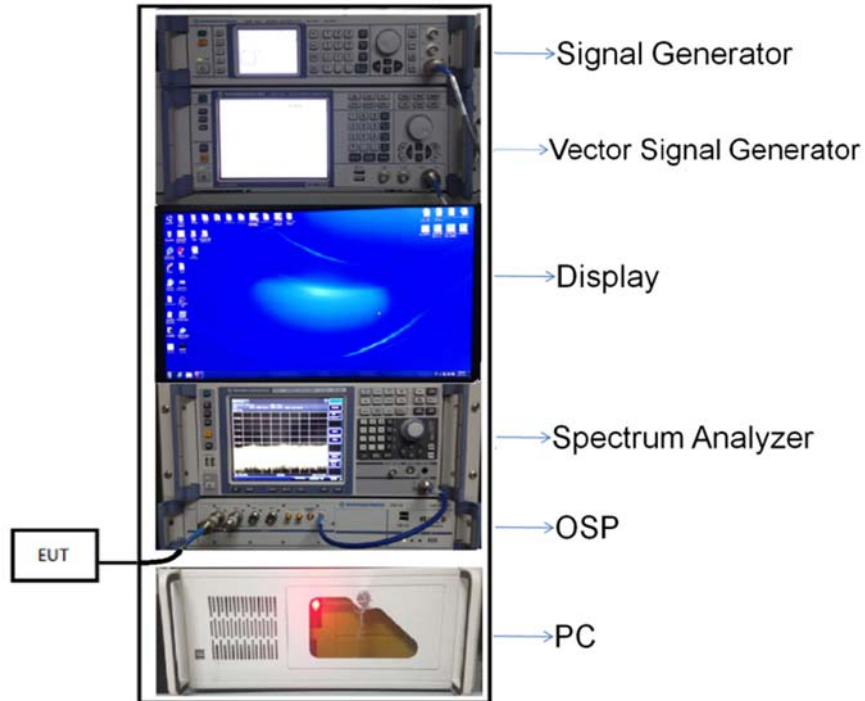


(Diagram 1)

4.4.2 For AC Power Supply Port Test

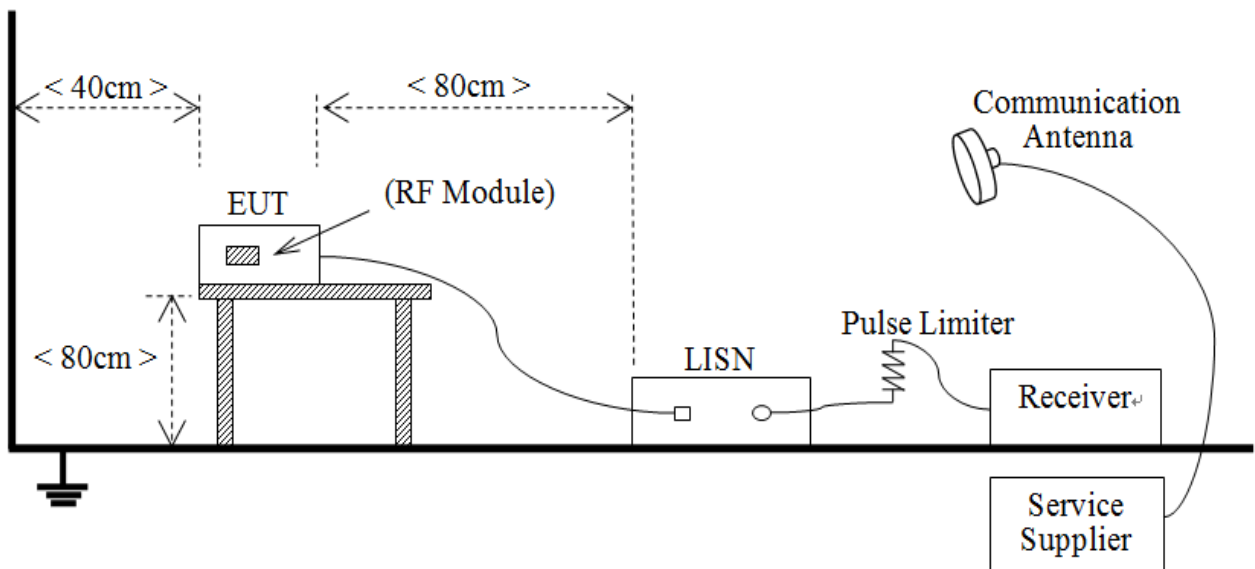


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

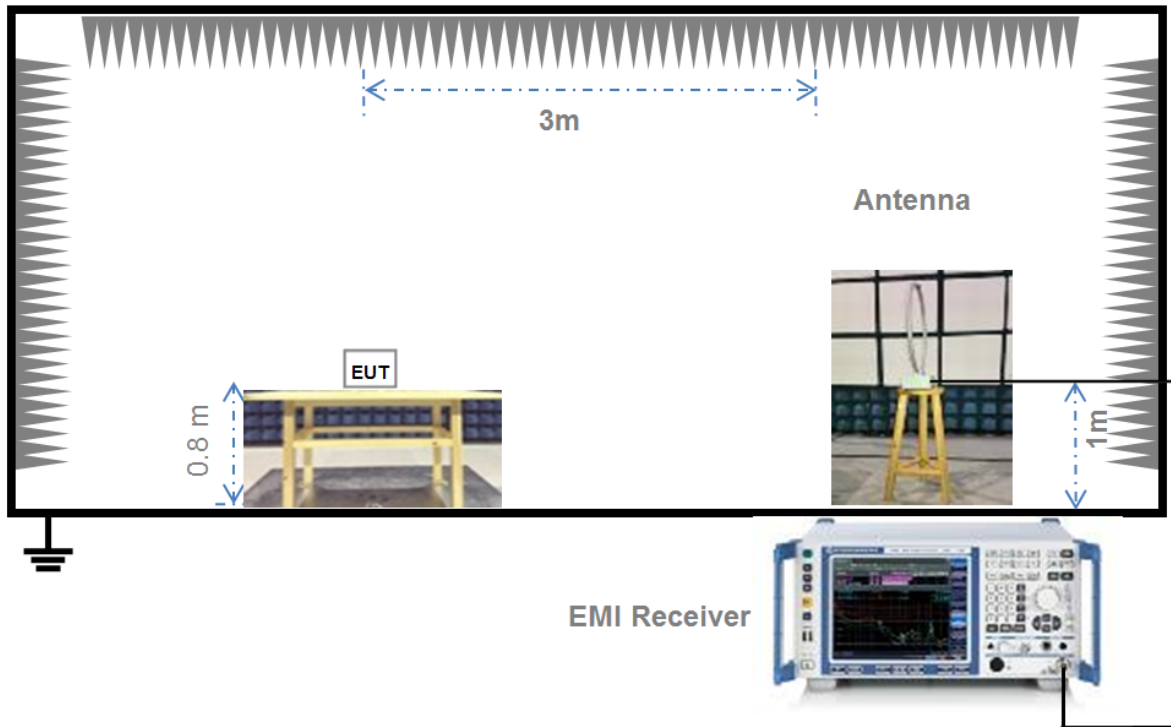


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

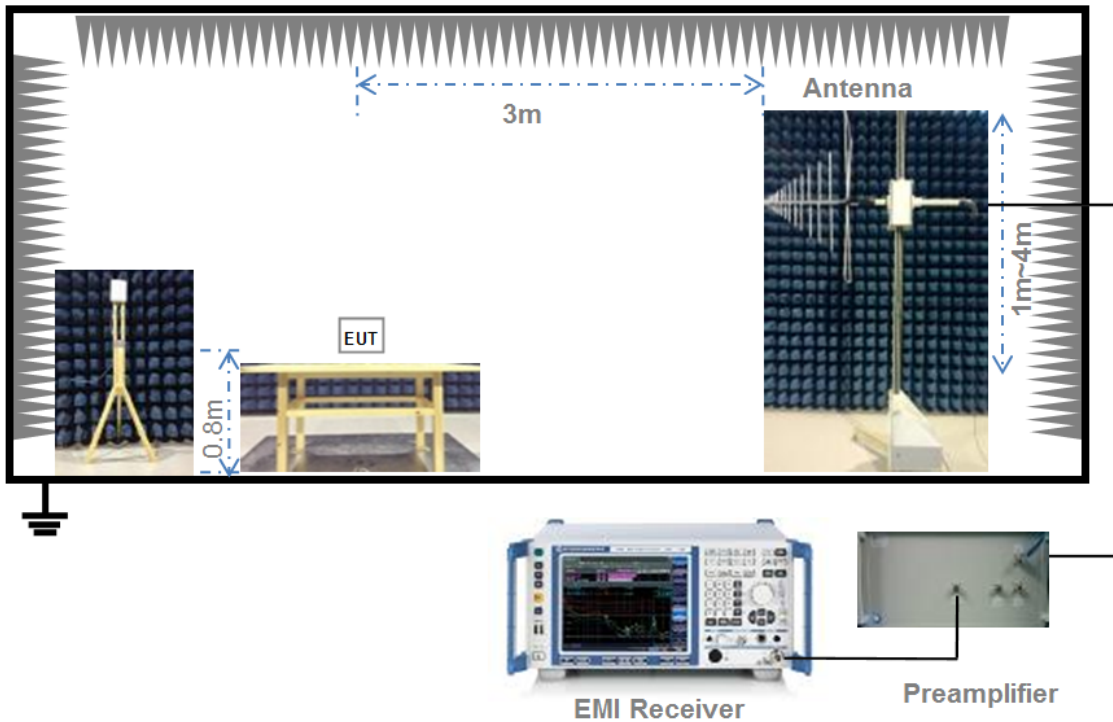

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

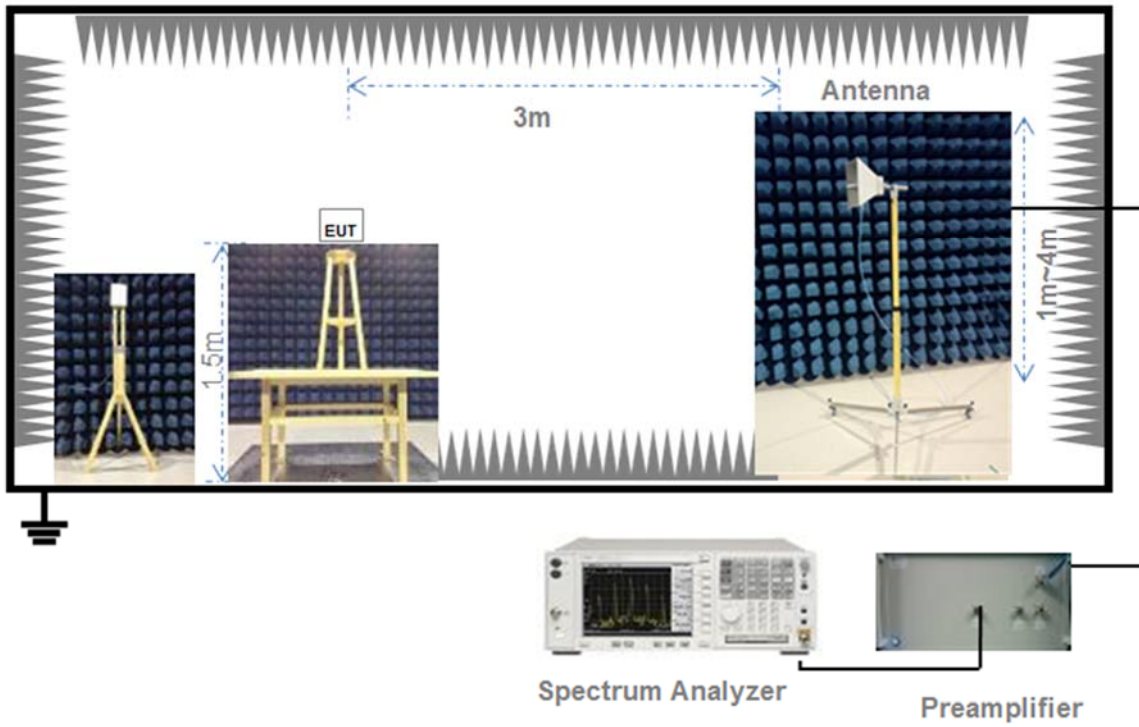

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.


If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	

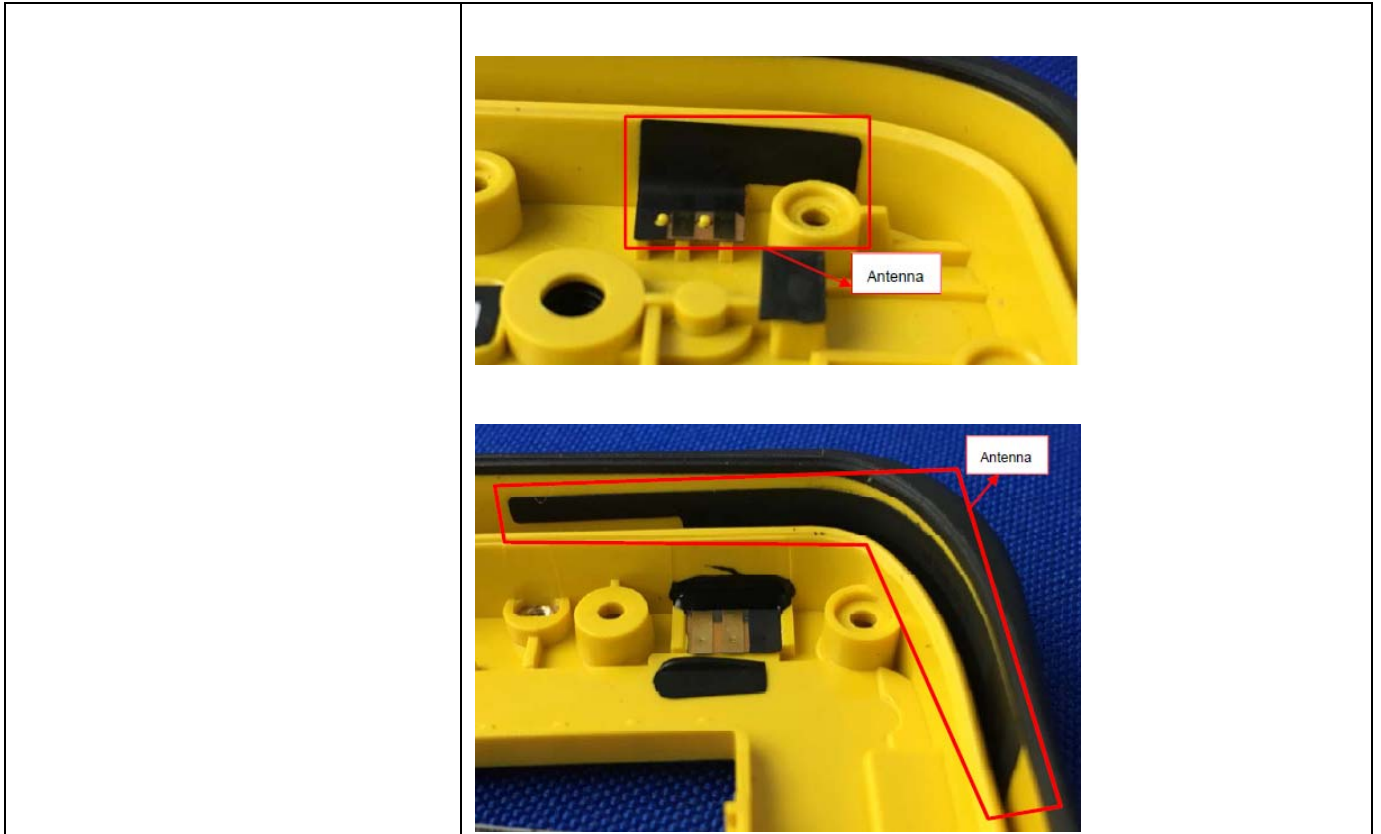

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

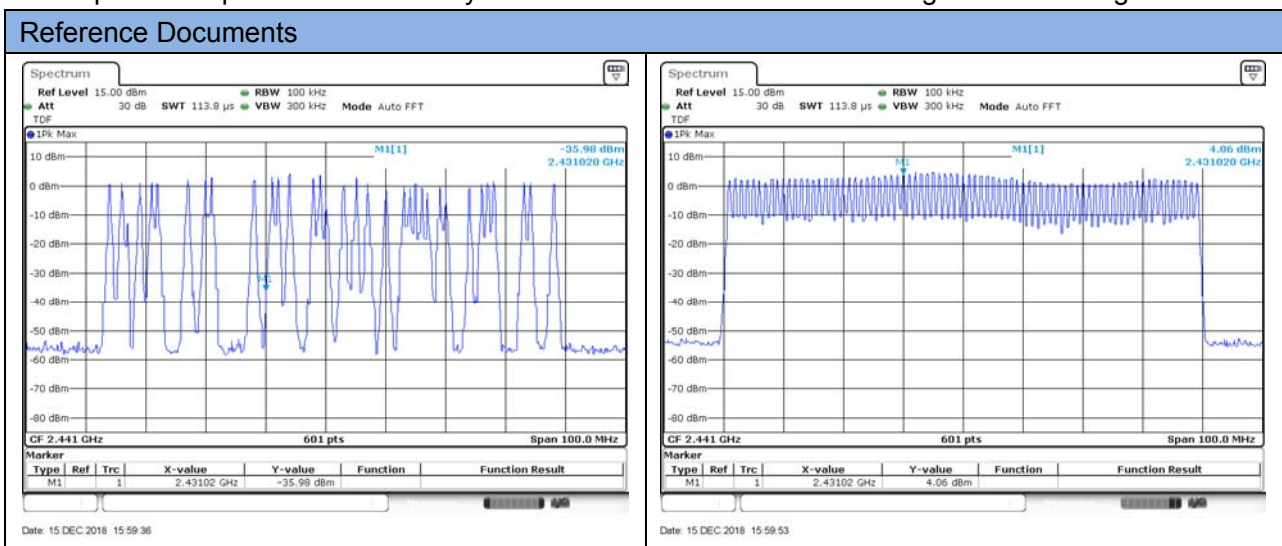

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-

random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.

4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

For DH3 package type

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

For DH5 package type

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

For DH3 package type

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = 20*log[Field Strength ($\mu\text{V}/\text{m}$)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

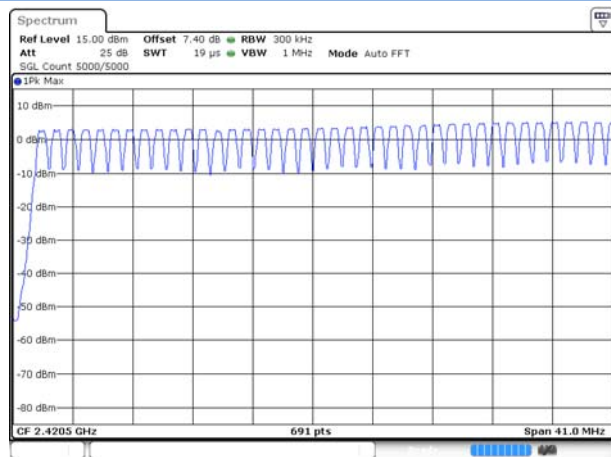


GFSK 2.4415 GHz ~ 2.4835 GHz

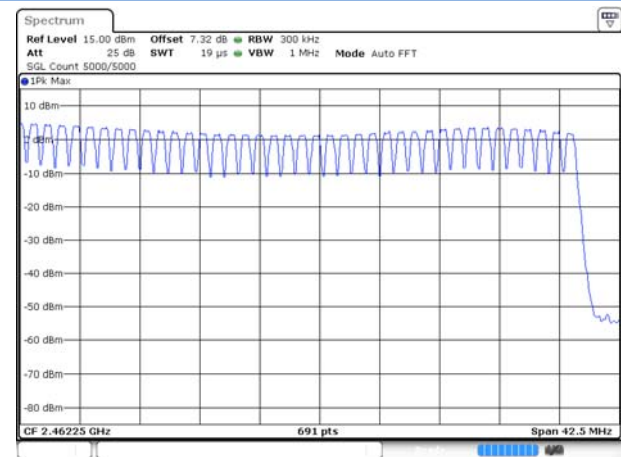

8-DPSK 2.4 GHz ~ 2.4415 GHz

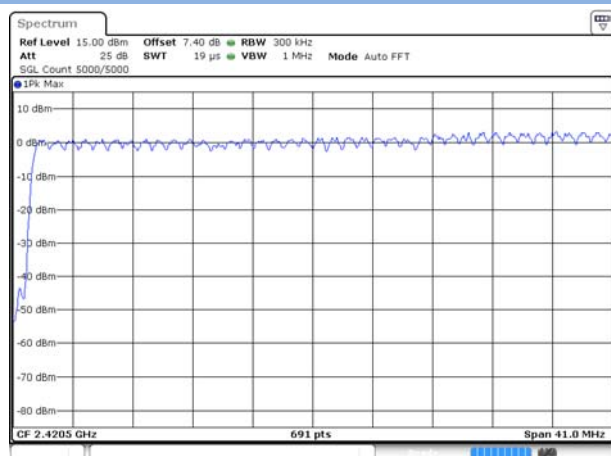

8-DPSK 2.4415 GHz ~ 2.4835 GHz

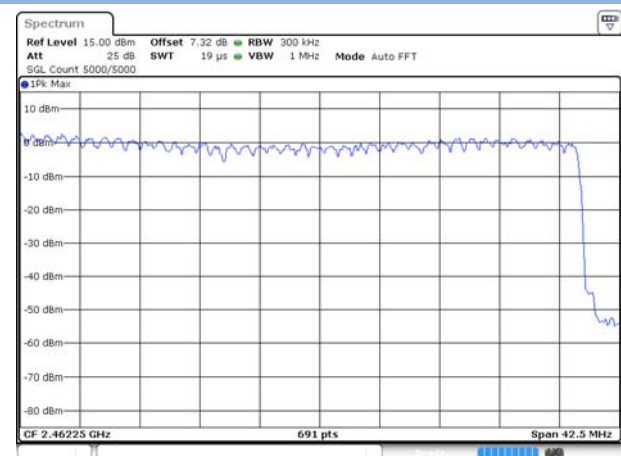

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	2.89	1.95	30	1000	Pass
Middle	4.91	3.10			Pass
High	1.82	1.52			Pass


Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	3.20	2.09	3.42	2.20	21	125	Pass
Middle	5.13	3.26	5.55	3.59			Pass
High	2.08	1.61	2.45	1.76			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	2.99	1.99	3.30	2.14	3.52	2.25	36	4000	Pass
Middle	5.01	3.17	5.23	3.33	5.65	3.67			Pass
High	1.92	1.56	2.18	1.65	2.55	1.80			Pass


Test plots

GFSK LOW CHANNEL

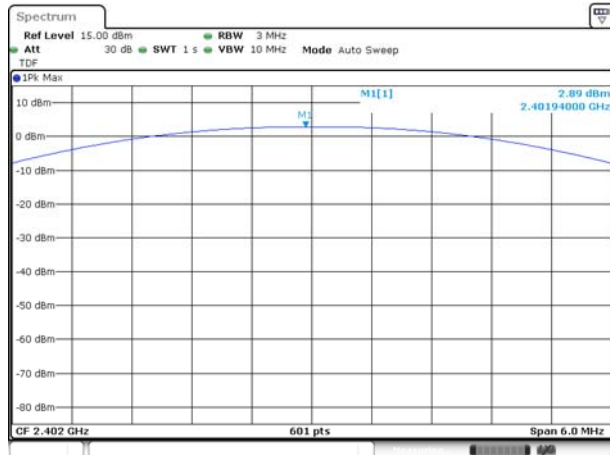


Date: 14 DEC 2018 10:32:16

GFSK MIDDLE CHANNEL

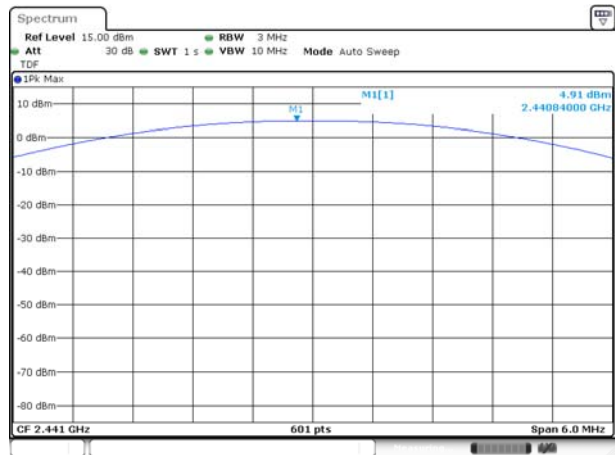


Date: 14 DEC 2018 10:39:51

GFSK HIGH CHANNEL

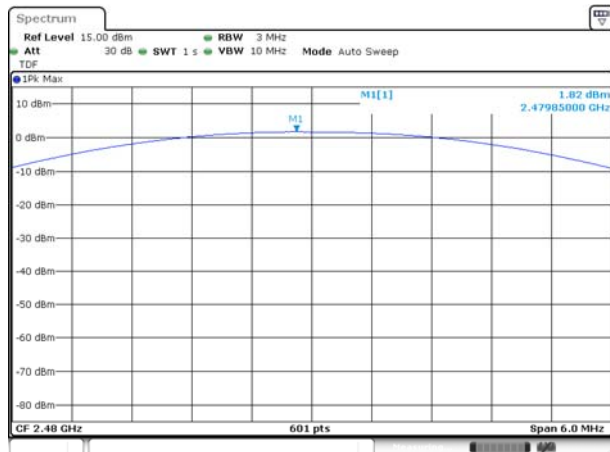


Date: 14 DEC 2018 10:44:51

II/4-DQPSK LOW CHANNEL

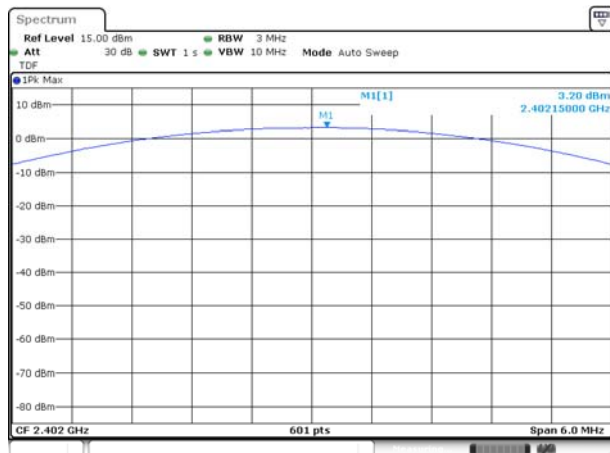


Date: 15 DEC 2018 15:14:13

II/4-DQPSK MIDDLE CHANNEL

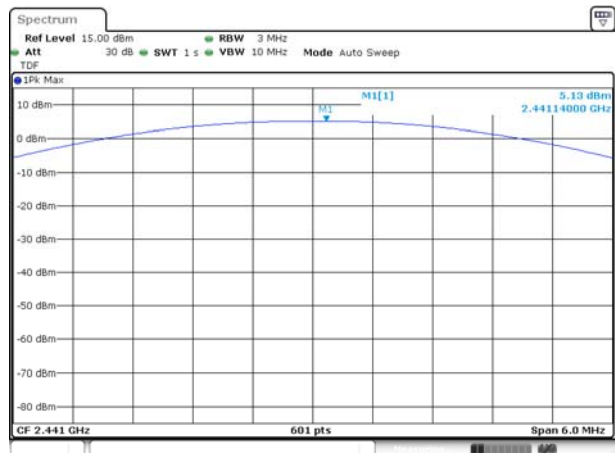


Date: 15 DEC 2018 15:22:22

π/4-QPSK HIGH CHANNEL

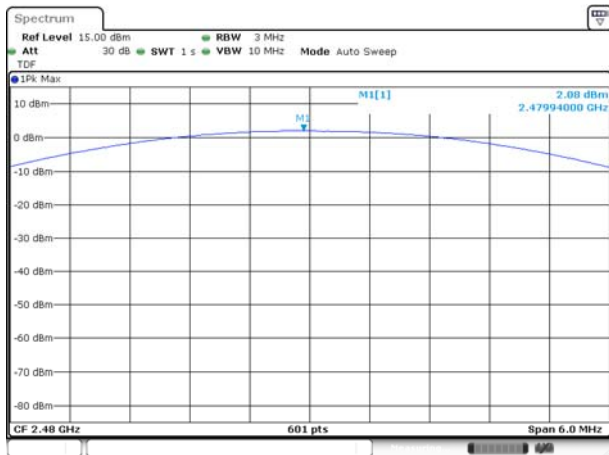


Date: 15 DEC 2018 15:28:48

8-DPSK LOW CHANNEL 8-DPSK MIDDLE CHANNEL

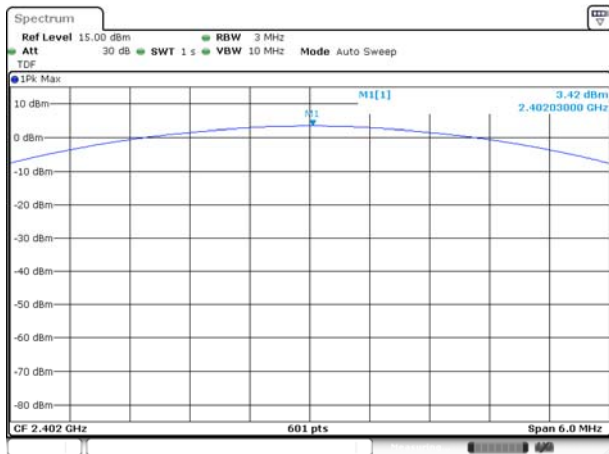


Date: 15 DEC 2018 15:33:22

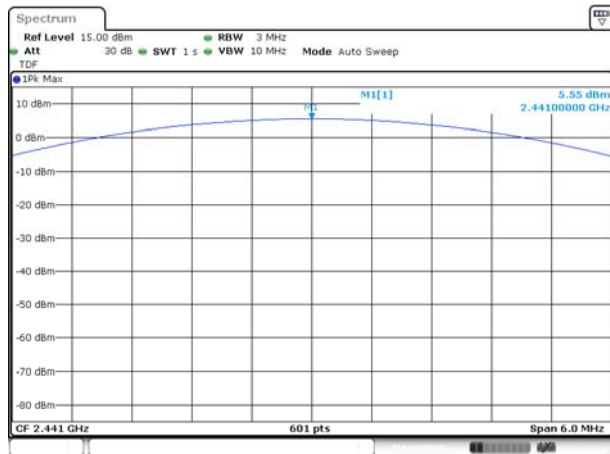

Date: 15 DEC 2018 15:38:13

8-DPSK HIGH CHANNEL

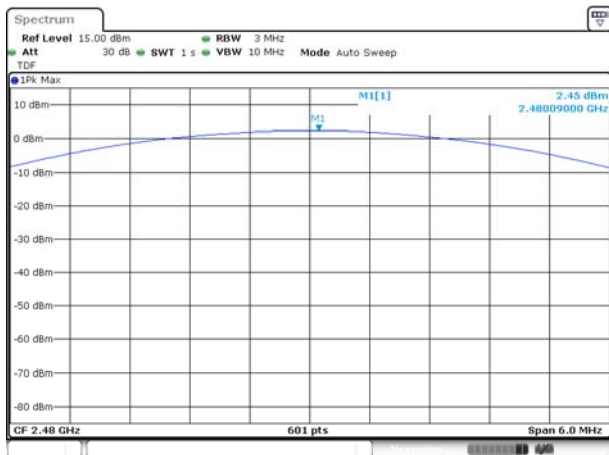

Date: 15 DEC 2018 15:46:31

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.956543	0.894356
Middle	0.956543	0.894356
High	0.952148	0.894356
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.291260	1.167873
Middle	1.286865	1.172214
High	1.286865	1.167873

Test plots


20 dB Bandwidth

GFSK LOW CHANNEL

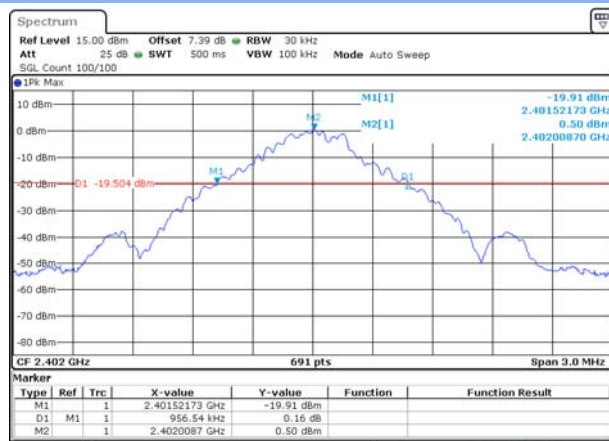


Date: 14 DEC 2018 10:33:12

GFSK MIDDLE CHANNEL

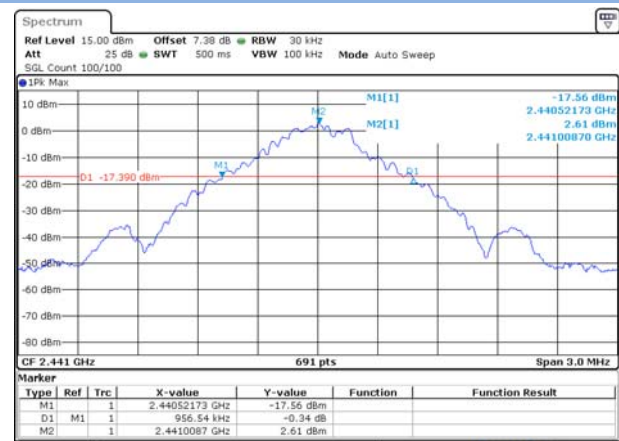

Date: 14 DEC 2018 10:40:47

GFSK HIGH CHANNEL

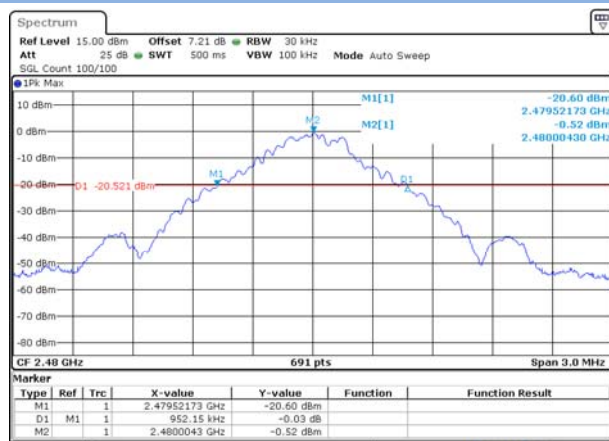

Date: 14 DEC 2018 10:45:47

8-DPSK LOW CHANNEL




Date: 15 DEC 2016 15:34:19

8-DPSK MIDDLE CHANNEL



Date: 15 DEC 2016 15:39:10

8-DPSK HIGH CHANNEL

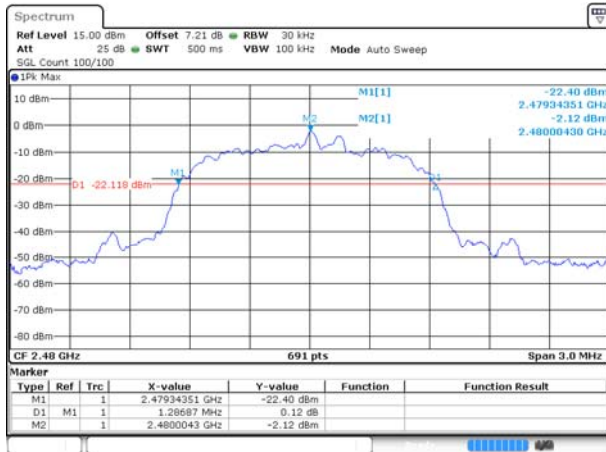

Date: 15 DEC 2016 15:47:28


99% Bandwidth

GFSK LOW CHANNEL




Date: 14 DEC 2016 10:34:09

GFSK MIDDLE CHANNEL

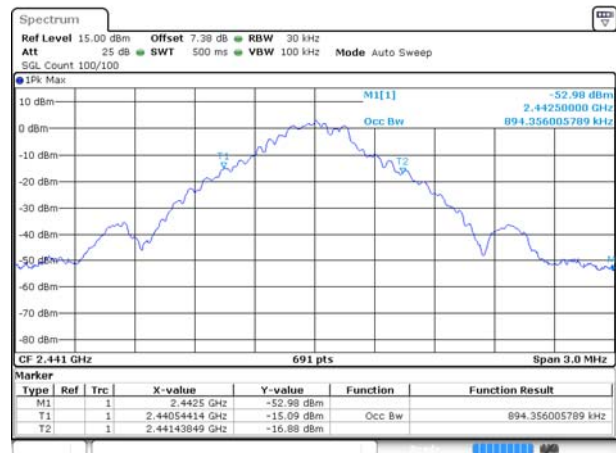

Date: 14 DEC 2016 10:41:44

GFSK HIGH CHANNEL

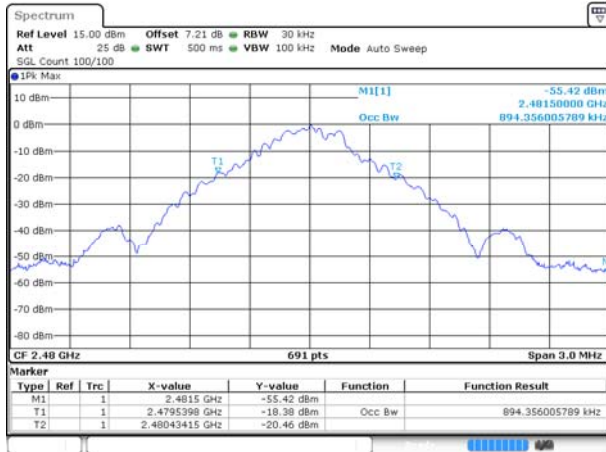

Date: 14 DEC 2016 10:46:44

8-DPSK LOW CHANNEL



Date: 15 DEC 2016 15:35:15

8-DPSK MIDDLE CHANNEL



Date: 15 DEC 2016 15:40:06

8-DPSK HIGH CHANNEL



Date: 15 DEC 2016 15:48:24

A.4 Hopping Frequency Separation


Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.0033	0.957	0.638	Pass
8-DPSK	1.0033	1.291	0.861	Pass


Test Plots

GFSK

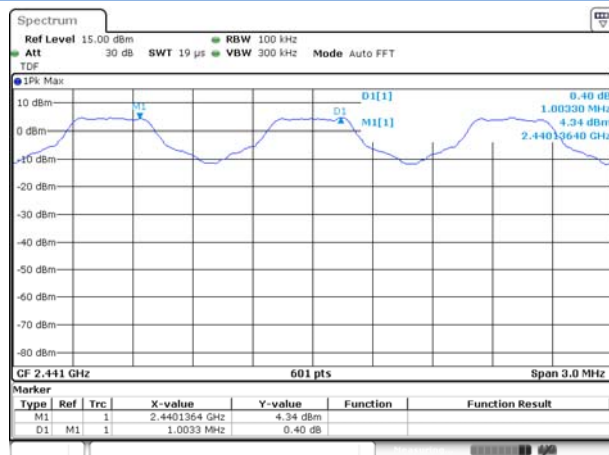

Date: 15 DEC 2018 15:58:32

8-DPSK

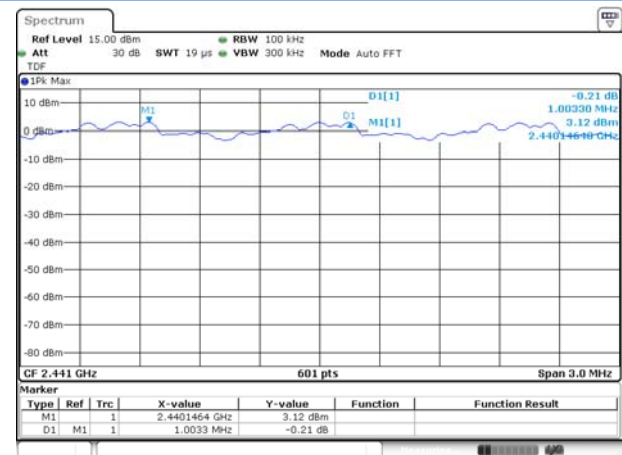

Date: 15 DEC 2018 16:10:14


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37873	121.194	0.4	Pass
DH 3	1.63890	262.224	0.4	Pass
DH 5	2.89070	308.341	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38493	123.178	0.4	Pass
DH 3	1.64010	262.416	0.4	Pass
DH 5	2.88200	307.413	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37700	60.320	0.4	Pass
DH 3	1.63800	131.040	0.4	Pass
DH 5	2.89200	154.240	0.4	Pass


Test Plots

GFSK DH1

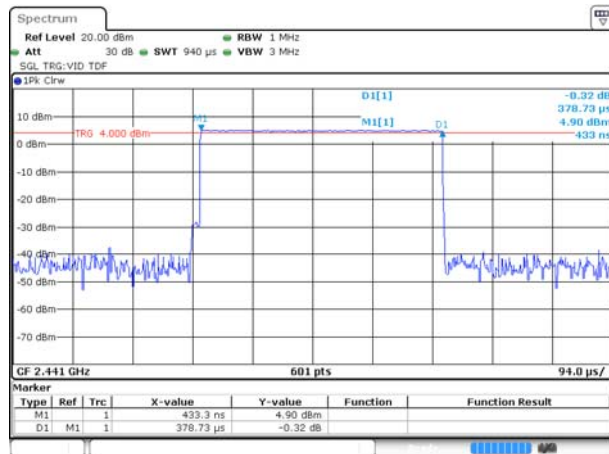


Date: 15 DEC 2018 16:16:18

GFSK DH3

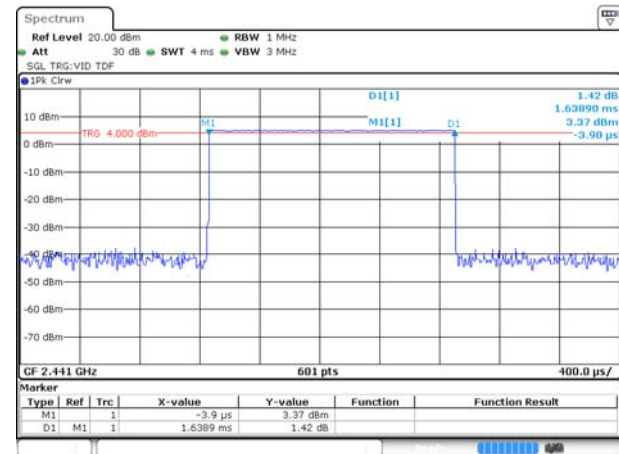


Date: 15 DEC 2018 16:17:16

GFSK DH5

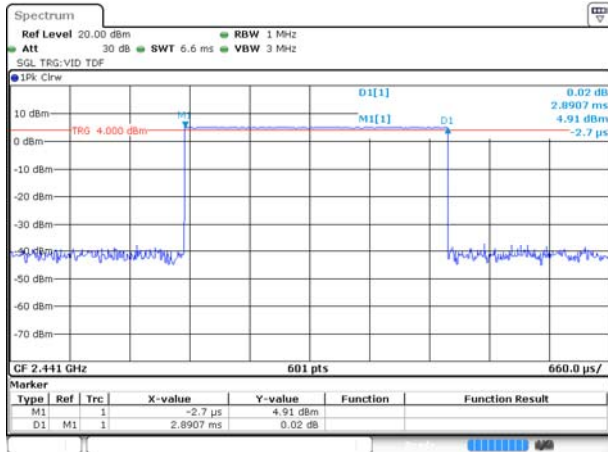


Date: 15 DEC 2016 16:18:17

8-DPSK DH1

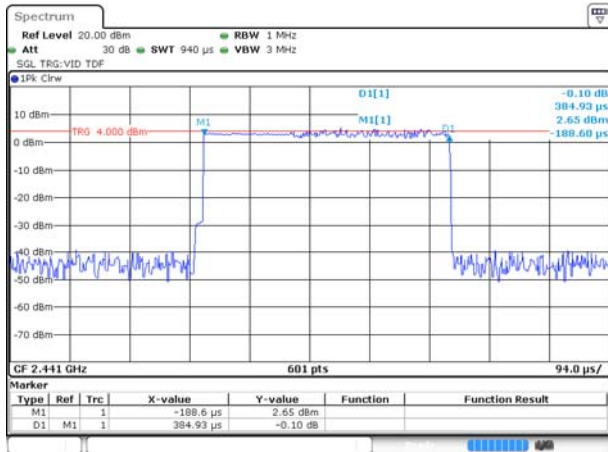


Date: 15 DEC 2016 16:23:33

8-DPSK DH3

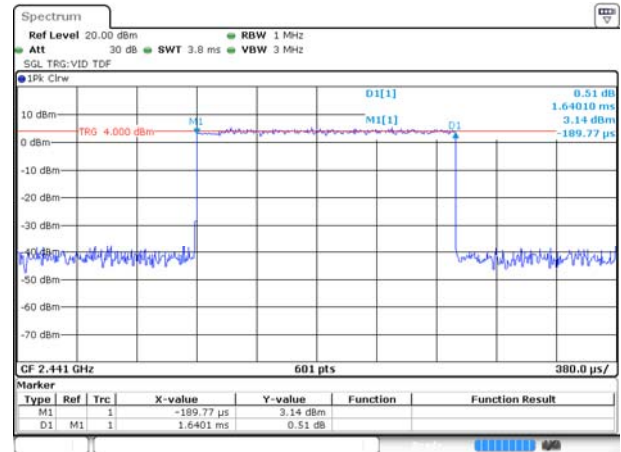


Date: 15 DEC 2016 16:24:19

8-DPSK DH5

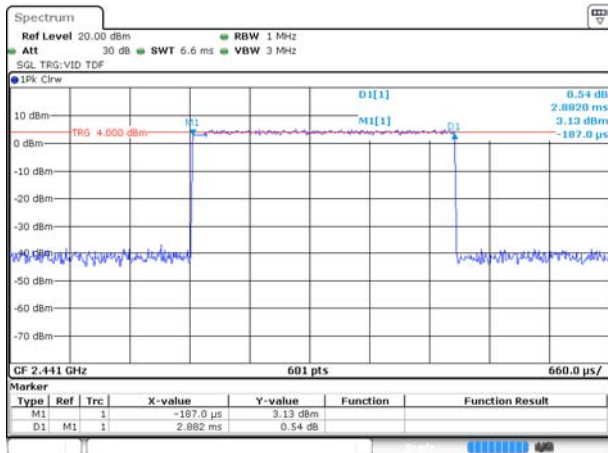


Date: 15 DEC 2016 16:25:05

AFH Mode DH1

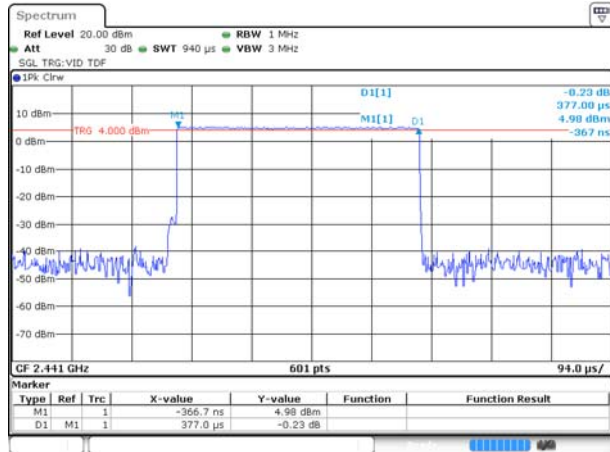


Date: 15 DEC 2016 16:19:36

AFH Mode DH3

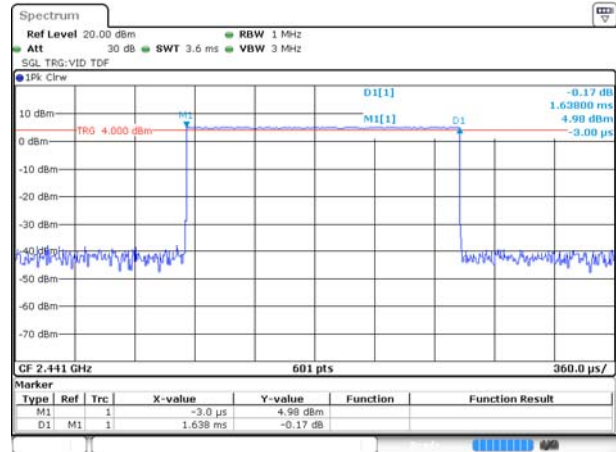

Date: 15 DEC 2016 16:20:31

AFH Mode DH5

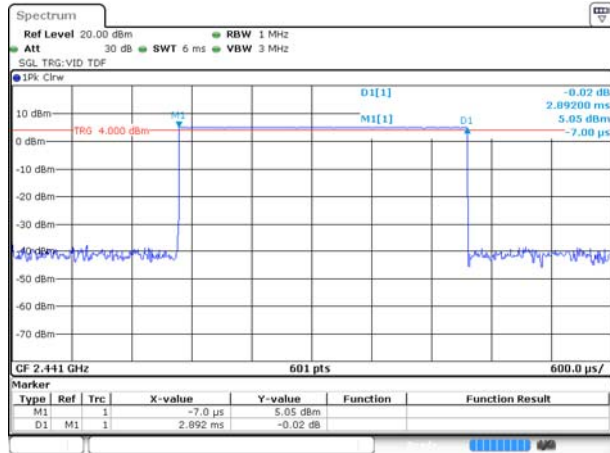

Date: 15 DEC 2016 16:21:33


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-42.17	2.66	-17.34	Pass
Middle	-41.95	4.70	-15.30	Pass
High	-42.02	1.53	-18.47	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.53	0.85	-19.15	Pass
Middle	-41.70	3.02	-16.98	Pass
High	-40.99	-0.07	-20.07	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-41.61	4.78	-15.22	Pass
8-DPSK	-42.21	3.07	-16.93	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

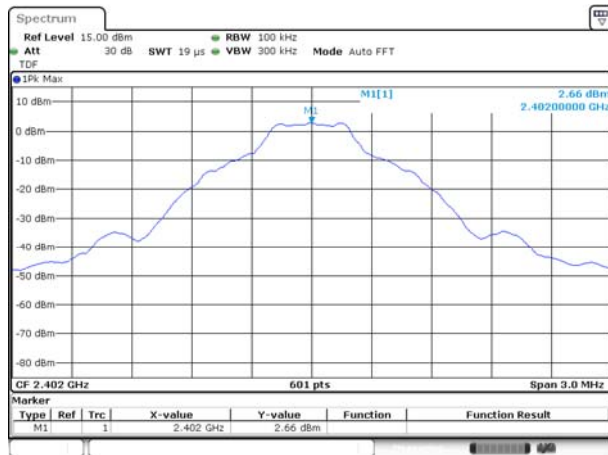


Date: 14 DEC 2016 10:34:23

GFSK LOW CHANNEL, BAND EDGE

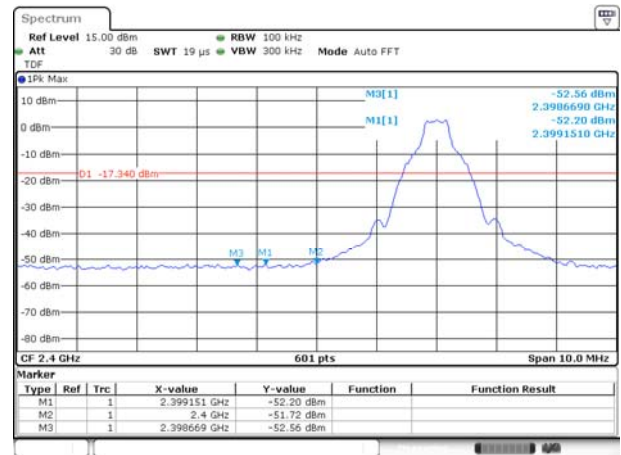


Date: 14 DEC 2016 10:39:04

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

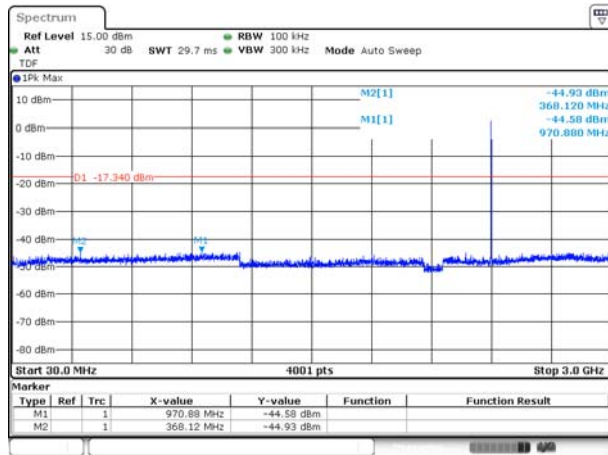


Date: 14 DEC 2016 10:37:39

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

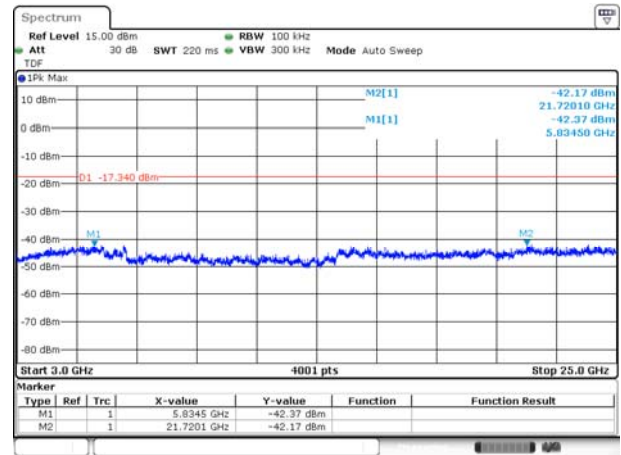


Date: 14 DEC 2016 10:38:02

GFSK MIDDLE CHANNEL, CARRIER LEVEL

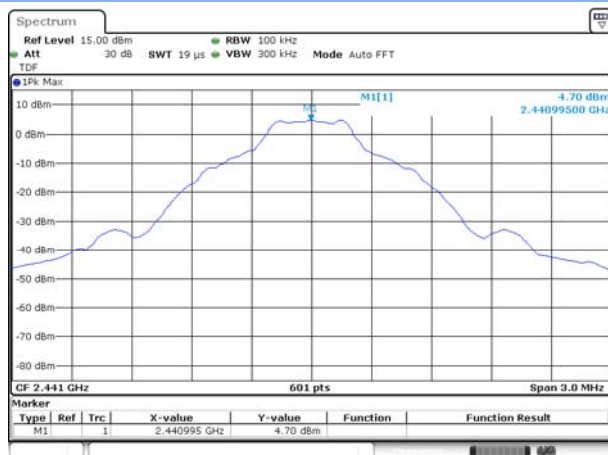


Date: 14 DEC 2016 10:41:59

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

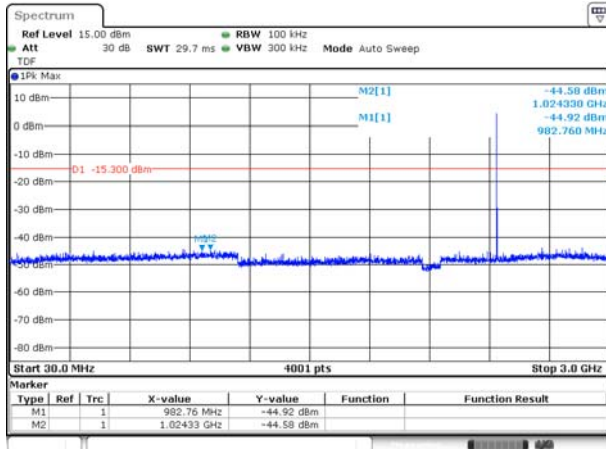


Date: 14 DEC 2016 10:42:38

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

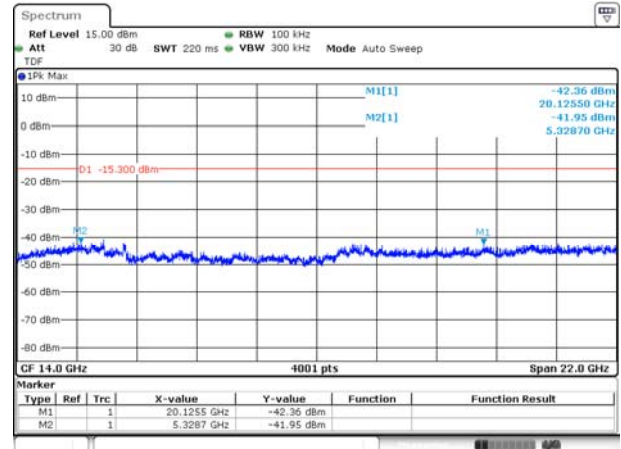


Date: 14 DEC 2016 10:42:54

GFSK HIGH CHANNEL, CARRIER LEVEL

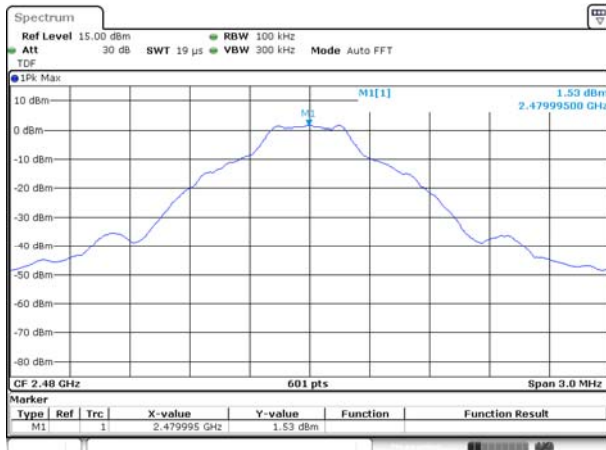


Date: 14 DEC 2016 10:46:55

GFSK HIGH CHANNEL , BAND EDGE

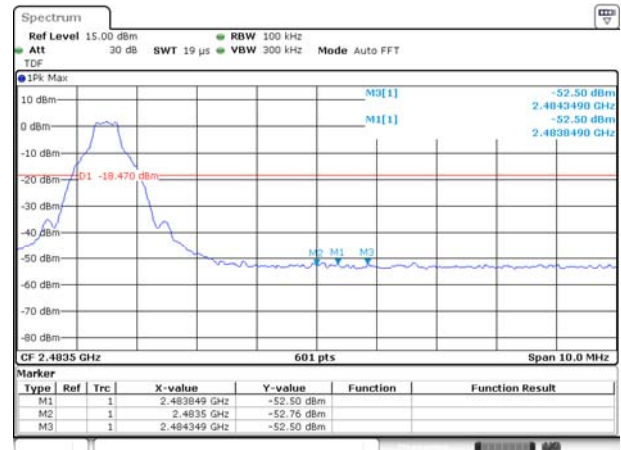


Date: 14 DEC 2016 10:48:34

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

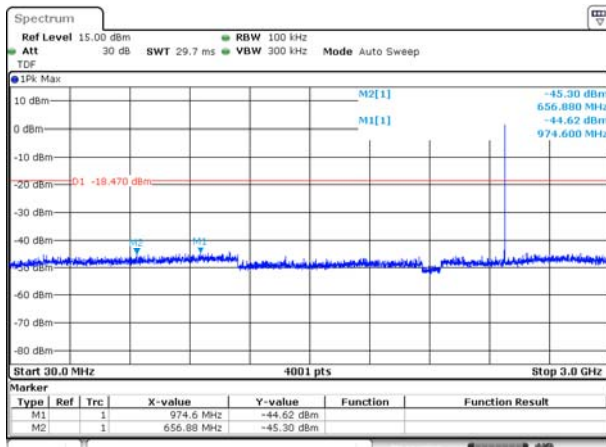


Date: 14 DEC 2016 10:47:29

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

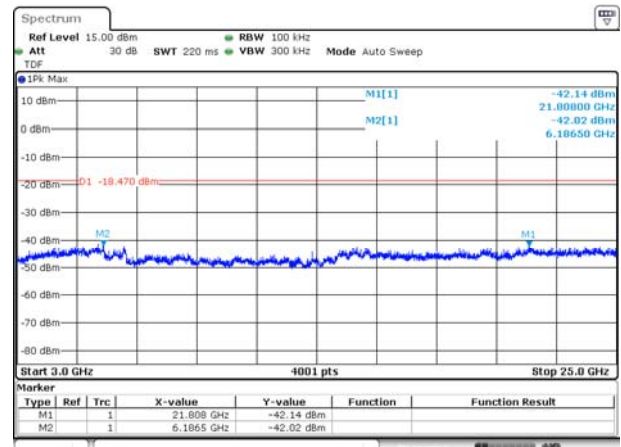


Date: 14 DEC 2016 10:47:49

8-DPSK LOW CHANNEL, CARRIER LEVEL

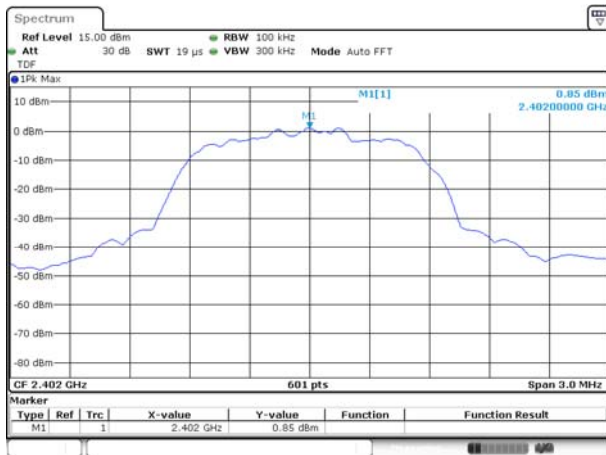


Date: 15 DEC 2016 15:35:26

8-DPSK LOW CHANNEL, BAND EDGE

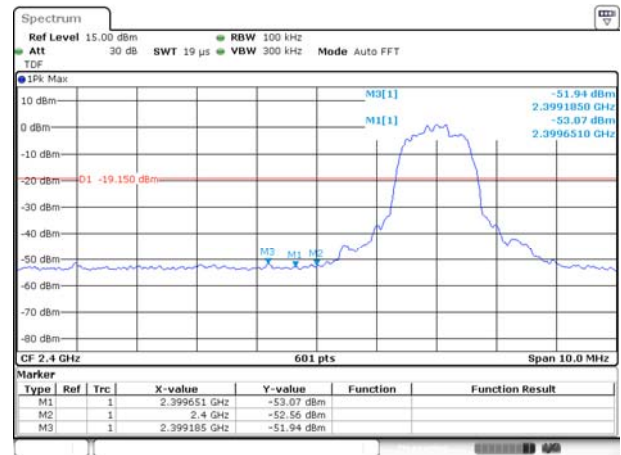


Date: 15 DEC 2016 15:37:22

8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

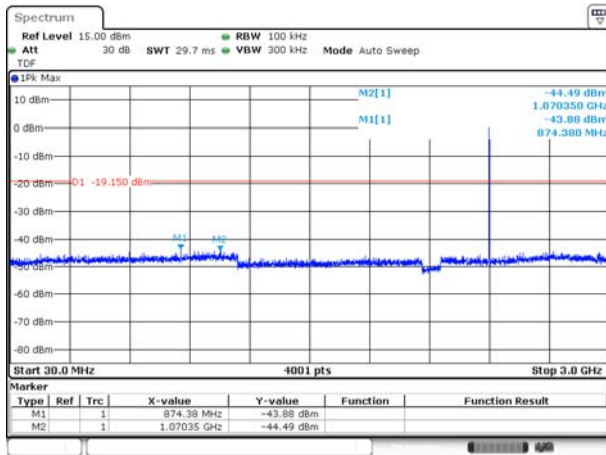


Date: 15 DEC 2016 15:36:22

8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

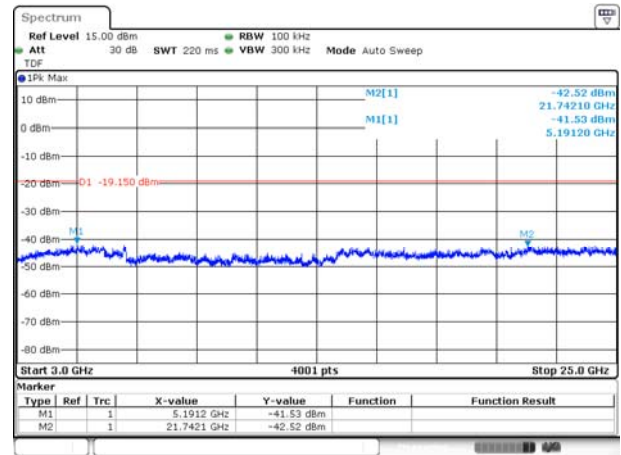


Date: 15 DEC 2016 15:36:45

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

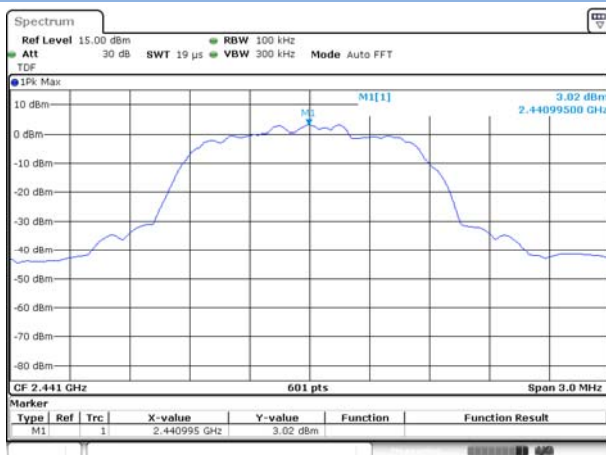


Date: 15 DEC 2016 15:40:33

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

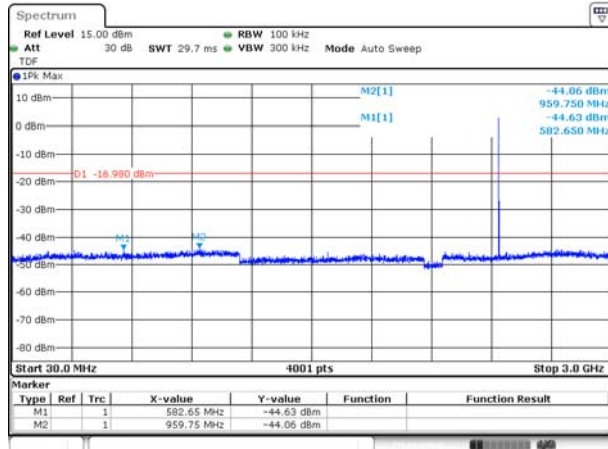


Date: 15 DEC 2016 15:42:33

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

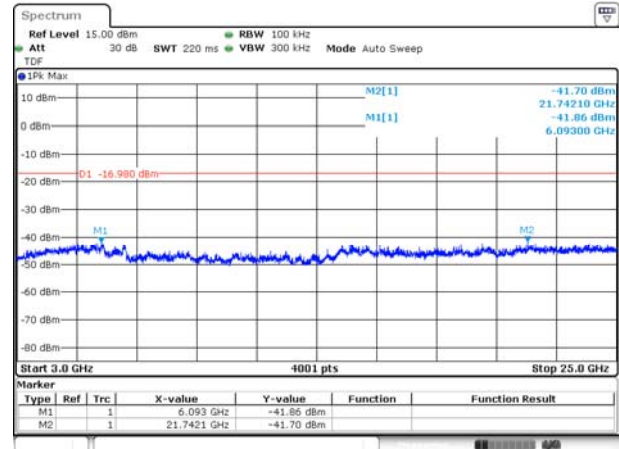


Date: 15 DEC 2016 15:42:51

8-DPSK HIGH CHANNEL , CARRIER LEVEL

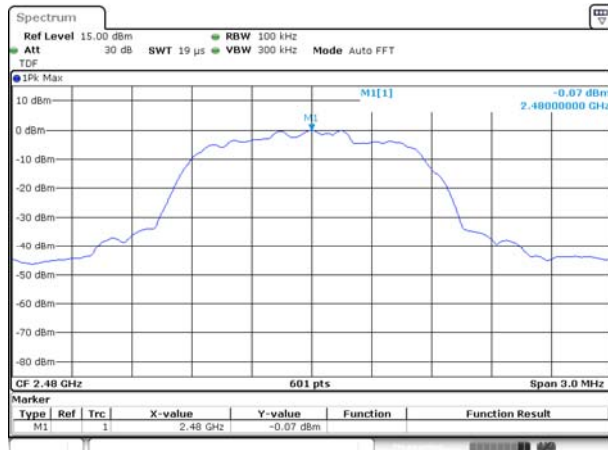


Date: 15 DEC 2016 15:52:55

8-DPSK HIGH CHANNEL , BAND EDGE

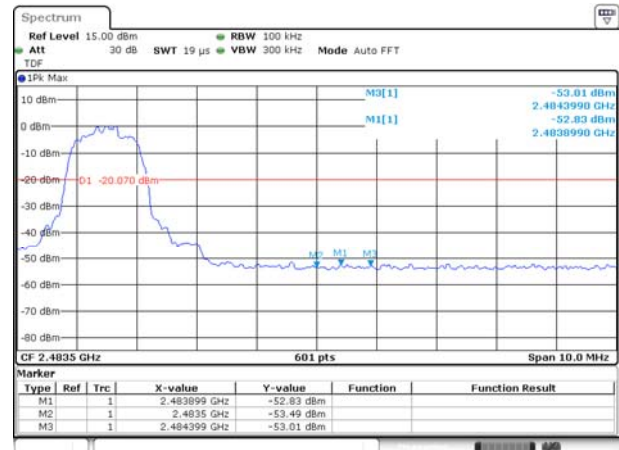


Date: 15 DEC 2016 15:54:30

8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

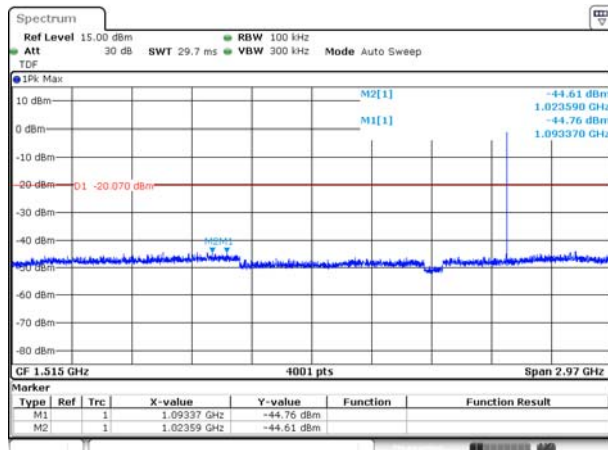


Date: 15 DEC 2016 15:53:37

8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

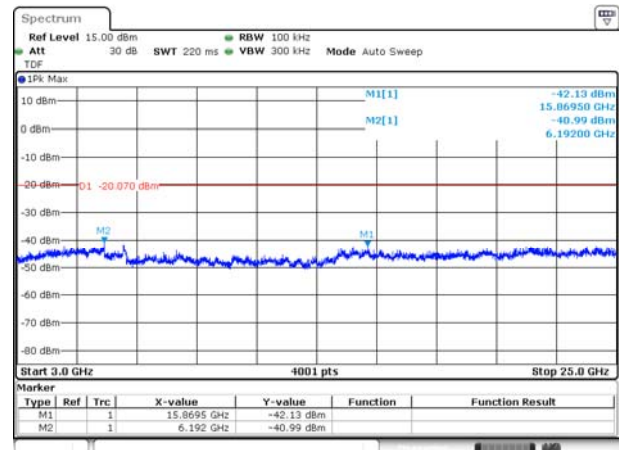


Date: 15 DEC 2016 15:54:01

GFSK HOPPING, CARRIER LEVEL

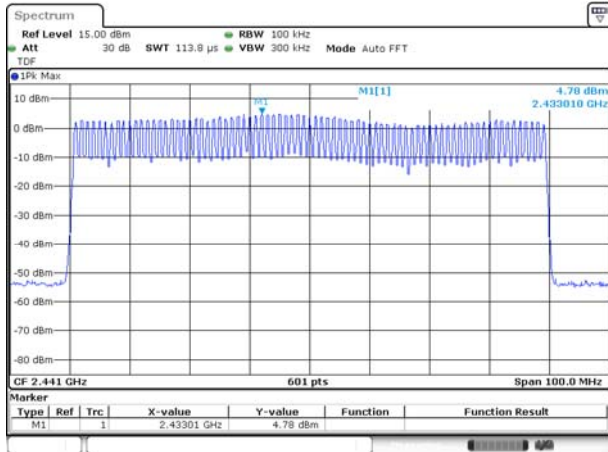


Date: 15 DEC 2018 16:00:18

GFSK HOPPING BAND EDGE (LOW)

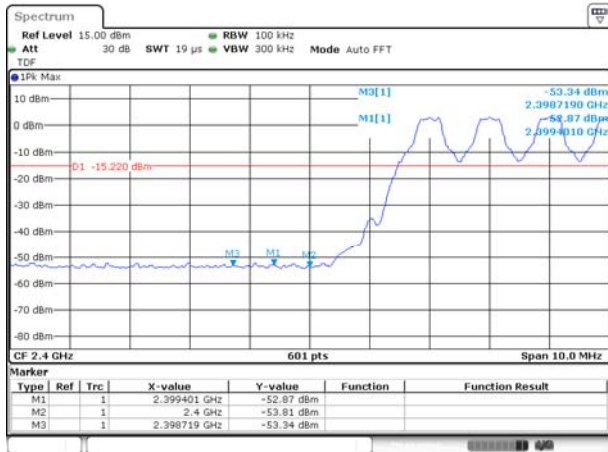


Date: 15 DEC 2018 16:03:16

GFSK HOPPING BAND EDGE (HIGH)

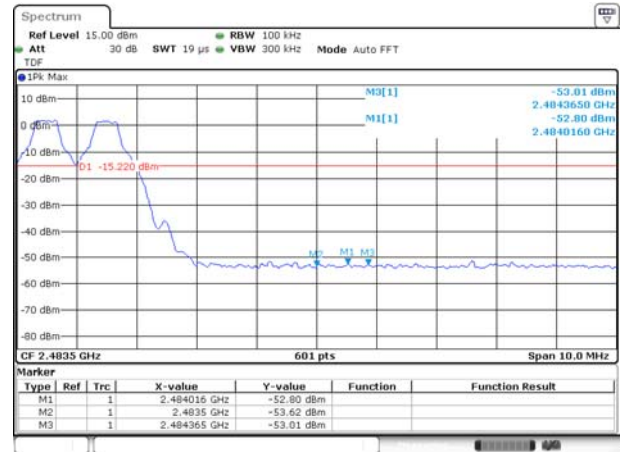


Date: 15 DEC 2018 16:03:49

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

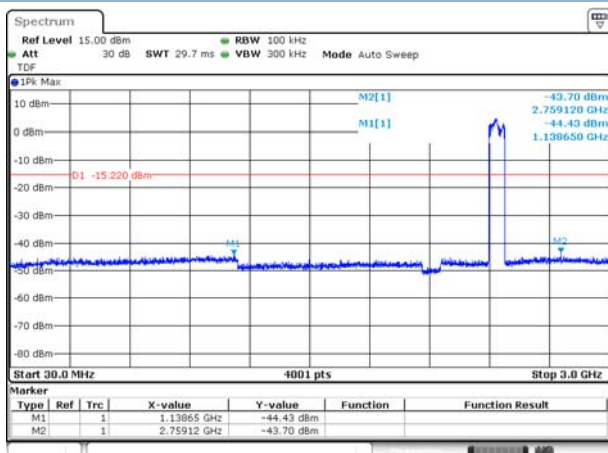


Date: 15 DEC 2018 16:02:14

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

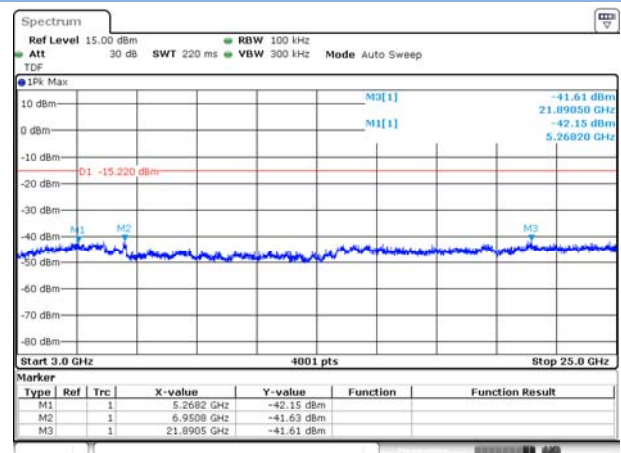


Date: 15 DEC 2018 16:02:36

8-DPSK HOPPING, CARRIER LEVEL

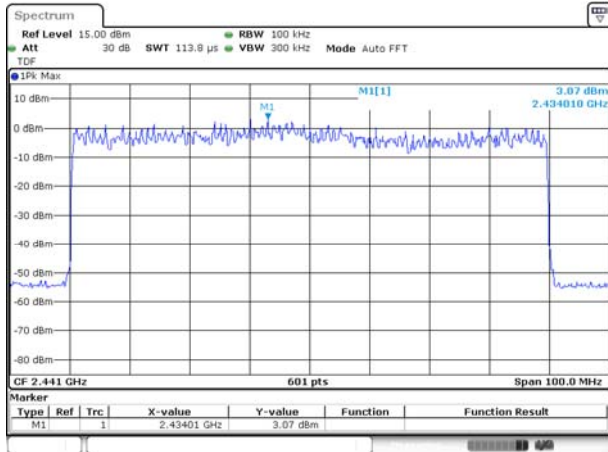


Date: 15 DEC 2018 16:10:46

8-DPSK Hopping BAND EDGE (LOW)

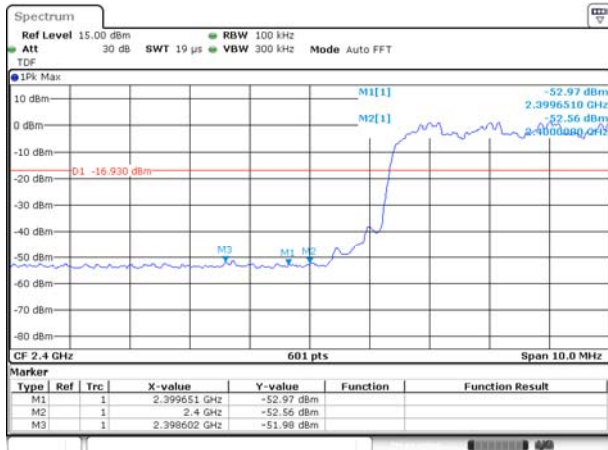


Date: 15 DEC 2018 16:13:15

8-DPSK Hopping BAND EDGE (HIGH)

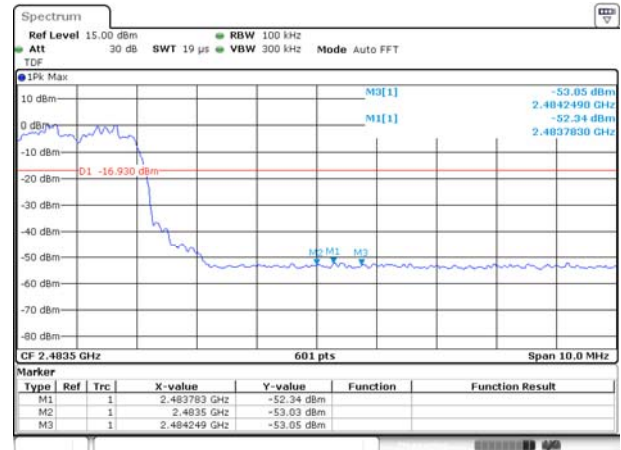


Date: 15 DEC 2018 16:13:43

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

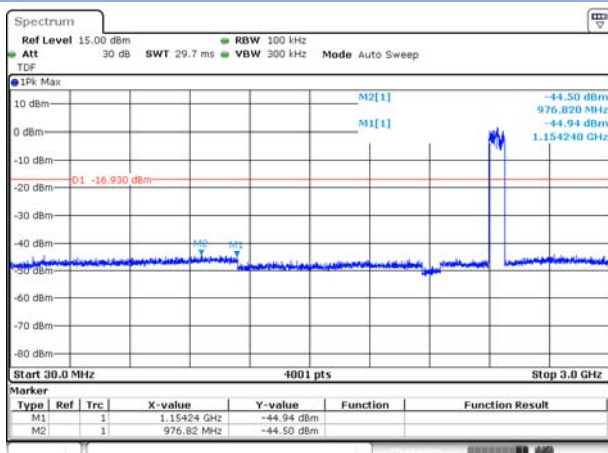

Date: 15 DEC 2018 16:12:08

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

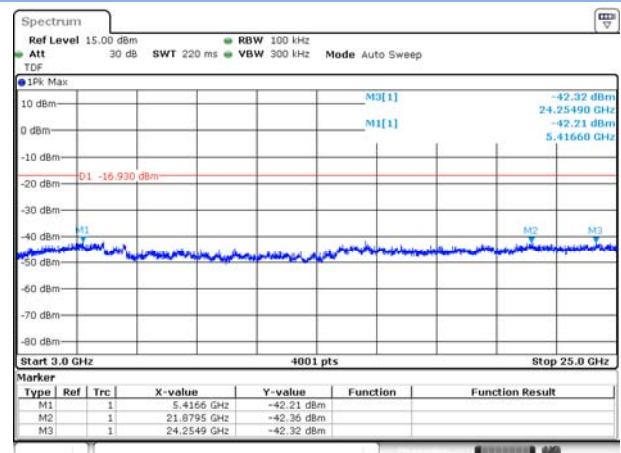

Date: 15 DEC 2018 16:12:28

A.7 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CEmission Test case_FCC_CE_FCC PART 15B_Class B

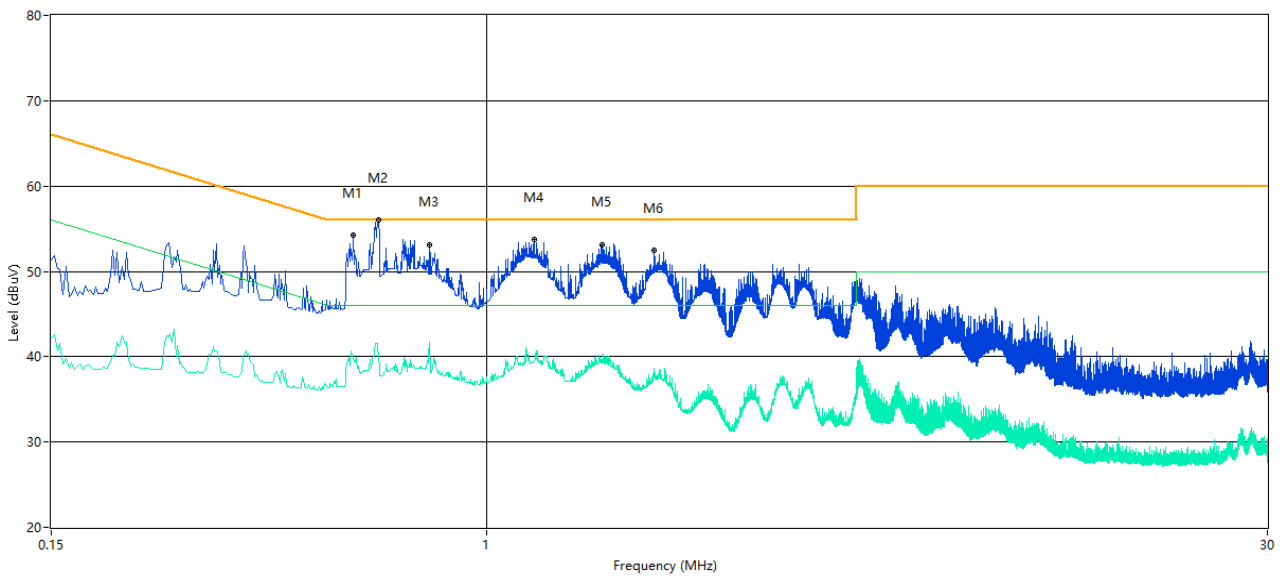

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.560	52.75	47.96	37.49	10.54	56.0	46.0	8.04	L Line	Pass
0.624	55.04	51.51	36.72	10.53	56.0	46.0	4.49	L Line	Pass
0.778	51.82	45.42	33.89	10.54	56.0	46.0	10.58	L Line	Pass
1.228	51.79	46.44	33.51	10.55	56.0	46.0	9.56	L Line	Pass
1.652	52.12	47.22	35.44	10.55	56.0	46.0	8.78	L Line	Pass
2.076	50.92	46.10	35.38	10.55	56.0	46.0	9.90	L Line	Pass

PHASE N

Emission Test case_FCC_CE_FCC PART 15B_Class B

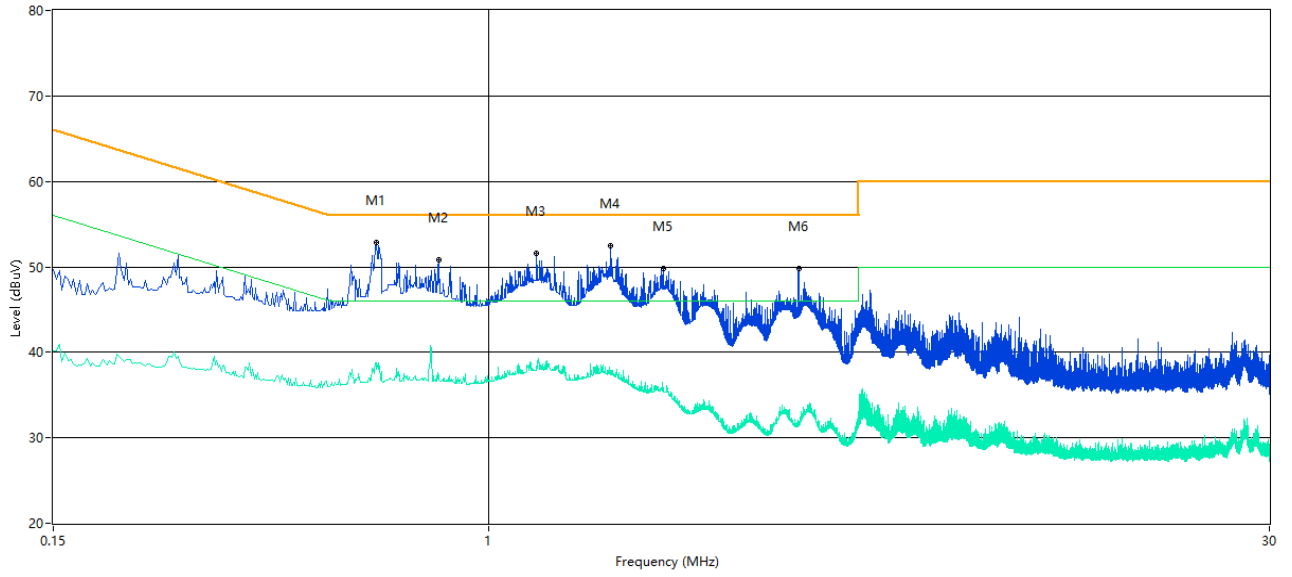

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.614	51.34	48.33	32.96	10.53	56.0	46.0	7.67	N Line	Pass
0.804	47.71	43.89	27.98	10.54	56.0	46.0	12.11	N Line	Pass
1.230	48.77	43.35	28.57	10.55	56.0	46.0	12.65	N Line	Pass
1.700	47.66	43.67	29.84	10.55	56.0	46.0	12.33	N Line	Pass
2.138	46.93	42.45	30.06	10.55	56.0	46.0	13.55	N Line	Pass
3.866	49.03	39.08	27.38	10.58	56.0	46.0	16.92	N Line	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The EUT is working in the Normal link mode below 1 GHz.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

GFSK 30 MHz to 1 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

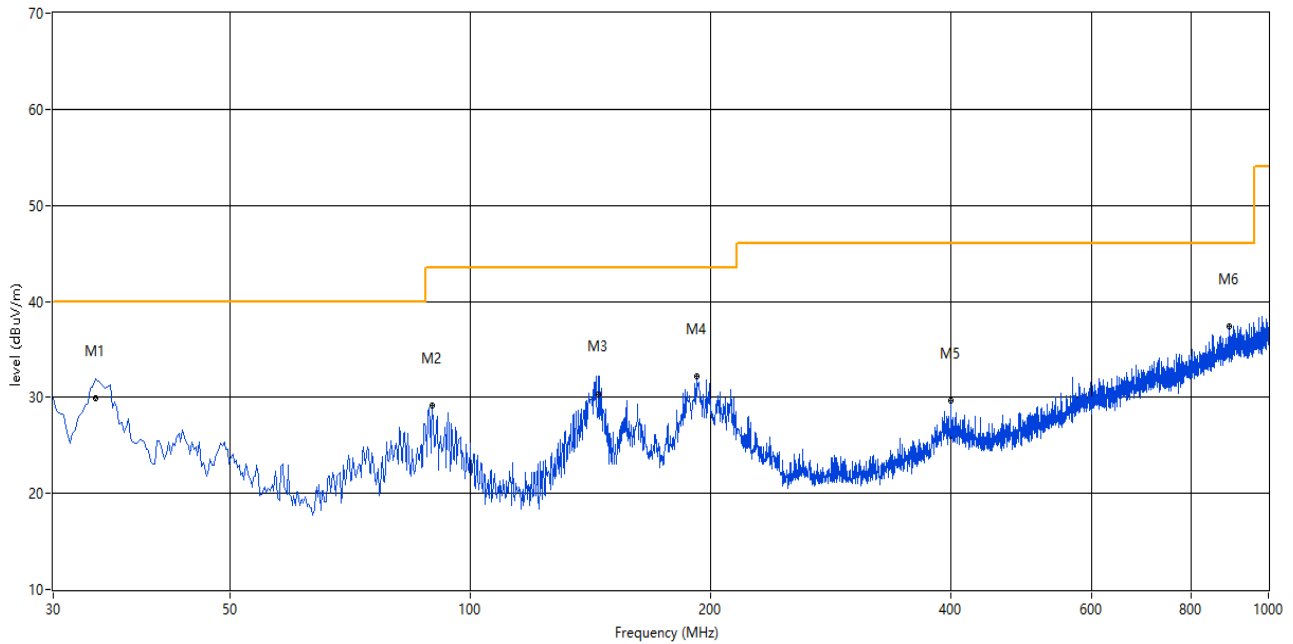

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
33.879	31.91	29.88	--	-28.56	--	40.0	--	10.12	26.60	150	Vertical	Pass
89.640	29.12	--	--	-30.47	--	43.5	--	14.38	239.40	150	Vertical	Pass
144.674	32.23	30.29	--	-32.05	--	43.5	--	13.21	64.20	150	Vertical	Pass
191.950	32.25	--	--	-29.37	--	43.5	--	11.25	298.50	150	Vertical	Pass
400.447	29.71	--	--	-24.16	--	46.0	--	16.29	48.10	150	Vertical	Pass
893.084	37.39	--	--	-13.57	--	46.0	--	8.61	207.30	150	Vertical	Pass

GFSK 30 MHz to 1 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

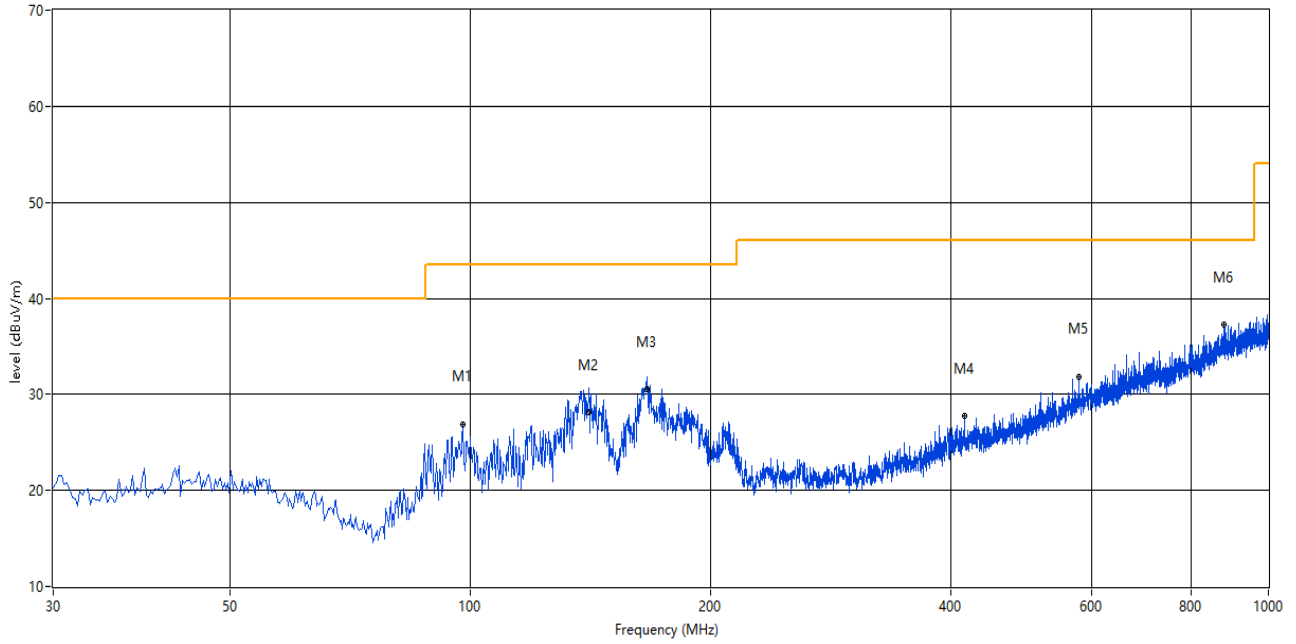

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
97.883	26.83	--	--	-29.01	--	43.5	--	16.67	171.30	150	Horizontal	Pass
140.795	30.69	28.19	--	-32.08	--	43.5	--	15.31	28.90	150	Horizontal	Pass
166.493	31.77	30.61	--	-31.28	--	43.5	--	12.89	18.10	150	Horizontal	Pass
415.721	27.81	--	--	-23.58	--	46.0	--	18.19	10.10	150	Horizontal	Pass
578.398	31.83	--	--	-19.76	--	46.0	--	14.17	327.70	150	Horizontal	Pass
879.750	37.24	--	--	-13.88	--	46.0	--	8.76	306.20	150	Horizontal	Pass

8-DPSK 30 MHz to 1 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

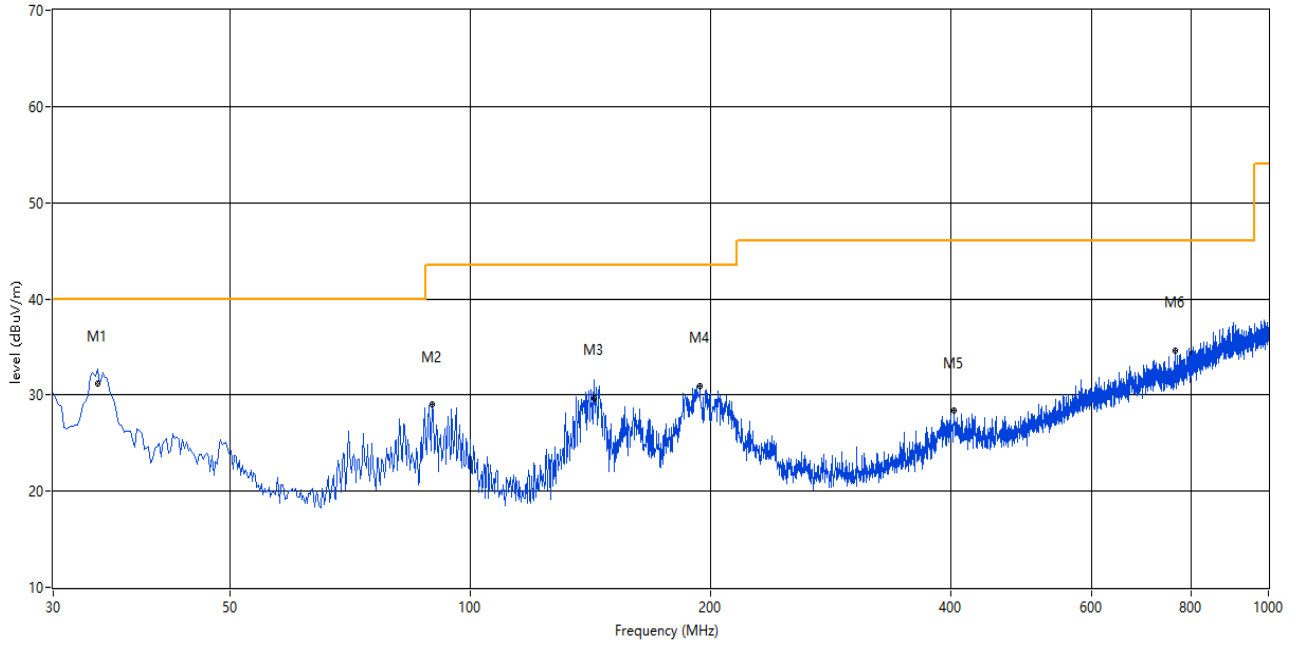

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
34.121	32.71	31.14	--	-28.53	--	40.0	--	8.86	29.00	150	Vertical	Pass
89.640	28.97	--	--	-30.47	--	43.5	--	14.53	155.50	150	Vertical	Pass
142.734	31.58	29.67	--	-32.07	--	43.5	--	13.83	74.70	150	Vertical	Pass
193.889	30.96	--	--	-29.19	--	43.5	--	12.54	301.00	150	Vertical	Pass
403.114	28.40	--	--	-24.06	--	46.0	--	17.60	61.30	150	Vertical	Pass
763.864	34.57	--	--	-16.35	--	46.0	--	11.43	247.10	150	Vertical	Pass

8-DPSK 30 MHz to 1 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

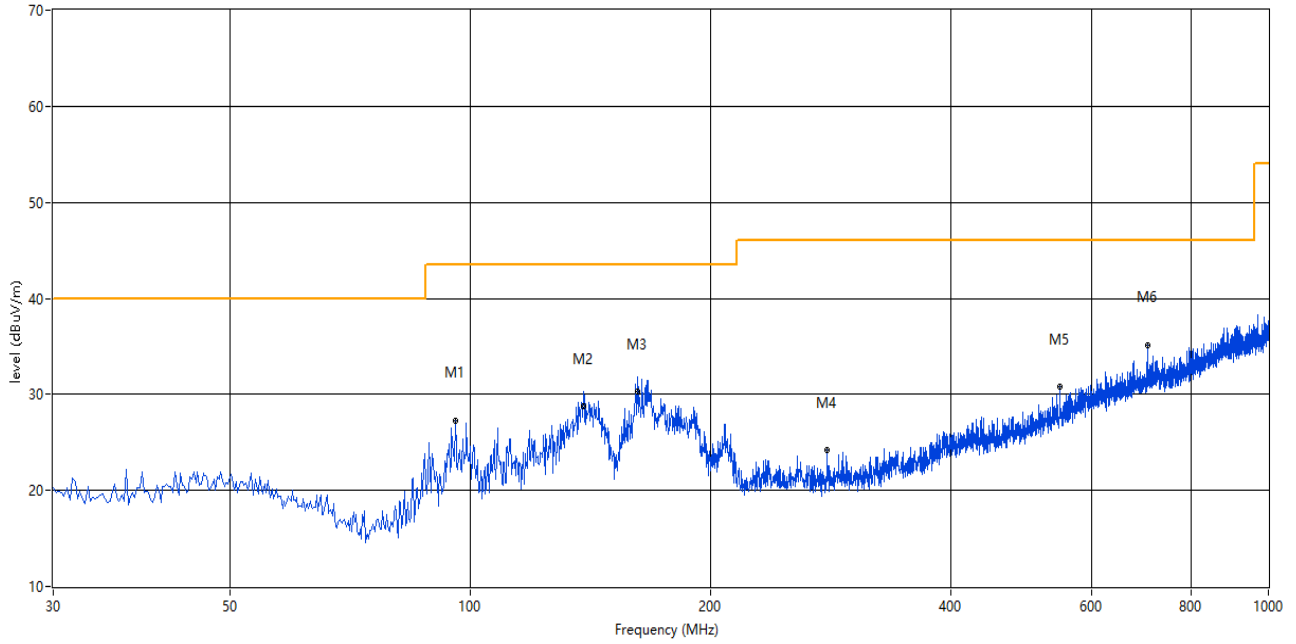

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
95.701	27.20	--	--	-29.34	--	43.5	--	16.30	354.60	150	Horizontal	Pass
138.613	30.29	28.74	--	-32.04	--	43.5	--	14.76	28.40	150	Horizontal	Pass
162.129	31.83	30.27	--	-31.45	--	43.5	--	13.23	356.90	150	Horizontal	Pass
280.197	24.21	--	--	-26.76	--	46.0	--	21.79	233.30	150	Horizontal	Pass
547.608	30.76	--	--	-20.63	--	46.0	--	15.24	66.50	150	Horizontal	Pass
704.951	35.18	--	--	-17.34	--	46.0	--	10.82	284.40	150	Horizontal	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

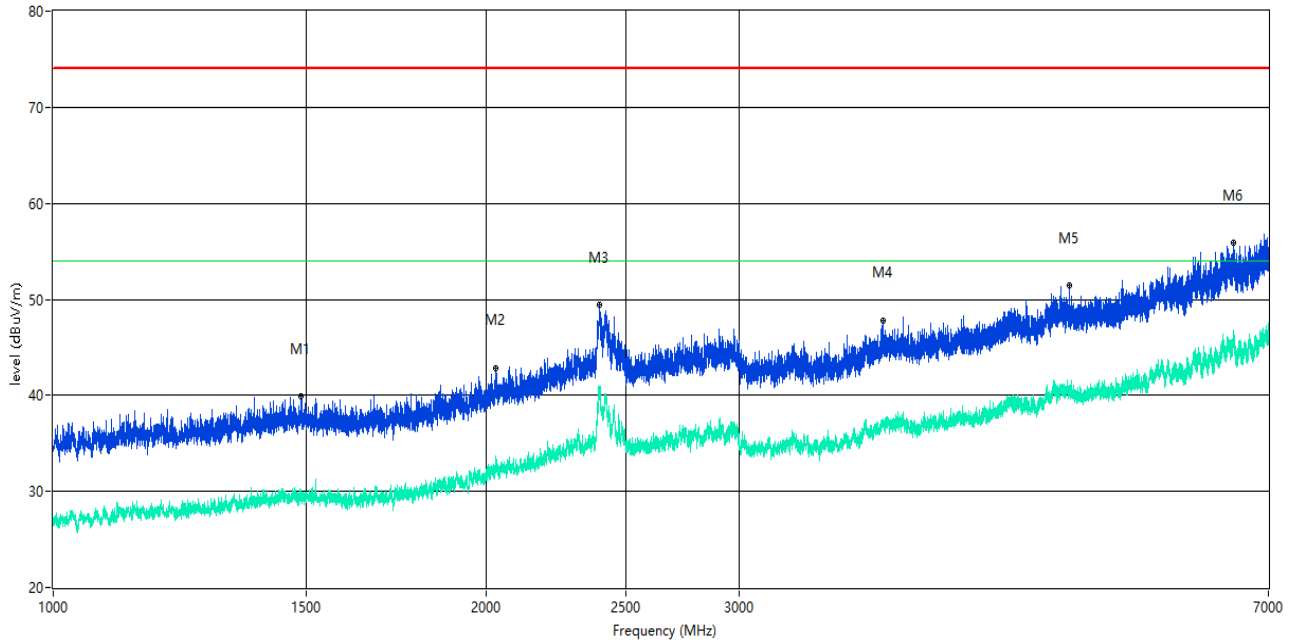

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1485.689	39.93	--	29.9	-11.51	74.0	--	54.0	24.10	38.00	150	Vertical	Pass
2031.871	42.86	--	33.1	-7.85	74.0	--	54.0	20.90	96.00	150	Vertical	Pass
2397.325	49.49	--	40.6	-0.01	74.0	--	54.0	13.40	304.00	150	Vertical	Pass
3774.278	47.73	--	37.2	-2.50	74.0	--	54.0	16.80	52.00	150	Vertical	Pass
5089.239	51.43	--	40.7	1.70	74.0	--	54.0	13.30	118.00	150	Vertical	Pass
6623.922	55.85	--	45.8	7.69	74.0	--	54.0	8.20	216.00	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

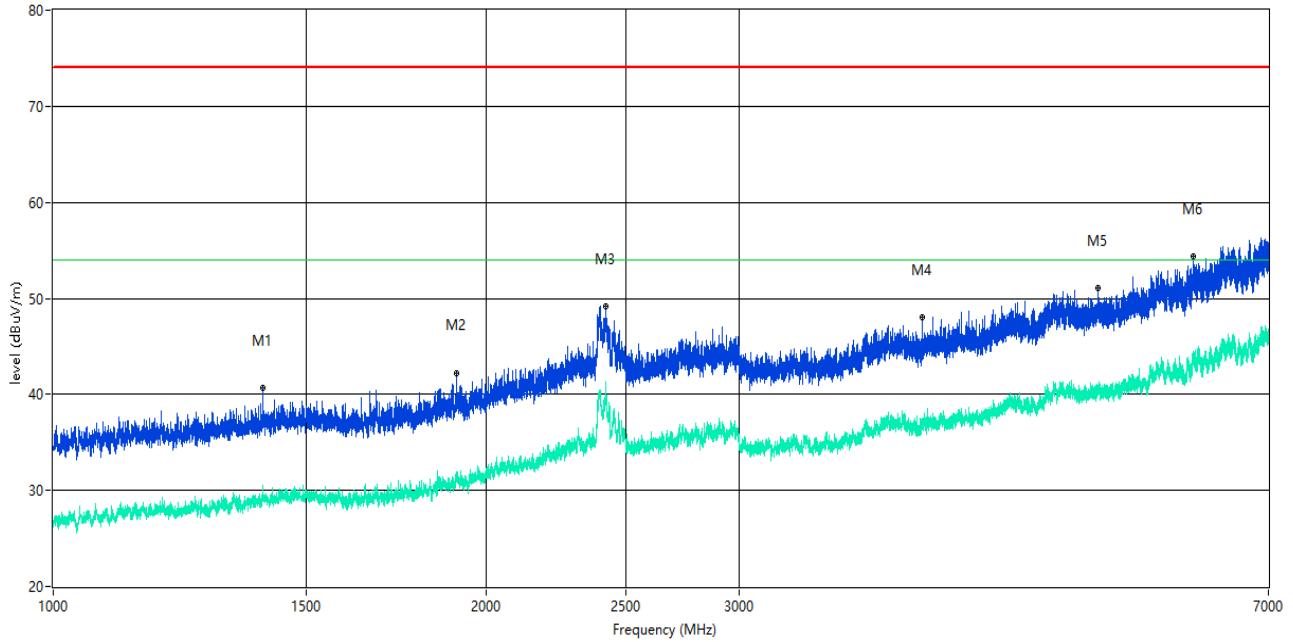

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1399.450	40.63	--	30.0	-11.80	74.0	--	54.0	24.00	127.00	150	Horizontal	Pass
1906.387	42.14	--	31.8	-9.18	74.0	--	54.0	22.20	189.00	150	Horizontal	Pass
2422.822	49.19	--	39.2	-0.85	74.0	--	54.0	14.80	177.00	150	Horizontal	Pass
4022.497	48.02	--	37.5	-2.66	74.0	--	54.0	16.50	37.00	150	Horizontal	Pass
5331.459	51.09	--	40.8	1.38	74.0	--	54.0	13.20	6.00	150	Horizontal	Pass
6206.974	54.35	--	43.8	5.59	74.0	--	54.0	10.20	24.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

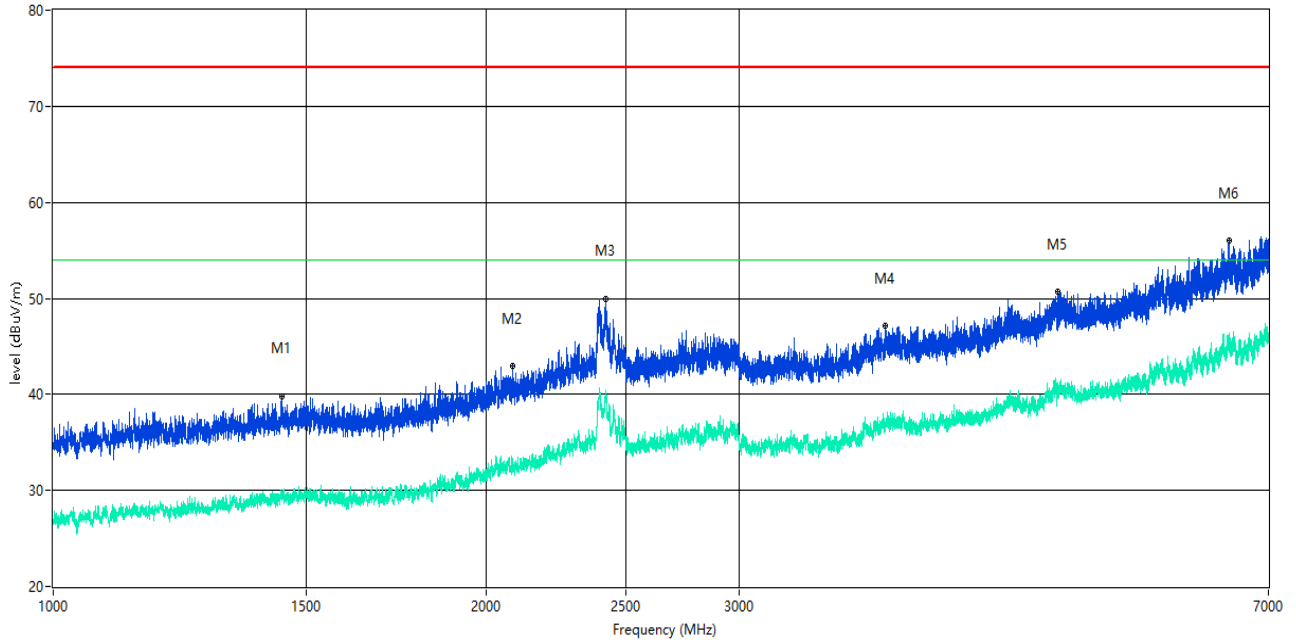

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1442.945	39.81	--	29.9	-11.45	74.0	--	54.0	24.10	283.00	150	Vertical	Pass
2088.114	42.94	--	32.6	-7.66	74.0	--	54.0	21.40	99.00	150	Vertical	Pass
2424.322	49.88	--	40.0	-0.92	74.0	--	54.0	14.00	337.00	150	Vertical	Pass
3787.777	47.12	--	36.8	-2.96	74.0	--	54.0	17.20	342.00	150	Vertical	Pass
4995.126	50.69	--	40.1	0.78	74.0	--	54.0	13.90	164.00	150	Vertical	Pass
6569.429	55.98	--	45.1	7.76	74.0	--	54.0	8.90	192.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

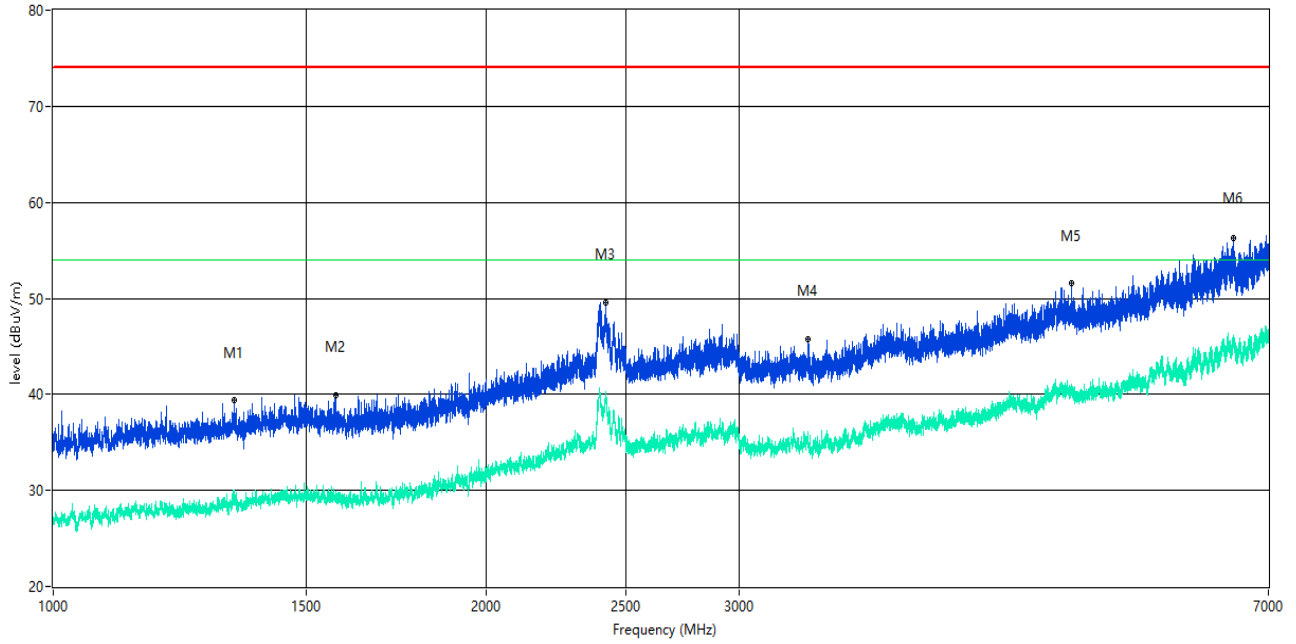

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1336.708	39.35	--	30.0	-11.74	74.0	--	54.0	24.00	217.00	150	Horizontal	Pass
1572.928	39.95	--	29.9	-11.87	74.0	--	54.0	24.10	220.00	150	Horizontal	Pass
2420.822	49.51	--	39.8	-0.79	74.0	--	54.0	14.20	102.00	150	Horizontal	Pass
3346.457	45.74	--	35.9	-4.93	74.0	--	54.0	18.10	206.00	150	Horizontal	Pass
5104.237	51.64	--	41.0	1.53	74.0	--	54.0	13.00	190.00	150	Horizontal	Pass
6618.798	56.30	--	45.6	8.01	74.0	--	54.0	8.40	259.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

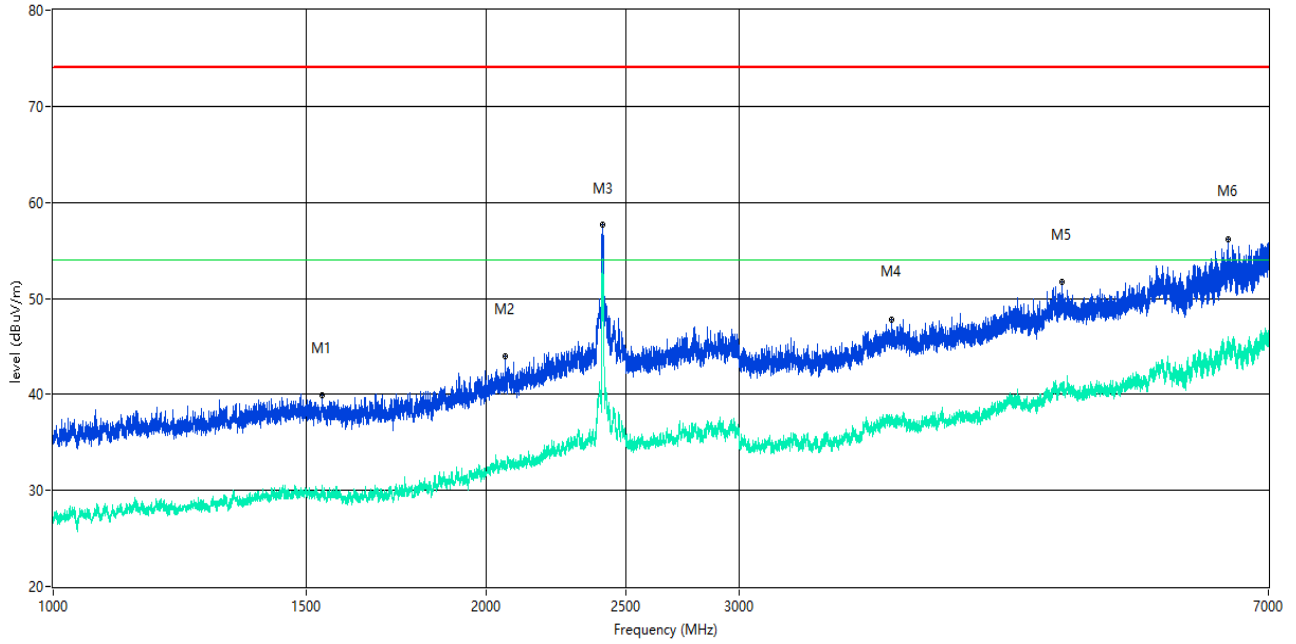

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1537.683	39.90	--	29.4	-11.74	74.0	--	54.0	24.60	20.00	150	Vertical	Pass
2063.617	43.98	--	32.4	-8.41	74.0	--	54.0	21.60	335.00	150	Vertical	Pass
2480.074	57.72	--	54.1	-0.35	74.0	--	54.0	-0.10	328.00	150	Vertical	N.A
3827.522	47.76	--	37.9	-2.90	74.0	--	54.0	16.10	319.00	150	Vertical	Pass
5027.747	51.72	--	40.9	0.84	74.0	--	54.0	13.10	171.00	150	Vertical	Pass
6564.054	56.19	--	45.4	8.39	74.0	--	54.0	8.60	289.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

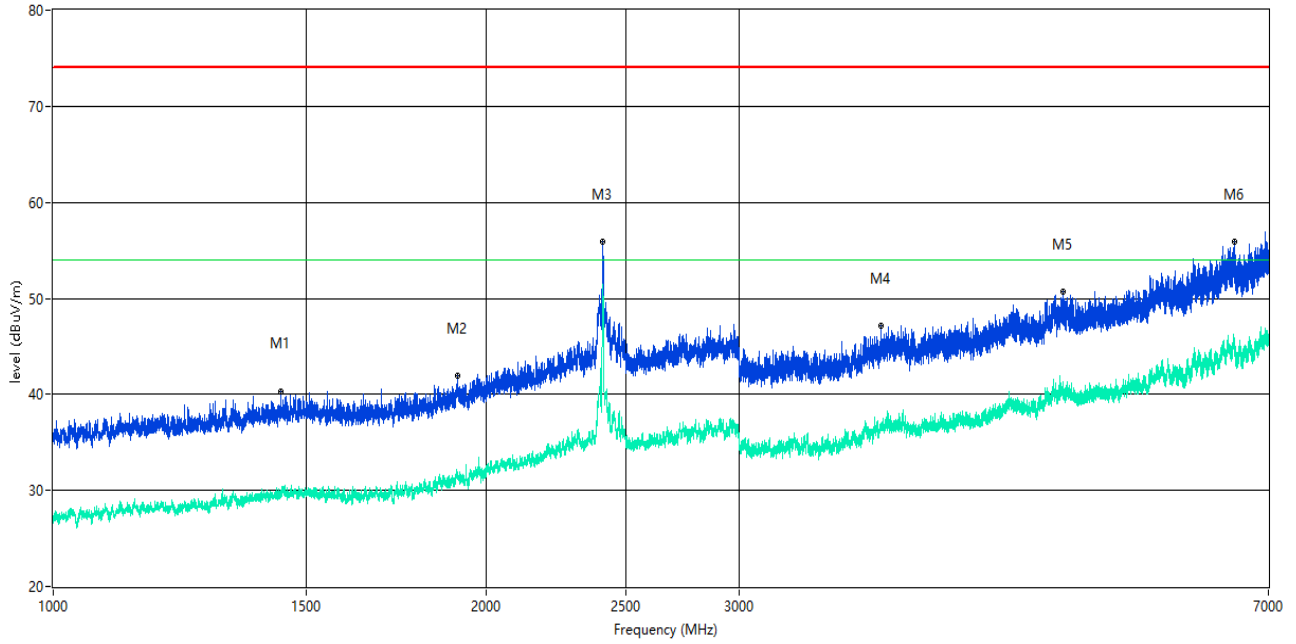

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1440.195	40.24	--	30.0	-11.65	74.0	--	54.0	24.00	290.00	150	Horizontal	Pass
1911.136	41.88	--	31.8	-9.11	74.0	--	54.0	22.20	319.00	150	Horizontal	Pass
2480.324	55.89	--	51.3	-0.42	74.0	--	54.0	2.70	178.90	150	Horizontal	N.A
3765.279	47.15	--	36.6	-3.01	74.0	--	54.0	17.40	85.00	150	Horizontal	Pass
5035.246	50.64	--	40.5	1.06	74.0	--	54.0	13.50	242.00	150	Horizontal	Pass
6625.422	55.90	--	45.6	7.73	74.0	--	54.0	8.40	2.00	150	Horizontal	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

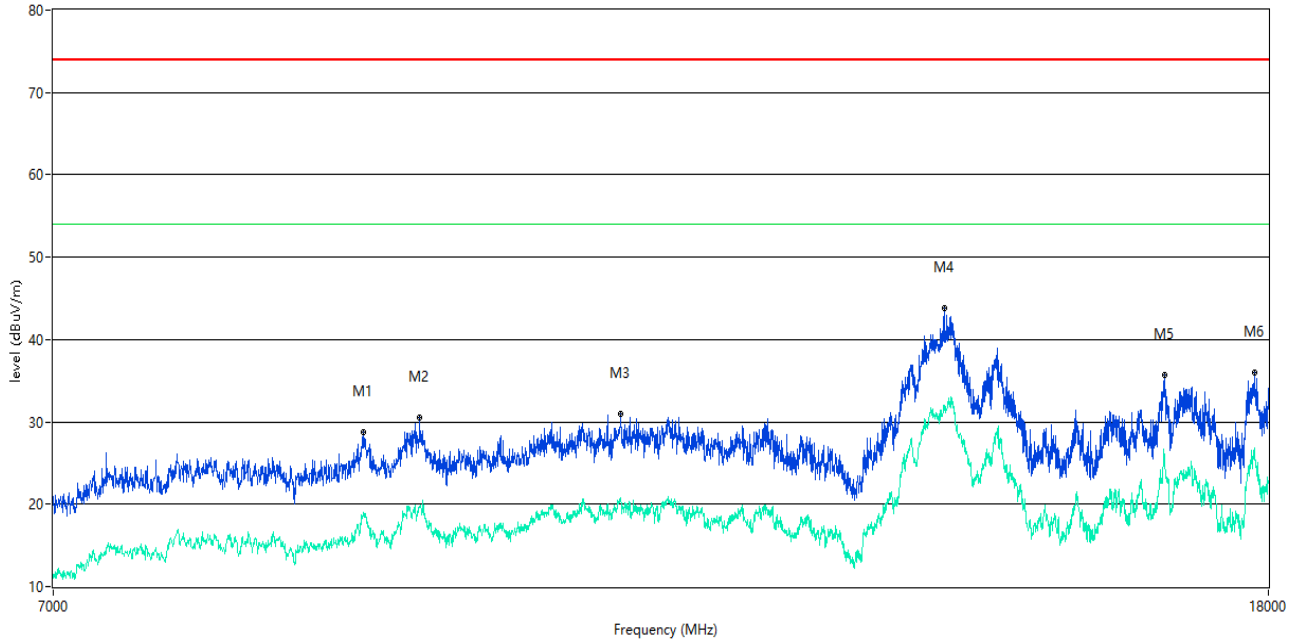

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8905.274	28.73	--	18.8	-32.43	74.0	--	54.0	35.20	161.00	150	Vertical	Pass
9306.673	30.54	--	19.6	-31.10	74.0	--	54.0	34.40	98.00	150	Vertical	Pass
10879.280	30.94	--	20.8	-25.20	74.0	--	54.0	33.20	233.00	150	Vertical	Pass
13988.753	43.75	--	32.1	-6.91	74.0	--	54.0	21.90	107.00	150	Vertical	Pass
16600.600	35.68	--	25.7	-10.26	74.0	--	54.0	28.30	238.00	150	Vertical	Pass
17807.548	36.03	--	26.8	-8.07	74.0	--	54.0	27.20	12.00	150	Vertical	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

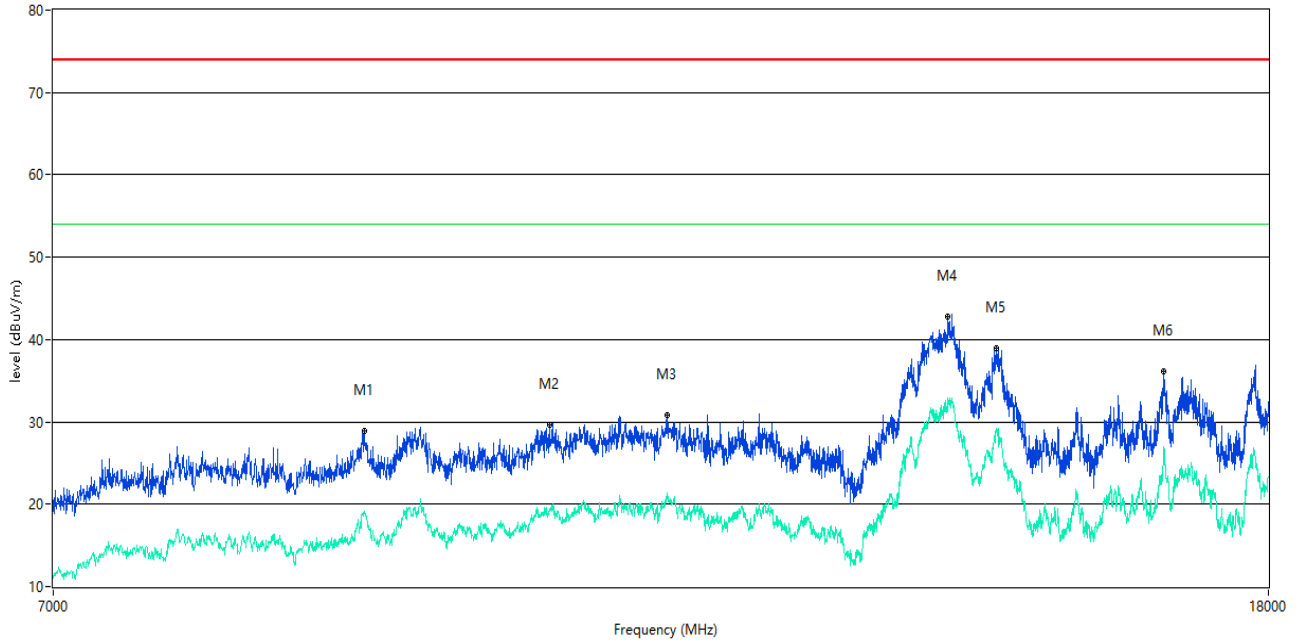

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8913.522	28.97	--	18.9	-32.36	74.0	--	54.0	35.10	307.00	150	Horizontal	Pass
10296.426	29.64	--	19.4	-27.54	74.0	--	54.0	34.60	149.00	150	Horizontal	Pass
11277.931	30.80	--	21.3	-24.69	74.0	--	54.0	32.70	103.00	150	Horizontal	Pass
14027.243	42.82	--	32.2	-6.83	74.0	--	54.0	21.80	189.00	150	Horizontal	Pass
14566.108	38.94	--	29.1	-11.10	74.0	--	54.0	24.90	1.00	150	Horizontal	Pass
16586.853	36.19	--	25.1	-10.77	74.0	--	54.0	28.90	313.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

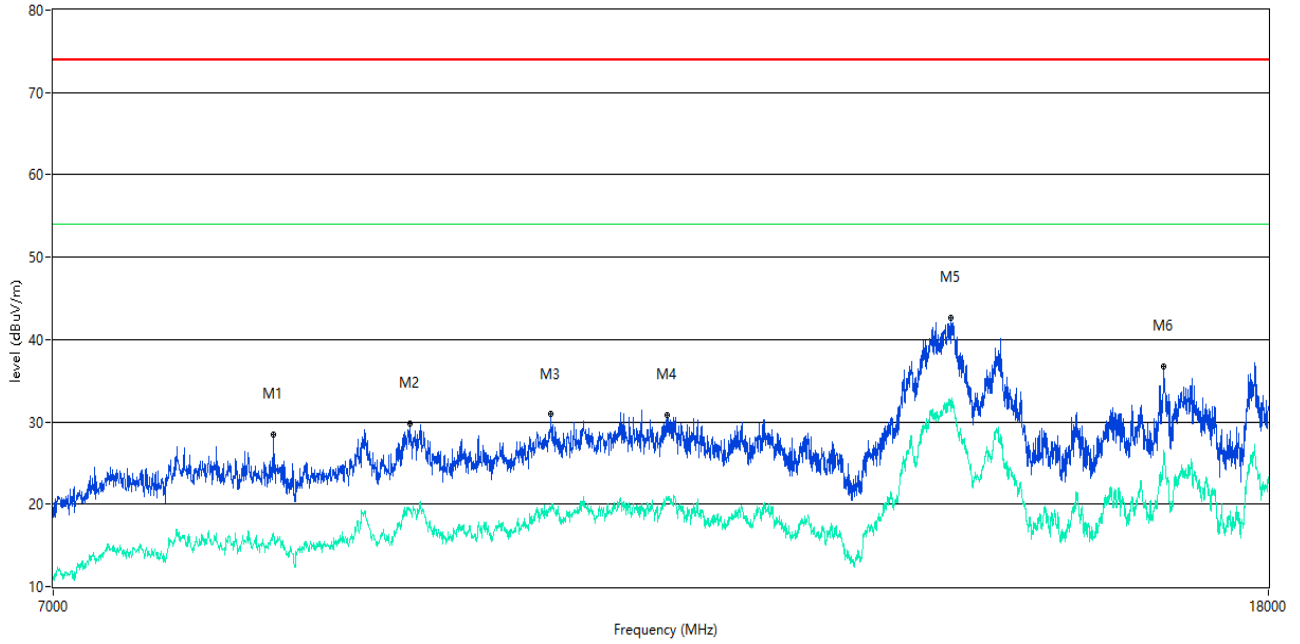

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8308.673	28.39	--	16.5	-35.47	74.0	--	54.0	37.50	58.00	150	Vertical	Pass
9235.191	29.75	--	19.5	-31.74	74.0	--	54.0	34.50	33.00	150	Vertical	Pass
10307.423	31.03	--	19.6	-27.93	74.0	--	54.0	34.40	27.00	150	Vertical	Pass
11280.680	30.76	--	20.5	-24.72	74.0	--	54.0	33.50	235.00	150	Vertical	Pass
14060.235	42.71	--	31.8	-6.35	74.0	--	54.0	22.20	207.00	150	Vertical	Pass
16597.851	36.74	--	26.5	-10.41	74.0	--	54.0	27.50	234.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

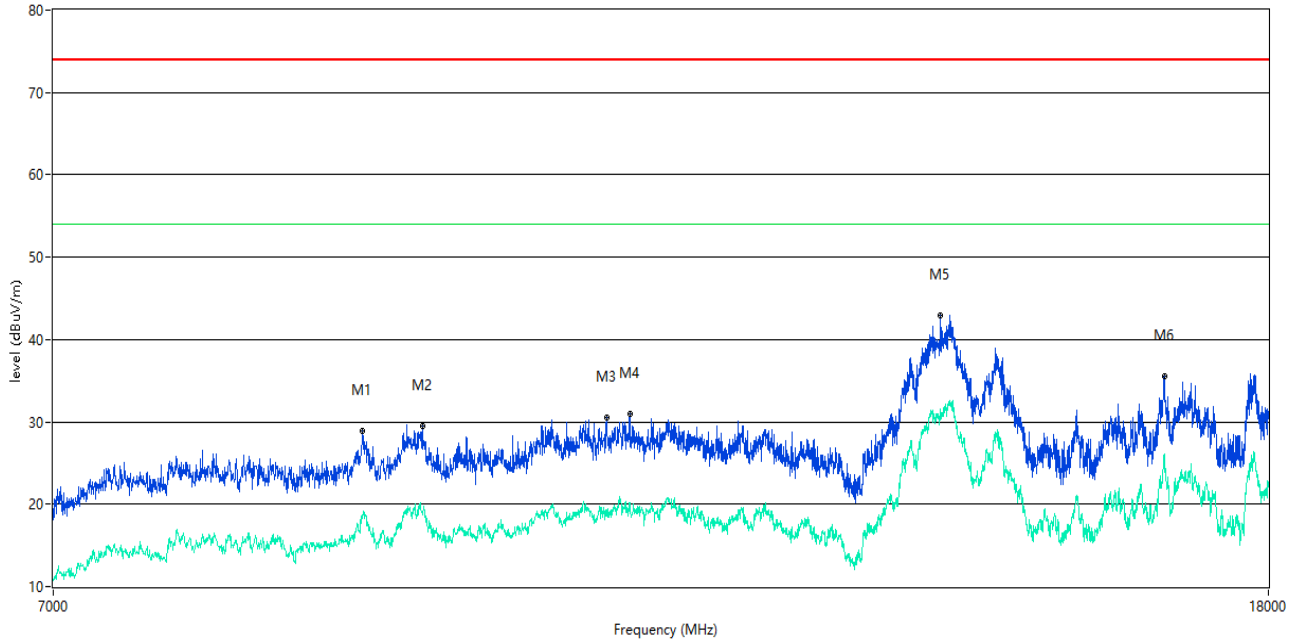

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8902.524	28.92	--	18.3	-32.46	74.0	--	54.0	35.70	202.00	150	Horizontal	Pass
9325.919	29.43	--	19.0	-31.60	74.0	--	54.0	35.00	218.00	150	Horizontal	Pass
10761.060	30.57	--	18.5	-26.36	74.0	--	54.0	35.50	210.00	150	Horizontal	Pass
10956.261	31.03	--	20.2	-24.62	74.0	--	54.0	33.80	225.00	150	Horizontal	Pass
13953.012	42.87	--	31.6	-7.44	74.0	--	54.0	22.40	137.00	150	Horizontal	Pass
16608.848	35.59	--	24.3	-10.31	74.0	--	54.0	29.70	251.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

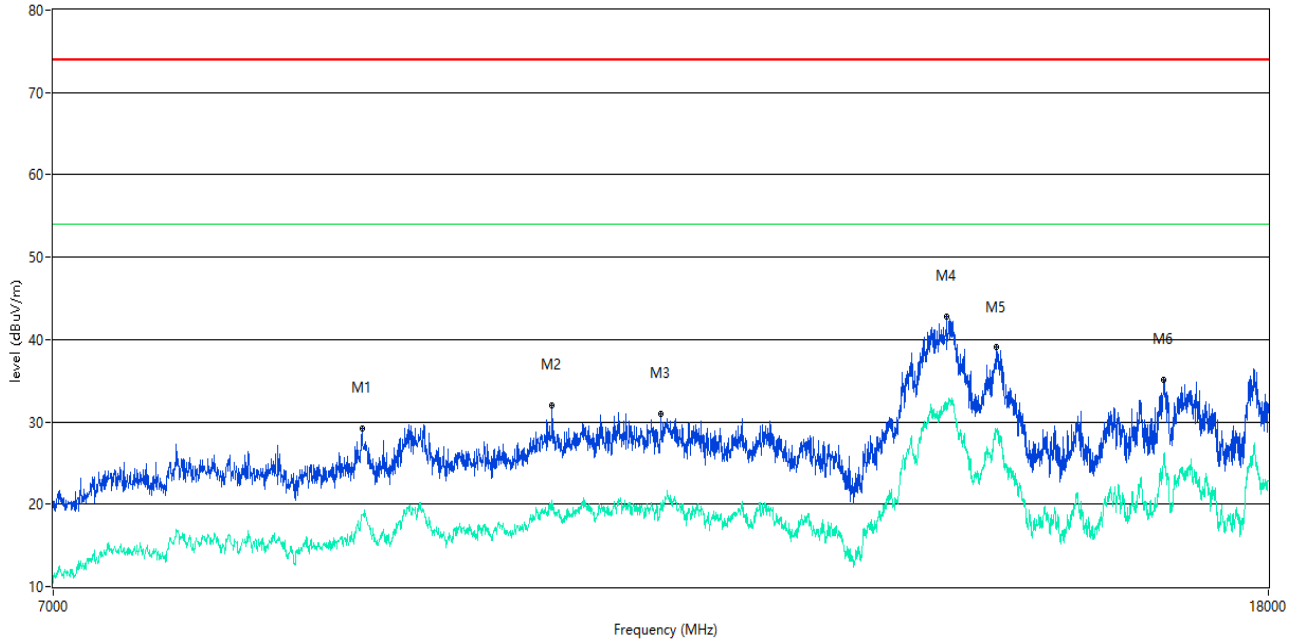

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8899.775	29.17	--	18.7	-32.30	74.0	--	54.0	35.30	180.00	150	Vertical	Pass
10315.671	32.00	--	20.5	-27.65	74.0	--	54.0	33.50	41.00	150	Vertical	Pass
11225.694	30.98	--	20.1	-25.33	74.0	--	54.0	33.90	276.00	150	Vertical	Pass
14016.246	42.77	--	32.3	-6.92	74.0	--	54.0	21.70	288.00	150	Vertical	Pass
14571.607	39.02	--	28.9	-11.13	74.0	--	54.0	25.10	166.00	150	Vertical	Pass
16592.352	35.09	--	26.0	-10.81	74.0	--	54.0	28.00	251.00	150	Vertical	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

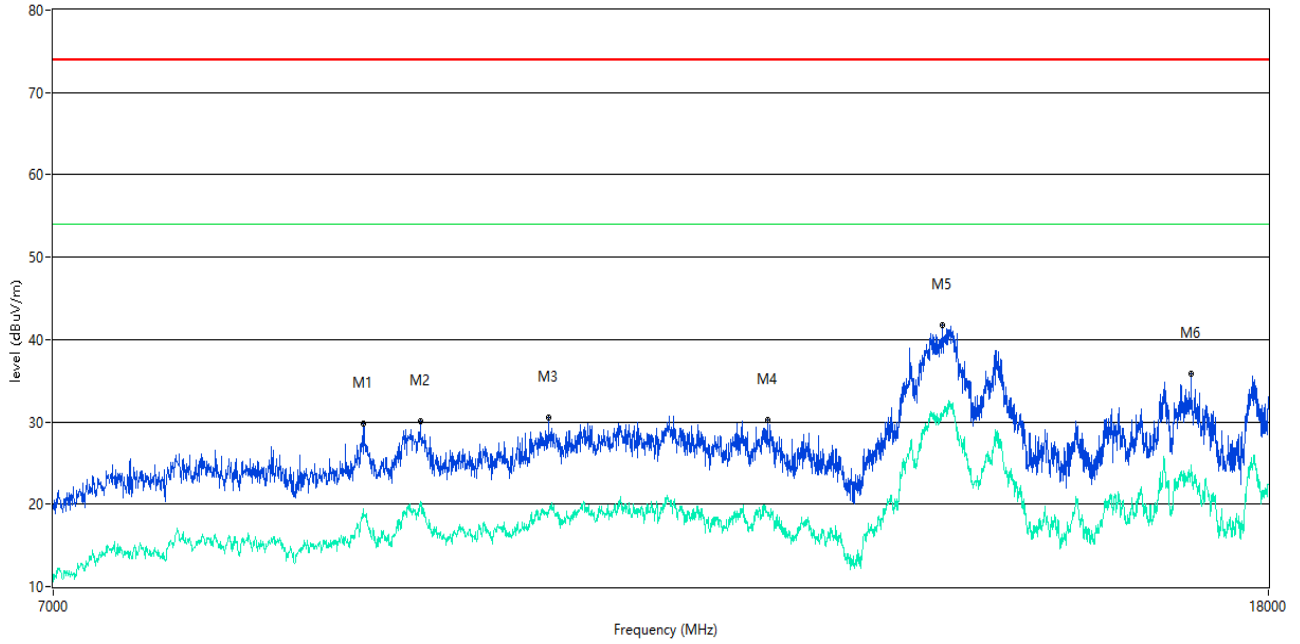

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8905.274	29.86	--	19.5	-32.43	74.0	--	54.0	34.50	119.00	150	Horizontal	Pass
9309.423	30.06	--	20.3	-30.97	74.0	--	54.0	33.70	131.00	150	Horizontal	Pass
10288.178	30.50	--	19.3	-27.86	74.0	--	54.0	34.70	130.00	150	Horizontal	Pass
12193.452	30.21	--	19.1	-24.66	74.0	--	54.0	34.90	103.00	150	Horizontal	Pass
13972.257	41.77	--	30.9	-7.19	74.0	--	54.0	23.10	279.00	150	Horizontal	Pass
16947.013	35.89	--	24.7	-10.16	74.0	--	54.0	29.30	14.00	150	Horizontal	Pass

8-DFSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

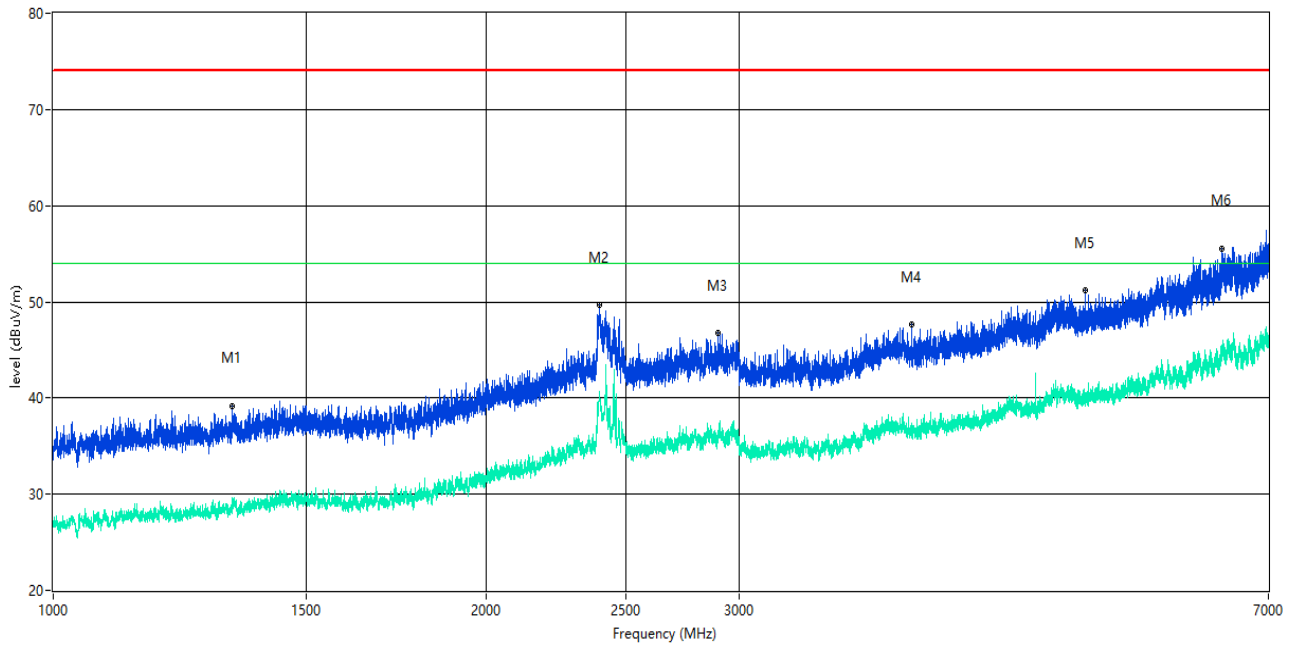

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1332.708	39.16	--	29.6	-11.82	74.0	--	54.0	24.40	201.00	150	Vertical	Pass
2396.325	49.63	--	40.2	0.05	74.0	--	54.0	13.80	261.00	150	Vertical	Pass
2900.512	46.78	--	36.5	-3.75	74.0	--	54.0	17.50	314.00	150	Vertical	Pass
3952.756	47.67	--	36.5	-3.21	74.0	--	54.0	17.50	327.00	150	Vertical	Pass
5222.347	51.23	--	40.0	0.65	74.0	--	54.0	14.00	306.00	150	Vertical	Pass
6492.188	55.48	--	44.5	7.02	74.0	--	54.0	9.50	118.00	150	Vertical	Pass

8-DFSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

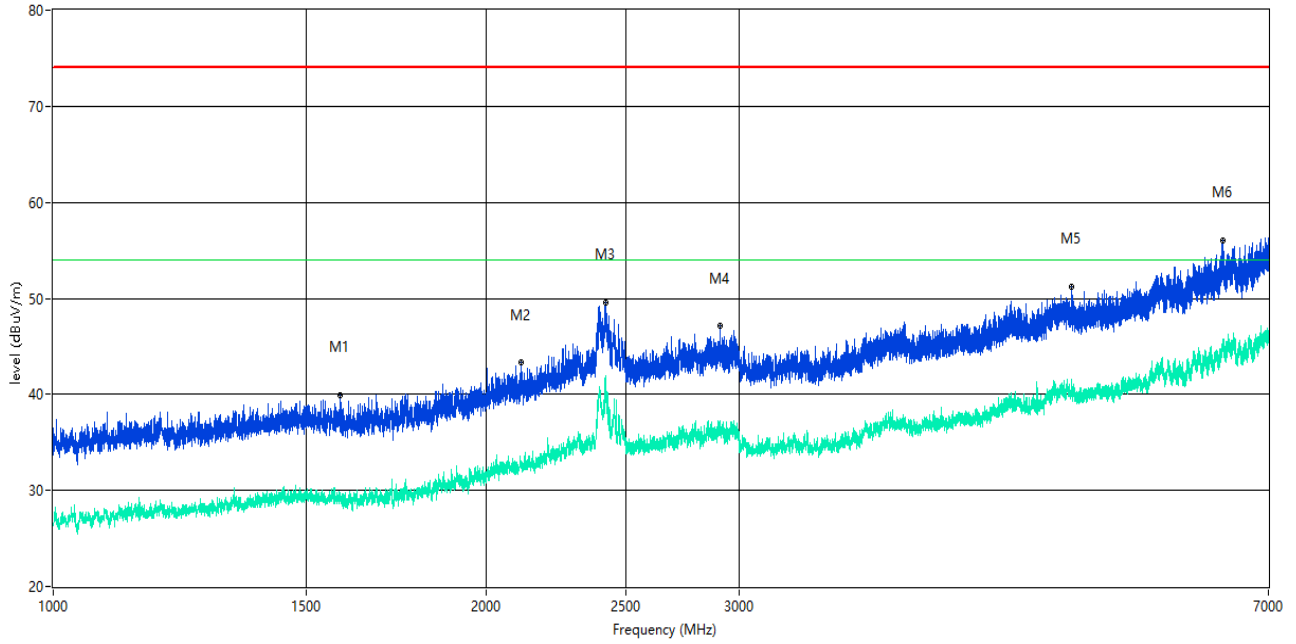

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1584.177	39.92	--	29.6	-11.77	74.0	--	54.0	24.40	129.00	150	Horizontal	Pass
2114.361	43.31	--	32.8	-7.55	74.0	--	54.0	21.20	235.00	150	Horizontal	Pass
2420.572	49.60	--	41.9	-0.79	74.0	--	54.0	12.10	13.00	150	Horizontal	Pass
2909.511	47.12	--	36.5	-3.48	74.0	--	54.0	17.50	12.00	150	Horizontal	Pass
5106.112	51.15	--	41.6	1.40	74.0	--	54.0	12.40	243.00	150	Horizontal	Pass
6511.186	56.08	--	45.0	8.12	74.0	--	54.0	9.00	221.00	150	Horizontal	Pass

8-DFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

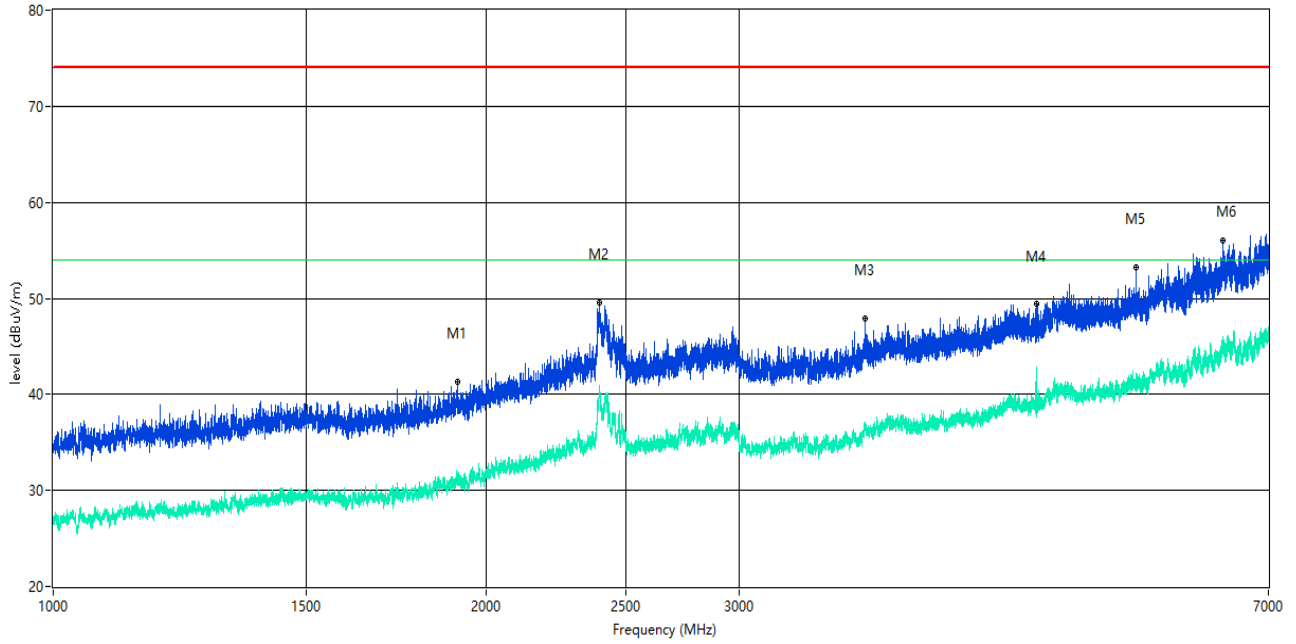

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1910.386	41.27	--	31.8	-9.02	74.0	--	54.0	22.20	146.00	150	Vertical	Pass
2397.325	49.59	--	40.3	-0.01	74.0	--	54.0	13.70	43.00	150	Vertical	Pass
3672.666	47.92	--	36.7	-3.25	74.0	--	54.0	17.30	63.00	150	Vertical	Pass
4826.022	49.38	--	42.8	-0.68	74.0	--	54.0	11.20	112.00	150	Vertical	Pass
5661.042	53.18	--	42.2	2.59	74.0	--	54.0	11.80	24.00	150	Vertical	Pass
6509.436	55.98	--	45.1	8.15	74.0	--	54.0	8.90	30.00	150	Vertical	Pass

8-DFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

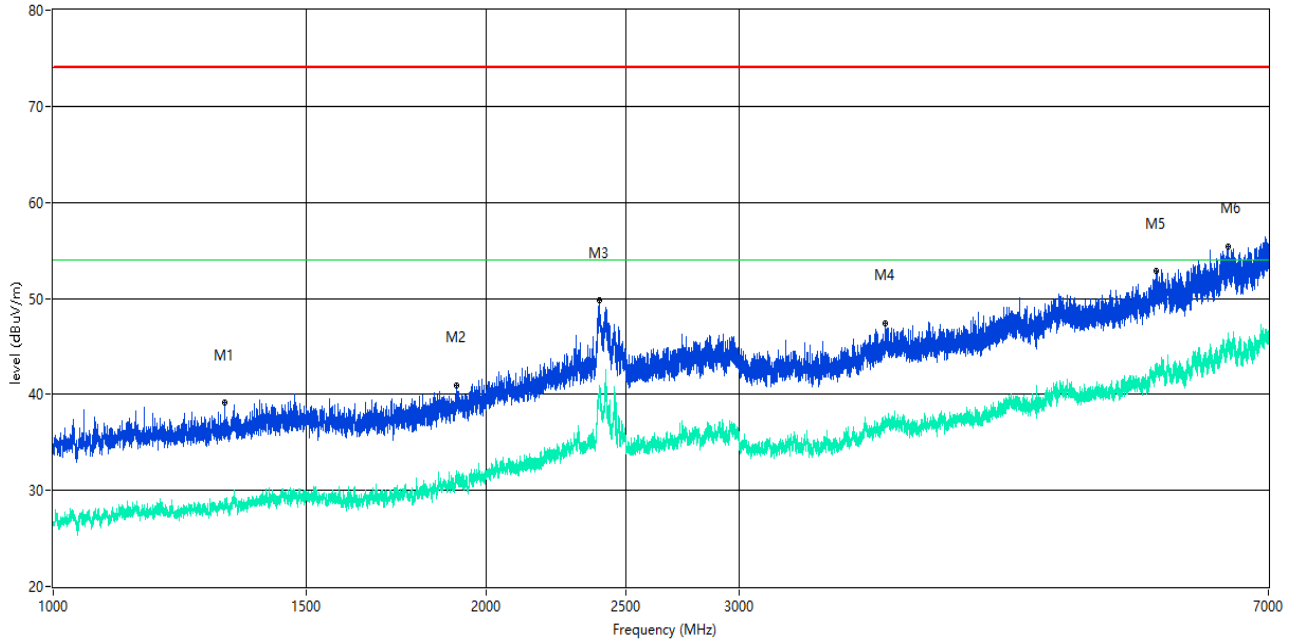

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1315.461	39.09	--	28.5	-12.17	74.0	--	54.0	25.50	54.00	150	Horizontal	Pass
1906.887	40.92	--	31.4	-9.06	74.0	--	54.0	22.60	282.00	150	Horizontal	Pass
2398.575	49.80	--	40.9	-0.05	74.0	--	54.0	13.10	32.00	150	Horizontal	Pass
3788.151	47.43	--	37.2	-2.94	74.0	--	54.0	16.80	122.00	150	Horizontal	Pass
5851.144	52.88	--	43.2	3.57	74.0	--	54.0	10.80	267.00	150	Horizontal	Pass
6558.430	55.41	--	45.8	7.98	74.0	--	54.0	8.20	115.00	150	Horizontal	Pass

8-DFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

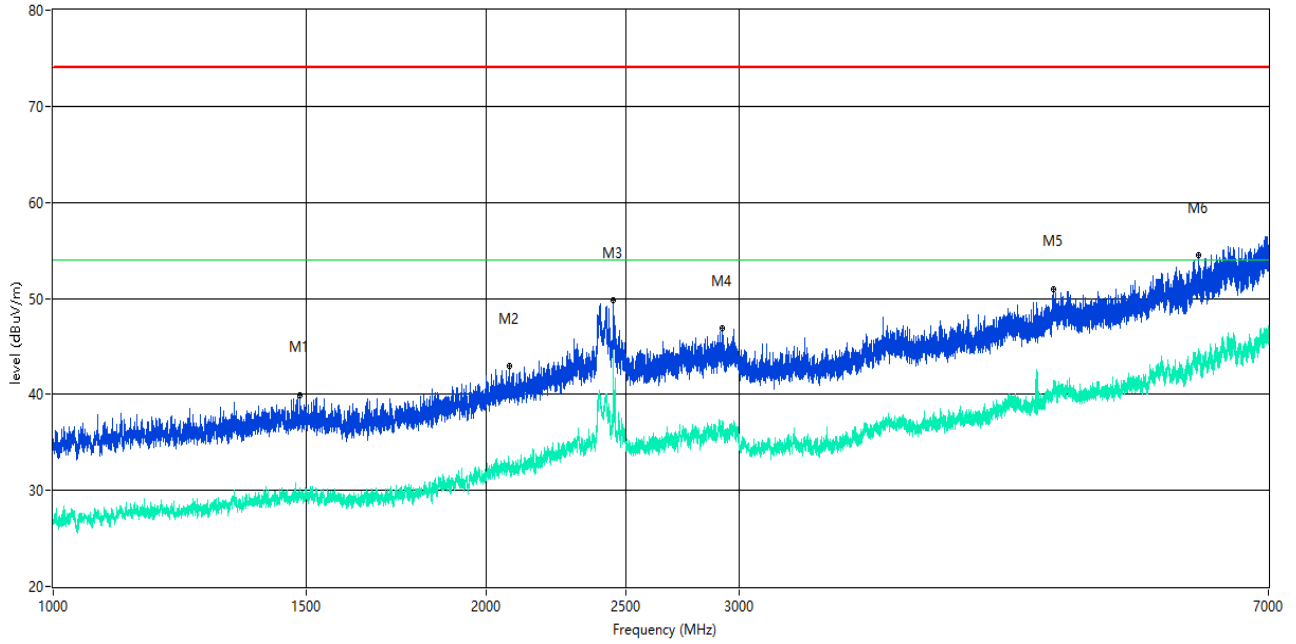

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1484.189	39.94	--	30.2	-11.46	74.0	--	54.0	23.80	316.00	150	Vertical	Pass
2075.116	42.98	--	32.5	-7.77	74.0	--	54.0	21.50	61.00	150	Vertical	Pass
2451.819	49.75	--	44.6	-2.06	74.0	--	54.0	9.40	166.00	150	Vertical	Pass
2917.010	46.85	--	36.9	-3.03	74.0	--	54.0	17.10	193.00	150	Vertical	Pass
4963.630	50.95	--	40.6	1.35	74.0	--	54.0	13.40	322.00	150	Vertical	Pass
6263.967	54.53	--	44.1	5.83	74.0	--	54.0	9.90	8.00	150	Vertical	Pass

8-DFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

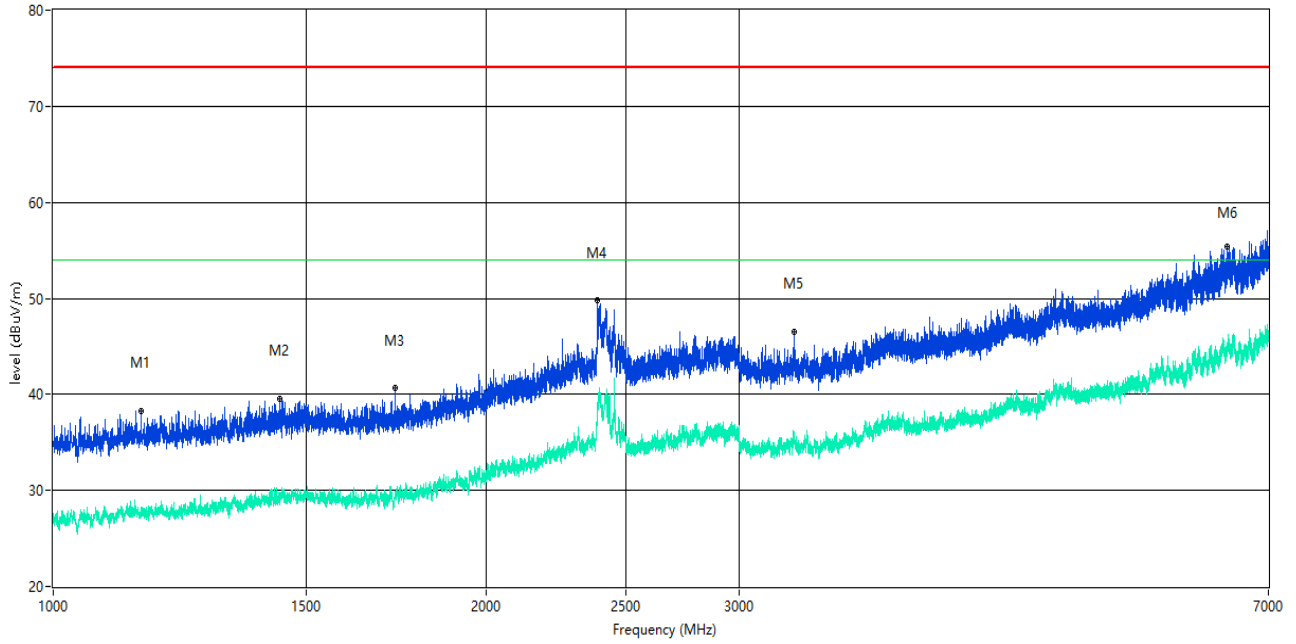

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1151.731	38.22	--	27.9	-11.87	74.0	--	54.0	26.10	157.00	150	Horizontal	Pass
1437.195	39.50	--	29.6	-11.79	74.0	--	54.0	24.40	257.00	150	Horizontal	Pass
1728.159	40.74	--	29.6	-11.31	74.0	--	54.0	24.40	247.00	150	Horizontal	Pass
2391.326	49.86	--	38.5	-0.56	74.0	--	54.0	15.50	200.00	150	Horizontal	Pass
3278.215	46.50	--	35.1	-4.19	74.0	--	54.0	18.90	99.00	150	Horizontal	Pass
6557.680	55.44	--	45.1	7.85	74.0	--	54.0	8.90	155.00	150	Horizontal	Pass

8-DFSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

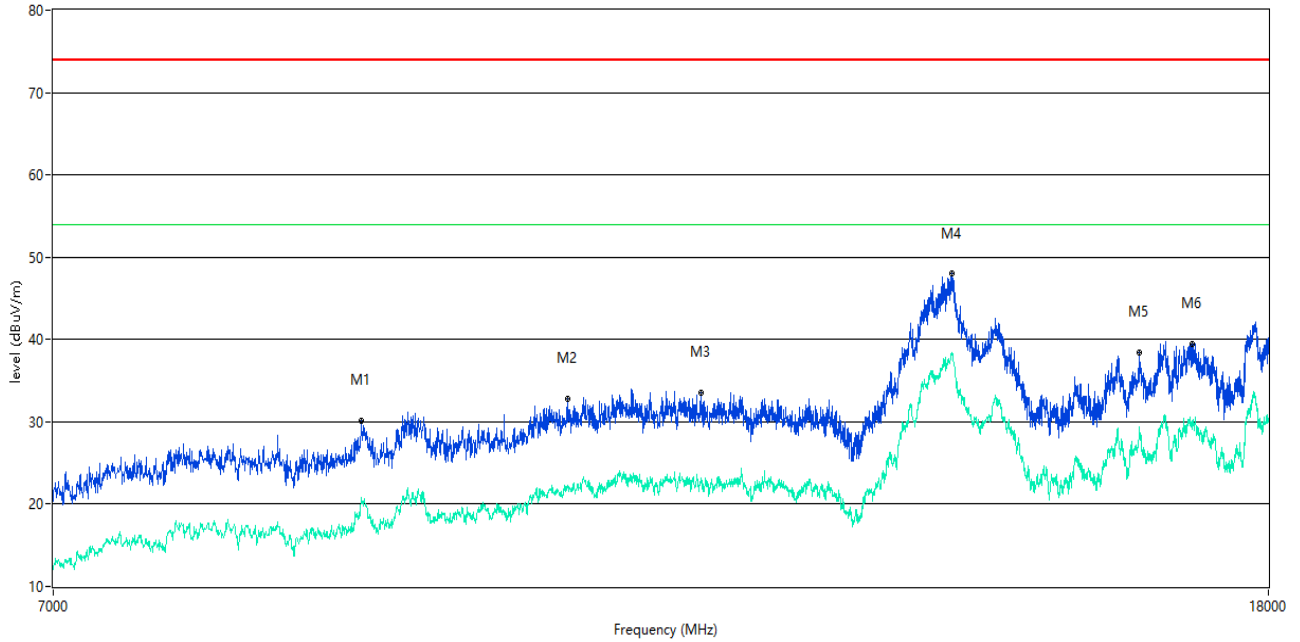

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8894.276	30.13	--	20.8	-32.19	74.0	--	54.0	33.20	19.00	150	Vertical	Pass
10444.889	32.77	--	22.3	-27.53	74.0	--	54.0	31.70	133.00	150	Vertical	Pass
11580.355	33.57	--	22.6	-24.04	74.0	--	54.0	31.40	5.00	150	Vertical	Pass
14076.731	47.99	--	38.3	-6.48	74.0	--	54.0	15.70	216.00	150	Vertical	Pass
16278.930	38.39	--	28.6	-14.41	74.0	--	54.0	25.40	293.00	150	Vertical	Pass
16966.258	39.52	--	29.6	-10.56	74.0	--	54.0	24.40	319.00	150	Vertical	Pass

8-DFSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

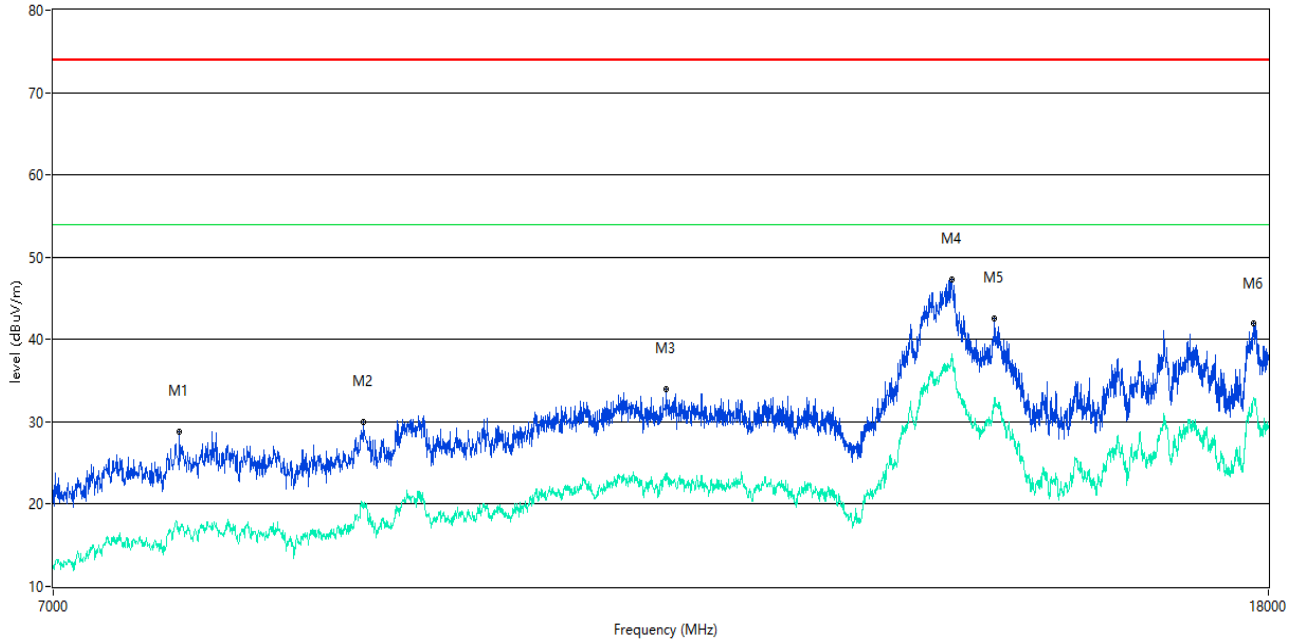

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7720.320	28.79	--	16.9	-35.75	74.0	--	54.0	37.10	134.00	150	Horizontal	Pass
8908.023	29.91	--	19.7	-32.42	74.0	--	54.0	34.30	247.00	150	Horizontal	Pass
11272.432	34.00	--	22.9	-25.14	74.0	--	54.0	31.10	298.00	150	Horizontal	Pass
14079.480	47.32	--	38.2	-6.58	74.0	--	54.0	15.80	257.00	150	Horizontal	Pass
14546.863	42.57	--	32.9	-11.40	74.0	--	54.0	21.10	21.00	150	Horizontal	Pass
17793.802	41.92	--	33.0	-7.94	74.0	--	54.0	21.00	245.00	150	Horizontal	Pass

8-DFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

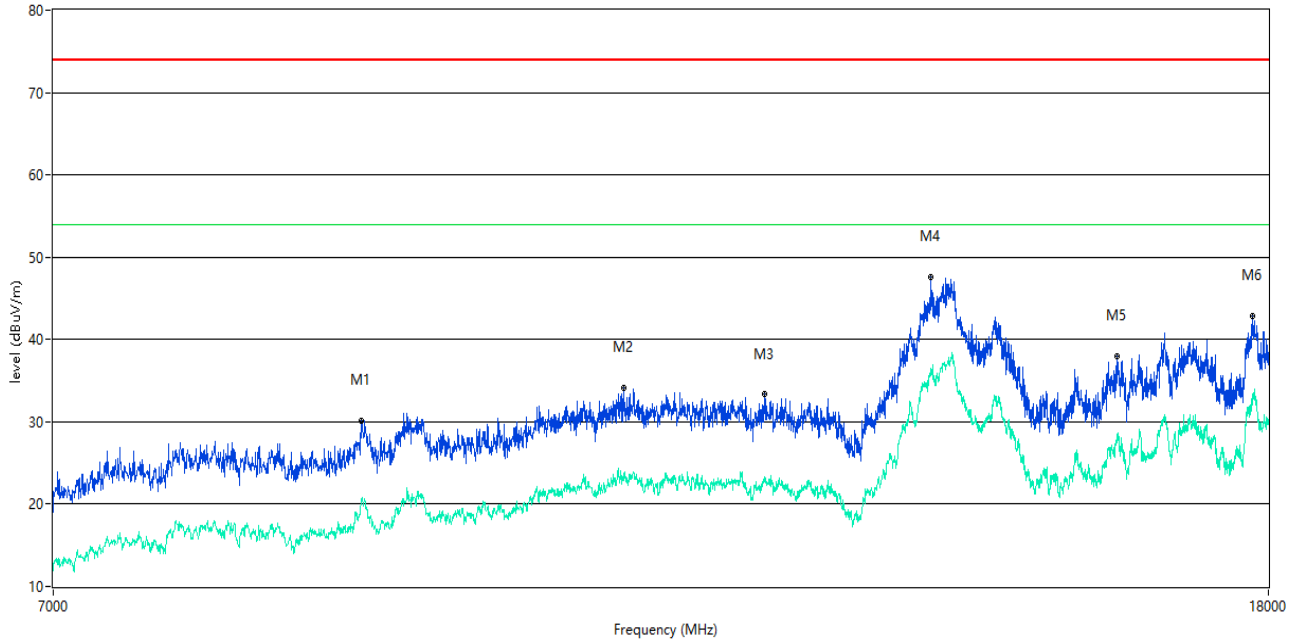

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8897.026	30.11	--	20.5	-32.04	74.0	--	54.0	33.50	272.00	150	Vertical	Pass
10904.024	34.16	--	23.7	-25.22	74.0	--	54.0	30.30	159.00	150	Vertical	Pass
12163.209	33.33	--	23.3	-24.60	74.0	--	54.0	30.70	46.00	150	Vertical	Pass
13843.039	47.65	--	36.6	-9.65	74.0	--	54.0	17.40	256.00	150	Vertical	Pass
16006.748	38.02	--	28.4	-14.18	74.0	--	54.0	25.60	52.00	150	Vertical	Pass
17780.055	42.79	--	32.2	-8.37	74.0	--	54.0	21.80	240.00	150	Vertical	Pass

8-DFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

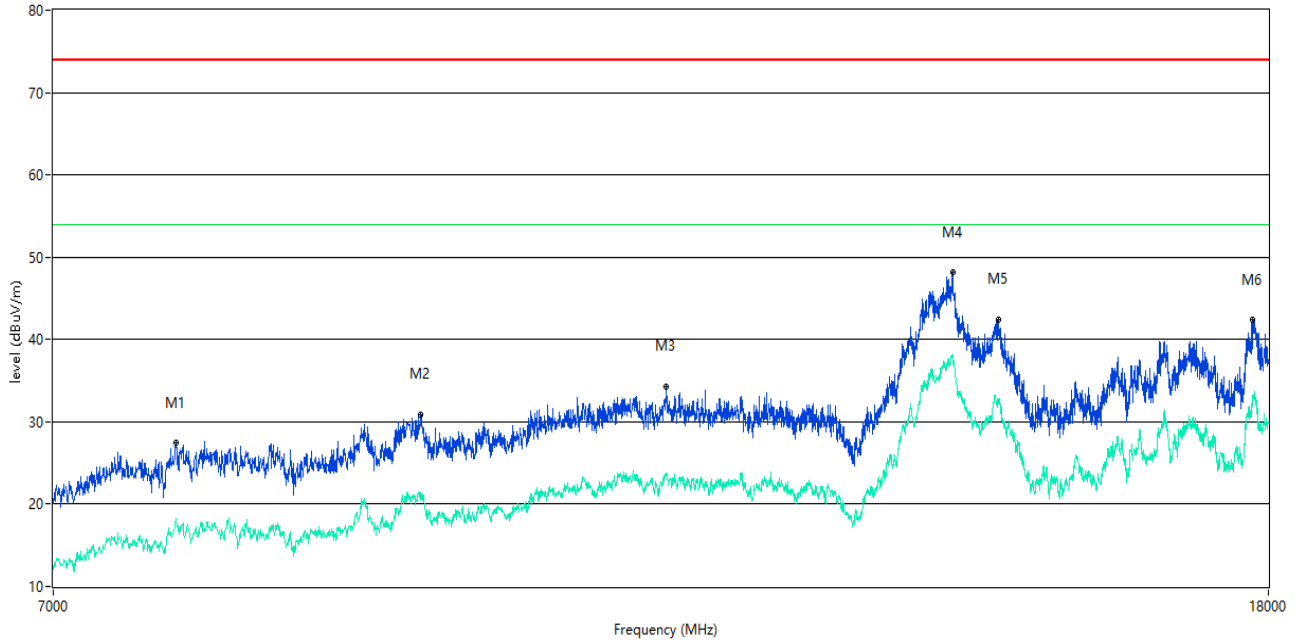

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7698.325	27.42	--	18.2	-35.74	74.0	--	54.0	35.80	92.00	150	Horizontal	Pass
9314.921	30.85	--	20.5	-31.34	74.0	--	54.0	33.50	99.00	150	Horizontal	Pass
11275.181	34.22	--	23.7	-24.98	74.0	--	54.0	30.30	15.00	150	Horizontal	Pass
14084.979	48.14	--	38.1	-6.61	74.0	--	54.0	15.90	165.00	150	Horizontal	Pass
14599.100	42.38	--	32.3	-11.21	74.0	--	54.0	21.70	39.00	150	Horizontal	Pass
17785.554	42.36	--	33.2	-8.18	74.0	--	54.0	20.80	316.00	150	Horizontal	Pass

8-DFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

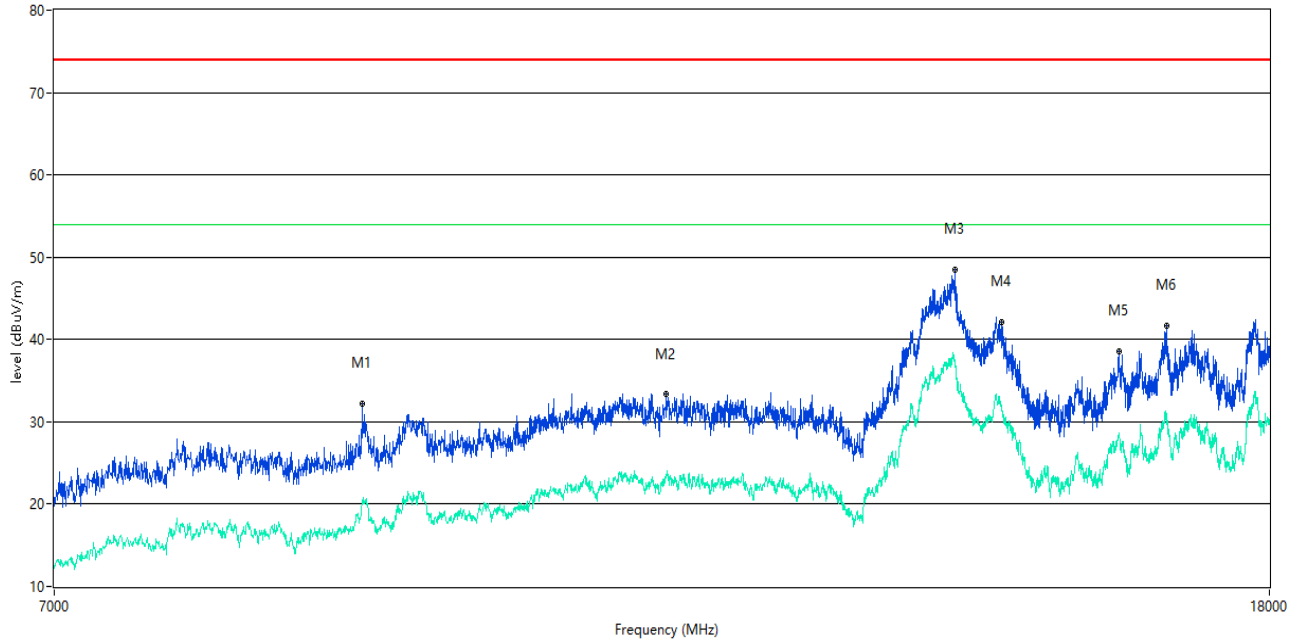

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8894.276	32.18	--	20.5	-32.19	74.0	--	54.0	33.50	226.00	150	Vertical	Pass
11264.184	33.44	--	23.1	-24.97	74.0	--	54.0	30.90	119.00	150	Vertical	Pass
14101.475	48.42	--	36.8	-7.01	74.0	--	54.0	17.20	82.00	150	Vertical	Pass
14615.596	42.15	--	32.0	-11.22	74.0	--	54.0	22.00	265.00	150	Vertical	Pass
16009.498	38.52	--	28.3	-14.23	74.0	--	54.0	25.70	105.00	150	Vertical	Pass
16614.346	41.64	--	30.4	-10.26	74.0	--	54.0	23.60	114.00	150	Vertical	Pass

8-DFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

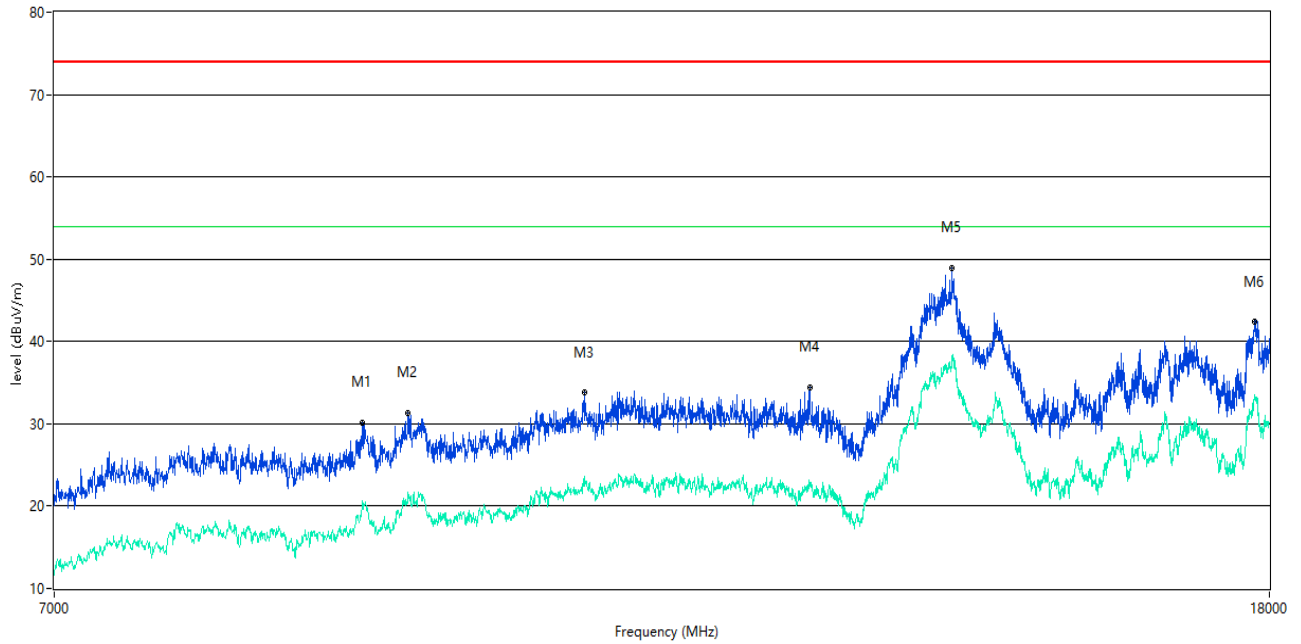


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8897.026	30.16	--	20.6	-32.04	74.0	--	54.0	33.40	332.00	150	Horizontal	Pass
9215.946	31.38	--	21.7	-31.70	74.0	--	54.0	32.30	197.00	150	Horizontal	Pass
10568.608	33.76	--	23.6	-26.39	74.0	--	54.0	30.40	315.00	150	Horizontal	Pass
12592.102	34.42	--	22.5	-24.52	74.0	--	54.0	31.50	284.00	150	Horizontal	Pass
14062.984	48.93	--	38.3	-6.42	74.0	--	54.0	15.70	84.00	150	Horizontal	Pass
17799.300	42.34	--	33.0	-7.95	74.0	--	54.0	21.00	327.00	150	Horizontal	Pass

Hopping Mode:

GFSK 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

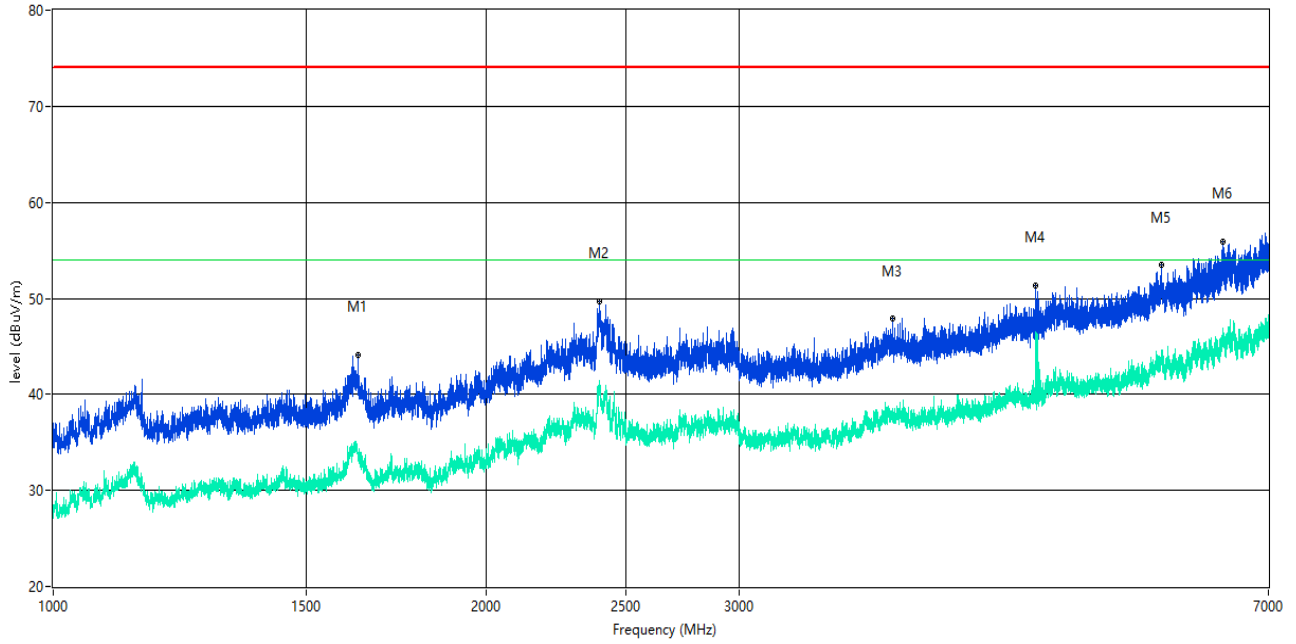

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1628.921	44.12	--	33.9	-12.22	74.0	--	54.0	20.10	132.00	150	Vertical	Pass
2399.325	49.64	--	41.4	-0.07	74.0	--	54.0	12.60	16.00	150	Vertical	Pass
3832.021	47.94	--	37.8	-2.91	74.0	--	54.0	16.20	139.00	150	Vertical	Pass
4824.147	51.35	--	46.5	-0.62	74.0	--	54.0	7.50	70.00	150	Vertical	Pass
5900.637	53.48	--	44.2	4.04	74.0	--	54.0	9.80	160.00	150	Vertical	Pass
6508.561	55.95	--	46.4	8.16	74.0	--	54.0	7.60	349.00	150	Vertical	Pass

GFSK 1 GHz to 7 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

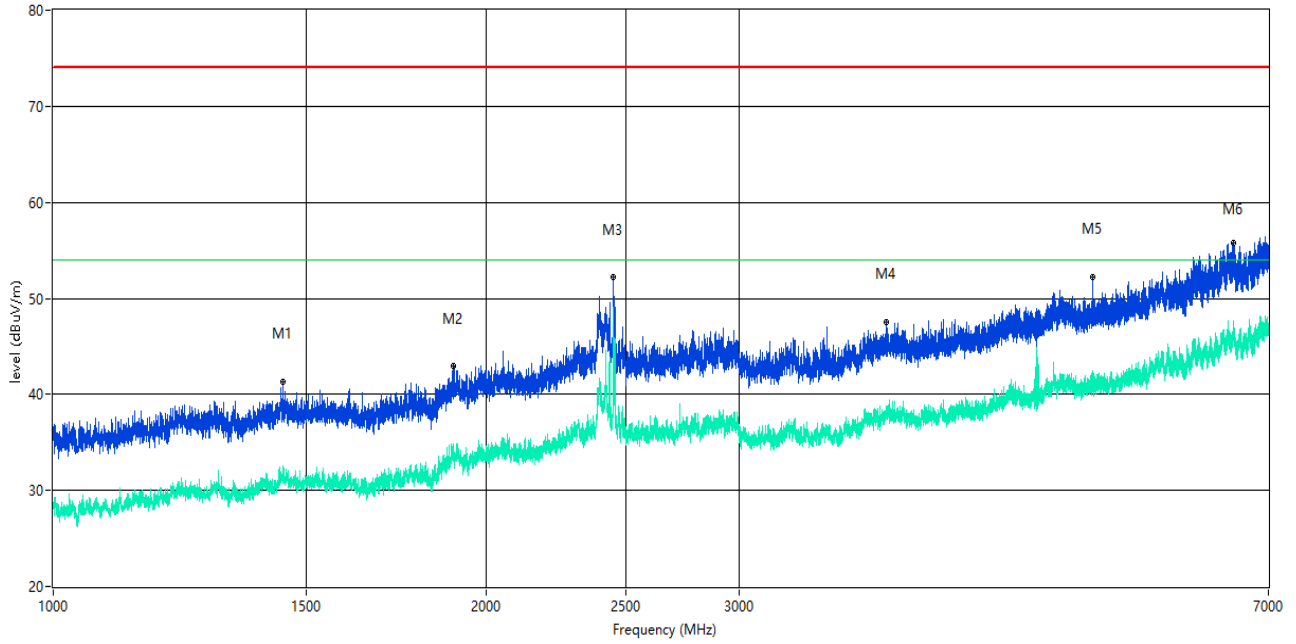

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1444.944	41.31	--	32.6	-11.50	74.0	--	54.0	21.40	255.00	150	Horizontal	Pass
1898.388	42.93	--	33.3	-10.01	74.0	--	54.0	20.70	345.00	150	Horizontal	Pass
2452.068	52.27	--	48.9	-2.07	74.0	--	54.0	5.10	253.00	150	Horizontal	Pass
3795.651	47.53	--	38.3	-2.74	74.0	--	54.0	15.70	190.00	150	Horizontal	Pass
5281.590	52.19	--	42.4	1.07	74.0	--	54.0	11.60	48.00	150	Horizontal	Pass
6622.172	55.75	--	45.7	7.76	74.0	--	54.0	8.30	345.00	150	Horizontal	Pass

GFSK 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

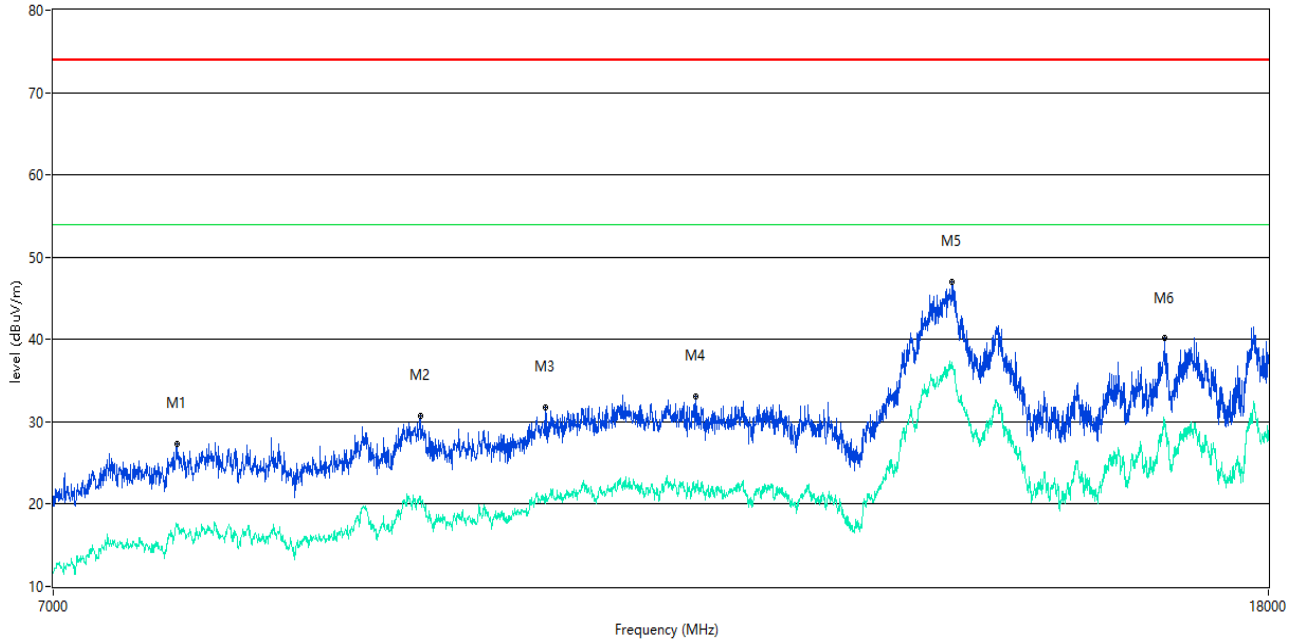

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7706.573	27.25	--	17.5	-35.88	74.0	--	54.0	36.50	96.00	150	Vertical	Pass
9309.423	30.78	--	21.0	-30.97	74.0	--	54.0	33.00	25.00	150	Vertical	Pass
10266.183	31.71	--	21.2	-28.07	74.0	--	54.0	32.80	199.00	150	Vertical	Pass
11533.617	33.06	--	21.6	-23.81	74.0	--	54.0	32.40	290.00	150	Vertical	Pass
14079.480	47.03	--	37.2	-6.58	74.0	--	54.0	16.80	239.00	150	Vertical	Pass
16603.349	40.20	--	30.2	-10.25	74.0	--	54.0	23.80	70.00	150	Vertical	Pass

GFSK 7 GHz to 18 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

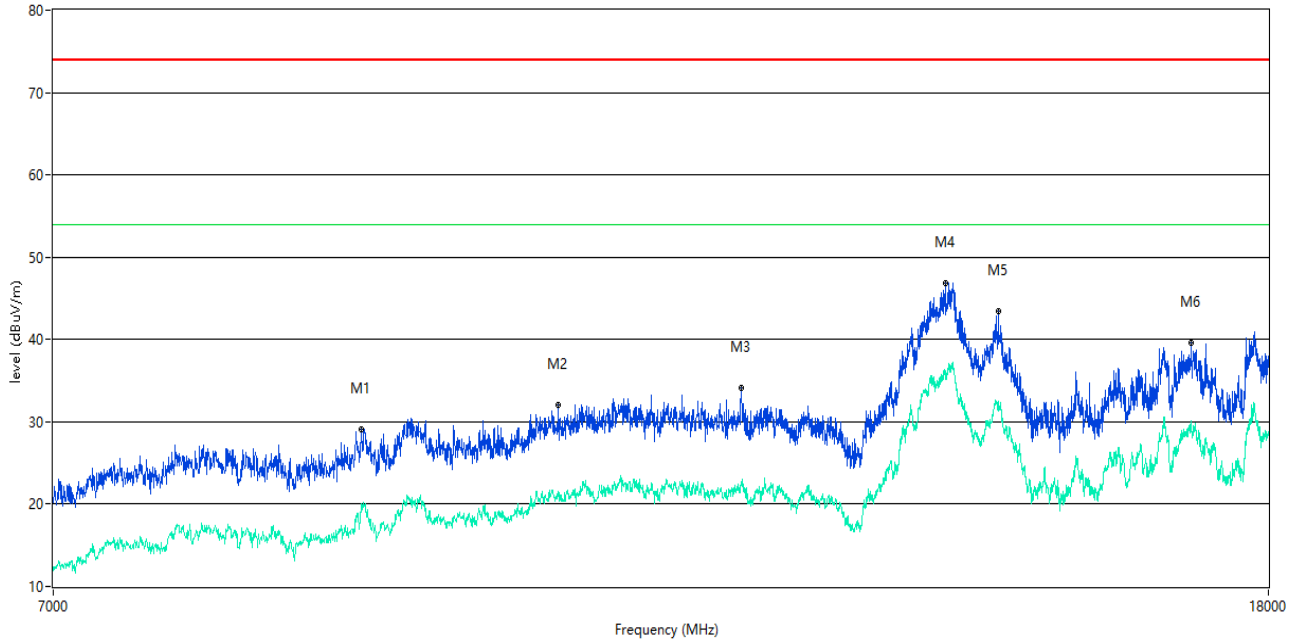

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8897.026	29.13	--	20.1	-32.04	74.0	--	54.0	33.90	86.00	150	Horizontal	Pass
10365.159	31.99	--	21.6	-27.89	74.0	--	54.0	32.40	205.00	150	Horizontal	Pass
11946.013	34.08	--	22.6	-24.10	74.0	--	54.0	31.40	175.00	150	Horizontal	Pass
14002.499	46.87	--	36.2	-6.73	74.0	--	54.0	17.80	156.00	150	Horizontal	Pass
14590.852	43.50	--	32.0	-10.72	74.0	--	54.0	22.00	187.00	150	Horizontal	Pass
16949.763	39.63	--	30.2	-10.20	74.0	--	54.0	23.80	77.00	150	Horizontal	Pass

8-DFSK 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

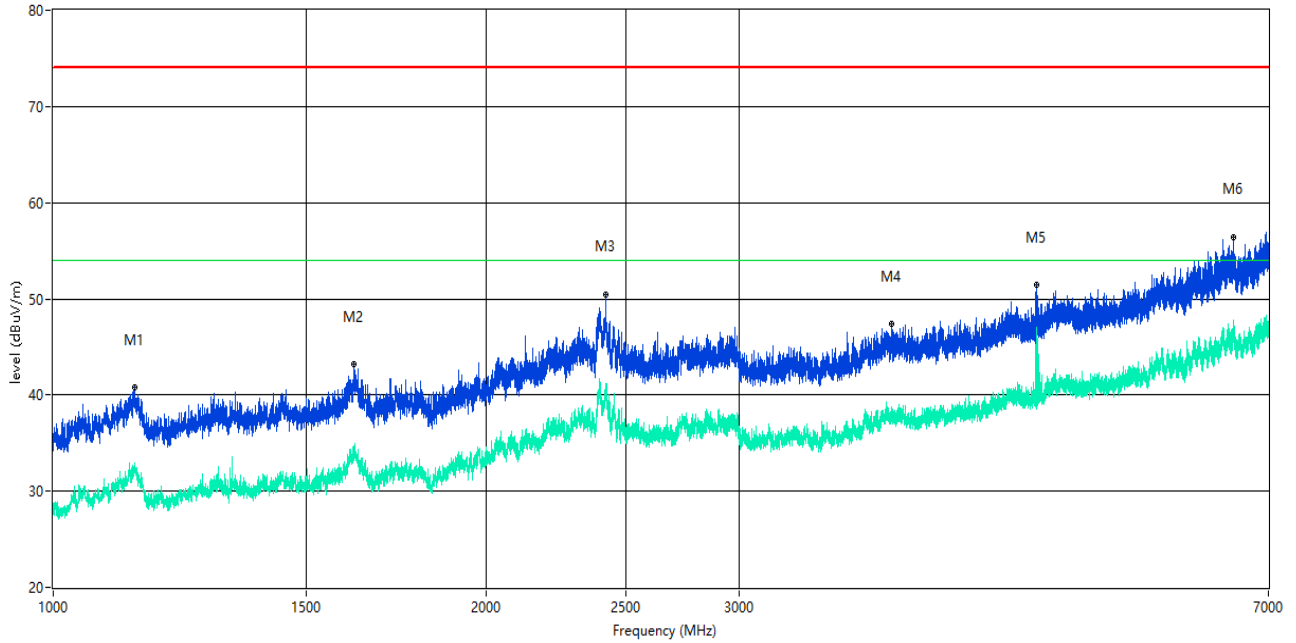

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1138.983	40.80	--	32.4	-11.48	74.0	--	54.0	21.60	13.00	150	Vertical	Pass
1618.673	43.24	--	33.8	-11.67	74.0	--	54.0	20.20	91.00	150	Vertical	Pass
2422.572	50.40	--	40.4	-0.84	74.0	--	54.0	13.60	202.00	150	Vertical	Pass
3829.021	47.36	--	37.9	-2.92	74.0	--	54.0	16.10	310.00	150	Vertical	Pass
4827.522	51.52	--	46.4	-0.75	74.0	--	54.0	7.60	308.00	150	Vertical	Pass
6618.423	56.36	--	47.1	8.04	74.0	--	54.0	6.90	103.00	150	Vertical	Pass

8-DFSK 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

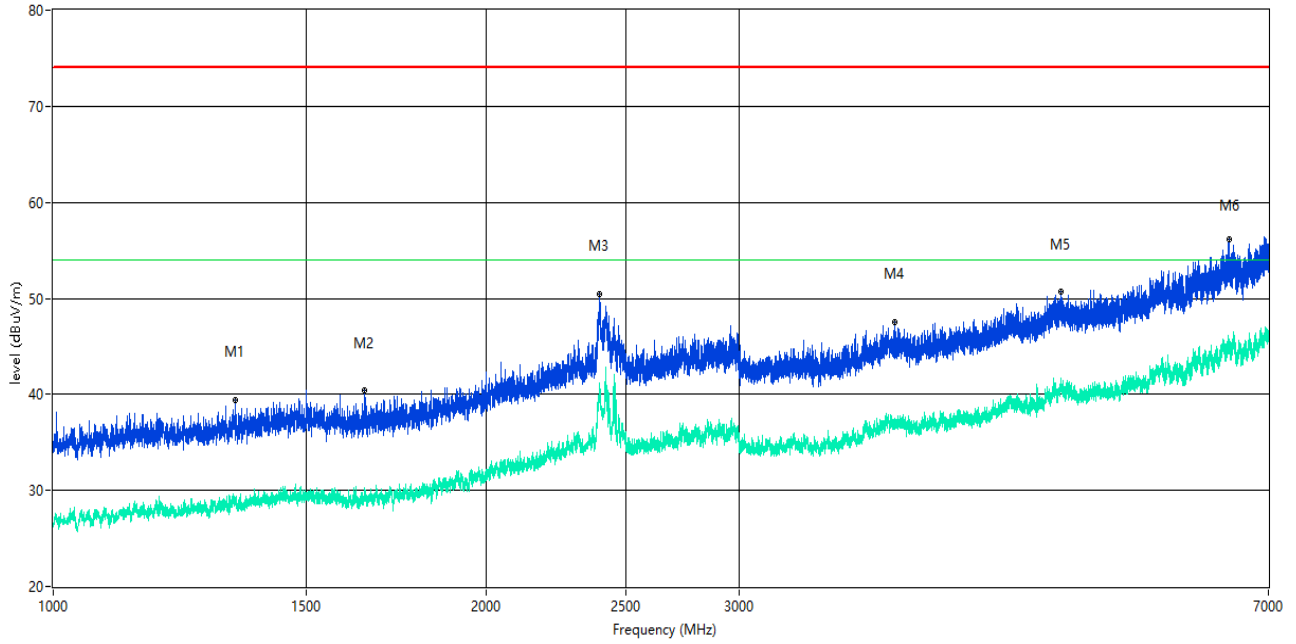

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1337.958	39.39	--	28.5	-11.76	74.0	--	54.0	25.50	6.00	150	Horizontal	Pass
1646.169	40.48	--	29.5	-11.50	74.0	--	54.0	24.50	115.00	150	Horizontal	Pass
2398.075	50.41	--	40.6	-0.03	74.0	--	54.0	13.40	348.00	150	Horizontal	Pass
3846.644	47.54	--	36.4	-2.93	74.0	--	54.0	17.60	313.00	150	Horizontal	Pass
5019.123	50.64	--	41.1	1.07	74.0	--	54.0	12.90	299.00	150	Horizontal	Pass
6570.054	56.13	--	45.0	7.78	74.0	--	54.0	9.00	313.00	150	Horizontal	Pass

8-DFSK 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

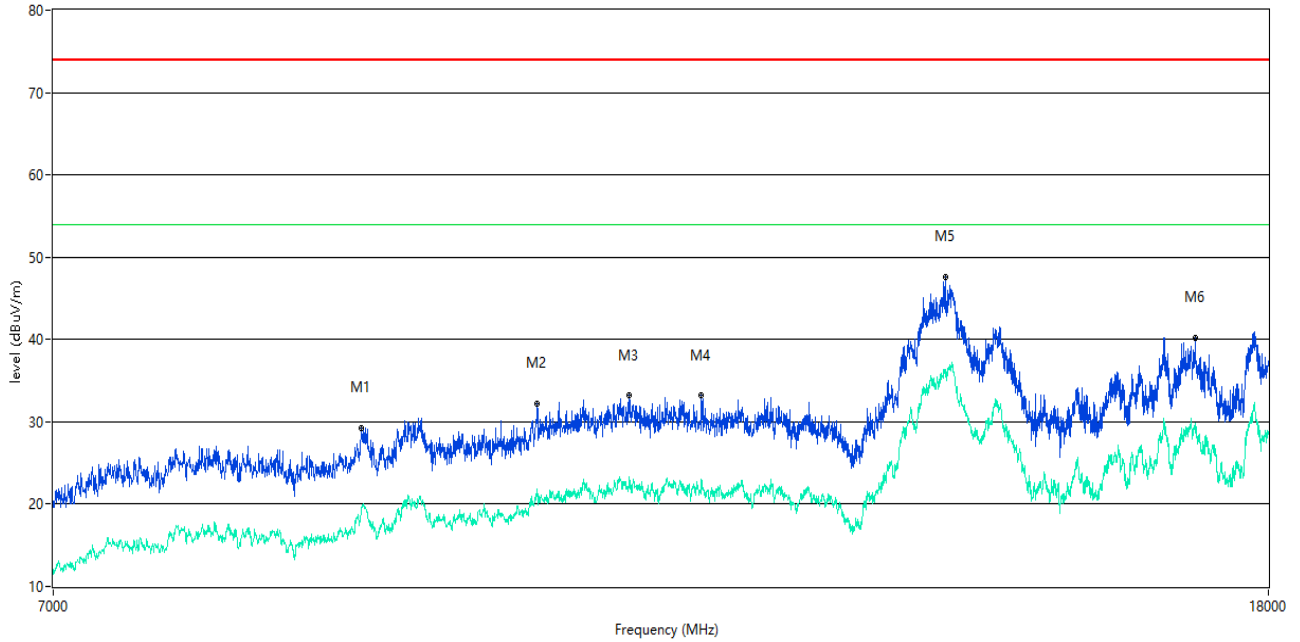

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8897.026	29.27	--	19.5	-32.04	74.0	--	54.0	34.50	107.00	150	Vertical	Pass
10197.451	32.20	--	21.6	-27.97	74.0	--	54.0	32.40	260.00	150	Vertical	Pass
10950.762	33.16	--	23.3	-24.82	74.0	--	54.0	30.70	22.00	150	Vertical	Pass
11585.854	33.25	--	23.1	-23.73	74.0	--	54.0	30.90	152.00	150	Vertical	Pass
13999.750	47.54	--	36.3	-6.64	74.0	--	54.0	17.70	291.00	150	Vertical	Pass
17007.498	40.25	--	29.9	-10.52	74.0	--	54.0	24.10	358.00	150	Vertical	Pass

8-DFSK 7 GHz to 18 GHz, ANT H

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

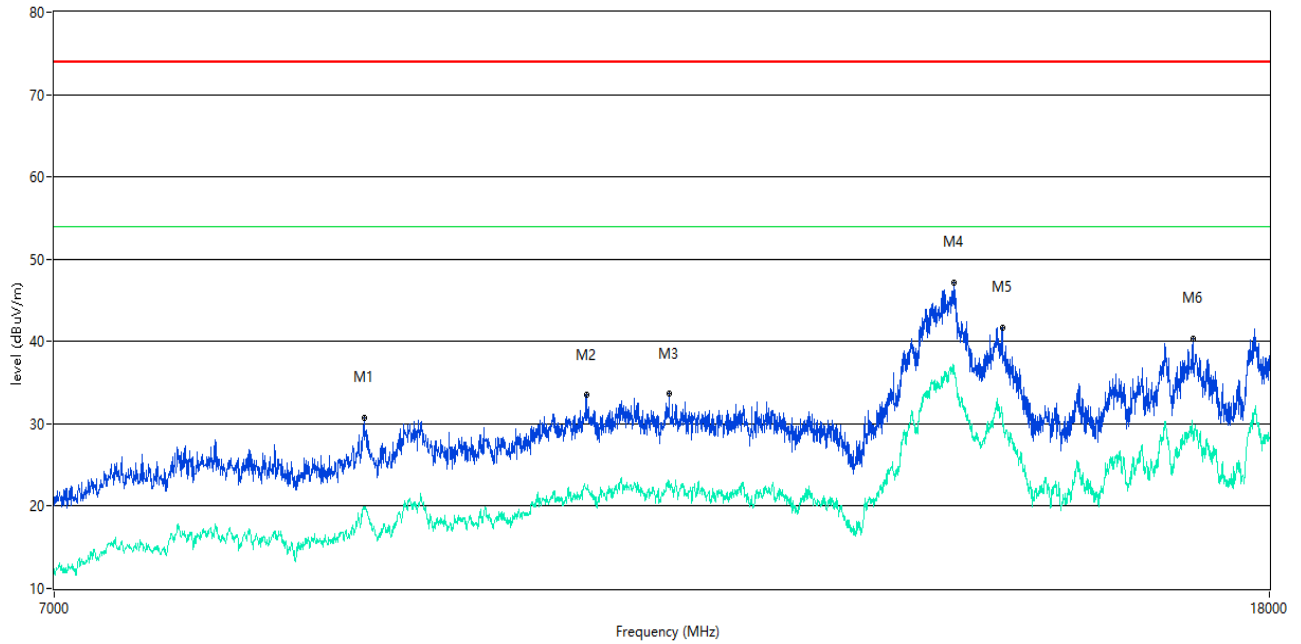

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8905.274	30.73	--	19.7	-32.43	74.0	--	54.0	34.30	62.00	150	Horizontal	Pass
10587.853	33.48	--	22.1	-26.17	74.0	--	54.0	31.90	215.00	150	Horizontal	Pass
11291.677	33.75	--	22.7	-24.68	74.0	--	54.0	31.30	301.00	150	Horizontal	Pass
14084.979	47.12	--	37.1	-6.61	74.0	--	54.0	16.90	125.00	150	Horizontal	Pass
14626.593	41.69	--	31.3	-11.30	74.0	--	54.0	22.70	110.00	150	Horizontal	Pass
16966.258	40.28	--	28.0	-10.56	74.0	--	54.0	26.00	89.00	150	Horizontal	Pass


A.9 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

GFSK LOW CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

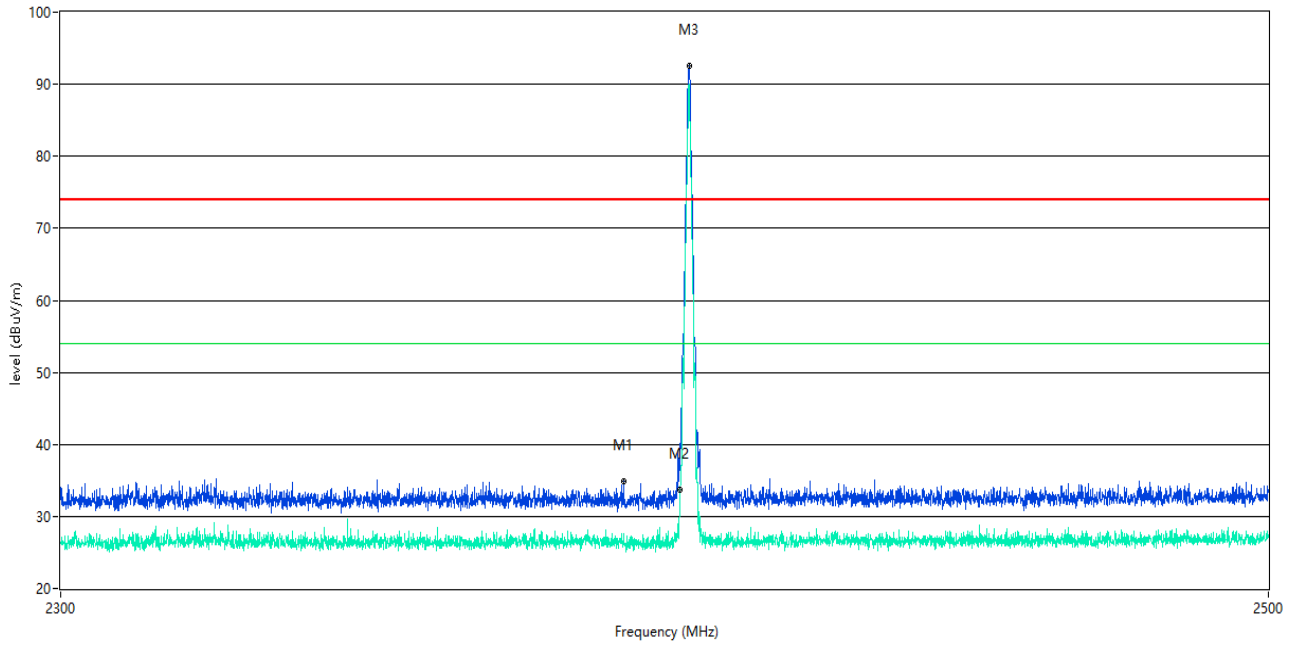

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2391.127	34.97	--	27.7	1.99	74.0	--	54.0	26.30	18.30	150	Vertical	Pass
2400.000	33.94	--	27.2	1.85	74.0	--	54.0	26.80	152.20	150	Vertical	Pass
2402.024	92.58	--	90.0	1.91	74.0	--	54.0	-36.00	92.90	150	Vertical	N.A

GFSK LOW CHANNEL, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

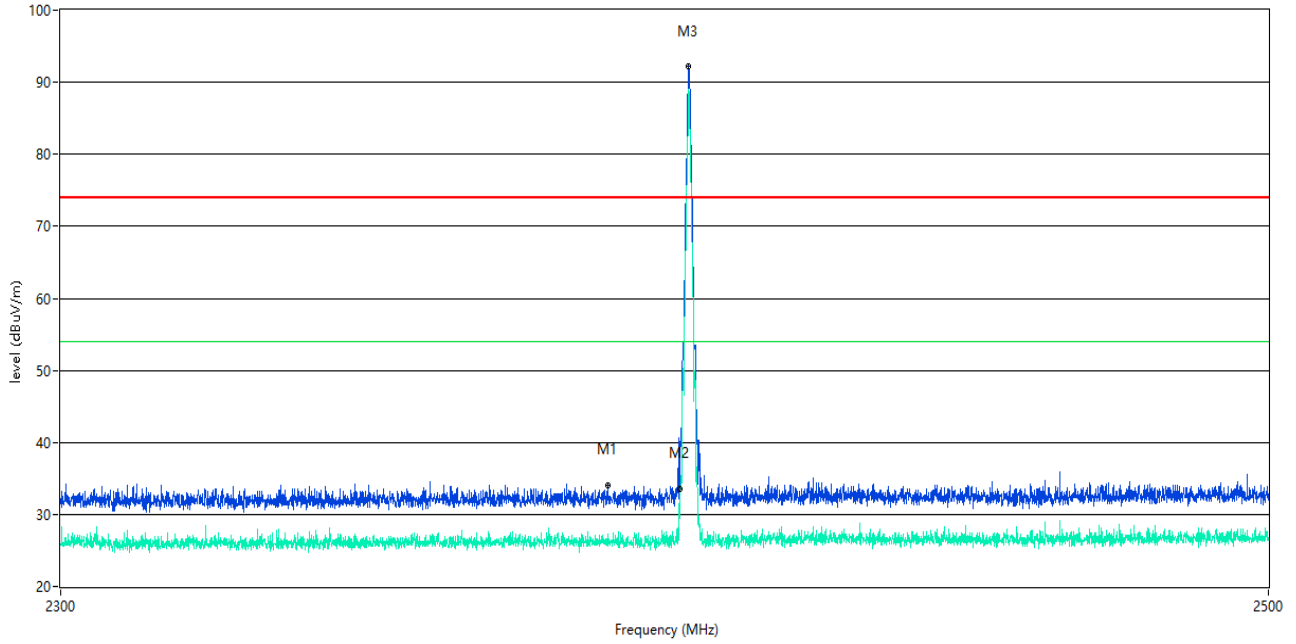

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2388.478	34.08	--	27.4	2.06	74.0	--	54.0	26.60	234.50	150	Horizontal	Pass
2400.000	33.22	--	26.0	1.85	74.0	--	54.0	28.00	306.05	150	Horizontal	Pass
2401.875	92.17	--	88.1	1.91	74.0	--	54.0	-34.10	270.30	150	Horizontal	N.A

GFSK HIGH CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

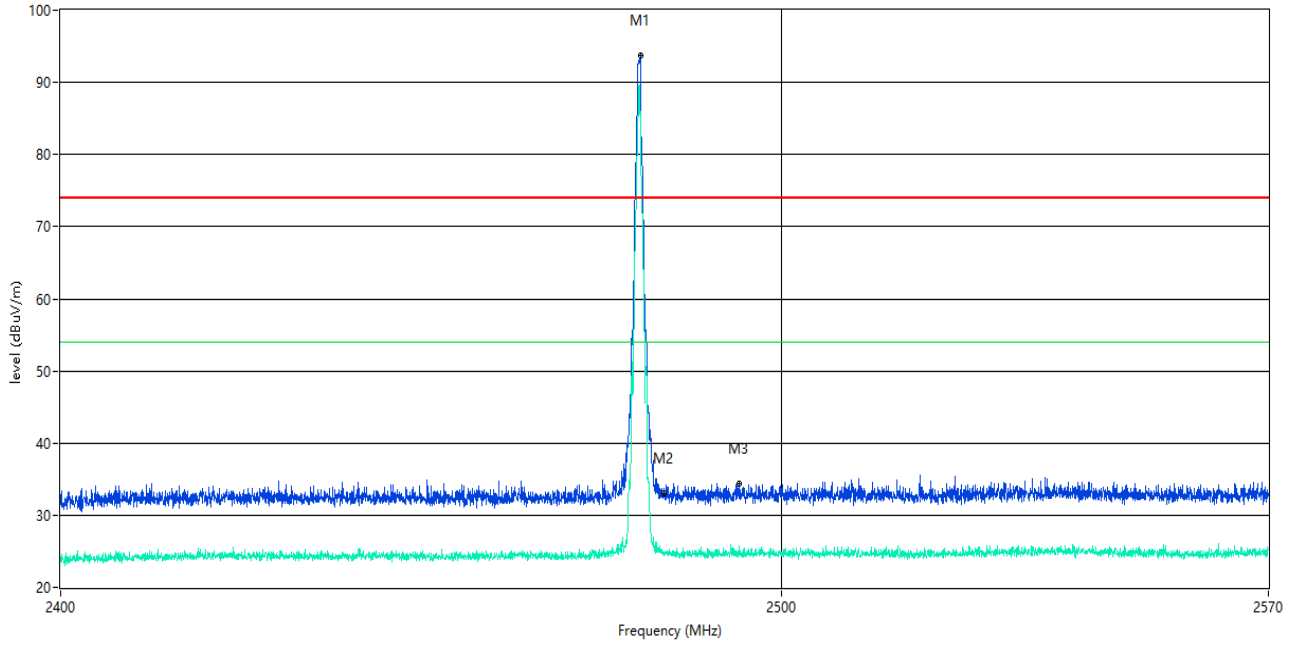

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2480.135	93.66	--	86.0	2.70	74.0	--	54.0	-32.00	304.00	150	Vertical	N.A
2483.500	32.94	--	24.6	2.71	74.0	--	54.0	29.40	44.31	150	Vertical	Pass
2494.114	34.37	--	25.7	2.72	74.0	--	54.0	28.30	230.20	150	Vertical	Pass

GFSK HIGH CHANNEL, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

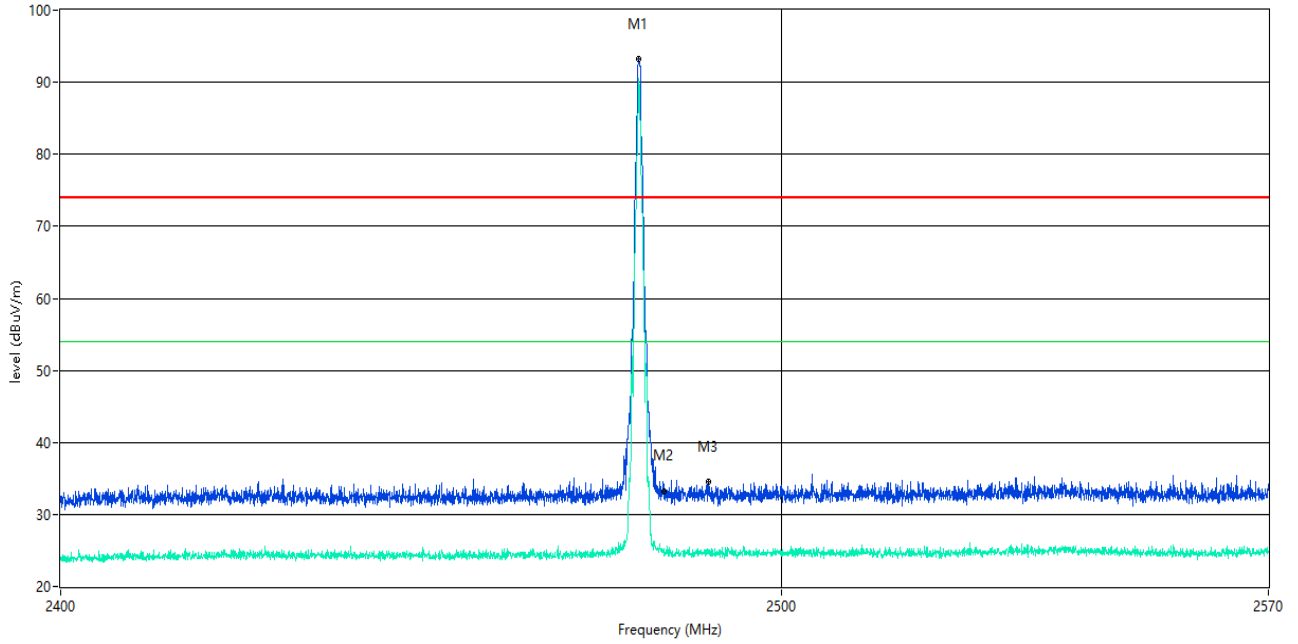

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2479.923	93.17	--	89.8	2.69	74.0	--	54.0	-35.80	9.10	150	Horizontal	N.A
2483.500	33.23	--	24.6	2.71	74.0	--	54.0	29.40	268.17	150	Horizontal	Pass
2489.695	34.52	--	25.1	2.71	74.0	--	54.0	28.90	9.10	150	Horizontal	Pass

8-DPSK LOW CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

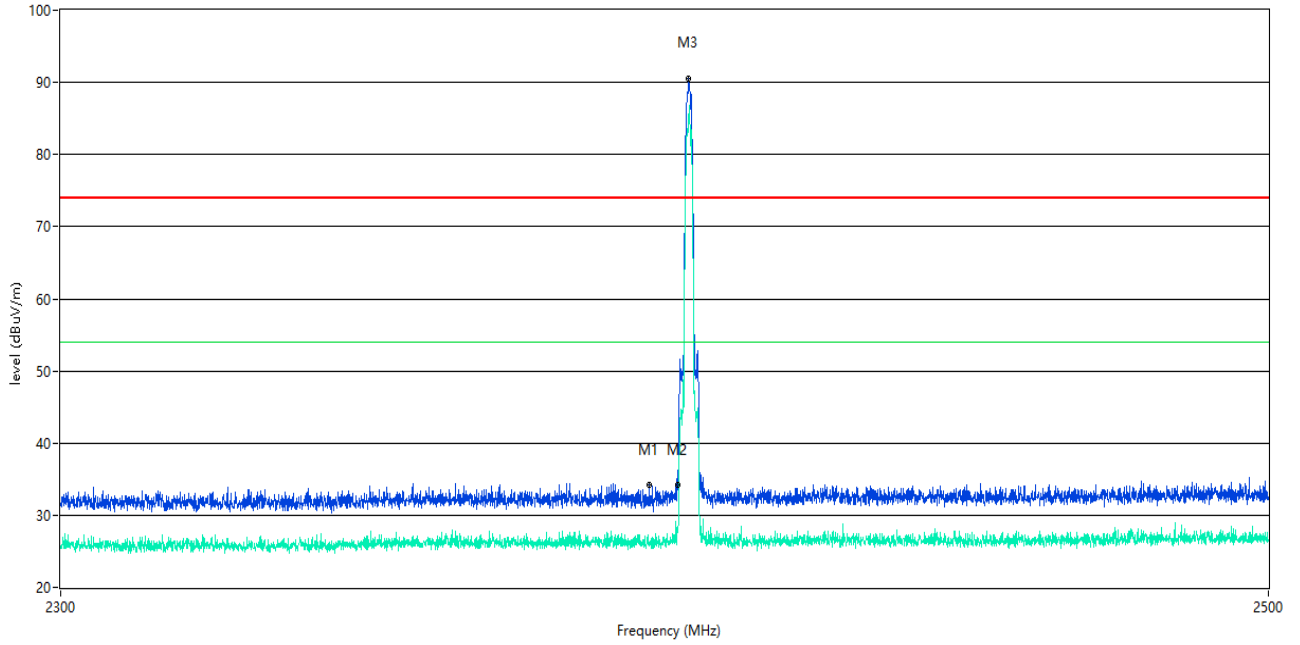

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2395.376	34.14	--	26.3	1.90	74.0	--	54.0	27.70	259.20	150	Vertical	Pass
2400.000	34.32	--	27.9	1.85	74.0	--	54.0	26.10	171.70	150	Vertical	Pass
2401.925	90.53	--	85.7	1.91	74.0	--	54.0	-31.70	262.40	150	Vertical	N.A

8-DPSK LOW CHANNEL, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

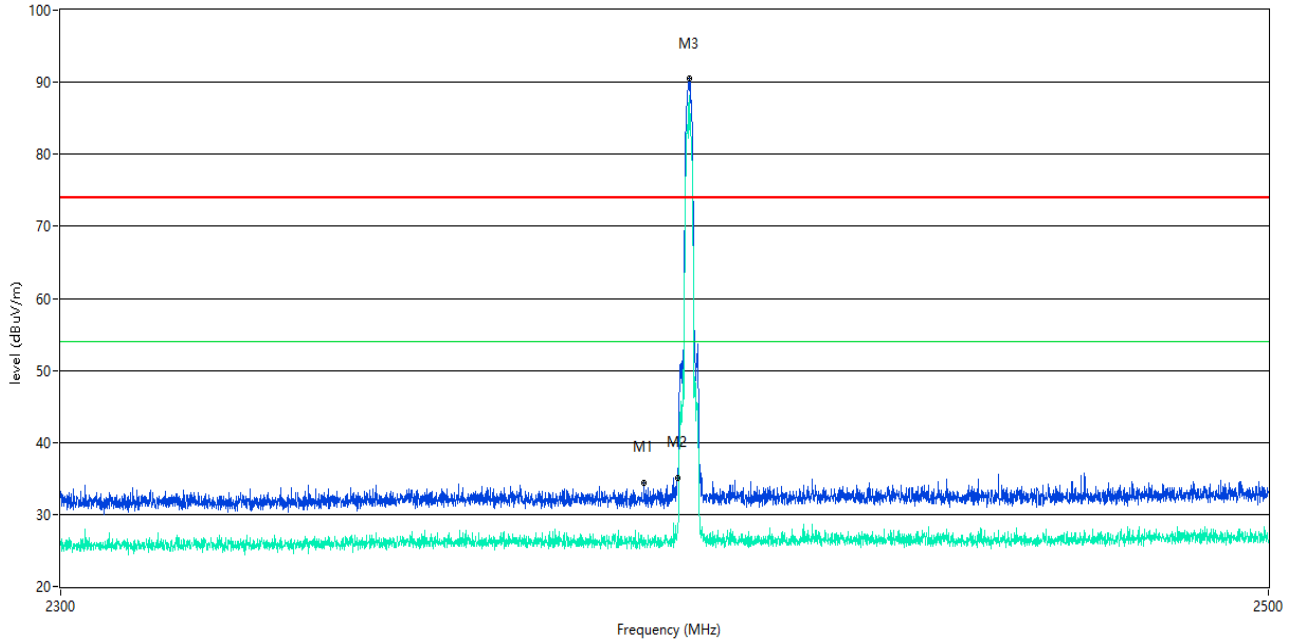

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2394.576	34.41	--	26.8	1.91	74.0	--	54.0	27.20	219.90	150	Horizontal	Pass
2400.000	34.72	--	27.4	1.85	74.0	--	54.0	26.60	185.65	150	Horizontal	Pass
2401.975	90.46	--	88.1	1.91	74.0	--	54.0	-34.10	281.90	150	Horizontal	N.A

8-DPSK HIGH CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

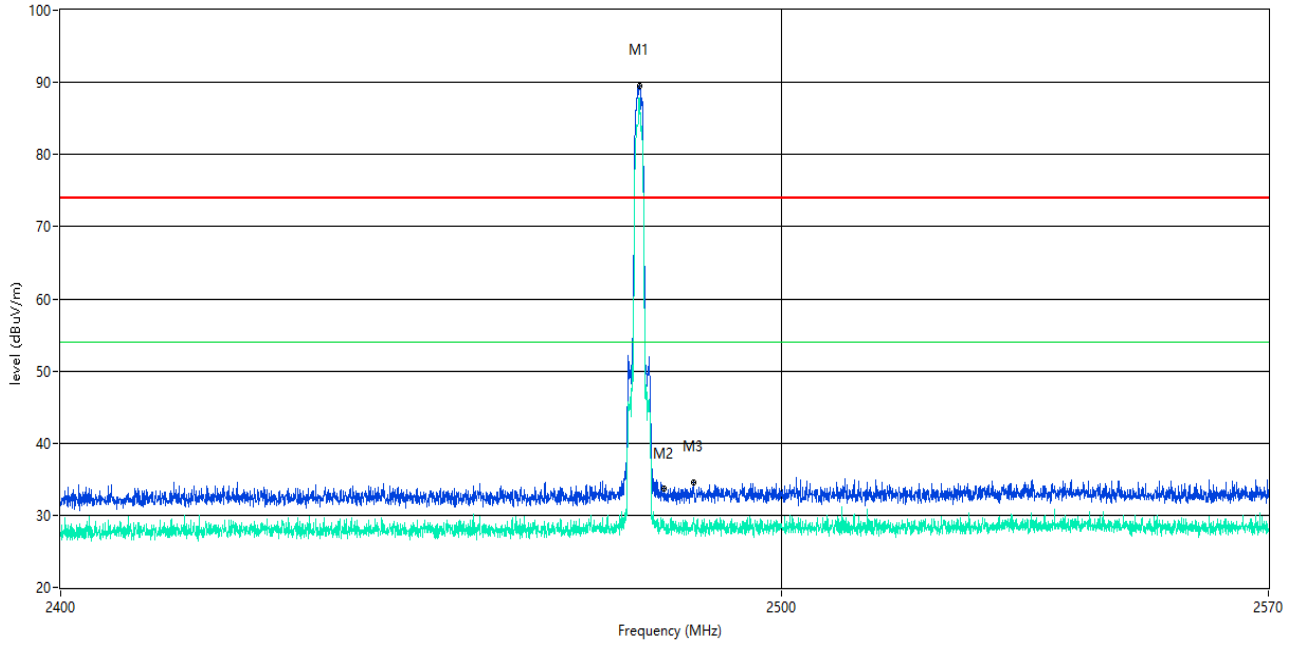

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2480.092	89.52	--	86.9	2.70	74.0	--	54.0	-32.90	131.20	150	Vertical	N.A
2483.500	33.62	--	28.4	2.71	74.0	--	54.0	25.60	228.32	150	Vertical	Pass
2487.656	34.49	--	29.7	2.70	74.0	--	54.0	24.30	336.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL, ANT H

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

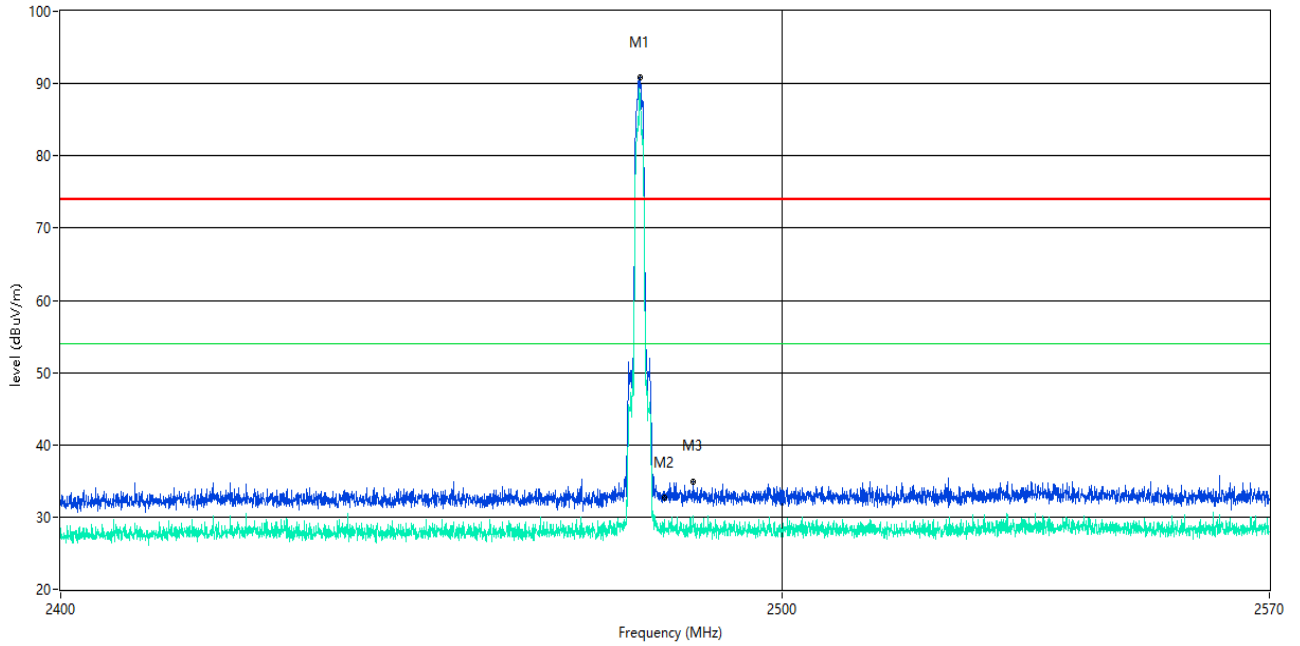


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2480.092	90.82	--	87.2	2.70	74.0	--	54.0	-33.20	309.40	150	Horizontal	N.A
2483.500	32.63	--	27.8	2.71	74.0	--	54.0	26.20	226.86	150	Horizontal	Pass
2487.486	34.90	--	30.1	2.70	74.0	--	54.0	23.90	54.10	150	Horizontal	Pass

Hopping Mode:

GFSK LOW CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

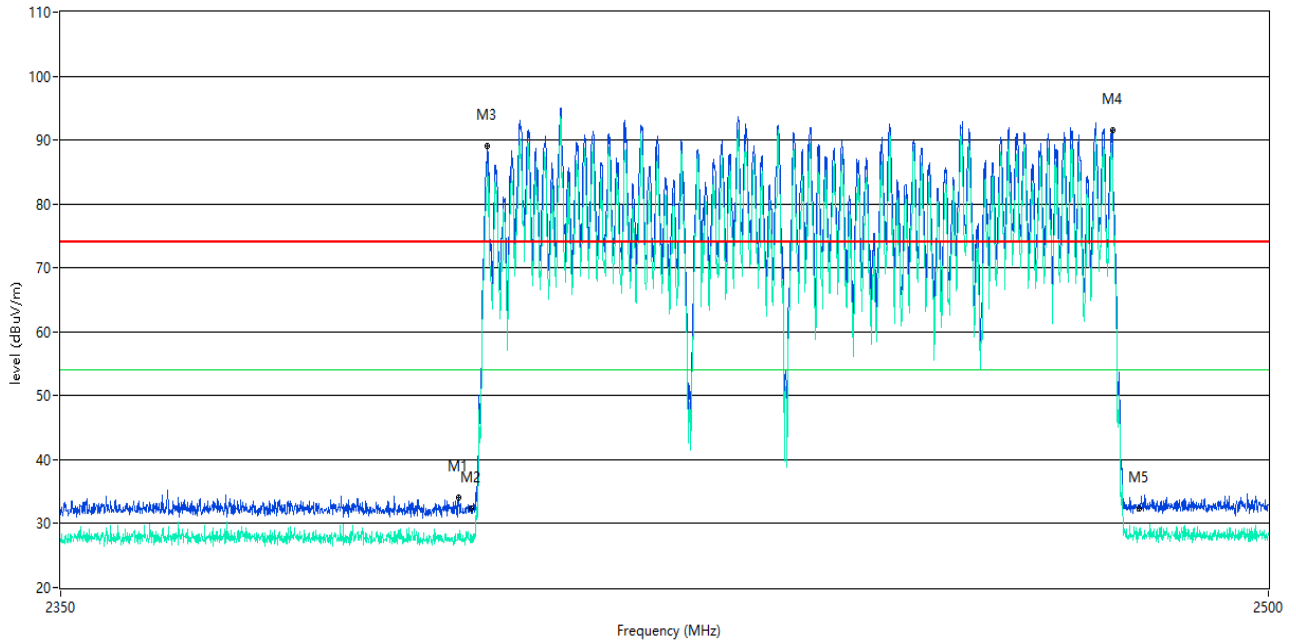

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2398.425	34.15	--	28.3	1.85	74.0	--	54.0	25.70	218.00	150	Vertical	Pass
2400.000	32.32	--	27.6	1.85	74.0	--	54.0	26.40	155.55	150	Vertical	Pass
2401.925	89.03	--	86.2	1.91	74.0	--	54.0	-32.20	285.70	150	Vertical	N.A
2480.105	91.60	--	87.2	2.70	74.0	--	54.0	-33.20	300.50	150	Vertical	N.A
2483.500	32.39	--	28.2	2.71	74.0	--	54.0	25.80	77.47	150	Vertical	Pass

GFSK LOW CHANNEL, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

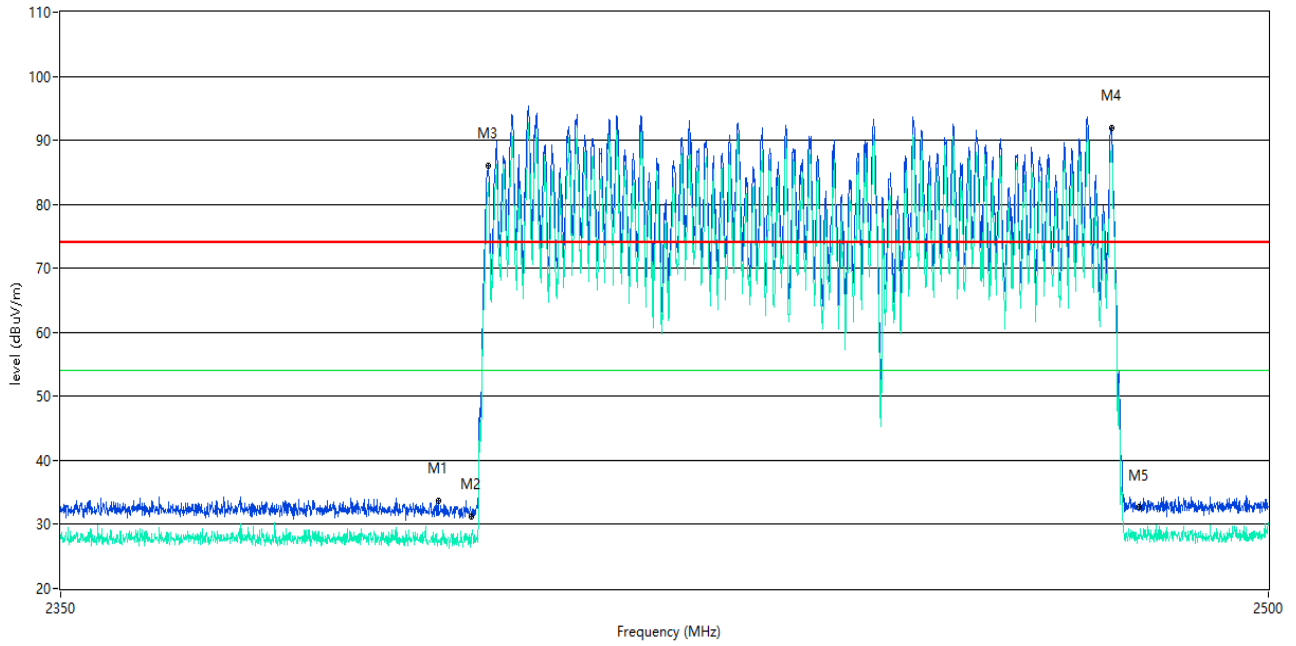

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2395.876	33.71	--	27.1	1.88	74.0	--	54.0	26.90	199.40	150	Horizontal	Pass
2400.000	31.49	--	28.1	1.85	74.0	--	54.0	25.90	188.65	150	Horizontal	Pass
2402.074	85.97	--	83.3	1.91	74.0	--	54.0	-29.30	113.20	150	Horizontal	N.A
2480.005	92.00	--	89.2	2.70	74.0	--	54.0	-35.20	18.00	150	Horizontal	N.A
2483.500	32.68	--	28.3	2.71	74.0	--	54.0	25.70	153.87	150	Horizontal	Pass

8-DPSK LOW CHANNEL, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

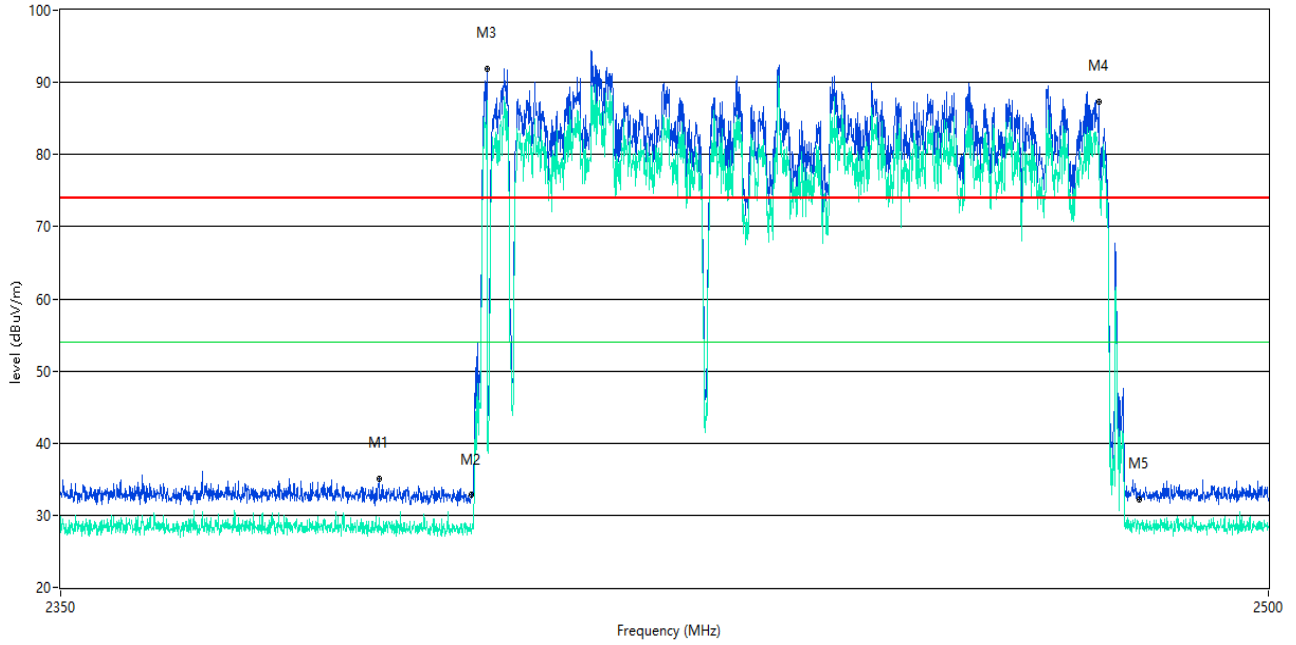

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2388.628	35.07	--	29.7	2.06	74.0	--	54.0	24.30	353.60	150	Vertical	Pass
2400.000	32.66	--	27.8	1.85	74.0	--	54.0	26.20	334.65	150	Vertical	Pass
2401.875	91.81	--	87.4	1.91	74.0	--	54.0	-33.40	303.40	150	Vertical	N.A
2478.355	87.27	--	81.3	2.66	74.0	--	54.0	-27.30	51.10	150	Vertical	N.A
2483.500	32.26	--	28.0	2.71	74.0	--	54.0	26.00	98.33	150	Vertical	Pass

8-DPSK LOW CHANNEL, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

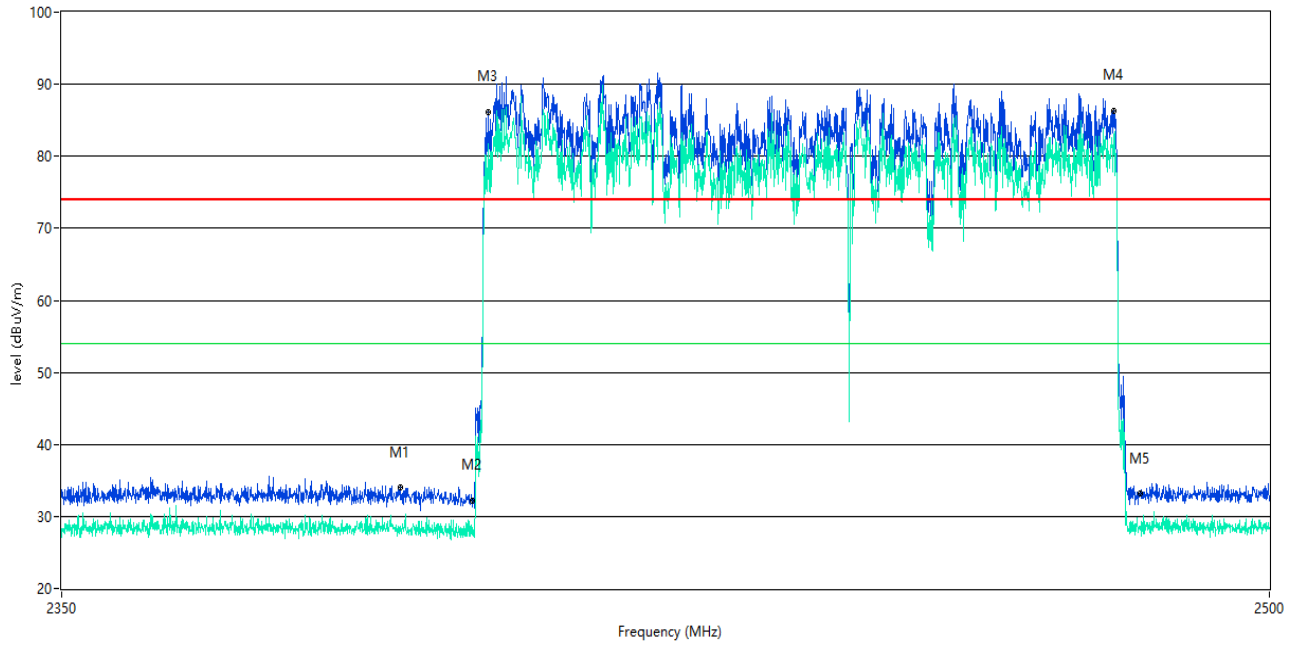

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2391.077	34.09	--	28.2	2.00	74.0	--	54.0	25.80	353.60	150	Horizontal	Pass
2400.000	32.17	--	28.2	1.85	74.0	--	54.0	25.80	75.00	150	Horizontal	Pass
2401.925	86.18	--	81.7	1.91	74.0	--	54.0	-27.70	312.10	150	Horizontal	N.A
2480.105	86.34	--	83.1	2.70	74.0	--	54.0	-29.10	95.90	150	Horizontal	N.A
2483.500	33.11	--	28.6	2.71	74.0	--	54.0	25.40	62.57	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-EC18B0415-AR-2.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-EC18B0415-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-EC18B0415-AI.PDF".

--END OF REPORT--