



A Smarter Vision®

**Technical Report to the FCC and Industry Canada Regarding  
Gentex Corporation - Homelink® V**

**Model: AECHL5 Family  
FCC ID: NZLAECHL5  
IC: 4112-AECHL5  
IC M/N: ECCHLA, ECCHLB, BECHLA**

**Emission Designator: 206KF7D  
12/17/2013**

A report concerning approval for Gentex Corporation Homelink® model AECHL5 Family  
Please issue grant immediately upon review.

Measurements Made by:

Bolay Bun  
Senior EMC Test Engineer  
Gentex Corporation

Measurements Reviewed by:

Brian Miller  
EMC Engineer  
Gentex Corporation

Report and Application Prepared by:

Bolay Bun  
Senior EMC Test Engineer

Report Approved and Submitted by:

Craig Harder  
Lab Manager - EMC Lab

# GENTEX CORPORATION

A Smarter Vision®

Gentex Corporation

Gentex Corporation



A Smarter Vision®

## 1. General Information

### 1.1. Product Description:

The Gentex Corporation HomeLink® HL5 Universal Garage Door Opener is a low-power transceiver OEM device that is installed into an overhead area of the automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices
2. Transmit and receive frequency hopping spread spectrum in the 902 to 928 MHz band using an internal antenna as per Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15.247

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a typical assembly and 2-conductor cable harness were used to power to the unit.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Johnson Controls Interiors, LLC.



A Smarter Vision®

The family certification consists of the following models: ECCHLA, ECCHLB, and BECHLA.

**Family Device Features and PCB's:**

<b>Model</b>	<b>Description</b>	<b>System PCB Number</b>	<b>Transmit PCB Number</b>
<b>ECCHLA</b>	Auto Dimming w/ Compass	705-1768	705-1733
<b>ECCHLB</b>	Base – Auto Dimming	705-1814	705-1733
<b>BECHLA</b>	Base – Auto Dimming Chrome Rin	705-2179	705-1733

**1.2. Related Grants**

This device will have functionality that is covered under CFR 47 15.231. The device will have a FCC ID # of NZLAECHL5 and an IC ID # of 4112A-AECHL5 under both rule parts. A separate report is submitted for functionality covered under CFR 47 15.231.

**1.3. Test Methodology**

Radiated Emissions testing was performed according to ANSI C63.4-2003. The power source for this product is a 12V automotive vehicle battery.

Conducted measurements were performed using a power supply.

Measurements were performed per KDB 867751.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a 2-conductor cable harness was used to interface to the unit. The unit ground is provided through the negative terminal of the harness.

**1.4. Test Facility**

The Open Area Test Site where these measurements were taken, is located on the grounds of Gentex Corporation's Technical Campus, in the city of Holland, county of Ottawa, state of Michigan, United States of America. The site is a fully enclosed 10m weather-protected OATS. All structure materials above the conducting ground-plane are non-metallic and consist of wood, laminated lumber, fiberglass, glue, plastic, or fiberglass reinforced plastic. The site contains a 15-foot diameter turntable capable of supporting large cars and light trucks under test. Tabletop testing was conducted on a smaller 3m turntable described in the site recertification report. The test site has been fully described in a reports filled with the FCC and Industry Canada. The report filed with the FCC is dated November 10, 2013, was



A Smarter Vision®

accepted by the FCC in a letter dated November 15, 2013. The report filled with Industry Canada, dated November 10, 2013, was accepted via a letter dated November 20, 2013. Our OATS is registered with the IC under file number IC# 4112A

### 1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site [www.a2la.org](http://www.a2la.org). Our scope of accreditation covers ANSI C63.4 Radiated Emissions at 3m, FCC 47 CFR Part 15, and IC RSS-210.

## 2. Product Labeling

The FCC Identifier assigned is FCC ID: NZLAECHL5. The Industry Canada certification number is 4112A-AECHL5. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"This device complies with FCC rules Part 15 and with Industry Canada RSS-210. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and Industry Canada rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "IC:" before the certification/registration number only signifies that Industry Canada technical specifications were met.

IC: 4112A-AECHL5      GENTEX MODEL/FCC ID: NZLAECHL5

### 2.1. Label Drawing and Location on Product.

The label drawing and location of the label on the assembly is included in the "Label Drawing\_Label Location.pdf" attachment.

### 3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4 Figure 9(c). The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane. The harness was run to the long edge of the table and dropped to a power supply sitting at base of the table.

Conducted measurements were performed on a non-metallic table approximately 80cm x 90cm, 85cm above the floor.

### 4. Block Diagram

For system block diagram please refer to attachment named "HLV Block Diagram.pdf"

### 5. Test Setup Photographs


#### Radiated Emissions Photos (Setup for Tx and Rx)



Test Setup Side

# GENTEX CORPORATION

A Smarter Vision®

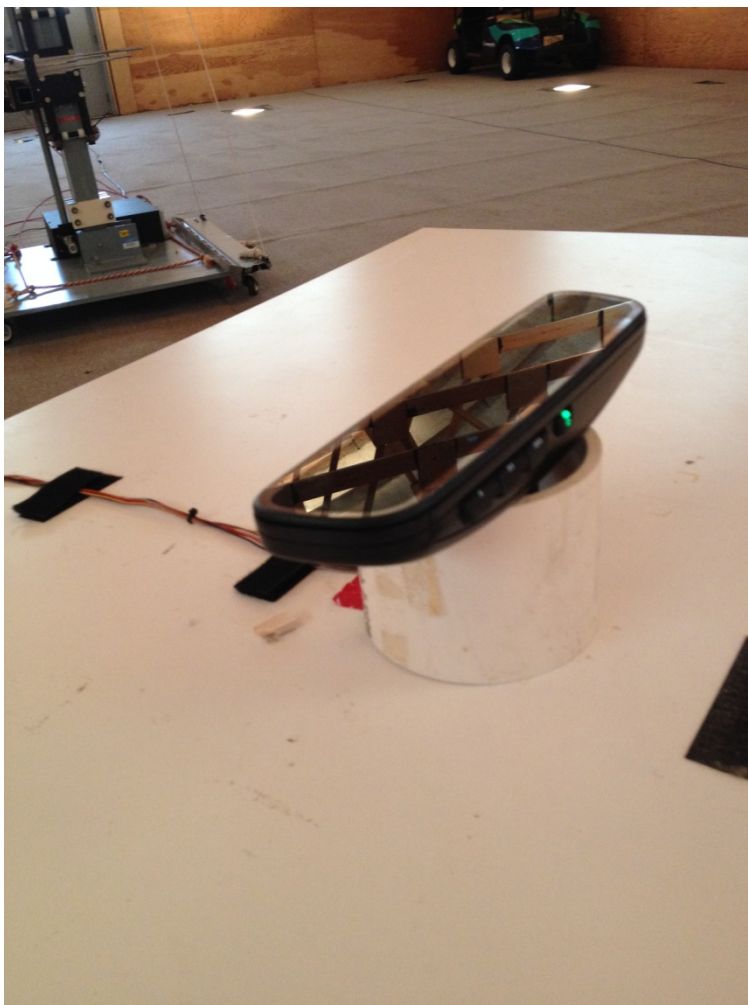

Test Setup Flat

# GENTEX CORPORATION

A Smarter Vision®




Test Set Up End




# GENTEX CORPORATION

A Smarter Vision<sup>®</sup>

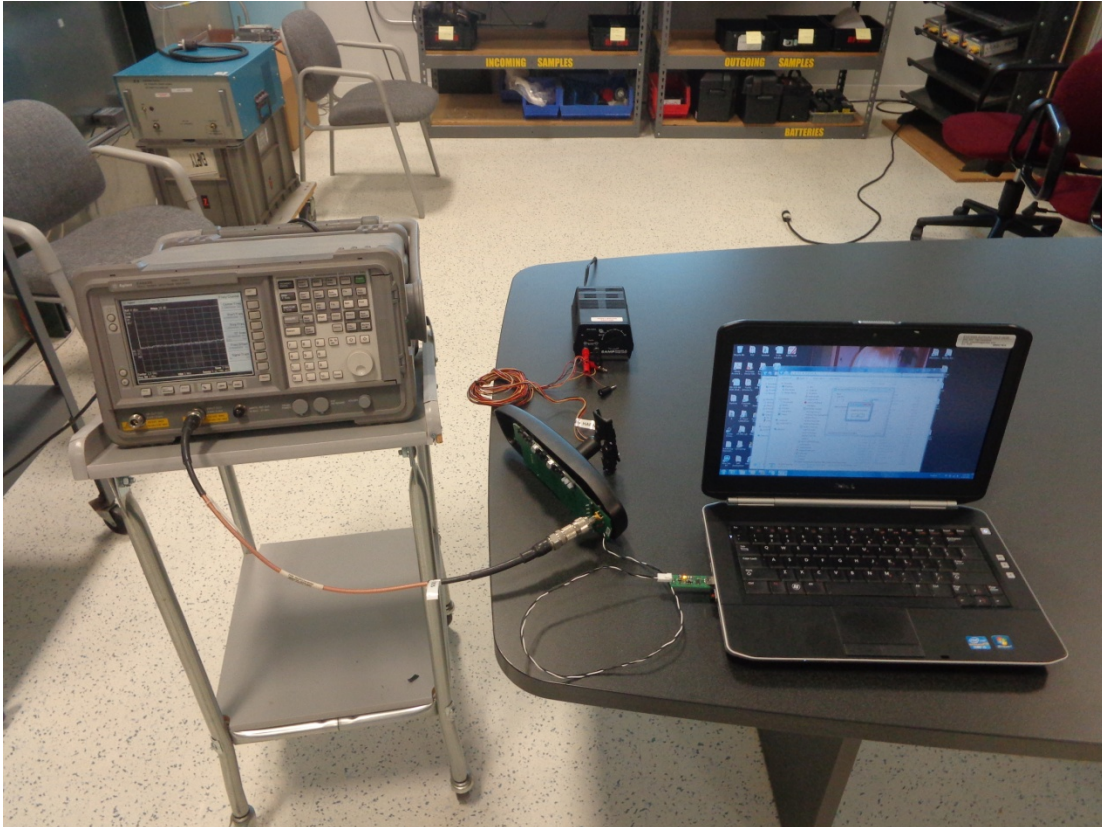

**Conducted Measurement Setup Photo**

### Device Close-Up Conducted Measurement Photo

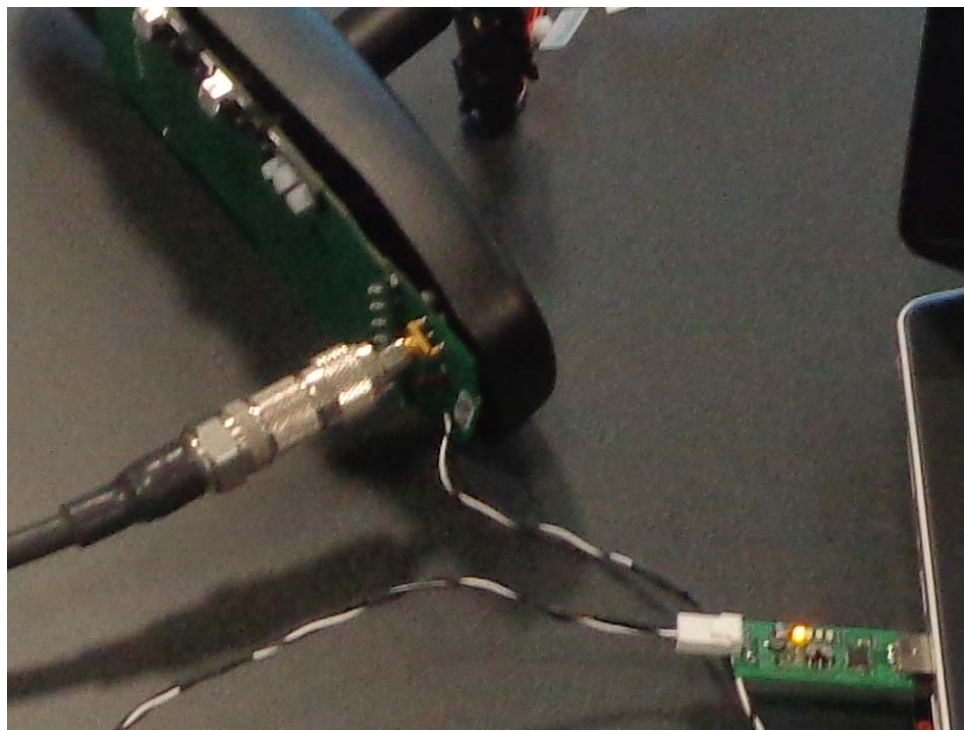

## 6. Powerline Conducted Emissions Measurements

Powerline Conducted Measurements are not required for this product as the part is powered via 12V battery.

## 7. Test Data

### 7.1. Summary of Results (Part 15.247)

- **20dB Bandwidth Requirement:** The plots, show that the maximum 20dB bandwidth was **241.00kHz**, which is within limit. The 99% bandwidth was measured to be **206kHz**.
- **Carrier Frequency Separation Requirement:** The plot, shows that the maximum carrier frequency separation is measured as **502.50kHz**, which is greater than the 20dB bandwidth measurement (**241.00kHz**).
- **Number of Hopping Frequencies Requirement:** The plot, shows the number of hopping frequencies equals **50**, which meets the requirements.

- **Time of Occupancy Requirement:** The time of occupancy can be determined by **4.3ms** multiplied by **80**. This calculated value is equal to **0.344s** which is less than the 0.4s maximum allowed.
- **Band Edge Measurement Requirement:** Per section 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).  
Emissions are at least **40dB** below the fundamental for frequencies less than 902MHz for hopping and non-hopping as shown by the plots below. Emissions are over **60dB** below the fundamental above 928MHz for hopping and for non-hopping as shown by the plots below.
- **Peak Output Power Requirement:** Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928 MHz band and employing at least 50 hopping channels, the maximum peak output power shall not be greater than 1W (30dBm). Measurements of the transmit output field strength were taken with the DUT trained to 902.25, 914.75, and 926.75MHz. A **worst-case emission of 12.06 dBm** occurred at 902.205MHz remained **17.94dB below the FCC and IC limits** for this type of device.
- **Duty Cycle Factor Corrections:** Since the frequency hopping is turned off for the radiated measurements, a duty cycle factor is used to correct the average readings based on the dwell time. This factor is computed from the time domain trace of the dwell time in any 100 ms period. The duty cycle is calculated as the (dwell time/100ms) where the dwell time is limited to 100ms. The duty cycle factor is  $20 \cdot \text{Log}(\text{duty cycle})$ . The duty cycle factor is calculated as **-27.3dB**. ( $-27.3\text{dB} = 20 \cdot \text{Log}(4.3\text{ms}/100\text{ms})$ ).
- **Radiated Spurious Emissions (Transmitter) Requirement:** See the tables in section 7.4.1 for limits. All measurements were below the prescribed limits. The low band has a minimum margin of **2.65dB** for the peak measurement and **10.0dB** for the average measurement, the mid band has a minimum margin of **2.98dB** for the peak measurement and **10.6dB** for the average measurement, and the high frequency band has a minimum margin of **3.76dB** for the peak measurement and **11.1dB** for the average measurement.

- **Radiated Spurious Emissions (Receiver) Requirement:** See the tables in section 7.4.1 for limits. All measurements were below the prescribed limits. The low band has a minimum margin of **17.5dB**, the mid band has a minimum margin of **18.4dB**, and the high frequency band has a minimum margin of **16.4dB**.

## 7.2. Test Equipment Used

### 7.2.1 Conducted Measurement Equipment

<u>Description</u>	<u>Model #</u>	<u>Serial Number</u>	<u>Last Cal Date</u>	<u>Cal Due</u>
MW power Supply	MW122A 2 Amp	n/a	VBU	VBU
Agilent Spectrum Analyzer	E4403	6344	5/14/13	5/14/14
Work Horse Cable 005	WHU18-1818-024	n/a	4/30/13	4/30/14

### 7.2.2 Radiated Measurement Equipment

<u>Description</u>	<u>Model #</u>	<u>Serial Number</u>	<u>Last Cal Date</u>	<u>Cal Due</u>
EMCO Biconical Antenna [20-300 MHz]	3110B	9906-3309	02/20/2012	02/20/2014
EMCO LPA Antenna [200-2000MHz]	3148	9908-1076	01/20/1012	01/20/2014
Electro-metrics Double Ridged Guide [1-18GHz]	RGA-60	6147	09/05/13	09/05/2015
Agilent E-series EMC Analyzer	E4407B	US41192569	10/16/2012	1/01/2014
Amplifier Research	LN1G11	310377	12/31/2013	12/31/2014

## 7.3. Test Equipment Setup and Procedure

Spectrum Analyzer Settings Emissions:


Detector Function :Peak  
 Resolution Bandwidth :120kHz (below 1GHz)  
                                   :1MHz (above 1GHz)  
 Video Bandwidth: :300kHz (below 1GHz)  
                                   :3MHz (above 1GHz)

**Spectrum Analyzer Settings Occupied Bandwidth:**

Detector :Peak  
 Resolution Bandwidth :3 MHz ( to determine peak level)  
                                   :10 kHz (to determine occupied bandwidth)  
 Video Bandwidth :3 MHz ( to determine peak level)  
                                   :30 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4 for stand-alone equipment. The 2-conductor cable harness was routed to the edge of the long side of the table then down to the power supply located on the turntable base.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 7.3.1.

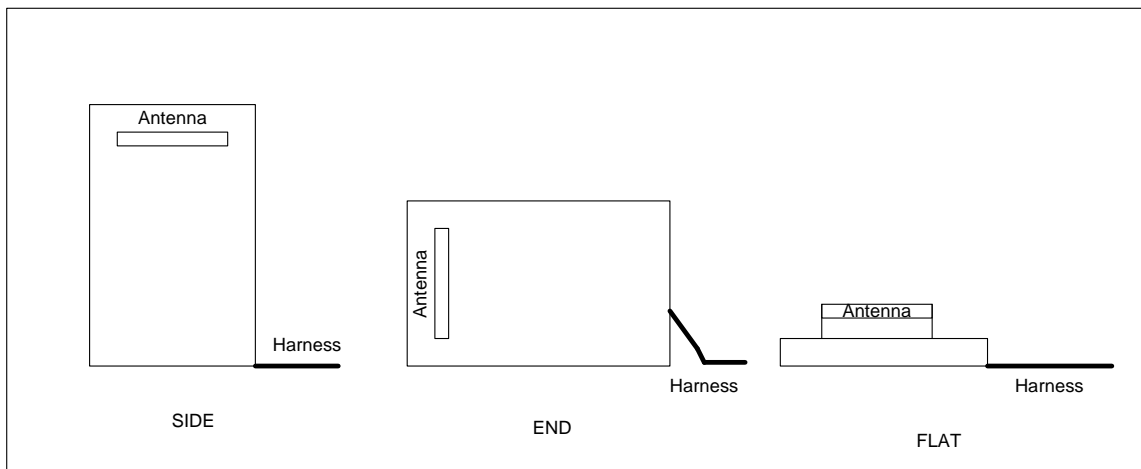

**Figure 7.3.1 EUT Orthogonal Orientations**

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

### 7.4. Measured Data

### 7.4.1 Radiated (Tx) Measurements

Note: The Duty Cycle Correction factors are worst case based on a 4.3ms dwell time.

#### 7.4.1.1 DUT Transmitting at 902.25MHz (Fundamental) – FCC 15.247

##### Peak Measurement 902.25MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
1	902.25	End	H	97.23	137.0	39.76
2	1804.5	Side	H	63.37	77.2	13.86
3	2706.75	Side	H	71.33	74.0	2.65
4	3609	Flat	H	69.35	74.0	4.63
5	4511.25	Flat	V	54.93	74.0	19.05
6	5413.5	Side	H	62.99	74.0	10.99
7	6315.75	End	V	57.74	77.2	19.49
8	7218	Flat	H	63.08	77.2	14.15
9	8120.25	Side	V	61.21	74.0	12.77
10	9022.5	Side	H	61.1	74.0	12.88

##### Average Measurement 902.25MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
3	2706.75	Side	H	71.33	-27.3306	44.0	54.0	10.0
4	3609	Flat	H	69.35	-27.3306	42.0	54.0	12.0
5	4511.25	Flat	V	54.93	-27.3306	27.6	54.0	26.4
6	5413.5	Side	H	62.99	-27.3306	35.7	54.0	18.3
9	8120.25	Side	V	61.21	-27.3306	33.9	54.0	20.1
10	9022.5	Side	H	61.1	-27.3306	33.8	54.0	20.2

### 7.4.1.2 DUT Transmitting at 914.75MHz (Fundamental) – FCC 15.247

#### Peak Measurement 914.75MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
1	914.75	End	H	100.6	137.0	36.39
2	1829.5	End	V	63.82	80.6	16.78
3	2744.25	Side	H	71	74.0	2.98
4	3659	Flat	H	65.04	74.0	8.94
5	4573.75	Side	H	53.36	74.0	20.62
6	5488.5	Side	H	61.99	74.0	11.99
7	6403.25	Side	V	57.24	80.6	23.36
8	7318	Side	V	62.67	80.6	17.93
9	8232.75	End	V	63.53	74.0	10.45
10	9147.5	Side	H	60.48	74.0	13.50

#### Average Measurement 914.75MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
3	2744.25	Side	H	71	-27.3306	43.7	54.0	10.3
4	3659	Flat	H	65.04	-27.3306	37.7	54.0	16.3
5	4573.75	Side	H	53.36	-27.3306	26.0	54.0	28.0
6	5488.5	Side	H	61.99	-27.3306	34.7	54.0	19.3
9	8232.75	End	V	63.53	-27.3306	36.2	54.0	17.8
10	9147.5	Side	H	60.48	-27.3306	33.1	54.0	20.8

### 7.4.1.3 DUT Transmitting at 926.75MHz (Fundamental) – FCC 15.247

### Peak Measurement 926.75MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
1	926.75	FALSE	H	100.5	137.0	36.49
2	1853.5	End	H	63.97	80.5	16.53
3	2780.25	Side	H	70.22	74.0	3.76
4	3707	Flat	H	62.41	74.0	11.57
5	4633.75	Side	H	52.93	74.0	21.05
6	5560.5	End	V	62.48	80.5	18.02
7	6487.25	Flat	H	59.54	80.5	20.96
8	7414	Side	H	61.53	80.5	18.97
9	8340.75	End	H	60.27	74.0	13.71
10	9267.5	Side	H	61.19	74.0	12.79

### Average Measurement 926.75MHz

	Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Measurement (dBuV/m)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
3	2780.25	Side	H	70.22	-27.3306	42.9	54.0	11.1
4	3707	Flat	H	62.41	-27.3306	35.1	54.0	18.9
5	4633.75	Side	H	52.93	-27.3306	25.6	54.0	28.4
6	5560.5	End	V	62.48	-27.3306	35.1	54.0	18.8
9	8340.75	End	H	60.27	-27.3306	32.9	54.0	21.0
10	9267.5	Side	H	61.19	-27.3306	33.9	54.0	20.1

## 7.4.2 Conducted Measurements

### 7.4.2.1 Occupied Bandwidth Measurement (FCC Part 15.247)

**20dB Bandwidth Requirement:** Per 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a





A Smarter Vision<sup>®</sup>

minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. In this design, the 20dB bandwidth of the hopping channel is less than 250kHz, so the system shall use at least 50 hopping channels.

This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT.


In measurement of the 20dB bandwidth, the transmit frequency was set to low, middle and high hopping channels. The resolution band width (RBW) was set to > than 1% of the 20dB bandwidth. The span was set to approximately 2 to 3 times the 20dB bandwidth.

The plots, show that the maximum 20dB bandwidth was 241.00kHz, which is within limit. The 99% bandwidth was measured to be 206kHz.

#### 20dB BW Results

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
902.25	241	500
914.75	237	
926.75	236	


### 20 dB BW Low Band Measurement Plot

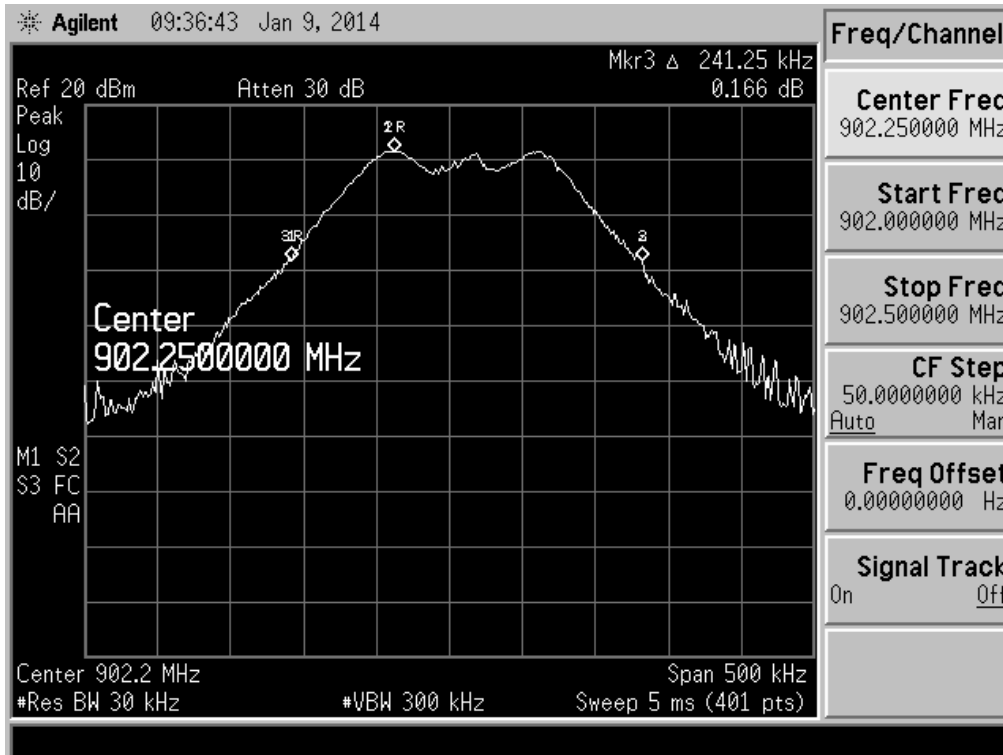


# GENTEX CORPORATION

A Smarter Vision<sup>®</sup>

## 20 dB BW Mid Band Measurement Plot

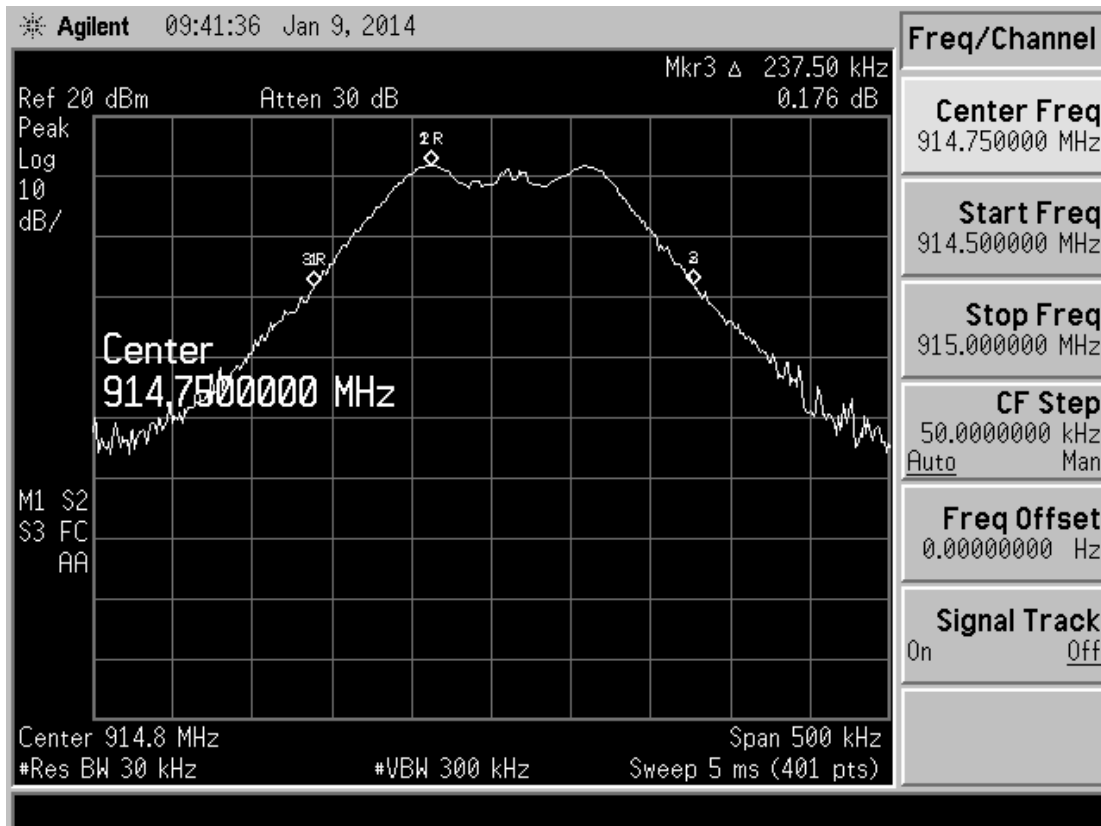


### 20 dB BW High Band Measurement Plot

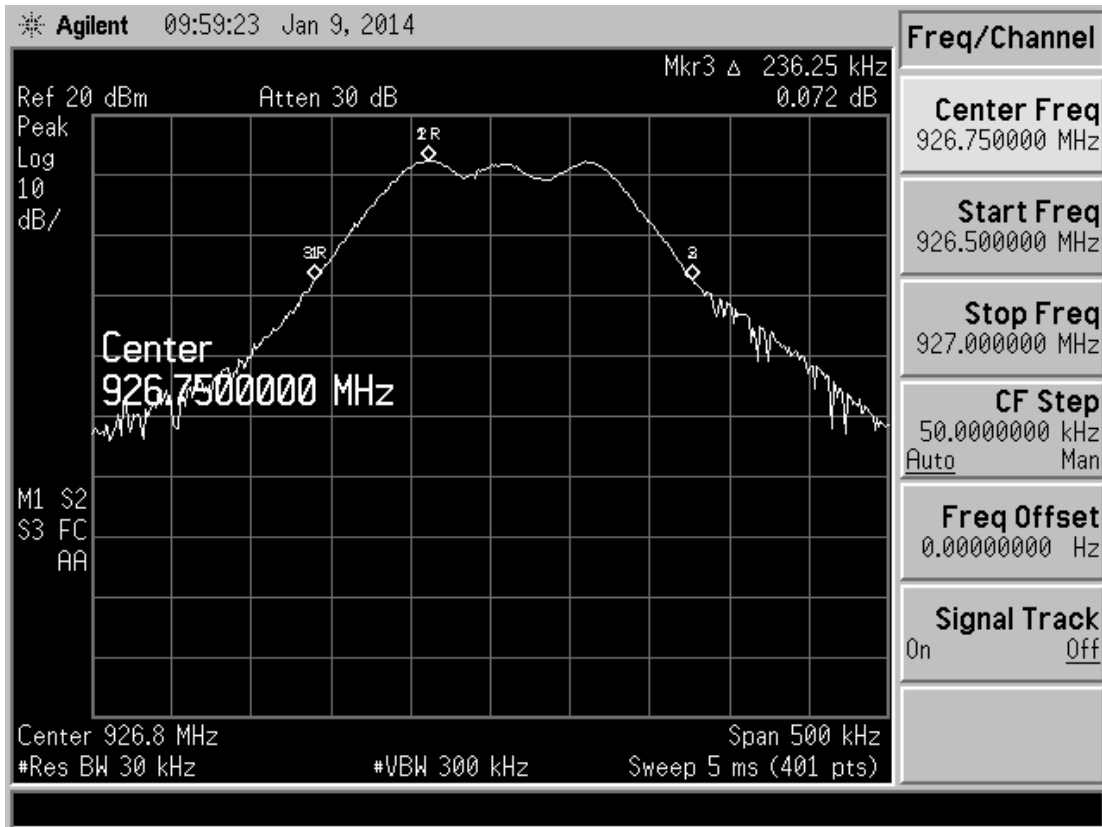


926.75	200	
--------	-----	--


### 99% BW Low Band Measurement Plot

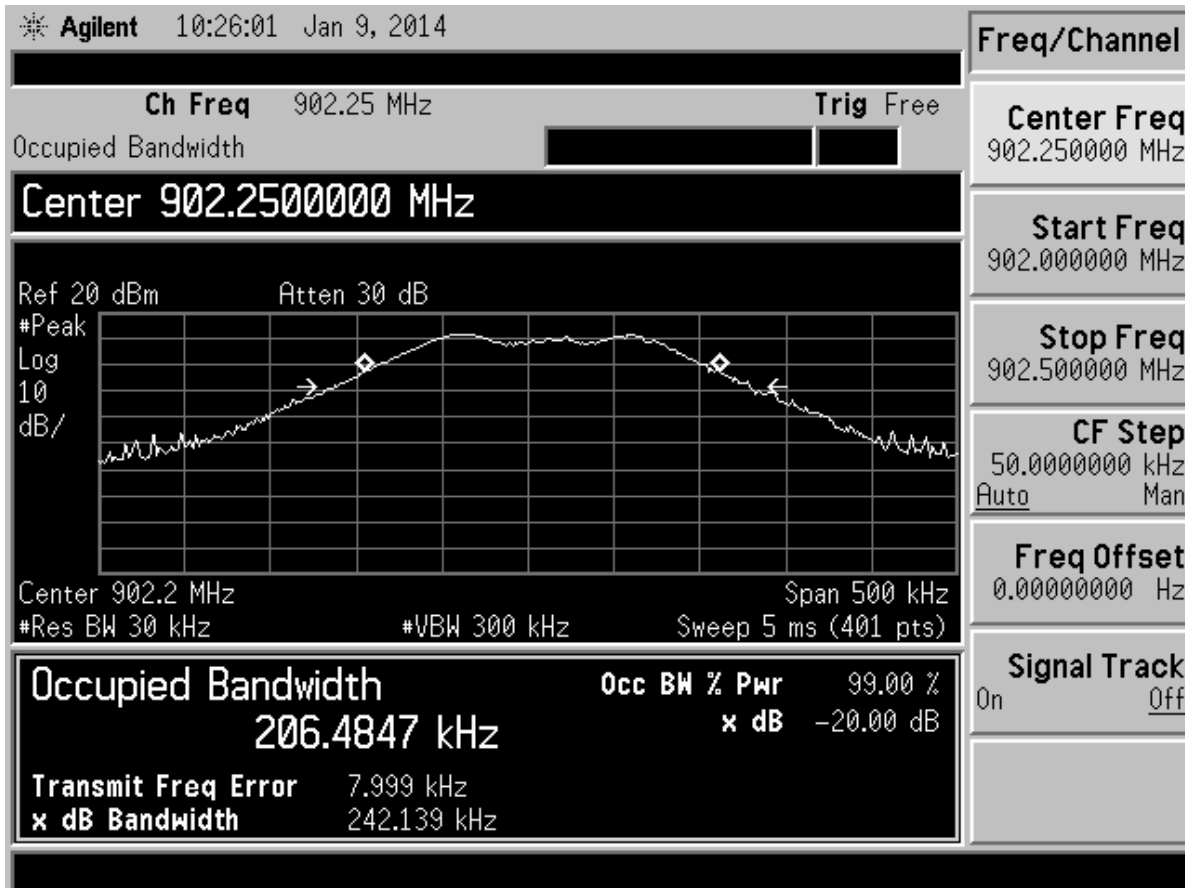

### 99% BW Mid Band Measurement Plot

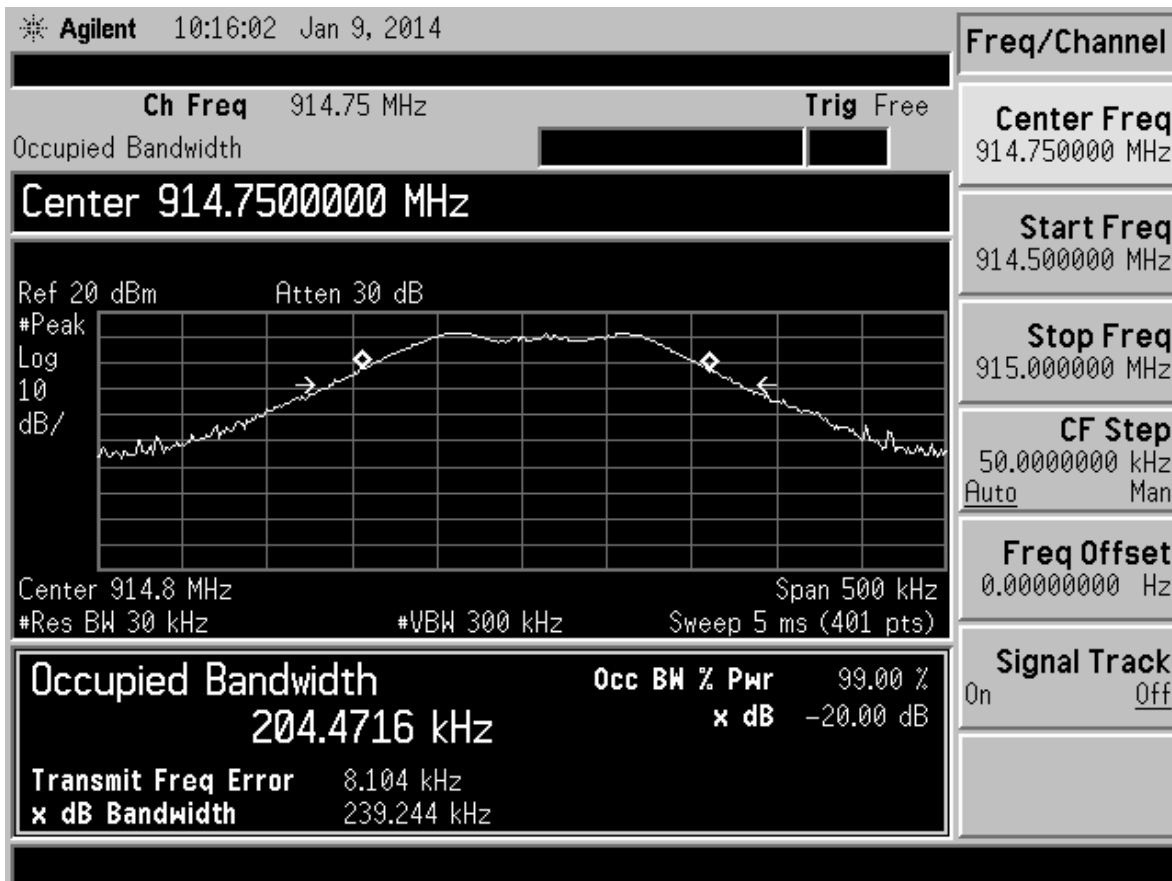

### 99% BW High Band Measurement Plot

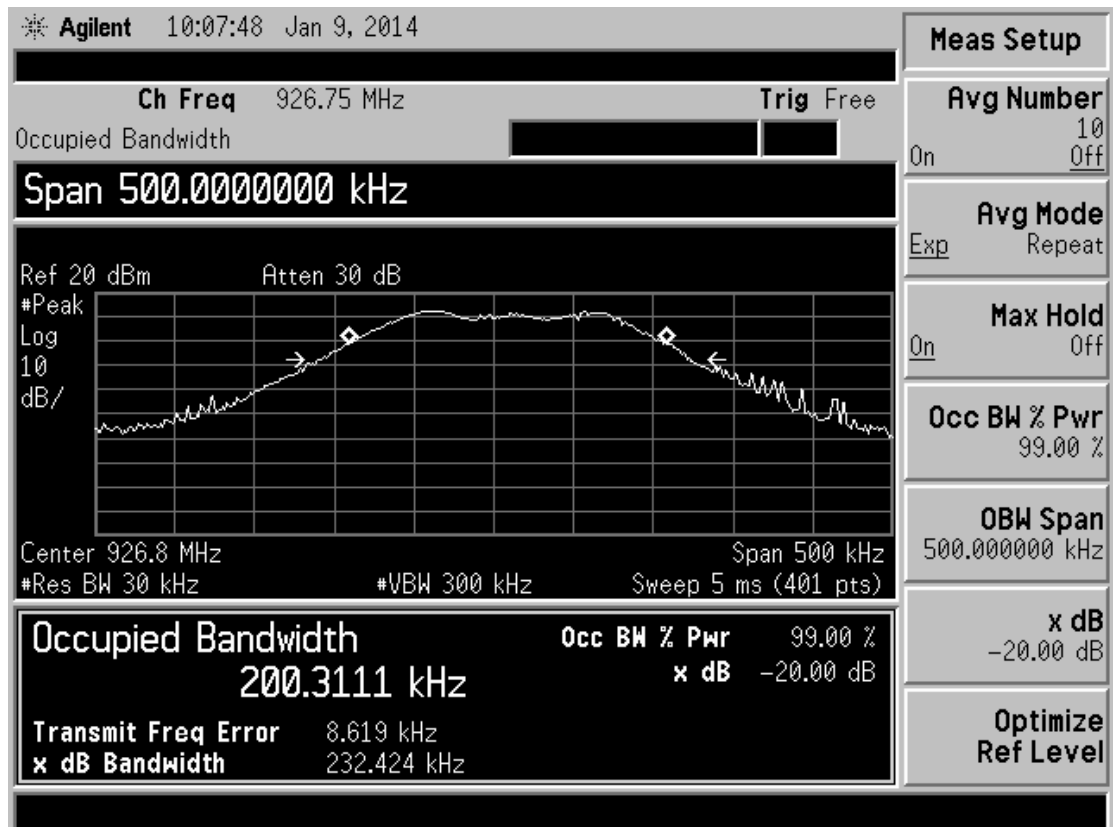



A Smarter Vision<sup>®</sup>

#### 7.4.2.2 Carrier Frequency Separation Measurement (FCC Part 15.247)

**Carrier Frequency Separation Requirement:** Per 15.247(a)(1), Frequency Hopping Systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT.

In measurement of the Carrier Frequency Separation, the RBW was set to > than 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace stabilizes after multiple scans, the marker-delta function is used to determine the separation between the adjacent channels. Measurements were made for low, mid and high channels.


The plot, shows that the maximum carrier frequency separation is measured as 502.50kHz, which is greater than the 20dB bandwidth measurement (235.00kHz).




### Channel Separation Low Band Measurement Plot

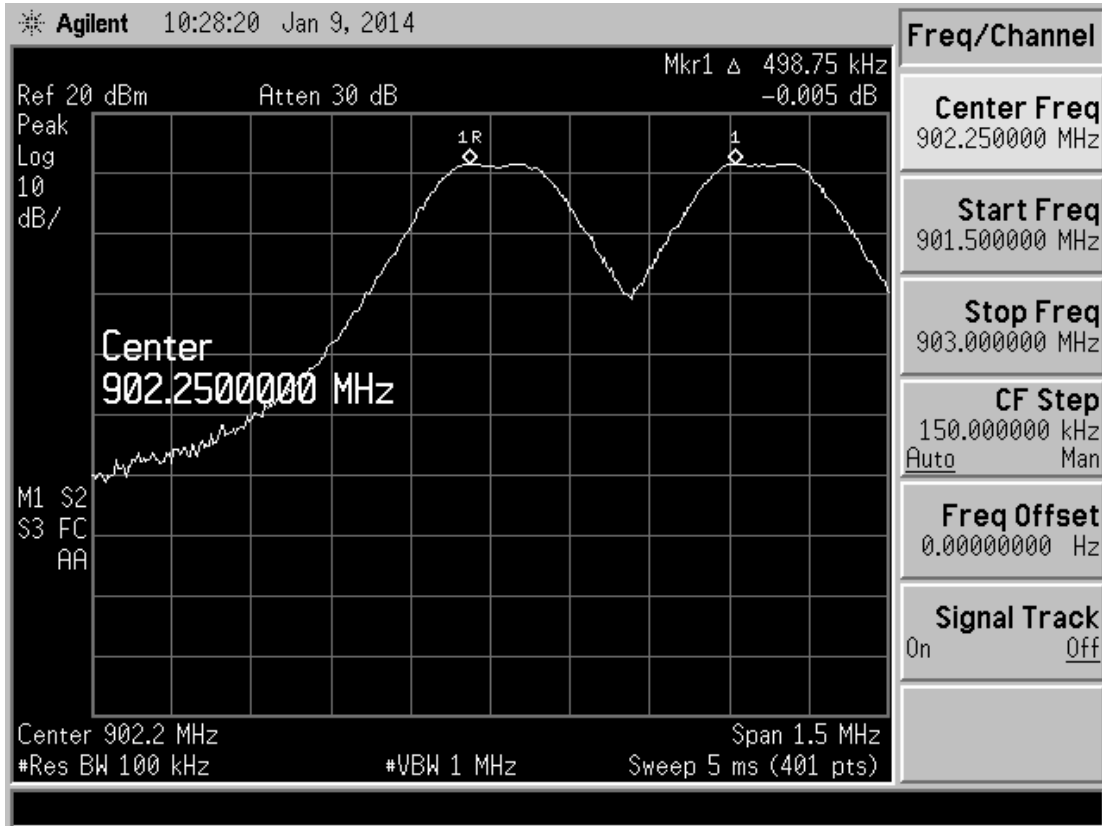

### Channel Separation Mid Band Measurement Plot

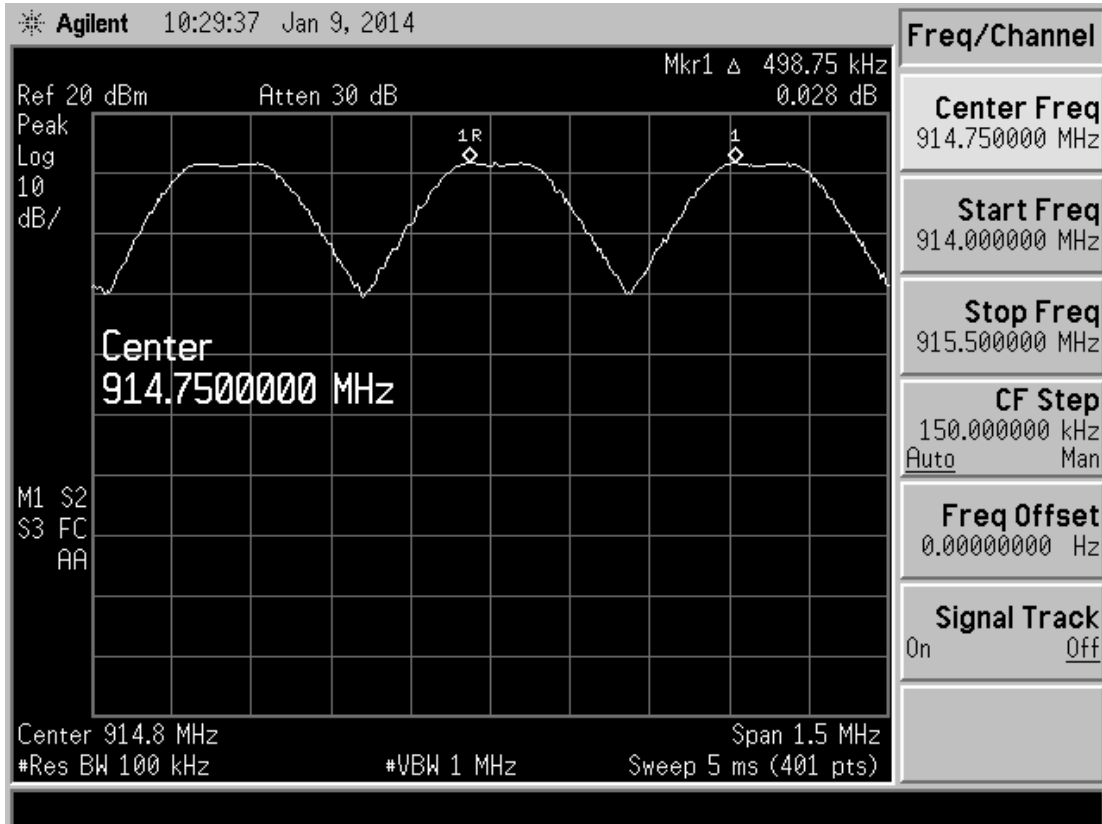

### Channel Separation High Band Measurement Plot

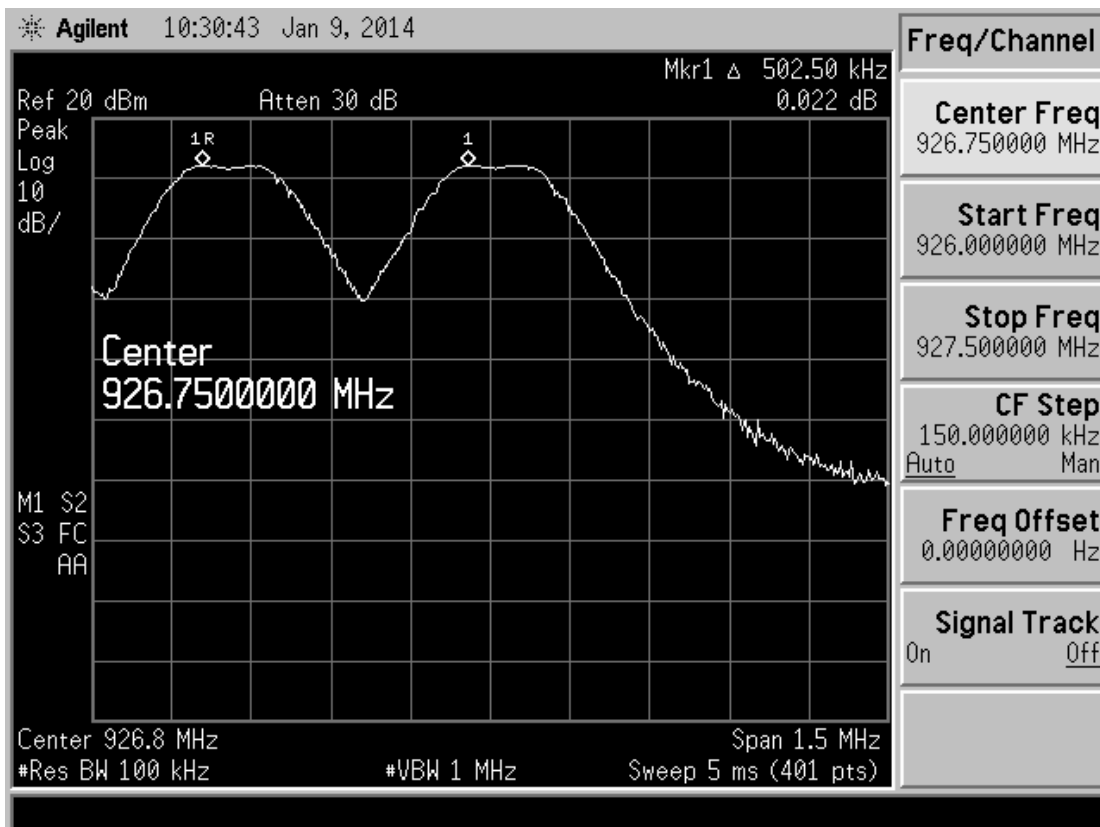


#### 7.4.2.3 Number of Hopping Frequencies Measurement (FCC Part 15.247)

**Number of Hopping Frequencies Requirement:** Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. In this design, the 20dB bandwidth of the hopping channel is less than 250kHz, so the system shall use at least 50 hopping channels.

This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT.

In measurement of the number of hopping frequencies, the DUT was allowed to continuously transmit. The RBW was set to < than 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation. When the trace stabilizes after multiple scans, the number of hopping frequencies is counted.

The plot, shows the number of hopping frequencies equals 50, which meets the requirements.

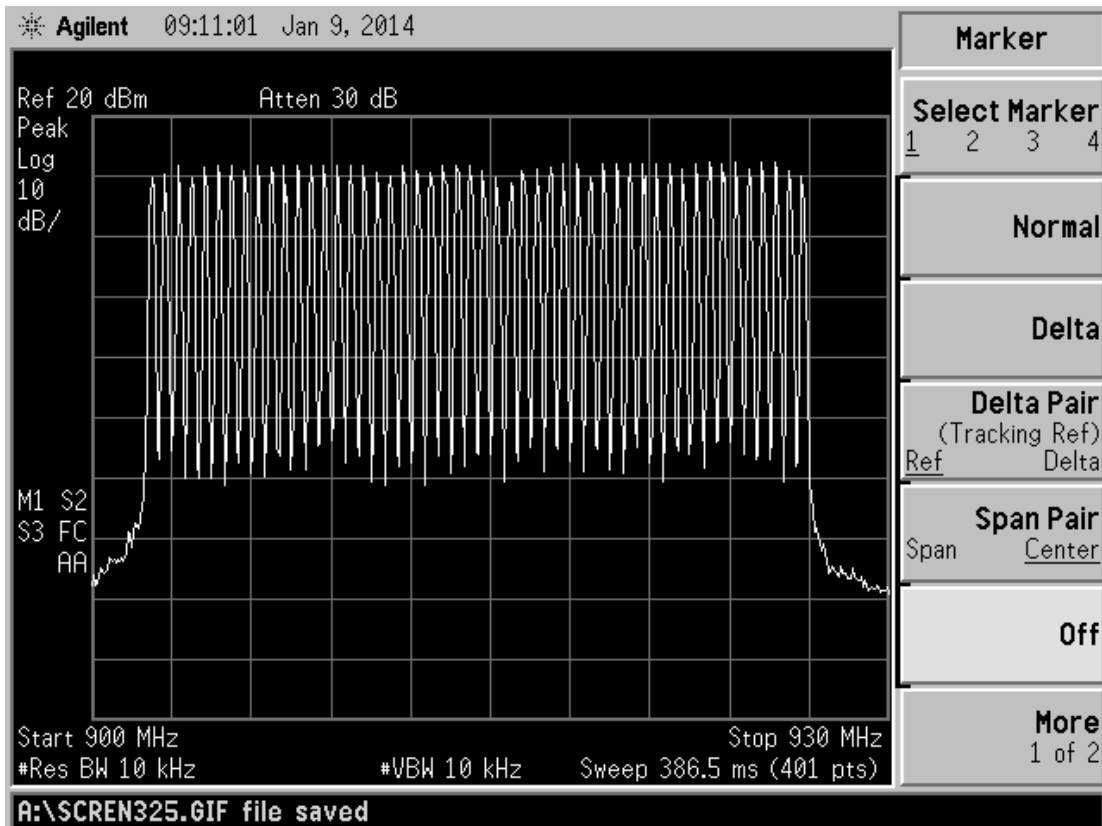

### 7.4.2.3 Band Edge Measurement (FCC Part 15.247)

Per section 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter




A Smarter Vision<sup>®</sup>

demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT. The measurements are also performed without hopping on multiple channels.

For the Low Frequency Band Edge, emissions are at least 40dB below the fundamental for frequencies less than 902MHz for hopping and non-hopping as shown by the plots below. For the High Frequency Band Edge, emissions are over 59dB below the fundamental above 928MHz for hopping and for non-hopping as shown by the plots below.


### Hopping Low Frequency Band Edge

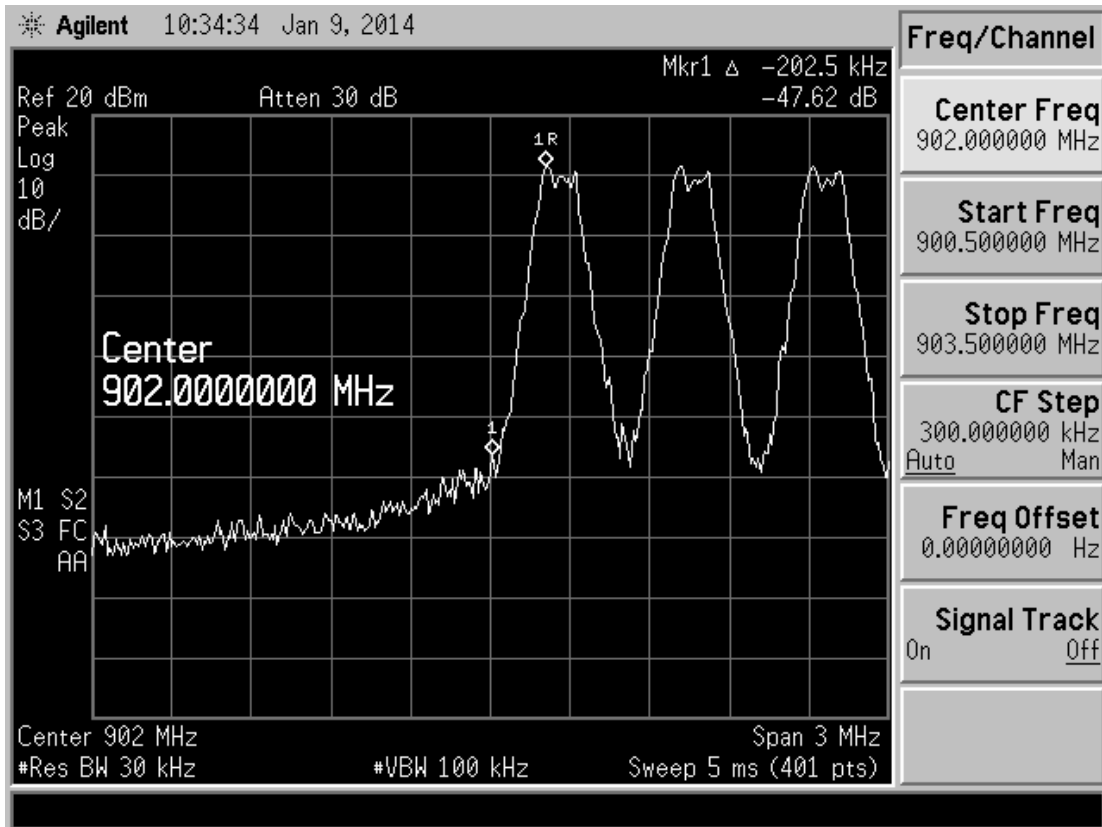

### Non - Hopping Low Frequency Band Edge

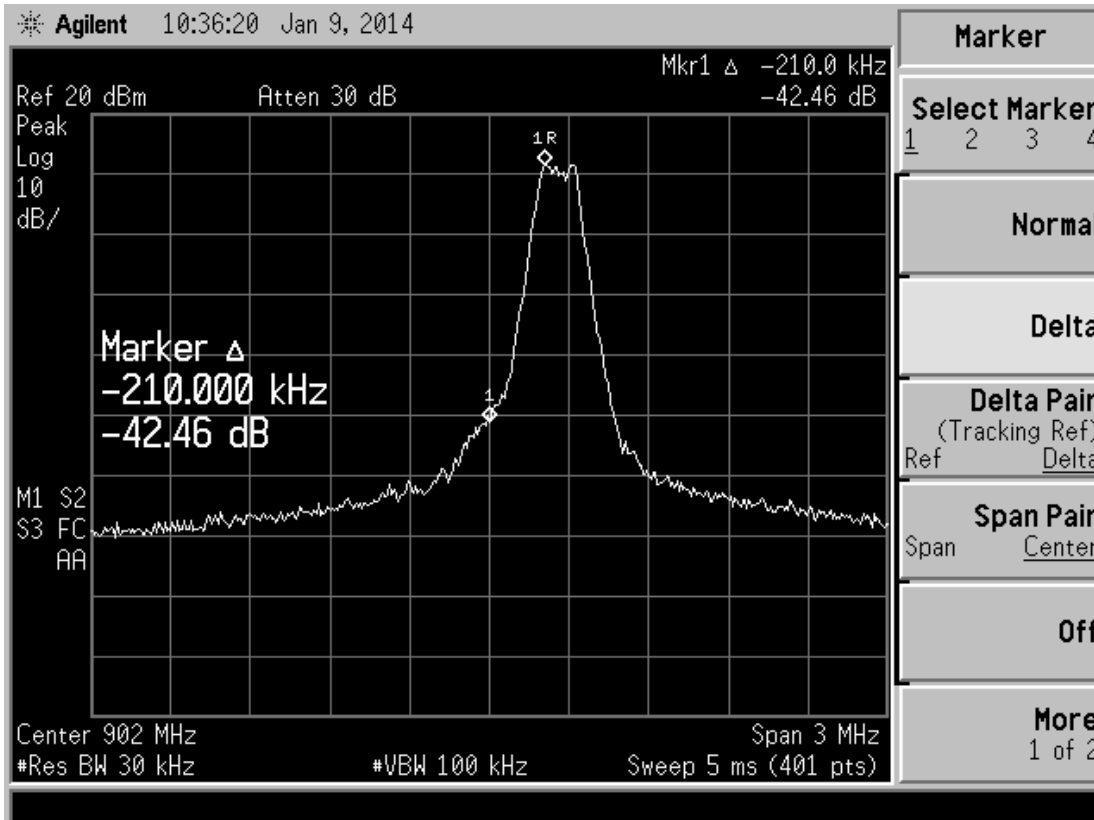


### Hopping High Frequency Band Edge

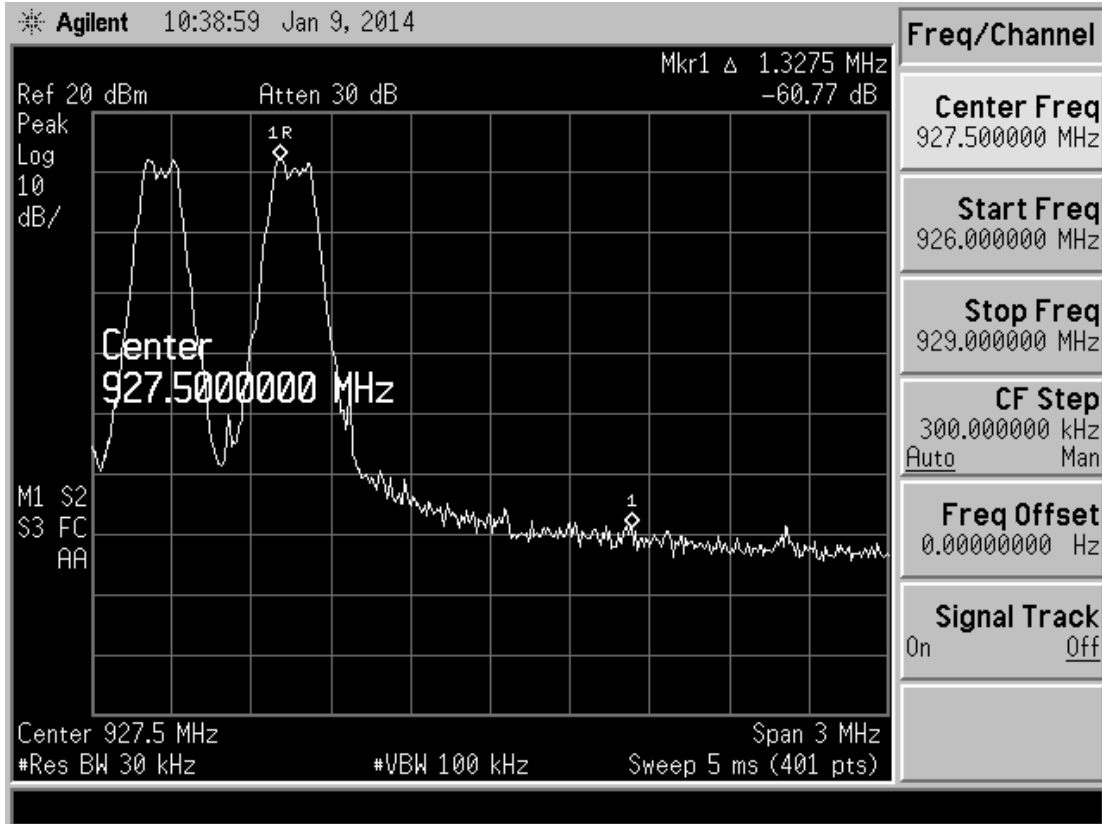



### Non - Hopping High Frequency Band Edge

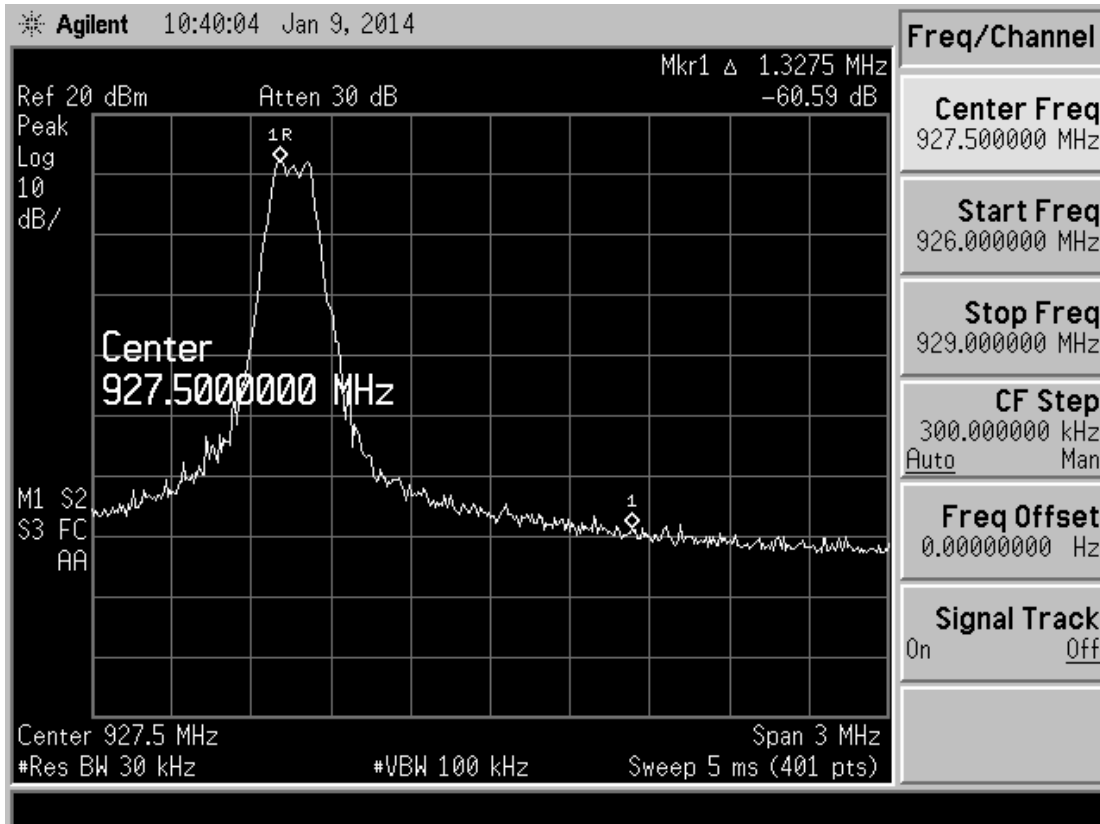

#### 7.4.2.4 Peak Power (FCC Part 15.247)


Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928 MHz band and employing at least 50 hopping channels, the maximum peak output power shall not be greater than 1W (30dBm).

This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT.


Peak power was measured with the transmitter set separately at 902.25MHz, 914.75MHz, and also 926.75MHz. For each of the frequencies, the peak

power was less than 30dBm. At 902.25 the peak power was 11.78dBm, at 914.75 the peak power was 11.94dBm, and at 926.75 the peak power was 12.06dBm, as shown in the plots below.


### Peak Power Low Band Measurement Plot

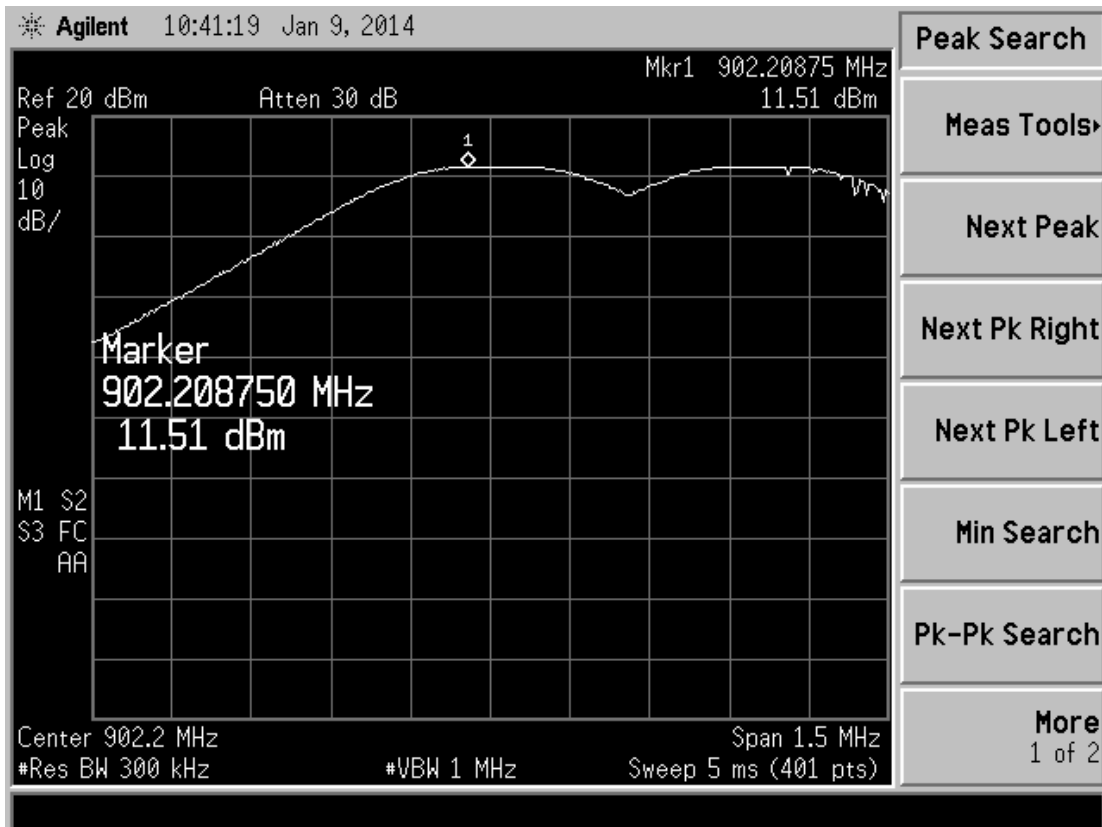

### Peak Power Mid Band Measurement Plot

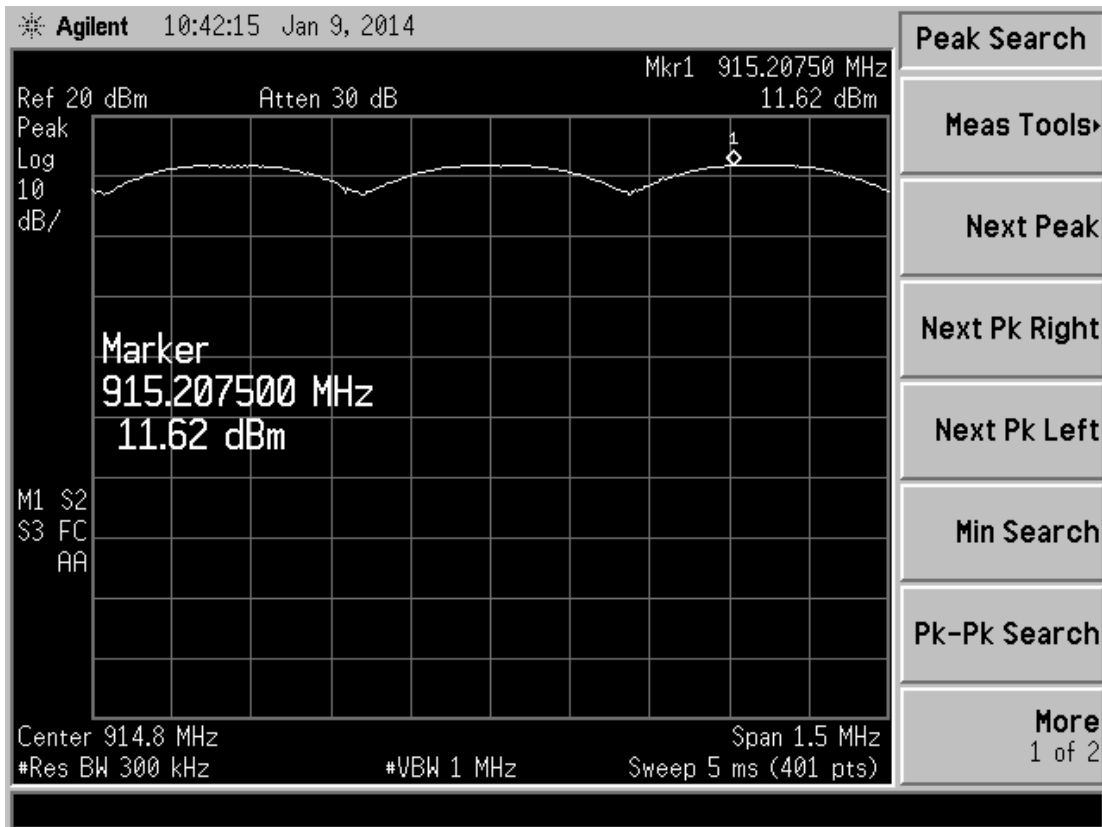

### Peak Power High Band Measurement Plot

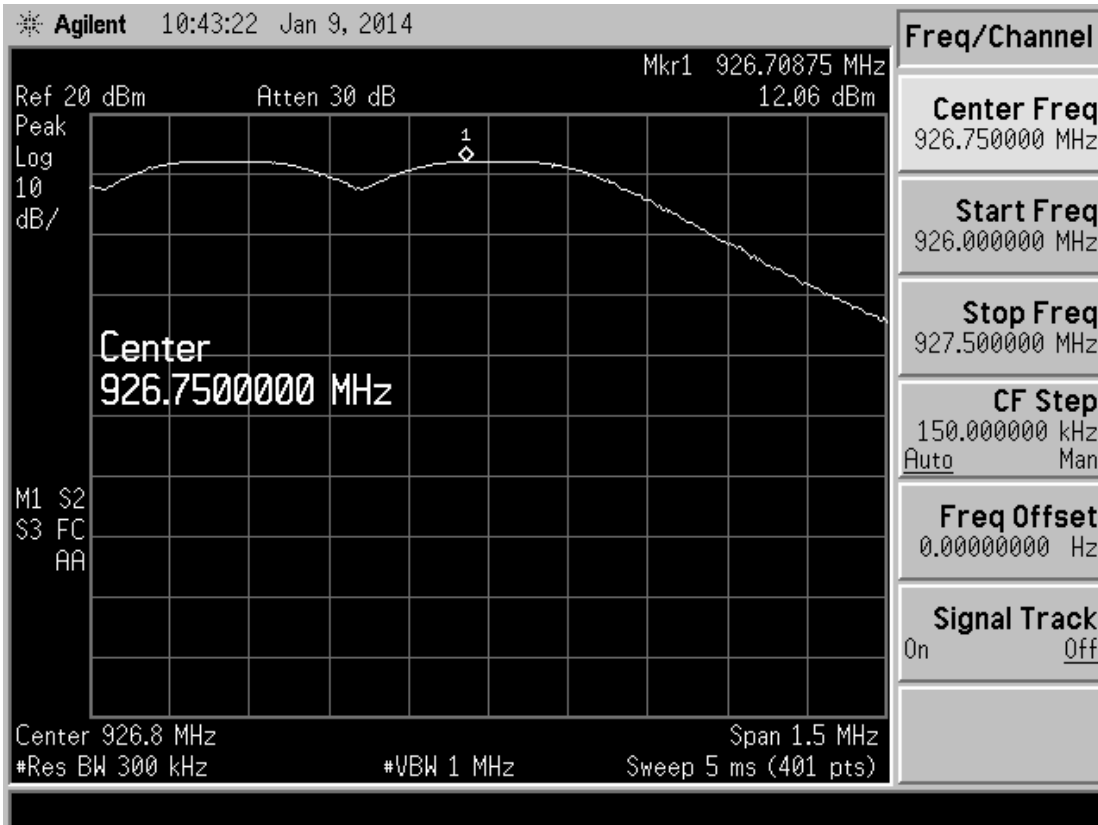

#### 7.4.2.5 Time of Occupancy (FCC Part 15.247)


Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band, if the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

This measurement is a conducted measurement. Prior to the measurement the EUT is placed into hopping mode via a communications board attached to the EUT. The part was placed in Wireless Diagnostics mode with the "Hop" message as it produced the worst case total dwell times. Within Wireless diagnostic mode, the "Info" message produced longer individual on times, but did not have as many transmissions in a 20s period.


In measurement of the time of occupancy, the RBW was set to 1MHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop.

The figures below show the hop dwell time for each band


### Dwell Time Low Band Measurement Plot for Wireless Diagnostics Mode

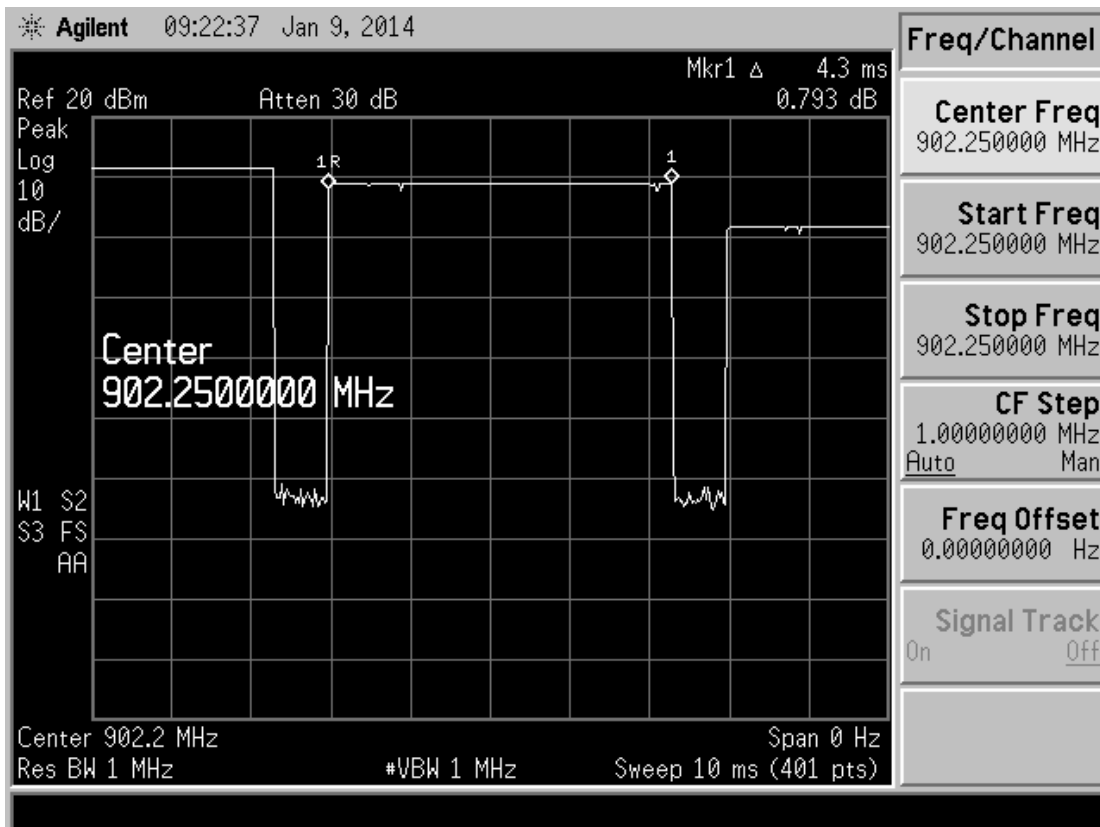

### Dwell Time Mid Band Measurement Plot Wireless Diagnostic Mode

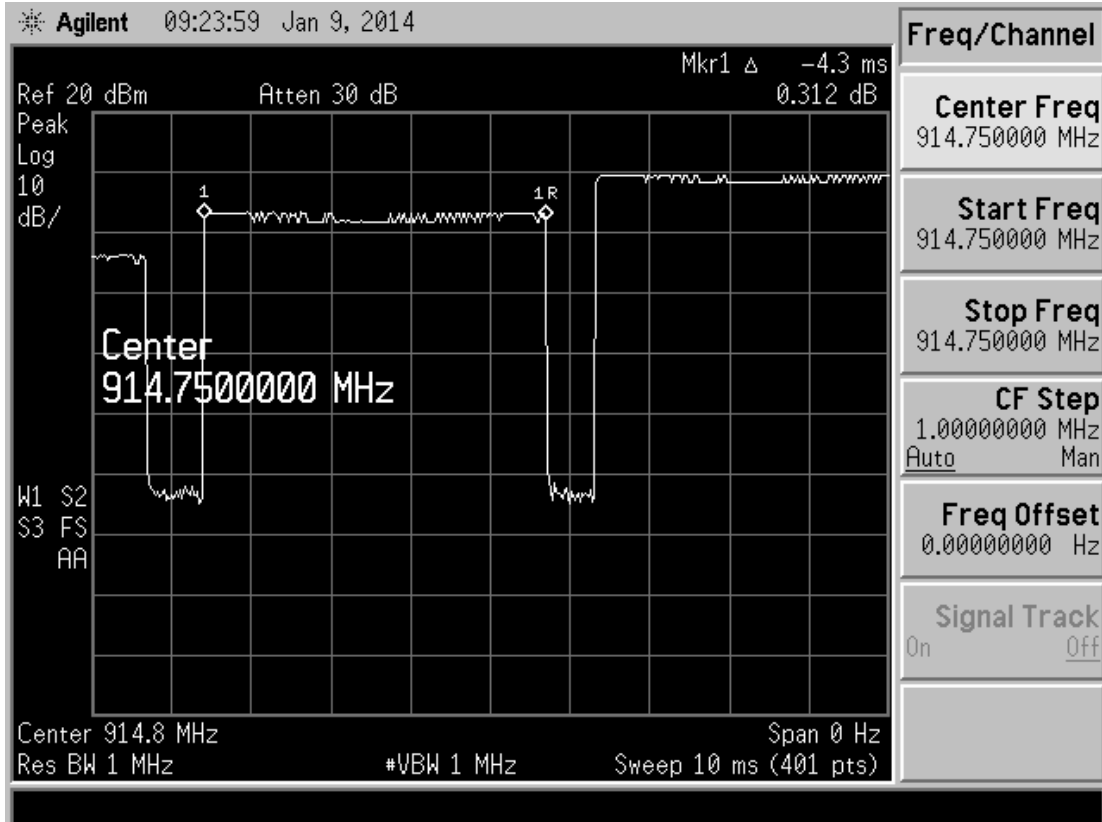


### Dwell Time High Band Measurement Plot Wireless Diagnostic Mode

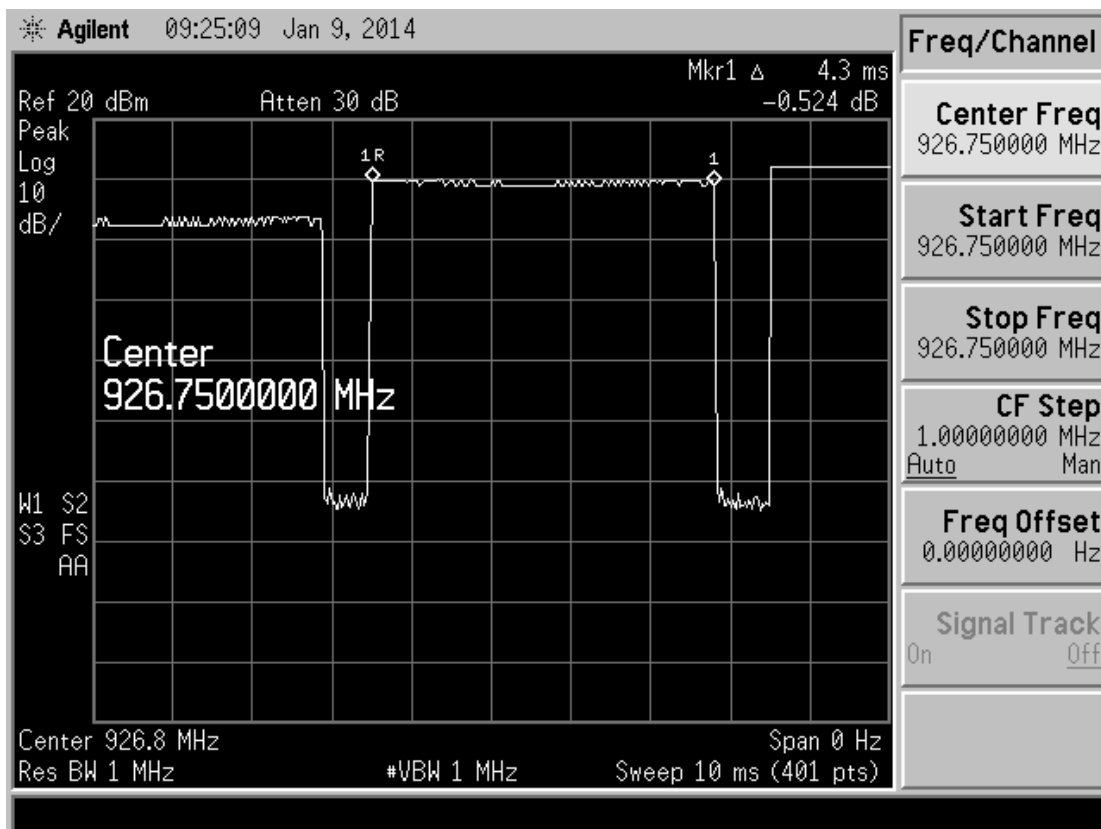


Then the sweep time was expanded to 20 seconds to capture the number of hops in the appropriate sweep time. A single sweep is made for each band, shown in the plots below.

### Number of Hops Low Band Measurement Plot Wireless Diagnostic Mode

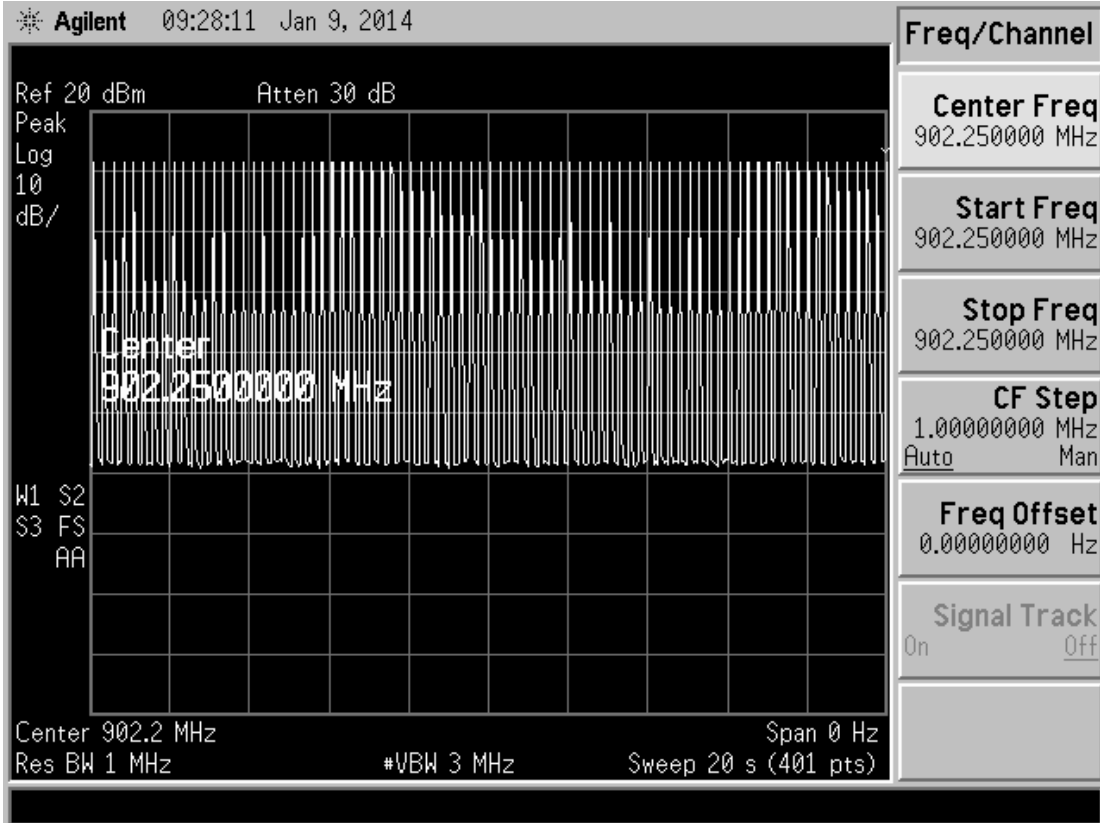





### Number of Hops Mid Band Measurement Plot Wireless Diagnostic Mode

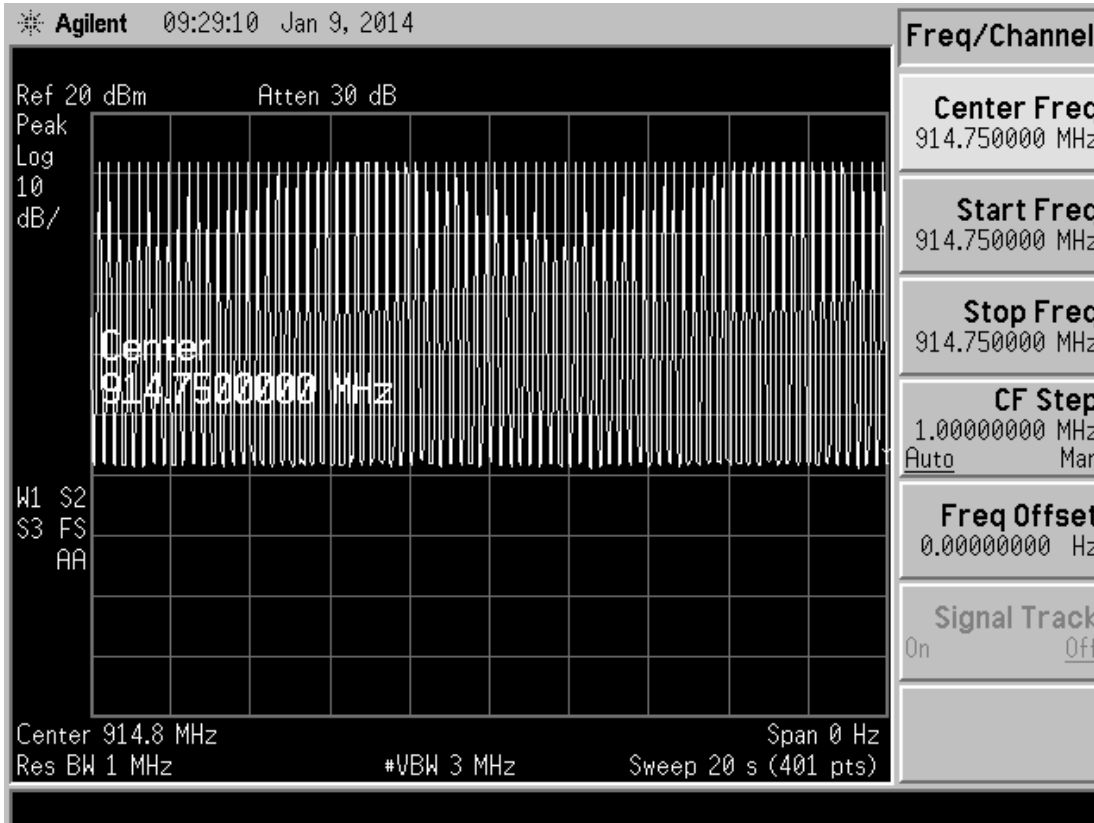

### Number of Hops High Band Measurement Plot Wireless Diagnostic mode

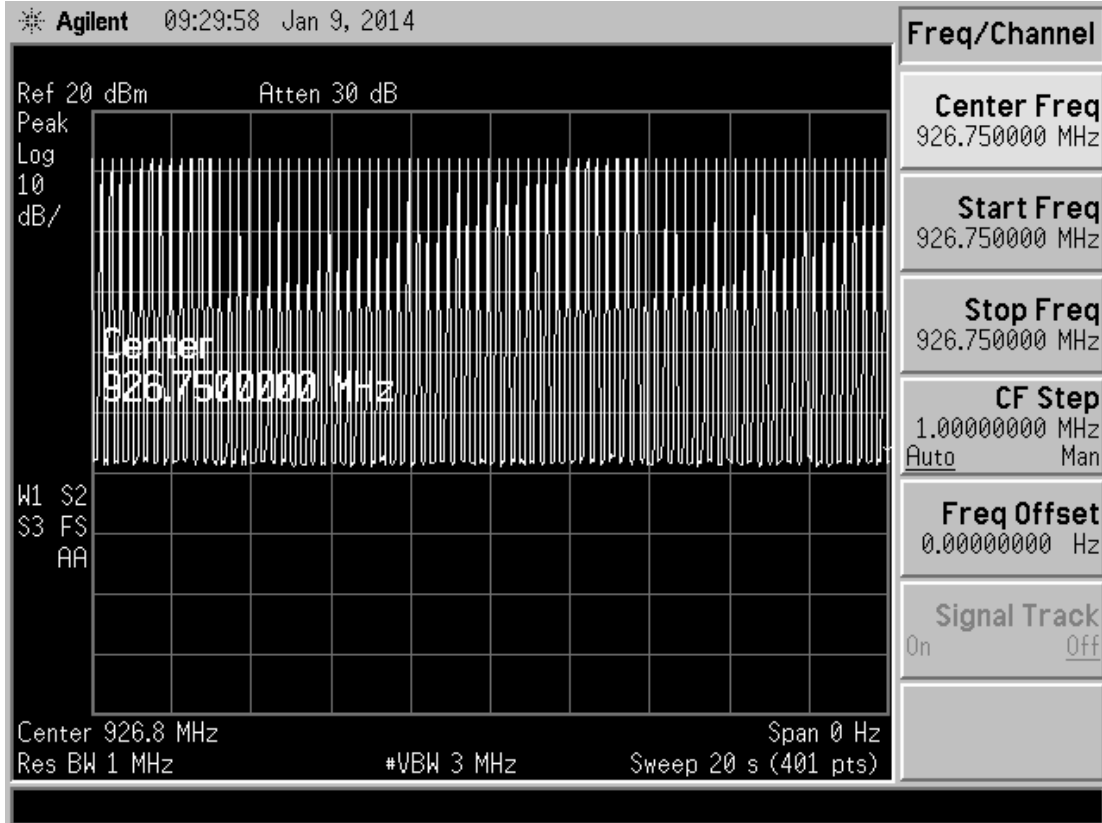


### 7.4.2.6 Duty Cycle Correction Measurements (FCC Part 15.247)

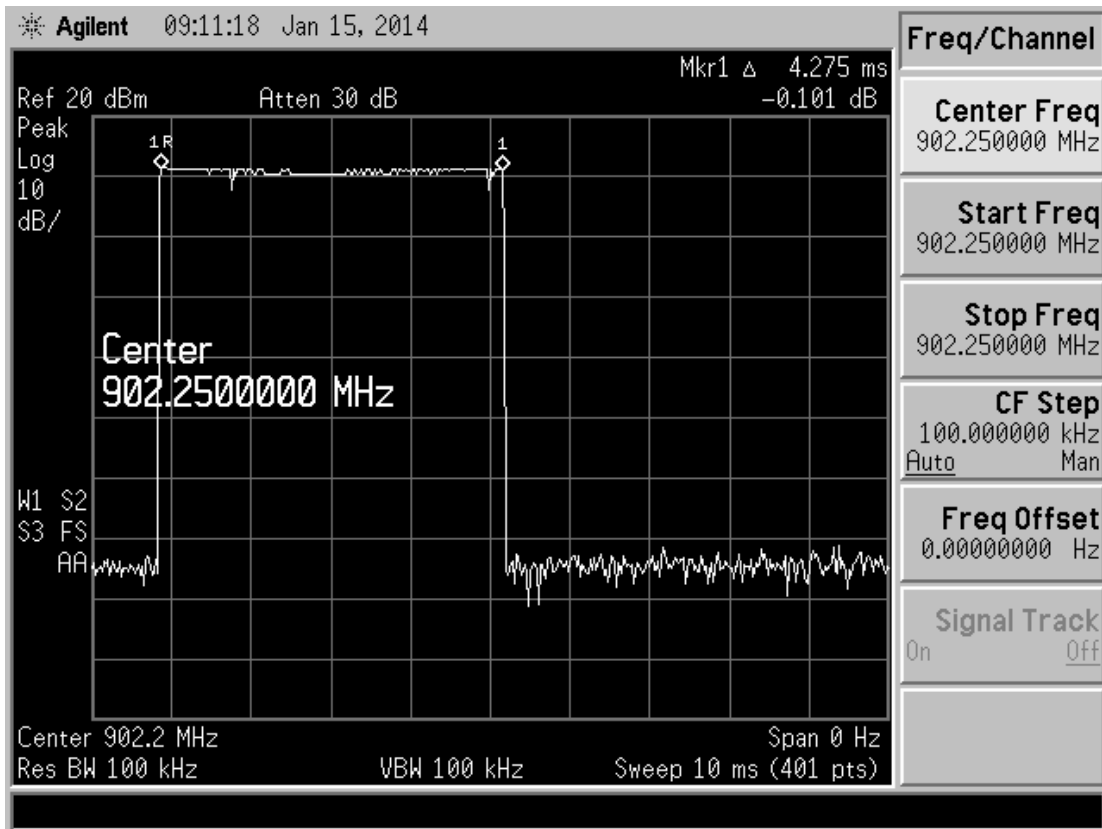


# GENTEX CORPORATION

A Smarter Vision®

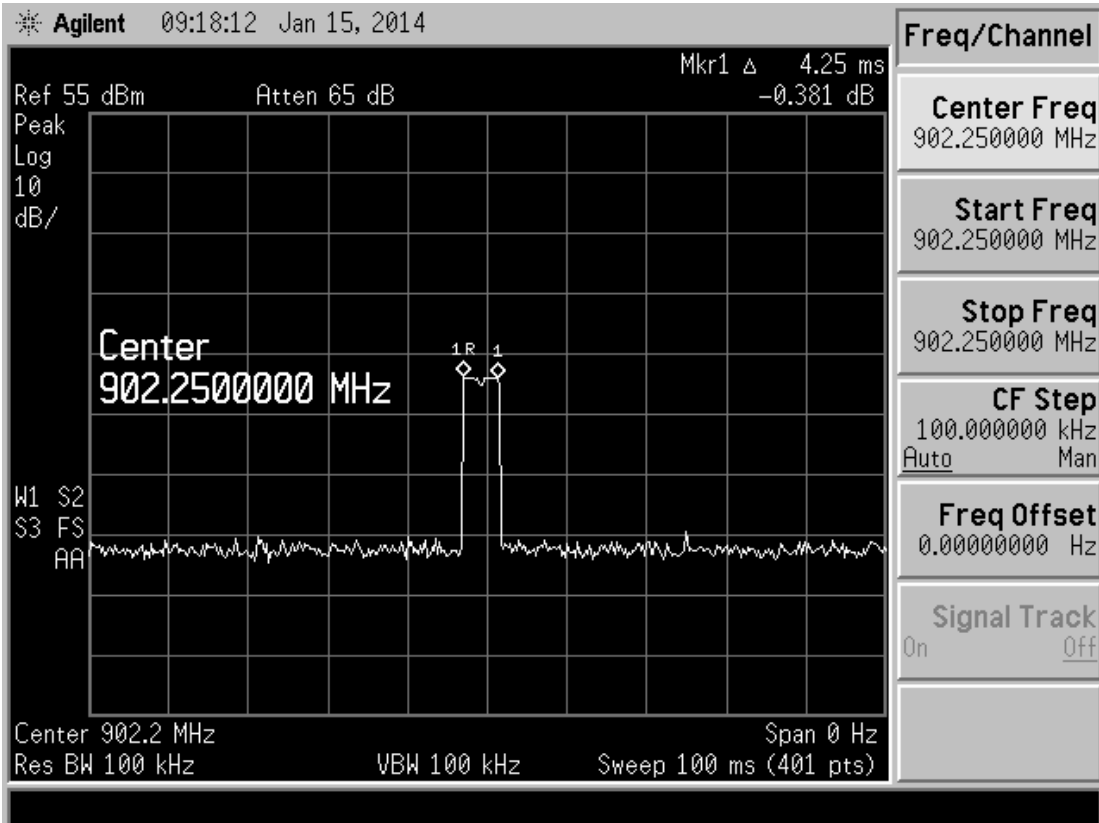


# GENTEX CORPORATION

A Smarter Vision®

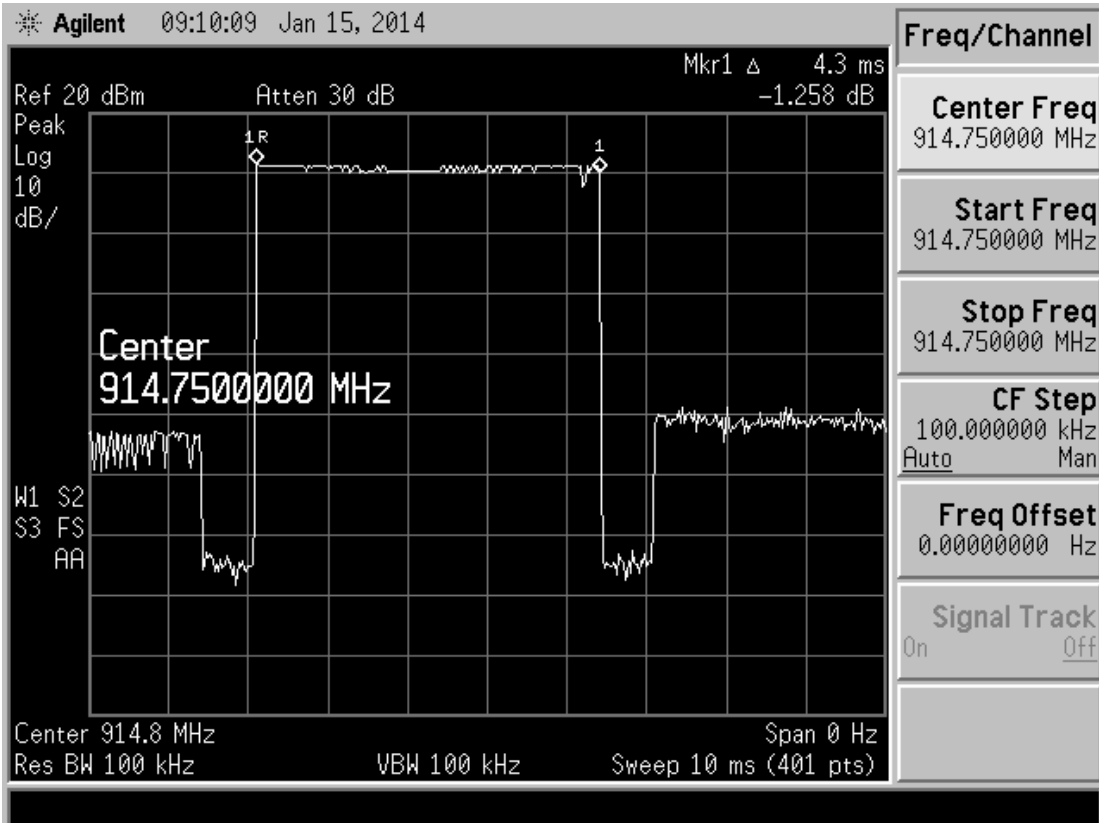


# GENTEX CORPORATION


A Smarter Vision®

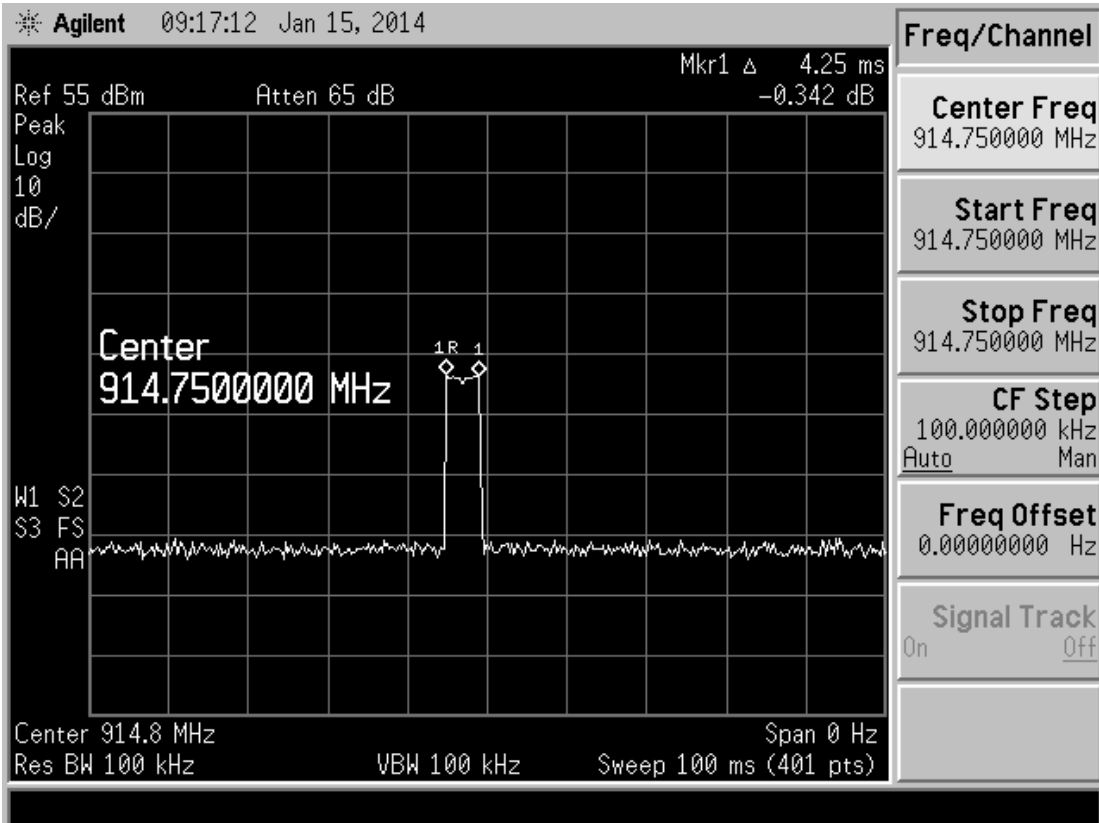

# GENTEX CORPORATION

A Smarter Vision<sup>®</sup>

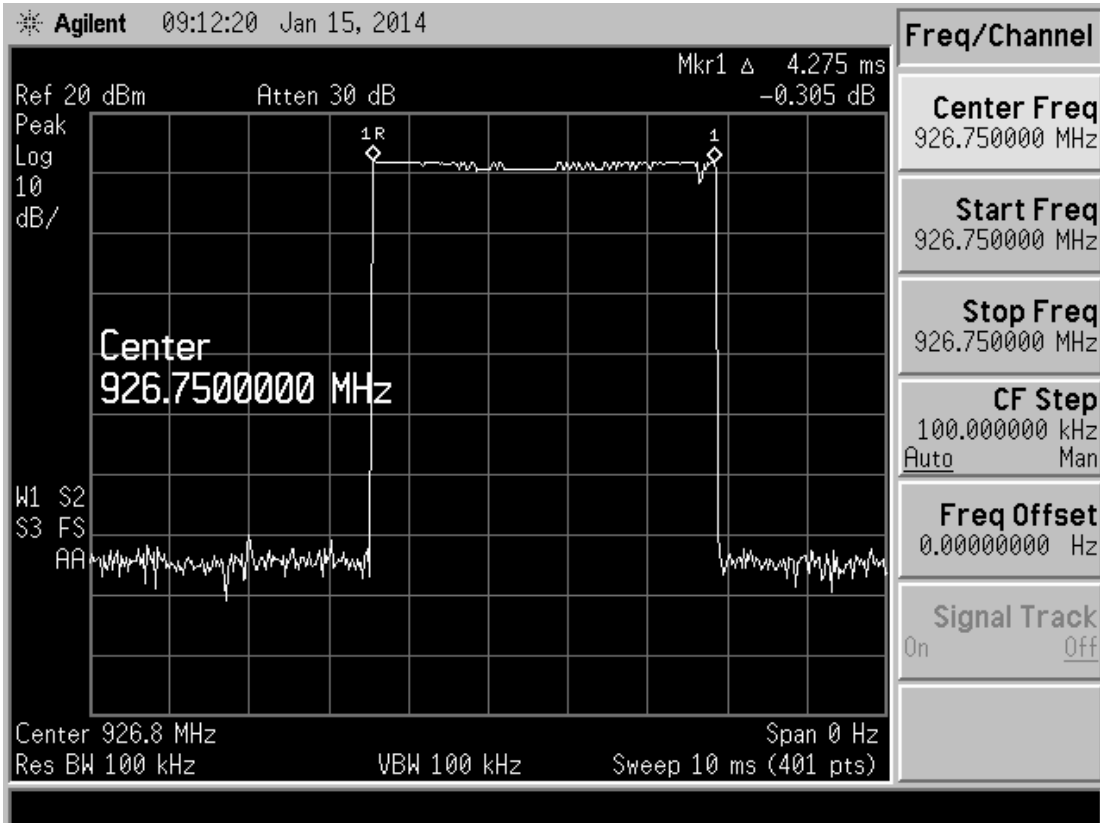

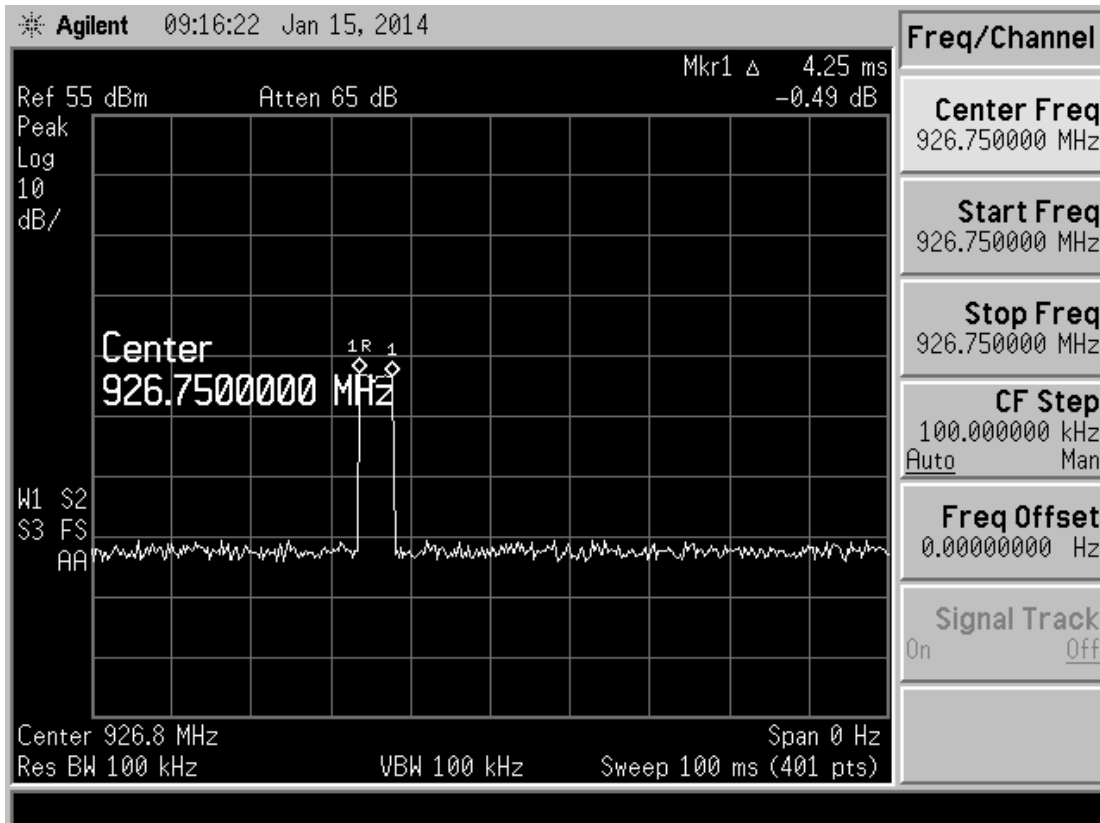

### 7.4.3 Radiated Rx Spurious Emissions

The receiver circuit spurious emissions were measured in accordance to Industry Canada RSS-GEN Issue 3 Section 6 and ANSI C63.4-2003.

The FHSS operational band low, mid and high frequencies over which the receiver is designed to operate are 902.25, 914.75 and 926.75MHz. The HomeLink is supplied with commands to place it into diagnostic / manufacturing mode, and tune the receiver to these frequencies.

Worst case results are provided in the tables below. The low band has a minimum margin of 24.8dB, the mid band has a minimum margin of 26.0dB, and the high frequency band has a minimum margin of 14.9dB.



### 7.4.3.1 Setup Photograph for Receiver spurious emissions

			Power Reading (dBuV/m)		Lim	Amt Over (dB)	
	Freq	Position	H	V		H	V
Fundamental	901.3	Flat	28.56		46.0		
	901.3	Side			46.0		
	901.3	End			46.0	-17.5	
2nd Harmonic	1802.6	Flat	28.55		54.0		
	1802.6	Side			54.0	-25.4	
	1802.6	End			54.0		
3rd Harmonic	2703.9	Flat	29.56		54.0		-24.4
	2703.9	Side			54.0		
	2703.9	End			54.0		
4th Harmonic	3605.2	Flat	31.26		54.0		
	3605.2	Side			54.0		
	3605.2	End			54.0	-22.7	
5th Harmonic	4506.5	Flat	32.56		54.0		-21.4
	4506.5	Side			54.0		
	4506.5	End			54.0		

			Power Reading (dBuV/m)		Lim	Amt Over (dB)	
	Freq	Position	H	V		H	V
Fundamental	914.75	Flat	27.59		46.0		
	914.75	Side			46.0		
	914.75	End			46.0	-18.4	
2nd Harmonic	1829.5	Flat	30.54		54.0		
	1829.5	Side			54.0		-23.4
	1829.5	End			54.0		
3rd Harmonic	2744.25	Flat	31.5		54.0		
	2744.25	Side			54.0	-22.5	
	2744.25	End			54.0		
4th Harmonic	3659	Flat	30.54		54.0		
	3659	Side			54.0	-23.4	
	3659	End			54.0		
5th Harmonic	4573.75	Flat	33.26		54.0		
	4573.75	Side			54.0	-20.7	
	4573.75	End			54.0		

			Power Reading (dBuV/m)		Lim	Amt Over (dB)	
	Freq	Position	H	V		H	V
Fundamental	926.75	Flat	29.65		46.0	-16.4	
	926.75	Side					
	926.75	End					
2nd Harmonic	1853.5	Flat	33.65		54.0	-20.3	
	1853.5	Side					
	1853.5	End					
3rd Harmonic	2780.25	Flat	31.45		54.0	-22.5	
	2780.25	Side					
	2780.25	End					
4th Harmonic	3707	Flat	30.45		54.0	-23.5	
	3707	Side					
	3707	End					
5th Harmonic	4633.75	Flat	35.26		54.0	-18.7	
	4633.75	Side					
	4633.75	End					

## 7.6 Formulas and Sample Calculations

### 1.5.1 Adjustment to account for duty cycle

To calculate the duty cycle correction factor for the average measurement, the following calculation was performed.

3.5ms while in Wireless Diagnostic mode was used for the on time, as this was the worst case.

Duty cycle Correction Factor =  $20 \cdot \log(\text{On Time}(\text{ms}) / 100\text{ms})$ .

$-27.3\text{dB} = 20 \cdot \log(4.3\text{ms}/100\text{ms})$

### 1.5.2 Calculation of IC Limits from RSS-210 and 47 CFR Part 15.247.

The Peak Tx Spurious Emissions limit for the fundamental is given by:

Limit dBuV/m =  $20 \cdot \log(7071\text{mV}/\text{m} \cdot 1000) = 137\text{dBuV}/\text{m}$

where  $7071\text{mV}/\text{m} = 1\text{W}$ , which is the fundamental limit.

The Rx Spurious Emissions limit for the fundamental is given by:


$$\text{Limit dBuV/m} = 20 * \text{Log}(200\text{uV/m}) = 46.0\text{dBuV/m}$$

while the Rx Spurious Emissions limit for the harmonics is given by


$$\text{Limit dBuV/m} = 20 * \text{Log}(500\text{uV/m}) = 54.0\text{dBuV/m}$$

### Photos of Product Tested

#### 8.1.1 Front View – Printed Circuit Board

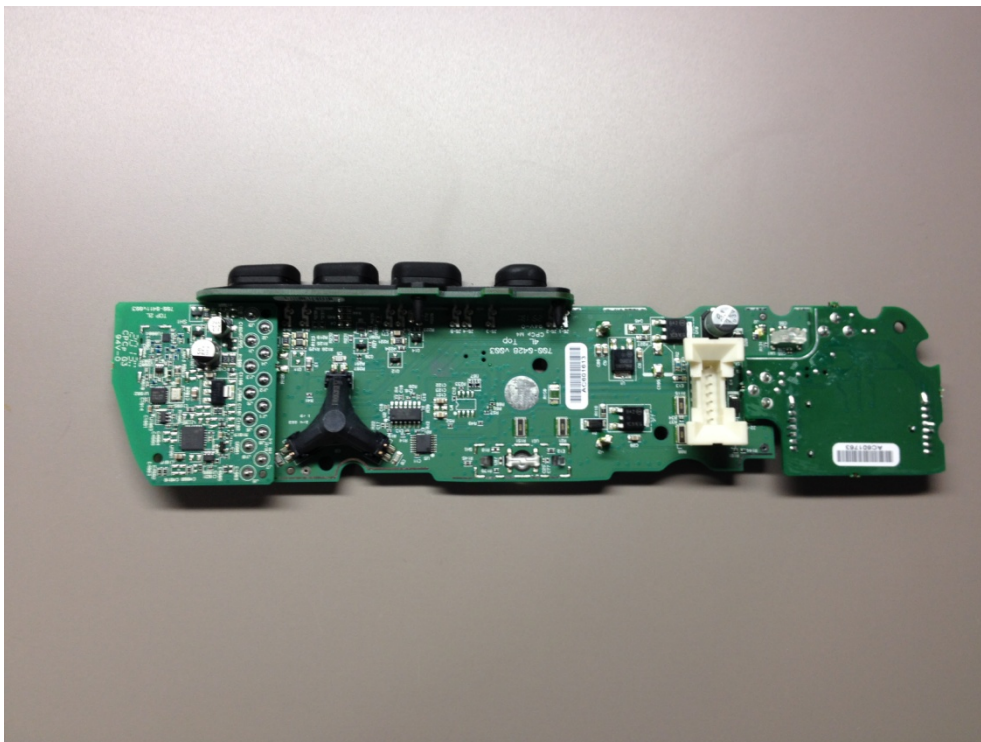

### 8.1.2 Rear View – Printed Circuit Board.

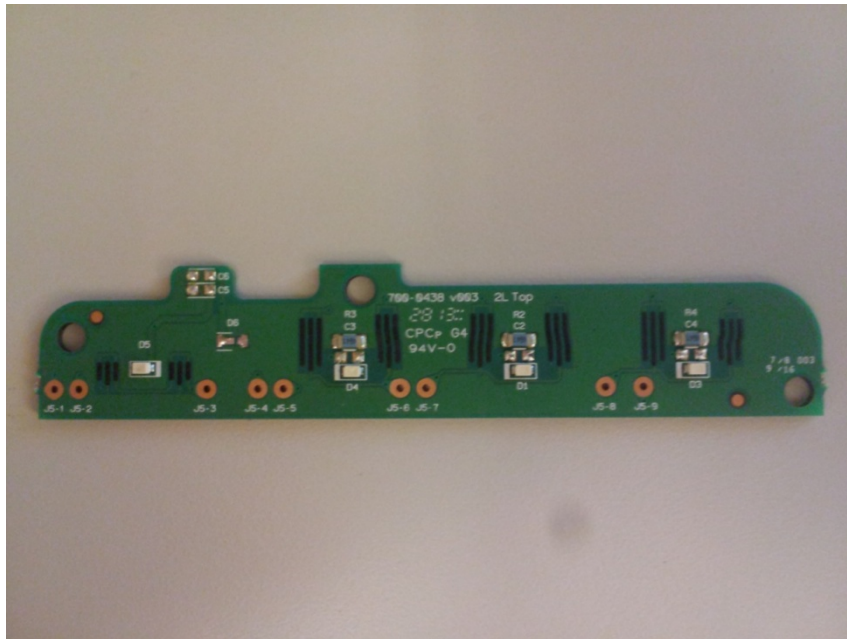

### 8.1.3 Unit Disassembled & PCB Board Internal View






## 8.2 Housing



## 8.3 Close-up of Homelink RF Section.

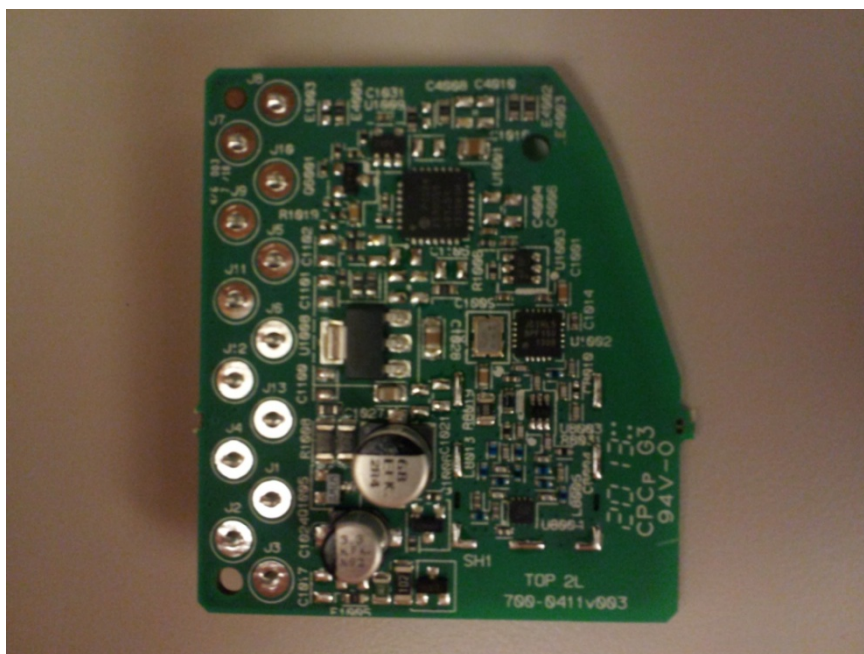

## 9 Other Attachments and Description

### 9.1 User Manual

Please refer to attachment "User\_Manual\_English.pdf" and "User\_Manual\_French.pdf".

### 9.2 Schematics/ Tuning Information

For schematics please refer to attachment "Schematic.pdf".

### 9.3 Theory of Operation

Please refer to attachment "HL5 Operation FCC 231\_247.pdf"

### 9.4 Label Drawing and Location on Complete Assembly.

For a drawing of the label, refer to attachment "Label Drawing\_Label Location.pdf."

For a drawing of the position of the label on the finished assembly refer to

"Label Drawing\_Label Location.pdf".