



A Smarter Vision®

**Technical Report to the FCC and Industry Canada Regarding  
Gentex Corporation - HomeLink® IV**

**Model: DREVICHL4  
FCC ID: NZLDREVICHL4  
IC: 4112A-DREVICHL4  
Emission Designator: 72KL1D  
7/7/2014**

A report concerning approval for Gentex Corporation Homelink® model DREVICHL4  
Please issue grant immediately upon review.

Measurements Made by:

Measurements Reviewed by:

Bolay Bun  
Senior EMC Test Engineer  
Gentex Corporation

Brian Miller  
Senior EMC Test Engineer  
Gentex Corporation

Report and Application Prepared by:

Report Approved and Submitted by:

Brian Miller  
Senior EMC Test Engineer  
Gentex Corporation

Craig Harder  
Lab Manager - EMC Lab  
Gentex Corporation



A Smarter Vision®

## 1. General Information

### 1.1. Product Description:

The Gentex Corporation HomeLink® HL4 Universal Garage Door Opener is a low-power transceiver OEM device that is installed into an overhead area of the automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a typical assembly and 2-conductor cable harness were used to power to the unit.

The unit is only operational when the user depresses the control button. It becomes inactive after release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

### 1.2. Related Grants

This device will have functionality that is covered under CFR 47 15.247. The device will have FCC ID # of NZLDREVICHL4 and IC ID # of 4112A-DREVICHL4 under both rule parts. A separate report is submitted for functionality covered under CFR 47 15.247.

### 1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.4-2003. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a 2-conductor cable harness was used to interface to the unit.



A Smarter Vision®

## 1.4. Test Facility

The Open Area Test Site where these measurements were taken is located on the grounds of Gentex Corporation's Technical Campus, in the city of Holland, county of Ottawa, state of Michigan, United States of America. The site is a fully enclosed 10m weather-protected OATS. All structure materials above the conducting ground-plane are non-metallic and consist of wood, laminated lumber, fiberglass, glue, plastic, or fiberglass reinforced plastic. The site contains a 15-foot diameter turntable capable of supporting large cars and light trucks under test. Tabletop testing was conducted on a smaller 3m turntable described in the site recertification report. The test site has been fully described in a reports filled with the FCC and Industry Canada. The report filed with the FCC is dated November 10, 2013, was accepted by the FCC in a letter dated November 15, 2013. The report filled with Industry Canada, dated November 10, 2013, was accepted via a letter dated November 20, 2013. Our OATS is registered with the IC under file number IC# 4112A

## 1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site [www.a2la.org](http://www.a2la.org). Our scope of accreditation covers ANSI C63.4 Radiated Emissions at 3m, FCC 47 CFR Part 15, and IC RSS-210.

## 2. Product Labeling

The FCC Identifier assigned is FCC ID: NZLDREVICHL4. The Industry Canada certification number is 4112A-DREVICHL4. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"This device complies with FCC rules Part 15 and with Industry Canada RSS-210. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and Industry Canada rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "IC:" before the certification/registration number only signifies that Industry Canada technical specifications were met.

IC: 4112A-DREVICHL4 MODEL/FCC ID: NZLDREVICHL4

FCC Report Template

Revision: tbd Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

**Model: DREVICHL4**  
**Page 3 of 12**

## 2.1. Label Drawing and Location on Product.

The label drawing is included in the "Label.pdf" attachment.  
A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

## 3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4 Figure 9(c). The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane. The harness was run to the long edge of the table and dropped to a power supply sitting at base of the table.

## 4. Block Diagram

For system block diagram please refer to attachment named "Block Diagram.pdf"

## 5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

## 6. Radiated Emissions Data

### 6.1. Summary of Results

Measurement	Result	Margin	Frequency - Duty Cycle
<b>Worst Case Peak Emission</b>	84.54	10.8 dB	310MHz - 30%
<b>Worst Case Average Emission</b>	74.1 dBuV/m	1.2 dB	310Mhz - 30%
<b>Worst Case Harmonic</b>	54.12 dBuV/m	1.8 dB	2790MHz - (310MHz - 80%)
<b>Worst case Digital Emission</b>	31.46 dBuV/m	8.54 dB	120MHz - (433MHz)
<b>Worst Case Receiver Spurious Emission</b>	135.26 uV/m	64.74 uV	377MHz
<b>Worst Case Restricted Band Emission</b>	53.26 dBuV/m	0.7 dB	2790Mhz - (310MHz)
<b>Maximum Occupied BW</b>	72kHz	648kHz	288Mhz - 30%
<b>Delta of Field Strength with Supply Voltage of 6-18V</b>	0.78 dB	N/A	310MHz - 30%

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 7V and power reduced to 83.87dBuV/m at 7V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated immediately after the activation button is depressed. Less than 5 sec.
- Additional testing was performed to ensure compliance with the restricted bands. The following fundamentals were utilized: 375, 392, 415, 416.5, 421, 430, and 434MHz to test compliance of harmonics within the restricted bands.

## 6.2. Test Equipment Setup and Procedure

### Test Equipment Used

<u>Description</u>	<u>Model #</u>	<u>Serial Number</u>	<u>Last Cal Date</u>	<u>Cal Due</u>
EMCO Biconical Antenna [20-300 MHz]	3110B	9906-3309	1-26-12	1-26-15
EMCO LPA Antenna [200-2000MHz]	3148	9908-1076	1-26-12	1-26-15
Electro-metrics Double Ridged Guide [1-18GHz]	RGA-60	6147	9-05-12	9-05-15
Agilent E-series EMC Analyzer	E4407B	US41192569	1-14-14	5-14-15
HP Spectrum Analyzer	8591A	S919A00107	1-14-14	5-14-15

#### Spectrum Analyzer Settings Emissions:


Detector Function: Peak  
 Resolution Bandwidth: 120 kHz (below 1GHz)  
                                   1MHz (above 1GHz)  
 Video Bandwidth: 300 kHz (below 1GHz)  
                                   3MHz (above 1GHz)

#### Spectrum Analyzer Settings Occupied Bandwidth:

Detector: Peak  
 Resolution Bandwidth: 3 MHz (to determine peak level)  
                                   10 kHz (to determine occupied bandwidth)  
 Video Bandwidth: 3 MHz (to determine peak level)  
                                   30 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4 for stand-alone equipment. The 2-conductor cable harness was routed to the edge of the long side of the table then down to the power supply located on the turntable base.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 7.3.1.

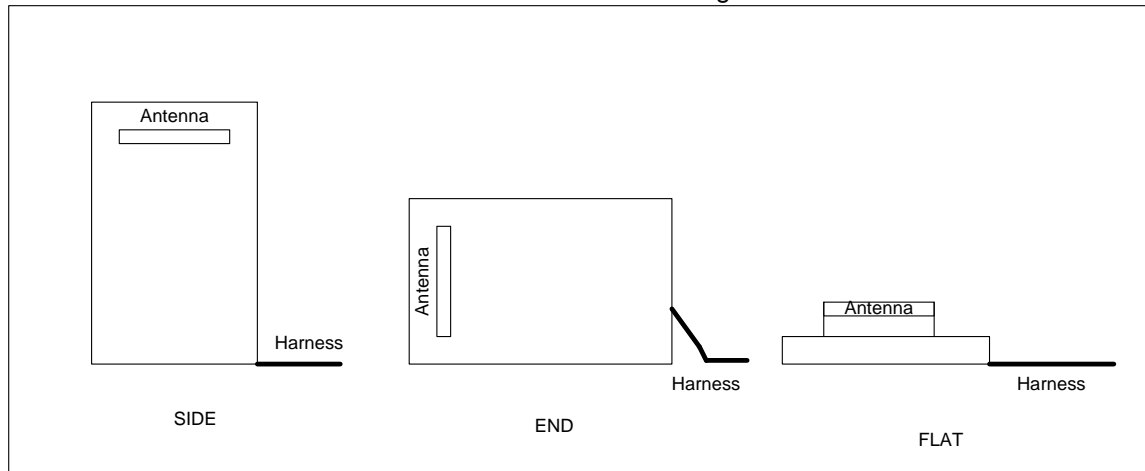

**Figure 7.3.1 EUT Orthogonal Orientations**

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

### 6.3 Measured Data – See Appendix A

### 7.6 Verification of Non-Operation in Restricted Bands

An exercise was undergone to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in RSS-210 Issue 8, Table 1 and 47 CFR 15.205.

This exercise is described as follows:

#### HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 450 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz



A Smarter Vision®

HomeLink will only transmit at frequencies it is able to train to, therefore to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, I set up an Agilent E4421B signal generator to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. I then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, I tested various frequencies in the vicinity of the banned region boundaries, and verified that HomeLink trained when it saw a signal at a valid frequency, and did not train when it saw a signal at a banned frequency. In the instances where HomeLink trained to a valid frequency, I then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore I cannot say that HomeLink will adhere to the specified limits with absolute precision. This is why we guard-banded the FCC banned frequencies by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, we guarantee that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain "harmonic avoidance frequency regions" which HomeLink will train to, but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

<b>FCC Banned Regions:</b> (HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	<b>Harmonic Avoidance Regions:</b> (HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz
---	---

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
285.0	banned	would not train	Pass	
285.5	allowed (guardband region)	would not train	Pass	

286.0	allowed (guardband region)	trained	Pass	
287.0	allowed	trained	Pass	
303.5	allowed	trained	Pass	
304.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	
319.0	allowed	trained	Pass	
320.0	allowed	trained	Pass	
320.5	allowed	trained	Pass	
321.0	allowed (guardband region)	trained	Pass	
322.0	banned	would not train	Pass	
323.0	banned	would not train	Pass	
324.0	banned	would not train	Pass	
325.0	banned	would not train	Pass	
326.0	banned	would not train	Pass	
327.0	banned	would not train	Pass	
328.0	banned	would not train	Pass	
329.0	banned	would not train	Pass	
330.0	banned	would not train	Pass	
331.0	banned	would not train	Pass	
332.0	banned	would not train	Pass	
333.0	banned	would not train	Pass	
334.0	banned	would not train	Pass	
335.0	banned	would not	Pass	



		train		
336.0	allowed (guardband region)	would not train	Pass	
337.0	allowed (guardband region)	trained	Pass	
338.0	allowed	trained	Pass	
398.0	allowed	trained	Pass	
399.0	allowed (guardband region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
399.5	allowed (guardband region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
400.0	banned	would not train	Pass	
401.0	banned	would not train	Pass	
402.0	banned	would not train	Pass	
403.0	banned	would not train	Pass	
404.0	banned	would not train	Pass	
405.0	banned	would not train	Pass	
406.0	banned	would not train	Pass	
407.0	banned	would not train	Pass	
408.0	banned	would not train	Pass	
409.0	banned	would not train	Pass	
410.0	banned	would not train	Pass	
410.5	allowed (guardband region)	would not train	Pass	
411.0	allowed (guardband region)	would not train	Pass	
411.5	allowed	trained	Pass	

412.0	allowed	trained	Pass	
449.0	allowed	trained	Pass	
450.0	allowed	trained	Pass	
450.5	allowed	would not train	Pass	HomeLink only operates up to 450 MHz
451.0	allowed	would not train	Pass	HomeLink only operates up to 450 MHz
452.0	allowed	would not train	Pass	HomeLink only operates up to 450 MHz

## HomeLink V Banned Frequency Testing

### 7.7 Verification of De-activation after 5 seconds

This device stops transmitting once the activation button is released.

### 7.8 Formulas and Sample Calculations

#### 1.5.1 Adjustment to account for duty cycle

The spectrum analyzers used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors) and periodic cable loss measurements.

$$\text{Formula 1: } FS(\text{dBuV/m}) = M(\text{dBuV}) + AF(\text{dB/m}) + CF(\text{dB})$$

The presented field strength is computed by the spectrum analyzer by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurement presented in gathered using the spectrum analyzer's peak-hold capability.

$$\text{Formula 2: } \text{Average Level}(\text{dBuV/m}) = \text{Peak Level}(\text{dBuV/m}) + \text{duty cycle factor}(\text{dB}).$$

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30):	duty cycle factor (dB) = 20*Log(0.3) = -10.46
For 50% (0.50):	duty cycle factor(dB) = 20*Log(0.5) = -6.02
For 80% (0.80):	duty cycle factor(dB) = 20*Log(0.8) = -1.94

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:



A Smarter Vision®

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

### 1.5.2 Calculation of IC Limits from Table 4, RSS-210 and 47 CFR Part 15.231.

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criteria is:

$$\text{FCC limit} = 41.67 * f - 7083.33$$

(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

$$\text{dB limit} = 20 * \log_{10}(\text{FCC limit uV/m}) = 20 * \log_{10}(41.67 * f - 7083.33)$$

(log<sub>10</sub> is used to indicated the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 * \log_{10}(4917.6)$	= 73.8 dBuV/m
310MHz	$20 * \log_{10}(5834.4)$	= 75.3 dBuV/m
390MHz	$20 * \log_{10}(9168.0)$	= 79.2 dBuV/m
433MHz	$20 * \log_{10}(10959.8)$	= 80.8 dBuV/

## 9. Other Attachments and Description

### 9.1 User Manual

Please refer to attachment "User\_manual.pdf".

### 9.2 Schematics / Tuning Information

For schematics please refer to exhibit "Schematics.pdf".

### 9.3 Emission Designation

According to TRC-43, the emission designation for this product is 72KL1D. Where "72K" is the highest measured occupied bandwidth, "L" indicates the device uses pulse width modulation, "1" indicates the modulation as being single channel, digital information and "D" indicates that data is being transmitted.

### 9.4 Theory of Operation

Please refer to attachment "Theory of operation"

### 9.5 Label Drawing and Location on Complete Assembly



A Smarter Vision®

For a drawing of the label, refer to attachment "Label."

For a drawing of the position of the label on the finished assembly refer to "Label Location".

## **9.6 Photos**

For interior photos, refer to exhibit "Interior Photographs".

For exterior photos, refer to exhibit "Exterior Photographs".

For test setup photos, refer to exhibit "Test Setup Photographs".

## Appendix A

### A. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.4-2003 on the Gentex Corporation 3m test table.

#### 1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement*	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
288	Side	H	30	82.94	93.8	<b>10.9</b>	-10.5	72.5	73.8	<b>1.4</b>
288	Side	H	50	77.65	93.8	16.2	-6.0	71.6	73.8	2.2
288	Side	H	80	73.65	93.8	20.2	-1.9	71.7	73.8	2.1

\* Measurements include Cable corrections and Antenna Factors

#### 2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement*	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
310	Side	H	30	84.54	95.3	<b>10.8</b>	-10.5	74.1	75.3	<b>1.2</b>
310	Side	H	50	79.31	95.3	16.0	-6.0	73.3	75.3	2.0
310	Side	H	80	75.41	95.3	19.9	-1.9	73.5	75.3	1.8

\* Measurements include Cable corrections and Antenna Factors

### 3. DUT Tuned to Fund 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement*	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
365	End	V	30	86.72	98.2	<b>11.5</b>	-10.5	76.3	78.2	<b>1.9</b>
365	End	V	50	81.76	98.2	16.4	-6.0	75.7	78.2	2.5
365	Flat	H	80	74.66	98.2	23.5	-1.9	72.7	78.2	5.5

\* Measurements include Cable corrections and Antenna Factors

### 4. DUT Tuned to Fund 433MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement*	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
433	Side	V	30	88.4	100.8	<b>12.4</b>	-10.5	77.9	80.8	2.9
433	Side	V	50	84.12	100.8	16.7	-6.0	78.1	80.8	<b>2.7</b>
433	Side	V	80	78.48	100.8	22.3	-1.9	76.5	80.8	4.3

\* Measurements include Cable corrections and Antenna Factors

### 5. DUT Tuned to Har\_288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
576	End	H	30	60.79	73.8	13.0	-10.5	50.3	53.8	3.5
576	End	H	50	56.79	73.8	17.0	-6.0	50.8	53.8	3.1
576	End	H	80	51.88	73.8	22.0	-1.9	49.9	53.8	3.9
864	End	V	30	54.7	73.8	19.1	-10.5	44.2	53.8	9.6
864	End	V	50	52.04	73.8	21.8	-6.0	46.0	53.8	7.8
864	End	V	80	49.04	73.8	24.8	-1.9	47.1	53.8	6.7
1152	End	V	30	50.63	73.8	23.2	-10.5	40.2	53.8	13.7
1152	End	V	50	47.7	73.8	26.1	-6.0	41.7	53.8	12.2
1152	End	V	80	47.42	73.8	26.4	-1.9	45.5	53.8	8.4
1440	Side	H	30	48.14	73.8	25.7	-10.5	37.7	53.8	16.2
1440	Side	H	50	45.4	73.8	28.4	-6.0	39.4	53.8	14.5
1440	Side	H	80	44.33	73.8	29.5	-1.9	42.4	53.8	11.4
1728	Side	H	30	48.01	73.8	25.8	-10.5	37.6	53.8	16.3
1728	Side	H	50	48.26	73.8	25.6	-6.0	42.2	53.8	11.6
1728	Side	H	80	44.62	73.8	29.2	-1.9	42.7	53.8	11.2
2016	Side	H	30	55.43	73.8	18.4	-10.5	45.0	53.8	8.9
2016	Side	H	50	52.31	73.8	21.5	-6.0	46.3	53.8	7.5
2016	Side	H	80	50.26	73.8	23.6	-1.9	48.3	53.8	5.5
2304	End	V	30	51.87	73.8	22.0	-10.5	41.4	53.8	12.4
2304	End	V	50	50.24	73.8	23.6	-6.0	44.2	53.8	9.6
2304	End	V	80	49.65	73.8	24.2	-1.9	47.7	53.8	6.1
2592	Side	H	30	54.44	73.8	19.4	-10.5	44.0	53.8	9.9
2592	Side	H	50	53.32	73.8	20.5	-6.0	47.3	53.8	6.5
2592	Side	H	80	52.22	73.8	21.6	-1.9	50.3	53.8	3.6
2880	End	H	30	51.78	73.8	22.1	-10.5	41.3	53.8	12.5
2880	End	H	50	50.55	73.8	23.3	-6.0	44.5	53.8	9.3
2880	End	H	80	48.88	73.8	25.0	-1.9	46.9	53.8	6.9

Ambient

Noise Floor

\* Measurements include Cable corrections and Antenna Factors

## 6. DUT Tuned to Har\_310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
620	End	V	30	63.09	75.3	12.2	-10.5	52.6	55.3	2.7
620	End	V	50	52.51	75.3	22.8	-6.0	46.5	55.3	8.8
620	End	V	80	46.84	75.3	28.5	-1.9	44.9	55.3	10.4
930	Side	V	30	43.33	75.3	32.0	-10.5	32.9	55.3	22.4
930	Side	V	50	36.25	75.3	39.1	-6.0	30.2	55.3	25.1
930	Side	V	80	35.02	75.3	40.3	-1.9	33.1	55.3	22.2
1240	End	V	30	51.02	74.0	23.0	-10.5	40.6	54.0	13.4
1240	End	H	50	48.98	74.0	25.0	-6.0	43.0	54.0	11.0
1240	End	H	80	45.2	74.0	28.8	-1.9	43.3	54.0	10.7
1550	Flat	H	30	50.24	74.0	23.8	-10.5	39.8	54.0	14.2
1550	Flat	H	50	48.86	74.0	25.1	-6.0	42.8	54.0	11.2
1550	Flat	H	80	46.32	74.0	27.7	-1.9	44.4	54.0	9.6
1860	Side	H	30	50.96	75.3	24.3	-10.5	40.5	55.3	14.8
1860	Side	H	50	48.79	75.3	26.5	-6.0	42.8	55.3	12.5
1860	Side	H	80	47.55	75.3	27.8	-1.9	45.6	55.3	9.7
2170	Side	H	30	55.8	75.3	19.5	-10.5	45.3	55.3	10.0
2170	Side	H	50	53.26	75.3	22.0	-6.0	47.2	55.3	8.1
2170	Side	H	80	53.66	75.3	21.6	-1.9	51.7	55.3	3.6
2480	Side	V	30	54.6	75.3	20.7	-10.5	44.1	55.3	11.2
2480	Side	V	50	54.11	75.3	21.2	-6.0	48.1	55.3	7.2
2480	Side	V	80	53.79	75.3	21.5	-1.9	51.9	55.3	3.4
2790	Side	H	30	53.26	74.0	20.7	-10.5	42.8	54.0	11.2
2790	Side	H	50	54.12	74.0	19.9	-6.0	48.1	54.0	5.9
2790	Side	H	80	54.12	74.0	19.9	-1.9	52.2	54.0	<b>1.8</b>
3100	End	V	30	54.12	75.3	21.2	-10.5	43.7	55.3	11.6
3100	End	V	50	50.12	75.3	25.2	-6.0	44.1	55.3	11.2
3100	End	V	80	49.51	75.3	25.8	-1.9	47.6	55.3	7.7

Ambient Noise

\* Measurements include Cable corrections and Antenna Factors



## 7. DUT Tuned to Har\_365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
730	End	V	30	54.32	78.2	23.9	-10.5	43.9	58.2	14.3
730	End	V	50	52.61	78.2	25.6	-6.0	46.6	58.2	11.6
730	End	V	80	46.5	78.2	31.7	-1.9	44.6	58.2	13.6
1095	End	V	30	56.75	74.0	17.3	-10.5	46.3	54.0	7.7
1095	End	V	50	55.12	74.0	18.9	-6.0	49.1	54.0	4.9
1095	End	V	80	52.05	74.0	22.0	-1.9	50.1	54.0	<b>3.9</b>
1460	End	V	30	53.24	74.0	20.8	-10.5	42.8	54.0	11.2
1460	End	V	50	51.47	74.0	22.5	-6.0	45.4	54.0	8.6
1460	End	V	80	49.33	74.0	24.7	-1.9	47.4	54.0	6.6
1825	End	V	30	52.57	78.2	25.6	-10.5	42.1	58.2	16.1
1825	End	V	50	49.05	78.2	29.2	-6.0	43.0	58.2	15.2
1825	End	V	80	41.9	78.2	36.3	-1.9	40.0	58.2	18.2
2190	Side	H	30	59.41	78.2	18.8	-10.5	49.0	58.2	9.2
2190	Side	H	50	57.74	78.2	20.5	-6.0	51.7	58.2	6.5
2190	Side	H	80	50.11	78.2	28.1	-1.9	48.2	58.2	10.0
2555	Side	H	30	51.11	78.2	27.1	-10.5	40.7	58.2	17.5
2555	Side	H	50	45.1	78.2	33.1	-6.0	39.1	58.2	19.1
2555	Side	H	80	44.9	78.2	33.3	-1.9	43.0	58.2	15.2
2920	Side	H	30	61.33	78.2	16.9	-10.5	50.9	58.2	7.3
2920	Side	H	50	57.74	78.2	20.5	-6.0	51.7	58.2	6.5
2920	Side	H	80	50.11	78.2	28.1	-1.9	48.2	58.2	10.0
3285	Flat	H	30	53	78.2	25.2	-10.5	42.5	58.2	15.7
3285	Flat	H	50	52.5	78.2	25.7	-6.0	46.5	58.2	11.7
3285	Flat	H	80	49.35	78.2	28.9	-1.9	47.4	58.2	10.8
3650	Flat	H	30	51.23	74.0	22.8	-10.5	40.8	54.0	13.2
3650	Flat	H	50	51.25	74.0	22.8	-6.0	45.2	54.0	8.8
3650	Flat	H	80	50.68	74.0	23.3	-1.9	48.7	54.0	5.3

### 8. DUT Tuned to Har\_433MHz



Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
866	End	V	30	58.01	80.8	22.8	-10.5	47.6	60.8	13.2
866	End	V	50	53.62	80.8	27.2	-6.0	47.6	60.8	13.2
866	End	V	80	53.62	80.8	27.2	-1.9	51.7	60.8	9.1
1299	End	V	30	56.96	80.8	23.8	-10.5	46.5	60.8	14.3
1299	End	V	50	54.61	80.8	26.2	-6.0	48.6	60.8	12.2
1299	End	V	80	52.14	80.8	28.7	-1.9	50.2	60.8	10.6
1732	Side	H	30	56.69	80.8	24.1	-10.5	46.2	60.8	14.6
1732	Side	H	50	53.16	80.8	27.6	-6.0	47.1	60.8	13.7
1732	Side	H	80	49.89	80.8	30.9	-1.9	48.0	60.8	12.8
2165	Side	H	30	62.03	80.8	18.8	-10.5	51.6	60.8	9.2
2165	Side	H	50	58.54	80.8	22.3	-6.0	52.5	60.8	8.3
2165	Side	H	80	55.08	80.8	25.7	-1.9	53.1	60.8	7.7
2598	End	V	30	55.85	80.8	25.0	-10.5	45.4	60.8	15.4
2598	End	V	50	52.36	80.8	28.4	-6.0	46.3	60.8	14.5
2598	End	V	80	50.14	80.8	30.7	-1.9	48.2	60.8	12.6
3031	Side	H	30	53.01	80.8	27.8	-10.5	42.6	60.8	18.2
3031	Side	H	50	49.87	80.8	30.9	-6.0	43.8	60.8	17.0
3031	Side	H	80	48.37	80.8	32.4	-1.9	46.4	60.8	14.4
3464	End	V	30	60.81	80.8	20.0	-10.5	50.4	60.8	10.4
3464	End	V	50	58.27	80.8	22.5	-6.0	52.2	60.8	8.6
3464	End	V	80	54.41	80.8	26.4	-1.9	52.5	60.8	8.3
3897	End	V	30	52.79	74.0	21.2	-10.5	42.3	54.0	11.7
3897	End	V	50	51.21	74.0	22.8	-6.0	45.2	54.0	8.8
3897	End	V	80	51.3	74.0	22.7	-1.9	49.4	54.0	4.6
4330	Side	H	30	52.97	74.0	21.0	-10.5	42.5	54.0	11.5
4330	Side	H	50	51.8	74.0	22.2	-6.0	45.8	54.0	8.2
4330	Side	H	80	51.35	74.0	22.7	-1.9	49.4	54.0	<b>4.6</b>

\* Measurements include Cable corrections and Antenna Factors



## 9. Pulsed Operation

The Homelink© transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles is provided here. Measurements were taken at 365 MHz with the span set to zero on the E4407B spectrum analyzer. The duty cycle is 500Hz.



### a. 30% Duty Cycle

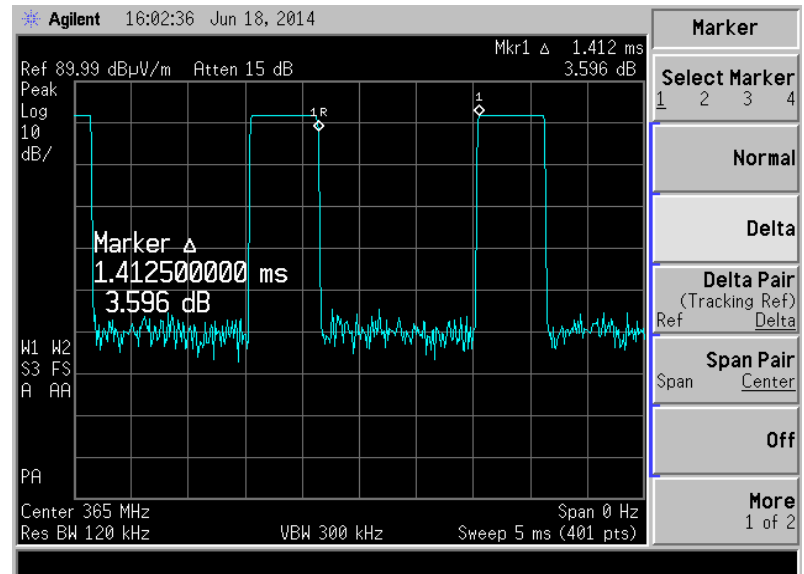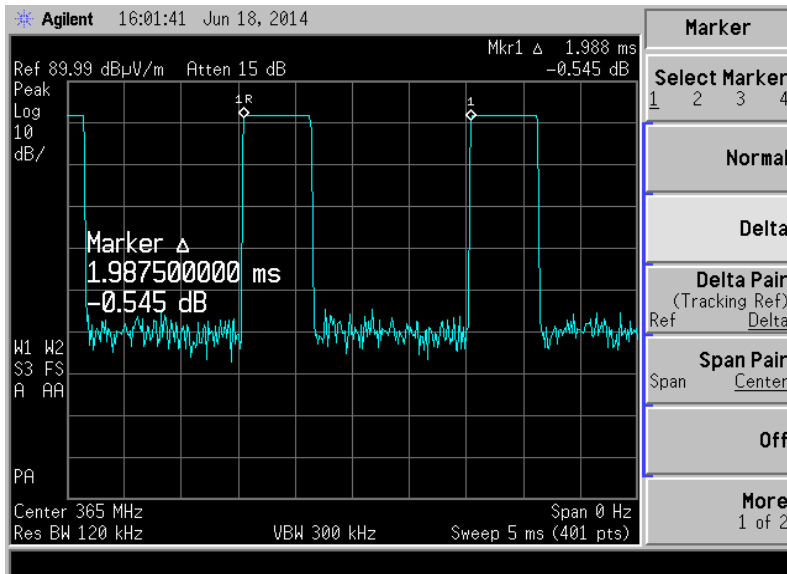

## b. 50% Duty Cycle

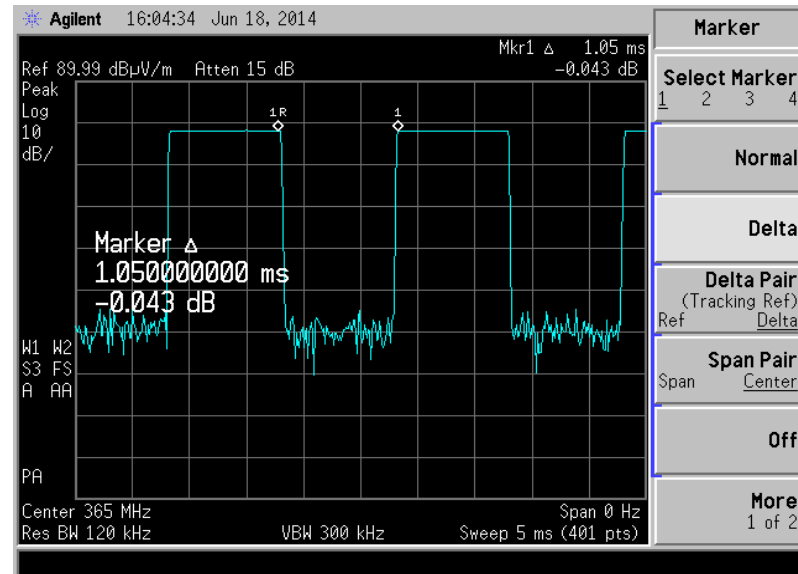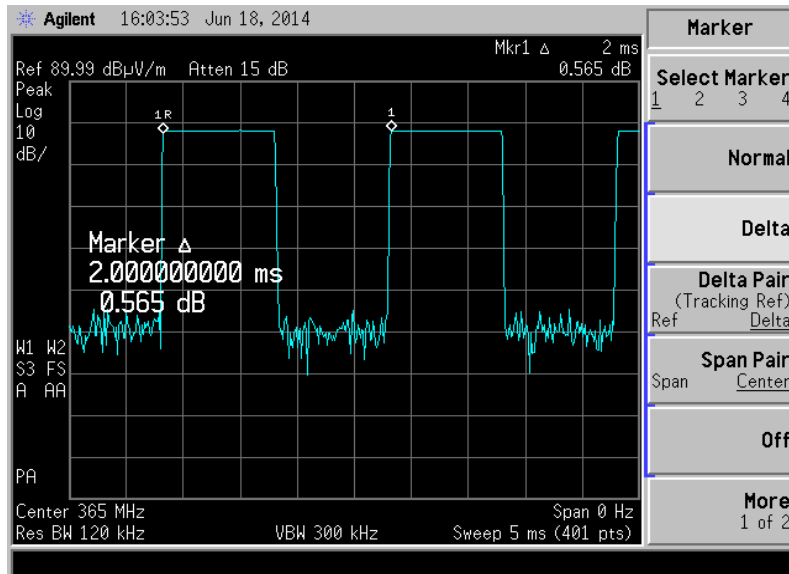

### c. 80% Duty Cycle

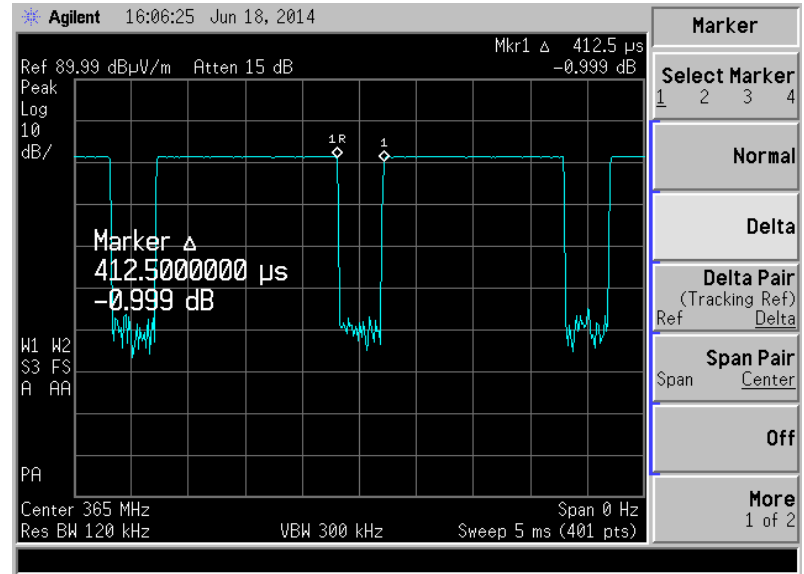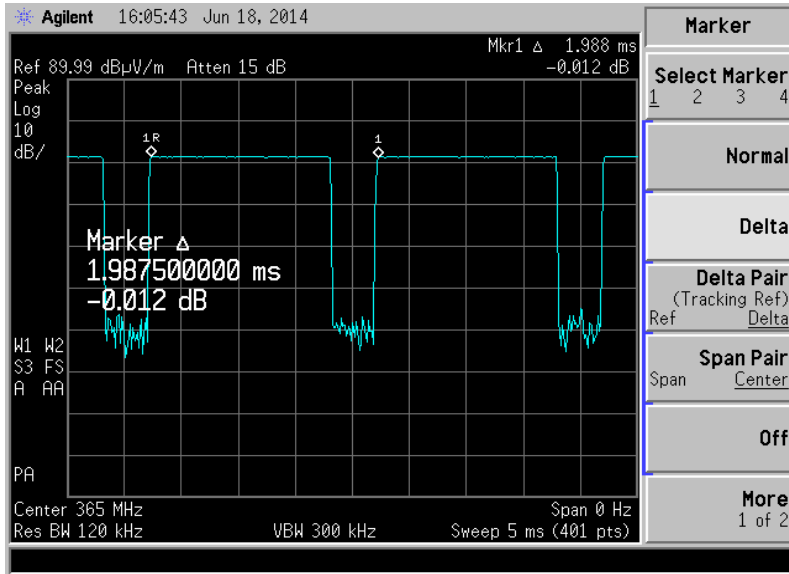


## 10. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, and 433MHz. The occupied bandwidth was determined using the 20dB measurement method.


### a. Occupied Bandwidth Measurement

Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)
288	30	<b>71.72</b>	720
	50	69.51	720
	80	65.62	720
310	30	65.14	775
	50	65.01	775
	80	66.13	775
365	30	62.05	1045
	50	62.74	1045
	80	64.06	1045
433	30	68.12	1045
	50	67.06	1045
	80	64.00	1045

**b. Example of Occupied Bandwidth measurement  
365MHz 30%**

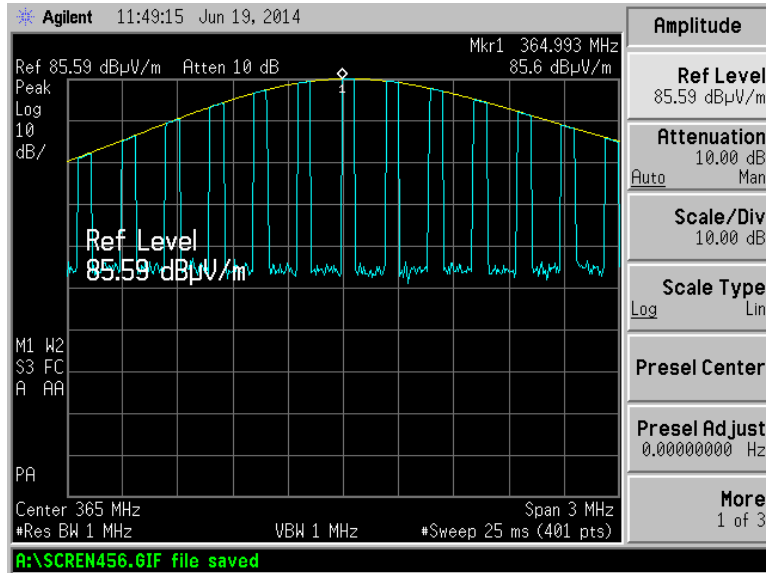

**Measuring Peak Reference Level**

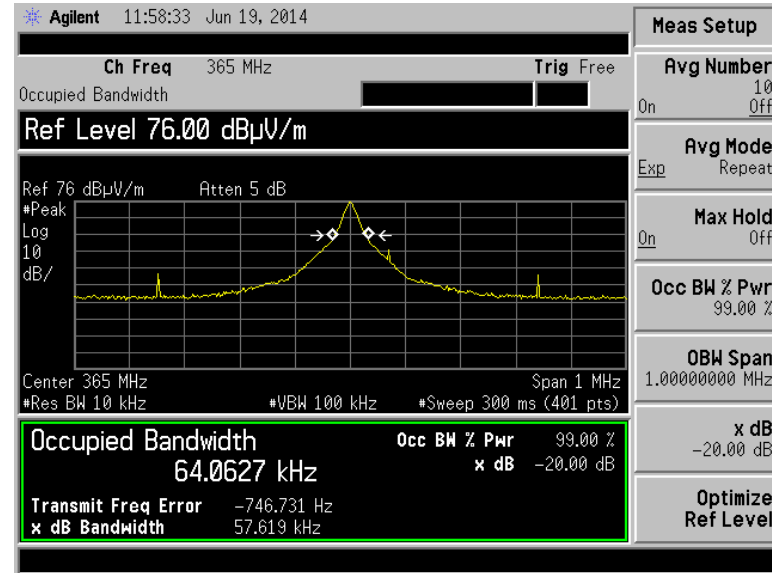

**Measuring Occupied Bandwidth at -20dB points**

## 11. Summary of Emissions Measurements Taken on OATS

Transmitting Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
288	49	Side	H	26.54	40	13.46
	89	Side	H	28.65	40	11.35
	94	Flat	H	28.23	40	11.77
	99	Side	V	28.54	40	11.46
310	38	Side	H	25.32	40	14.68
	55	End	H	26.74	40	13.26
	76	Side	V	24.55	40	15.45
	89	End	V	29.21	40	10.79
	94	End	H	26.75	40	13.25
365	57	Side	H	28.51	40	11.49
	76	Flat	V	28.51	40	11.49
	89	Side	H	28.74	40	11.26
	94	End	H	28.32	40	11.68
	100	Flat	V	29.65	40	10.35
433	57	Flat	V	31.25	40	8.75
	89	Side	H	28.54	40	11.46
	100	End	V	30.21	40	9.79
	120	End	H	31.46	40	<b>8.54</b>

Measurements were made using a peak detector with Resolution BW of 120 kHz and Video BW of 300 kHz. Cable losses and correction factors are included in measurement.



## 12. Receiver Spurious Emissions

The receiver circuit spurious emissions were measured in accordance to Industry Canada RSS-GEN Issue 2 Section 4.10 and ANSI C63.4-2003.

The band midpoint over which the receiver is designed to operate is 368MHz. The Homelink 4 is supplied with commands to place it into diagnostic / manufacturing mode, and tune the receiver to the midpoint frequency.

The search for spurious emissions was conducted over a range of 286MHz (The lowest oscillator frequency used by the receiver) to 1350 MHz (3 times the highest tunable frequency of 450MHz).

To determine the orientation of the device at which the worst case emissions would occur, exploratory measurements were taken using a diagnostic command to transmit at the midpoint frequency of 368 MHz. The device was then set to receive using a manufacturing diagnostic command. Refer to setup photograph. The device under test is on its side, with the antenna in horizontal polarization.

Measurements from 286MHz to 1 GHz were made with the spectrum analyzer using the peak detection method. The resolution bandwidth setting was 120 kHz. **At the fundamental frequency, 365 MHz, the receiver spurious emissions measurement was 135.26uV/m at 3m. Remaining 64.74 uV/m below the limit.**


Receive Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (uV/m)	Limit (uV/m)	Margin (uV/m)
365	296	End	H	112.48	200	87.52
	323	End	H	114.54	200	85.46
	377	End	H	135.26	200	<b>64.74</b>
	379	End	H	125.21	200	74.79
	649	End	H	124.22	200	75.78
	999	End	H	135.24	500	364.76
	1000	End	H	184.65	500	315.35
	1037	End	H	179.25	500	320.75
	1040	End	H	185.23	500	314.77
	1110	End	H	200.21	500	299.79
	1155	End	H	204.16	500	295.84
	1195	End	H	221.35	500	278.65
	1199	End	H	245.26	500	254.74
	1350	End	H	235.66	500	264.34

Ambient

### 13. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at 288MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

#### a. Plot of output power over supply voltage

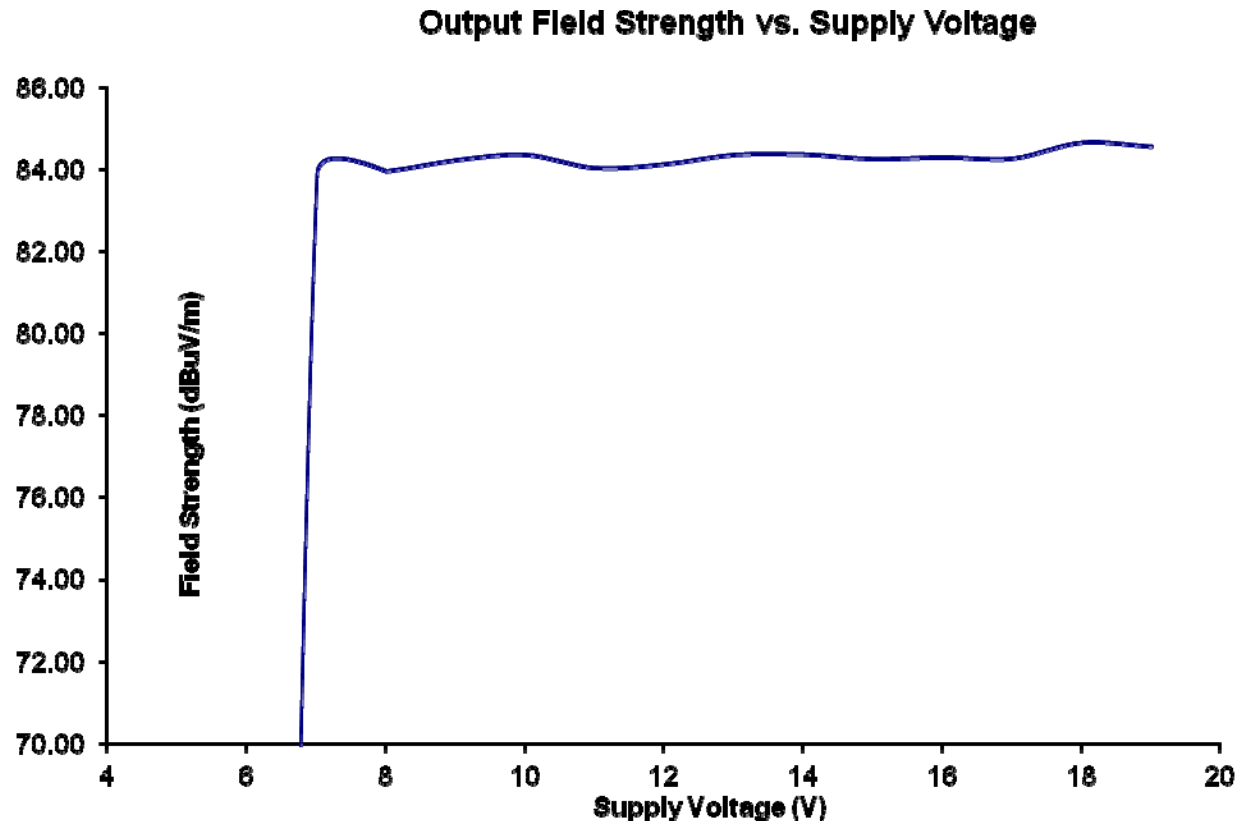

## b. Output Power as a Function of Supply Voltage


Voltage	Field Strength (dBuV/m)
6	0
7	83.87
8	83.95
9	84.22
10	84.35
11	84.03
12	84.12
13	84.35
14	84.36
15	84.25
16	84.29
17	84.26
18	84.65
19	84.55
20	

## 14.0 Verification of De-activation after 5 seconds


This device stops transmitting once the activation button is released.

### Tuning Pulse Measurements

This device uses pulses to tune the antenna prior to transmission. Measurements of these tuning pulses over 100 msec windows show that these pulses are below the FCC limits for operation in this band. A summary of measurements is presented in section 7.4.8.4. Tuning pulse measurements were taken at 288, 310, and 433 MHz at a duty cycle of 30%. Settings in the screen capture below were not used to make the measurements presented in section 7.4.8.4.

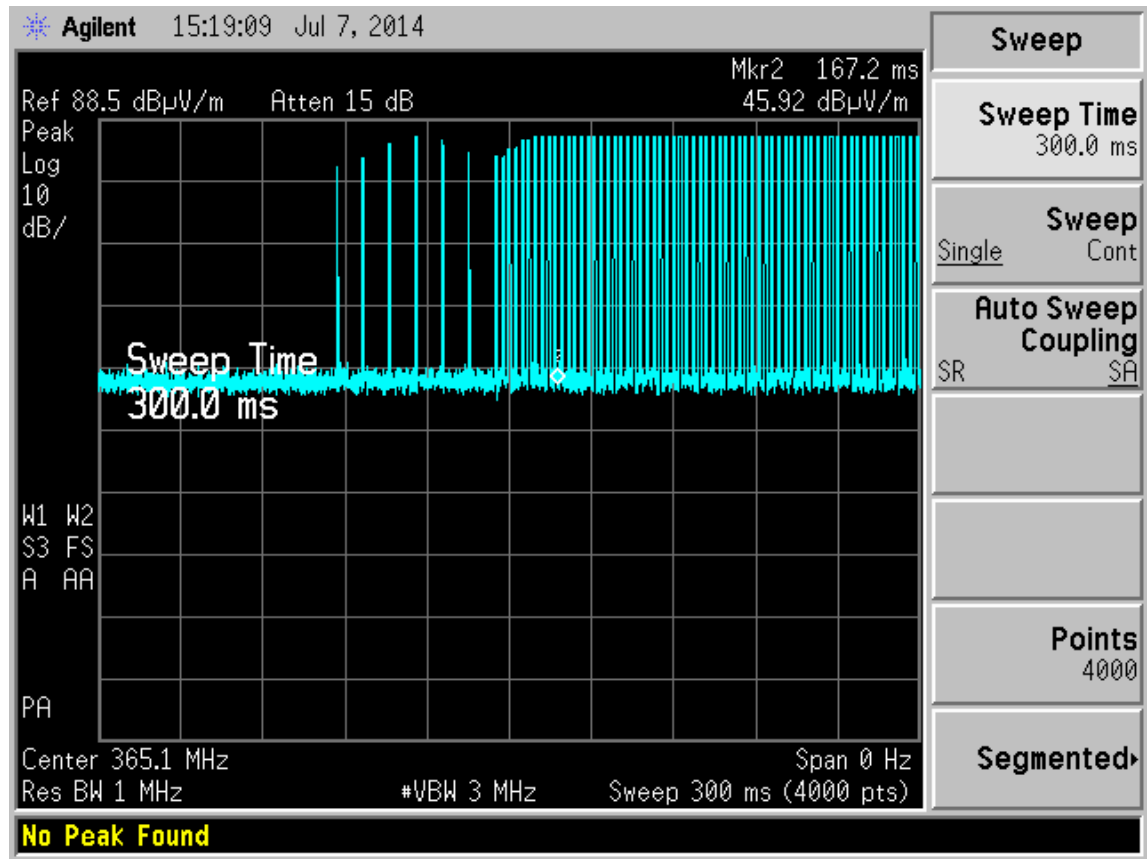


## 14.1 Tuning Pulse (288MHz)

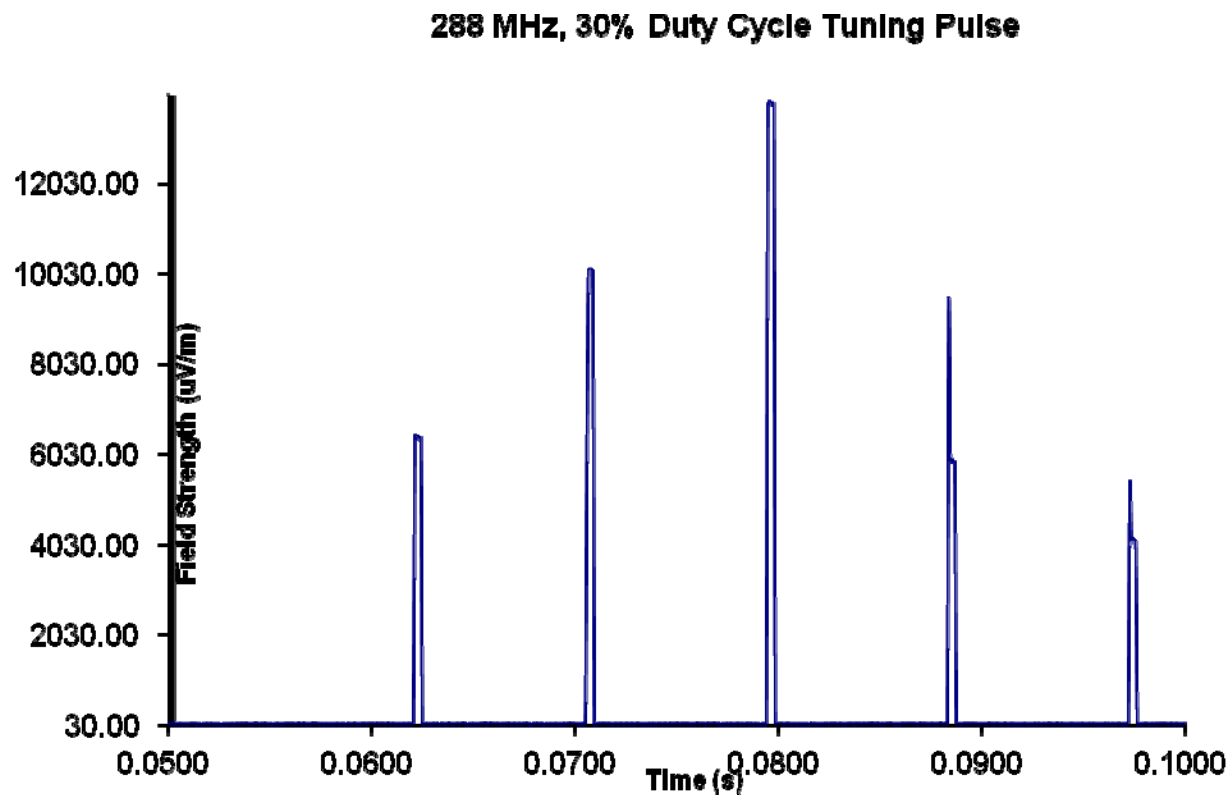


## 14.2 Tuning Pulse (310MHz)

310 MHz, 30 % Duty Cycle Tuning Pulse

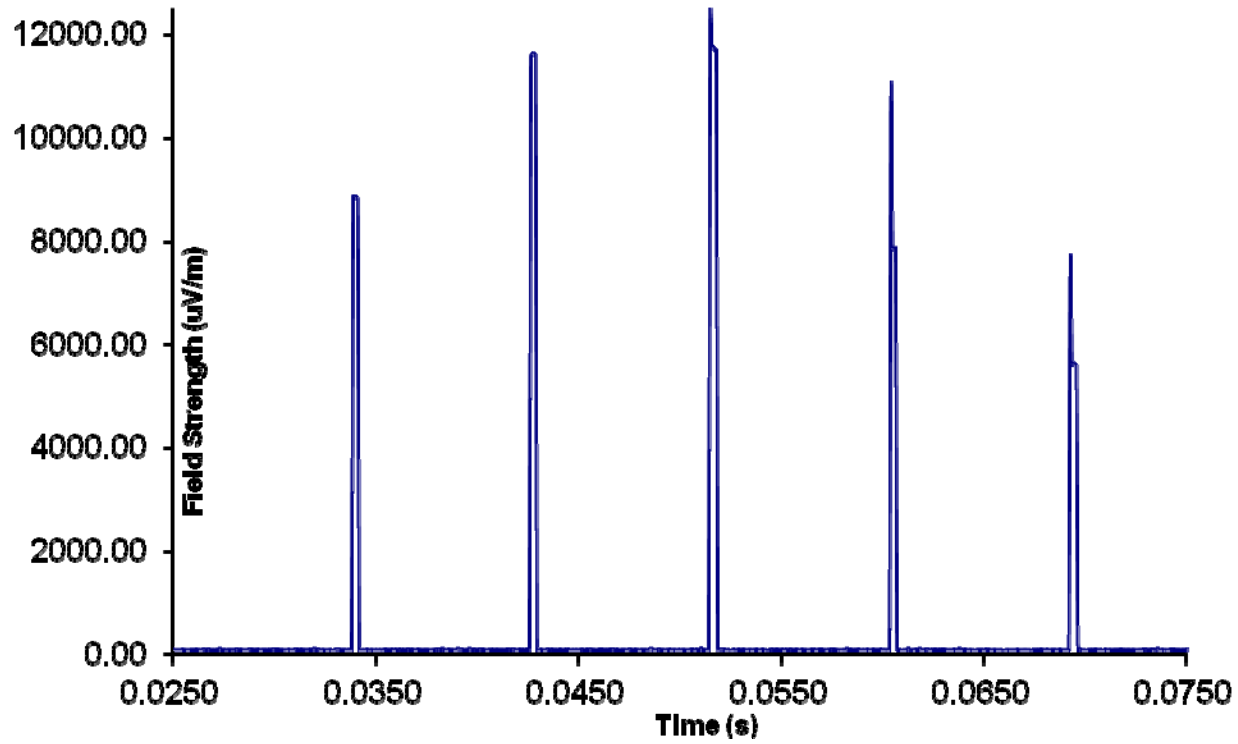

### 14.3 Tuning Pulse (433 MHz)

433 MHz, 30 % Duty Cycle Tuning Pulse  
( 100ms window )

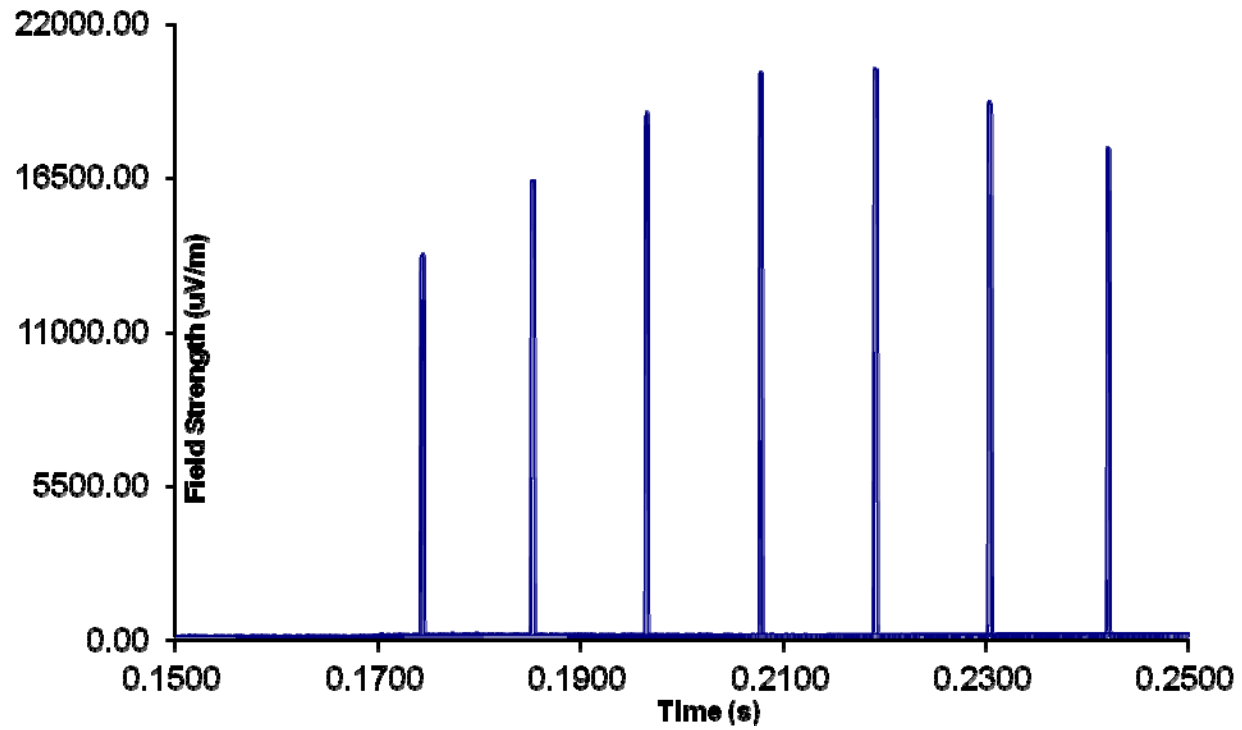



## 14.4 Summary of Tuning Pulse Measurements

Measurement Settings:

Resolution Bandwidth: 1MHz

Video Bandwidth: 3 MHz

Sweep Time: 300 msec.

For this measurement 4000 points were recorded and the values averaged over 100 msec. windows that captured the tuning pulse.

Frequency (MHz)	Average (uV/m)	Limit (uV/m)	Margin (dB)
288	346	4915	<b>23.0</b>
310	395	5831	23.4
433	596	10958	25.3