


FCC/ISED Test Report

Prepared for: Gentex Corporation

Address: 380 Riley Street
Zeeland, MI 49464

Product: EG-01-AC-00

Test Report No: R20220506-20-E1 Rev: C

Approved by: 
Fox Lane
EMC Test Engineer

DATE: May 15, 2024

Total Pages: 31

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		

REVISION PAGE

Rev. No.	Date	Description
0	8 April 2024	Issued by FLane Reviewed by KVepuri Prepared by Flane/ESchmidt
A	8 April 2024	Updated Model Number
C	15 May 2024	Added power values and statements to EUT Description – FL



Report Number: R20220506-20-E1


Rev

C

Prepared for: Gentex Corporation

CONTENTS

Revision Page	2
1.0 Summary of test results.....	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units.....	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description.....	6
3.2 Test personnel.....	6
3.3 Test equipment.....	7
3.4 General Test Procedure and Setup for Radio Measuremnts.....	8
4.0 Results	9
4.1 Radiated emissions.....	10
4.2 Output Power	14
4.3 Band edges	25
Appendix A: Sample Calculation	27
Appendix B – Measurement Uncertainty	29
Appendix C – Graphs and Tables	30
REPORT END.....	31

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

1.0 SUMMARY OF TEST RESULTS

The purpose of this report is to verify compliance due to changes in device. The worst case spurious was investigated and found to be compliant.


The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 3

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	NA*
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 3 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 3 Section 5.5	Band Edge Measurement	Pass

*No limit

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

Purpose of this report was to ensure compliance of the following pre-approved module;

FCCID: VPYLB1DX

Transmitter power was lowered from grant to ensure compliance with Exposure requirements, power data can be found in section 4.2.

EUT	EG-01-AC-00
FCC ID (Pre-Certified Module)	VPYLB1DX
EUT Received	24 October 2023
EUT Tested	24 October 2023 - 11 December 2023
Serial No.	129595-2 (Radiated Measurements) 129593-1 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input checked="" type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	5VDC USB Intertek AC Adapter Model: SPF20-TC


NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The unit was set to recording mode and transmitter was activated for duration of testing.

2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
4740 Discovery Drive
Lincoln, NE 68521

A2LA Certificate Number: 1953.01
FCC Accredited Test Site Designation No: US1060
Industry Canada Test Site Registration No: 4294A-1
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
Temperature of $22 \pm 3^\circ$ Celsius




3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing, Review, and Report
2	Blake Winter	Test Engineer	Testing
3	Ethan Schmidt	Test Technician	Testing and Report
4	Karthik Vepuri	Test Engineer	Review/Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		


3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 17, 2023	July 17, 2025
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	July 17, 2023	July 17, 2025
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 18, 2023	July 17, 2025
SunAR RF Motion	JB1	A091418	July 27, 2023	July 26, 2024
ETS-Lindgren Red Horn Antenna	3115	218576	July 31, 2023	July 30, 2024
EMCO Horn Antenna	3116	2576	July 31, 2023	July 30, 2024
Com-Power LISN, Single Phase	LI-220C	20070017	July 17, 2023	July 17, 2025
Agilent Preamp*	87405A	3950M00669	June 5, 2023	June 5, 2025
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	June 5, 2023	June 5, 2025
Trilithic High Pass Filter*	6HC330	23042	June 5, 2023	June 5, 2025
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	June 5, 2023	June 5, 2025
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	June 5, 2023	June 5, 2025
RF Cable (control room bulkhead to test receiver)	FSCM 64639	01F1206	June 5, 2023	June 5, 2025
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	June 5, 2023	June 5, 2025
N connector bulkhead (control room)	PE9128	NCEEBH2	June 5, 2023	June 5, 2025
TDK Emissions Lab Software	V11.25	700307	NA	NA
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2024
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	May 25, 2022	May 25, 2025

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted ☒

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. Information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

Radiated ☒

All the radiated measurements were taken at a distance of 3m from the EUT. Information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

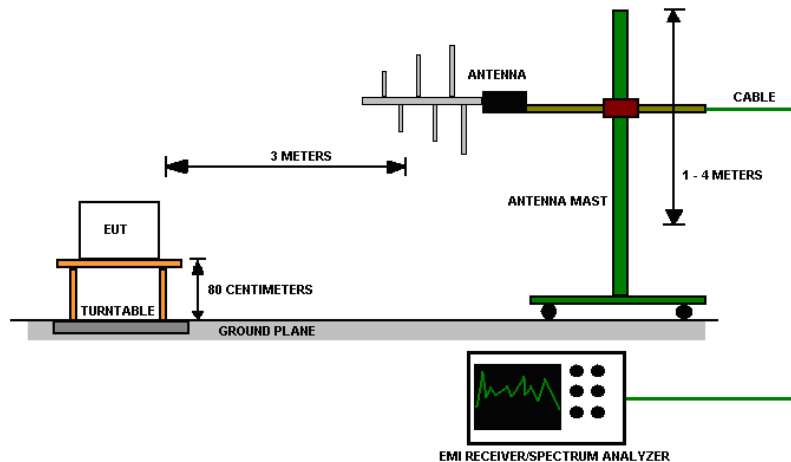


Figure 2 - Radiated Emissions Test Setup



Report Number: R20220506-20-E1

Rev

C

Prepared for: Gentex Corporation

4.0 RESULTS

Restricted Band-Edge, WIFI B Low Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
High	802.11 b	2483.50	51.193	Peak	73.98	22.787	PASS
High	802.11 b	2483.50	40.125	Average	53.98	13.855	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

The worst-case spurious emissions were investigated and found to be compliant.

DTS Radio Measurements

Modulation / Data Rate	CHANNEL	Raw Conducted Output Power (dBm)	DCCF (for Power)	EIRP OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	RESULT
802.11b 1MB	Low	13.01	0	13.010	20.00	PASS
802.11b 1MB	Mid	12.98	0	12.980	19.86	PASS
802.11b 1MB	High	12.93	0	12.930	19.63	PASS
802.11b 11MB	Low	13.05	0	13.050	20.18	PASS
802.11b 11MB	Mid	12.91	0	12.910	19.54	PASS
802.11b 11MB	High	12.92	0	12.920	19.59	PASS
802.11g 6MB	Low	12.99	0.106	13.096	20.40	PASS
802.11g 6MB	Mid	13.01	0.106	13.116	20.49	PASS
802.11g 6MB	High	12.79	0.106	12.896	19.48	PASS
802.11g 54MB	Low	12.97	0.106	13.076	20.30	PASS
802.11g 54MB	Mid	12.73	0.106	12.836	19.21	PASS
802.11g 54MB	High	12.85	0.106	12.956	19.75	PASS
802.11n MCS0	Low	12.86	0.114	12.974	19.83	PASS
802.11n MCS0	Mid	12.83	0.114	12.944	19.70	PASS
802.11n MCS0	High	12.74	0.114	12.854	19.29	PASS
802.11n MCS7	Low	12.88	0.114	12.994	19.93	PASS
802.11n MCS7	Mid	12.79	0.114	12.904	19.52	PASS
802.11n MCS7	High	12.71	0.114	12.824	19.16	PASS

EOP(dBm) = RCOP(dBm) + DCCF(dBi)

4.1 RADIATED EMISSIONS

Test Method:

ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.



Report Number: R20220506-20-E1

Rev

C

Prepared for: Gentex Corporation

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

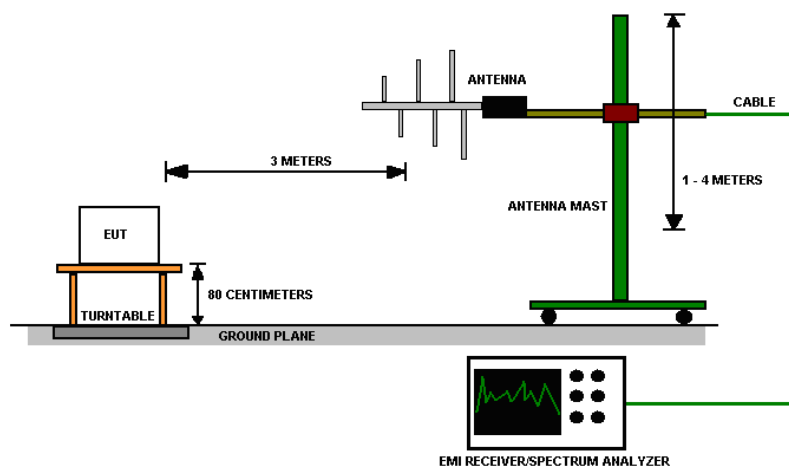


Figure 3 - Radiated Emissions Test Setup

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

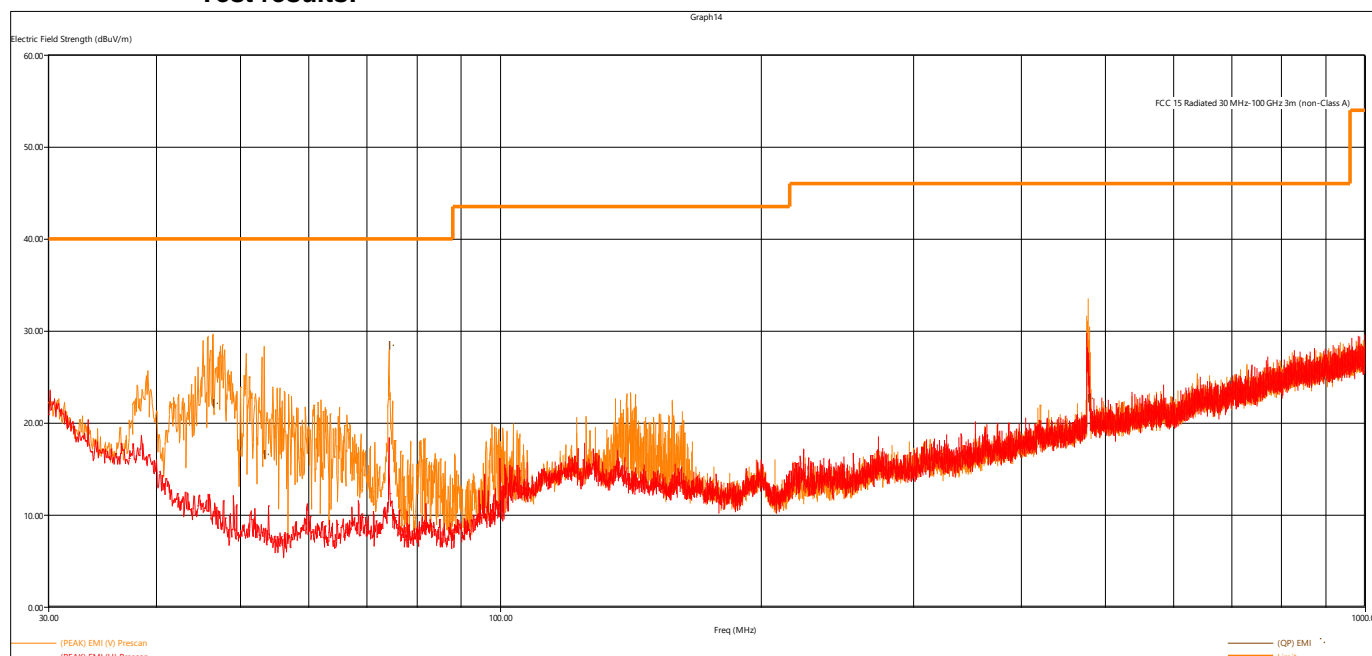


Figure 4 - Radiated Emissions Plot

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
46.492560	22.01	40.00	17.99	113.04	43.50	V	Mid	WIFI B 1MB
53.155680	16.48	40.00	23.52	120.86	144.75	V	Mid	WIFI B 1MB
74.249520	28.35	40.00	11.65	175.25	165.50	V	Mid	WIFI B 1MB
478.260480	22.61	46.02	23.41	290.53	170.50	V	Mid	WIFI B 1MB

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		

4.2 OUTPUT POWER

Test Method: Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:


Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found below.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

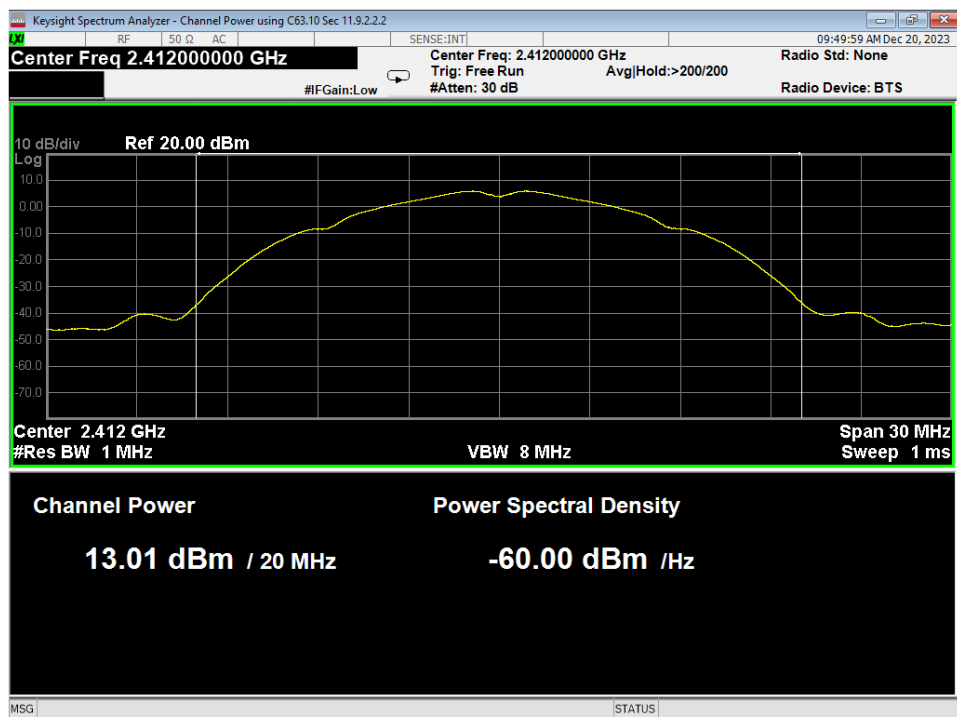


Figure 5 - Conducted Average Power, Wifi B 1MB, Low

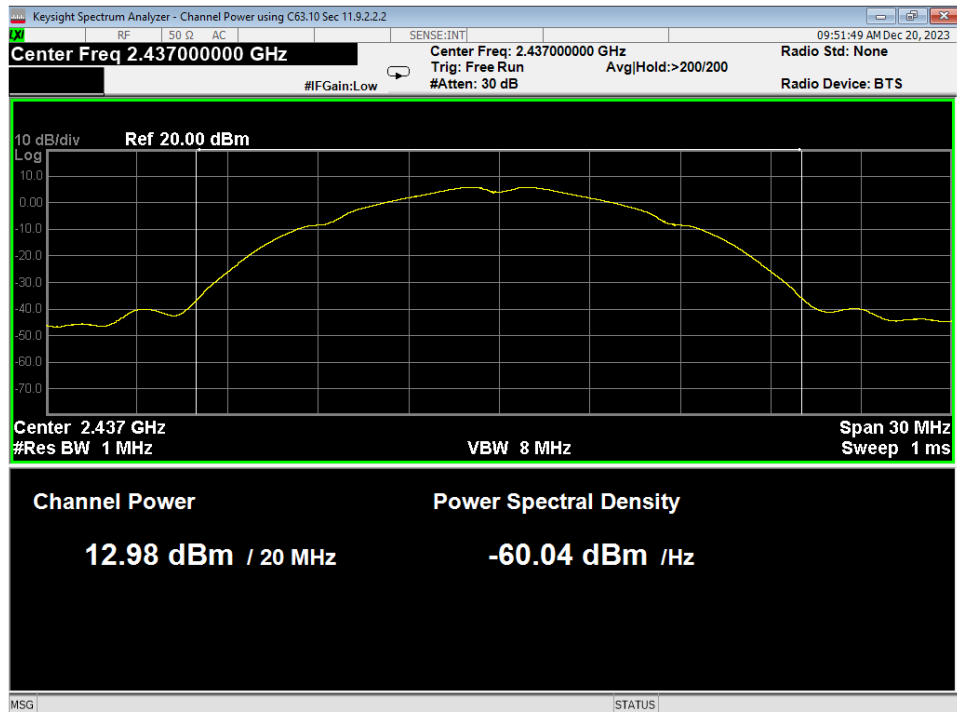



Figure 6 - Conducted Average Power, Wifi B 1MB, Mid

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

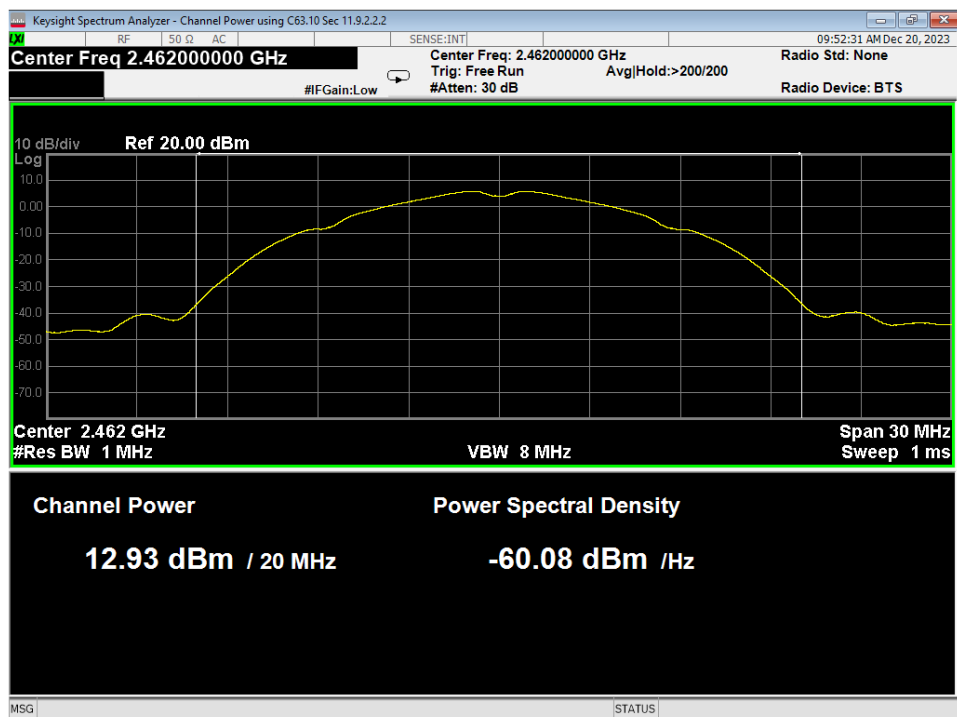


Figure 7 - Conducted Average Power, Wifi B 1MB, High

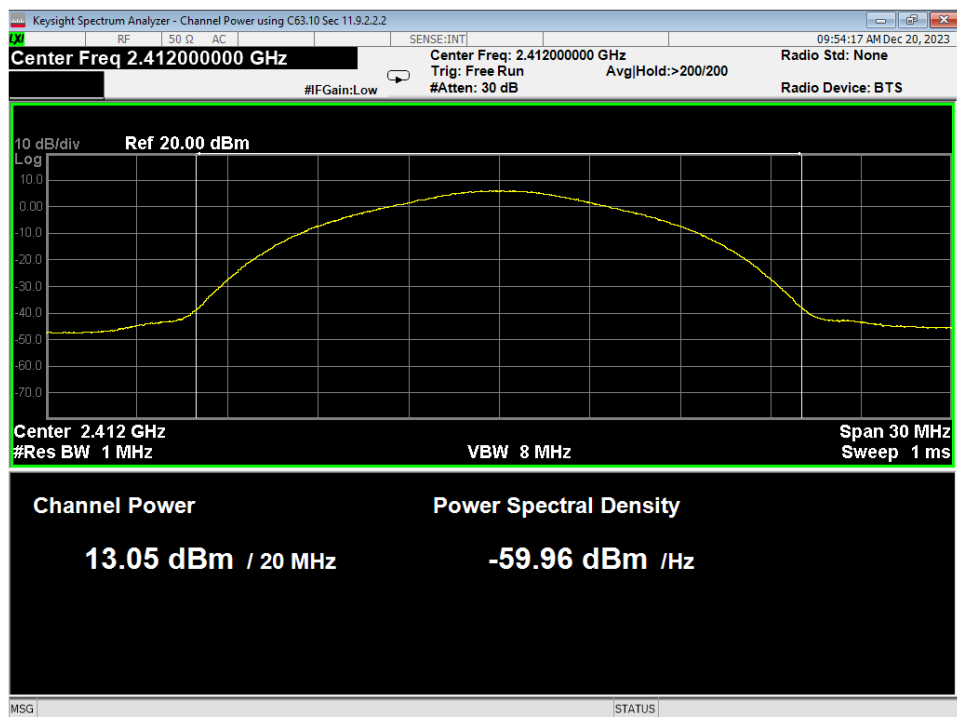


Figure 8 - Conducted Average Power, Wifi B 11MB, Low

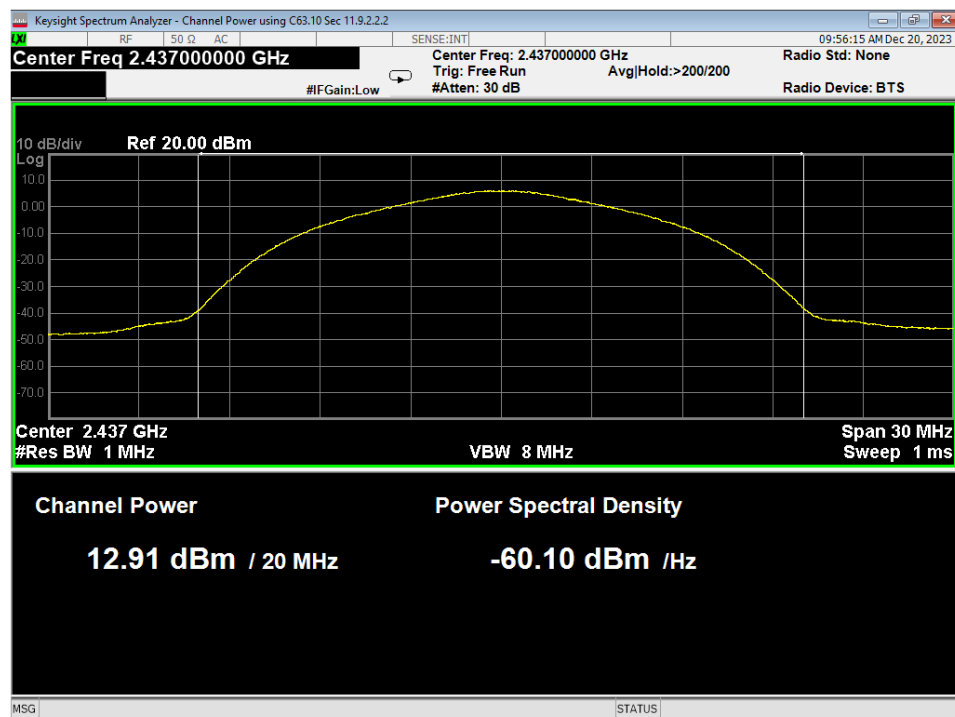


Figure 9 - Conducted Average Power, Wifi B 11MB, Mid

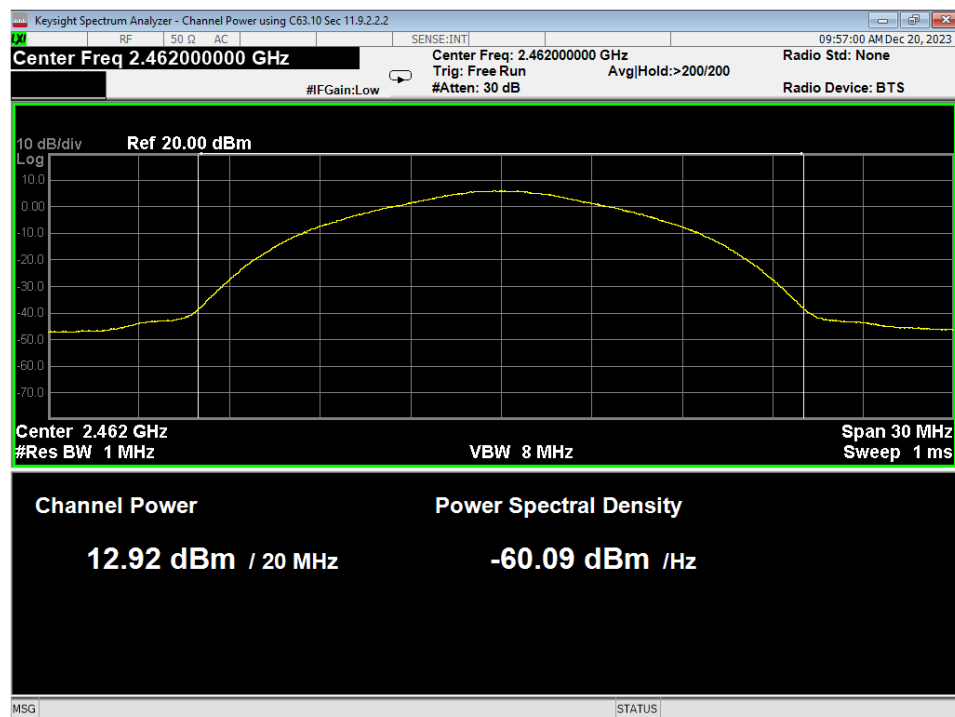



Figure 10 - Conducted Average Power, Wifi B 11MB, High

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

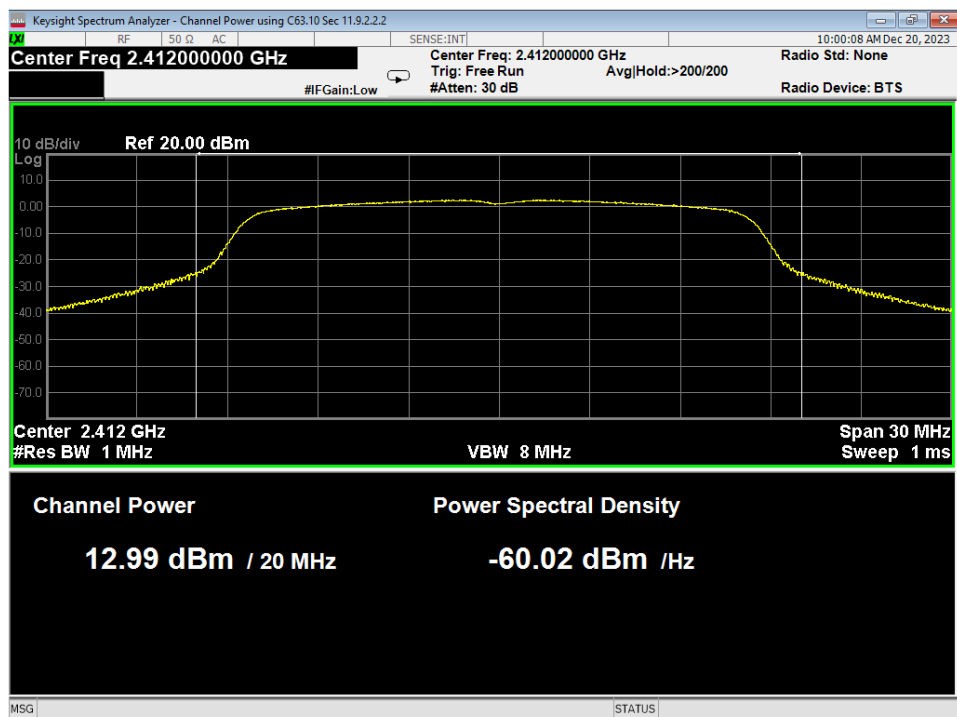


Figure 11 - Conducted Average Power, Wifi G 6MB, Low

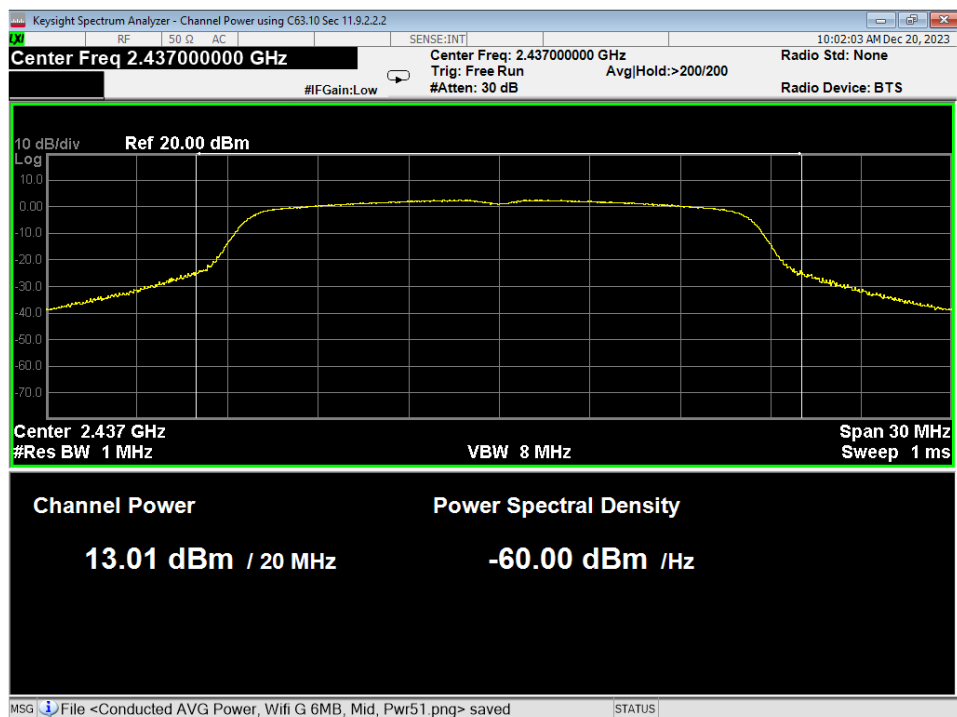


Figure 12 - Conducted Average Power, Wifi G 6MB, Mid

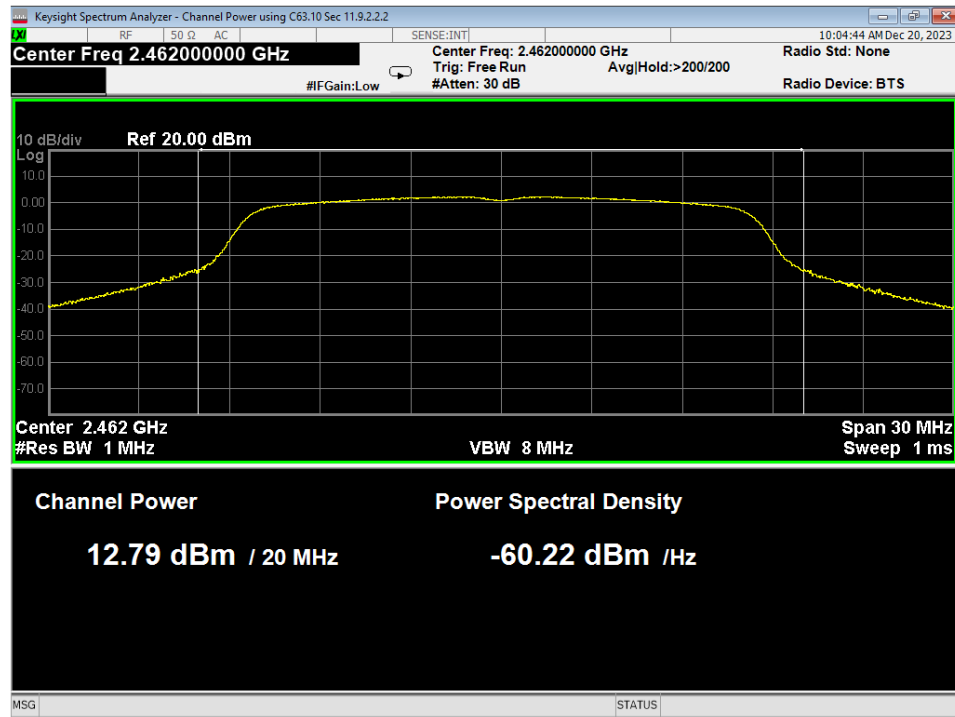


Figure 13 - Conducted Average Power, Wifi G 6MB, High

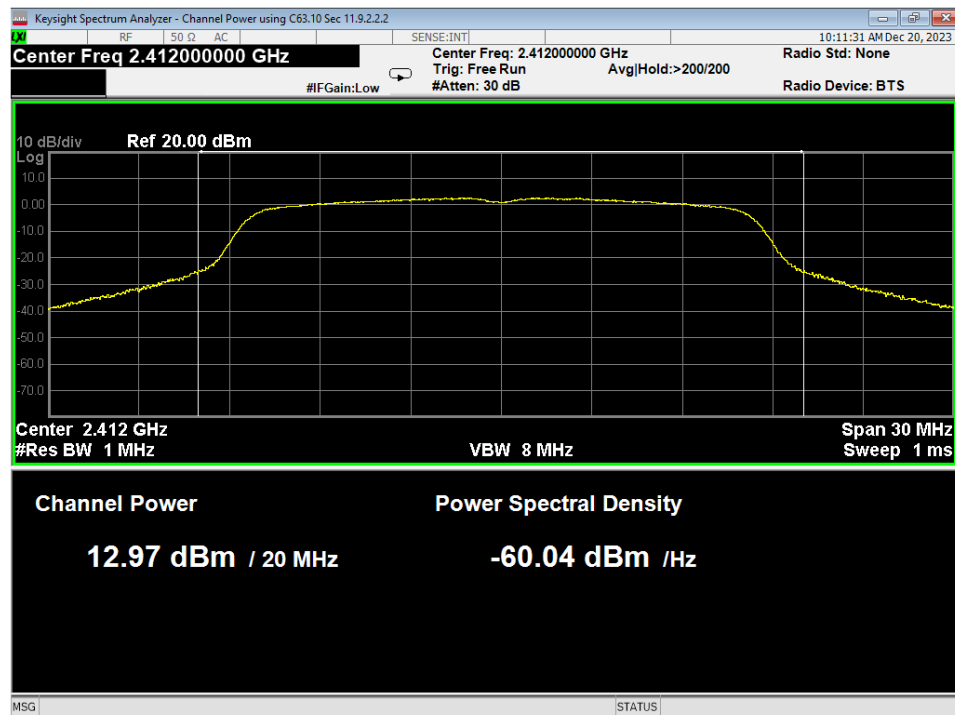



Figure 14 - Conducted Average Power, Wifi G 54MB, Low

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

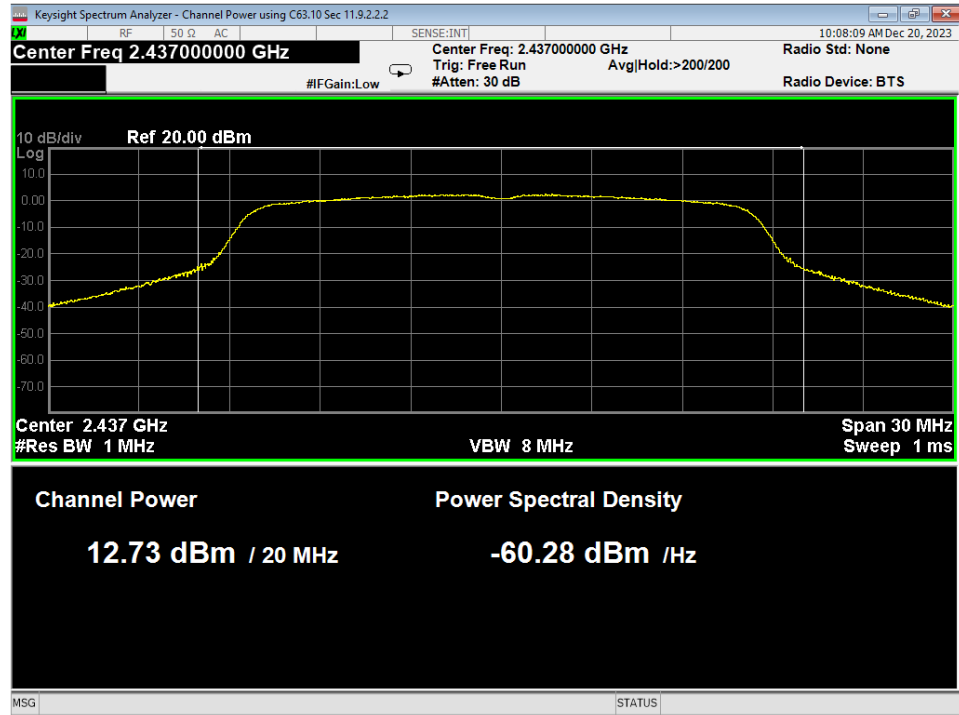


Figure 15 - Conducted Average Power, Wifi G 54MB, Mid

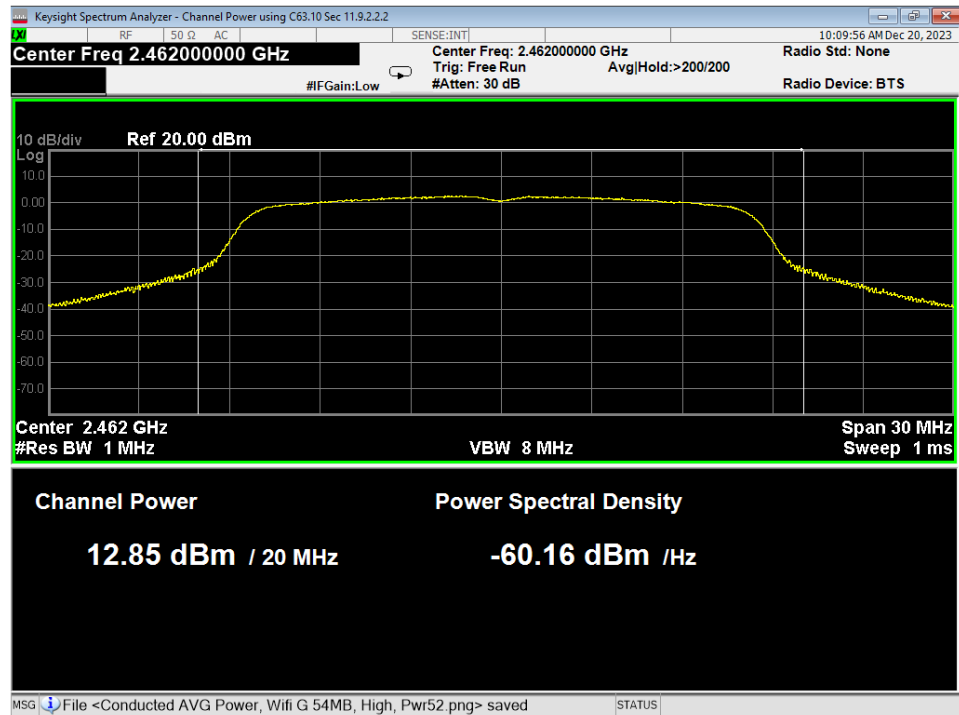


Figure 16 - Conducted Average Power, Wifi G 54MB, High

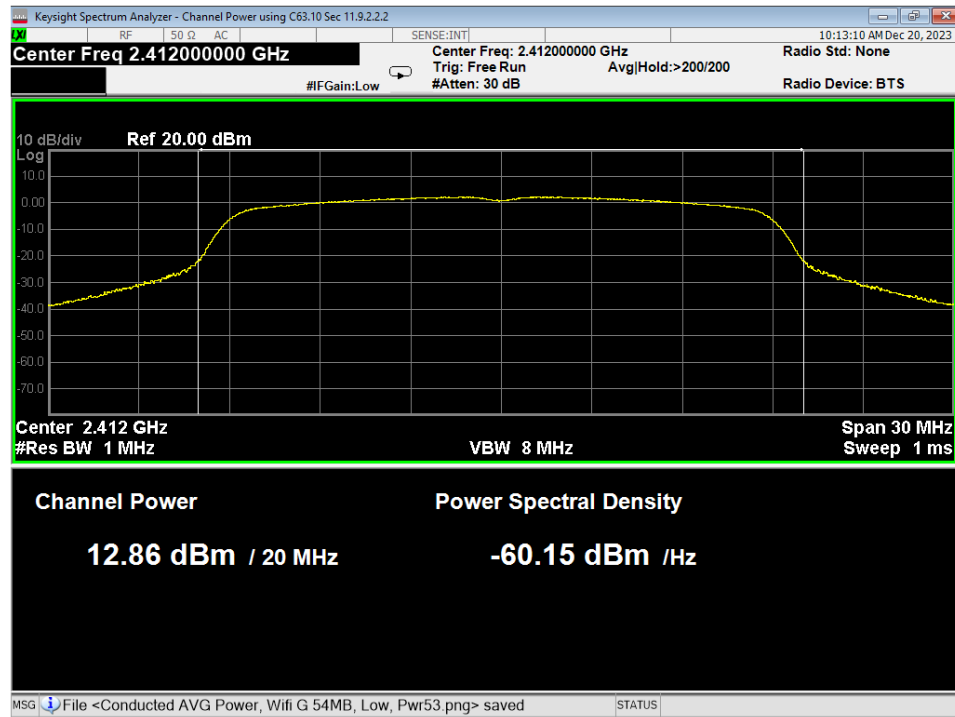


Figure 17 - Conducted Average Power, Wifi N MCS0, Low

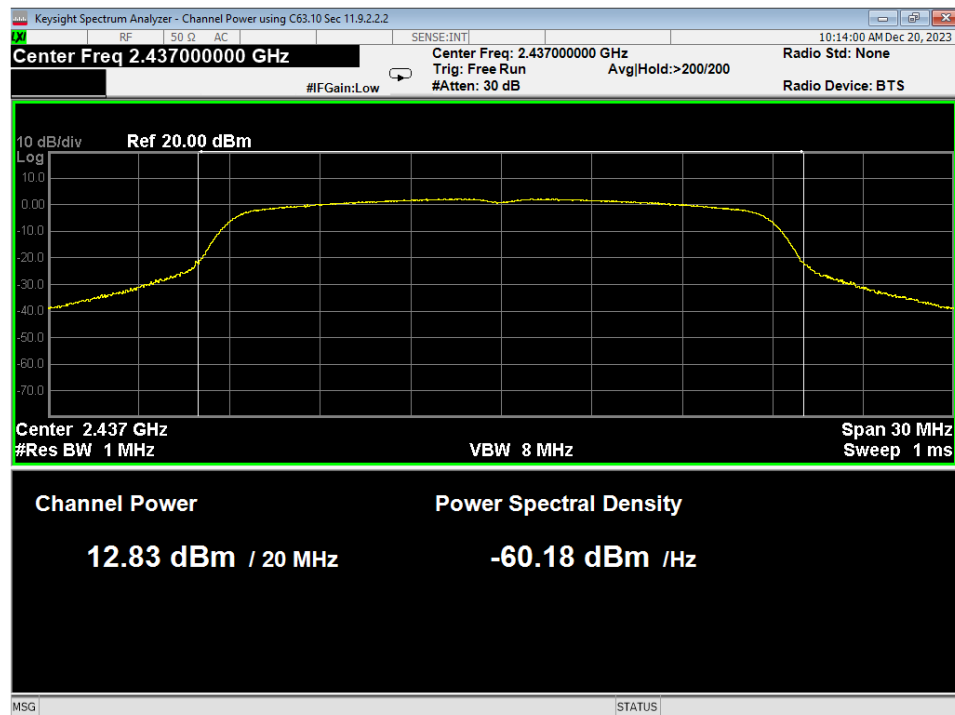



Figure 18 - Conducted Average Power, Wifi N MCS0, Mid

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

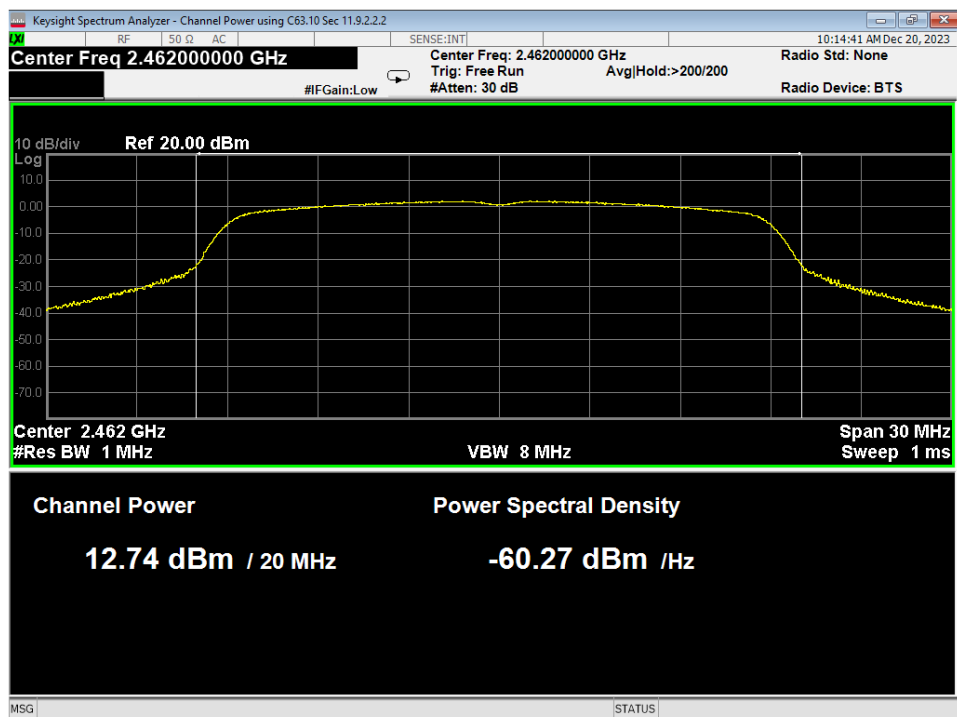


Figure 19 - Conducted Average Power, Wifi N MCS0, High

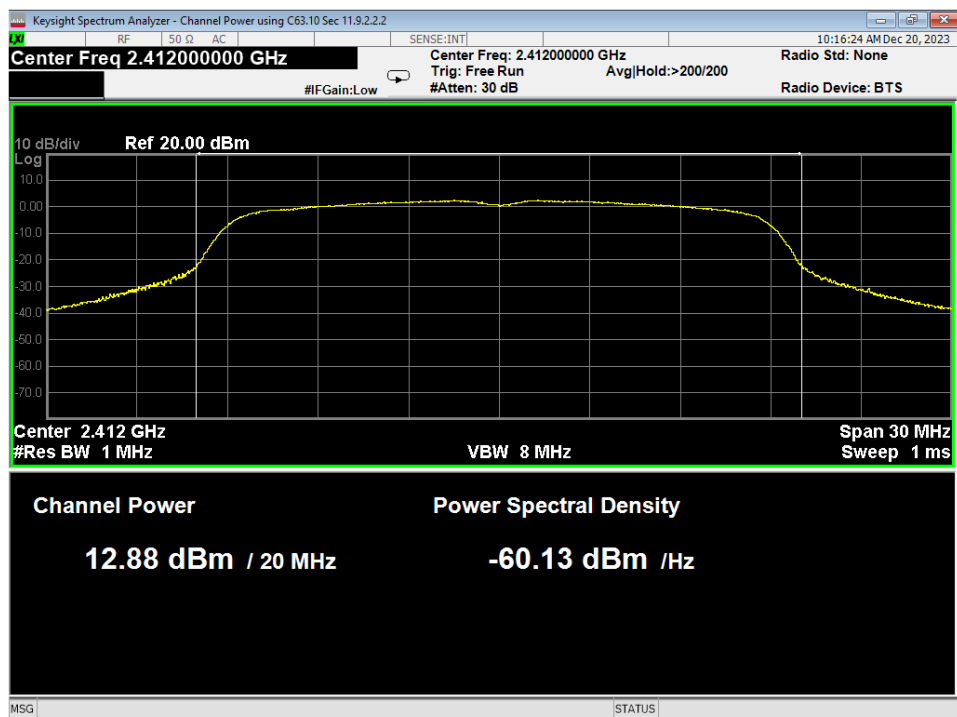



Figure 20 - Conducted Average Power, Wifi N MCS7, Low

	Report Number:	R20220506-20-E1	Rev	C
	Prepared for:	Gentex Corporation		

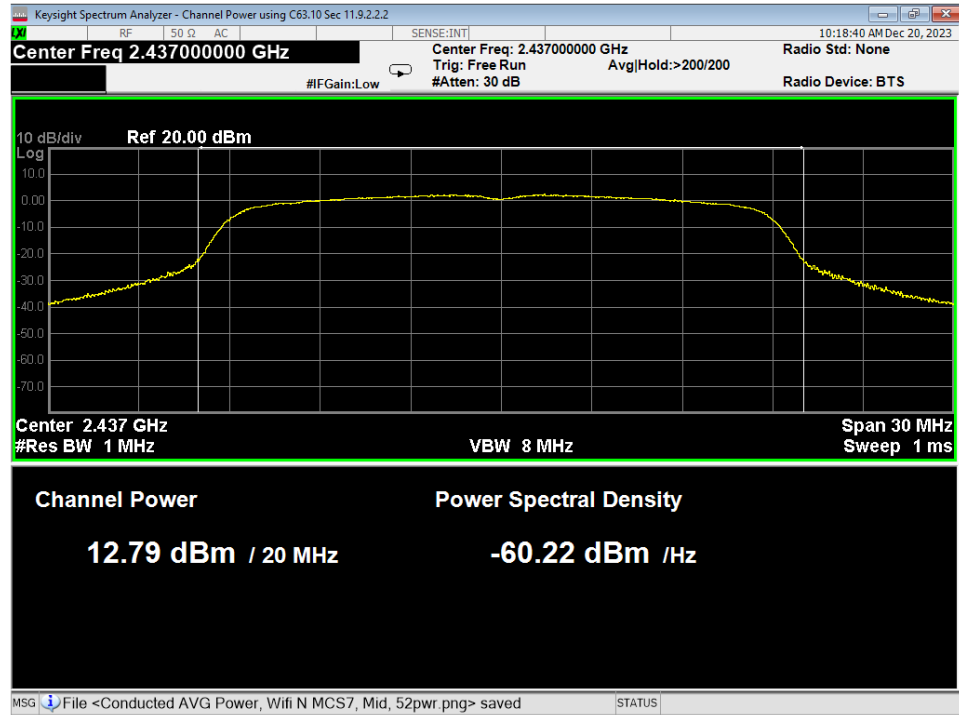


Figure 21 - Conducted Average Power, Wifi N MCS7, Mid

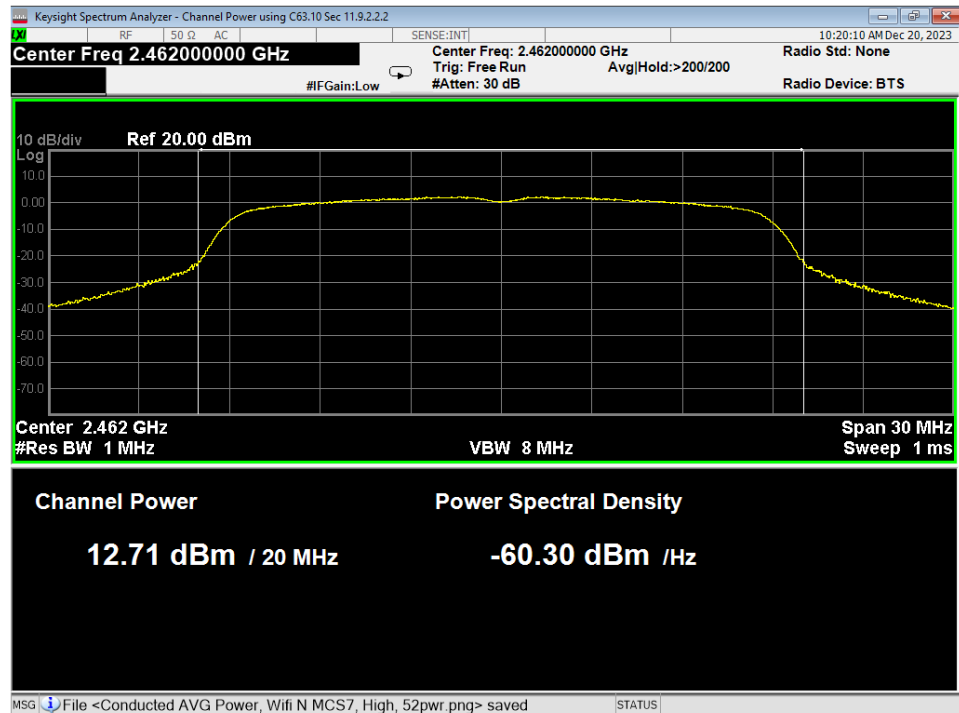


Figure 22 - Conducted Average Power, Wifi N MCS7, High



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		

4.3 BAND EDGES

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:**For FCC Part 15.247 Device:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:

R20220506-20-E1

Rev

C

Prepared for:

Gentex Corporation

Test results:

Pass

Comments:

1. All the band edge plots can be found in Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing it to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number: R20220506-20-E1

Rev

C

Prepared for: Gentex Corporation

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{\text{on}}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number: R20220506-20-E1

Rev

C

Prepared for: Gentex Corporation

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

$10\log(10^9)$ is the conversion from micro to milli



Report Number: R20220506-20-E1

Rev

C

Prepared for: Gentex Corporation

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08
Emissions limits, conducted	30MHz – 18GHz	±3.03

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		

APPENDIX C – GRAPHS AND TABLES

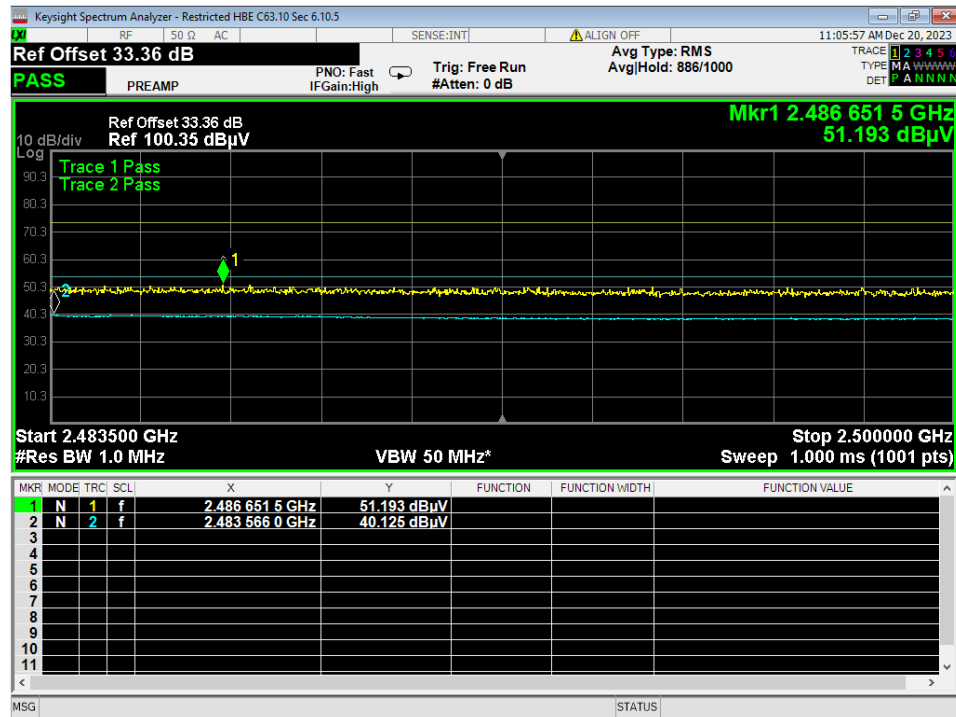

HBE Restricted, Wifi B 1MB



Report Number:	R20220506-20-E1	Rev	C
Prepared for:	Gentex Corporation		

REPORT END