

**Amber Helm Development L.C.**

92723 Michigan Hwy-152  
Sister Lakes, MI 49047

**EMC Test Report**

**#1301752FX-JLXHL4**

**Issued 11/27/13**

**Regarding the FCC Part 15 testing**



**Rear View Mirror**

**Model Number: JLXHL4 Family**

**Category: 15.231 Transmitting Device**

**FCC ID NZLJLXHL4**

**Judgments: FCC Part 15.231 – Compliant**



NVLAP LAB CODE 200129-0

*Prepared for:*

*Craig Harder  
Gentex Corp.  
600 N Centennial St  
Zeeland, Mi. 49464*

Test Date(s):

08/8/13-11/14/13

Report prepared by:

David J. Miller, NCE

Report reviewed by

Gordon L. Helm, NCE

Data recorded by:

Gordon L. Helm, NCE  
Test Engineer, AHD

**Table of Contents**

Statements concerning this report ..... 3

FCC Required user statements: ..... 4

FCC Part 15 Class A or B Digital Devices or Peripherals: ..... 4

Industry Canada Required user statements: ..... 5

Summary of Results ..... 7

Changes Made to Achieve Compliance: ..... 8

EUT Descriptions ..... 9

Specifications: ..... 10

EUT Block Diagram:..... 10

EUT Pictures ..... 11

Equipment Test Setup: ..... 15

Support Equipment & Cabling..... 15

Setup Pictures ..... 16

Measurement Report ..... 18

Standards Applied to Test ..... 18

Equipment Configuration ..... 18

Test Methodology..... 18

Transmit: ..... 18

Receive: ..... 19

Radiated:..... 19

Variance from Test Procedure:..... 19

Test Data..... 20

Restricted Band Harmonic Peak Compliance ..... 24

Transmit Mode Non-Harmonic Spurious Emissions ..... 24

Receive Mode Manufacturing Test Burst ..... 24

Receive Spurious Measurements..... 25

Device Deactivation ..... 26

Band Edge and Restricted Band Testing ..... 27

Band Edge Testing Results Table ..... 27

Duty Cycle..... 28

20 dB Bandwidth Measurement: ..... 30

Training Pulse Measurement..... 32

Environment ..... 33

APPENDIX A ..... 34

Measurement Procedures ..... 34

Line Conducted ..... 34

Radiated..... 35

Measurement Facilities & Equipment..... 36

Test Site..... 36

Cable Loss ..... 37

Antenna Factors..... 38

AHD Accreditation..... 39

NARTE SEAL..... 40

## Statements concerning this report

### NVLAP Accreditation: NVLAP Lab Code 200129-0

The scope of AHD accreditation are the test methods of:

IEC/CISPR 22:	Limits and methods measurement of radio disturbance characteristics of information technology equipment.
FCC Method – 47 CFT Part 15:	Digital Devices.
AS/NZS 3548:	Electromagnetic Interference – Limits and Methods of Measurement of Information Technology Equipment.
IEC61000-4-2 and Amend.1:	Electrostatic Discharge Immunity
IEC61000-4-5:	Surge Immunity

### Test Data:

This test report contains data included in the scope of NVLAP accreditation.

### Subcontracted Testing:

This report does not contain data produced under subcontract.

### Test Traceability:

The calibration of all measuring and test equipment and the measured data using this equipment are traceable to the National Institute for Standards and Technology (NIST).

### Limitations on results:

The test results contained in this report relate only to the Item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require an evaluation to verify continued compliance.

### Limitations on copying:

This report shall not be reproduced, except in full, without the written approval of AHD.

### Limitations of the report:

This report shall not be used to claim product endorsement by NVLAP, FCC, or any agency of the US Government.

### Statement of Test Results Uncertainty:

Following the guidelines of NAMAS publication NIS81 and NIST Technical Note 1297, the Measurement Uncertainty at a 95% confidence level is determined to be: +/- 1.4 dB

### Retention of Records:

For equipment verified to comply with FCC regulations, the manufacturer is obliged to retain this report with the product records for ten years following the manufacture of the equipment that was tested.

For equipment verified to comply with RSS-210, the manufacturer is obliged to retain this report with the product records for as long as the model is being marketed in Canada.

**FCC Required user statements:****FCC Part 15 Class A or B Digital Devices or Peripherals:**

For products satisfying the FCC Part 15 Class A or Class B requirements the following are to be satisfied:

1. The following statement is required to be labeled on the product or, if the device is too small, in the user's manual:

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

2. A statement is required to be placed in the User's Manual shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For an FCC Part 15 Class A digital device or peripheral, the user instructions shall include the following or similar statement, placed in a prominent location in the text of the manual:

*Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.*

*Modifications not expressly approved by the manufacturer could void the user's authority to operated the equipment under FCC rules.*


Additionally, for products satisfying the FCC Part 15 Class B requirements the following are to be satisfied:

1. The User's Manual shall include this or similar statement:

*NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:*

- i. Reorient or relocate the receiving antenna.*
- ii. Increase the separation between the equipment and receiver.*
- iii. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- iv. Consult the dealer or an experienced radio/TV technician for help.*

2. For products certified using the Declaration of Conformity approach,
  - a. The FCC conformity LOGO is to be placed on the Class B Digital Device.

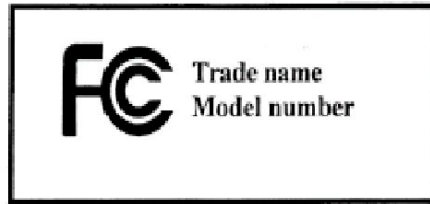

- b. The FCC requires a Compliance Information statement (Declaration of Conformity) to accompany each product to the end user.

## Industry Canada Required user statements:

**Applies to:** [Category II Equipment]

1. For products satisfying the ICES-003, RSS-Gen and RSS-210 Issue 6 requirements the following are to be satisfied:

User manuals for license-exempt LPDs shall contain the following or equivalent statements in a conspicuous position:

*“Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.”*

If the antenna is detachable (i.e. selectable by the user), see the user manual requirement in Section 7.1.4. The following instructions in the user manual are also required:

*“To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropic radiated power (e.i.r.p.) is not more than that permitted for successful communication.”*

The above statements may be placed on the device instead of the manual.

2. User Manual:

User manual shall also contain text declaring compliance to the limits found in this Standard in both English and French.

3. Equipment Labels:

Equipment subject to certification under the applicable RSS's, shall be permanently labeled on each item, or as an inseparable combination. The label must contain the following information for full compliance:

- (a) the certification number, prefixed by the term “IC:”;
- (b) the manufacturer's name, trade name or brand name; and
- (c) a model name or number.

Equipment for which a certificate has been issued is not considered certified if it is not properly labeled.

The information on the Canadian label can be combined with the manufacturer's other labeling requirements.

If the device size is too small to put a label, the label can be included in the user's manual, upon agreement with Industry Canada.

## Summary of Results

1. The device model number 905-4009 was tested for compliance with FCC Regulations, Part 15.231 These tests were performed at AHD EMC Laboratory following the procedures outlined in ANSI C63.4.
2. The device FCCID is NZLJLXHL4.
3. The transmitter test results apply to the JLXHL4 family of devices, which include the 905-4009 and 905-4011 devices.
4. The device tested is compliant to the requirements of FCC Part 15.231 for a periodic digital transmitting device.
5. The device utilizes an integrated PCB antenna with less than 3dBi of gain.
6. Non-transmit related spurious radiation measurements associated with this JLXHL4 family of devices are provided in the 1301758FB-4009, and 1301758FB-4011 specific reports.
7. The equipment under test was received on 8/8/13 and this test series commenced on 8/8/13.
8. Device operates on 12VDC battery so no conducted testing was performed.
9. Device is designed to be programmed for operation between 288-450 Mhz, with the exception of the regions between 303.5 to 307.5MHz, 322 to 335.4MHz and 399.9 to 410 MHz. Device operates at 3 possible duty cycle settings: 30%, 50%, and 80%. Transmit power automatically adjusts to higher levels at lower duty cycle settings.
10. 3 representative frequencies were tested to validate device: 288 MHz, 310 MHz, and 433 MHz.
11. Worst case fundamental transmit signal was measured at 310 MHz at 50% modulation in a side orientation vertically polarized. The signal was measured to be 2539 uV/m below the FCC 15.231 limit of 5833 uV at 310 MHz.
12. Worst case “training mode” transmit signal was measured at 288 MHz at 30% modulation. The signal was measured to be 3462 uV/m below the FCC 15.231 limit of 4917 uV/m at 288 MHz.
13. Worst case spurious transmit harmonic was measured at 1550 MHz operating at a fundamental frequency of 310 MHz. The device was programmed for 80% modulation. The signal was measured to be 338.53 uV/m below the restricted band limit of 500 uV/m. This was also the worst case restricted band harmonic signal.
14. Worst case transmit restricted signal peak data was measured at 1221 MHz operating at a fundamental frequency of 433 MHz. The signal was measured to be 25.4 dB below the FCC 15.35 limit of 74dB above 1 GHz.
15. In transmit mode, the worst case non-harmonic spurious emission was detected at 1221 MHz when transmitting at 433 MHz. The signal was measured to be 230.85 uV/M under the 15.231 limit of 500 uV/M when measured at 3 Meters.
16. In “training” receive mode, a 917 msec transmit burst was observed at 310 MHz. This burst represents an expected 30% duty cycle manufacturing test occurrence whenever receive mode is initiated. This burst was measured to be 4439 uV/m below the 15.231 limit of 5833 uV/m at 310 MHz.

17. In “training” receive mode, no spurious radiated signals were found above the ambient noise floor of the receiving instrument.
18. The device demonstrated compliance with the 15.231.a.1 5 second transmit deactivation requirement with a margin of 4.872 seconds.
19. The device demonstrated compliance to band edge limits by failing to “train” as a transmitter within 500 KHz of top (470 MHz), bottom (260 MHz), and restricted band edges of 322-335.4 MHz and 399.9-410 MHz.
20. The device demonstrated compliance to restricted band limits by failing to “train” as a transmitter within restricted band edges of 322-335.4 MHz and 399.9-410 MHz.
21. Scope plots are provided demonstrating the device’s ability to operate at 30%, 50%, and 80% bandwidths.
22. The worst case 20 dB occupied bandwidth was measured at a fundamental frequency of 310 MHz. The occupied bandwidth was measured to be 122 KHz under the limit of 775 KHz at 310 MHz.

### **Changes Made to Achieve Compliance:**

1. L104 was changed to a shielded component to reduce spurious radiation. Manufacturing BOM was updated to reflect change.



## EUT Descriptions

**Model:** Rear View Mirror

**Model number:** 905-4009 representing the JLXHL4 family of devices.

**Serial/ID No:** AHD-4009

**Description:** : Programmable Frequency Garage Door Opener / Digital Device Controller with 1 set of front facing optics that provide a Smart Beam oncoming high beam detect function and rear facing optics that provide auto-dimming function. Device is designed to be programmed for operation between 288-450 Mhz, with the exception of the regions between 303.5 to 307.5MHz, 322 to 335.4MHz and 399.9 to 410 MHz. Device operates at 3 possible duty cycle settings: 30%, 50%, and 80%. Transmit power automatically adjusts to higher levels at lower duty cycle settings.

**Antenna:** Integrated / PCB loop antenna with less than 3dBi gain.

**PCBs:** Transmit / Homelink PCB: 700-0433 V002  
 Mirror / Controller PCB: 700-0073 VBAE

### Family Device Features and PCB's:

Model	Description	Bare PCB Number	PCB Assembly Number	PCB Description	Report
905-4011	SmartBeam + Auto Dimming (CAN Bus enabled)	700-0073 VBAE	705-1918	3/4 length	1301758FB-4011
905-4009	Base - Auto Dimming	700-0410 V003	705-1917	Trapezoidal	1301758FB-4009
JLXHL4	Homelink PCB	700-0433-V002	705-1839	Square	1301752FX-JLXHL4


## Specifications:

**Input Power: 12V DC**

**Outputs Signals:** 288-450 Mhz digitally encoded, with the exception of the regions between 321-336.4 MHz and 398.9-411 MHz.

**Input Signals:** Receive / training function and inputs from 2 forward facing and 1 rear facing optics.


## EUT Block Diagram:

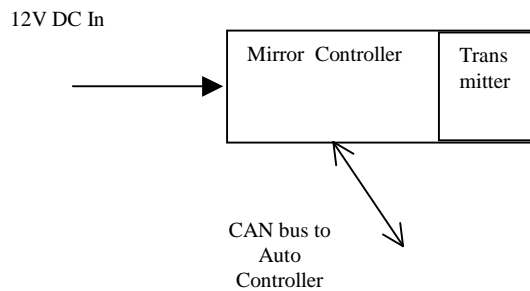

## EUT Pictures

- Exterior View Front Page 11
- Exterior View Mirror Assy Page 11
- Exterior View Rear Page 12
- Mirror PCB Top View Page 12
- Mirror PCB Bottom View Page 13
- Homelink PCB Top View Page 13
- Homelink PCB Bottom View Page 14
- Homelink PCB Bottom Shield Page 14

### Exterior View Front

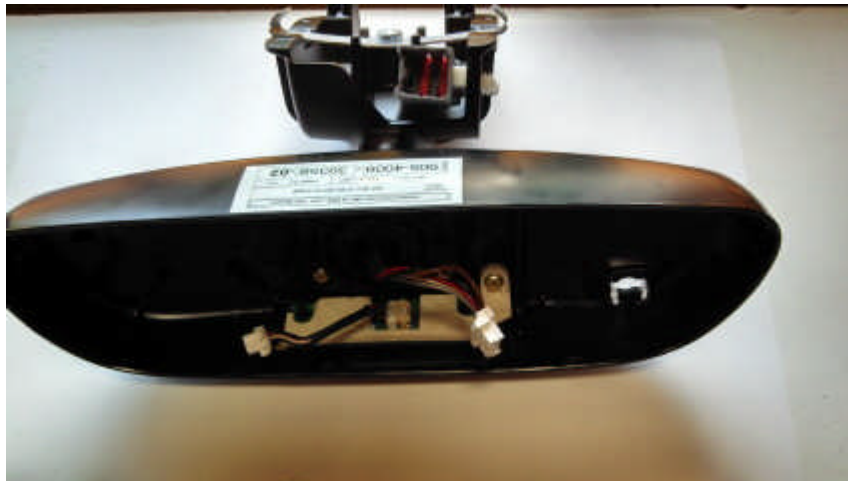

### Exterior View Mirror Assy Front




### Exterior View Rear



### Mirror PCB Top View



### Mirror PCB Bottom View

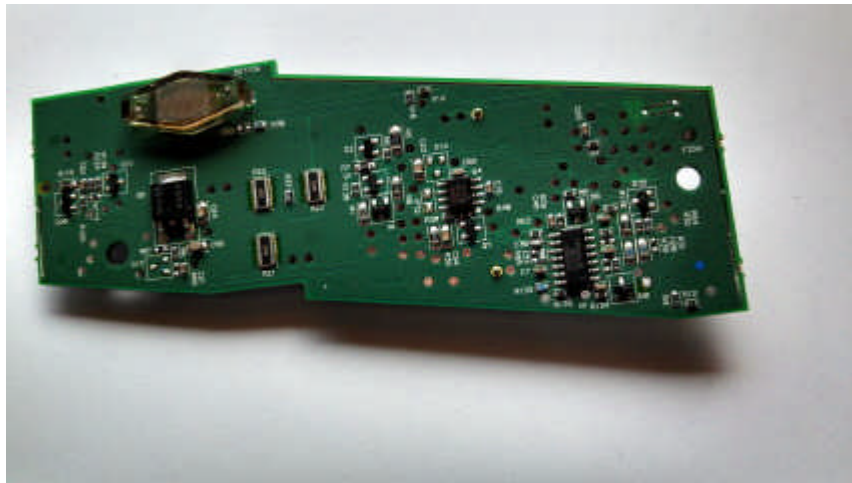

### Homelink PCB Top View



### Homelink PCB Bottom View



### Homelink PCB Bottom Cover




### Equipment Test Setup:

### Support Equipment & Cabling

Setup Diagram Legend	Description	Model	Serial No. / Part No.	EMC Consideration
A	Rear View Mirror	905-4009 of JLXHL4 family of devices	AHD-4009	15.231 transmitting device
B	12V DC Power Cord	NA	NA	3M unshielded
C	Twisted pair CAN cable	NA	NA	3M shielded twisted pair


### Block Diagram

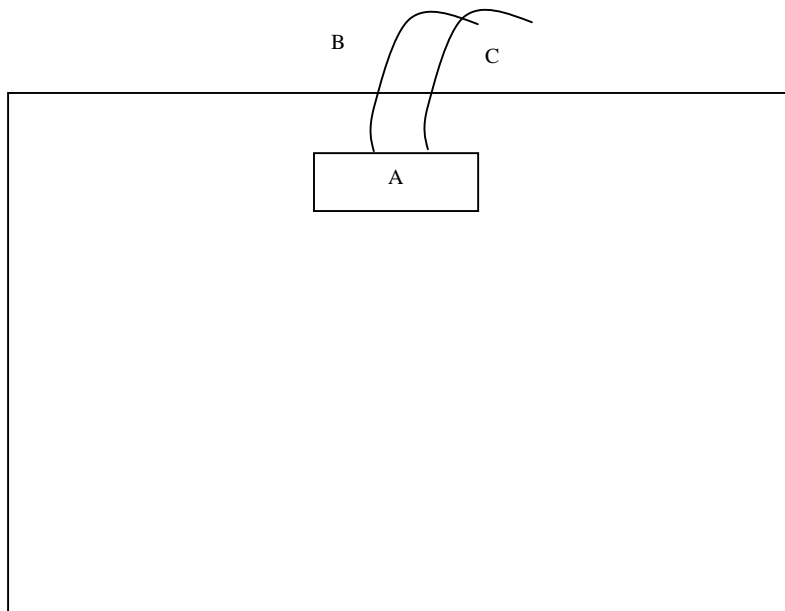

## Setup Pictures

- Radiated Prescreen Setup Page 16
- Front Orientation Transmit View Page 16
- End Orientation Transmit View Page 17
- Side Orientation Transmit View Page 17

### Radiated Prescreen Setup

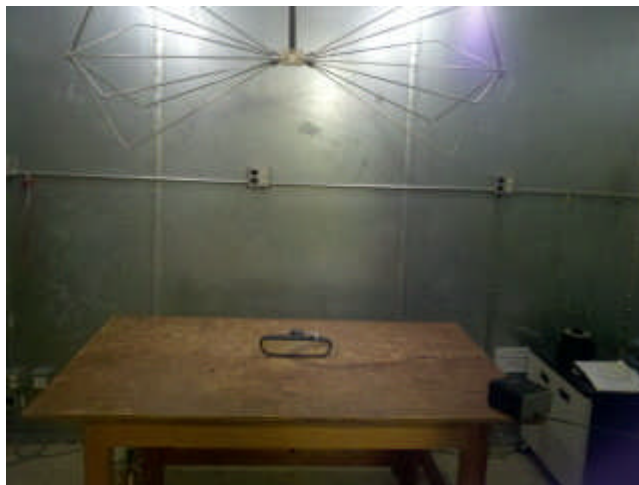

### Front Orientation Transmit





### End Orientation Transmit



### Side Orientation Transmit



## Measurement Report

### Standards Applied to Test

ANSI C63.4 – Radio Noise Emissions 2003.12  
CFR47 FCC Part 15.231  
AHD/SEI test procedures TP0101LC, TP0102RA  
EN55022 ITE Disturbance 2005.11  
EN61000-6-3 Generic 2007.2

### Equipment Configuration

For the testing, the placement of the EUT and the support equipment was selected to –

- Be a representation of a configuration typical of user installation, and
- Comply with the minimum system configuration of ANSI C63.4.

### Test Methodology

#### Transmit:

Transmit radiated testing was performed at a 3 meter open field test site, and completed according to the procedures in FCC 15.231 with supporting instructions from ANSI C63.4.

Device was tested at 3 representative frequencies within operational range: 288 MHz, 310 MHz, and 433. MHz.

Device was tested in operational 3 orientations: Front, end, and side. Device was also tested using 2 possible receive antenna orientations: vertical and horizontal. (see pictures.) Extensive testing was performed to determine the worst case device and receive antenna orientation of the device for each representative frequency and modulation. Worst case orientation data is being presented for fundamental signal and signals up to 10 harmonics above fundamental frequencies.

Device was tested at 3 operational duty cycle settings: 30%, 50%, and 80%. At each setting, measurements were made using peak detection (CW equivalent) and compensated based on duty cycle. The following compensation formulas were used: at 30% duty cycle, peak measurement was reduced by  $20\log(0.3)=-10.46$  dB. At 50% duty cycle,  $20\log(0.5)=-6$  dB. At 80% duty cycle,  $20\log(0.8) = -1.94$  dB.

Note that the device transmits its highest power when set to a 30% duty cycle. For that reason, peak measurements made at a 30% duty cycle setting may demonstrate signal strength within FCC limits when compensated to 80% duty cycle.

Transmit was also tested for 20dB bandwidth and for adherence to band edges and exclusion frequencies as well. Band edge adherence to upper, lower, and exclusion limits were demonstrated

by attempting to program the device to the band edge frequencies. Refusal to program demonstrates device adherence to band edge and exclusion frequency requirements.

**Receive:**

Note also that a discrete “programming mode” was tested as well. In programming mode, a series of pulses are received which the device responds to.

**Radiated:**

Spurious radiated testing was performed at a 3 meter open field test site, and completed according to the procedures in FCC 15, SubPart B with supporting instructions from ANSI C63.4. Please reference Appendix A for further details on Test Methodology.

A scan of the EUT was made in a shielded room to study the emission profile of this EUT. This scan indicated low level spurious emissions from the unit.

The suspect signals recorded in the shielded room prescan for each module were then measured at the 3-meter open area test site.

The EUT was scanned for radiated energy up to 4.33 GHz to meet FCC 15.231 requirements.

The EUT under test was placed per ANSI C63.4

The EUT was exercised as follows:

1. Device was powered via 12VDC
2. The device was activated by depressing transmit button with a rubber band.
3. Evidence of operation was provided by signal measurement

The cables were manipulated to produce the highest signal level relative to the limit.

The pictures, in the preceding pages, show the position of the equipment and cabling that produced the maximum signal level.

**Variance from Test Procedure:**

None

**Test Data****Transmit Fundamental Measurements**

Measured Frequency	Azimuth/ Antenna Height	Orientation / Polarization	Duty Cycle	E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	MHz		%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
<b>287.98</b>	<b>230 / 1.7</b>	<b>Side-V</b>	<b>30.00</b>	<b>72.00</b>	<b>-10.46</b>	<b>61.54</b>	<b>1194</b>	<b>4916</b>	<b>3722</b>
<b>288.00</b>	<b>230 / 1.7</b>	<b>Side-V</b>	<b>50.00</b>	<b>72.70</b>	<b>-6.02</b>	<b>66.68</b>	<b>2158</b>	<b>4917</b>	<b>2759</b>
<b>287.95</b>	<b>230 / 1.7</b>	<b>Side-V</b>	<b>80.00</b>	<b>65.98</b>	<b>-1.94</b>	<b>64.04</b>	<b>1593</b>	<b>4915</b>	<b>3322</b>
<b>310.14</b>	<b>210/1.6</b>	<b>Side-V</b>	<b>30.00</b>	<b>80.61</b>	<b>-10.46</b>	<b>70.15</b>	<b>3218</b>	<b>5839</b>	<b>2621</b>
<b>309.95</b>	<b>210/1.6</b>	<b>Side-V</b>	<b>50.00</b>	<b>76.37</b>	<b>-6.02</b>	<b>70.35</b>	<b>3292</b>	<b>5831</b>	<b>2539</b>
<b>310.12</b>	<b>210/1.6</b>	<b>Side-V</b>	<b>80.00</b>	<b>70.04</b>	<b>-1.94</b>	<b>68.10</b>	<b>2541</b>	<b>5838</b>	<b>3297</b>
<b>433.00</b>	<b>0 / 1</b>	<b>Side-V</b>	<b>30.00</b>	<b>84.70</b>	<b>-10.46</b>	<b>74.24</b>	<b>5154</b>	<b>10958</b>	<b>5805</b>
<b>433.04</b>	<b>0 / 1</b>	<b>Side-V</b>	<b>50.00</b>	<b>81.75</b>	<b>-6.02</b>	<b>75.73</b>	<b>6116</b>	<b>10960</b>	<b>4844</b>
<b>432.87</b>	<b>0 / 1</b>	<b>Side-V</b>	<b>80.00</b>	<b>74.78</b>	<b>-1.94</b>	<b>72.84</b>	<b>4386</b>	<b>10953</b>	<b>6567</b>

**288 MHz Transmit Harmonic and Spurious Measurements**

Fundamental Frequency	Measured Frequency	Orientation / Polarization	Duty Cycle	E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	MHz		%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
288.00	576.12	End-H	30.00	48.05	-10.46	37.59	76	492	415.88
288.00	576.13	End-H	50.00	46.58	-6.02	40.56	107	492	385.01
288.00	575.93	End-H	80.00	35.40	-1.94	33.46	47	492	444.56
288.00	864.14	Side-V	30.00	32.87	-10.46	22.41	13	492	478.47
288.00	864.67	Side-V	50.00	32.65	-6.02	26.63	21	492	470.21
288.00	864.00	Side-V	80.00	*	-1.94	*	*	492	*
288.00	1152.00	Flat-H	30.00	*	-10.46	*	*	492	*
288.00	1152.00	Flat-H	50.00	*	-6.02	*	*	492	*
288.00	1152.00	Flat-H	80.00	*	-1.94	*	*	492	*
288.00	1440.00	Flat-H	30.00	*	-10.46	*	*	492	*
288.00	1440.00	Flat-H	50.00	*	-6.02	*	*	492	*
288.00	1440.00	Flat-H	80.00	*	-1.94	*	*	492	*
288.00	1728.00	Flat-H	30.00	*	-10.46	*	*	492	*
288.00	1728.00	Flat-H	50.00	*	-6.02	*	*	492	*
288.00	1728.00	Flat-H	80.00	*	-1.94	*	*	492	*
288.00	2016.00	Flat-H	30.00	40.70	-10.46	30.24	33	492	459.15
288.00	2016.00	Flat-H	50.00	40.70	-6.02	34.68	54	492	437.47
288.00	2016.00	Flat-H	80.00	40.70	-1.94	38.76	87	492	404.95
288.00	2304.00	Flat-H	30.00	41.30	-10.46	30.84	35	492	456.82
288.00	2304.00	Flat-H	50.00	41.30	-6.02	35.28	58	492	433.59
288.00	2304.00	Flat-H	80.00	41.30	-1.94	39.36	93	492	398.75
288.00	2592.00	Flat-H	30.00	43.30	-10.46	32.84	44	492	447.80
288.00	2592.00	Flat-H	50.00	43.30	-6.02	37.28	73	492	418.56
288.00	2592.00	Flat-H	80.00	43.30	-1.94	41.36	117	492	374.69
288.00a	2880.00	Flat-H	30.00	44.70	-10.46	34.24	52	492	440.13
288.00a	2880.00	Flat-H	50.00	44.70	-6.02	38.68	86	492	405.77
288.00a	2880.00	Flat-H	80.00	44.70	-1.94	42.76	137	492	354.23

\* Indicates no signal detected at this frequency

a Indicates restricted band signals, however 15.231 limits are more restrictive than 15.205 restricted band limits (500uV/m)

**310 MHz Transmit Harmonic Measurements**

Fundamental Frequency	Measured Frequency	Orientation / Polarization	Duty Cycle	E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	MHz		%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
310.00	620.32	Flat-V	30.00	51.50	-10.46	41.04	113	583	470.58
310.00	620.00	Flat-V	50.00	39.00	-6.02	32.98	45	583	538.77
310.00	620.00	Flat-V	80.00	32.50	-1.94	30.56	34	583	549.60
310.00	930.43	Flat-V	30.00	34.91	-10.46	24.45	17	583	566.64
310.00	930.00	Side-H	50.00	31.70	-6.02	25.68	19	583	564.10
310.00	930.00	Side-H	80.00	*	-1.94	*	*	583	*
310.00	1240.00(a)	Flat-H	30.00	*	-10.46	*	*	500	*
310.00	1240.00(a)	Flat-H	50.00	*	-6.02	*	*	500	*
310.00	1240.00(a)	Flat-H	80.00	*	-1.94	*	*	500	*
310.00	1550.00(a)	Flat-H	30.00	46.10	-10.46	35.64	61	500	439.45
310.00	1550.00(a)	Flat-H	50.00	46.10	-6.02	40.08	101	500	399.08
310.00	1550.00(a)	Flat-H	80.00	46.10	-1.94	44.16	161	500	338.53
310.00	1860.00	Flat-H	30.00	42.00	-10.46	31.54	38	583	545.57
310.00	1860.00	Flat-H	50.00	42.00	-6.02	35.98	63	583	520.39
310.00	1860.00	Flat-H	80.00	42.00	-1.94	40.06	101	583	482.62
310.00	2170.00	Flat-H	30.00	41.20	-10.46	30.74	34	583	548.89
310.00	2170.00	Flat-H	50.00	41.00	-6.02	34.98	56	583	527.23
310.00	2170.00	Flat-H	80.00	41.20	-1.94	39.26	92	583	491.48
310.00	2480.00	Flat-H	30.00	*	-10.46	*	*	583	*
310.00	2480.00	Flat-H	50.00	*	-6.02	*	*	583	*
310.00	2480.00	Flat-H	80.00	*	-1.94	*	*	583	*
310.00	2790.00	Flat-H	30.00	*	-10.46	*	*	501	*
310.00	2790.00	Flat-H	50.00	*	-6.02	*	*	501	*
310.00	2790.00	Flat-H	80.00	*	-1.94	*	*	501	*
310.00	3100.00	Flat-H	30.00	*	-10.46	*	*	583	*
310.00	3100.00	Flat-H	50.00	*	-6.02	*	*	583	*
310.00	3100.00	Flat-H	80.00	*	-1.94	*	*	583	*

\* Indicates no signal detected at this frequency

(a) Signals fall within restricted bands so limits revert to spurious limits

**433 MHz Transmit Harmonic Measurements**

Fundamental Frequency	Measured Frequency	Orientation / Polarization	Duty Cycle	E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	MHz		%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
433.00	866.79	Flat-V	30.00	52.05	-10.46	41.59	120	1096	975.71
433.00	866.11	Flat-V	50.00	39.96	-6.02	33.94	50	1096	1046.06
433.00	866.00	Flat-V	80.00	35.89	-1.94	33.95	50	500	450.16
433.00	1299.00	Flat-H	30.00	42.50	-10.46	32.04	40	1096	1055.83
433.00	1299.00	Flat-H	50.00	42.50	-6.02	36.48	67	1096	1029.16
433.00	1299.00	Flat-H	80.00	42.50	-1.94	40.56	107	1096	989.15
433.00	1732.00	Flat-H	30.00	41.90	-10.46	*	*	1096	*
433.00	1732.00	Flat-H	50.00	41.90	-6.02	*	*	1096	*
433.00	1732.00	Flat-H	80.00	41.90	-1.94	*	*	1096	*
433.00	2165.00	Flat-H	30.00	41.50	-10.46	*	*	1096	*
433.00	2165.00	Flat-H	50.00	41.50	-6.02	*	*	1096	*
433.00	2165.00	Flat-H	80.00	41.50	-1.94	*	*	1096	*
433.00	2598.00	Flat-H	30.00	*	-10.46	*	*	1096	*
433.00	2598.00	Flat-H	50.00	*	-6.02	*	*	1096	*
433.00	2598.00	Flat-H	80.00	*	-1.94	*	*	1096	*
433.00	3031.00	Flat-H	30.00	*	-10.46	*	*	1096	*
433.00	3031.00	Flat-H	50.00	*	-6.02	*	*	1096	*
433.00	3031.00	Flat-H	80.00	*	-1.94	*	*	1096	*
433.00	3464.00	Flat-H	30.00	*	-10.46	*	*	1096	*
433.00	3464.00	Flat-H	50.00	*	-6.02	*	*	1096	*
433.00	3464.00	Flat-H	80.00	*	-1.94	*	*	1096	*
433.00	3897.00a	Flat-H	30.00	*	-10.46	*	*	500	*
433.00	3897.00a	Flat-H	50.00	*	-6.02	*	*	500	*
433.00	3897.00a	Flat-H	80.00	*	-1.94	*	*	500	*
433.00	4330.00a	Flat-H	30.00	*	-10.46	*	*	500	*
433.00	4330.00a	Flat-H	50.00	*	-6.02	*	*	500	*
433.00	4330.00a	Flat-H	80.00	*	-1.94	*	*	500	*

\* Indicates no signal detected at this frequency

(a) Signals fall within restricted bands so limits revert to spurious limits

**Restricted Band Harmonic Peak Compliance**

**Restricted Band Peak Data**

Fundamental Frequency	Measured Frequency	Orientation / Polarization	Duty Cycle	Peak E Field Measurement	Average FCC Limit	Peak FCC Limit	Margin
MHz	MHz		%	dBuV/m	dBuV/m	dBuV/m	dBuV/m
<b>288.00</b>	<b>1552.00</b>	<b>Flat-H</b>	<b>80.00</b>	<b>45.80</b>	<b>54.00</b>	<b>74.00</b>	<b>28.20</b>
<b>288.00</b>	<b>1840.00</b>	<b>Flat-H</b>	<b>30.00</b>	<b>44.70</b>	<b>54.00</b>	<b>74.00</b>	<b>29.30</b>
<b>288.00</b>	<b>2880.00</b>	<b>Flat-H</b>	<b>50.00</b>	<b>44.70</b>	<b>54.00</b>	<b>74.00</b>	<b>29.30</b>
<b>288.00</b>	<b>2880.00</b>	<b>Flat-H</b>	<b>80.00</b>	<b>44.70</b>	<b>54.00</b>	<b>74.00</b>	<b>29.30</b>
<b>310.00</b>	<b>1550.00</b>	<b>Flat-H</b>	<b>30.00</b>	<b>46.10</b>	<b>54.00</b>	<b>74.00</b>	<b>27.90</b>
<b>310.00</b>	<b>1550.00</b>	<b>Flat-H</b>	<b>50.00</b>	<b>46.10</b>	<b>54.00</b>	<b>74.00</b>	<b>27.90</b>
<b>310.00</b>	<b>1550.00</b>	<b>Flat-H</b>	<b>80.00</b>	<b>46.10</b>	<b>54.00</b>	<b>74.00</b>	<b>27.90</b>
<b>310.00</b>	<b>2210.00</b>	<b>Flat-H</b>	<b>80.00</b>	<b>41.50</b>	<b>54.00</b>	<b>74.00</b>	<b>32.50</b>
<b>433.00</b>	<b>1221.00</b>	<b>Flat-V</b>	<b>80.00</b>	<b>48.60</b>	<b>54.00</b>	<b>74.00</b>	<b>25.40</b>

**Transmit Mode Non-Harmonic Spurious Emissions**

Fundamental Frequency	Measured Frequency	Orientation / Polarization	E Field Measurement (Peak)	Corrected Data	FCC Limit	Margin
MHz	MHz		dBuV/m	uV/m	uV/m	uV/m
<b>288.00</b>	<b>1552.00</b>	<b>Flat-H</b>	<b>45.80</b>	<b>195</b>	<b>492</b>	<b>296.68</b>
<b>310.00</b>	<b>2210.00a</b>	<b>Flat-H</b>	<b>41.50</b>	<b>119</b>	<b>500</b>	<b>381.15</b>
<b>433.00</b>	<b>1221.00a</b>	<b>Flat-V</b>	<b>48.60</b>	<b>269</b>	<b>500</b>	<b>230.85</b>
<b>433.00</b>	<b>1830.00</b>	<b>Side-H</b>	<b>46.10</b>	<b>202</b>	<b>500</b>	<b>298.16</b>
<b>433.00</b>	<b>2478.00</b>	<b>Side-H</b>	<b>42.60</b>	<b>135</b>	<b>500</b>	<b>365.10</b>

Note that all signals are evaluated against spurious / restricted band limits.


**(a) Signals fall within restricted bands.**

**Receive Mode Manufacturing Test Burst**

Measured Frequency	Duty Cycle	Training Pulse E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
<b>310.00</b>	<b>30.00</b>	<b>73.00</b>	<b>-10.46</b>	<b>62.54</b>	<b>1340</b>	<b>5833</b>	<b>4493</b>




**Receive Mode Manufacturing Test Burst Plot**

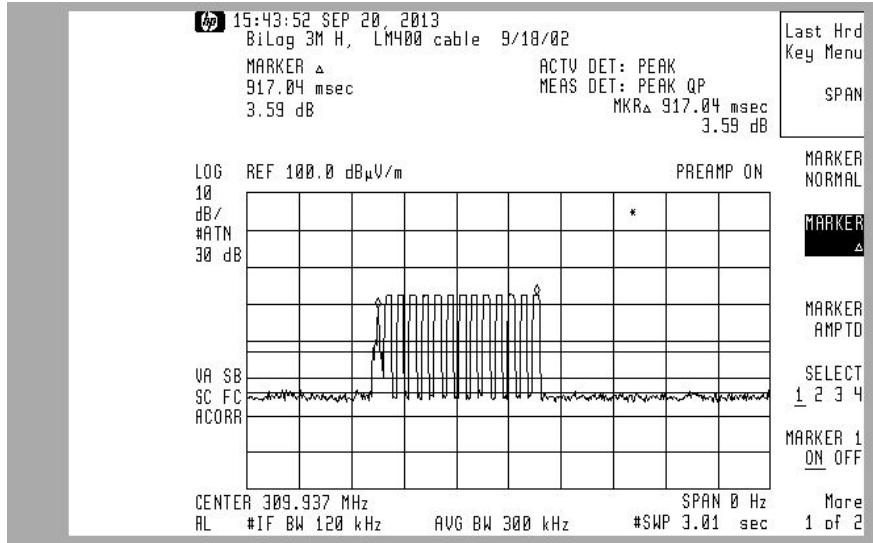

**Receive Spurious Measurements**


- Screen room prescan indicated receive mode emissions at 112, 131, 219, 265, 369, and 447 MHz. When measured at 3 Meters, no signals were found above the ambient noise floor of the receiving instrument.

**Plot of Receive Mode Spurious Prescreen Data**

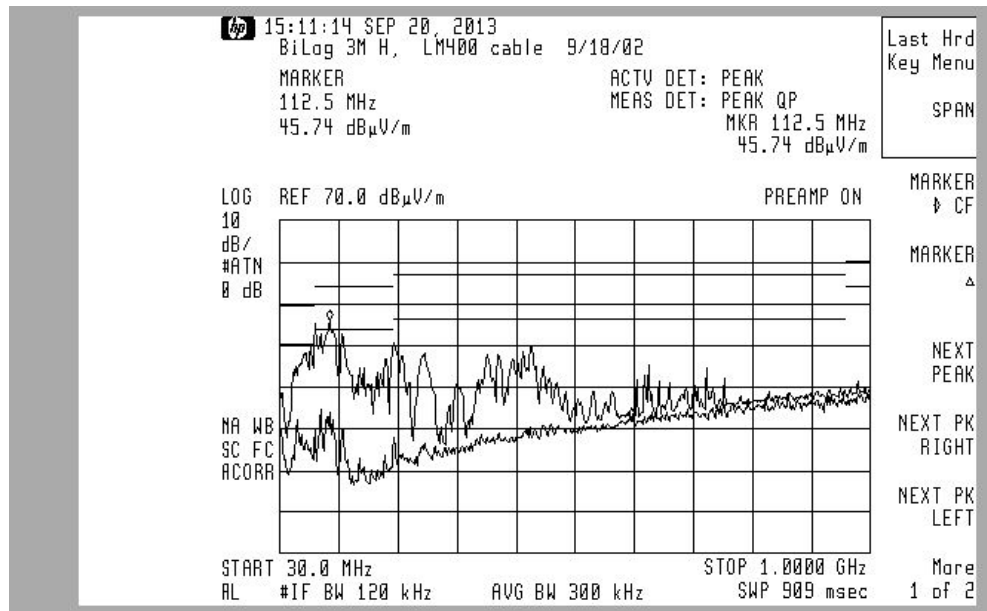

### Device Deactivation

#### Automatic Device Deactivation Plot

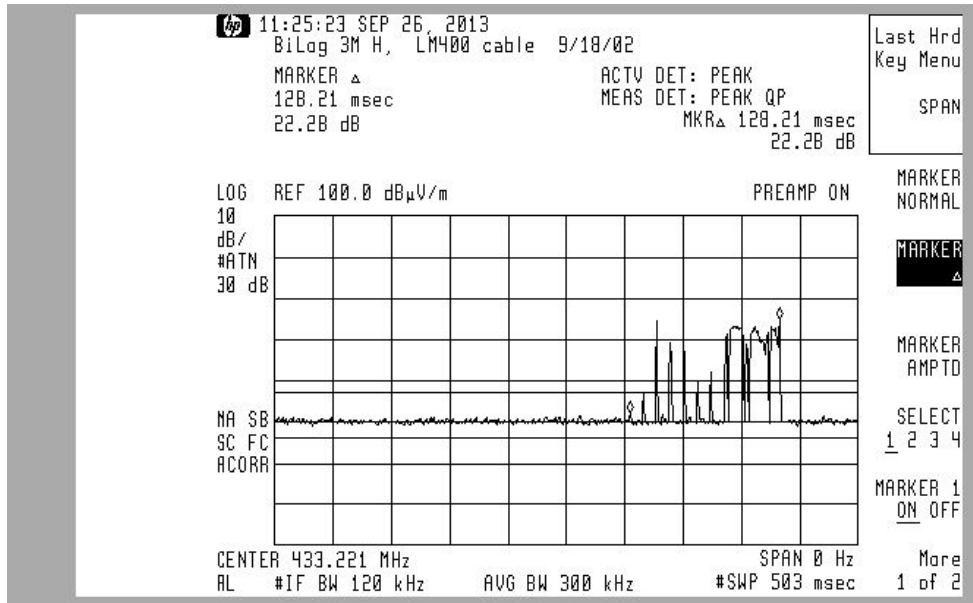

**Band Edge and Restricted Band Testing****Band Edge Testing Results Table**

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Frequency (MHz)	Part 15 Status	Result	Pass/Fail
285.0	banned	would not train	Pass	337.0	guard band	trained	Pass
285.5	guard band	would not train	Pass	338.0	allowed	trained	Pass
286.0	guard band	trained	Pass	398.0	allowed	trained	Pass
287.0	allowed	trained	Pass	399.0	guard band	trained	Pass
320.5	allowed	trained	Pass	399.5	guard band	would not train	Pass
321.0	guard band	trained	Pass	400.0	banned	would not train	Pass
321.5	guard band	would not train	Pass	401.0	banned	would not train	Pass
322.0	banned	would not train	Pass	402.0	banned	would not train	Pass
323.0	banned	would not train	Pass	403.0	banned	would not train	Pass
324.0	banned	would not train	Pass	404.0	banned	would not train	Pass
325.0	banned	would not train	Pass	405.0	banned	would not train	Pass
326.0	banned	would not train	Pass	406.0	banned	would not train	Pass
327.0	banned	would not train	Pass	407.0	banned	would not train	Pass
328.0	banned	would not train	Pass	408.0	banned	would not train	Pass
329.0	banned	would not train	Pass	409.0	banned	would not train	Pass
330.0	banned	would not train	Pass	410.0	banned	would not train	Pass
331.0	banned	would not train	Pass	410.5	guard band	would not train	Pass
332.0	banned	would not train	Pass	411.0	guard band	trained	Pass
333.0	banned	would not train	Pass	450.0	device bandedge	trained	Pass
334.0	banned	would not train	Pass	450.5	device bandedge	would not train	Pass
335.0	banned	would not train	Pass	451.0	device bandedge	would not train	Pass
336.0	guard band	would not train	Pass	452.0	device bandedge	would not train	Pass


### Duty Cycle

The following illustrates the 30%, 50%, and 80% duty cycle settings used for testing the device.


### Duty Cycle Testing Results

Modulation Setting	Pulse Off Width	Pulse Width	Measured Duty Cycle
%	uSec	uSec	%
30	1425	450	24.00%
50	1050	788	42.87%
80	338	1500	81.61%


### 30% Duty Cycle Pulse Width

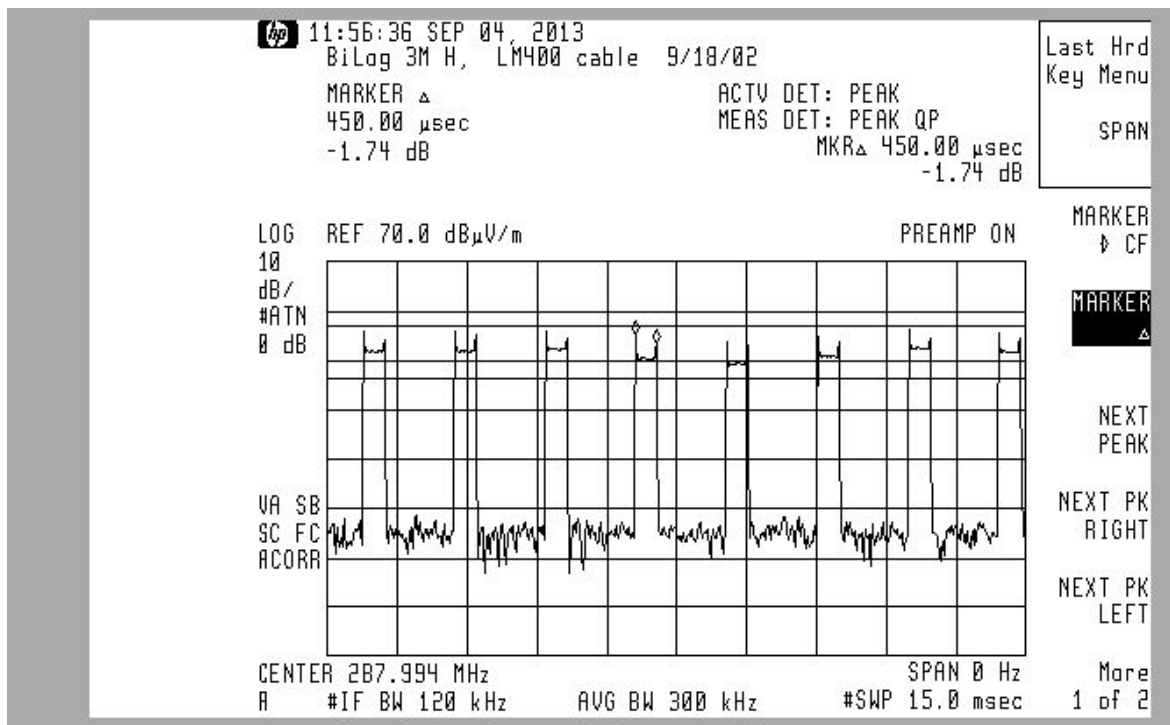

### 50% Duty Cycle Pulse Width

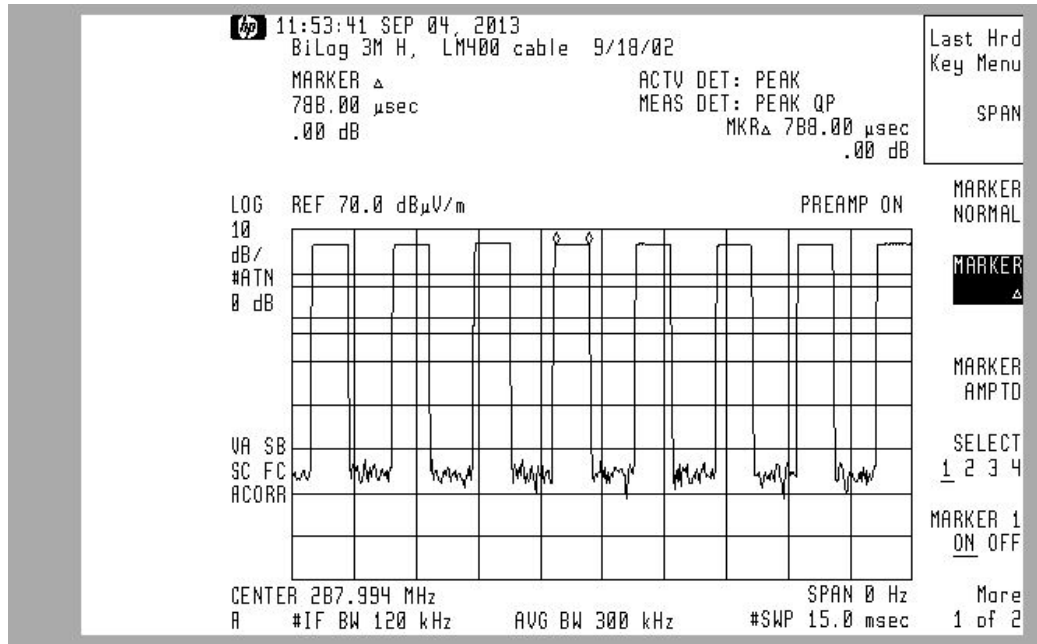

### 80% Duty Cycle

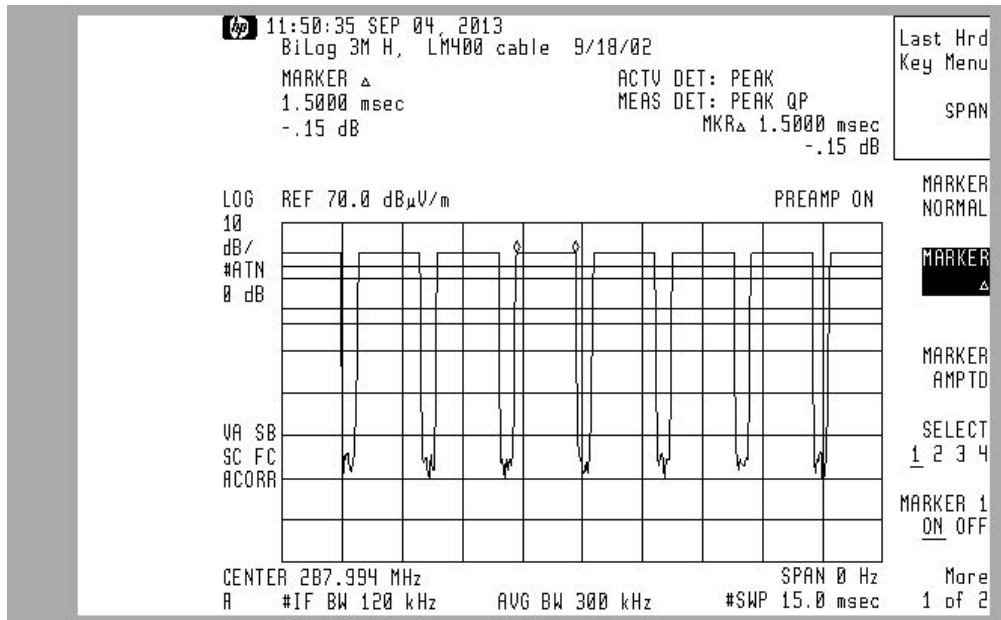


**20 dB Bandwidth Measurement:**


**Tabulated Summary of 20dB Bandwidth Measurements**

Frequency	Resolution Bandwidth	Occupied Bandwidth	Limit	Margin
MHz	KHz	KHz	KHz	KHz
288	300	295	720	425
310	300	653	775	122
433	300	555	1082.5	527.5


**288 MHz 20dB Bandwidth Plot**

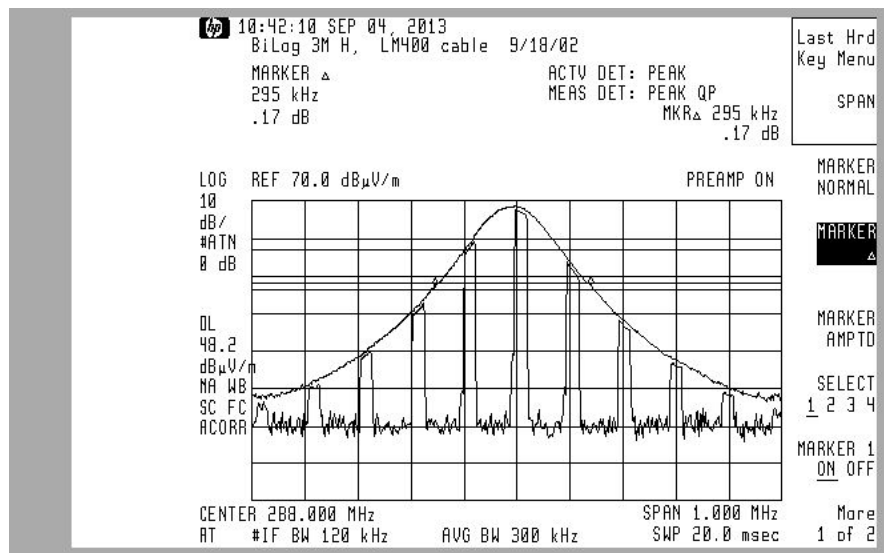

**310 MHz 20dB Bandwidth Plot**

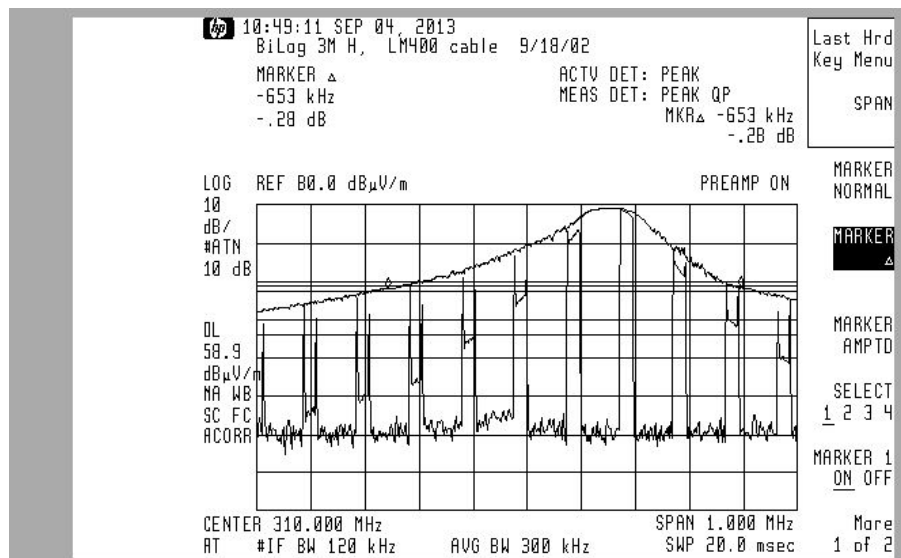

### 433 MHz 20dB Bandwidth Plot

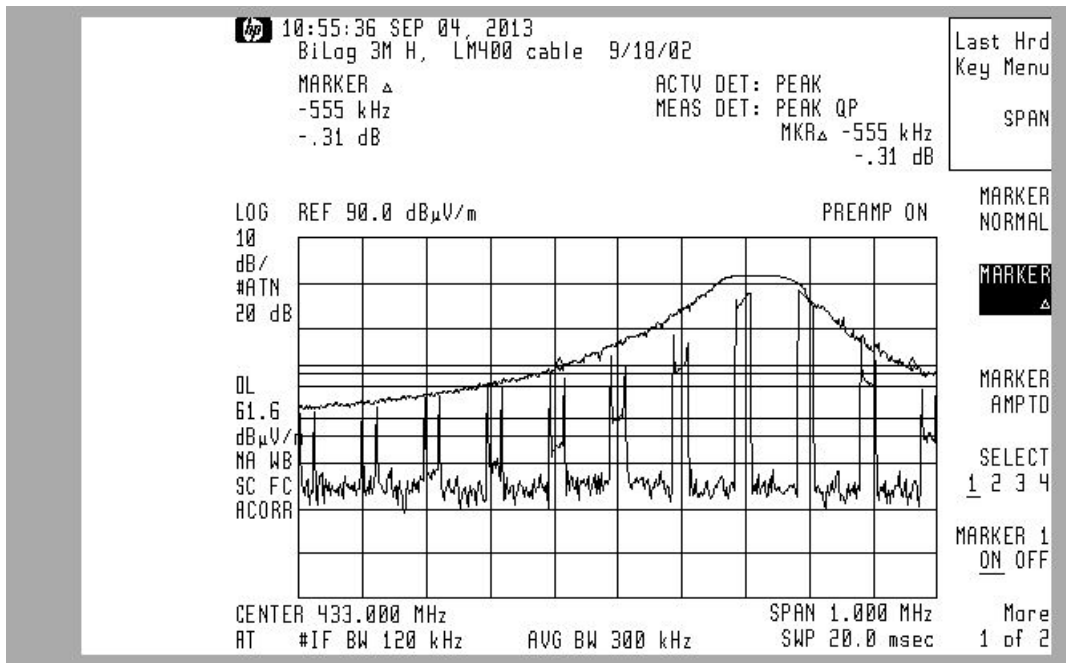


### Training Pulse Measurement


#### Tabulated Summary of Training Pulse Measurements

Measured Frequency	Duty Cycle	Training Pulse E Field Measurement	Duty Cycle Correction	Corrected Data	Corrected Data	FCC Limit	Margin
MHz	%	dBuV/m	dBuV/m	dBuV/m	uV/m	uV/m	uV/m
<b>288.00</b>	<b>30.00</b>	<b>73.71</b>	<b>-10.46</b>	<b>63.25</b>	<b>1454</b>	<b>4917</b>	<b>3462</b>
<b>310.00</b>	<b>30.00</b>	<b>77.67</b>	<b>-10.46</b>	<b>67.21</b>	<b>2294</b>	<b>5833</b>	<b>3539</b>
<b>433.00</b>	<b>30.00</b>	<b>81.72</b>	<b>-10.46</b>	<b>71.26</b>	<b>3657</b>	<b>10958</b>	<b>7301</b>

#### 288 MHz Training Pulse Plot

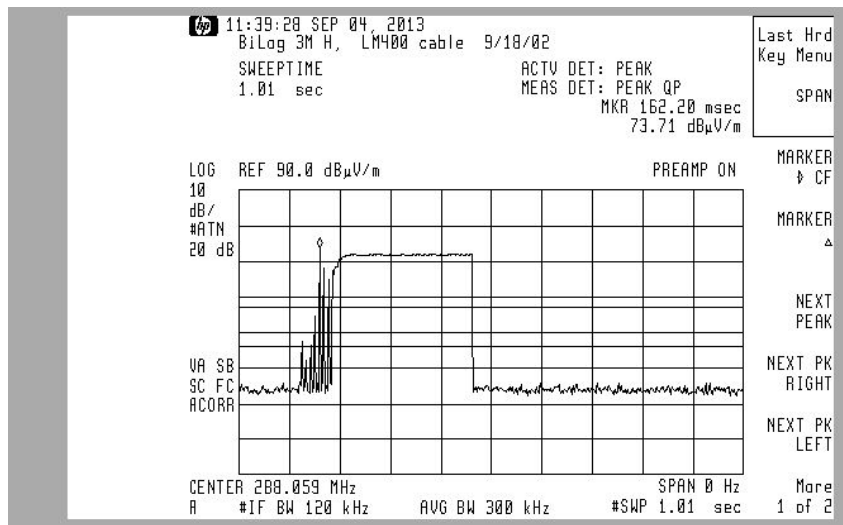


#### 310 MHz Training Pulse Plot

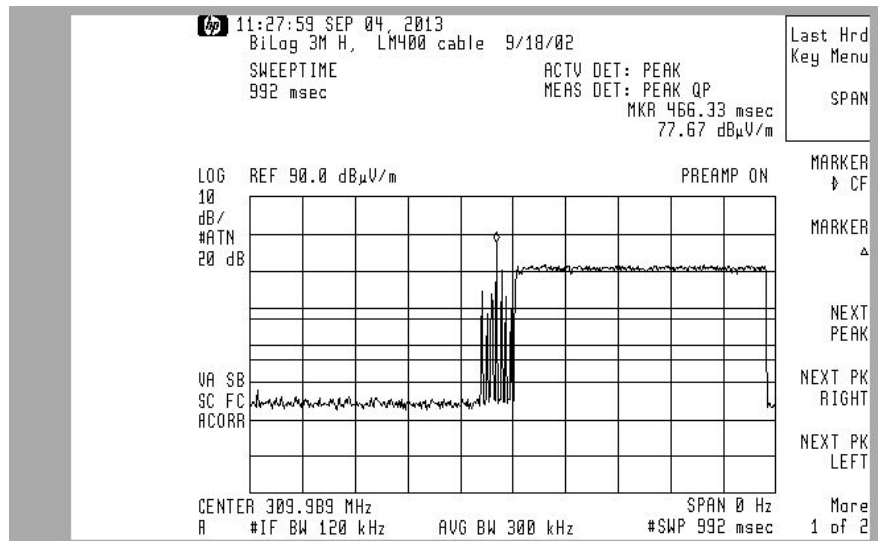



### 433 MHz Training Pulse Plot

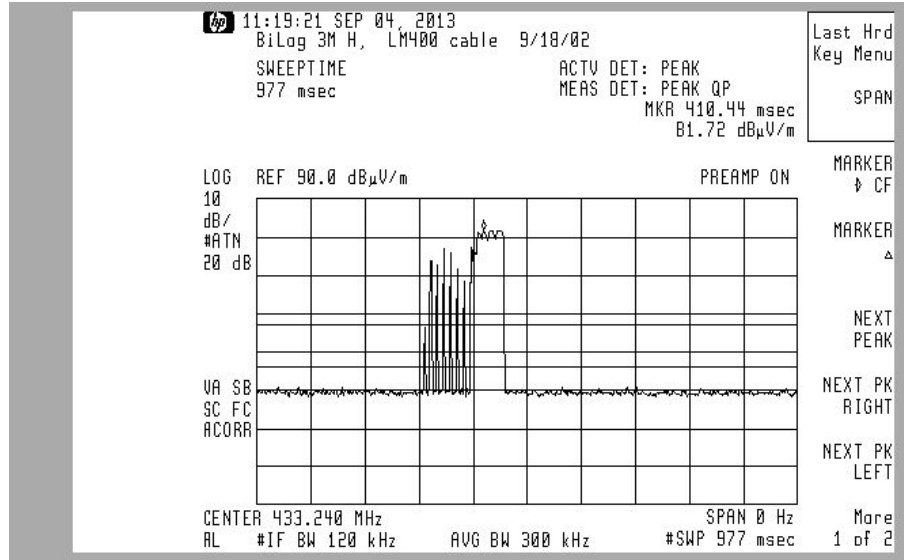

## Environment

The test was performed with the equipment under test, and measurement equipment inside the all-weather enclosure. Ambient temperature was 77 deg F, the relative humidity 42%.

## APPENDIX A

### Measurement Procedures

#### Line Conducted

The system was placed upon a 1 x 1.5 meter non-metallic table 80cm from the ground floor and 40cm from the vertical conducting plane in the prescribed setup per ANSI C63.4. This table is housed in a shielded enclosure to prevent the detection of unwanted ambients.

The EUT, or host unit if applicable, was connected to the LISN being monitored by the EMI Receiver. The remaining support devices requiring mains power were connected to a second LISN.

The EUT was continuously exercised by methods supplied by the manufacturer.

While monitoring the display of the EMI Receiver, via remote video monitor, the cables were manipulated to determine a position that maximized the emissions being observed. Once the highest amplitude relative to the limit was determined for the Phase current carrying line the procedure was repeated for the Neutral current carrying line.

The configuration that created an emission closest to the limit was used during the course of taking final measurements. Pictures of this final configuration are recorded in this report.

The principal settings of the EMI Receiver for line conducted testing include:

Bandwidth = 9kHz

Detector Function: scanning and signal search = Peak Detection Mode  
measurements = Quasi Peak Detection and Average Detection

The cable losses of the coax used in line conducted testing are charted in this appendix.

## **Radiated**

The system was placed upon a 1 x 1.5 meter non-metallic table 80cm from the open field site ground plane in the prescribed setup per ANSI C63.4, Figure 9(c).

The table sits upon a remote controlled turntable. The receiving antenna, located at the appropriate standards distance of 3 or 10 meters from the table center, is also remote controlled.

The EUT was continuously exercised by software supplied by the manufacturer.

Preliminary tests were done at the 3 meter open field test site. The final tests are done at the appropriate standards distance of 3 or 10 meters. The "Biconical/Log Periodic" broadband antenna connected to an EMI Receiver, meeting CISPR 16, is used throughout the testing.

During the preliminary scans and while monitoring the display of the EMI Receiver, the turntable was rotated 360 degrees and the receiving antenna height varied from 1 to 4 meters to search out the highest emissions. At the significant emissions, the cables were manipulated to determine a position that maximized the emissions being observed. Once the cable position was determined that presented the highest amplitude relative to the limit for Vertical polarized emissions the procedure was repeated for the Horizontal polarization.

The configuration that created an emission closest to the limit was used during the course of taking final measurements. Pictures of this final configuration are recorded in this report.

The principal settings of the EMI Receiver for radiated signal testing between 30 MHz and 1 GHz include:

Bandwidth: 120kHz  
Detector Function: scanning and signal search = Peak Mode  
measurements = Quasi Peak Mode.  
Search Range: 30MHz to 1000MHz or to 2GHz as appropriate

The principal settings of the EMI Receiver for radiated testing above 1 GHz include:

Bandwidth: 1 MHz  
Detector Function: scanning and signal search = Peak Mode  
Duty Cycle Compensated Measurements = Peak Mode  
Direct Signal Measurements = Average Mode.  
Search Range: Above 1000MHz as required

The cable loss of the coax used in radiated scanning is charted in this appendix.

The antenna factors, for the test distance used, are charted in this appendix.

The resultant Field Strength (FS) is a summation in decibels (dB) of the Indicated Receiver Level (RF), the Antenna Correction Factor (AF), and the Cable Loss Factor (CF). If a PreAmplifier (PA) is used, its gain (dB) is subtracted from the above sum.

Formula 1:  $FS(\text{dBuV/m}) = RF(\text{dBuV}) + AF(\text{dB/m}) + CF(\text{dB}) - PA(\text{dB})$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

Formula 2:  $FS(\text{uV/m}) = \text{AntiLog}[(FS(\text{dBuV/m}))/20]$

## Measurement Facilities & Equipment

### Test Site

The AHD test facility is centered on 9 acres of rural property near Sister Lakes, Michigan. The mailing address is 92723 Michigan Hwy152, Sister Lakes, 49047. This test facility is NVLAP accredited (LabCode 200129-0). It has been fully described in a report filed with the FCC (No.90413) and Industry Canada (file:IC3161).

### Measurement Equipment Used

Equipment	Model	S/N	Last Cal Date	Calibration Interval
HP EMI Receiver system	HP 8542E			
RF Filter Section	HP-85420E	3448A00144	4 Sept-12	14 months
RF Receiver Section	HP-85422E	3625A00174	4 Sept-12	14 months
EMCO BiconiLog Antenna	3142	1069	18- Sept-12	14 months
EMCO Double Ridged Horn	3115	7770	22-Sept-12	14 months
Solar LISN	8012-50-R-24-BNC	962137	14 Sept-12	14 months
Solar LISN	8012-50-R-24-BNC	962138	28-Aug-12	14 months
(3-m) LMR-400 Ultra Flex	LMR400	C090804	02-May-13	6 months
(3-m) CS-3227 RG8	CS-3227	C060914	02-May-13	6 months
(10-m) Amelco 50ohm Coax	RG213U	9903-10ab	02-May-13	6 months
(LCI) Double shielded 50ohm Coax	RG58/U	920809	05-Apr-13	14 months
HP Oscilloscope	54100D	2510A00511	08-Apr-13	14 months
Keytek Surge	711B	8511854	10-Apr-13	14 months
Schaffner ESD	NSG432	01027	09-Apr-13	14 months
Schaffner EFT	NSG600/641	0113	11-Apr-13	14 months
Compliance Design Biconical Antenna	B100	016460	29-June-11	36 months
Compliance Design Biconical Antenna	B200	A10102	29-June-11	36 months
Compliance Design Biconical Antenna	B300	A10103	29-June-11	36 months
EMCO Loop	6205	2164	22-Sept-12	36 months

# Cable Loss


Line Conducted 150KHz through 30MHz, Coax #920809

Last Calibration date: Apr 5, 2013

TEST DATE: -----

COAX #9208091

Tester: -----

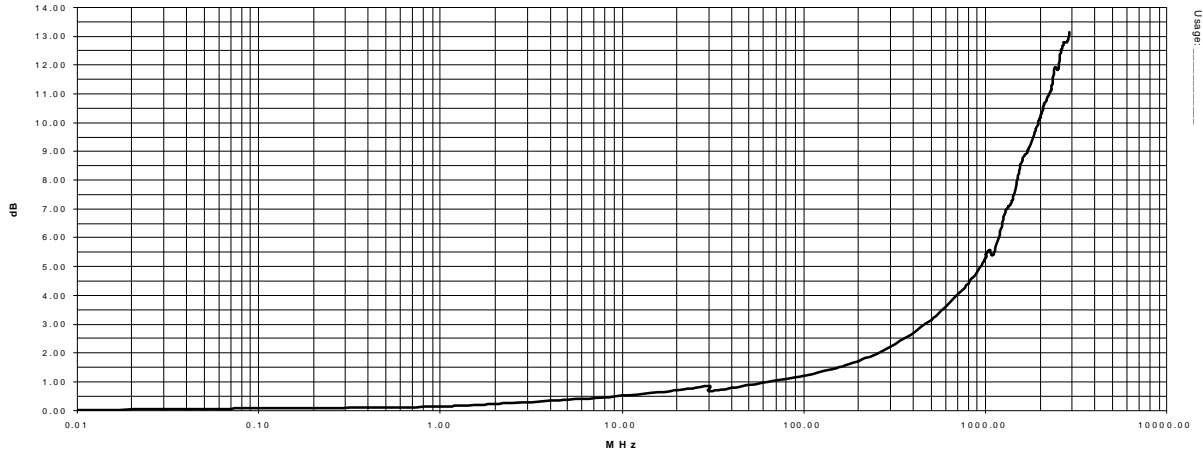


Radiated at 3 meters; 30MHz through 3000MHz, Coax #C090804

Last Calibration date: 02-May-13

TEST DATE: -----

COAX #9812\_11

Tester: -----

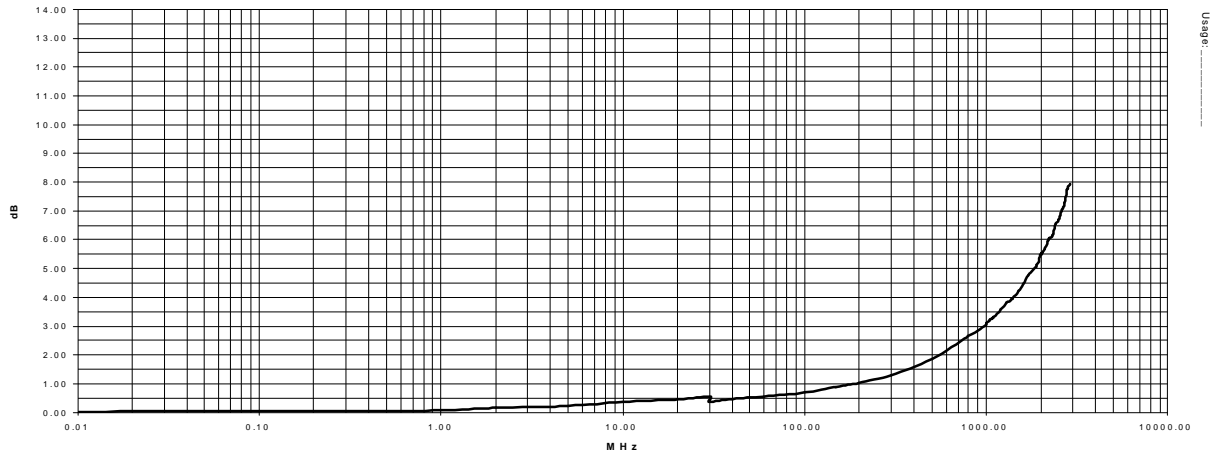


## Antenna Factors


EMCO Model 3142 Antenna #1069

Last Calibration Date; 18- Sept-12


3 Meter Distance Factors

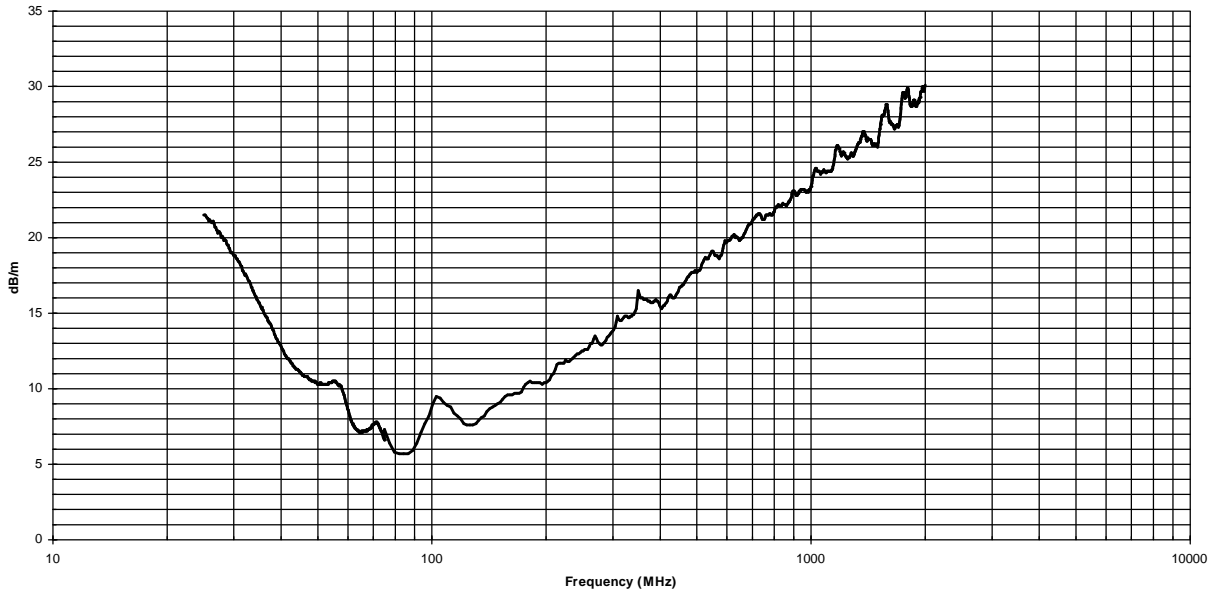

10 Meter Distance Factors

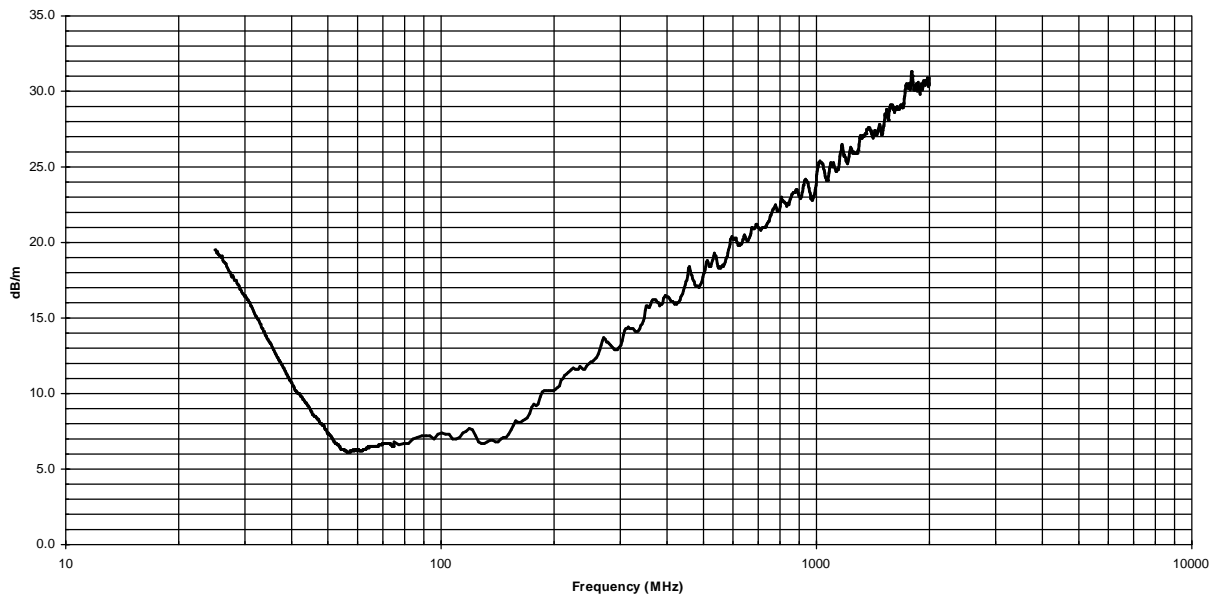

### AHD Accreditation

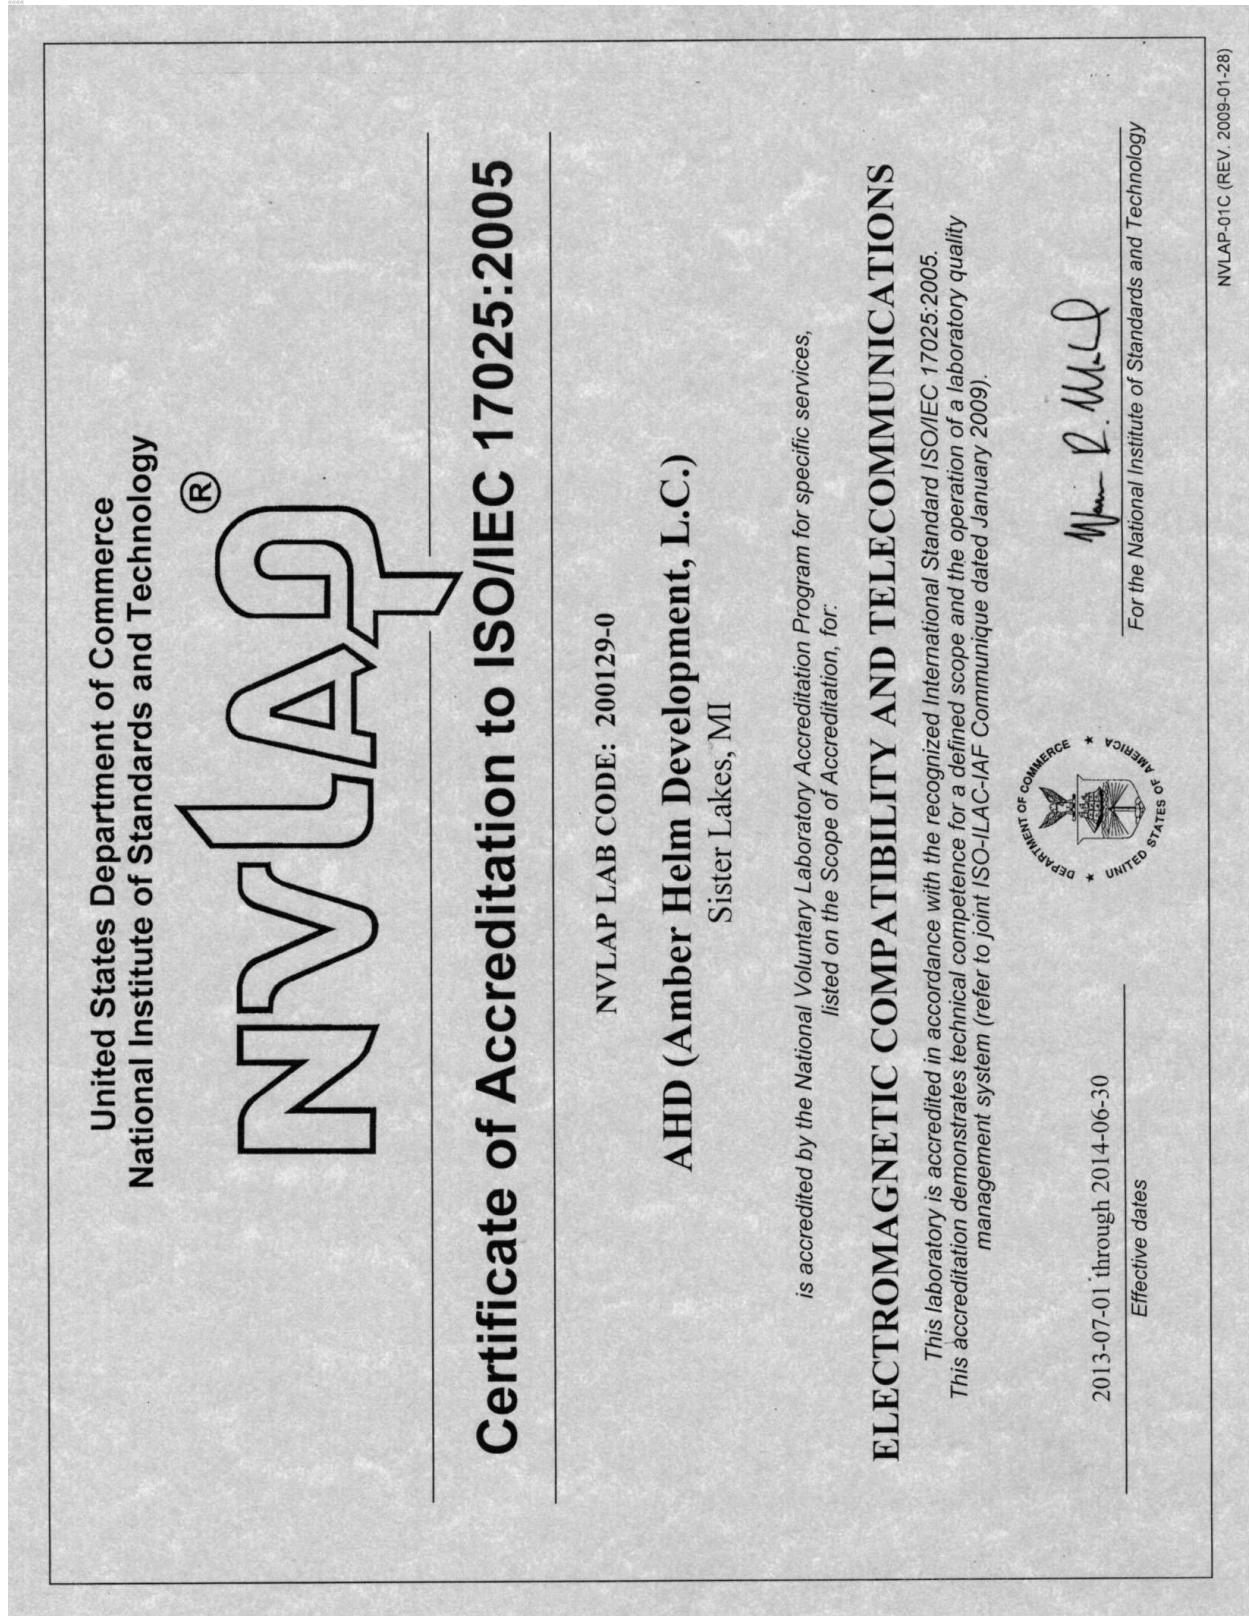

**FEDERAL COMMUNICATIONS COMMISSION**

Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046

June 07, 2013

AHD (Amber Helm Development, Inc.)  
92723 Michigan Highway 152,  
Sister Lakes, MI 49047

Attention: Gordon Helm

Re: Accreditation of AHD (Amber Helm Development, Inc.)  
Designation Number: US5317  
Test Firm Registration #: 955409


Dear Sir or Madam:

We have been notified by National Voluntary Laboratory Accreditation Program that AHD (Amber Helm Development, Inc. has been accredited as a Conformity Assessment Body (CAB).

At this time AHD (Amber Helm Development, Inc. is hereby designated to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15B of the Commission's Rules.

This designation will expire upon expiration of the accreditation or notification of withdrawal of designation.

Sincerely,



George Tannahill  
Electronics Engineer

**NARTE SEAL**

