



A Smarter Vision®

**Technical Report to the FCC and Industry Canada Regarding
Gentex Corporation - HomeLink© V**

**Model: SAHL5H
FCC ID: NZL SAHL5H
IC: 4112A- SAHL5H**

**Emission Designator: 69K0L1D
6/9/15**

A report concerning approval for Gentex Corporation HomeLink® model SAHL5H
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pannell
Senior EMC Test Engineer
Gentex Corporation

Measurements Reviewed by:

Brian Miller
Senior EMC Test Engineer
Gentex Corporation

Report and Application Prepared by:

Brian Miller
Senior EMC Test Engineer
Gentex Corporation

Report Approved and Submitted by:

Craig Harder
Lab Manager - EMC Lab
Gentex Corporation



A Smarter Vision®

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink® HLV Universal Garage Door Opener is a low-power transceiver OEM device that is installed into an overhead area of the automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a typical assembly and 2-conductor cable harness were used to power to the unit.

The unit is only operational when the user depresses the control button. It becomes inactive after release of the control button.

The two-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

No related grants to this model.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.4-2009. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a 2-conductor cable harness was used to interface to the unit.

1.4. Test Facility

The Open Area Test Site where these measurements were taken is located on the grounds of Gentex Corporation's Technical Campus, in the city of Holland, county of Ottawa, state of



A Smarter Vision®

Michigan, United States of America. The site is a fully enclosed 10m weather-protected OATS. All structure materials above the conducting ground-plane are non-metallic and consist of wood, laminated lumber, fiberglass, glue, plastic, or fiberglass reinforced plastic. The site contains a 15-foot diameter turntable capable of supporting large cars and light trucks under test. Tabletop testing was conducted on a smaller 3m turntable described in the site recertification report. The test site has been fully described in a reports filed with the FCC and Industry Canada. The report filed with the FCC is dated February 6, 2015, was accepted by the FCC in a letter dated April 8, 2015. The report filled with Industry Canada, dated February 6, 2015, was accepted via a letter dated February 11, 2015. Our OATS is registered with the IC under file number IC# 4112A.

Corporate Mailing/Shipping Address

Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address

Gentex Corporation
864 E. 24th Street
Holland, MI 49423

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4 Radiated Emissions at 3m, FCC 47 CFR Part 15, and IC RSS-210.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLSAHL5H. The Industry Canada certification number is 4112A-SAHL5H. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"This device complies with FCC rules Part 15 and with Industry Canada RSS-210.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and Industry Canada rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "IC:" before the certification/registration number only signifies that Industry Canada technical specifications were met.

IC: 4112A-**SAHL5H** MODEL/FCC ID: NZLSAHL5H

2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4 Figure 9(c). The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane. The harness was run straight down from the center of the turntable to a power supply sitting at the base of the table.

4. Block Diagram

For system block diagram please refer to attachment named "Block Diagram.pdf"

5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

6. Radiated Emissions Data

6.1. Summary of Results

Measurement	Measurement	Margin	Frequency - Duty Cycle
Worst Case Peak Emission	88.51 dBuV/m	12.2 dB	430MHz - 30%
Worst Case Average Emission	78.6 dBuV/m	2.1 dB	430MHz - 50%
Worst Case Harmonic	53.0 dBuV/m	1.0 dB	2190MHz - (365MHz - 50%)
Worst Case Restricted Band Emission	53.0 dBuV/m	1.0 dB	2190MHz - (365MHz - 50%)
Maximum Occupied BW	69kHz	651kHz	288MHz - 50%
Worst case Digital Emission	35.26 dBuV/m	10.35 dB	89MHz - (288MHz)
Worst Case Receiver Spurious Emission	148uV/m	52uV	649MHz
Delta of Field Strength with Supply Voltage of 6-18V	0.46 dB	N/A	430MHz - 30%

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 7V and power reduced to 87.55 dBuV/m at 7V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated immediately after the activation button is depressed. Less than 5 sec.
- Additional testing was performed to ensure compliance with the restricted bands. The following fundamentals were utilized: 375, 392, 415, 416.5, 421, 430, and 434MHz to test compliance of harmonics within the restricted bands.

6.2. Test Equipment Setup and Procedure

6.2.1. Test Equipment Used

Description	Model #	ID Number	Last Cal Date	Cal Due
EMCO Biconical Antenna [20-300 MHz]	3110B	H6189	3/27/15	3/27/18
EMCO LPA Antenna [200-2000MHz]	3148	H6193	3/27/15	3/27/18
Electro-metrics Double Ridged Guide [1-18GHz]	RGA-60	H8132	9/5/12	9/5/15
Rohde & Schwarz EMI Receiver	ESR26	6595	5/13/15	6/13/15
Cables, attenuator and port feed through	various	3M Port Combo (CBL 63, CBL 64, CBL 71, EL459)	4/30/15	4/30/16

Spectrum Analyzer Settings Emissions:

Detector Function: Peak
 Resolution Bandwidth: 120 kHz (below 1GHz)
 1MHz (above 1GHz)
 Video Bandwidth: 300 kHz (below 1GHz)
 3MHz (above 1GHz)

Spectrum Analyzer Settings Occupied Bandwidth:

Detector: Peak
 Resolution Bandwidth: 3 MHz (to determine peak level)
 10 kHz (to determine occupied bandwidth)
 Video Bandwidth: 3 MHz (to determine peak level)
 30 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4 for stand-alone equipment. The 2-conductor harness was run straight down from the center of the turntable to a power supply sitting at the base of the table.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 6.2.1.

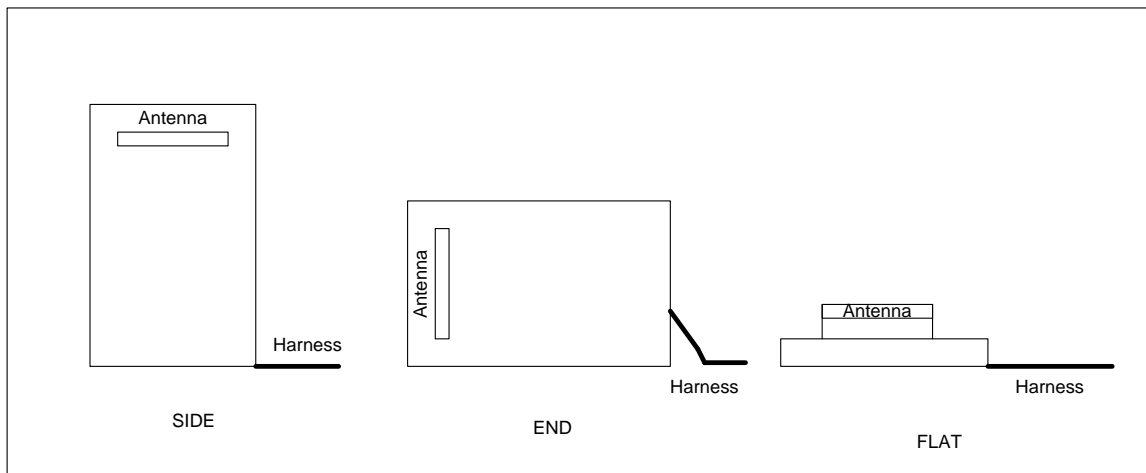


Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

6.3. Measured Data – See Appendix A

7. Verification of Non-Operation in Restricted Bands

An exercise was undergone by the product Software Design team to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in RSS-210 Issue 8, Table 1 and 47 CFR 15.205.

This exercise is described as follows:

HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 440 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz

HomeLink will only transmit at frequencies it is able to train to, therefore to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, the Agilent E4421B signal generator was set up to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. It was then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, the various frequencies in the vicinity of the banned region boundaries were tested, and verified that HomeLink trained when it saw a signal at a valid frequency, and did not train when it saw a



A Smarter Vision®

signal at a banned frequency. In the instances where HomeLink trained to a valid frequency, it was then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore the HomeLink may not adhere to the specified limits with absolute precision. This is why the FCC banned frequencies are guard-banded by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, it guarantees that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain "harmonic avoidance frequency regions" which HomeLink will train to, but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

FCC Banned Regions	Harmonic Avoidance Regions
(HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	(HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
285.0	banned	would not train	Pass	
285.5	allowed (guardband region)	would not train	Pass	
286.0	allowed (guardband region)	trained	Pass	
287.0	allowed	trained	Pass	
303.5	allowed	trained	Pass	
304.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	
319.0	allowed	trained	Pass	
320.0	allowed	trained	Pass	
320.5	allowed	trained	Pass	
321.0	allowed (guardband region)	trained	Pass	
322.0	banned	would not train	Pass	



A Smarter Vision®

323.0	banned	would not train	Pass	
324.0	banned	would not train	Pass	
325.0	banned	would not train	Pass	
326.0	banned	would not train	Pass	
327.0	banned	would not train	Pass	
328.0	banned	would not train	Pass	
329.0	banned	would not train	Pass	
330.0	banned	would not train	Pass	
331.0	banned	would not train	Pass	
332.0	banned	would not train	Pass	
333.0	banned	would not train	Pass	
334.0	banned	would not train	Pass	
335.0	banned	would not train	Pass	
336.0	allowed (guardband region)	would not train	Pass	
337.0	allowed (guardband region)	trained	Pass	
338.0	allowed	trained	Pass	
398.0	allowed	trained	Pass	
399.0	allowed (guardband region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
399.5	allowed (guardband region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
400.0	banned	would not train	Pass	
401.0	banned	would not train	Pass	
402.0	banned	would not train	Pass	
403.0	banned	would not train	Pass	
404.0	banned	would not train	Pass	
405.0	banned	would not	Pass	

		train		
406.0	banned	would not train	Pass	
407.0	banned	would not train	Pass	
408.0	banned	would not train	Pass	
409.0	banned	would not train	Pass	
410.0	banned	would not train	Pass	
410.5	allowed (guardband region)	would not train	Pass	
411.0	allowed (guardband region)	would not train	Pass	
411.5	allowed	trained	Pass	
412.0	allowed	trained	Pass	
439.0	allowed	trained	Pass	
440.0	allowed	trained	Pass	
440.5	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
441.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
442.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz

8. Verification of De-activation after 5 seconds

An exercise was undergone by the product Software Design team to verify that the device was deactivated appropriately. This device stops transmitting after 1.099s once the activation button is released.

9. Formulas and Sample Calculations

9.1. Adjustment to account for duty cycle

The spectrum analyzers used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors) and periodic cable loss measurements.

$$\text{Formula 1: } FS(\text{dBuV/m}) = M(\text{dBuV}) + AF(\text{dB/m}) + CF(\text{dB})$$

The presented field strength is computed by the spectrum analyzer by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurement presented in gathered using the spectrum analyzer's peak-hold capability.

$$\text{Formula 2: } \text{Average Level}(\text{dBuV/m}) = \text{Peak Level}(\text{dBuV/m}) + \text{duty cycle factor}(\text{dB}).$$



A Smarter Vision®

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30): duty cycle factor (dB) = $20 \cdot \text{Log}(0.3) = -10.46$
For 50% (0.50): duty cycle factor(dB) = $20 \cdot \text{Log}(0.5) = -6.02$
For 80% (0.80): duty cycle factor(dB) = $20 \cdot \text{Log}(0.8) = -1.94$

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

9.2. Calculation of IC Limits from Table 4, RSS-210 and 47 CFR Part 15.231

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criteria is:

$$\text{FCC limit} = 41.67 \cdot f - 7083.33$$

(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

$$\text{dB limit} = 20 \cdot \log_{10}(\text{FCC limit uV/m}) = 20 \cdot \log_{10}(41.67 \cdot f - 7083.33)$$

(log₁₀ is used to indicated the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 \cdot \log_{10}(4917.6)$	= 73.8 dBuV/m
310MHz	$20 \cdot \log_{10}(5834.4)$	= 75.3 dBuV/m
390MHz	$20 \cdot \log_{10}(9168.0)$	= 79.2 dBuV/m
433MHz	$20 \cdot \log_{10}(10959.8)$	= 80.8 dBuV/m

10. Other Attachments and Description

10.1. User Manual

Please refer to attachment "User_manual.pdf".

10.2. Schematics / Tuning Information

For schematics please refer to exhibit "Schematics.pdf".

10.3. Emission Designation

According to TRC-43, the emission designation for this product is 69K0L1D. Where "69K0" is the highest measured occupied bandwidth, "L" indicates the device uses pulse width modulation, "1"



A Smarter Vision®

indicates the modulation as being single channel, digital information and "D" indicates that data is being transmitted.

10.4. Theory of Operation

Please refer to attachment "Theory of operation"

10.5. Label Drawing and Location on Complete Assembly

For a drawing of the label, refer to attachment "Label."

For a drawing of the position of the label on the finished assembly refer to "Label Location".

10.6. Photos

For interior photos, refer to exhibit "Interior Photographs".

For exterior photos, refer to exhibit "Exterior Photographs".

For test setup photos, refer to exhibit "Test Setup Photographs".

Appendix A

A. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.4-2009 on the Gentex Corporation 3m test table.

1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
288	Flat	H	30	77.93	93.8	15.9	-10.5	67.5	73.8	6.4
288	Flat	H	50	74.04	93.8	19.8	-6.0	68.0	73.8	5.8
288	End	H	80	68.59	93.8	25.2	-1.9	66.7	73.8	7.2

* Measurements include Cable corrections and Antenna Factors

2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
310	Flat	H	30	77.07	95.3	18.2	-10.5	66.6	75.3	8.7
310	Flat	H	50	73.26	95.3	22.1	-6.0	67.2	75.3	8.1
310	Flat	H	80	66.42	95.3	28.9	-1.9	64.5	75.3	10.8

* Measurements include Cable corrections and Antenna Factors

3. DUT Tuned to Fund 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
365	Flat	H	30	85.35	98.2	12.8	-10.5	74.9	78.2	3.3
365	Flat	H	50	82.12	98.2	16.1	-6.0	76.1	78.2	2.1
365	Flat	H	80	76.41	98.2	21.8	-1.9	74.5	78.2	3.7

* Measurements include Cable corrections and Antenna Factors

4. DUT Tuned to Fund 430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
430	Side	V	30	88.51	100.7	12.2	-10.5	78.1	80.7	2.6
430	Side	V	50	84.62	100.7	16.1	-6.0	78.6	80.7	2.1
430	Side	V	80	77.9	100.7	22.8	-1.9	76.0	80.7	4.7

* Measurements include Cable corrections and Antenna Factors

5. DUT Tuned to Har_288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
576	End	H	30	44.3	73.8	29.5	-10.5	33.8	53.8	20.0
576	End	H	50	44.26	73.8	29.6	-6.0	38.2	53.8	15.6
576	End	H	80	44.35	73.8	29.5	-1.9	42.4	53.8	11.4
864	End	V	30	49.66	73.8	24.2	-10.5	39.2	53.8	14.6
864	End	V	50	42.26	73.8	31.6	-6.0	36.2	53.8	17.6
864	End	V	80	48.35	73.8	25.5	-1.9	46.4	53.8	7.4
1152	End	V	30	47.95	74.0	26.1	-10.5	37.5	54.0	16.5
1152	End	V	50	46.88	74.0	27.1	-6.0	40.9	54.0	13.1
1152	End	V	80	43.29	74.0	30.7	-1.9	41.4	54.0	12.6
1440	Side	H	30	61.83	74.0	12.2	-10.5	51.4	54.0	2.6
1440	Side	H	50	58.78	74.0	15.2	-6.0	52.8	54.0	1.2
1440	Side	H	80	52.61	74.0	21.4	-1.9	50.7	54.0	3.3
1728	Side	H	30	61.88	74.0	12.1	-10.5	51.4	54.0	2.6
1728	Side	H	50	58.46	74.0	15.5	-6.0	52.4	54.0	1.6
1728	Side	H	80	54.68	74.0	19.3	-1.9	52.7	54.0	1.3
2016	Side	H	30	62.12	73.8	11.7	-10.5	51.7	53.8	2.2
2016	Side	H	50	57.85	73.8	16.0	-6.0	51.8	53.8	2.0
2016	Side	H	80	52.15	73.8	21.7	-1.9	50.2	53.8	3.6
2304	End	V	30	61.48	74.0	12.5	-10.5	51.0	54.0	3.0
2304	End	V	50	57.89	74.0	16.1	-6.0	51.9	54.0	2.1
2304	End	V	80	53.64	74.0	20.4	-1.9	51.7	54.0	2.3
2592	Side	H	30	56.274	74.0	17.7	-10.5	45.8	54.0	8.2
2592	Side	H	50	53.26	74.0	20.7	-6.0	47.2	54.0	6.8
2592	Side	H	80	50.12	74.0	23.9	-1.9	48.2	54.0	5.8
2880	End	H	30	57.61	74.0	16.4	-10.5	47.2	54.0	6.8
2880	End	H	50	54.78	74.0	19.2	-6.0	48.8	54.0	5.2
2880	End	H	80	52.19	74.0	21.8	-1.9	50.3	54.0	3.7

* Measurements include Cable corrections and Antenna Factors

6. DUT Tuned to Har_310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
620	End	V	30	44.76	75.3	30.5	-10.5	34.3	55.3	21.0
620	End	V	50	41.32	75.3	34.0	-6.0	35.3	55.3	20.0
620	End	V	80	40.26	75.3	35.0	-1.9	38.3	55.3	17.0
930	Side	V	30	47.58	74.0	26.4	-10.5	37.1	54.0	16.9
930	Side	V	50	45.26	74.0	28.7	-6.0	39.2	54.0	14.8
930	Side	V	80	43.26	74.0	30.7	-1.9	41.3	54.0	12.7
1240	End	V	30	48.96	74.0	25.0	-10.5	38.5	54.0	15.5
1240	End	H	50	47.36	74.0	26.6	-6.0	41.3	54.0	12.7
1240	End	H	80	43.17	74.0	30.8	-1.9	41.2	54.0	12.8
1550	Flat	H	30	62.45	74.0	11.6	-10.5	52.0	54.0	2.0
1550	Flat	H	50	58.27	74.0	15.7	-6.0	52.2	54.0	1.8
1550	Flat	H	80	53.45	74.0	20.6	-1.9	51.5	54.0	2.5
1860	Side	H	30	56.69	75.3	18.6	-10.5	46.2	55.3	9.1
1860	Side	H	50	53.97	75.3	21.3	-6.0	47.9	55.3	7.4
1860	Side	H	80	50.57	75.3	24.7	-1.9	48.6	55.3	6.7
2170	Side	H	30	61.85	74.0	12.2	-10.5	51.4	54.0	2.6
2170	Side	H	50	57.08	74.0	16.9	-6.0	51.1	54.0	2.9
2170	Side	H	80	51.86	74.0	22.1	-1.9	49.9	54.0	4.1
2480	Side	V	30	57.17	74.0	16.8	-10.5	46.7	54.0	7.3
2480	Side	V	50	54.86	74.0	19.1	-6.0	48.8	54.0	5.2
2480	Side	V	80	52.41	74.0	21.6	-1.9	50.5	54.0	3.5
2790	Side	H	30	59.49	74.0	14.5	-10.5	49.0	54.0	5.0
2790	Side	H	50	54.99	74.0	19.0	-6.0	49.0	54.0	5.0
2790	Side	H	80	50.16	74.0	23.8	-1.9	48.2	54.0	5.8
3100	End	V	30	62.76	75.3	12.5	-10.5	52.3	55.3	3.0
3100	End	V	50	59.14	75.3	16.2	-6.0	53.1	55.3	2.2
3100	End	V	80	55.56	75.3	19.7	-1.9	53.6	55.3	1.7

* Measurements include Cable corrections and Antenna Factors

7. DUT Tuned to Har_365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
730	End	V	30	54.85	78.2	23.4	-10.5	44.4	58.2	13.8
730	End	V	50	52.36	78.2	25.8	-6.0	46.3	58.2	11.9
730	End	V	80	50.12	78.2	28.1	-1.9	48.2	58.2	10.0
1095	End	V	30	61.37	74.0	12.6	-10.5	50.9	54.0	3.1
1095	End	V	50	57.65	74.0	16.4	-6.0	51.6	54.0	2.4
1095	End	V	80	53.18	74.0	20.8	-1.9	51.2	54.0	2.8
1460	End	V	30	60.77	74.0	13.2	-10.5	50.3	54.0	3.7
1460	End	V	50	57.62	74.0	16.4	-6.0	51.6	54.0	2.4
1460	End	V	80	53.1	74.0	20.9	-1.9	51.2	54.0	2.8
1825	End	V	30	58.72	74.0	15.3	-10.5	48.3	54.0	5.7
1825	End	V	50	56.45	74.0	17.6	-6.0	50.4	54.0	3.6
1825	End	V	80	52.25	74.0	21.8	-1.9	50.3	54.0	3.7
2190	Side	H	30	62.32	74.0	11.7	-10.5	51.9	54.0	2.1
2190	Side	H	50	59.07	74.0	14.9	-6.0	53.0	54.0	1.0
2190	Side	H	80	54.79	74.0	19.2	-1.9	52.9	54.0	1.1
2555	Side	H	30	55.25	74.0	18.8	-10.5	44.8	54.0	9.2
2555	Side	H	50	51.34	74.0	22.7	-6.0	45.3	54.0	8.7
2555	Side	H	80	49.03	74.0	25.0	-1.9	47.1	54.0	6.9
2920	Side	H	30	61.54	74.0	12.5	-10.5	51.1	54.0	2.9
2920	Side	H	50	57.89	74.0	16.1	-6.0	51.9	54.0	2.1
2920	Side	H	80	54.26	74.0	19.7	-1.9	52.3	54.0	1.7
3285	Flat	H	30	55.27	74.0	18.7	-10.5	44.8	54.0	9.2
3285	Flat	H	50	52.67	74.0	21.3	-6.0	46.6	54.0	7.4
3285	Flat	H	80	49.89	74.0	24.1	-1.9	48.0	54.0	6.0
3650	Flat	H	30	56.34	74.0	17.7	-10.5	45.9	54.0	8.1
3650	Flat	H	50	53.09	74.0	20.9	-6.0	47.1	54.0	6.9
3650	Flat	H	80	51.15	74.0	22.9	-1.9	49.2	54.0	4.8

8. DUT Tuned to Har_430MHz


Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
860	End	V	30	49.44	80.8	31.4	-10.5	39.0	60.8	21.8
860	End	V	50	47.26	80.8	33.5	-6.0	41.2	60.8	19.6
860	End	V	80	45.26	80.8	35.5	-1.9	43.3	60.8	17.5
1290	End	V	30	55.79	74.0	18.2	-10.5	45.3	54.0	8.7
1290	End	V	50	52.25	74.0	21.8	-6.0	46.2	54.0	7.8
1290	End	V	80	47.71	74.0	26.3	-1.9	45.8	54.0	8.2
1720	Side	H	30	62.14	74.0	11.9	-10.5	51.7	54.0	2.3
1720	Side	H	50	58.16	74.0	15.8	-6.0	52.1	54.0	1.9
1720	Side	H	80	54.16	74.0	19.8	-1.9	52.2	54.0	1.8
2150	Side	H	30	55.26	80.8	25.5	-10.5	44.8	60.8	16.0
2150	Side	H	50	56.64	80.8	24.2	-6.0	50.6	60.8	10.2
2150	Side	H	80	52.33	80.8	28.5	-1.9	50.4	60.8	10.4
2580	End	V	30	59.76	74.0	14.2	-10.5	49.3	54.0	4.7
2580	End	V	50	56.76	74.0	17.2	-6.0	50.7	54.0	3.3
2580	End	V	80	52.83	74.0	21.2	-1.9	50.9	54.0	3.1
3010	Side	H	30	62.41	74.0	11.6	-10.5	52.0	54.0	2.0
3010	Side	H	50	57.9	74.0	16.1	-6.0	51.9	54.0	2.1
3010	Side	H	80	52.5	74.0	21.5	-1.9	50.6	54.0	3.4
3440	End	V	30	62.54	74.0	11.5	-10.5	52.1	54.0	1.9
3440	End	V	50	57.98	74.0	16.0	-6.0	52.0	54.0	2.0
3440	End	V	80	54.66	74.0	19.3	-1.9	52.7	54.0	1.3
3870	End	V	30	58.79	74.0	15.2	-10.5	48.3	54.0	5.7
3870	End	V	50	52.75	74.0	21.3	-6.0	46.7	54.0	7.3
3870	End	V	80	51.23	74.0	22.8	-1.9	49.3	54.0	4.7
4300	Side	H	30	58.52	74.0	15.5	-10.5	48.1	54.0	5.9
4300	Side	H	50	52.92	74.0	21.1	-6.0	46.9	54.0	7.1
4300	Side	H	80	51.74	74.0	22.3	-1.9	49.8	54.0	4.2

* Measurements include Cable corrections and Antenna Factors

9. Pulsed Operation

The HomeLink® transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles is provided here. Measurements were taken at 365 MHz with the span set to zero on the R&S ESR Receiver. The duty cycle is 500Hz.

a. 30% Duty Cycle

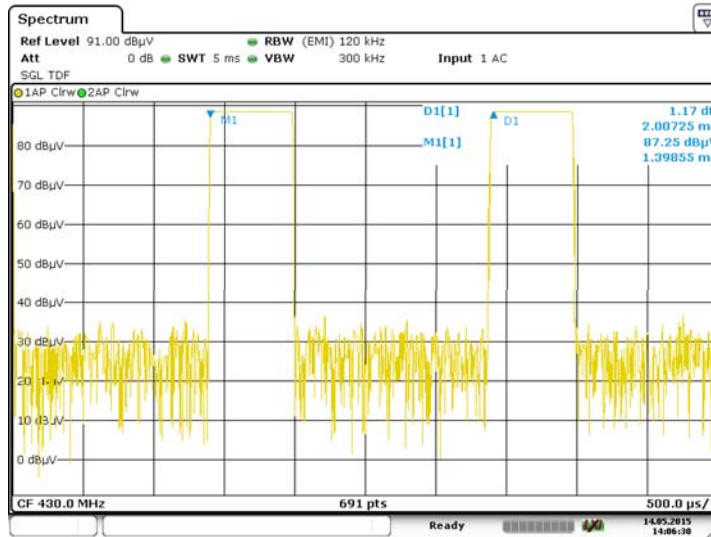


Date: 14.MAY.2015 14:06:30




Date: 14.MAY.2015 14:15:29

b. 50% Duty Cycle

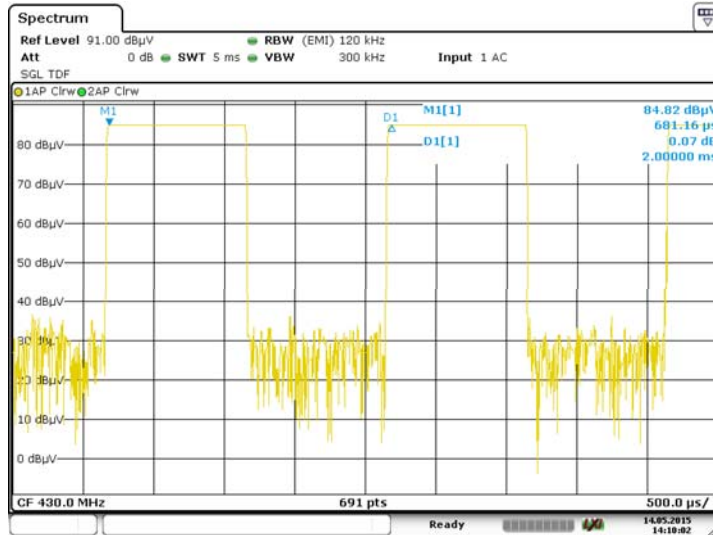


Date: 14.MAY.2015 14:10:01

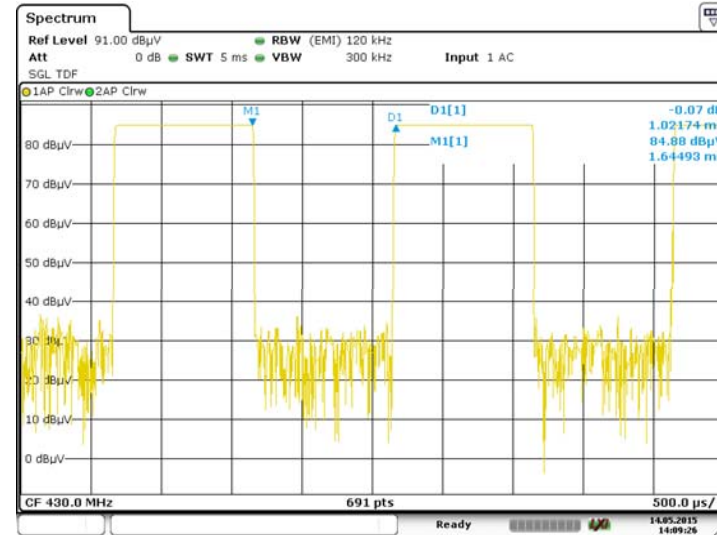

Date: 14.MAY.2015 14:09:26

c. 80% Duty Cycle

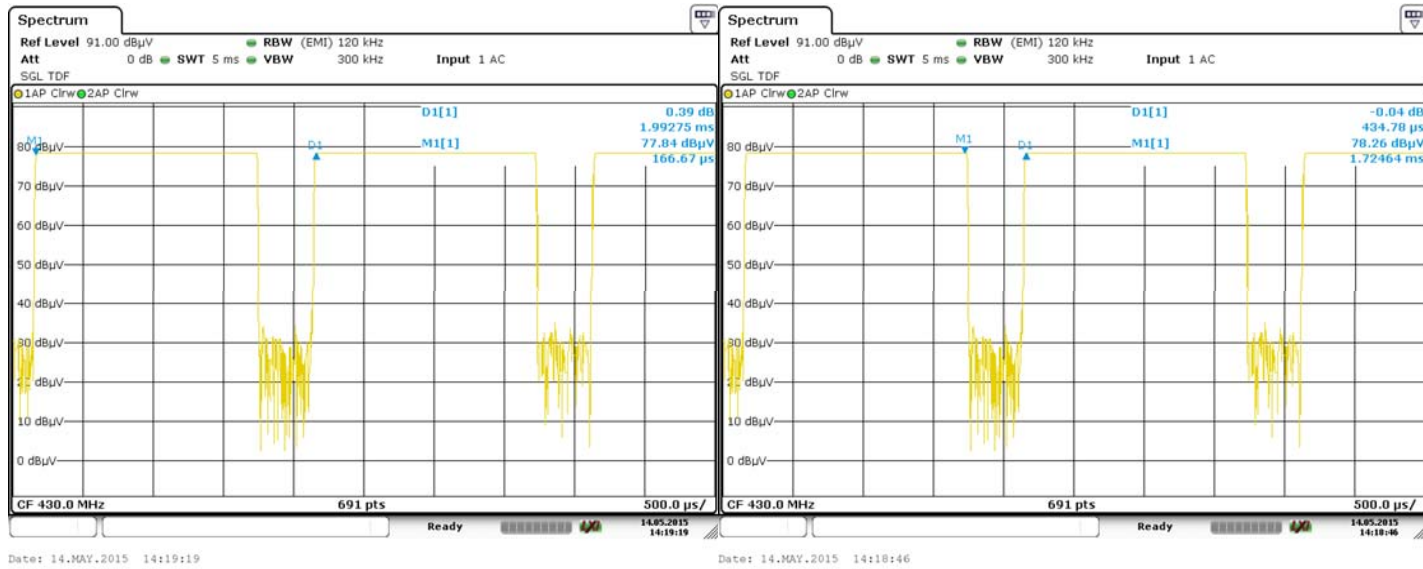


10. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, and 430MHz. The occupied bandwidth was determined using the 20dB measurement method.

a. Occupied Bandwidth Measurement


Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	68.00	720	652.00
	50	69.00	720	651.00
	80	65.00	720	655.00
310	30	78.00	775	697.00
	50	65.00	775	710.00
	80	65.00	775	710.00
365	30	65.00	1045	980.00
	50	60.00	1045	985.00
	80	60.00	1045	985.00
433	30	82.00	1045	963.00
	50	65.00	1045	980.00
	80	65.00	1045	980.00

**b. Example of Occupied Bandwidth measurement
430MHz 30%**

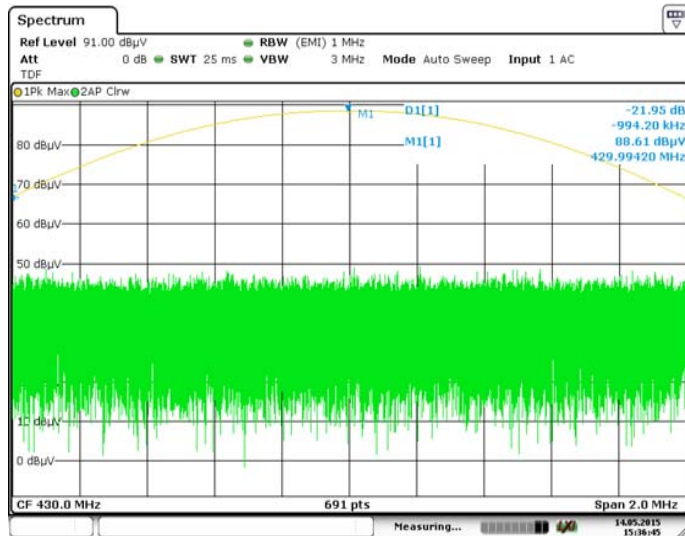

Date: 14.MAY.2015 15:36:45

Measuring Peak Reference Level

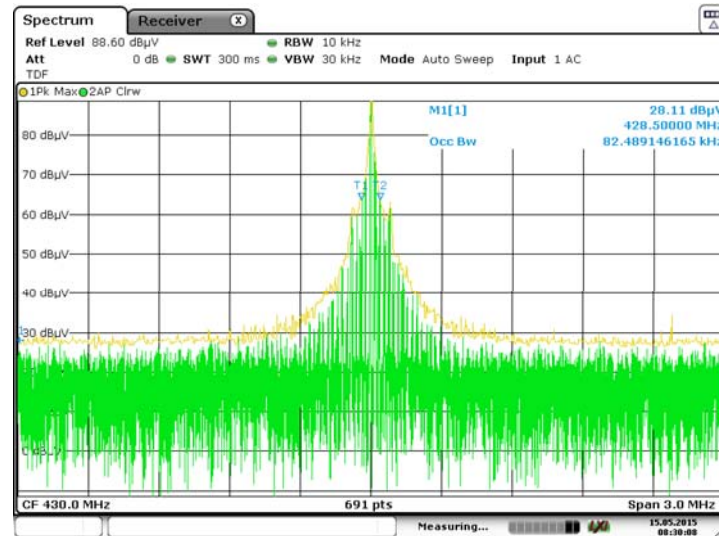

Date: 15.MAY.2015 08:30:08

Measuring Occupied Bandwidth at -20dB points

11. Summary of Emissions Measurements Taken on OATS

Transmitting Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
288	89	Flat	H	35.26	40	4.74
	90	Flat	H	34.26	40	5.74
	100	Flat	V	33.45	40	6.55
	106	Flat	H	33.26	40	6.74
310	71	Flat	V	29.58	40	10.42
	89	Flat	H	29.65	40	10.35
	90	Flat	H	30.21	40	9.79
	100	Flat	H	31.45	40	8.55
	200	End	V	34.26	40	5.74
365	56	Flat	H	28.95	40	11.05
	70	End	H	34.26	40	5.74
	101	End	H	33.21	40	6.79
433	34	Side	V	29.34	40	10.66
	51	Side	H	28.45	40	11.55
	135	Flat	H	28.59	40	11.41

Measurements were made using a peak detector with Resolution BW of 120 kHz and Video BW of 300 kHz. Cable losses and correction factors are included in measurement.

12. Receiver Spurious Emissions

The receiver circuit spurious emissions were measured in accordance to Industry Canada RSS-GEN Issue 2 Section 4.10 and ANSI C63.4-2009.

The band midpoint over which the receiver is designed to operate is 368MHz. The HomeLink 5 is supplied with commands to place it into diagnostic / manufacturing mode, and tune the receiver to the midpoint frequency.

The search for spurious emissions was conducted over a range of 286MHz (The lowest oscillator frequency used by the receiver) to 1350 MHz (3 times the highest tunable frequency of 450MHz).

To determine the orientation of the device at which the worst case emissions would occur, exploratory measurements were taken using a diagnostic command to transmit at the midpoint frequency of 368MHz. The device was then set to receive using a manufacturing diagnostic command. Refer to setup photograph. The device under test is on its side, with the antenna in horizontal polarization.

Measurements from 286MHz to 1 GHz were made with the spectrum analyzer using the peak detection method. The resolution bandwidth setting was 120 kHz. **At the fundamental frequency, 365 MHz, the receiver spurious worst case emissions measurement was 148uV/m at 3m. Remaining 52uV/m below the limit.**

Receive Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (uV/m)	Limit (uV/m)	Margin (uV/m)
365	296	End	H	134	200	66
	323	End	H	135	200	65
	377	End	H	138	200	62
	379	End	H	141	200	59
	649	End	H	148	200	52
	999	End	H	156	500	344
	1000	End	H	189	500	311
	1037	End	H	198	500	302
	1040	End	H	201	500	299
	1110	End	H	215	500	285
	1155	End	H	219	500	281
	1195	End	H	223	500	277
	1199	End	H	230	500	270
	1350	End	H	237	500	263


Ambient

13. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at 288MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

a. Plot of output power over supply voltage

Output Field Strength vs. Supply Voltage

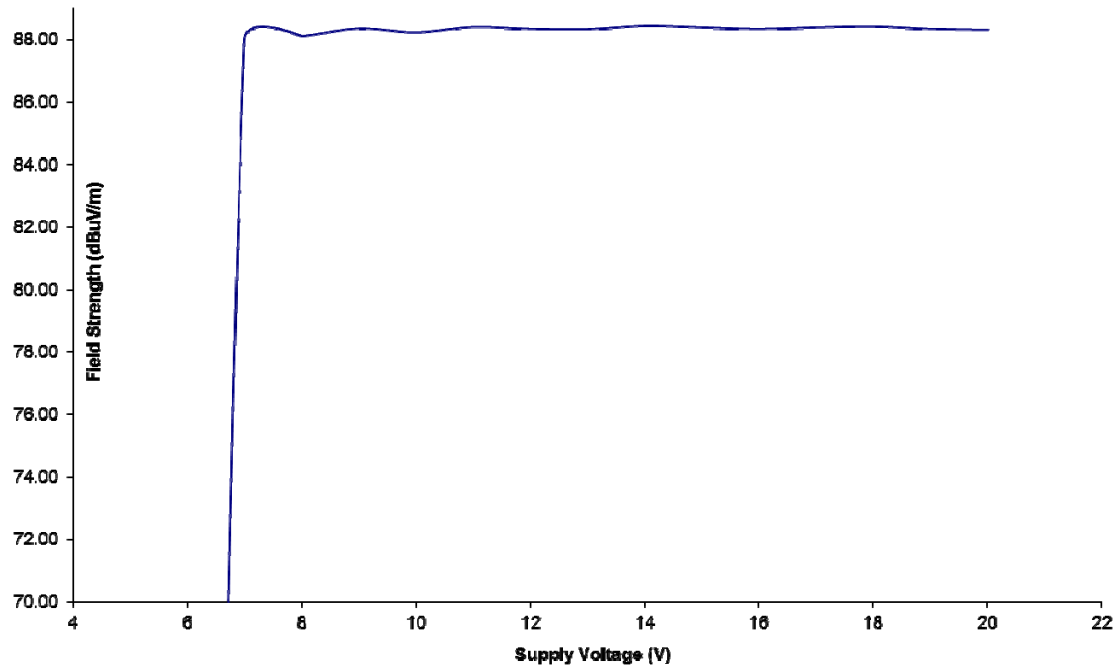

b. Output Power as a Function of Supply Voltage

Voltage	Field Strength (dBuV/m)	Frequency (MHz)
6	0.00	
7	87.99	430MHz
8	88.12	430MHz
9	88.36	430MHz
10	88.24	430MHz
11	88.41	430MHz
12	88.35	430MHz
13	88.34	430MHz
14	88.45	430MHz
15	88.40	430MHz
16	88.35	430MHz
17	88.40	430MHz
18	88.43	430MHz
19	88.35	430MHz
20	88.32	430MHz