



**Technical Report to the FCC  
Gentex Corporation**

**Model: UAHL5K  
FCC ID: NZLUAHL5K  
ISED: 4112A-UAHL5K**

**09/09/2022**

A report concerning approval for Gentex Corporation model UAHL5K  
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pannell  
Laboratory Validation Engineer III  
Gentex Corporation

Measurements Reviewed by:

Dan Brasier  
Laboratory Development Engineer II  
Gentex Corporation

Report Prepared by:

Patricia Klawitter  
Laboratory Validation Engineer I  
Gentex Corporation

Report Approved by:

Jason Vargo  
Laboratory Manager I  
Gentex Corporation

Report Submitted by:

Brian Miller  
Laboratory Group Leader – Regulatory II  
Gentex Corporation

## Test Report Revision

| REV Number | Date     | Author             | Description  |
|------------|----------|--------------------|--|
| 1.0        | 8/29/22  | Patricia Klawitter | Initial Release.   |
| 2.0        | 9/8/2022 | Patricia Klawitter | Corrected limits in table and added statement about measurements above 1GHz. |
| 3.0        | 9/9/22   | Brian Miller       | Updated per Notified Body feedback.  |

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

Lab Project ID#: EMC2022-10286

Test ID: 087535

Model: UAHL5K

FCC Report Form for Part 15 Class B Emissions

Date: 09/9/2022

Revision: 07/14/2022 Approved By: Jason Vargo

Page 2 of 9

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

## **1. General Information**

### **1.1. Product Description**

The Gentex Corporation HomeLink OEM device that is installed into a rearview mirror. The installation is provided by trained technicians during the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power to the unit.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

### **1.2. Related Grants**

This device will have functionality that is covered under 47 CFR Part 90 and ISED Canada RSS-137. The device will have FCC ID # of NZLUAHL5K and ISED ID # of 4112A-UAHL5K.

### **1.3. Test Methodology**

Radiated Emissions testing was performed according to ANSI C63.4:2014. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required. The DUT was tested by placing it in RX mode with a signal generator transmitting to a loop antenna within proximity of the DUT. The emissions sweeps were performed with the signal generator transmitting a CW signal at the low, mid, and high frequency of the intentional radiator frequency bands.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.

The DUT was tested in receive mode only.

### **1.4. Test Facility**

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 4/18/2019 and includes accreditation to ANSI C63.4:2014, ANSI C63.10:2013, and C63.26:2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address

Gentex Corporation  
600 N. Centennial Street  
Zeeland, MI 49464

Site Address

Gentex Corporation  
380 Riley Street  
Zeeland, MI 49464

## 1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site [www.a2la.org](http://www.a2la.org). Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, ANSI C63.26:2015 and Radiated Emissions at 3m, FCC 47 CFR Part 90, ISED RSS-137.

## 2. Product Labeling

### 2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLUAHL5K. The ISED certification number is 4112A-UAHL5K. These identifiers will be labeled on the product housing.

The label will be printed on a label, which will be placed on the exterior of the housing and permanently affixed.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"The receiver portion of the device complies with FCC rule Part 15. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

This equipment complies with FCC and ISED radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must be at least 20cm from the user and must not be co-located or operating in conjunction with any other antenna or transmitter.

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.

ISED: 4112A-UAHL5K      FCC ID: NZLUAHL5K

### 2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

### 3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4-2014. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for all measurements. The harness was run straight down from the center of the turntable to a power supply connection sitting at the base of the table. The power supply is located beneath the floor of the chamber.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

### 4. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

### 5. Radiated Emissions Data

**5.1. Date(s) Tested:** 08/18/2022 – 08/25/2022

**5.2. Test Method Deviations:** None

**5.3. Temperature and Humidity conditions**

|             | Measured Value | Unit  |
|-------------|----------------|-------|
| Temperature | 21.5           | °C    |
| Humidity    | 44.10          | %R.H. |

### 5.4. Summary of Results

| Measurement                 | Margin       | Frequency   |
|-----------------------------|--------------|-------------|
| Worst case Digital Emission | 44.48 dBuV/m | -9.52 dB    |
|                             |              | 4469.75 MHz |

- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of k=2.26 and confidence interval of approximately 95%.

Expanded Uncertainty  $U_{(k=2.26)}$  is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.7 dB
- Radiated Emissions – LPA (250-1000 MHz): 5.6 dB
- Radiated Emissions – DRWG (26.5 GHz): 4.9 dB
- Frequency: 0.12ppm

## 5.5. Test Equipment Setup and Procedure

### 5.5.1. Test Equipment Used


| Description                                       | Model # | ID Number | Cal Due    |
|---|---------|-----------|------------|
| EMCO Biconical Antenna<br>[30-250 MHz]            | 3110B   | H6189     | 5/6/2024   |
| EMCO LPA Antenna<br>[250-1000MHz]                 | 3148    | H6192     | 5/3/2024   |
| Com-Power Double<br>Ridged Waveguide<br>[1-18GHz] | AHA-118 | 8893      | 11/25/2022 |
| Rohde & Schwarz EMI<br>Receiver                   | ESR26   | 6595      | 10/25/2022 |
| Cables, attenuator and<br>port feed through       | various | CF GCL    | 4/30/2023  |
| 3m Chamber SW                                     | N/A     | SW30      | 3/31/2023  |
| Sonoma Amplifier                                  | 310N    | 273123    | 12/31/2022 |
| Gentex Emissions SW                               | N/A     | SW48      | 3/31/2023  |

EMI Receiver Settings Emissions:

Detector Function: Quasi-Peak  
Resolution Bandwidth: 120 kHz (below 1GHz)  
1MHz (above 1GHz)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4:2014 for stand-alone equipment. The 2-conductor harness was run straight down from the center of the turntable to a power supply sitting at the base of the table.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat where applicable. The DUT was tested in in-vehicle position only similar to the flat orientation, see test setup photos for details. These orientations are described below in Figure 6.2.1.

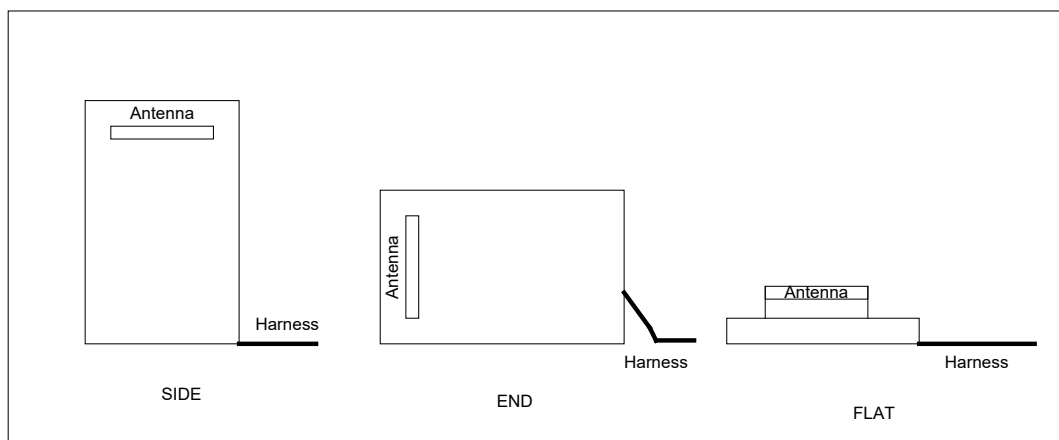

**Figure 6.2.1 EUT Orthogonal Orientations**

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through

360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

## 6. Class B Emissions

The transmitter spurious radiation emissions were measured in a 3m semi-anechoic chamber. The design utilizes permanently attached antenna system and offers no provision antenna replacement. The DUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the measurement antenna. For RX mode, emissions sweeps were performed with a loop antenna in proximity of the DUT and connected to a signal generator. An emissions sweep was performed with the signal generator transmitting a CW signal for each low, mid, and high frequency of the intentional radiator frequency range to be certified.

The turntable was rotated through 360 degrees to locate the position registering the maximum amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the measurement antenna and rotating the turntable to maximize the emission. A Biconical Antenna was used for measuring emissions from for 30-200 MHz, Log Antenna for 200-1000 MHz, and Double Ridge Wave Guide Horn for 1-5 GHz. Emissions were measured in dBuV/m at 3 meters.

Data was taken per 47CFR Part 2.1051 and applicable parts of 47CFR Part 15B. The DUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057.

## 7. Formula and Sample Calculation

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

Formula 1:  $FS(dBuV/m) = M(dBuV) + AF(dB/m) + CF(dB) - AG(dB)$

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

## 8. Measurement Settings

### 30 - 200MHz:

Sweep 1: QuasiPeak - 120 kHz

Segment: 1

Start Frequency: 30 MHz

End Frequency: 88 MHz

Band: Band 1

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: AUTO (30 kHz)

Dwell Time: 1000ms

Sweep 1: QuasiPeak - 120 kHz

Segment: 2

Start Frequency: 88 MHz

End Frequency: 200 MHz

Band: Band 2

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: AUTO (30 kHz)

Dwell Time: 1000ms

### 200 - 1000MHz:

Sweep 1: QuasiPeak - 120 kHz

Segment: 1

Start Frequency: 200 MHz

End Frequency: 216 MHz

Band: Band 2

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: AUTO (30 kHz)

Dwell Time: 1000ms

Sweep 1: QuasiPeak - 120 kHz

Segment: 2

Start Frequency: 216 MHz

End Frequency: 960 MHz

Band: Band 3

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: AUTO (30 kHz)

Dwell Time: 1000ms

Sweep 1: QuasiPeak - 120 kHz

Segment: 3

Start Frequency: 960 MHz

End Frequency: 1000 MHz

Band: Band 4

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: AUTO (30 kHz)

Dwell Time: 1000ms

### 1000-5000MHz:

Sweep 2: CISPR Average - 1000 kHz

Segment: 1

Start Frequency: 1000 MHz

End Frequency: 5000 MHz

Band: Band 5

Detector: CISPR Average

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 1000 kHz

Step Size: AUTO (250 kHz)

Dwell Time: 5ms



# GENTEX CORPORATION

All peak emissions above 1GHz were less than 20dB above the average values.

| Test Mode | Detector   | Frequency (MHz) |      | Worst-Case Orientation | Antenna Polarization | Frequencies (MHz) | Emission (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------|------------|-----------------|------|------------------------|----------------------|-------------------|-------------------|----------------|-------------|
|           |            | Start           | Stop |                        |                      |                   |                   |                |             |
| RX        | Quasi-Peak | 30              | 88   | End                    | V                    | 47.82             | 7.17              | 40             | -32.83      |
| RX        | Quasi-Peak | 88              | 216  | Side                   | H                    | 174.84            | 11.34             | 43.5           | -32.16      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | H                    | 312.5             | 23.4              | 46             | -22.6       |
| RX        | Quasi-Peak | 216             | 1000 | Side                   | V                    | 400               | 23.06             | 46             | -22.94      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | V                    | 480               | 25.57             | 46             | -20.43      |
| RX        | Quasi-Peak | 216             | 1000 | Side                   | V                    | 500               | 27.98             | 46             | -18.02      |
| RX        | Quasi-Peak | 216             | 1000 | End                    | V                    | 576               | 26.81             | 46             | -19.19      |
| RX        | Quasi-Peak | 216             | 1000 | End                    | V                    | 600               | 24.77             | 46             | -21.23      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | V                    | 730               | 26.2              | 46             | -19.8       |
| RX        | Quasi-Peak | 216             | 1000 | End                    | V                    | 749.98            | 30.59             | 46             | -15.41      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | V                    | 781               | 26.3              | 46             | -19.7       |
| RX        | Quasi-Peak | 216             | 1000 | Side                   | H                    | 783               | 26.51             | 46             | -19.49      |
| RX        | Quasi-Peak | 216             | 1000 | Side                   | H                    | 786               | 26.31             | 46             | -19.69      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | V                    | 812.51            | 28.22             | 46             | -17.78      |
| RX        | Quasi-Peak | 216             | 1000 | Flat                   | H                    | 838               | 27.23             | 46             | -18.77      |
| RX        | Quasi-Peak | 216             | 1000 | Side                   | V                    | 937.49            | 31.77             | 46             | -14.23      |
| RX        | Quasi-Peak | 216             | 1000 | End                    | V                    | 1000              | 31.07             | 46             | -14.93      |
| RX        | Average    | 1000            | 5000 | Flat                   | V                    | 1804              | 33.51             | 54             | -20.49      |
| RX        | Average    | 1000            | 5000 | Flat                   | V                    | 1829              | 34.13             | 54             | -19.87      |
| RX        | Average    | 1000            | 5000 | Side                   | V                    | 1886.75           | 34.42             | 54             | -19.58      |
| RX        | Average    | 1000            | 5000 | Side                   | H                    | 1893.5            | 36.8              | 54             | -17.2       |
| RX        | Average    | 1000            | 5000 | Side                   | V                    | 2455.5            | 35.76             | 54             | -18.24      |
| RX        | Average    | 1000            | 5000 | Side                   | V                    | 2459.25           | 35.89             | 54             | -18.11      |
| RX        | Average    | 1000            | 5000 | End                    | H                    | 2465.75           | 36                | 54             | -18         |
| RX        | Average    | 1000            | 5000 | Flat                   | H                    | 2456              | 35.69             | 54             | -18.31      |
| RX        | Average    | 1000            | 5000 | Side                   | H                    | 2466.25           | 36.22             | 54             | -17.78      |
| RX        | Average    | 1000            | 5000 | Flat                   | V                    | 2479.75           | 35.57             | 54             | -18.43      |
| RX        | Average    | 1000            | 5000 | Flat                   | V                    | 2481.15           | 36.17             | 54             | -17.83      |
| RX        | Average    | 1000            | 5000 | End                    | H                    | 4469.75           | 44.48             | 54             | -9.52       |