

**Technical Report to the FCC
Gentex Corporation**

**Model: UAHL5T
FCC ID: NZLUAHL5T
ISED: 4112A-UAHL5T**

11/8/2024

A report concerning approval for Gentex Corporation model UAHL5T
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pacheco
Laboratory Validation Engineer III
Gentex Corporation

Measurements Reviewed by:

Dan Brasier
Laboratory Development Engineer II
Gentex Corporation

Report Prepared by:

Patricia Szeszulski
Laboratory Validation Engineer I
Gentex Corporation

Report Approved by:

Jason Vargo
Laboratory Manager I
Gentex Corporation

Report Prepared, and Submitted by:

Brian Miller
Laboratory Group Leader – Regulatory II
Gentex Corporation

Test Report Revision

REV Number	Date	Author	Description
1.0	10/24/2024	Patricia Szeszulski	Initial Release
2.0	11/8/2024	Patricia Szeszulski	Added comment on page 10 addressing emissions in the 1000-5000MHz range

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

Lab Project ID#: EMC2024-09703 Test ID: Test-114852
FCC Report Form for Part 15 Class B Emissions
Revision: 04/29/2024 Approved By: Jason Vargo
Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5T
Date: 11/8/2024
Page 2 of 10

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink OEM device that is installed into a rearview mirror of an automobile. The installation is provided by trained technicians during the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power to the unit.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. The service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR Part 15.247 and 15.231 and ISCED Canada RSS-231 and RSS-247. The device will have FCC ID # of NZLUAHL5T and ISCED ID # of 4112A-UAHL5T.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.4:2014. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required. The DUT was tested by placing it in RX mode with a signal generator transmitting to a loop antenna within proximity of the DUT. The emissions sweeps were performed with the signal generator transmitting a CW signal at the low, mid, and high frequency of the intentional radiator frequency bands.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.

The DUT was tested in receive mode only.

1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 4/18/2019 and includes accreditation to ANSI C63.4:2014, ANSI C63.10:2013, and C63.26:2015. Our 3m chamber is registered with the ISCED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address

Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address

Gentex Corporation
380 Riley Street
Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, ANSI C63.26:2015 and Radiated Emissions at 3m, FCC 47 CFR Part 90, ISSED RSS-137.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLUAHL5T. The ISSED certification number is 4112A-UAHL5T. These identifiers will be labeled on the product housing.

The label will be printed on a label, which will be placed on the exterior of the housing and permanently affixed.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"The receiver portion of the device complies with FCC rule Part 15. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISSED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

This equipment complies with FCC and ISSED radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must be at least 20cm from the user and must not be co-located or operating in conjunction with any other antenna or transmitter.

The term "ISSED:" before the certification/registration number only signifies that ISSED technical specifications were met.

ISSED: 4112A-UAHL5T FCC ID: NZLUAHL5T

2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4-2014. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for all measurements. The harness was run down the edge of the test table to a power supply beneath the turntable.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

4. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

5. Radiated Emissions Data

5.1. Date(s) Tested: 9/18/2024-9/20/2024

5.2. Test Method Deviations: None

5.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	20.4-22	°C
Humidity	52.2-55.7	%R.H.

5.4. Summary of Results

Measurement		Margin	Frequency
Worst case Digital Emission	33.4 dBuV/m	6.6 dB	33.45 MHz

- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of $k=2.26$ and confidence interval of approximately 95%.

Expanded Uncertainty $U_{(k=2.26)}$ is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.1 dB
- Radiated Emissions – LPA (250-1000 MHz): 5.0 dB
- Radiated Emissions – DRWG (26.5 GHz): 4.2 dB
- Frequency: 0.007 ppm

5.5. Test Equipment Setup and Procedure

5.5.1. Sample(s) Used for Measurements

Part Number(s):	905-6694-150955-1
-----------------	-------------------

5.5.2. Test Equipment Used

Equipment used			
ID / Serial #	Manufacturer	Description	Cal / PM Due Date
6595	Rohde and Schwarz	EMI Receiver Firmware 3.66 SP1	11/13/2024
CF GCL	Megaphase/Pasternack	3m Chamber Port and Cables	4/30/2025
H6187	EMCO	3110B Biconical RX	5/13/2027
H6192	EMCO	3148 Log Periodic RX	5/13/2027
Tower 2	ETS-Lindgren	2171B Boresight Tower	VBV
PJ2246	ETS-Lindgren	Shielded Enclosure	12/31/2024
7187	Omega	iBTHX-W Virtual	9/24/2025
6539	Stanley	Tape Measure	6/19/2026
H4554	87V	Multimeter	1/11/2025
SW30	Gentex	3m Chamber Software	3/31/2025
SW48	Gentex	Gentex Emissions Measurement Software	3/31/2025
H6193	EMCO	3147 Log Periodic TX	5/13/2027
8893	Com-Power	AH-118 Active Horn	4/22/2027
273123	Sonoma Instrument	Amplifier	12/31/2024
6368	Rohde & Schwarz	Signal Generator	9/14/2025
Absorber 1	ETS-Lindgren	Absorber	VBV
CBL 143	Megaphase	GC29-N1N1-192	4/30/2025
CBL 153	Megaphase	GC29-N1N1-360	4/30/2025

EMI Receiver Settings Emissions:

Detector Function: Quasi-Peak
Resolution Bandwidth: 120 kHz (below 1GHz)
1MHz (above 1GHz)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4:2014 for stand-alone equipment. The 2-conductor harness was run down the edge of the test table to a power supply beneath the turntable.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat where applicable. The DUT was tested in in-vehicle position only similar to the flat orientation, see test setup photos for details. These orientations are described below in Figure 6.2.1.

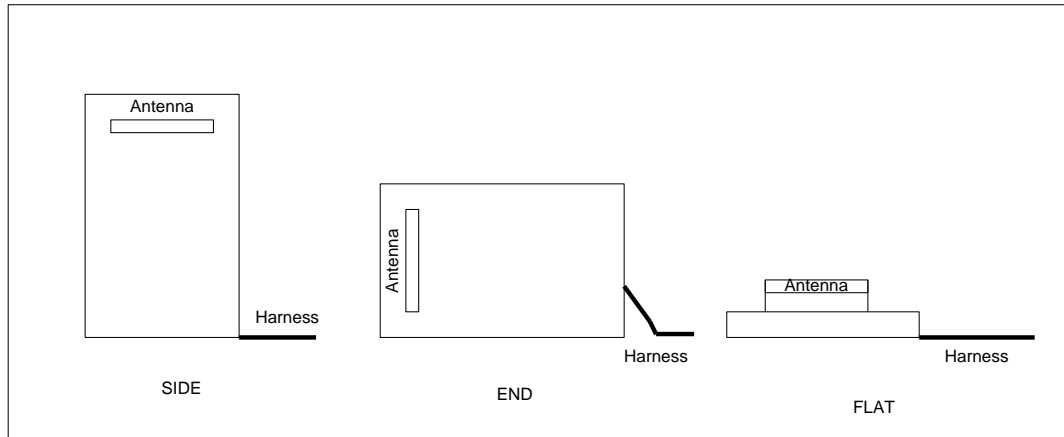


Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

6. Class B Emissions

The transmitter spurious radiation emissions were measured in a 3m semi-anechoic chamber. The design utilizes a permanently attached antenna system and offers no provision for antenna replacement. The DUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the measurement antenna. For RX mode, emissions sweeps were performed with a loop antenna in proximity of the DUT and connected to a signal generator. An emissions sweep was performed with the signal generator transmitting a CW signal for each low, mid, and high frequency of the intentional radiator frequency range to be certified.

The turntable was rotated through 360 degrees to locate the position registering the maximum amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the measurement antenna and rotating the turntable to maximize the emission. A Biconical Antenna was used for measuring emissions from for 30-200 MHz, Log Antenna for 200-1000 MHz, and Double Ridge Wave Guide Horn for 1-5 GHz. Emissions were measured in dBuV/m at 3 meters.

Data was taken per 47CFR Part 2.1051 and applicable parts of 47CFR Part 15B. The DUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057.

7. Formula and Sample Calculation

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

$$\text{Formula 1: FS(dBuV/m)} = \text{M(dBuV)} + \text{AF(dB/m)} + \text{CF(dB)} - \text{AG(dB)}$$

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

8. Measurement Settings

30 - 200MHz:

Sweep 1: CISPR Average - 120 kHz
Segment: 1
Start Frequency: 30 MHz
End Frequency: 88 MHz
Band: Band 1
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz): Disabled

Disabled

Sweep 2: QuasiPeak - 120 kHz
Segment: 5
Start Frequency: 30 MHz
End Frequency: 88 MHz
Band: Band 1
Detector: QuasiPeak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz): Disabled

Disabled

Sweep 1: CISPR Average - 120 kHz
Segment: 2
Start Frequency: 88 MHz
End Frequency: 216 MHz
Band: Band 2
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz): Disabled

Sweep 2: QuasiPeak - 120 kHz
Segment: 6
Start Frequency: 88 MHz
End Frequency: 216 MHz
Band: Band 2
Detector: QuasiPeak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz): Disabled

Disabled

200 - 1000MHz:

Sweep 1: CISPR Average - 120 kHz
Segment: 3
Start Frequency: 216 MHz
End Frequency: 960 MHz
Band: Band 3
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz): Disabled

Disabled

Sweep 2: QuasiPeak - 120 kHz
Segment: 7
Start Frequency: 216 MHz
End Frequency: 960 MHz
Band: Band 3
Detector: QuasiPeak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 1: CISPR Average - 120 kHz
Segment: 4
Start Frequency: 960 MHz
End Frequency: 1000 MHz
Band: Band 4
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 2: QuasiPeak - 120 kHz
Segment: 8
Start Frequency: 960 MHz
End Frequency: 1000 MHz
Band: Band 4
Detector: QuasiPeak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

1000 – 5000Mhz:

Sweep 3: CISPR Average - 1000 kHz
Segment: 9
Start Frequency: 1000 MHz
End Frequency: 5000 MHz
Band: Band 5
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 1000 kHz
Step Size: 500 kHz
Dwell Time: 5ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 4: Peak - 1000 kHz
Segment: 10
Start Frequency: 1000 MHz
End Frequency: 5000 MHz
Band: Band 5
Detector: Peak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 1000 kHz
Step Size: 500 kHz
Dwell Time: 5ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

No Emissions were found in the 1000-5000MHz range within 20dB of the limit.

Test Mode	Detector	Frequency (MHz)		Worst-Case Orientation	Antenna Polarization	Frequencies (MHz)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		Start	Stop						
RX	Quasi-Peak	30	88	✓ Flat	✓ V	33.45	33.4	40	-6.6
RX	Quasi-Peak	30	88	✓ Flat	✓ V	42	28.18	40	-11.82
RX	Quasi-Peak	30	88	✓ Side	✓ V	54	28.22	40	-11.78
RX	Quasi-Peak	30	88	✓ Flat	✓ V	60	26.73	40	-13.27
RX	Quasi-Peak	30	88	✓ Flat	✓ V	66	22.32	40	-17.68
RX	Quasi-Peak	88	216	✓ Side	✓ V	89	28.07	43.5	-15.43
RX	Quasi-Peak	88	216	✓ End	✓ H	121	21.25	43.5	-22.25
RX	Quasi-Peak	216	1000	✓ End	✓ H	250	22.16	46	-23.84
RX	Quasi-Peak	216	1000	✓ End	✓ H	270	19.67	46	-26.33
RX	Quasi-Peak	216	1000	✓ Flat	✓ H	500	24.99	46	-21.01
RX	Quasi-Peak	216	1000	✓ Side	✓ V	576	25.61	46	-20.39
RX	Quasi-Peak	216	1000	✓ Flat	✓ H	730	25.8	46	-20.2
RX	Quasi-Peak	216	1000	✓ Flat	✓ V	778.45	26.99	46	-19.01
RX	Quasi-Peak	216	1000	✓ Flat	✓ H	826	29.93	46	-16.07