


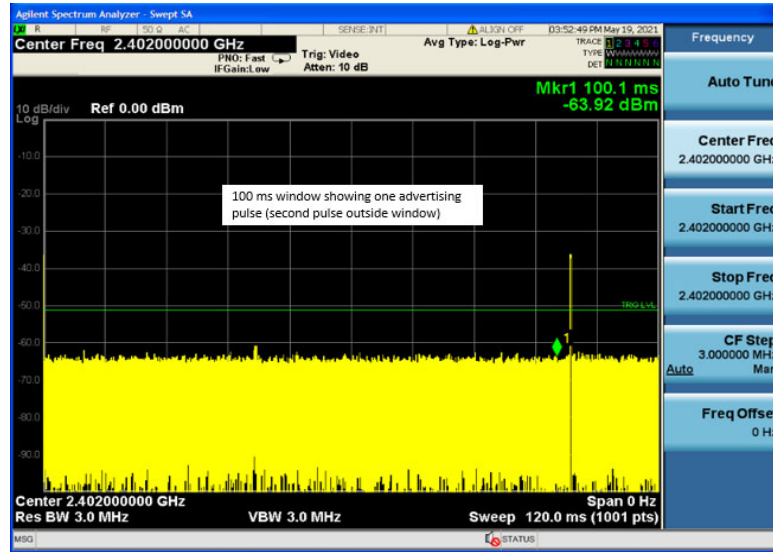
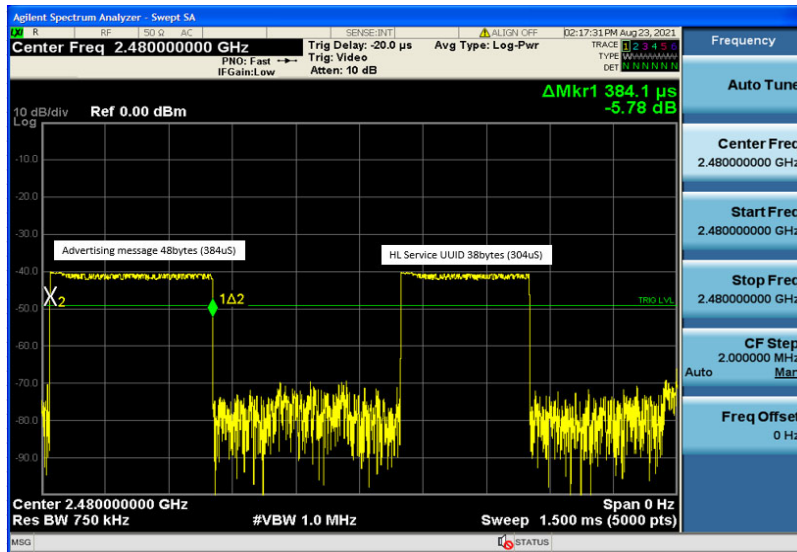
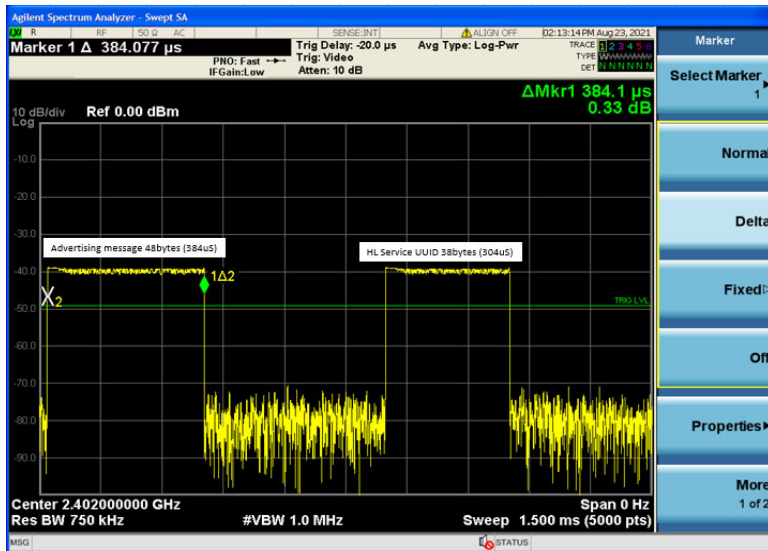


Advertising Data Exchange:

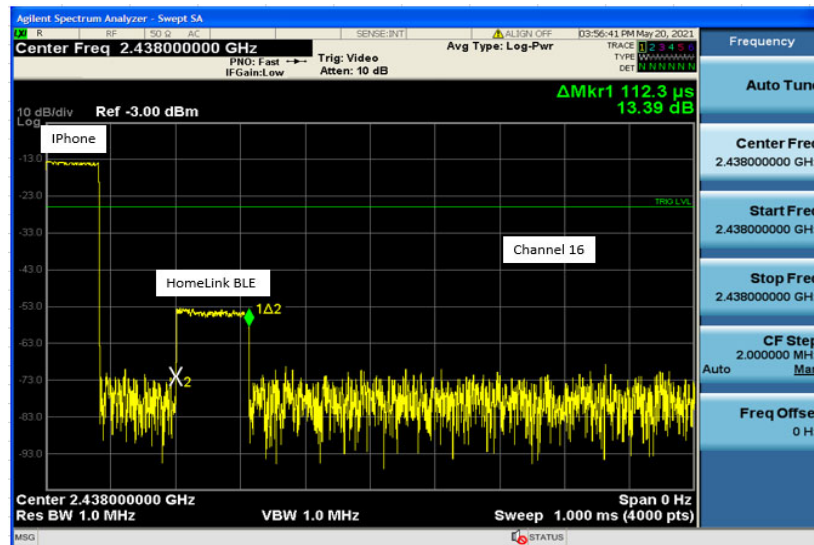

Connected Data Exchange:

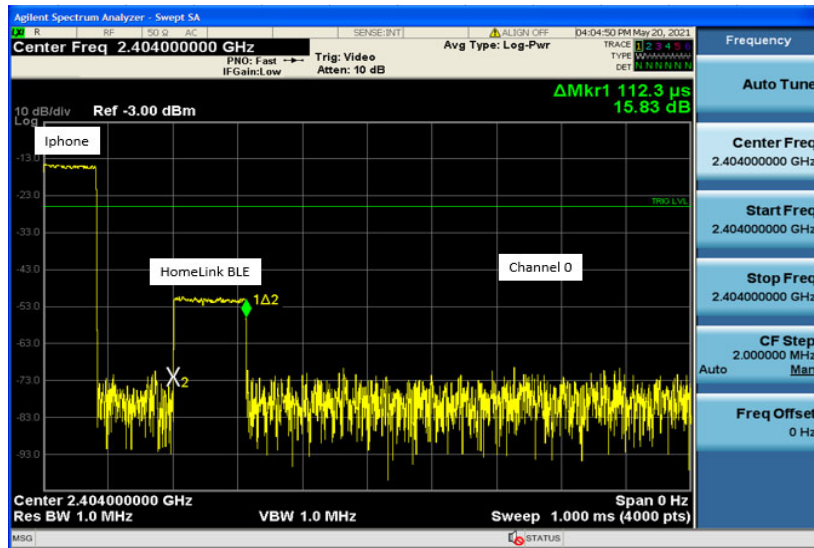

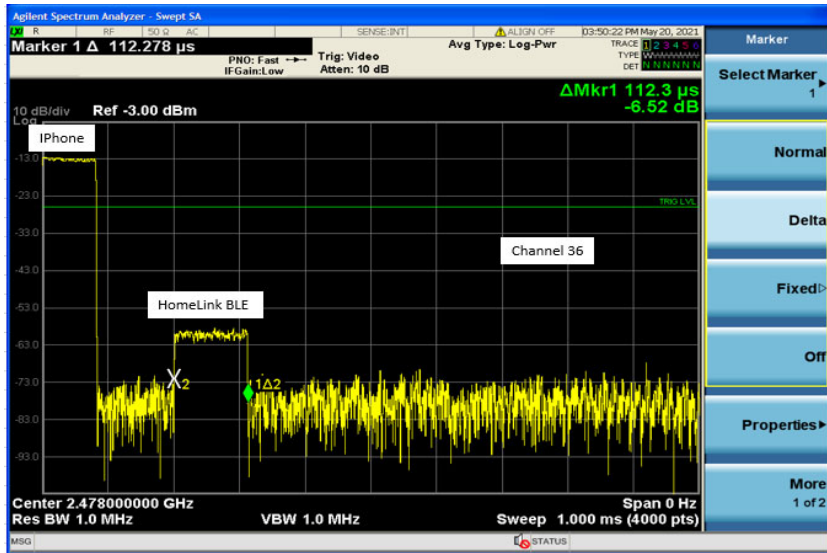

Duty Cycle Correction Calculation	DC Correction Value (dB)
<p><i>Screen shots of overhead messages only. Wost case calculated below.</i></p> <p>Worst Case Characteristic: 34 bytes = 272uS Shortest connection interval: 7.5ms All channels blocked but current (no hopping) $100\text{ms}/7.5\text{ms} * 272\text{us} = 3.6176\text{ms}$</p> <p>$\text{Log}(3.6176\text{mS}) * 20 =$</p>	<p align="center">-49</p>