



# EMC Measurement/Technical Report

on

## Motorola Bluetooth™ Phone Module II BTP2M100



**TTI-P-G 178/99**

Report Reference: 4\_Digi\_0602\_ERF\_FCCa

7 Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany

**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

Registergericht - registered in:  
Ratingen, HRB 3264  
Aufsichtsratsvorsitzende -  
Chairman of the Supervisory Board:  
Dr. Sabine Grobecker

Vorstand - Board of Directors:  
Dr. Wolfgang Dahm  
Dr. Hans-Jürgen Meckelburg

7 layers AG, Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
<http://www.7Layers.com>



## Table of Contents

<b>0. Summary</b>	<b>3</b>
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
<b>1. Administrative Data</b>	<b>6</b>
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
<b>2. Product Labeling</b>	<b>7</b>
2.1 FCC ID Label	7
2.2 Location of Label on the EUT	7
<b>3. Testobject Data</b>	<b>8</b>
3.1 General EUT Description	8
3.2 EUT Main Components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	9
3.5 Operating Modes	10
<b>4. Measurement Results</b>	<b>11</b>
4.1 Conducted Emissions	11
4.2 Occupied Bandwidth	13
4.3 Peak Power Output	16
4.4 Spurious RF Conducted Emissions	19
4.5 Spurious RF Radiated Emissions	21
4.6 Dwell Time	25
4.7 Power Density	27
4.8 Channel Separation	29
4.9 Processing Gain	30
<b>5. Testequipment</b>	<b>31</b>
<b>6. Foto Report</b>	<b>34</b>
<b>7. Setup Drawings</b>	<b>37</b>
<b>8. Annex</b>	<b>39</b>
Measurement plots	25 Pages



## 0 Summary

### 0.1 Technical Report Summary

#### Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum)

#### Applicable FCC Rules:

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 (10-1-98 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification Sections

Part 15, Subpart C - Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz  
and 5725-5850 MHz

#### Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

#### Summary Test Results:

**The equipment under test fulfilled the requirements of the applied FCC rules.**



## 0.2 Measurement Summary

<b>FCC Part 15, Subpart C</b>		<b>§ 15.207</b>	
<b>Conducted Emissions (AC Power Line)</b>			
The measurement was performed according to	ANSI C63.4		1992
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 2	setup 1	AC port	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (a) (1) (ii)</b>	
<b>Occupied Bandwidth</b>			
The measurement was performed according to	ANSI C63.4		1992
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (b) (1)</b>	
<b>Peak Power Output</b>			
The measurement was performed according to	FCC §15.31		10-1-1998
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (c)</b>	
<b>Spurious RF Conducted Emissions</b>			
The measurement was performed according to	FCC §15.31		10-1-1998
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (c), §15.35 (b), § 15.209</b>	
<b>Spurious Radiated Emissions</b>			
The measurement was performed according to	ANSI C63.4		1992
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 2	enclosure	passed
op-mode 2	setup 2	enclosure	passed
op-mode 3	setup 2	enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (g)</b>	



---

**Dwell Time**

The measurement was performed according to FCC §15.31

10-1-1998

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

---

**FCC Part 15, Subpart C**

---

**§ 15.247 (g)****Power Density**

The measurement was performed according to FCC §15.31

10-1-1998

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

---

**FCC Part 15, Subpart C**

---

**§ 15.247 (a) (1)****Channel Separation**

The measurement was performed according to FCC §15.31

10-1-1998

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 6	setup 1	temporary antenna connector	passed

---

**FCC Part 15, Subpart C**

---

**§ 15.247 (f)****Processing Gain**

The measurement was performed according to FCC §15.31

10-1-1998

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
see annex	see annex	temporary antenna connector	passed

Responsible for  
Accreditation Scope: \_\_\_\_\_

Responsible  
for Test Report: \_\_\_\_\_



## 1. Administrative Data

### 1.1 Testing Laboratory

Company Name: 7 Layers AG  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted in a letter dated February 07, 2000 under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat DAR-Registration no. TTI-P-G 178/99

Responsible for Accreditation Scope: Dipl.-Ing Bernhard Retka  
Dipl.-Ing Arndt Stöcker

### 1.2 Project Data

Responsible for testing and report Dipl. Ing. Thomas Hoell  
Receipt of EUT: 04.07.02  
Date of Test(s): 04.-05.07.02  
Date of Report: 08.07.02

### 1.3 Applicant Data

Company Name: Digianswer A/S  
Address: Skalhuse 5  
  
DK-9240 Nibe  
Denmark  
Contact Person: Tom Ringtved

### 1.4 Manufacturer Data

Company Name: please see Applicant data  
Address:

Contact Person:



## **2.0 Product Labeling**

### **2.1 FCC ID Label:**

At the time of the test report there was no FCC label available.

### **2.2 Location of Label on the EUT:**

see above

### 3. Testobject Data

#### 3.1 General EUT Description

<b>Equipment under Test:</b>	Motorola Bluetooth™ Phone Module II
<b>Type Designation:</b>	BTP2M100
<b>Kind of Device: (optional)</b>	Bluetooth transceiver
<b>Voltage Type:</b>	DC
<b>Voltage level:</b>	3,6 V

#### General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1MHz apart are defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is devided into time slots, with a nominal slot length of 625µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 30 second period.

The symbol rate on the channel is 1 Ms/s.

#### The EUT provides the following ports:

##### Ports

AC port  
temporary antenna connector  
Enclosure

**The main components of EUT are listed and described in Chapter 3.2**



### 3.2 EUT Main components:

#### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A	Bluetooth Phone Module II	BTP2M100	EUT code 34080a01	80000455000R 07	1.00	04.07.2002
EUT A is equipped with an internal antenna.						
EUT B	Bluetooth Phone Module II	BTP2M100	EUT code 34080b01	80000455000R 07	1.00	04.07.2002
EUT B is equipped with a temporary antenna connector.						

**NOTE: The short description is used to simplify the identification of the EUT in this test report**

### 3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But never the less Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial No.	FCC Id
AE 2	AC Charger	Motorola PSM 4716a	-	-	-	-
AE 1	GSM Mobile Phone	Motorola 280i	-	-	-	-

### 3.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
setup 1	EUT B	used for conducted RF measurements
setup 2	EUT A	used for radiated RF measurements
setup 3	EUT A + AE 1 + AE 2	used for conducted emission test on the AC mains



### 3.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	TX mode, the EUT transmits continuously on 2402 MHz	
op-mode 2	TX mode, the EUT transmits continuously on 2441 MHz	
op-mode 3	TX mode, the EUT transmits continuously on 2480 MHz	
op-mode 4	inquiry	
op-mode 5	paging	
op-mode 6	10 neighbouring channels	The EUT is set to transmit on ten neighbouring channels one after the other to see the channel separation.
see annex	see annex	setup for processing gain test

## 4. Test Results

### 4.1 Conducted Emissions (AC Power Line)

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

#### 4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration.

The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 450 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 10 kHz
- Measuring time / Frequency step: 1 ms
- Measurement on phase + neutral lines of the power cords

Intention of this step is, to determine the conducted EMI-profile of the EUT. With this data, the test system performs ( to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 6 dB
- Maximum number of final measurements: 6

#### Step 2: Final measurement

With the frequencies determined in step 1, the final measurement will be performed.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1s / frequency

At the final test the cable were and moved within the range of positions likely to find their maximum emission.

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.



#### 4.1.2 Test Limits

FCC Part 15, Subpart C, §15.207  
Frequency Range (MHz): Class B Limit (dB $\mu$ V)  
0.45 – 30 48

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V)

#### 4.1.3 Test Protocol

Temperature: 23 °C  
Air Pressure: 1000 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter	
op-mode 2	setup 1	AC port		
Powerline	Frequency MHz	Measured Value dB $\mu$ V	Delta to Limit dB $\mu$ V	Remarks
	1,14	40,10	-7,90	
L1	1,01	38,40	-9,60	
N	0,53	44,20	-3,80	
N	0,65	43,00	-5,00	
N	0,80	41,00	-7,00	

Remark: none

#### 4.1.4 Test result: Conducted Emissions (AC Power Line)

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 2	setup 1	AC port	passed

## 4.2 Occupied Bandwidth

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

### 4.2.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.2.2 Test Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (ii)  
(1) Frequency hopping systems operating in the 2400 - 2483.5 MHz band should use at least 75 hopping frequencies.  
(2) The average time of occupancy on any frequency should not be greater than 0.4 seconds within a 30 second period.  
(3) The maximum 20 dB bandwidth of the hopping channel is 1MHz.

### 4.2.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	
<b>20 dB Bandwidth MHz</b>		<b>Remarks</b>	
0,718		none	

Remark: Please see annex for the measurement plot.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
0,717			none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
0,722			none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
0,5			none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
0,516			none

Remark: Please see annex for the measurement plot.



#### 4.2.4 Test result: Occupied Bandwidth

FCC Part 15, Subpart C		Op. Mode	Setup	Port	Result
op-mode 1	setup 1	temporary antenna connector			<b>passed</b>
op-mode 2	setup 1	temporary antenna connector			<b>passed</b>
op-mode 3	setup 1	temporary antenna connector			<b>passed</b>
op-mode 4	setup 1	temporary antenna connector			<b>passed</b>
op-mode 5	setup 1	temporary antenna connector			<b>passed</b>

#### 4.3 Peak Power Output

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

##### 4.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

##### 4.3.2 Test Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(1) For frequency hopping systems operating in the band 2400 - 2483,5 MHz or 5725 - 5850 MHz and for all direct sequence systems: 1 Watt

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

##### 4.3.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	
Output Power dBm		Remarks	
-2,59		The EIRP including antenna gain (3.51 dBi) is 0,92 dBm	

Remark: Please see annex for the measurement plot.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	
<b>Output Power dBm</b>		<b>Remarks</b>	
-2,95		The EIRP including antenna gain (3.51 dBi) is 0,56 dBm	

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	
<b>Output Power dBm</b>		<b>Remarks</b>	
-2,08		The EIRP including antenna gain (3.51 dBi) is 1,43 dBm	

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	
<b>Output Power dBm</b>		<b>Remarks</b>	
-3,6		The EIRP including antenna gain (3,51 dBi) and cable attenuation (-1,4 dB) is -1,58 dBm	

Remark: Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	
<b>Output Power dBm</b>		<b>Remarks</b>	
-3,55		The EIRP including antenna gain (3,51 dBi) and cable attenuation (-1,4 dB) is -1,44 dBm	

Remark: Please see annex for the measurement plot.



#### 4.3 .4 Test result: Peak Power Output

FCC Part 15, Subpart C		Op. Mode	Setup	Port	Result
op-mode 1	setup 1	temporary antenna connector			<b>passed</b>
op-mode 2	setup 1	temporary antenna connector			<b>passed</b>
op-mode 3	setup 1	temporary antenna connector			<b>passed</b>
op-mode 4	setup 1	temporary antenna connector			<b>passed</b>
op-mode 5	setup 1	temporary antenna connector			<b>passed</b>



#### 4.4 Spurious RF Conducted Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

##### 4.4.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

##### 4.4.2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

##### 4.4.3 Test Protocol

Temperature: 25 °C

Air Pressure: 1015 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 1	setup 1	temporary antenna connector				
Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
6935,50			-61,55	-2,85	-22,85	38,70

Remark: No further spurious emissions were found. Please see annex for the measurement plot.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 2	setup 1	temporary antenna connector				
Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
6585,30			-61,82	-2,97	-22,97	38,85

Remark: No further spurious emissions were found. Please see annex for the measurement plot.

Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 3	setup 1	temporary antenna connector				
Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
6935,50			-60,80	-3,06	-23,06	37,74

Remark: No further spurious emissions were found. Please see annex for the measurement plot.

#### 4.4 .4 Test result: Spurious RF Conducted Emissions

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result	
				passed	failed
	op-mode 1	setup 1	temporary antenna connector	passed	
	op-mode 2	setup 1	temporary antenna connector	passed	
	op-mode 3	setup 1	temporary antenna connector	passed	

## 4.5 Spurious Radiated Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

### 4.5.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at an EUT to receiving antenna distance of 3m.

The radiated emissions measurements was made in a typical installation configuration.

The measurement procedure consists of four steps. It is implemented into EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 90°
- Height variation range: 1 – 3m
- Height variation stepsize: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. With this data, the test system performs ( to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 10 dB
- Maximum number of final measurements: 12

#### Step 2:

With the frequencies determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

#### Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 45°
- Height variation range: 1 – 4m
- Height variation stepsize: 0,5m

- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0,5m

### Step 3:

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 3, will be adjusted.

The turntable azimuth will be slowly varied by +/- 22,5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

### Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22,5° to + 22,5 ° around the value determined in step 2
- Height variation range: -0,25m to + 0,25m around the value determined in step 2

### Step 4:

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1s

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (invers linear-distance for field strength measurements, invers linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Detector: Peak, Average

RBW = VBW = 1 MHz, above 7 GHz 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### 4.5.2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

(2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).

(3)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dB $\mu$ V/m)

30 – 88	40,0
88 – 216	43,5
216 – 960	46,0
above 960	54,0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

#### 4.5.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 1	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dB $\mu$ V/m			Limit QP/AV dB $\mu$ V/m	Limit Peak dB $\mu$ V/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	2390,00		54,27	34,81	54,00	74,00	19,19	19,73

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter				
op-mode 2	setup 2	enclosure					

Remark: No spurious emission in the range 20 dB below the limit found.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 3	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dB $\mu$ V/m			Limit QP/AV dB $\mu$ V/m	Limit Peak dB $\mu$ V/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Horizontal	2483,50		58,31	35,13	54,00	74,00	18,87	15,69

Remark: No further spurious emission in the range 20 dB below the limit found.

#### 4.5 .4 Test result: Spurious Radiated Emissions

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 1	setup 2	enclosure	<b>passed</b>
	op-mode 2	setup 2	enclosure	<b>passed</b>
	op-mode 3	setup 2	enclosure	<b>passed</b>



## 4.6 Dwell Time

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.6.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

To determine the dwell time, 3 single measurements are necessary.  
The first plot shows the activity for a complete inquiry/paging on one channel.  
The second plot shows the repetition rate on one channel, and the third plot shows the duration of the burst used in inquiry/paging.

With these 3 single values the dwell time of the channel can be calculated.

### 4.6.2 Test Limits

FCC Part 15, Subpart C, §15.247 (f)

The dwell time of the channel shall be less than 400 ms in a 30 s period

### 4.6.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	
Dwell time ms		Remarks	
62,63		((2,55s+2,55s)/10ms)*122,8μs	

Remark: Please see annex for the measurement plot.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	
Dwell time ms		Remarks	
32,03		((1,29s+1,26s)/10ms)*125,6µs	

Remark: Please see annex for the measurement plot.

#### 4.6 .4 Test result: Dwell Time

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed

#### 4.7 Power Density

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

##### 4.7.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

The Analyser settings are according 15.247 (d):

- Detector: Peak-Maxhold
- Span: 2 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 3 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

##### 4.7.2 Test Limits

FCC Part 15, Subpart C, §15.247 (d)

The power density shall be below 8 dBm measured with a resolution bandwidth of 3 kHz.

##### 4.7.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	
Power Density dBm/3 kHz		Remarks	
-12,73		measured value: -14,13 dBm, cable attenuation: 1,4 dB	

Remark: Please see annex for the measurement plot.



Temperature: 25 °C  
Air Pressure: 970 hPa  
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	
Power Density dBm/3 kHz		Remarks	
-9,14		measured value: -10,54 dBm, cable attenuation: 1,4 dB	

Remark: Please see annex for the measurement plot.

#### 4.7.4 Test result: Power Density

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed



## 4.8 Channel Separation

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.8.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Span: 10 MHz
- Resolution Bandwidth (RBW): 300 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.8.2 Test Limits

FCC Part 15, Subpart C, § 15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 4.8.3 Test Protocol

Temperature: 25 °C

Air Pressure: 970 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 6	setup 1	temporary antenna connector	
Channel Separation MHz		Remarks	
1		none	

Remark: Please see annex for the measurement plot.

### 4.8 .4 Test result: Channel Separation

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 6	setup 1	temporary antenna connector	passed



## 4. 9 Processing Gain

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.9.1 Test Description

See additional test report.

### 4.9.2 Test Limits

FCC Part 15, Subpart C, §15.247 (f)

The processing gain shall be greater than 17 dB.

### 4.9.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1000 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
see annex	see annex	temporary antenna connector	
Processing gain dB		Remarks	
23		please see annex for the documentation	

Remark: none

### 4.9 .4 Test result: Processing Gain

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	see annex	see annex	temporary antenna connector	passed

## 5. Testequipment

### Rohde & Schwarz TS8960

### Bluetooth RF Conformance Test System

Equipment	Type	Serial No.	Manufacturer
10MHz Reference	MFS	5489/001	Efratom
Laserprinter	Laserjet 2100	FRFJ023447	HP
Monitor 19"	Flexscan T68	50565029 -ED	EIZO
Power Meter	NRVD	832025/059	Rohde & Schwarz
Power Sensor	NRV-Z1	832279/015	Rohde & Schwarz
Power Sensor	NRV-Z1	832279/013	Rohde & Schwarz
Power Supply	E3632A	MY40003776	Agilent
Power Supply	PS-2403D	-	Conrad
RF Step Attenuator	RSP	833695/001	Rohde & Schwarz
Rubidium Frequency Normal	MFS	002	Efratom
Signal Analyser	FSIQ26	832695/007	Rohde & Schwarz
Signal Analyser	FSP30	100051	Rohde & Schwarz
Signal Generator	SMIQ03B	832870/017	Rohde & Schwarz
Signal Generator	SMIQ03B	834344/002	Rohde & Schwarz
Signal Generator	SMP 03	833680/003	Rohde & Schwarz
Signal Switching and Conditioning Unit	SSCU	338826/005	Rohde & Schwarz
Signalling Unit	PTW60 for TS8960	838312/014	Rohde & Schwarz
System Controller	PSM12	829323/008	Rohde & Schwarz

### EMI Test System

Equipment	Type	Serial No.	Manufacturer
Comparison Noise Emitter	CNE III	99/016	York
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Signal Generator	SMR 20	846834/008	Rohde & Schwarz



## *EMI Radiated Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42-5A	619368	Miteq
Cable "ESI to EMI Antenna"	RTK081+AirCell7	W18.01+W38.01a	Huber+Suhner
Cable "ESI to Horn Antenna"	RTK 081	W18.04+3599/001	Rosenberger
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
KUEP pre amplifier	Kuep 00304000	001	7layers
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Pyramidal Horn Antenna 26,5 GHz	Model 3160-09	9910-1184	EMCO

## *EMI Conducted Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz

## *Auxiliary Test Equipment*


<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Notch Filter ultra stable	WRCA800/960-6EEK	24	Wainwright
Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz
Temperature Chamber	KWP 120/70	59226012190010	Weiss
Temperature Chamber	VT 4002	58566002150010	Vötsch
ThermoHygro_01	430202		Fischer




## Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer
Air Compressor (pneumatic)			Atlas Copco
Controller	HD 100	100/603	HD GmbH H. Deisel
EMC Camera	CE-CAM/1		CE-SYS
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter telephone systems / modem	B84312-C40-B1		Siemens&Matsushita
Filter Universal 1A	B84312-C30-H3		Siemens&Matsushita
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia
Turntable	DS 420S	420/573/99	HD GmbH, H. Deisel
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H. Deisel


## 6. Foto Report

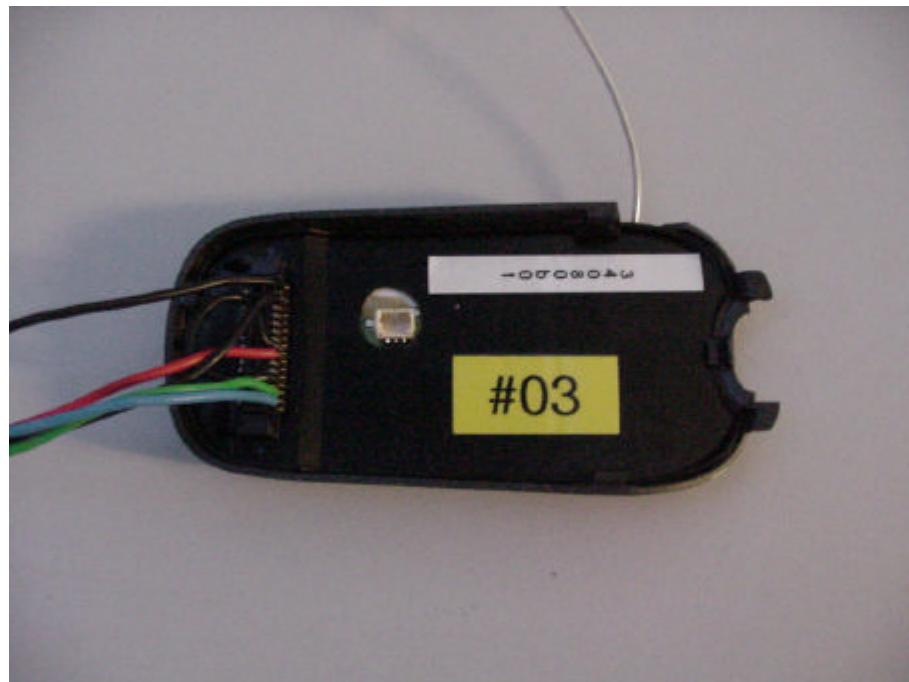


Picture 1 : EUT front side

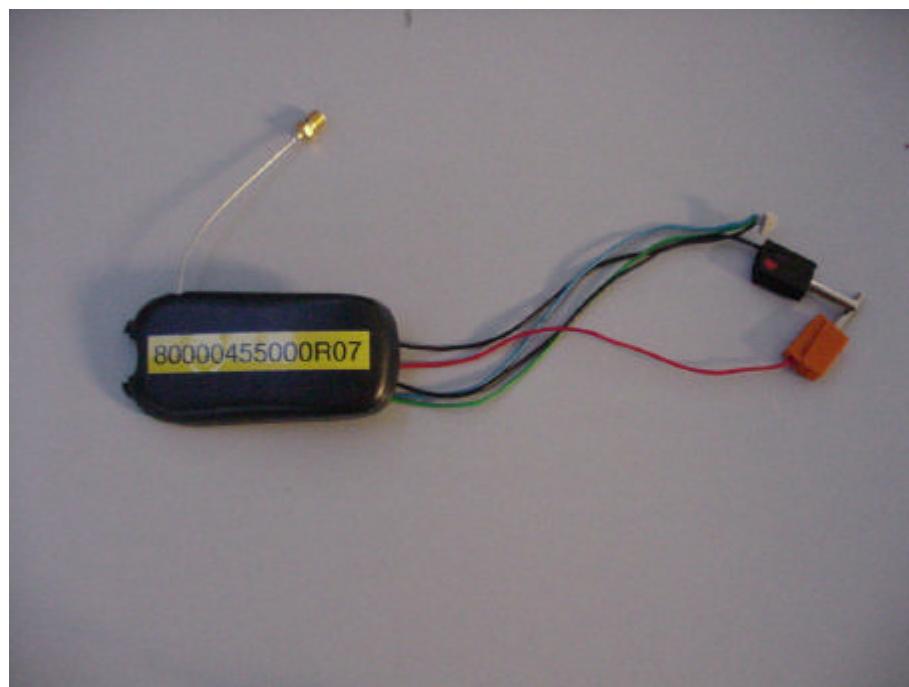

Picture 2 : EUT rear side

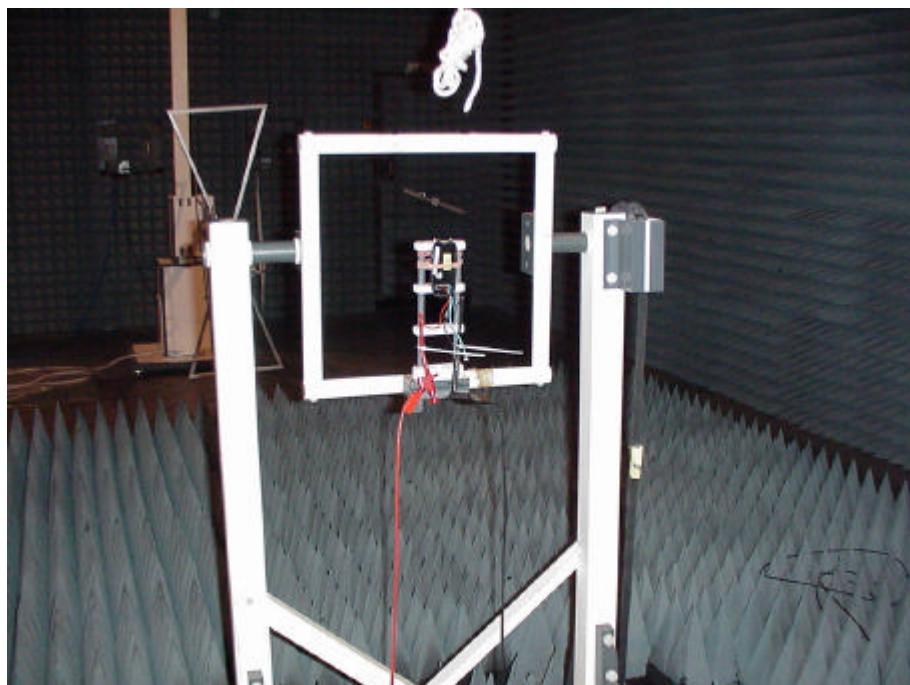

**Picture 3 : Setup for radiated tests**

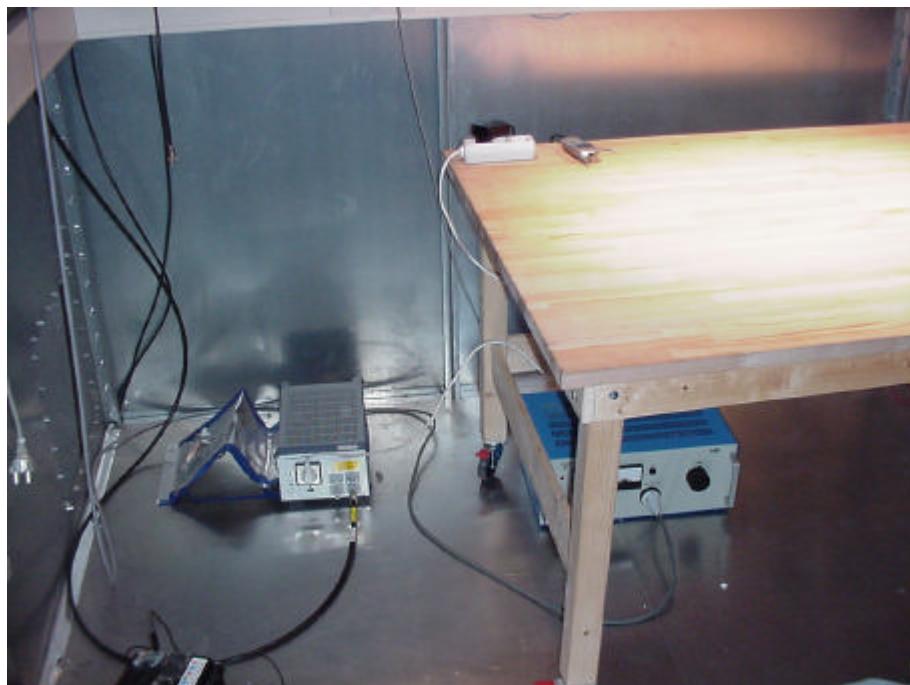


**Picture 4 : Setup for conducted emission test on the AC mains**




**Picture 5** : Setup for conducted emission test on the AC mains (rear view)  
EUT connected to the Motorola mobile phone.

## 7. Setup Drawings

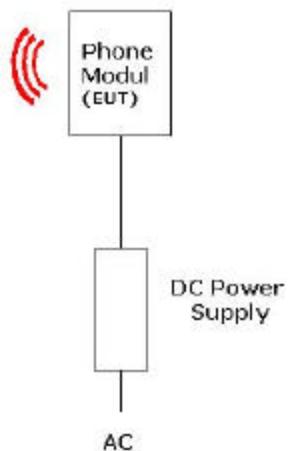

**Drawing 1 : Setup for radiated tests**

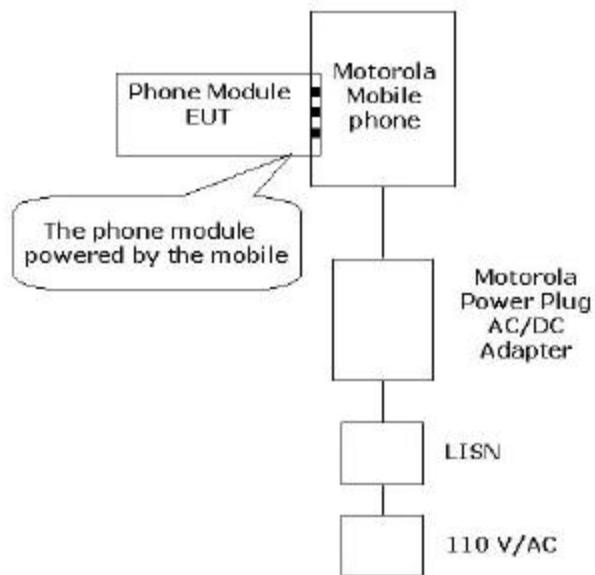

**Drawing 2 : Setup for conducted emission tests on the AC mains**

## 8. Annex

### Measurement plots

#### Occupied Bandwidth

##### Op. Mode


op-mode 1 TX mode, the EUT transmits continuously  
on 2402 MHz

##### Setup

setup 1

##### Port

temporary  
antenna  
connector

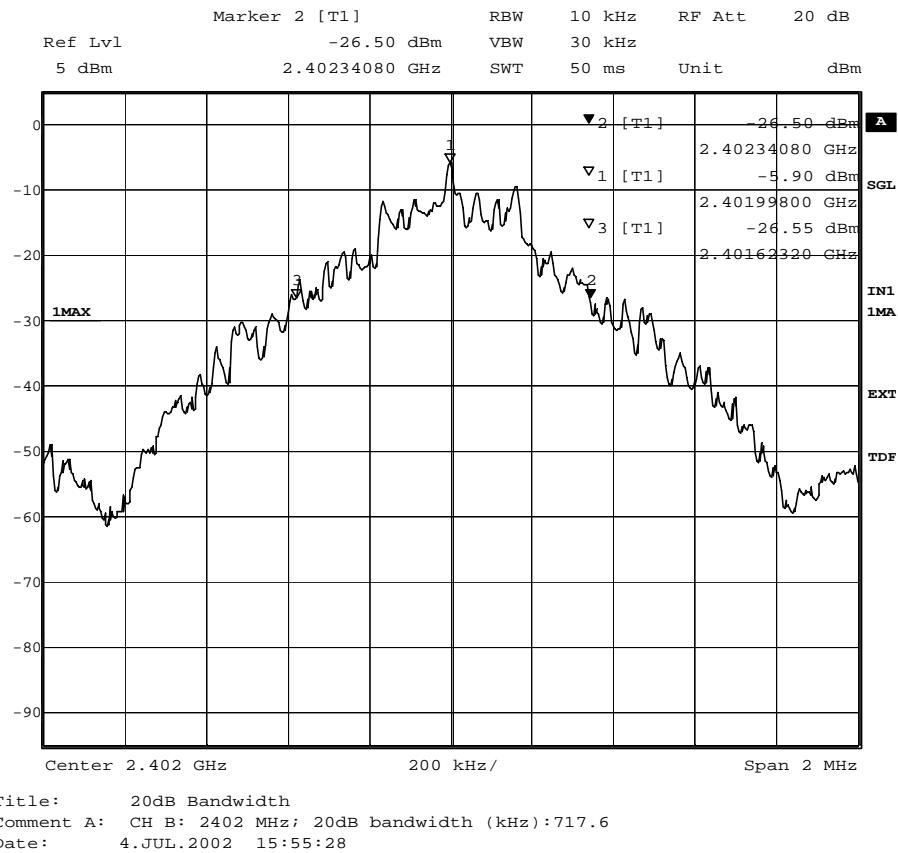

#### Occupied Bandwidth

## Occupied Bandwidth

### Op. Mode


op-mode 2 TX mode, the EUT transmits continuously  
on 2441 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

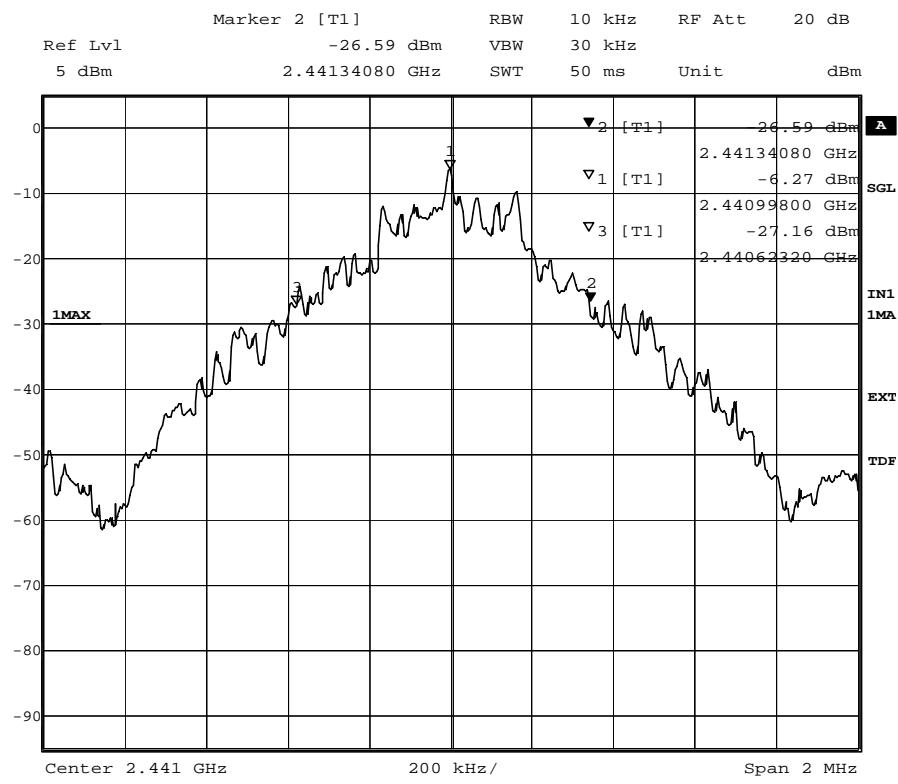

Title: 20dB Bandwidth  
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):717.6  
 Date: 4.JUL.2002 16:29:08

## Occupied Bandwidth

## Occupied Bandwidth

### Op. Mode


op-mode 3 TX mode, the EUT transmits continuously  
on 2480 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

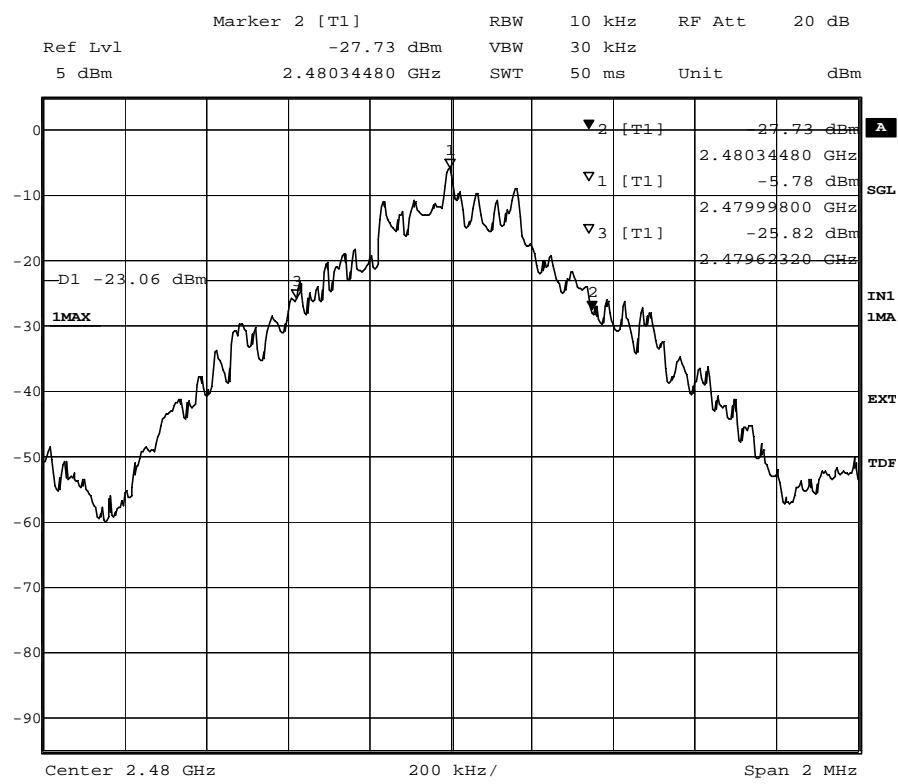

Title: 20dB Bandwidth  
Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):721.6  
Date: 4.JUL.2002 16:51:45

## Occupied Bandwidth

## Occupied Bandwidth

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

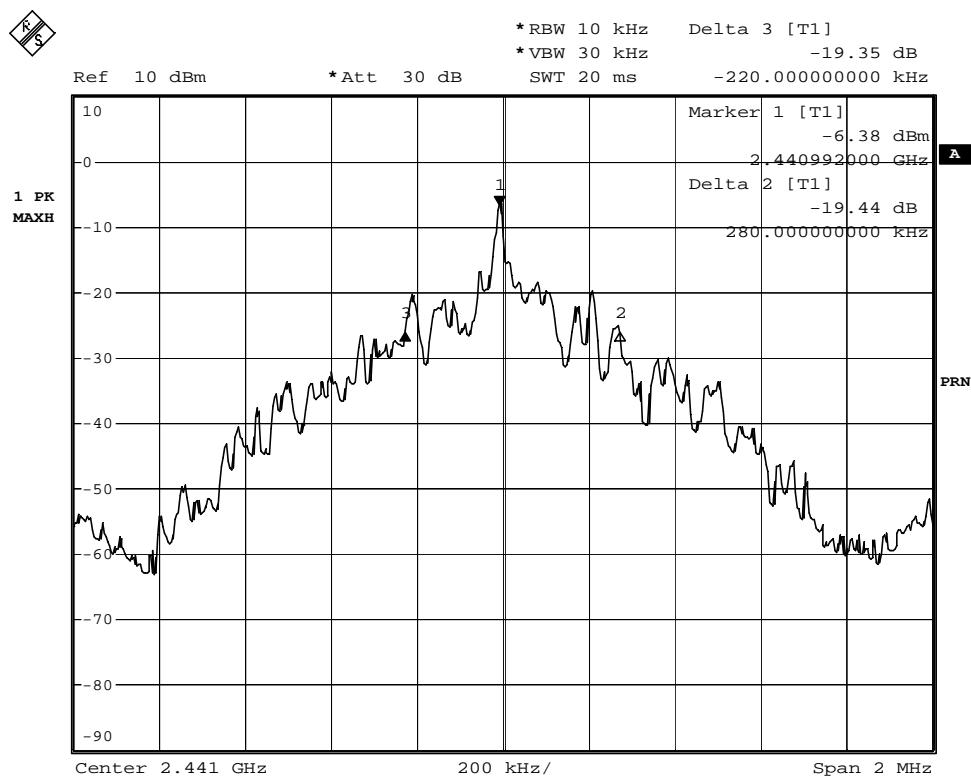

Date: 4.JUL.2002 11:39:18

## Occupied Bandwidth

## Occupied Bandwidth

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

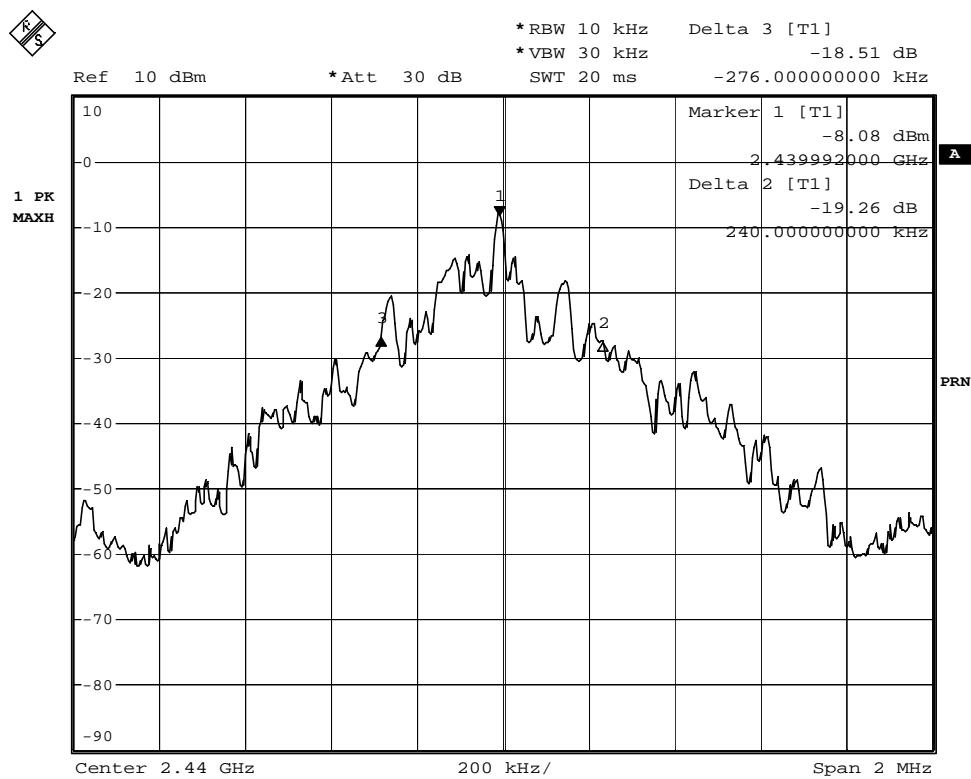

Date: 4.JUL.2002 11:41:39

## Occupied Bandwidth

## Peak Power Output

### Op. Mode


op-mode 1 TX mode, the EUT transmits continuously  
on 2402 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

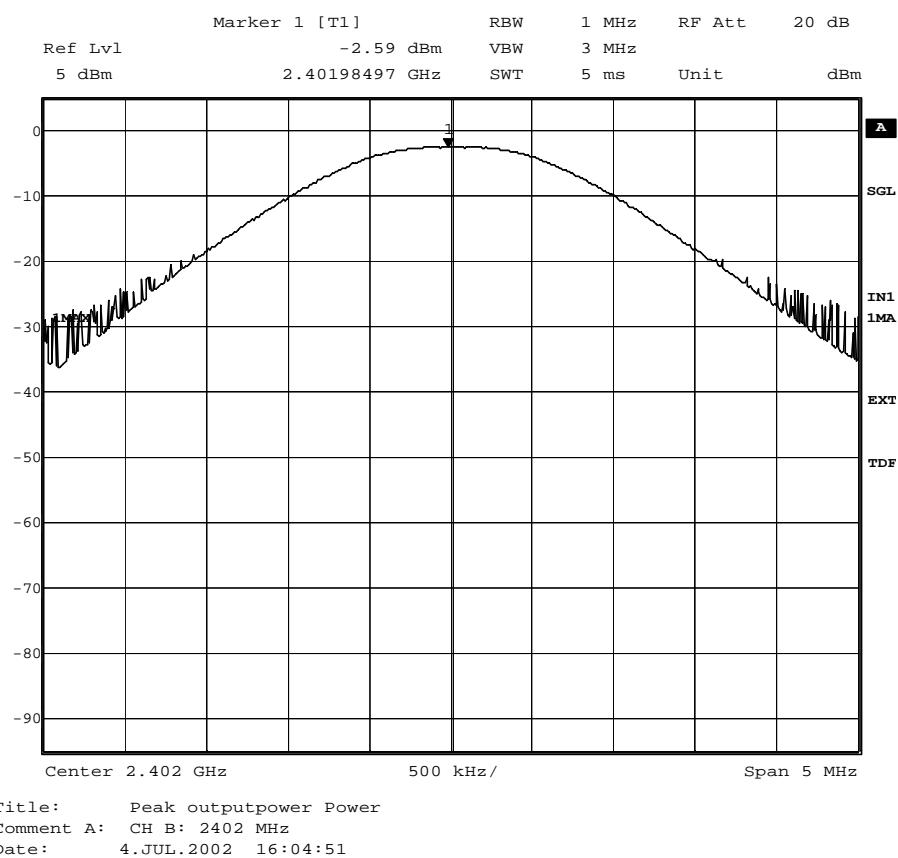

## Peak Power Output

## Peak Power Output

### Op. Mode


op-mode 2 TX mode, the EUT transmits continuously  
on 2441 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

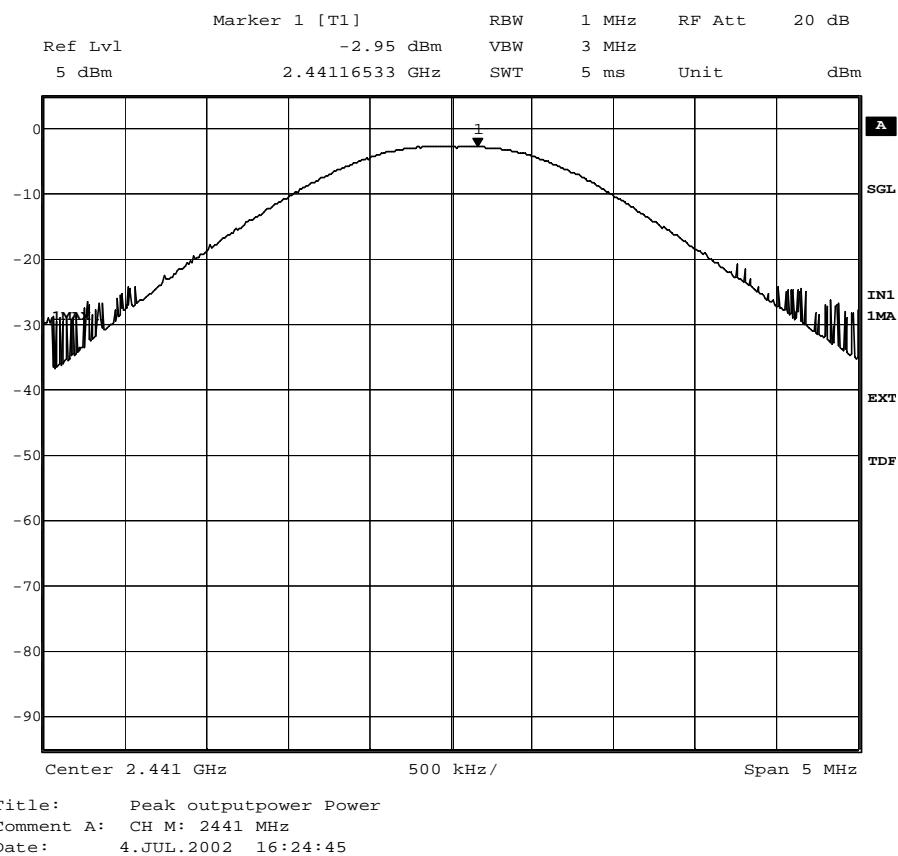

## Peak Power Output

## Peak Power Output

### Op. Mode


op-mode 3 TX mode, the EUT transmits continuously  
on 2480 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

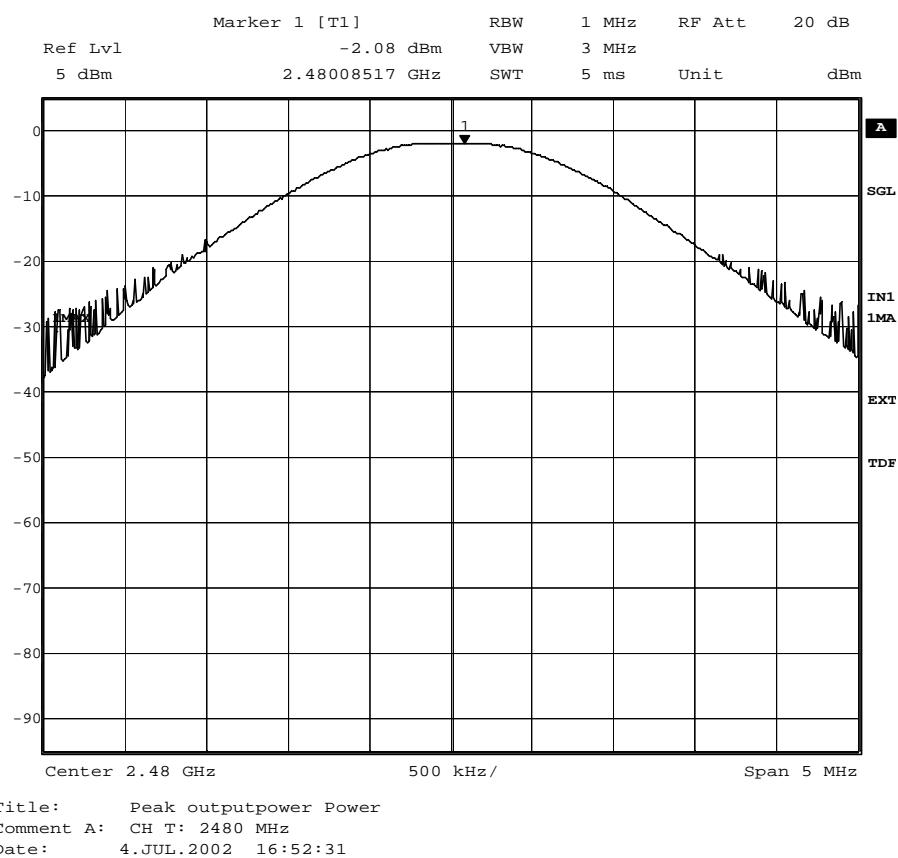

## Peak Power Output

## Peak Power Output

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

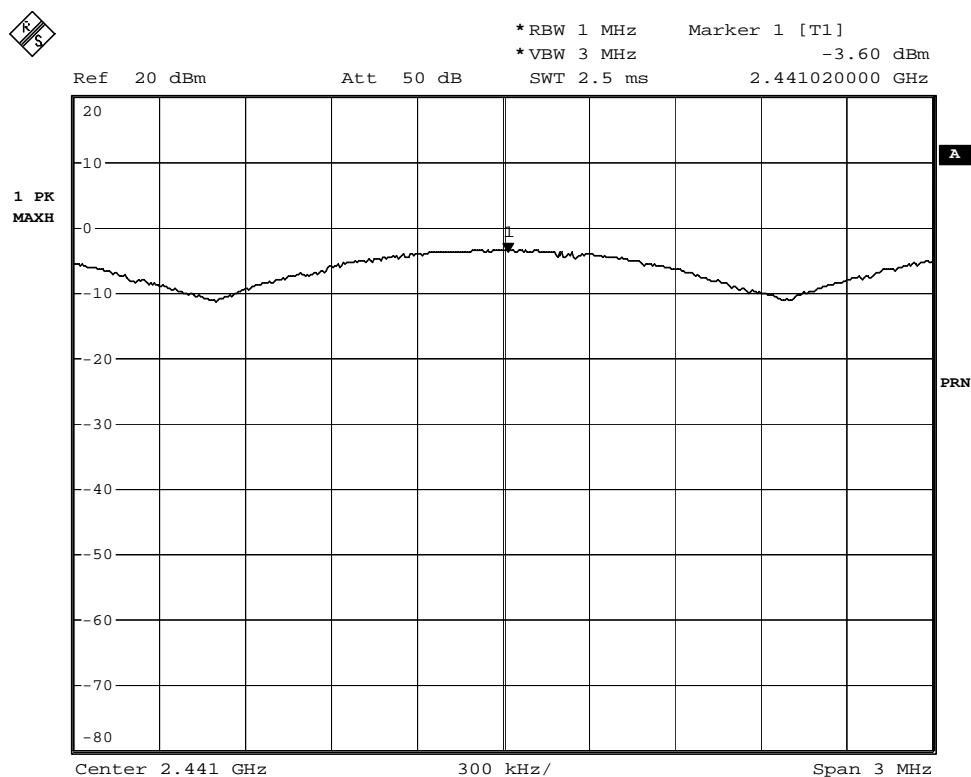

Date: 4.JUL.2002 11:24:12

## Peak Power Output

## Peak Power Output

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

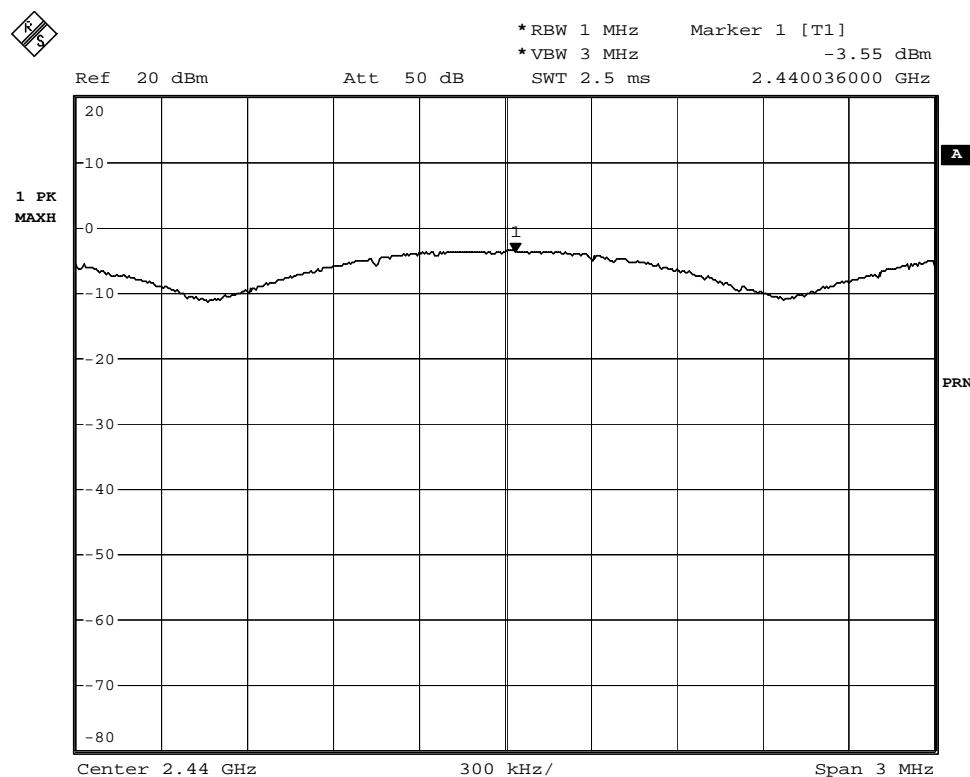

Date: 4.JUL.2002 11:25:46

## Peak Power Output

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 1 TX mode, the EUT transmits continuously  
on 2402 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

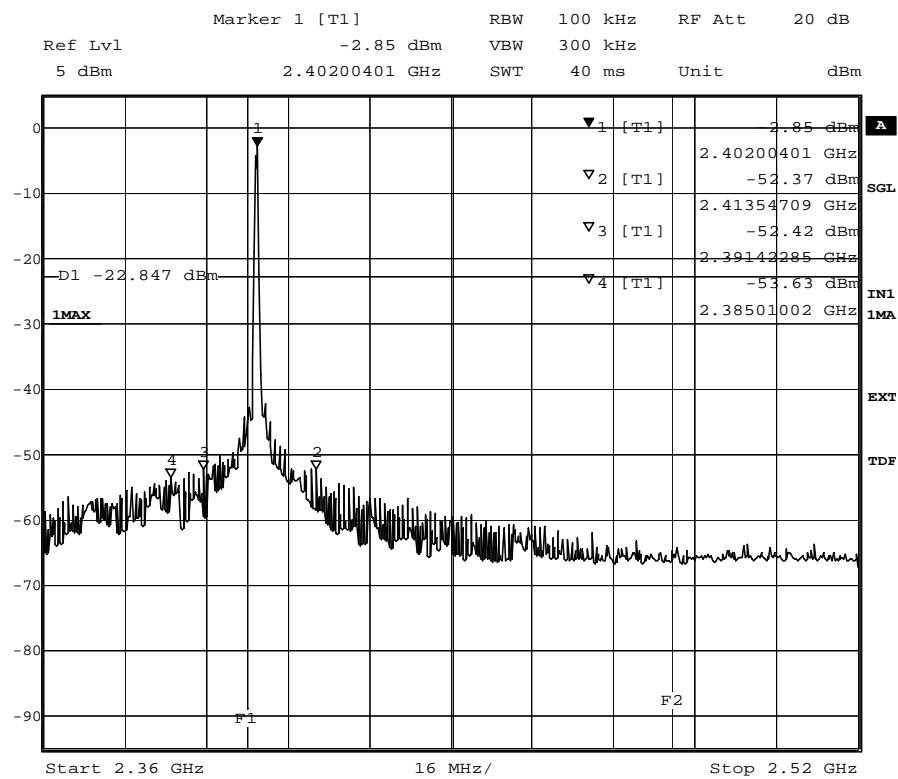

Title: Band Edge Compliance  
Comment A: CH B: 2402 MHz  
Date: 4.JUL.2002 15:39:35

band edge compliance

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 1 TX mode, the EUT transmits continuously  
on 2402 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

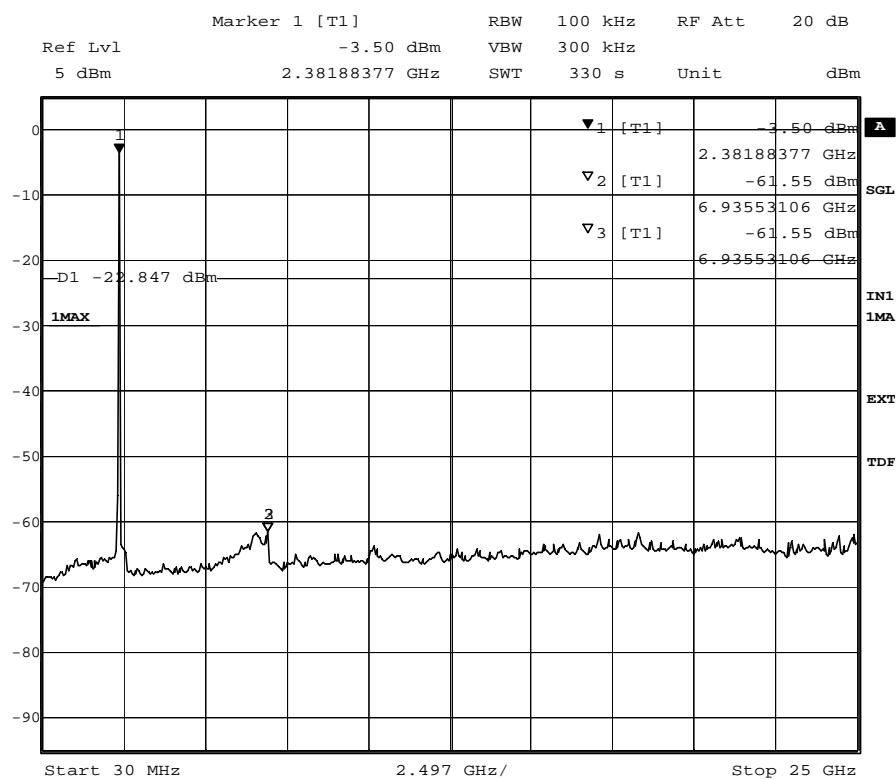

Title: spurious emissions  
Comment A: CH B: 2402 MHz  
Date: 4.JUL.2002 15:51:23

**spurious emissions conducted**

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 2 TX mode, the EUT transmits continuously  
on 2441 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

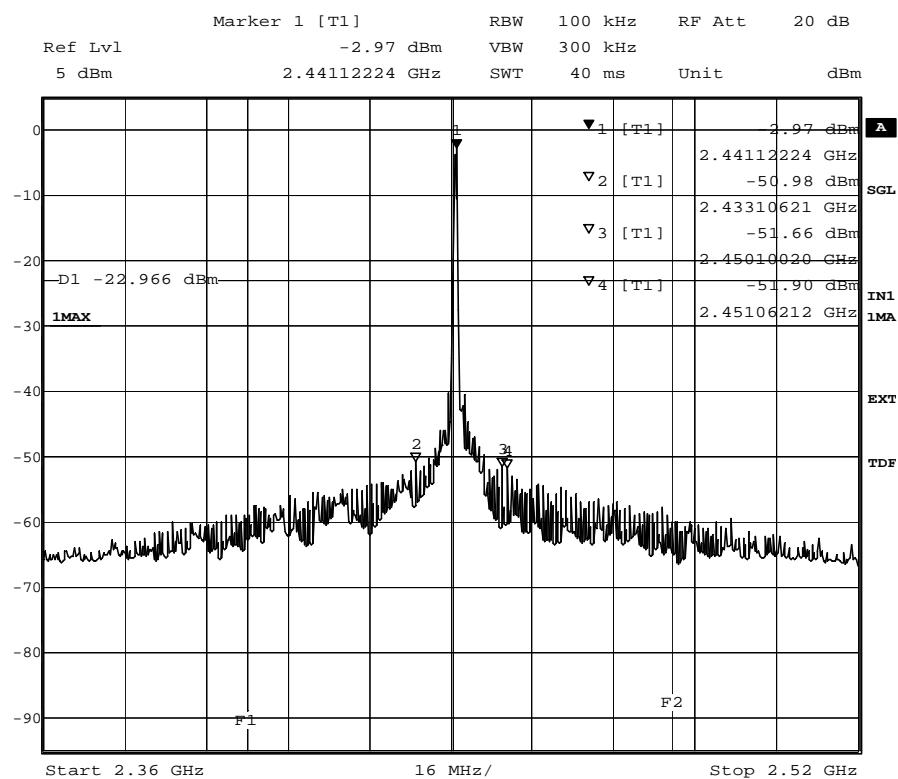

Title: Band Edge Compliance  
Comment A: CH M: 2441 MHz  
Date: 4.JUL.2002 16:07:45

band edge compliance

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 2 TX mode, the EUT transmits continuously  
on 2441 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

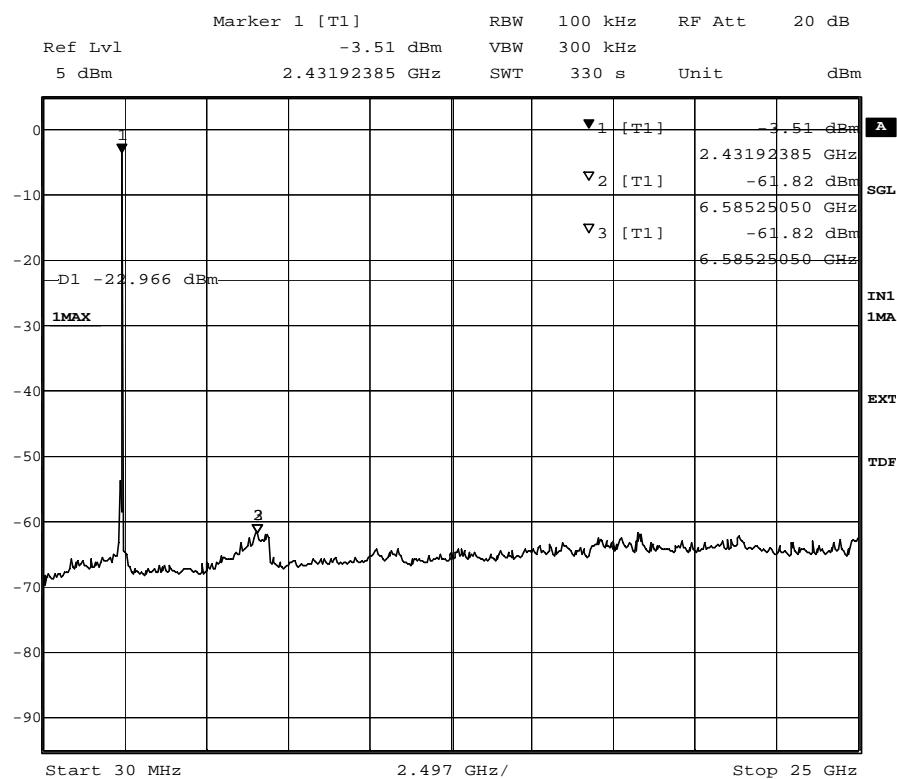

Title: spurious emissions  
 Comment A: CH M: 2441 MHz  
 Date: 4.JUL.2002 16:19:37

**spurious emissions conducted**

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 3 TX mode, the EUT transmits continuously  
on 2480 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

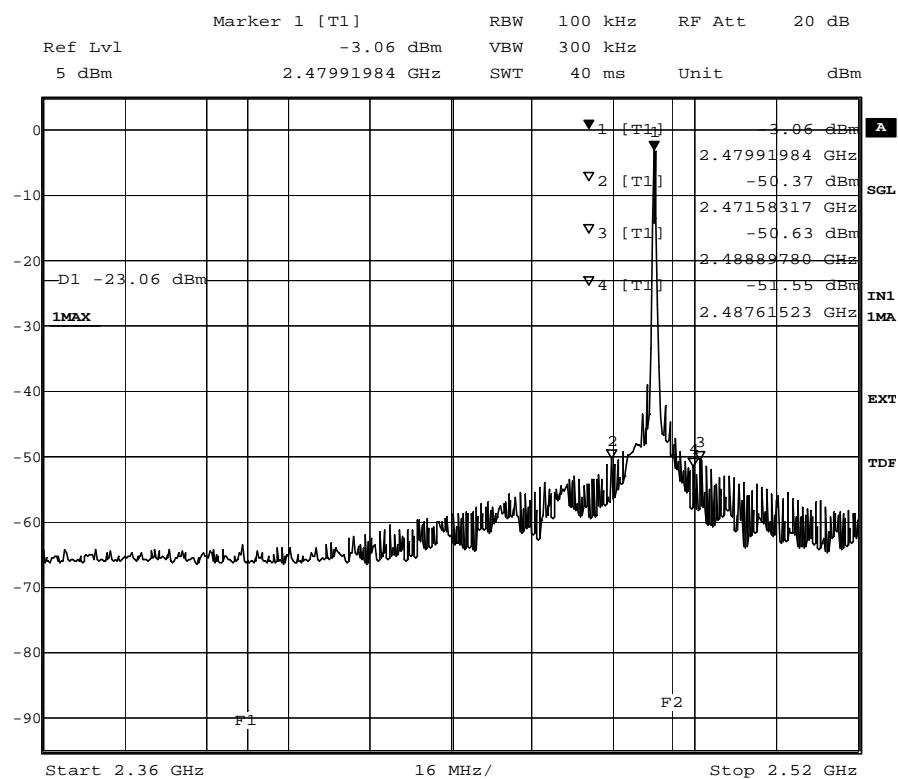

Title: Band Edge Compliance  
Comment A: CH T: 2480 MHz  
Date: 4.JUL.2002 16:31:46

band edge compliance

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 3 TX mode, the EUT transmits continuously  
on 2480 MHz

### Setup

setup 1

### Port

temporary  
antenna  
connector

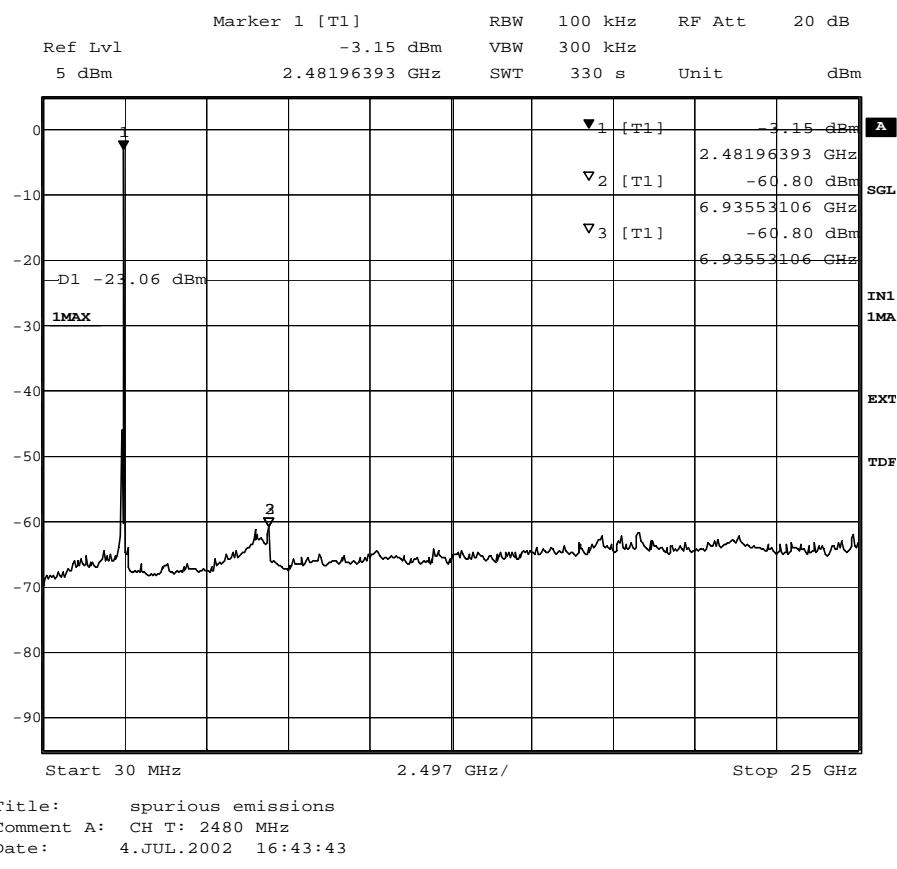

spurious emissions conducted

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

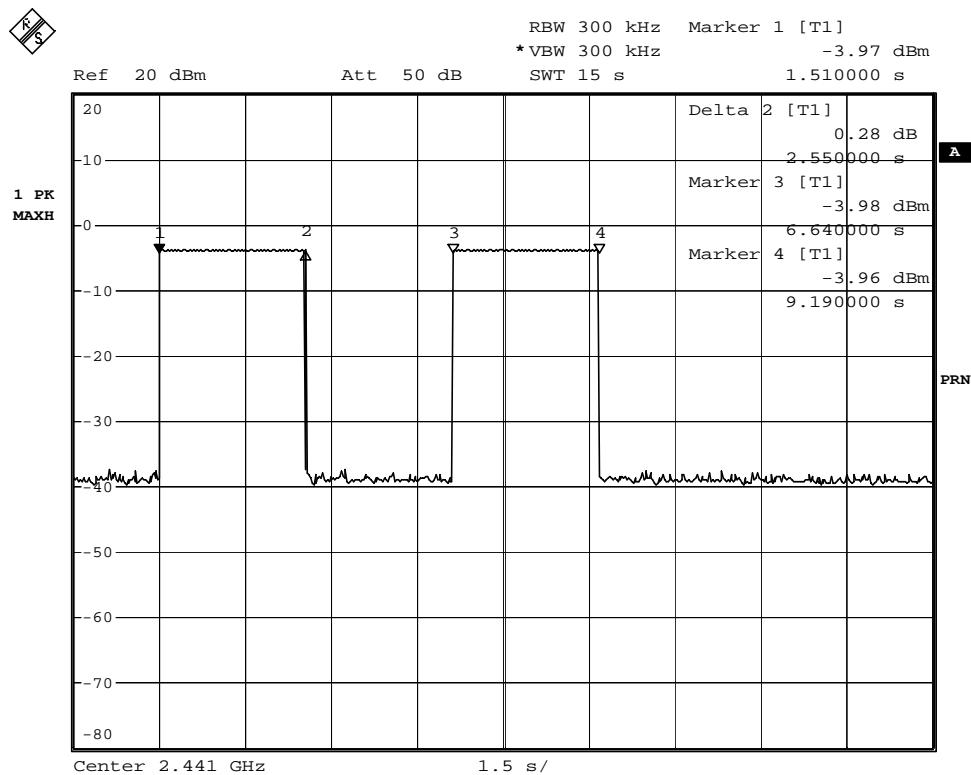

Date: 4.JUL.2002 11:32:08

15 seconds sweep for a complete inquiry

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

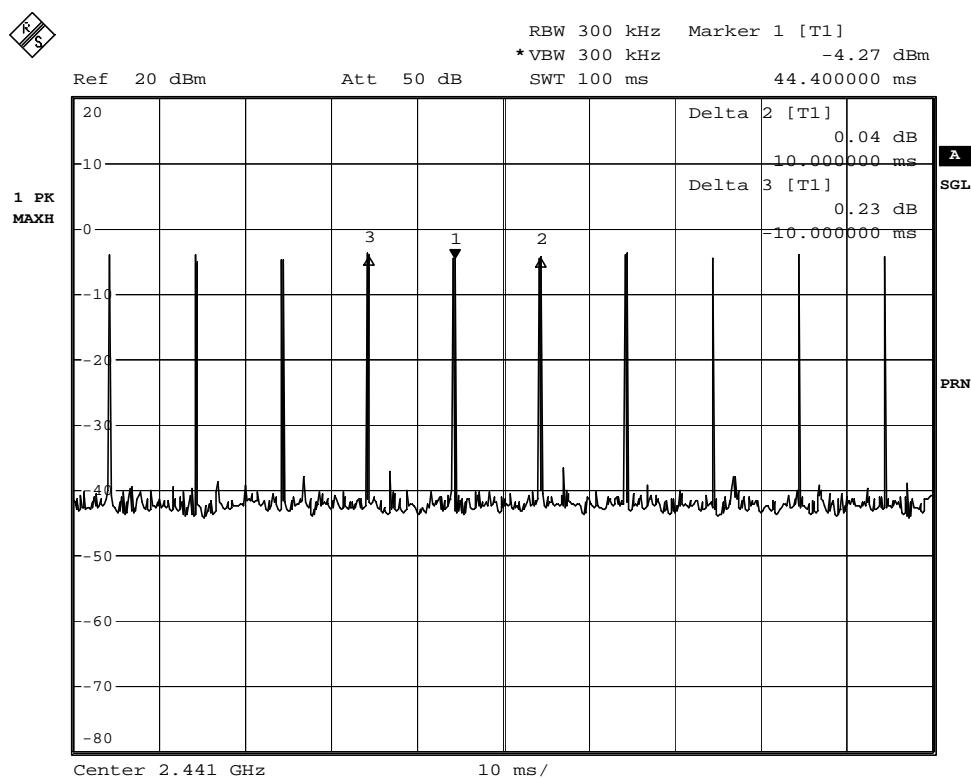

Date: 4.JUL.2002 11:33:32

**100 ms sweep of a channel to determine the repetition frequency**

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

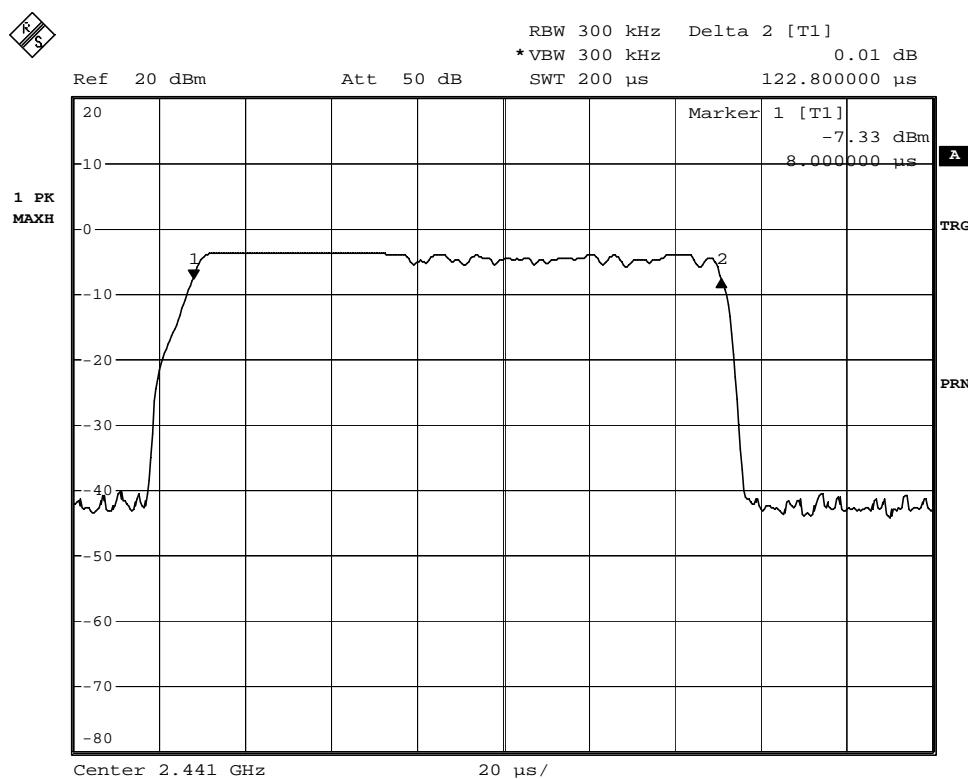

Date: 4.JUL.2002 11:34:29

200  $\mu$ s sweep for a complete burst

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

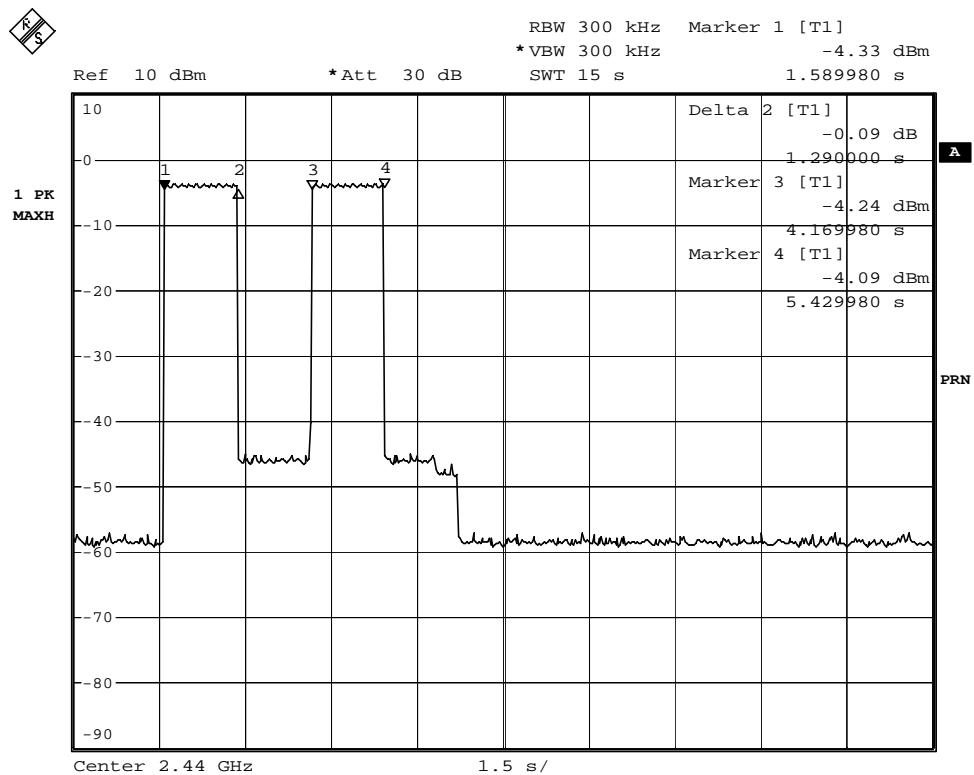

Date: 4.JUL.2002 11:50:55

**15 seconds sweep for a complete paging**

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

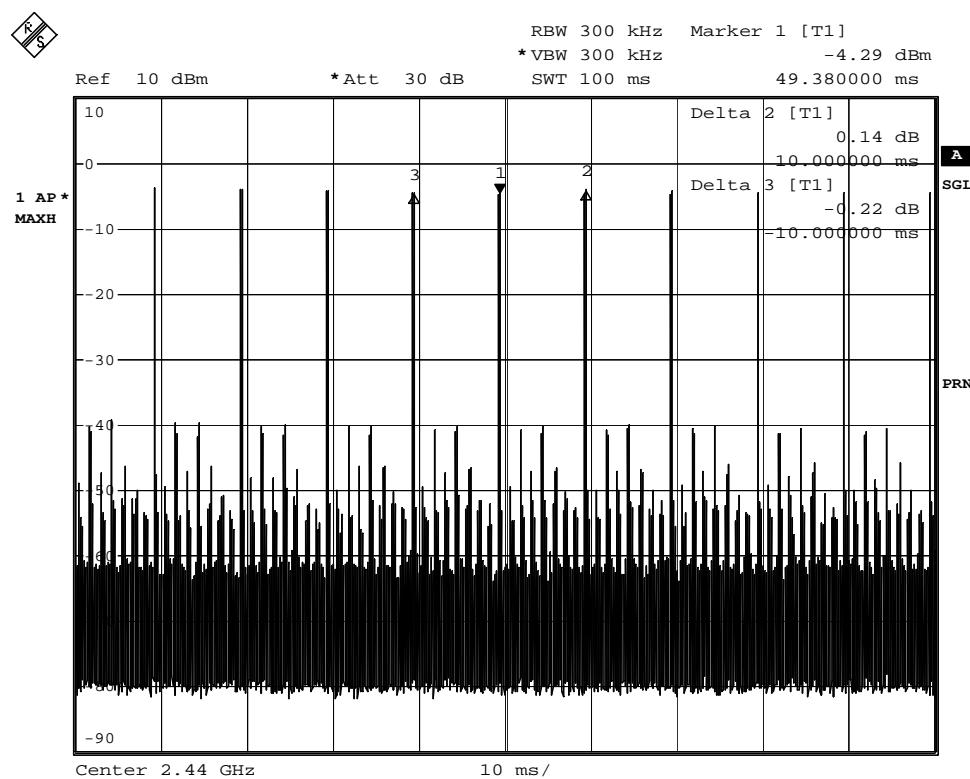

Date: 4.JUL.2002 11:48:37

**100 ms sweep of a channel to determine the repetition frequency**

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

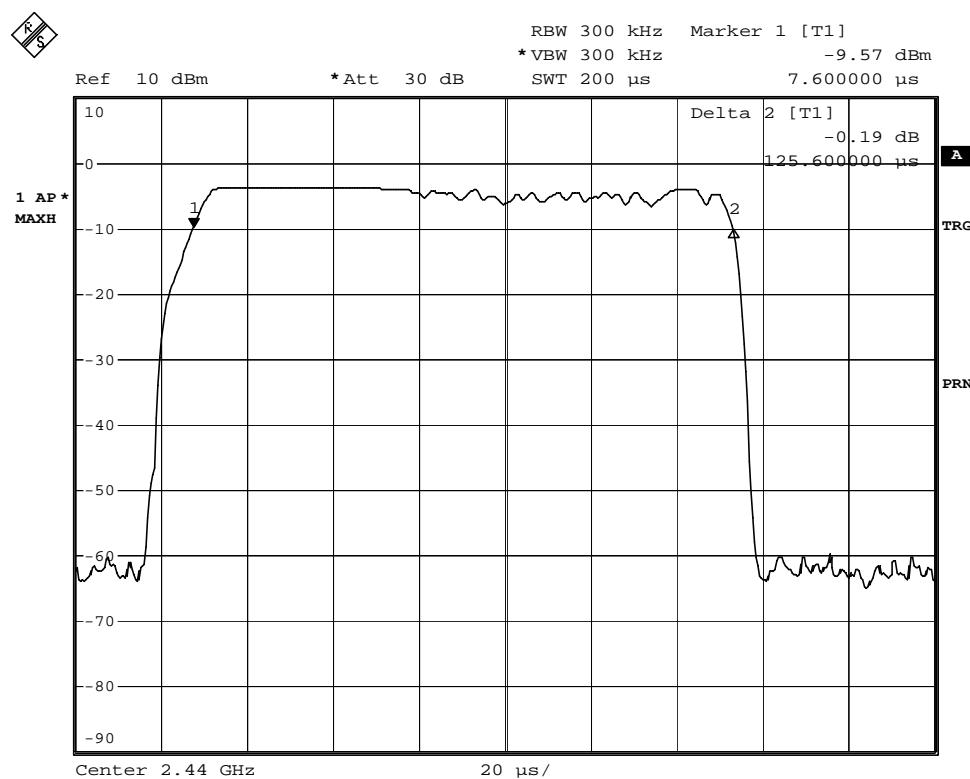

Date: 4.JUL.2002 11:47:21

**200  $\mu$ s sweep for a complete burst**

## Power Density

### Op. Mode


op-mode 4 inquiry

### Setup

setup 1

### Port

temporary  
antenna  
connector

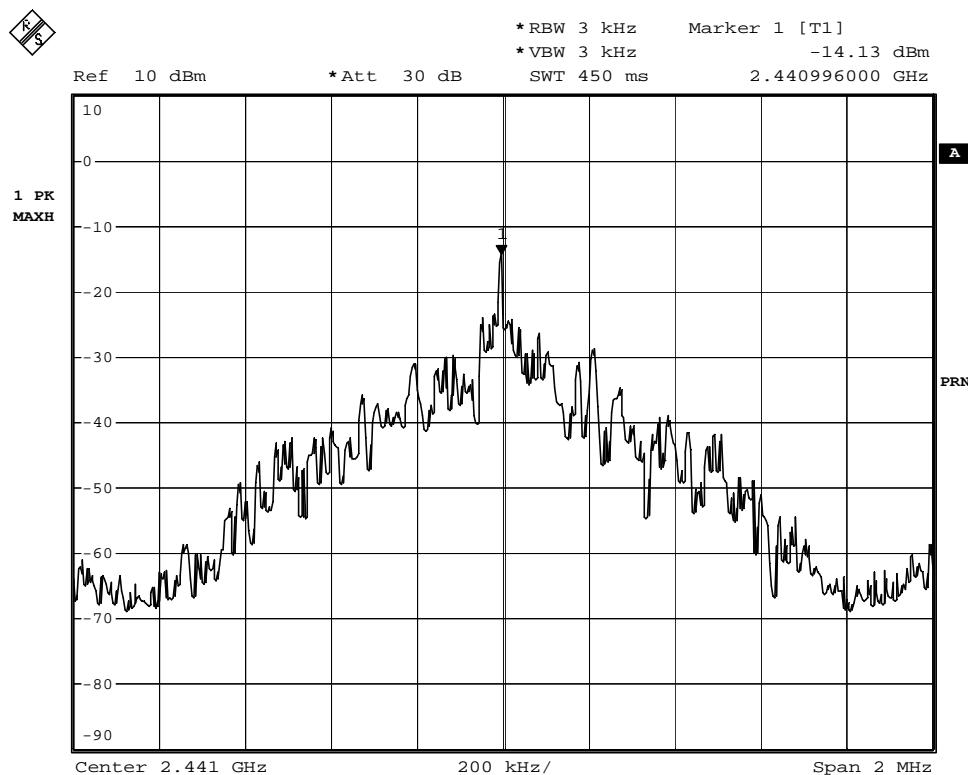

Date: 4.JUL.2002 11:37:37

**power density (inquiry)**

## Power Density

### Op. Mode


op-mode 5 paging

### Setup

setup 1

### Port

temporary  
antenna  
connector

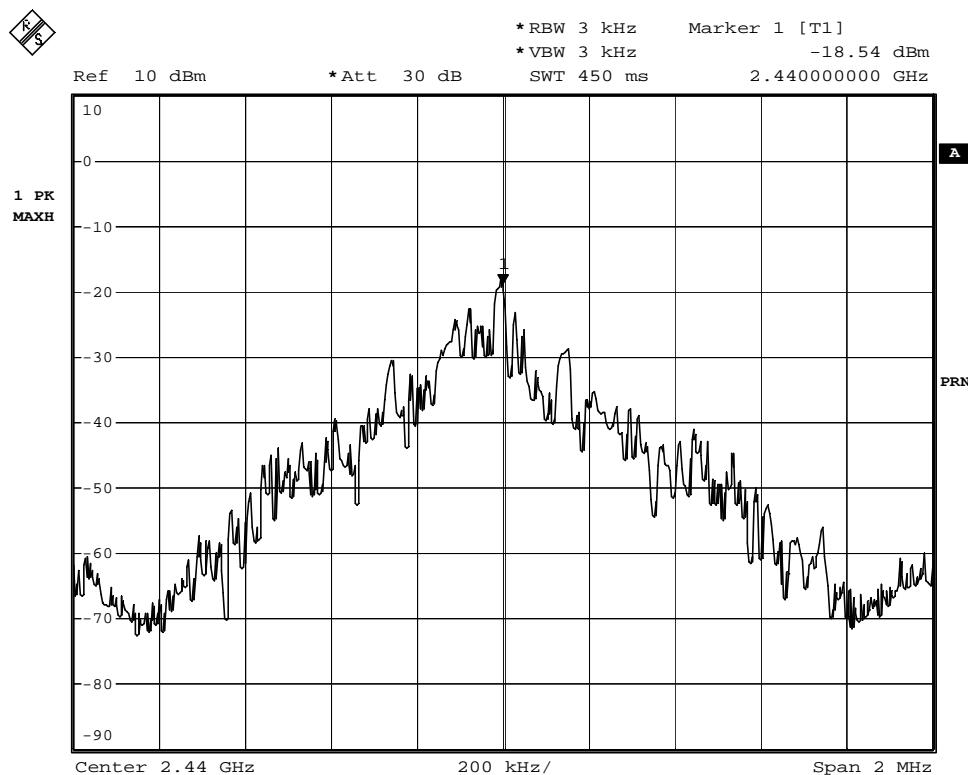

Date: 4.JUL.2002 11:46:05

**power density (paging)**

## Channel Separation

### Op. Mode


op-mode 6 10 neighbouring channels

### Setup

setup 1

### Port

temporary  
antenna  
connector

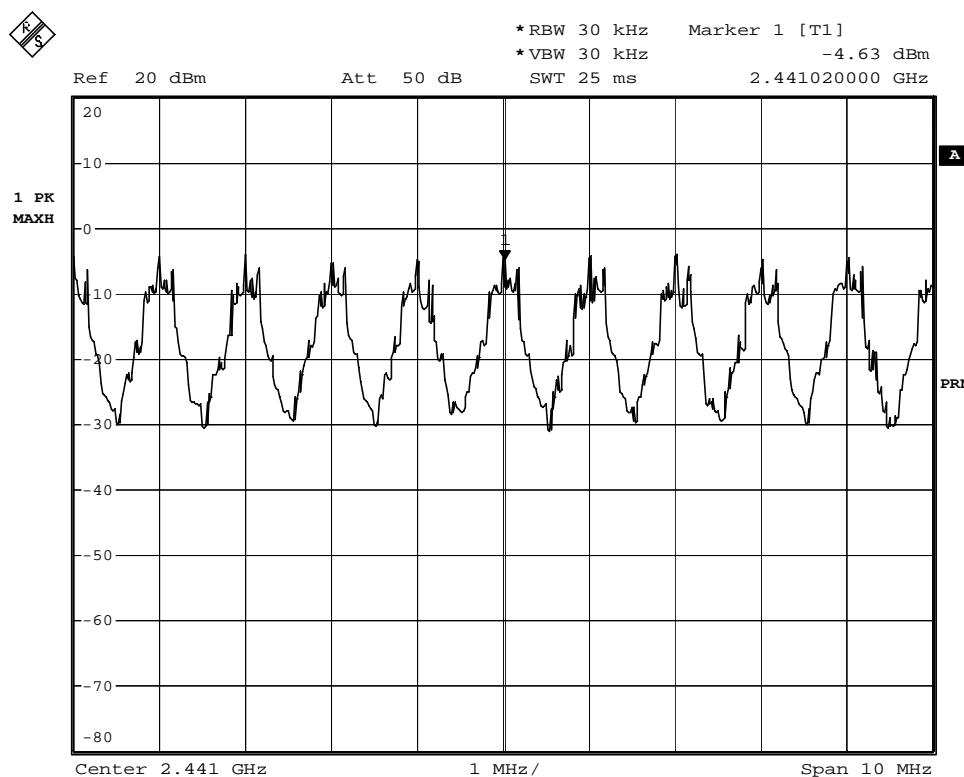

Date: 4.JUL.2002 11:22:12

channel separation