



# Test Report

For

**Applicant** : TECHNICA HOUSE INCORPORATION

**Equipment Type** : Microflex Slim/Mini Desk Top PC

**Model** : MFII<sup>+</sup> -6BXV3; Millennium<sup>+</sup> X-II; MFIII<sup>+</sup> -6BXV3;  
Millennium<sup>+</sup> X-III

**FCC ID** : FCC ID: O2PMILLENNIUM-X

**Report No. :** 004T066FI

# Test Report Certification

## Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,  
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : TECHNICA HOUSE INCORPORATION  
Address : 4F, No.9, Lane 235, Pao Chiao Rd., Hsin Tien City, Taiwan, R.O.C.  
Equipment Type : Microflex Slim/Mini Desk Top PC  
Model : MFII<sup>+</sup> -6BXV3; Millennium<sup>+</sup> X-II; MFIII<sup>+</sup> -6BXV3; Millennium<sup>+</sup> X-III  
FCC ID : FCC ID: O2PMILLENNIUM-X  
Measurement Standard: CISPR 22/1994  
Measurement Procedure: ANSI C63.4 /1992  
Operation Voltage : 120VAC/60Hz  
Classification : Class B  
Test Result : Complied  
Test Date : April 28, 2000  
Report No. : 004T066FI



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Zoe Lee

Test Engineer: Haoyuan Wu

Approved: Kevin Wang

*Zoe Lee*

*Haoyuan Wu*

*Kevin Wang*

# TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 EUT Description .....	4
1.2 Tested System Details .....	5
1.3 EUT Configuration.....	7
1.4 EUT Exercise Software.....	7
1.5 Test performed .....	7
1.6 Test Facility.....	8
<b>2. CONDUCTED EMISSION.....</b>	<b>9</b>
2.1 Test Equipment List .....	9
2.2 Test Setup.....	9
2.3 Limits .....	9
2.4 Test Procedure.....	10
2.5 Test Results .....	10
<b>3. RADIATED EMISSION.....</b>	<b>11</b>
3.1 Test Equipment.....	11
3.2 Test Setup.....	11
3.3 Limits .....	12
3.4 Test Procedure.....	12
3.5 Test Results .....	12
<b>4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....</b>	<b>13</b>
<b>5. ATTACHMENT .....</b>	<b>14</b>
ATTACHMENT 1: SUMMARY OF TEST RESULTS	
ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
ATTACHMENT 3: EUT DETAIL PHOTOGRAPHS	

**1. General Information**      **FCC ID: O2PMILLENNIUM-X**

**1.1 EUT Description**

Applicant : TECHNICA HOUSE INCORPORATION

Address : 4F, No.9, Lane 235, Pao Chiao Rd., Hsin Tien City,  
Taiwan, R.O.C.

Equipment Type : Microflex Slim/Mini Desk Top PC

Model : MFII<sup>+</sup> -6BXV3; Millennium<sup>+</sup> X-II; MFIII<sup>+</sup> -6BXV3;  
Millennium<sup>+</sup> X-III

Operation Voltage : 120VAC/60Hz

Mother Board : TECHNICA, S/N:006474

CPU : PentiumII/300MHz

FDD : YE DATA, S/N: 11870976, M/N: 702D-6638D

HDD : Quantum, M/N: EX64A012

CD-RAM : Minoshima, S/N: 98CVA001999, M/N: UJDA150L

Switching Power Supply : CHANNEL WELL, S/N: 94131649, M/N: CWT-235ATX

**Remark:**

- 1.The EUT is a Microflex Slim/Mini Desk Top PC , and CPU speed is 300MHz.  
The different model are for different market.
2. QuieTek had verified all construction and function in typical operation, then shown in this test report.

## 1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards ) are:

### 1.2.1 Microflex Slim/Mini Desk Top PC(EUT)

Model Number : MFII<sup>+</sup> -6BXV3; Millennium<sup>+</sup> X-II; MFIII<sup>+</sup> -6BXV3;  
Millennium<sup>+</sup> X-III  
Serial Number : N/A  
FCC ID : **FCC ID: O2PMILLENNIUM-X**  
Manufacturer : TECHNICA HOUSE INCORPORATION  
Mother Board : TECHNICA, S/N:006474  
CPU : PentiumII/300MHz  
FDD : YE DATA, S/N: 11870976, M/N: 702D-6638D  
HDD : Quantum, M/N: EX64A012  
CD-ROM : Minoshima, S/N: 98CVA001999, M/N: UJDA150L  
Switching Power Supply : CHANNEL WELL, S/N: 94131649, M/N: CWT-235ATX

### 1.2.2 Monitor

Model Number : CM752ET-311  
Serial Number : T8E004439  
FCC ID : DoC  
Manufacturer : HITACHI  
Data Cable : Shielded, 1.5m  
Power Cord : Shielded, 1.7m

### 1.2.3 Keyboard

Model Number : 6311-TW4C  
Serial Number : 916590704C91F25613  
FCC ID : DoC  
Manufacturer : ACER  
Data Cable : Shielded, 1.8m

### 1.2.4 Modem

Model Number : 1414  
Serial Number : 980033041  
FCC ID : IFAXDM1414  
Manufacturer : ACEEX  
Data Cable : Shielded, 1.5m  
Power Adapter : ACCEX, SCP41-91000A  
Cable Output : Shielded, 1.5m

**1.2.5 Modem**  
Model Number : 1414  
Serial Number : 980033034  
FCC ID : IFAXDM1414  
Manufacturer : ACEEX  
Data Cable : Shielded, 1.5m  
Power Adapter : ACCEX, SCP41-91000A  
Cable Output : Shielded, 1.5m


**1.2.6 Printer**  
Model Number : C2642A  
Serial Number : MY75J1D1D2  
FCC ID : B94C2642X  
Manufacturer : HP  
Data Cable : Shielded, 1.2m  
Power Adapter : NMB, C2175A  
Cable for AC IN: Non-Shielded, 0.7m  
Cable for AC Out: Non-Shielded, 1.5m

**1.2.7 Mouse**  
Model Number : M-UE55  
Serial Number : DVT-324  
FCC ID : DoC  
Manufacturer : Logitech  
Data Cable : Shielded, 1.8m

**1.2.8 Mouse**  
Model Number : M-S34  
Serial Number : LZB75078428  
FCC ID : DZL211029  
Manufacturer : HP  
Data Cable : Shielded, 1.8m

**1.2.9 Mouse**  
Model Number : MUS2U  
Serial Number : N/A  
FCC ID : DoC  
Manufacturer : TREMON  
Data Cable : Shielded, 1.8m

### 1.3 EUT Configuration

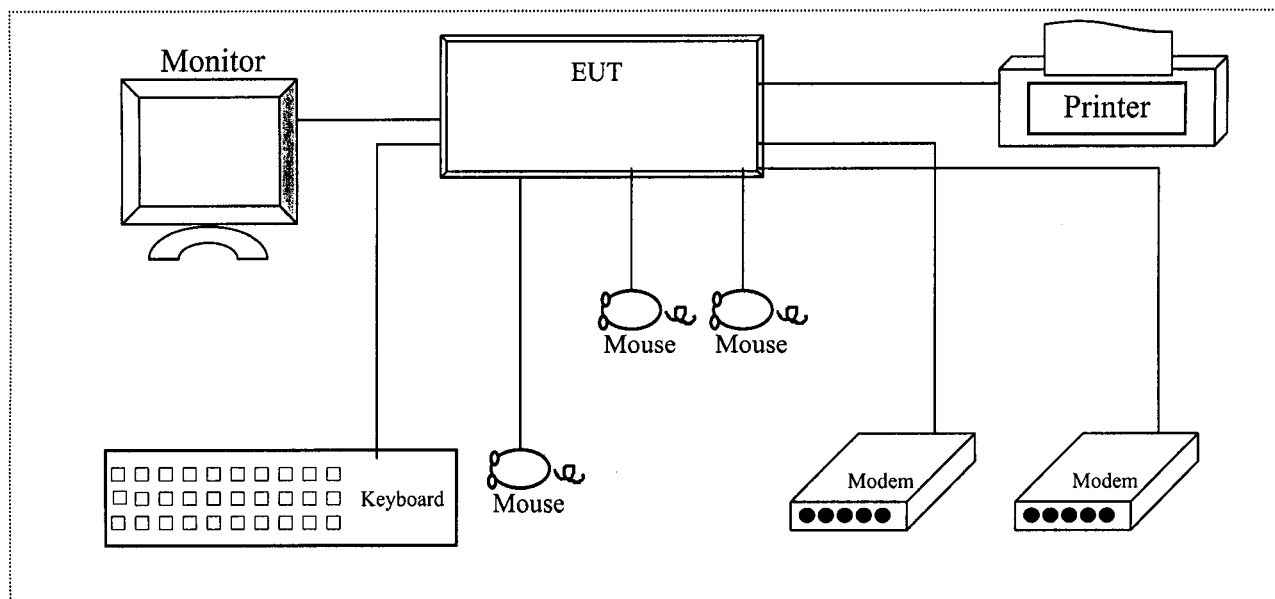

### 1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Personal Computer reads data from disk.
- 1.4.4 Personal Computer sends "H" pattern to printer, the printer will print "H" pattern on paper.
- 1.4.5 Personal Computer reads and writes data into and from modem.
- 1.4.6 Personal Computer will read data from floppy disk and then writes the data into floppy disk , same operation for hard disk.
- 1.4.7 Repeat the above procedure 1.4.4 to 1.4.6

### 1.5 Test performed

Conducted emissions were investigated over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were investigated over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters.

## 1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on

Federal Communications Commission

FCC Engineering Laboratory

7435 Oakland Mills Road

Columbia, MD 21046

Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP

NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV

Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI

Registration No. for No.2 Shielded Room C-858

Registration No. for No.1 Open Area Test Site R-823

Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland

Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,  
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



## 2. Conducted Emission


### 2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1999	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1999	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1999	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 2.2 Test Setup

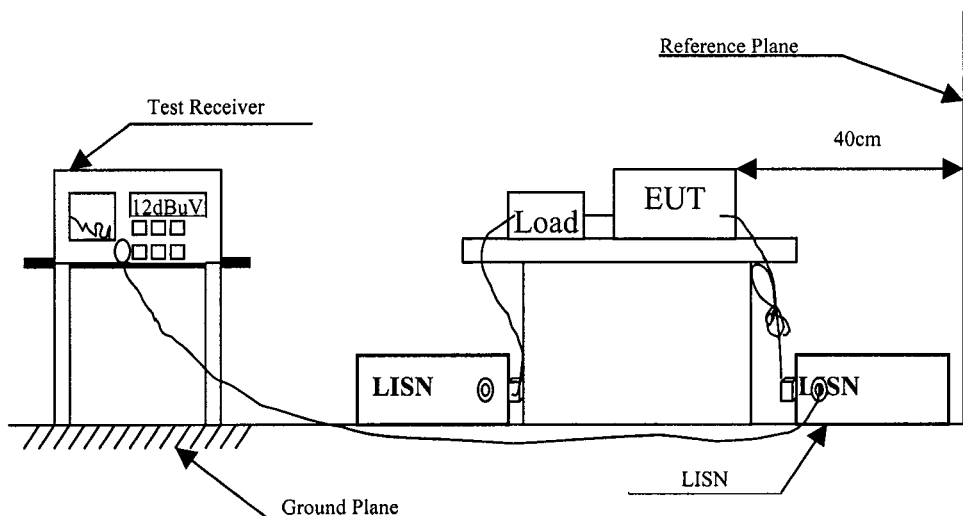

### 2.3 Limits

Frequency	Limits dB(uV)			
	Class A		Class B	
	QP	AV	QP	AV
MHz				
0.15 – 0.50	79	66	66-56	56-46
0.50-5.0	73	60	56	46
5.0 – 30	73	60	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

## 2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

## 2.5 Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in attachment 1. The acceptance criterion was met and the EUT passed the test.

### 3. Radiated Emission


#### 3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1999
		Pre-Amplifier	HP	8447D/3307A01812	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1999
		Pre-Amplifier	HP	8447D/3307A01814	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
  - 2.. Mark "X" test instruments are used to measure the final test results.

#### 3.2 Test Setup

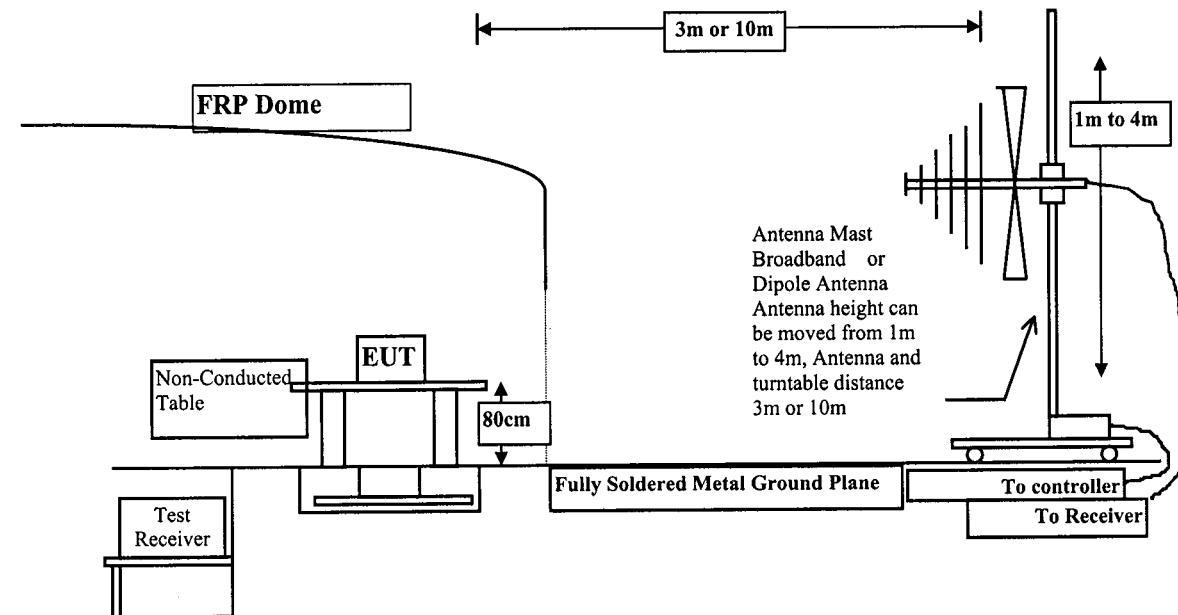

### 3.3 Limits

CISPR 22 Limits					FCC Part 15 Subpart B				
Frequency MHz	Class A		Class B		Frequency	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m		UV/m	dBuV/m	UV/m	dBuV/m
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Line Voltage (dBuV/m) = 20 log RF Line Voltage (uV/m)

### 3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters . The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30 ) is 120 kHz.

### 3.5 Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in attachment 1. The acceptance criterion was met and the EUT passed the test.

#### 4. EMI Reduction Method During Compliance Testing

No modification was made during testing.

**5. Attachment**

Attachment 1: Summary of Test Results	Number of Pages: 5
Attachment 2: EUT Test Photographs	Number of Pages: 2
Attachment 3: EUT detailed photographs	Number of Pages: 12

## Attachment 1 : Summary of Test Results

The test results in the emission were performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission are listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

(1) Mode 1: MFII<sup>+</sup> -6BXV3/640\*480

### **The EUT passed all the tests.**

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

#### **➤ Emission Test**

- Uncertainty in the Conducted Emission Test:  $< \pm 2.0$  dB
- Uncertainty in the field strength measured:  $< \pm 4.0$  dB

# CONDUCTED EMISSION DATA

Date of Test : May 02, 2000 EUT : Microflex Slim/Mini Desk Top PC  
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line1 dBuV	Measurement Level Line1 dBuV	Limits dBuV
0.527	0.07	0.10	42.26	42.43	56.00
*0.814	0.09	0.10	44.24	44.43	56.00
1.081	0.10	0.10	41.65	41.86	56.00
1.337	0.12	0.11	37.72	37.95	56.00
1.879	0.14	0.13	40.39	40.66	56.00
12.071	0.30	0.27	41.18	41.75	60.00

**Average:**

0.544	0.07	0.10	41.40	41.57	46.00
0.813	0.09	0.10	44.90	45.09	46.00
1.090	0.11	0.10	34.30	34.51	46.00
1.340	0.12	0.11	32.90	33.13	46.00
1.870	0.14	0.13	35.53	35.80	46.00
12.070	0.30	0.27	37.40	37.97	50.00

**Remarks :**

1. “ \* ” means that this data is the worst emission level.



# CONDUCTED EMISSION DATA

Date of Test : May 02, 2000 EUT : Microflex Slim/Mini Desk Top PC  
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
0.525	0.07	0.10	42.57	42.74	56.00
*0.805	0.09	0.10	45.32	45.51	56.00
1.076	0.10	0.10	42.00	42.21	56.00
1.875	0.14	0.13	38.94	39.21	56.00
2.131	0.15	0.13	37.43	37.71	56.00
12.076	0.30	0.27	33.67	34.24	60.00

**Average:**

0.525	0.07	0.10	38.40	38.57	46.00
0.805	0.09	0.10	39.00	39.19	46.00
1.080	0.10	0.10	34.70	34.91	46.00
1.870	0.14	0.13	33.10	33.37	46.00
2.130	0.15	0.13	31.20	31.48	46.00
12.100	0.30	0.27	31.70	32.27	50.00

**Remarks :**

1. “ \* ” means that this data is the worst emission level.

# RADIATED EMISSION DATA

Date of Test : May 02, 2000 EUT : Microflex Slim/Mini Desk Top PC  
 Test Mode : Mode 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
124.905	2.07	11.84	0.00	7.37	21.28	8.72	30.00	100	164
*157.460	2.38	10.34	0.00	16.01	28.73	1.27	30.00	400	36
166.665	2.47	9.59	0.00	15.75	27.80	2.20	30.00	100	26
190.110	2.69	8.96	0.00	15.17	26.82	3.18	30.00	100	114
199.245	2.78	9.30	0.00	16.41	28.49	1.51	30.00	100	37
249.995	3.27	12.61	0.00	13.39	29.27	7.73	37.00	100	42
291.465	3.66	13.27	0.00	6.57	23.50	13.50	37.00	100	38
312.080	3.82	13.50	0.00	11.85	29.17	7.83	37.00	100	163
380.215	4.17	14.95	0.00	9.37	28.49	8.51	37.00	100	128

**Above 1GHz:**

1082.000	2.19	24.91	35.48	49.91	41.53	32.47	74.00	0	0
1142.000	2.26	25.09	35.36	46.37	38.36	35.64	74.00	0	0
1163.000	2.30	25.21	35.36	46.14	38.30	35.70	74.00	0	0
1331.000	2.50	25.76	35.07	45.49	38.69	35.31	74.00	0	0
1583.000	2.84	26.68	34.75	45.20	39.96	34.04	74.00	0	0
*1670.000	2.95	26.99	34.71	46.77	41.99	32.01	74.00	0	0
1753.000	3.06	27.29	34.65	45.27	40.97	33.03	74.00	0	0
1834.000	3.17	27.60	34.60	45.00	41.16	32.84	74.00	0	0

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " \* ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

# RADIATED EMISSION DATA

Date of Test : May 02, 2000 EUT : Microflex Slim/Mini Desk Top PC  
 Test Mode : Mode 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
74.198	1.58	6.83	0.00	18.60	27.01	2.99	30.00	100	133
*77.247	1.61	6.93	0.00	19.63	28.17	1.83	30.00	100	39
120.030	2.02	11.56	0.00	12.64	26.22	3.78	30.00	100	74
124.905	2.07	11.49	0.00	11.92	25.48	4.52	30.00	100	63
166.555	2.47	9.67	0.00	11.18	23.32	6.68	30.00	100	91
187.247	2.66	8.96	0.00	15.29	26.91	3.09	30.00	100	46
249.995	3.27	12.26	0.00	8.78	24.31	12.69	37.00	100	202
312.080	3.82	13.93	0.00	10.05	27.79	9.21	37.00	100	152

**Above 1GHz:**

1081.000	2.19	24.91	35.48	50.29	41.91	32.09	74.00	0	0
1142.000	2.26	25.09	35.36	48.85	40.84	33.16	74.00	0	0
1247.000	2.42	25.52	35.19	47.15	39.89	34.11	74.00	0	0
1332.000	2.53	25.82	35.07	46.79	40.07	33.93	74.00	0	0
1419.000	2.64	26.13	34.95	46.45	40.27	33.73	74.00	0	0
1500.000	2.72	26.37	34.80	47.56	41.86	32.14	74.00	0	0
1587.000	2.86	26.74	34.75	47.07	41.92	32.08	74.00	0	0
*1669.000	2.95	26.99	34.71	52.13	47.35	26.65	74.00	0	0
1749.000	3.06	27.29	34.66	48.05	43.74	30.26	74.00	0	0
1834.000	3.17	27.60	34.60	46.03	42.19	31.81	74.00	0	0

**Remarks:**

- 1.All Readings below 1GHz are Quasi-Peak, above are average value.
- 2.“ \* ”, means this data is the worst emission level.
- 3.Emission Level = Reading Level + Antenna Factor + Cable loss