


Lipman's Nurit-8000 Embedded Antenna for Mobitex 900

Specification

Frequency Range:	TX: 896 - 906 MHz RX: 935 - 941 MHz
Gain:	0 dBi
Nominal Input Impedance:	50 Ohms
VSWR, maximum:	2:1
Polarization:	Linear Vertical
Patterns: Azimuth:	Omnidirectional
Elevation:	Omnidirectional
Pattern Flatness (ripple within the Device):	
Azimuth:	± 4 dB
Elevation:	± 4.5 dB (except for the nulls)
Connector:	16MMCX-50-1-1 Plug with 7.5 cm Coaxial Cable
Dimensions:	75 X 62 X 0,2 mm
Weight:	5 gr.

ANTENNA PHOTOS

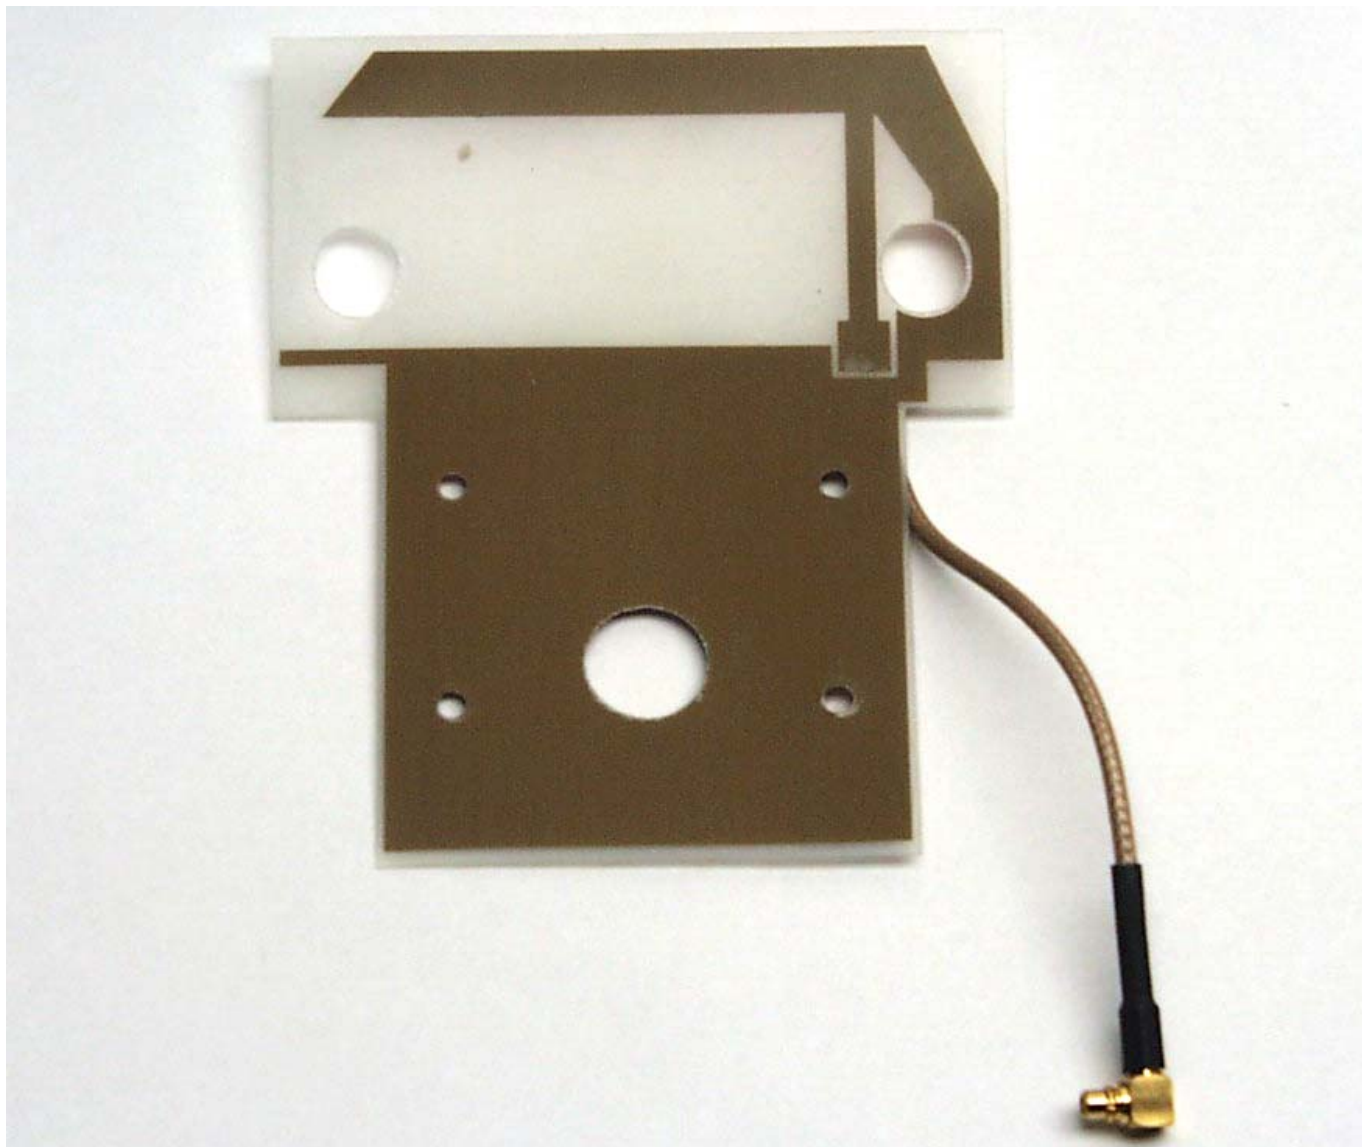

ANTENNA PHOTOS

