




# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	COMPAL BROADBAND NETWORKS, INC.
Applicant Address	13F-1, No.1, Taiyuan 1st St., Zhubei City, Hsinchu County 30288, Taiwan, R.O.C.
FCC ID	O2U-CH6643
Manufacturer's company	COMPAL BROADBAND NETWORKS, INC.
Manufacturer Address	13F-1, No.1, Taiyuan 1st St., Zhubei City, Hsinchu County 30288, Taiwan, R.O.C.

Product Name	Cable modem
Brand Name	
Model No.	CH6643E
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Sep. 18, 2014
Final Test Date	Dec. 30, 2014
Submission Type	Original Equipment

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes .....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	11
3.9. EUT Operation during Test .....	11
3.10. Duty Cycle.....	11
3.11. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. 6dB Spectrum Bandwidth Measurement .....	29
4.4. Maximum Conducted Output Power Measurement.....	35
4.5. Power Spectral Density Measurement .....	39
4.6. Radiated Emissions Measurement .....	49
4.7. Band Edge Emissions Measurement .....	72
4.8. Frequency Stability Measurement .....	80
4.9. Antenna Requirements .....	82
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>83</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>85</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....</b>	<b>B1 ~ B3</b>




### History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR491841AB	Rev. 01	Initial issue of report	Jan. 07, 2015



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Cable modem  
Brand Name :   
Model No. : CH6643E  
Applicant : COMPAL BROADBAND NETWORKS, INC.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 18, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.40 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	6.14 dB
4.5	15.407(a)	Power Spectral Density	Complies	6.64 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.01 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.12 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth
Channel Band Width (99%)	Band 1: MCS8 (HT20): 18.15 MHz ; MCS8 (HT40): 36.76 MHz Band 4: MCS8 (HT20): 21.62 MHz ; MCS8 (HT40): 36.76 MHz
Maximum Conducted Output Power	Band 1: MCS8 (HT20): 23.56 dBm ; MCS8 (HT40): 23.26 dBm Band 4: MCS8 (HT20): 19.26 dBm ; MCS8 (HT40): 19.00 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11a

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9
Channel Band Width (99%)	Band 1: 17.45 MHz ; Band 4: 30.22 MHz
Maximum Conducted Output Power	Band 1: 21.64 dBm ; Band 4: 18.52 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

### Antenna and Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
IEEE 802.11a	V	X	X	X
IEEE 802.11n	X	X	V	V

### IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS8-15
802.11n (HT40)	2	MCS8-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

### 3.2. Accessories

Power	Brand	Model No.	Rating
Adapter	APD	WA-24Q12FU	Input: 100-240Vac, 50-60Hz, 0.6A Max. Output: 12Vdc, 2A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
0	CBG	141664320004C	PCB Antenna	N/A	2.68	6.30
1	CBG	141664320004C	PCB Antenna	N/A	2.68	6.30

Note: The EUT has two antennas.

**For 2.4GHz WLAN function:**

For IEEE 802.11b/g mode (1TX/1RX):

Only Ant. 0 could transmit/receive simultaneously.

For IEEE 802.11n mode (2TX/2RX):

Ant. 0 and Ant. 1 could transmit/receive simultaneously.


**For 5GHz WLAN function:**

For IEEE 802.11a mode (1TX/1RX):

Only Ant. 0 could transmit/receive simultaneously.

For IEEE 802.11n mode (2TX/2RX):

Ant. 0 and Ant. 1 could transmit/receive simultaneously.

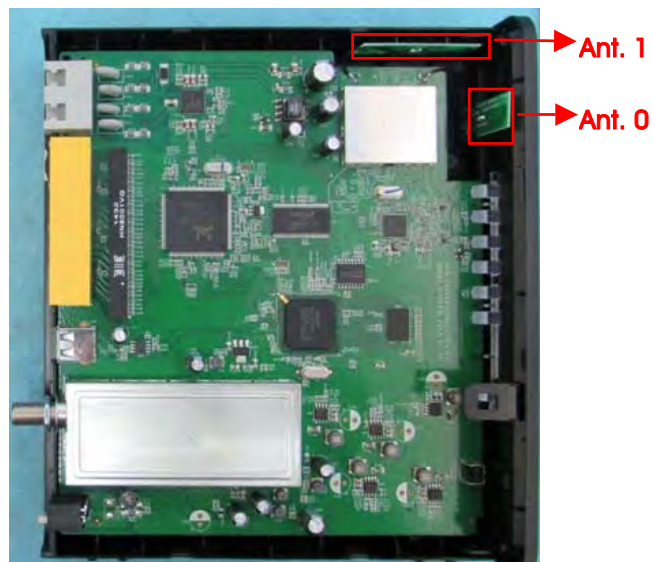



### 3.4. Table for Carrier Frequencies

The EUT has two bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11n HT20	Band 1, 4	MCS8	36/40/48//149/157/165	0+1
	11n HT40	Band 1, 4	MCS8	38/46/151/159	0+1
	11a/BPSK	Band 1, 4	6Mbps	36/40/48/149/157/165	0
Power Spectral Density	11n HT20	Band 1, 4	MCS8	36/40/48/149/157/165	0+1
	11n HT40	Band 1, 4	MCS8	38/46/151/159	0+1
	11a/BPSK	Band 1, 4	6Mbps	36/40/48/149/157/165	0
26dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement	11n HT20	Band 1, 4	MCS8	36/40/48/149/157/165	0+1
	11n HT40	Band 1, 4	MCS8	38/46/151/159	0+1
	11a/BPSK	Band 1, 4	6Mbps	36/40/48/149/157/165	0
6dB Spectrum Bandwidth Measurement	11n HT20	Band 4	MCS8	149/157/165	0+1
	11n HT40	Band 4	MCS8	151/159	0+1
	11a/BPSK	Band 4	6Mbps	149/157/165	0
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11n HT20	Band 1, 4	MCS8	36/40/48/149/157/165	0+1
	11n HT40	Band 1, 4	MCS8	38/46/151/159	0+1
	11a/BPSK	Band 1, 4	6Mbps	36/40/48/149/157/165	0
Band Edge Emission	11n HT20	Band 1, 4	MCS8	36/40/48/149/157/165	0+1
	11n HT40	Band 1, 4	MCS8	38/46/151/159	0+1
	11a/BPSK	Band 1, 4	6Mbps	36/40/48/149/157/165	0
Frequency Stability	Un-modulation		-	40/157	0

#### For Co-location MPE and Radiated Emission Co-location test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Report No.: FA491841) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
NB	DELL	E6430	DoC
Cable Modem (Terminal System)	MOTOROLA	BSR 2000	DoC
PC (Control System)	acer	CD6141E	DoC
Keyboard (Control System)	iCooky	SK068	DoC
Mouse (Control System)	Logitech	M-U0026	DoC
LCD Monitor (Control System)	DELL	1704FPT†	DoC
Flash Disk	Transcend	JetFlash-700	DoC
Phone	HTT	F-689	N/A
Phone	HTT	F-689	N/A

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

**For Test Site No: CO01-CB**

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
Cable Modem (Terminal System)	MOTOROLA	BSR 2000	DoC
PC (Control System)	acer	CD6141E	DoC
Keyboard (Control System)	iCooky	SK068	DoC
Mouse (Control System)	Logitech	M-U0026	DoC
LCD Monitor (Control System)	DELL	1704FPT†	DoC
Flash Disk	Transcend	JetFlash-700	DoC
Phone	PHILIPS	M20	N/A
Phone	PHILIPS	M20	N/A

**For Test Site No: TH01-CB**

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	DoC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n MCS8 HT20

Test Software Version	RTL819x 2.2.3					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
MCS8 HT20	56/55	63/62	63/63	59/59	63/62	63/62

#### Power Parameters of IEEE 802.11n MCS8 HT40

Test Software Version	RTL819x 2.2.3			
Frequency	5190 MHz	5230 MHz	5755 MHz	5795 MHz
MCS8 HT40	45/45	63/63	56/56	63/62

#### Power Parameters of IEEE 802.11a

Test Software Version	RTL819x 2.2.3					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	53	63	62	54	63	63

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS8 HT20	1.000	1.000	100.00	0.00	0.01
802.11n MCS8 HT40	1.000	1.000	100.00	0.00	0.01
802.11a	1.000	1.000	100.00	0.00	0.01


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration

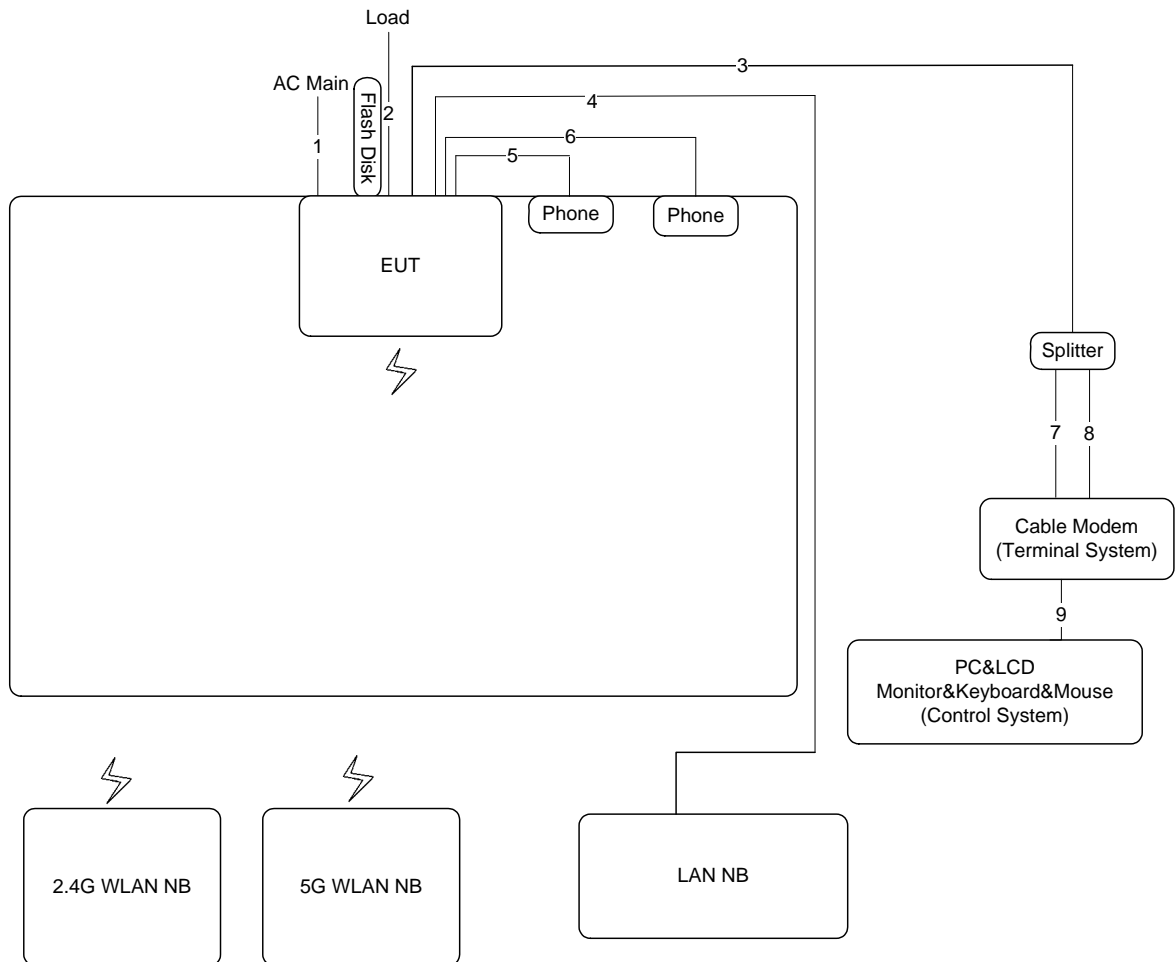

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable*3	No	1.5m	Load
3	Coaxial cable	Yes	10m	-
4	RJ-45 cable	No	10m	-
5	RJ-11 cable	No	1.5m	-
6	RJ-11 cable	No	1.5m	-
7	Coaxial cable	Yes	1m	-
8	Coaxial cable	Yes	1m	-
9	RJ-45 cable	No	10m	-

### 3.11.2. Radiation Emissions Above 1GHz Test Configuration

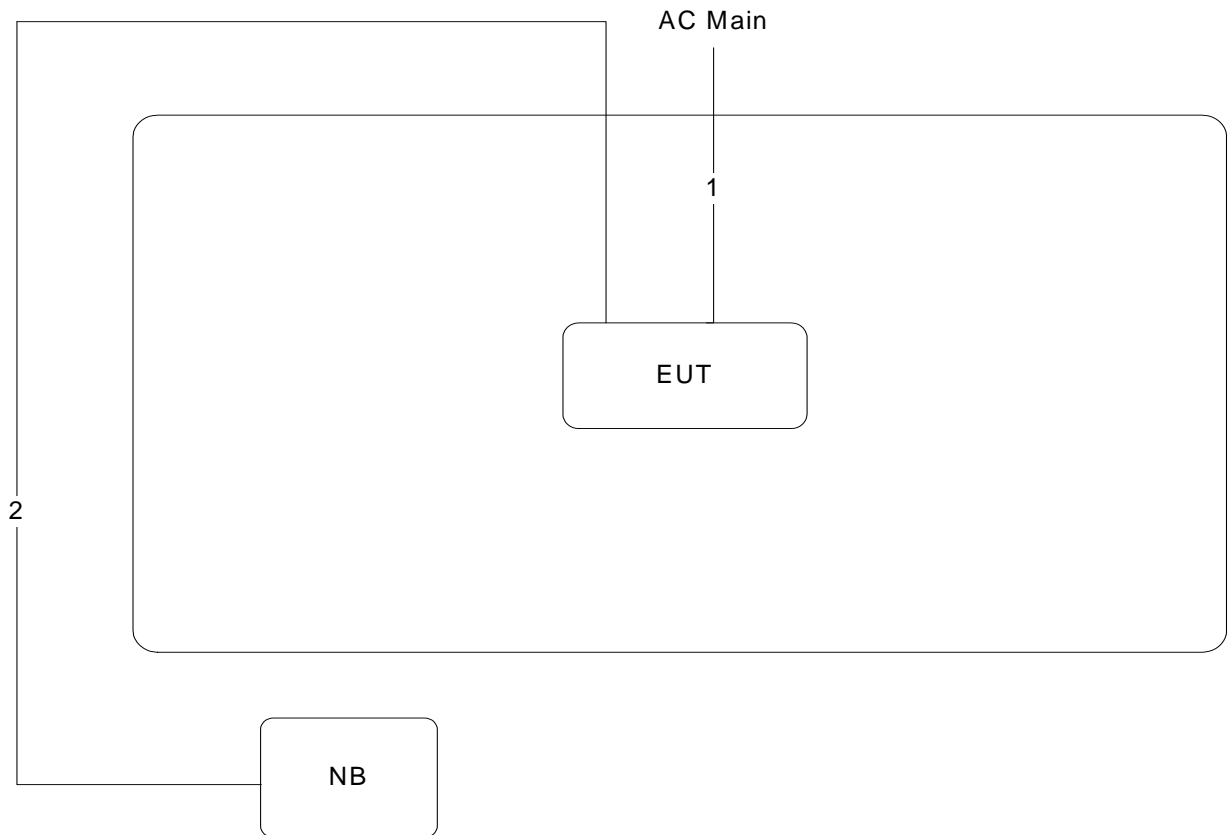

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

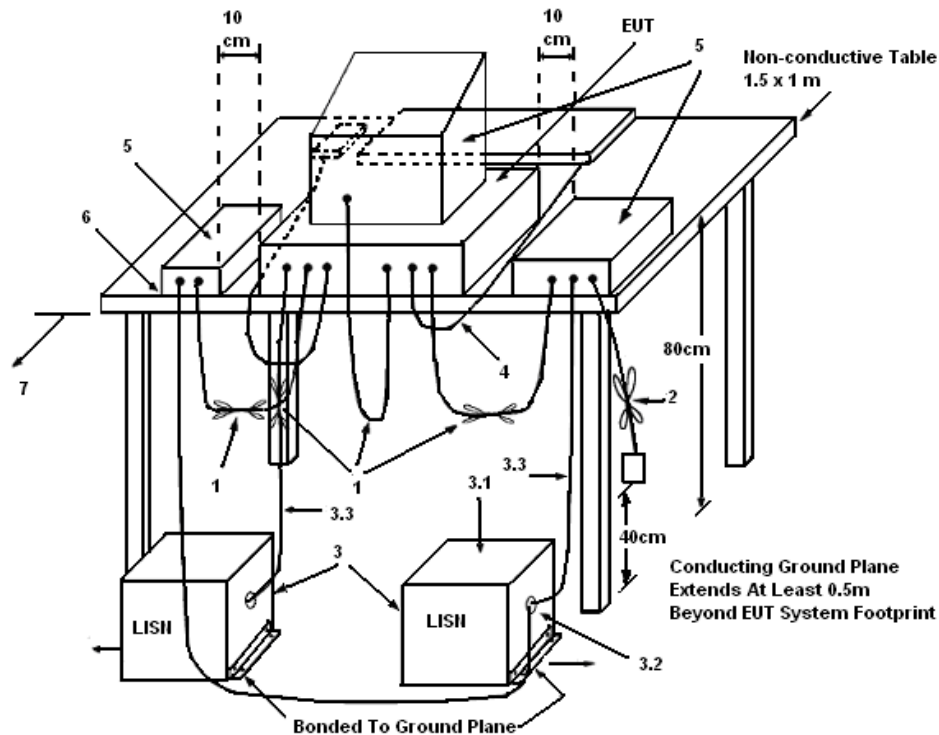

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	60%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

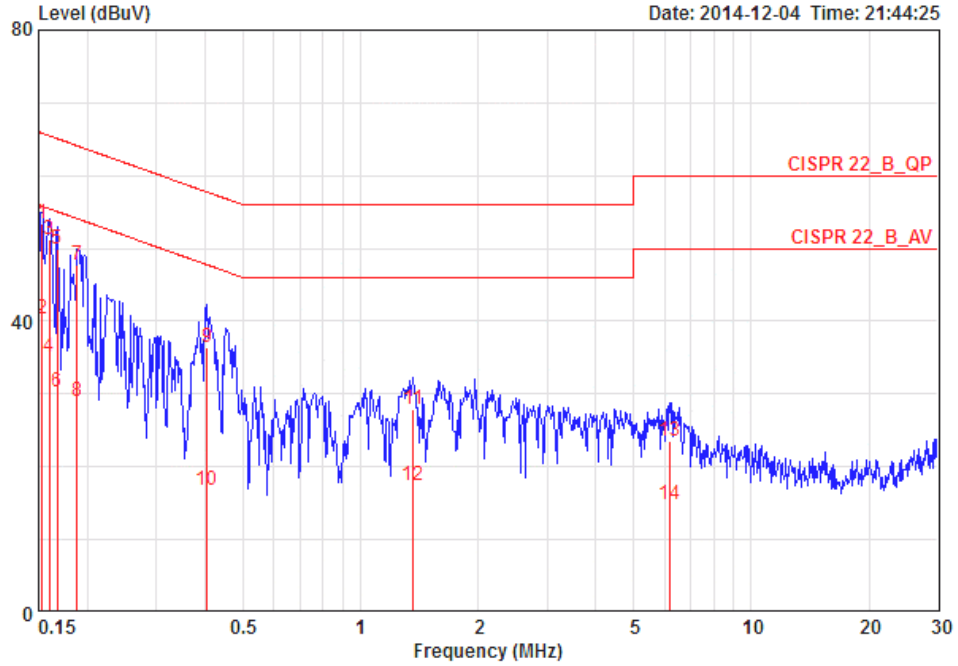

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.15321	53.43	-12.40	65.82	43.30	9.97	0.16	QP	LINE
2	0.15321	40.33	-15.50	55.82	30.20	9.97	0.16	AVERAGE	LINE
3	0.15985	51.31	-14.17	65.47	41.18	9.97	0.16	QP	LINE
4	0.15985	35.20	-20.28	55.47	25.07	9.97	0.16	AVERAGE	LINE
5	0.16765	49.95	-15.13	65.08	39.82	9.97	0.16	QP	LINE
6	0.16765	30.41	-24.67	55.08	20.28	9.97	0.16	AVERAGE	LINE
7	0.18838	47.75	-16.36	64.11	37.62	9.96	0.16	QP	LINE
8	0.18838	28.96	-25.15	54.11	18.83	9.96	0.16	AVERAGE	LINE
9	0.40400	36.39	-21.38	57.77	26.24	9.97	0.18	QP	LINE
10	0.40400	16.87	-30.90	47.77	6.72	9.97	0.18	AVERAGE	LINE
11	1.367	27.86	-28.14	56.00	17.68	9.95	0.22	QP	LINE
12	1.367	17.34	-28.66	46.00	7.16	9.95	0.22	AVERAGE	LINE
13	6.186	23.56	-36.44	60.00	13.18	10.04	0.34	QP	LINE
14	6.186	14.82	-35.18	50.00	4.44	10.04	0.34	AVERAGE	LINE

Temperature	25°C	Humidity	60%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

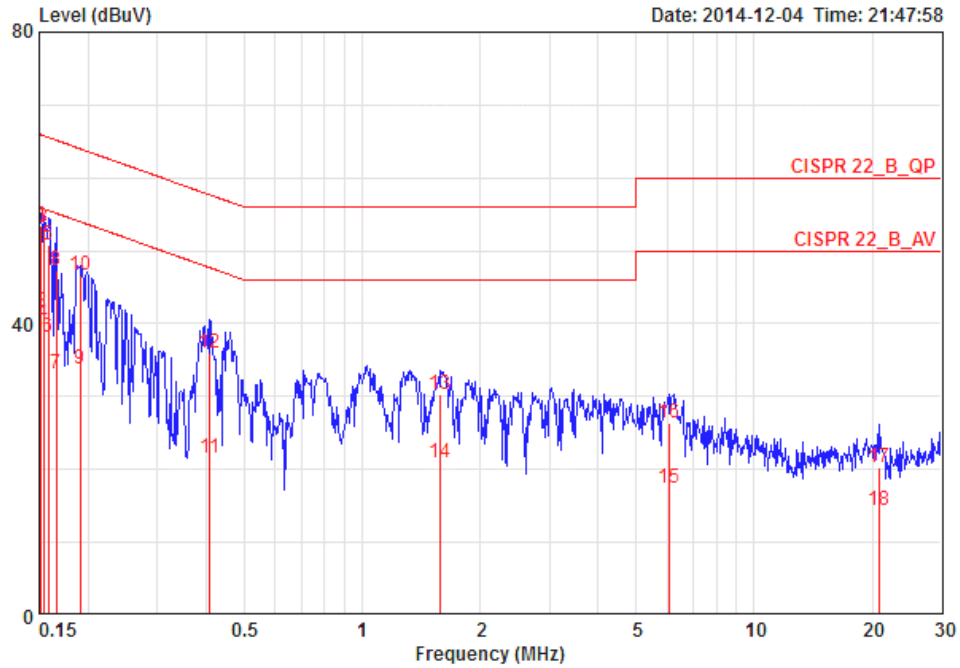

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.15160	53.37	-12.55	65.91	43.24	9.97	0.16	QP	NEUTRAL
2	0.15160	41.74	-14.18	55.91	31.61	9.97	0.16	AVERAGE	NEUTRAL
3	0.15403	53.13	-12.65	65.78	43.00	9.97	0.16	QP	NEUTRAL
4	0.15403	40.19	-15.59	55.78	30.06	9.97	0.16	AVERAGE	NEUTRAL
5	0.15816	50.87	-14.69	65.56	40.74	9.97	0.16	QP	NEUTRAL
6	0.15816	38.08	-17.48	55.56	27.95	9.97	0.16	AVERAGE	NEUTRAL
7	0.16589	33.18	-21.99	55.16	23.05	9.97	0.16	AVERAGE	NEUTRAL
8	0.16589	47.33	-17.84	65.16	37.20	9.97	0.16	QP	NEUTRAL
9	0.19039	33.81	-20.21	54.02	23.68	9.96	0.16	AVERAGE	NEUTRAL
10	0.19039	46.59	-17.43	64.02	36.46	9.96	0.16	QP	NEUTRAL
11	0.40831	21.49	-26.19	47.68	11.34	9.97	0.18	AVERAGE	NEUTRAL
12	0.40831	35.87	-21.81	57.68	25.72	9.97	0.18	QP	NEUTRAL
13	1.585	30.27	-25.73	56.00	20.08	9.96	0.23	QP	NEUTRAL
14	1.585	20.90	-25.10	46.00	10.71	9.96	0.23	AVERAGE	NEUTRAL
15	6.056	17.45	-32.55	50.00	7.12	9.99	0.34	AVERAGE	NEUTRAL
16	6.056	26.43	-33.57	60.00	16.10	9.99	0.34	QP	NEUTRAL
17	20.924	20.18	-39.82	60.00	9.36	10.30	0.53	QP	NEUTRAL
18	20.924	14.33	-35.67	50.00	3.51	10.30	0.53	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

7. The transmitter was radiated to the spectrum analyzer in peak hold mode.
8. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

##### Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.30	17.97
40	5200 MHz	23.65	18.15
48	5240 MHz	23.48	18.15
149	5745 MHz	34.26	19.19
157	5785 MHz	36.87	21.36
165	5825 MHz	38.52	21.62

##### Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	42.03	36.76
46	5230 MHz	44.64	36.61
151	5755 MHz	42.03	36.61
159	5795 MHz	41.88	36.76

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 0**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.96	17.11
40	5200 MHz	33.30	17.45
48	5240 MHz	31.74	17.28
149	5745 MHz	44.35	28.05
157	5785 MHz	45.22	30.22
165	5825 MHz	40.78	27.18

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5180 MHz**

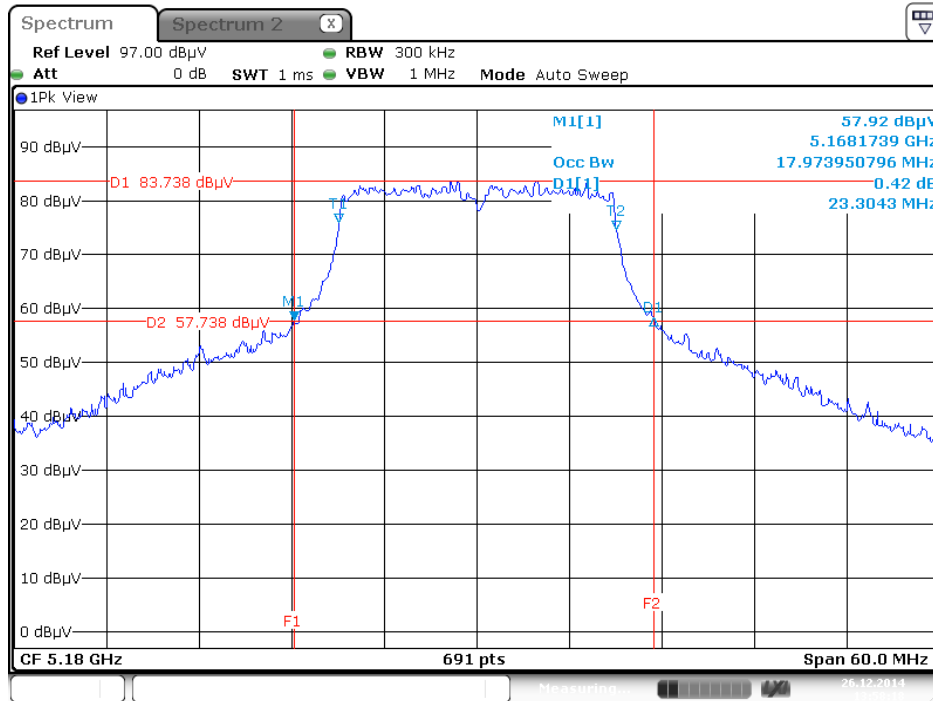

Date: 26 DEC. 2014 13:58:18


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5200 MHz**

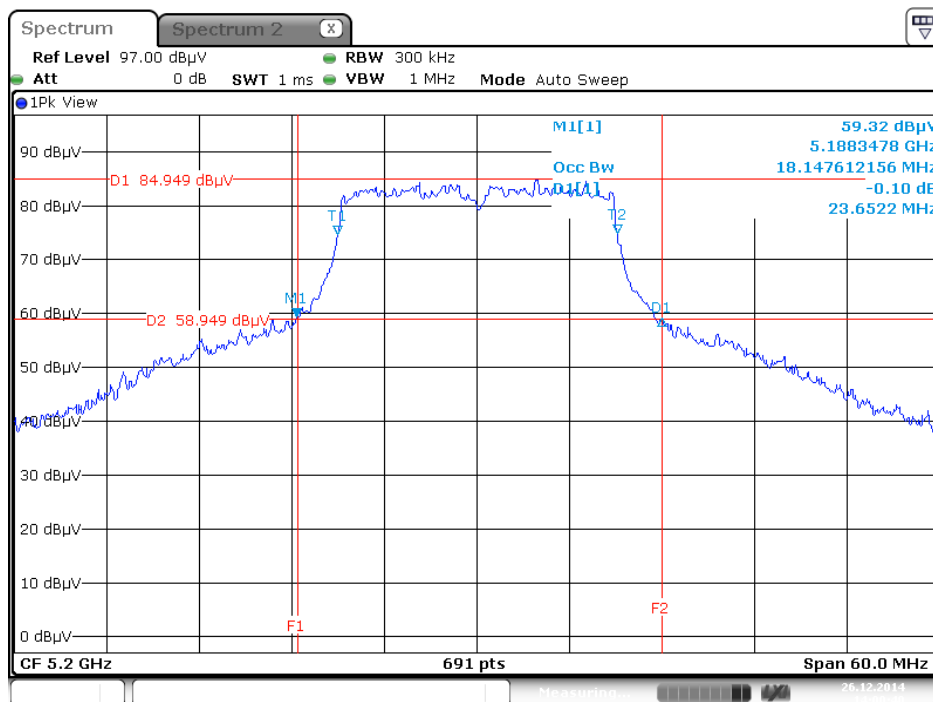

Date: 26 DEC. 2014 14:00:40




**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5240 MHz**

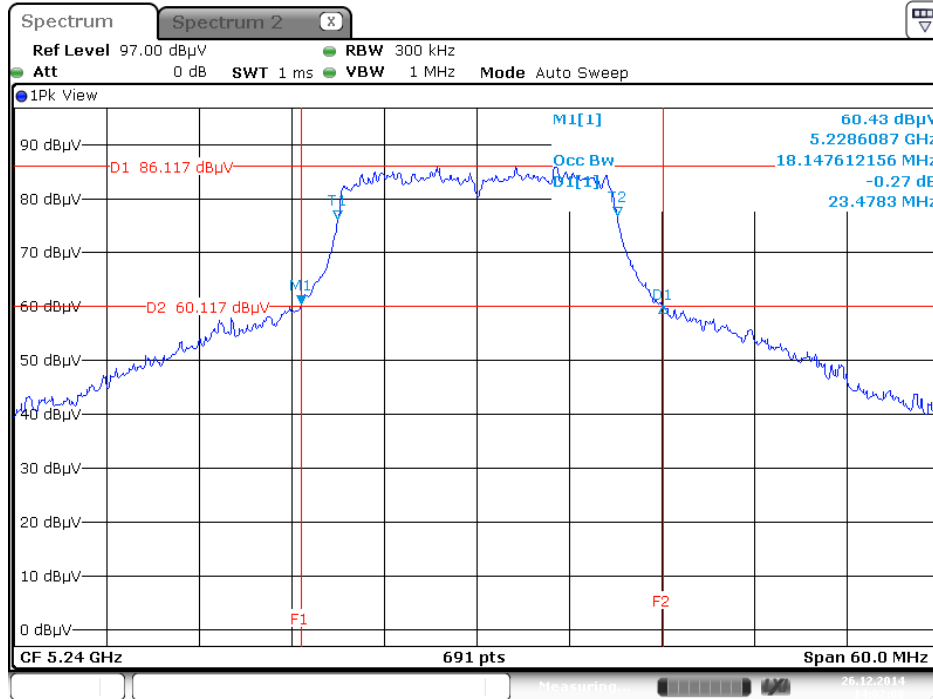


Date: 26 DEC. 2014 14:02:08

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5745 MHz**

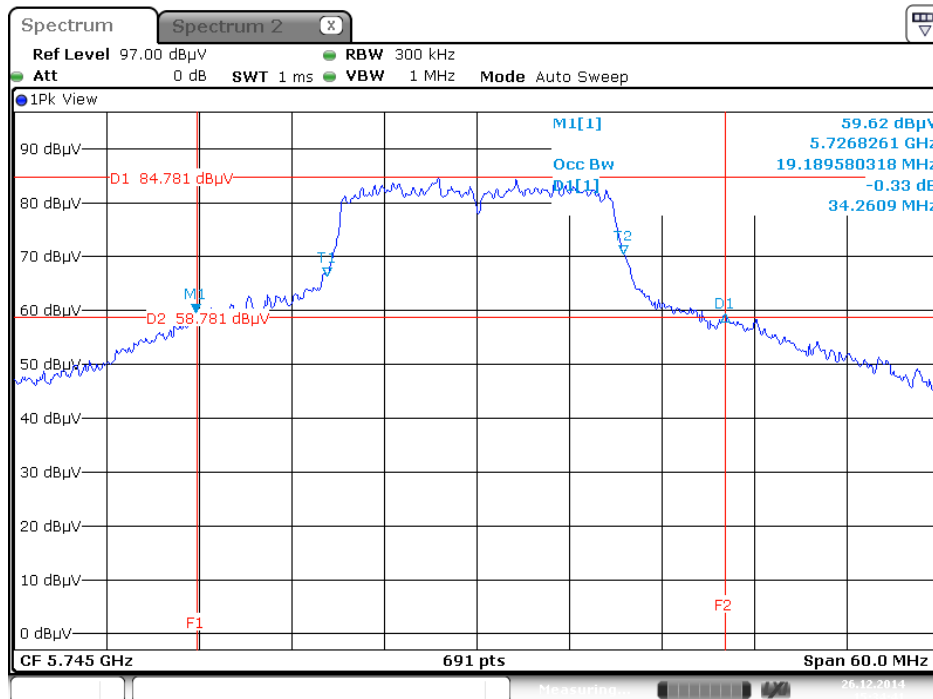


Date: 26 DEC. 2014 15:34:41

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5785 MHz**

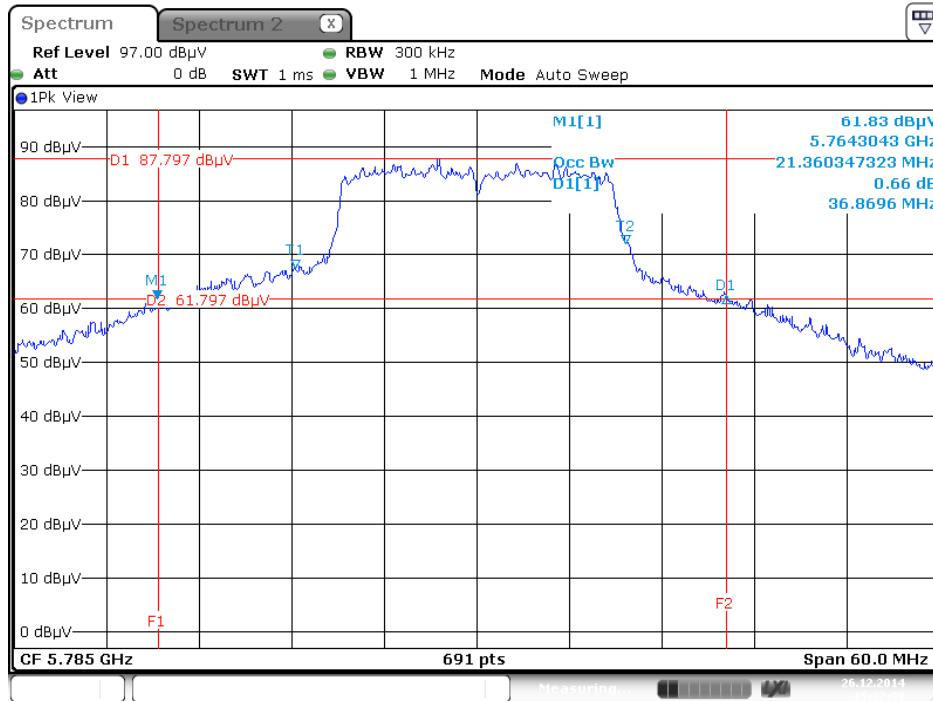


Date: 26 DEC. 2014 15:37:09

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5825 MHz**

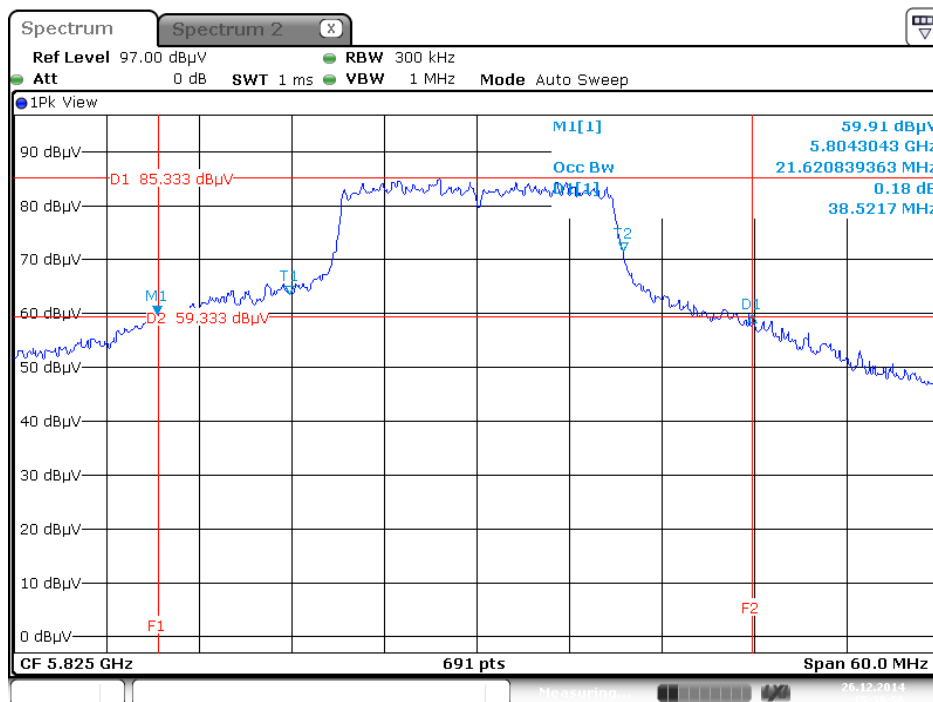


Date: 26 DEC. 2014 15:39:56

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5190 MHz**

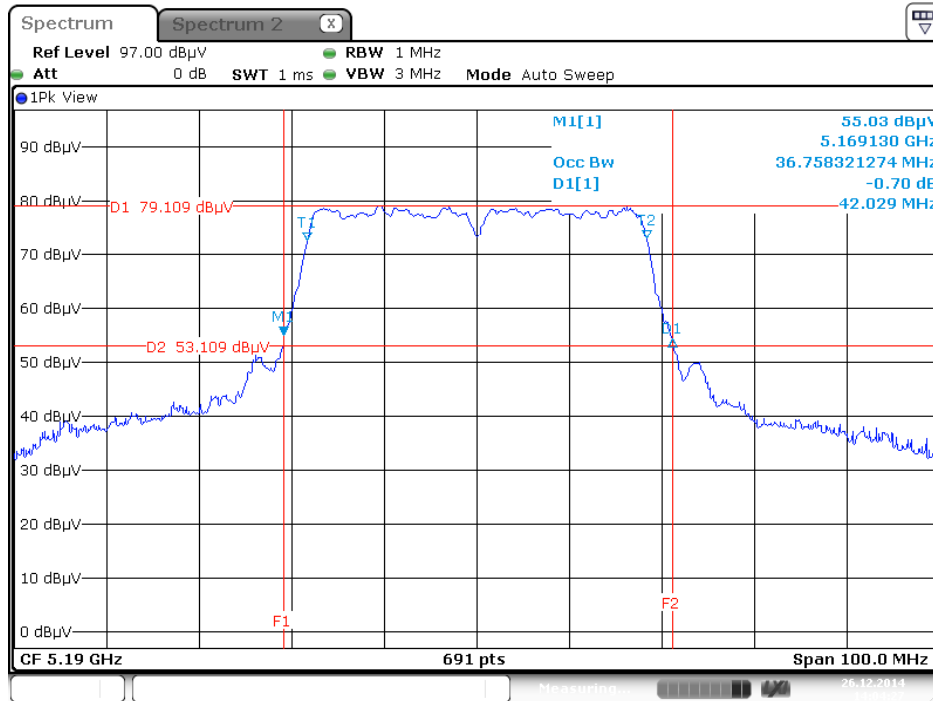


Date: 26 DEC. 2014 14:04:27

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5230 MHz**

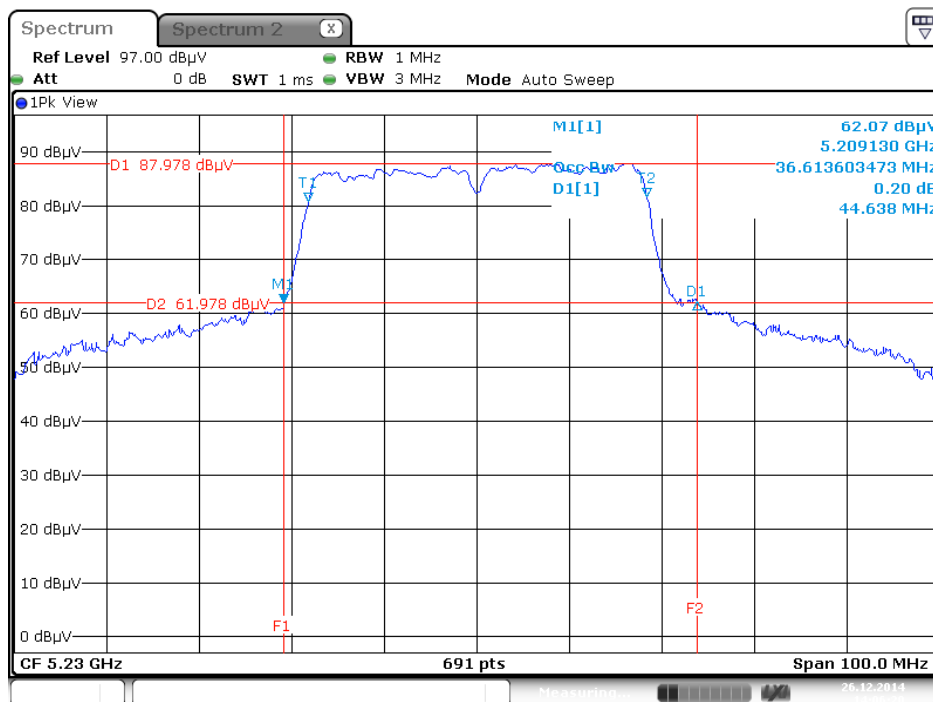


Date: 26 DEC. 2014 14:06:21

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5755 MHz**

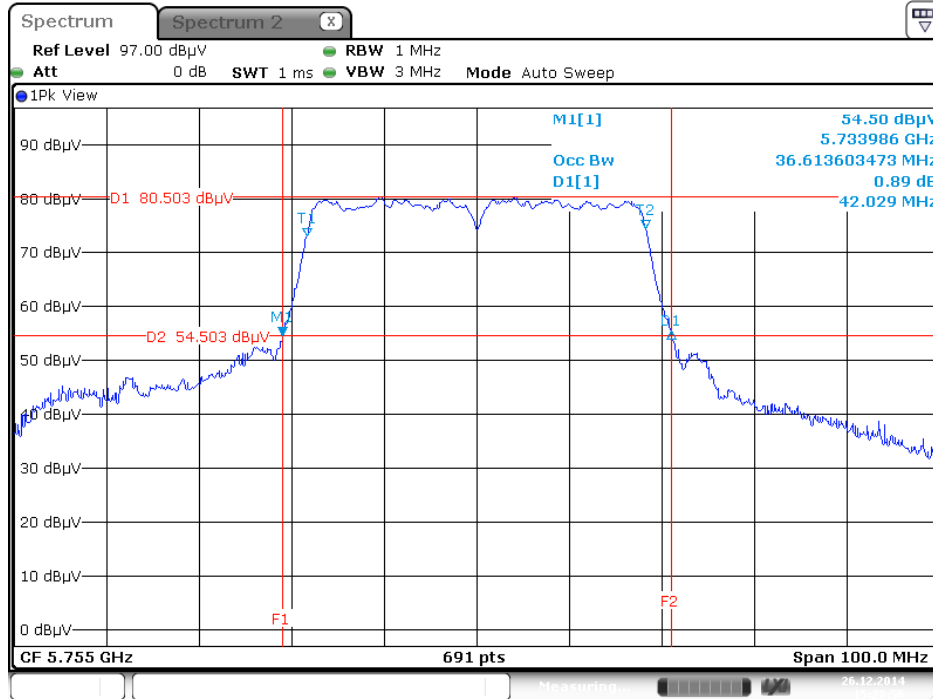


Date: 26 DEC. 2014 15:28:56

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5795 MHz**

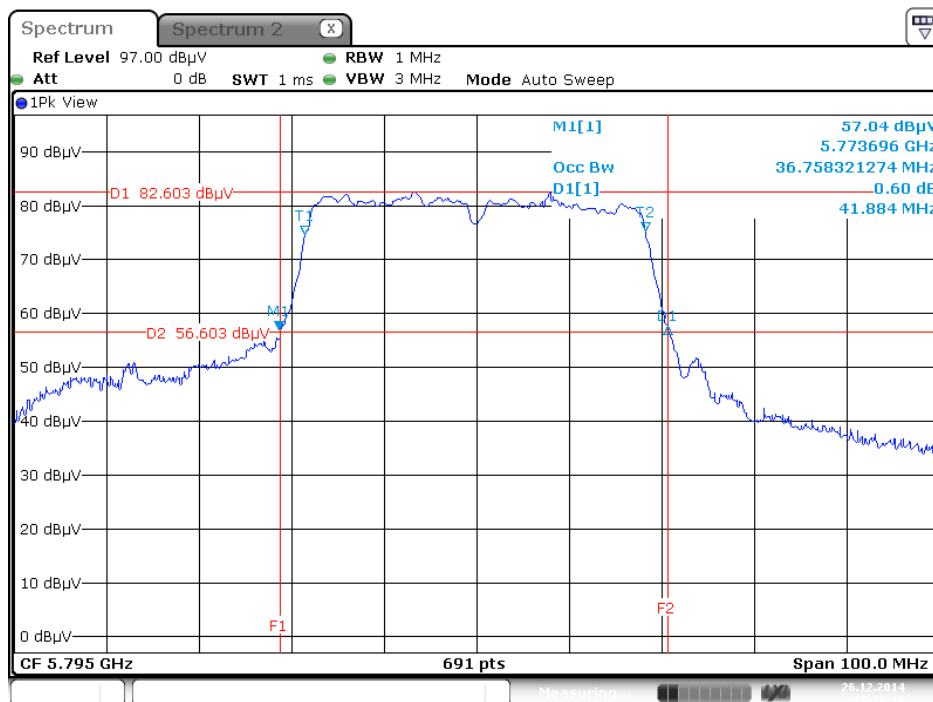


Date: 26 DEC. 2014 15:26:11


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5180 MHz

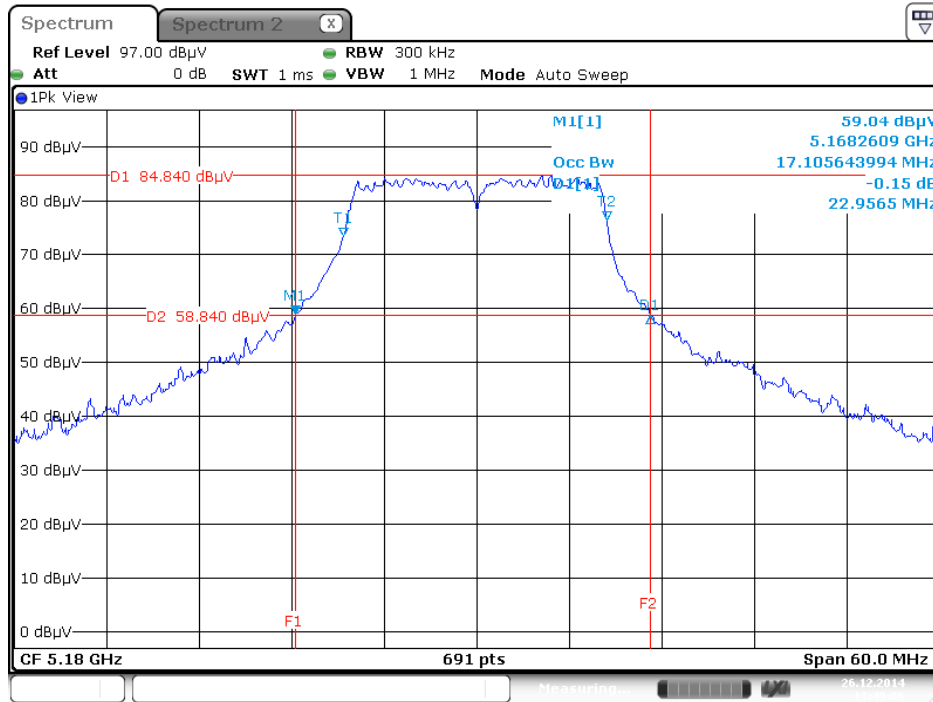


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5200 MHz

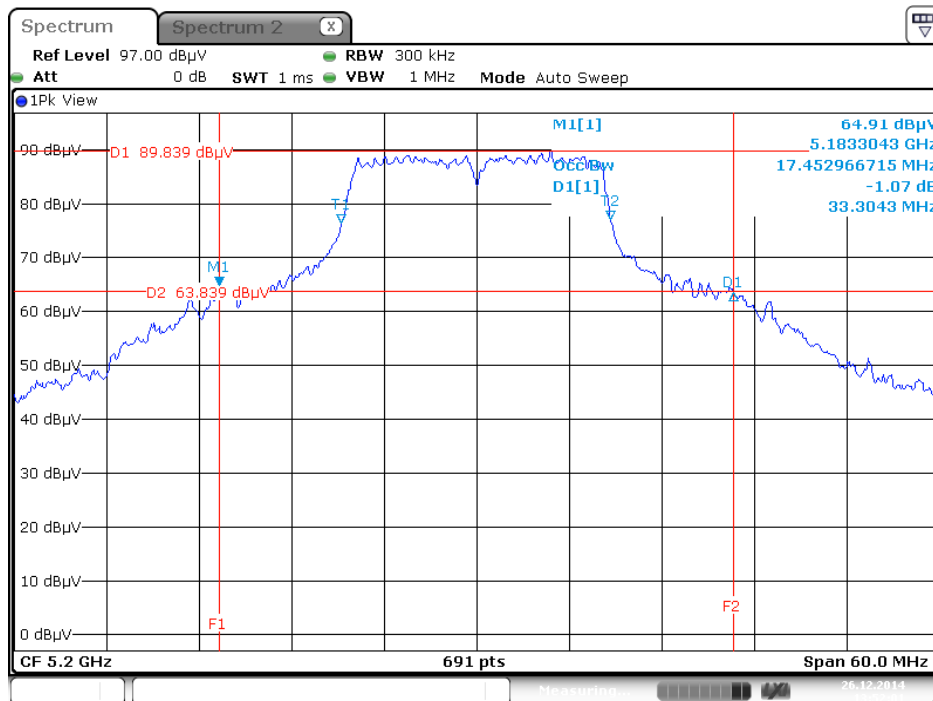


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5240 MHz

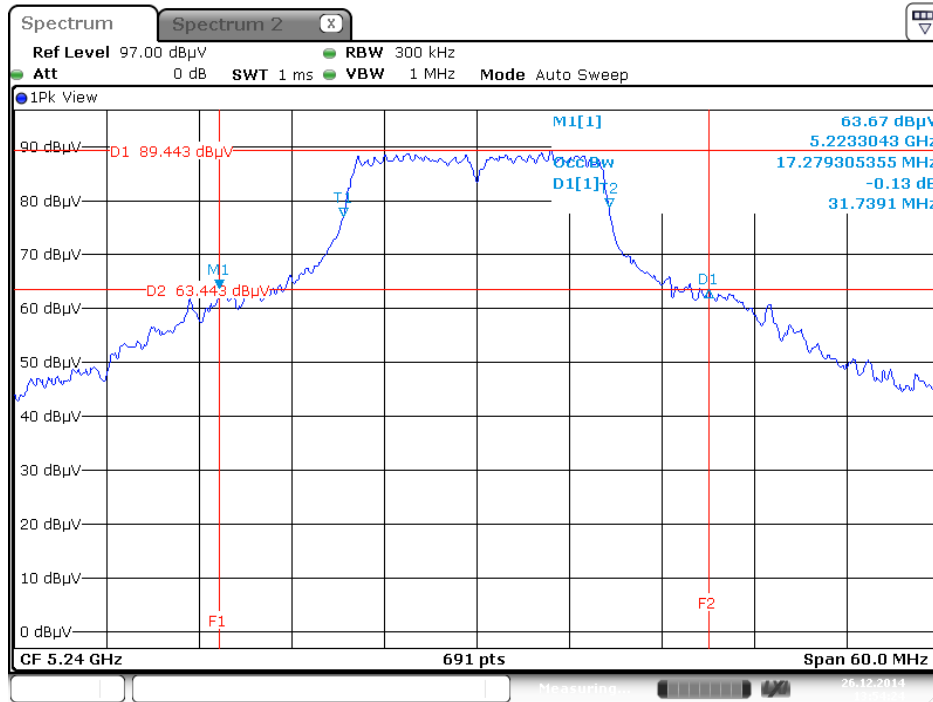


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5745 MHz

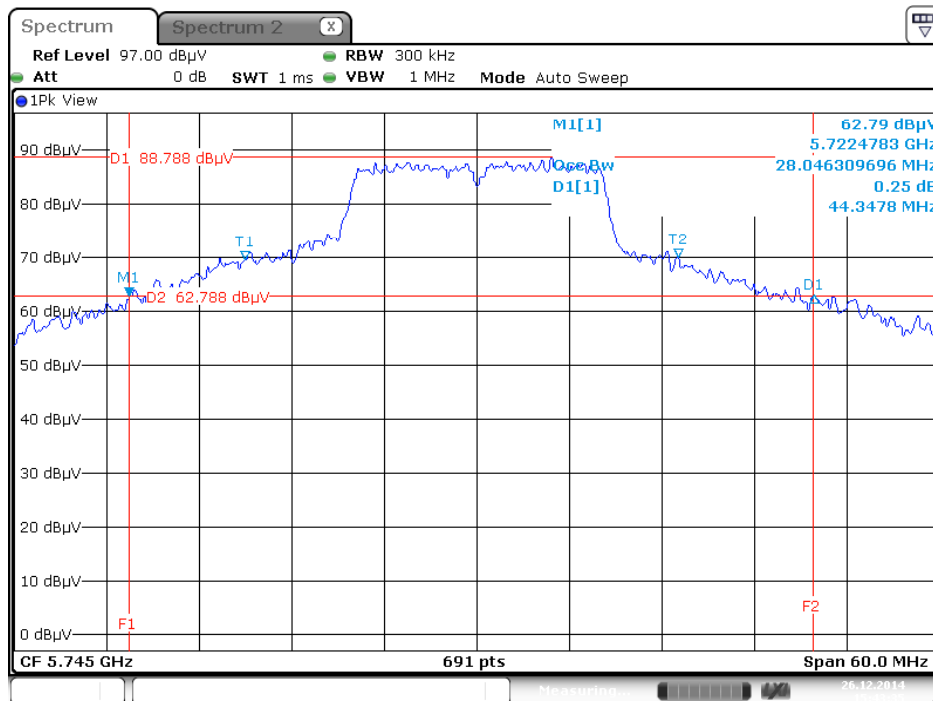

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5785 MHz

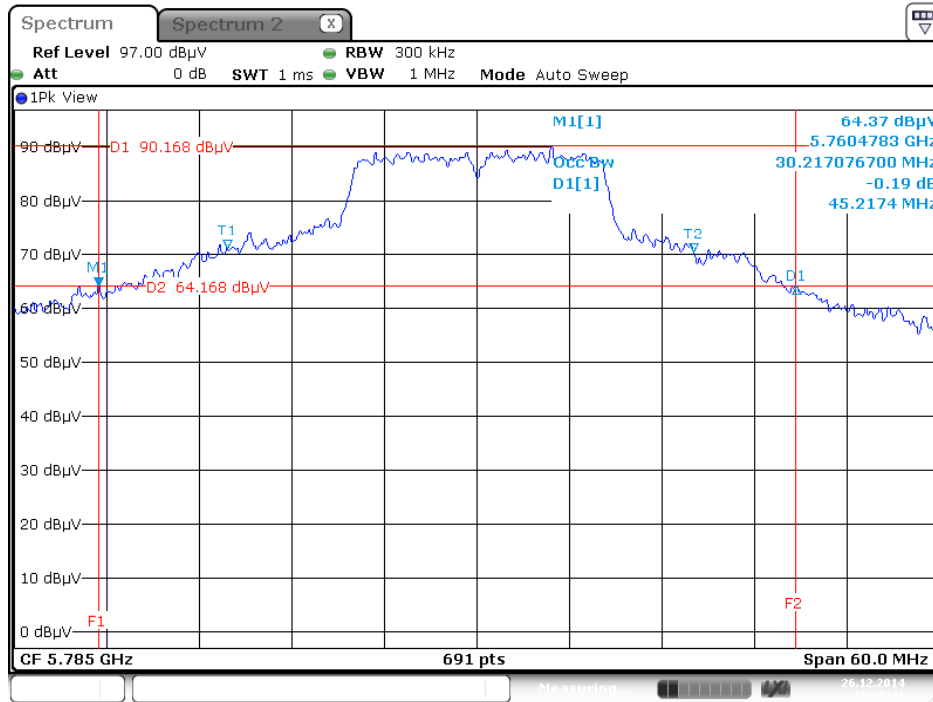

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5825 MHz

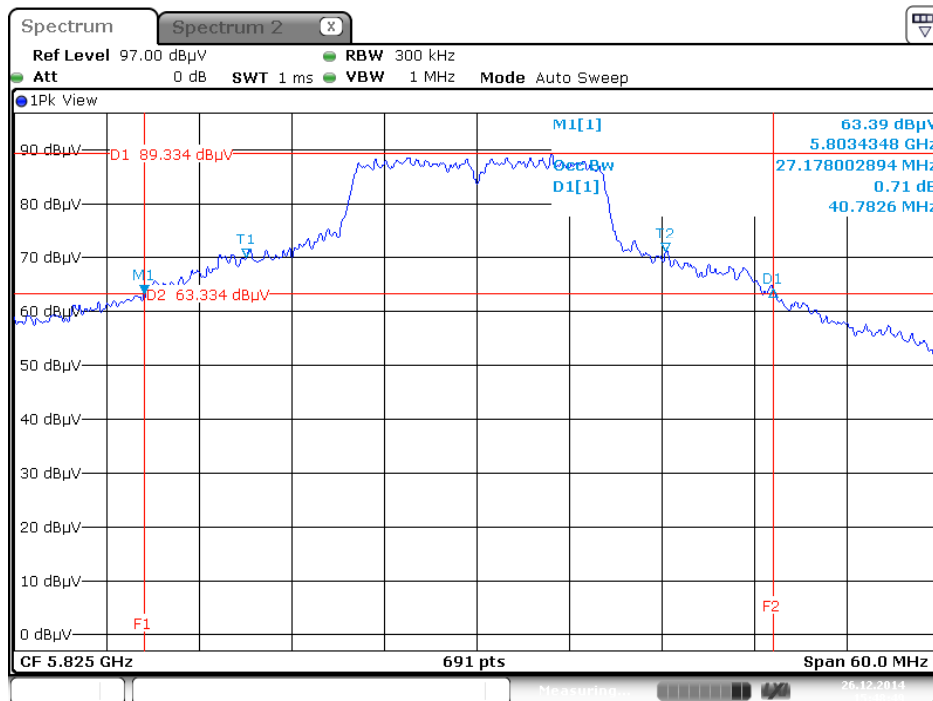

### 4.3. 6dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11n

##### Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.74	500	Complies
157	5785 MHz	17.74	500	Complies
165	5825 MHz	17.68	500	Complies

##### Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.29	500	Complies
159	5795 MHz	36.41	500	Complies

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a / Ant. 0**

<b>Channel</b>	<b>Frequency</b>	<b>6dB Bandwidth (MHz)</b>	<b>Min. Limit (kHz)</b>	<b>Test Result</b>
149	5745 MHz	16.58	500	<b>Complies</b>
157	5785 MHz	16.58	500	<b>Complies</b>
165	5825 MHz	16.58	500	<b>Complies</b>


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5825 MHz

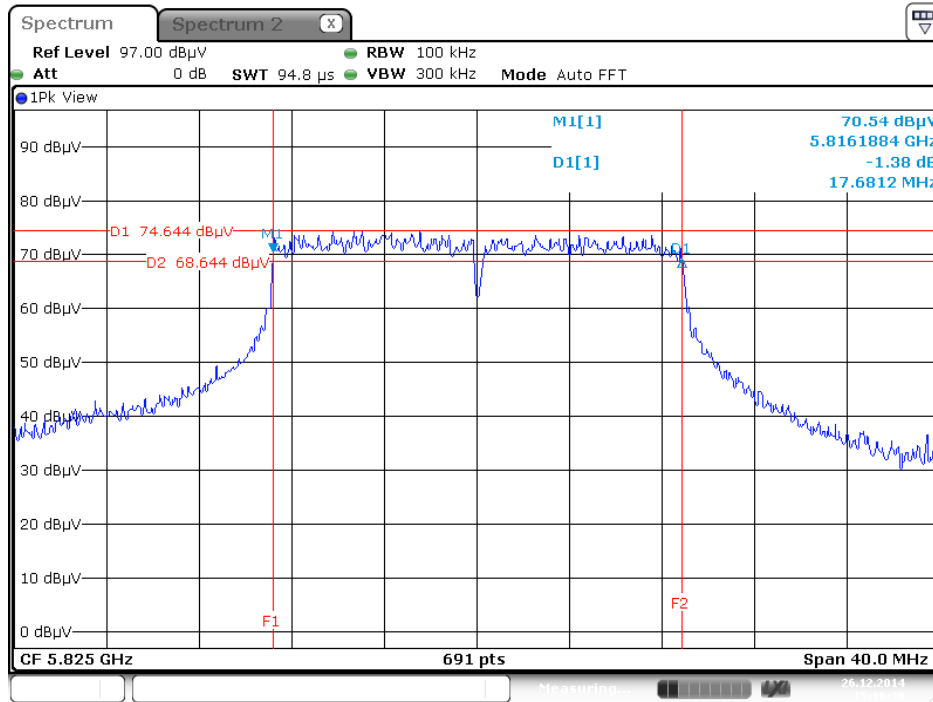

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5755MHz

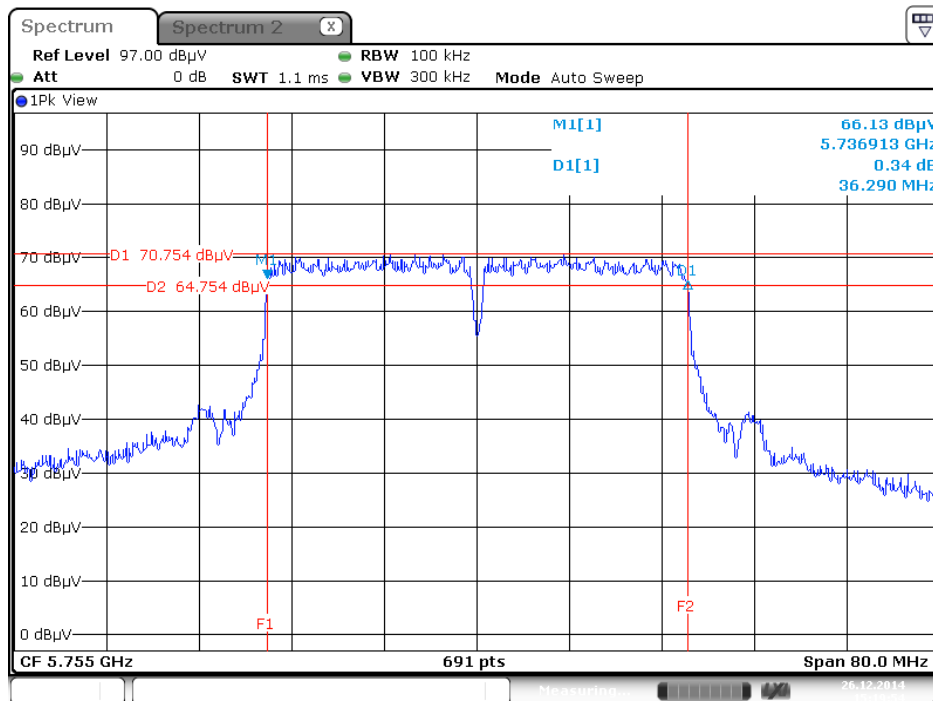

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 0 / 5745 MHz

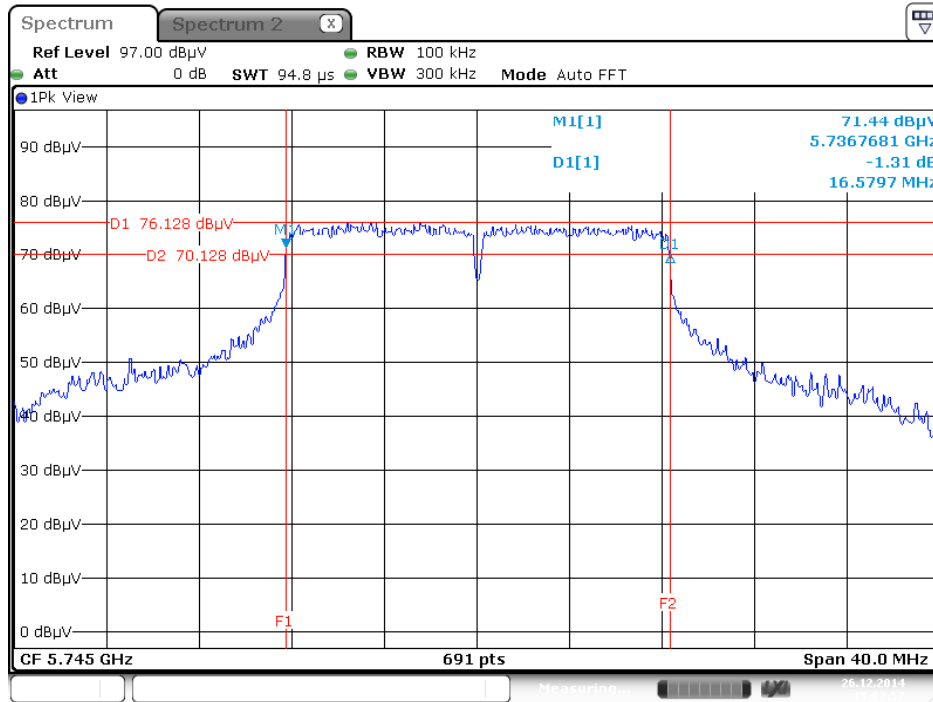

Date: 26 DEC. 2014 15:03:57

## 4.4. Maximum Conducted Output Power Measurement

### 4.4.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input checked="" type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input type="checkbox"/> Mobile and portable client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

<input checked="" type="checkbox"/>	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
-------------------------------------	----------------	--

#### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.4.4. Test Setup Layout



#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Dec. 26, 2014		

##### Configuration IEEE 802.11n MCS8 HT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 0	Ant. 1	Total		
36	5180 MHz	20.86	20.22	23.56	29.70	Complies
40	5200 MHz	20.16	20.01	23.10	29.70	Complies
48	5240 MHz	20.06	19.84	22.96	29.70	Complies
149	5745 MHz	15.88	15.69	18.80	29.70	Complies
157	5785 MHz	16.31	16.18	19.26	29.70	Complies
165	5825 MHz	15.62	15.69	18.67	29.70	Complies

Note: Max. antenna gain=6.30dBi >6dBi, so limit=30 – (6.30 – 6)=29.70dBm.

##### Configuration IEEE 802.11n MCS8 HT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 0	Ant. 1	Total		
38	5190 MHz	14.01	13.69	16.86	29.70	Complies
46	5230 MHz	20.22	20.28	23.26	29.70	Complies
151	5755 MHz	14.44	14.57	17.52	29.70	Complies
159	5795 MHz	15.87	16.10	19.00	29.70	Complies

Note: Max. antenna gain=6.30dBi >6dBi, so limit=30 – (6.30 – 6)=29.70dBm.



<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Dec. 26, 2014		

**Configuration IEEE 802.11a / Ant. 0**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	17.56	29.70	<b>Complies</b>
40	5200 MHz	21.64	29.70	<b>Complies</b>
48	5240 MHz	21.32	29.70	<b>Complies</b>
149	5745 MHz	15.62	29.70	<b>Complies</b>
157	5785 MHz	18.52	29.70	<b>Complies</b>
165	5825 MHz	17.01	29.70	<b>Complies</b>

Note: Antenna gain=6.30dBi > 6dBi, so limit=30 – (6.30 – 6)=29.70dBm.

## 4.5. Power Spectral Density Measurement

### 4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

For 5.15-5.25 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

For 5.725~5.85 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$RBW \geq 1/T$
VBW	$VBW \geq 3 RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

### 4.5.3. Test Procedures

For 5.15-5.25 GHz


1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

For 5.725~5.85 GHz


1. Test procedures refer KDB662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.5.4. Test Setup Layout

For 5.15-5.25 GHz

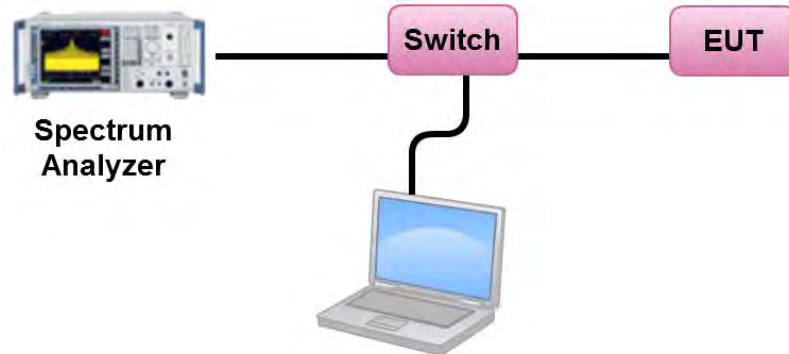

For 5.725~5.85 GHz

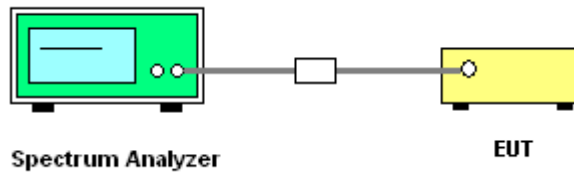

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Dec. 26, 2014		

##### Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.06	16.70	Complies
40	5200 MHz	9.08	16.70	Complies
48	5240 MHz	9.20	16.70	Complies

Note: Directional gain =  $10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SIG}} \left\{ \sum_{k=1}^{N_{ANT}} S_{jk} \right\}^2}{N_{ANT}} \right] = 6.30\text{dBi} > 6\text{dBi}$ , so limit =  $17 - (6.30 - 6) = 16.70\text{dBm/MHz}$ .

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor 3kHz to 500kHz	Total Power Density dBm/500kHz	Power Density Limit dBm/500kHz	Result
		Ant. 0	Ant. 1	Total				
149	5745 MHz	-10.02	-11.37	-7.63	22.22	14.59	29.70	Complies
157	5785 MHz	-11.39	-10.73	-8.04	22.22	14.18	29.70	Complies
165	5825 MHz	-13.96	-14.16	-11.05	22.22	11.17	29.70	Complies

Note: Directional gain =  $10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SIG}} \left\{ \sum_{k=1}^{N_{ANT}} S_{jk} \right\}^2}{N_{ANT}} \right] = 6.30\text{dBi} > 6\text{dBi}$ , so limit =  $30 - (6.30 - 6) = 29.70\text{dBm/500kHz}$ .

**Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.26	16.70	Complies
46	5230 MHz	6.32	16.70	Complies

Note: Directional gain =  $10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.30\text{dBi} > 6\text{dBi}$ , so limit =  $17 - (6.30 - 6) = 16.70\text{dBm/MHz}$ .

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor 3kHz to 500kHz	Total Power Density dBm/500kHz	Power Density Limit dBm/500kHz	Result
		Ant. 0	Ant. 1	Total				
151	5755 MHz	-16.04	-16.78	-13.38	22.22	8.84	29.70	Complies
159	5795 MHz	-14.51	-15.61	-12.01	22.22	10.21	29.70	Complies

Note: Directional gain =  $10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.30\text{dBi} > 6\text{dBi}$ , so limit =  $30 - (6.30 - 6) = 29.70\text{dBm/500kHz}$ .

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Dec. 26, 2014		

**Configuration IEEE 802.11a / Ant. 0**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.53	16.70	Complies
40	5200 MHz	8.63	16.70	Complies
48	5240 MHz	8.36	16.70	Complies

Note: Antenna gain=6.30dBi > 6dBi, so limit=17 – (6.30 – 6) = 16.70dBm/MHz.


Channel	Frequency	Power Density (dBm/3kHz)	BWCF factor	Total Power Density	Power Density Limit	Result
			3kHz to 500kHz			
149	5745 MHz	-13.47	22.22	8.75	29.70	Complies
157	5785 MHz	-9.46	22.22	12.76	29.70	Complies
165	5825 MHz	-11.94	22.22	10.28	29.70	Complies

Note: Antenna gain=6.30dBi > 6dBi, so limit=30 – (6.30 – 6) = 29.70dBm/500kHz.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 + Ant. 1 / 5180 MHz

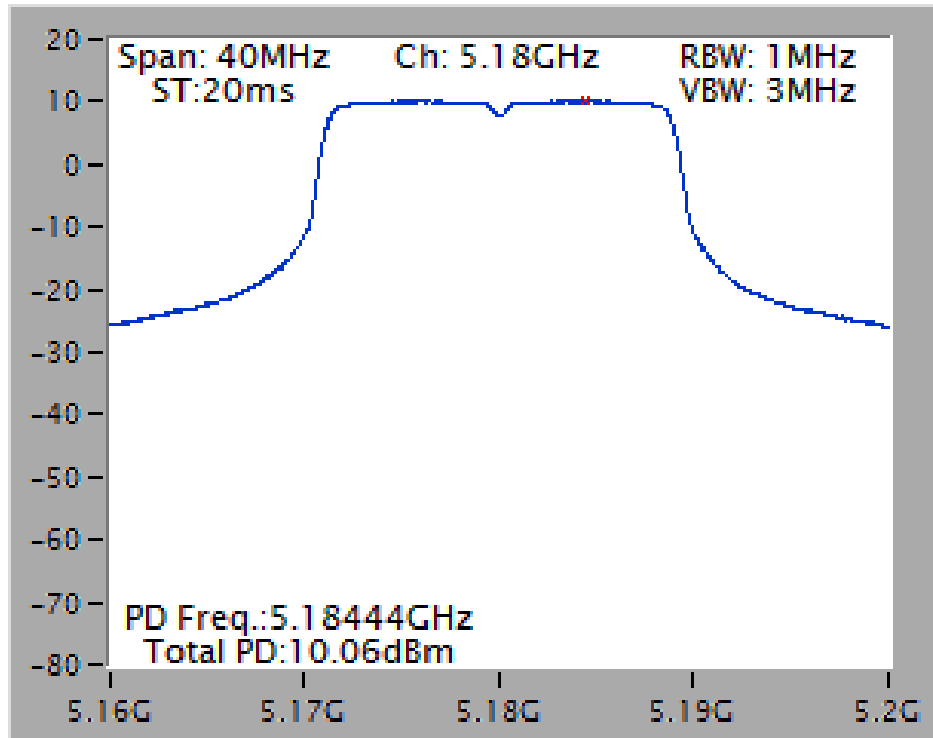


Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 0 / 5745 MHz

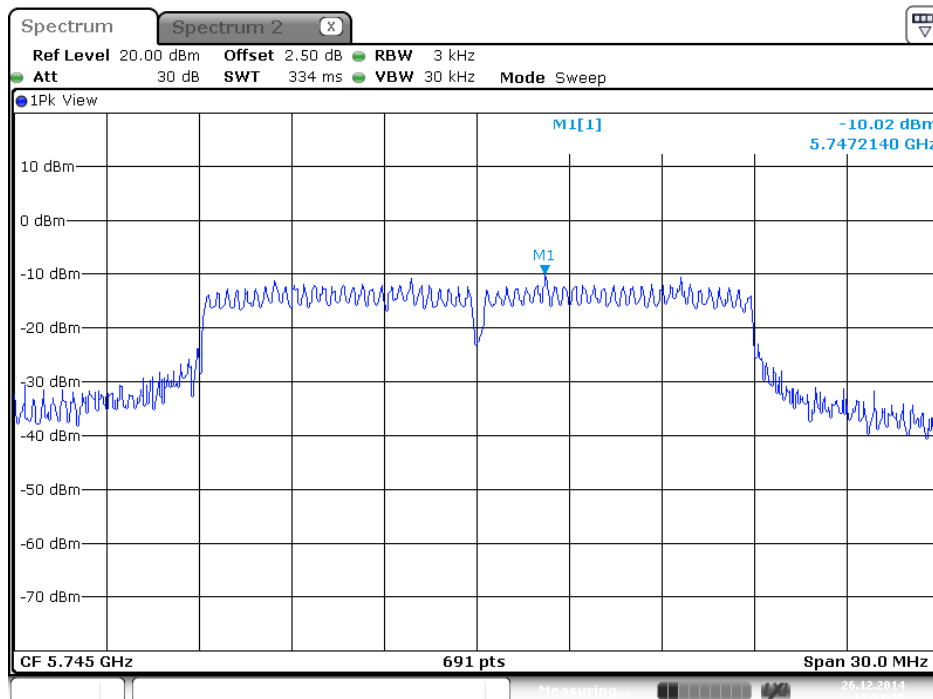





**Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / Ant. 1 / 5745 MHz**

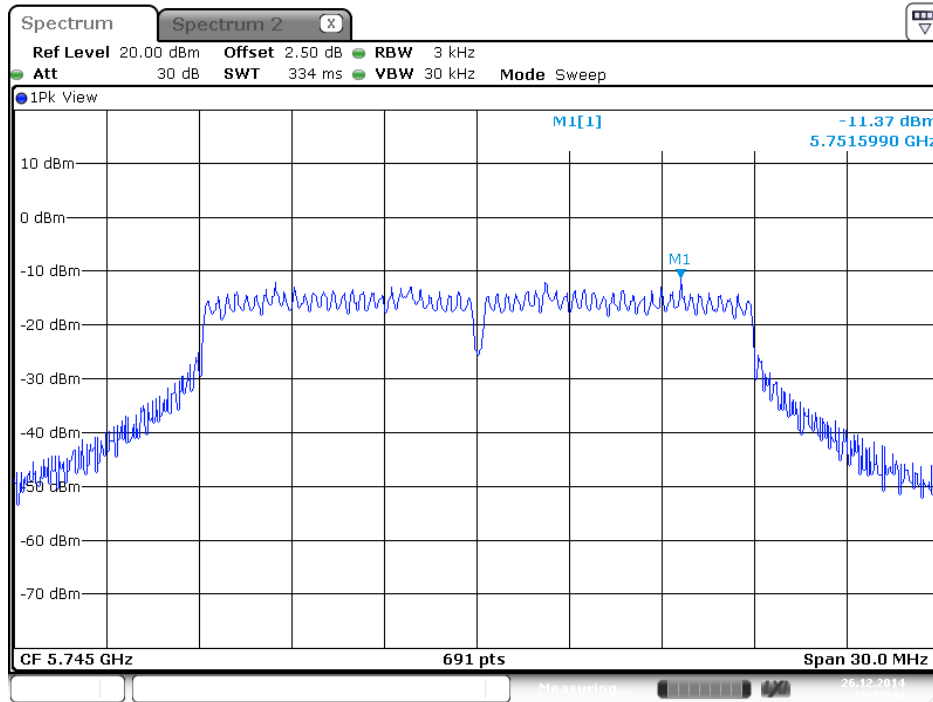


**Power Density Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 + Ant. 1 / 5230 MHz**

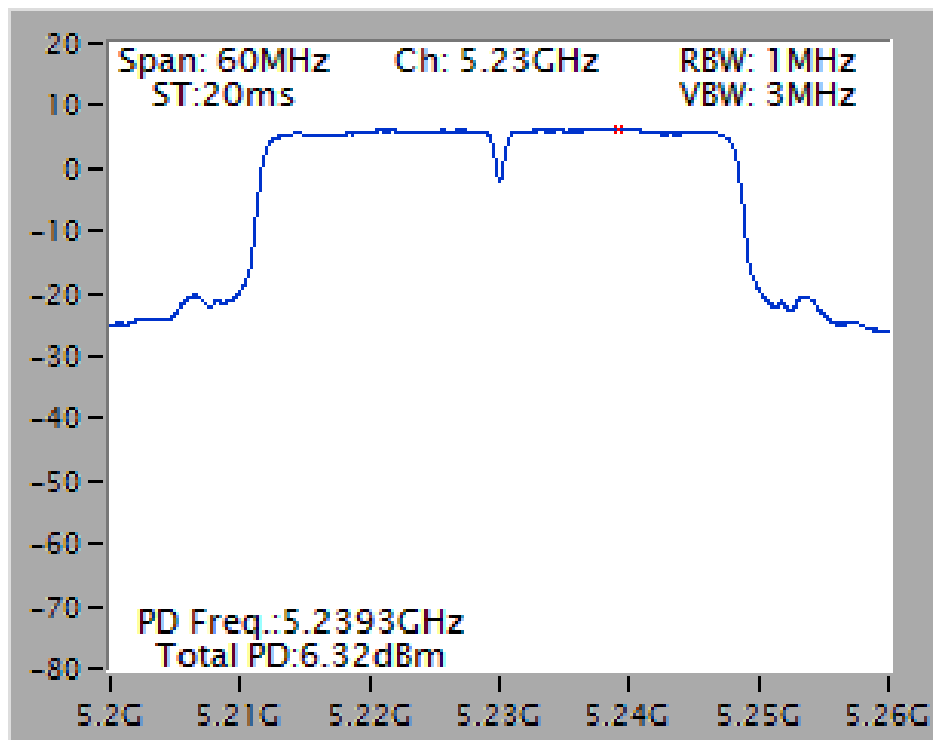


**Power Density Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 0 / 5795 MHz**

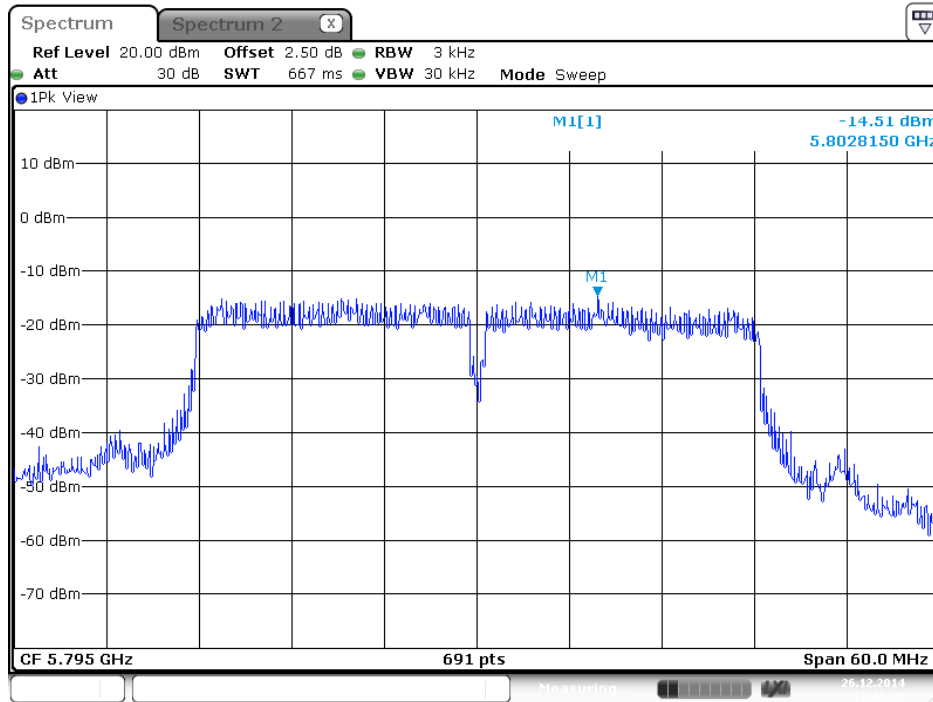


**Power Density Plot on Configuration IEEE 802.11n MCS8 HT40 / Ant. 1 / 5795 MHz**

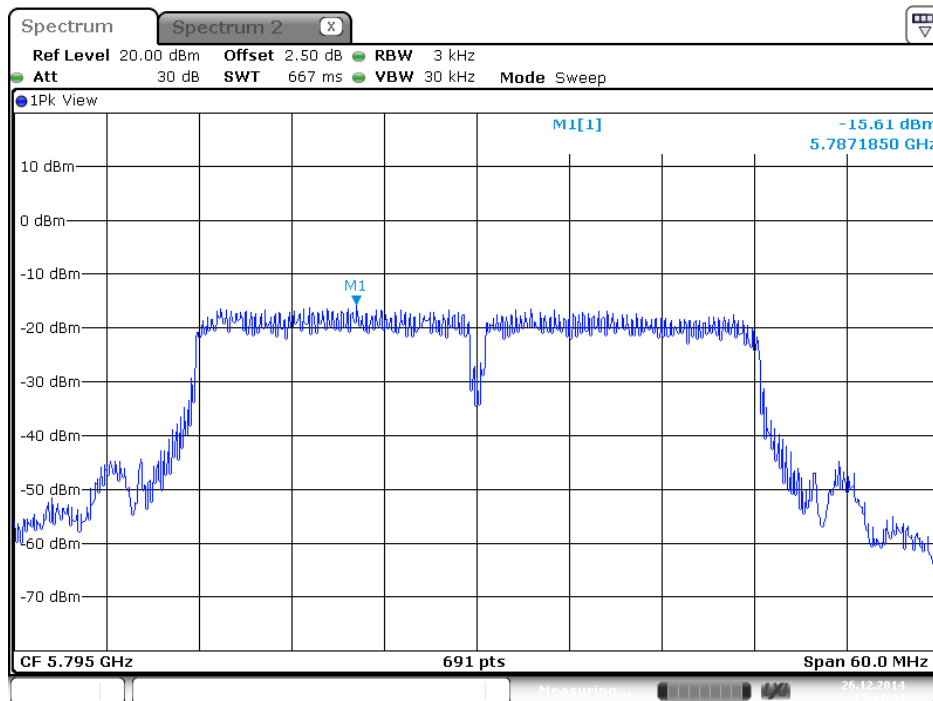

Power Density Plot on Configuration IEEE 802.11a / Ant. 0 + Ant. 1 / 5200 MHz

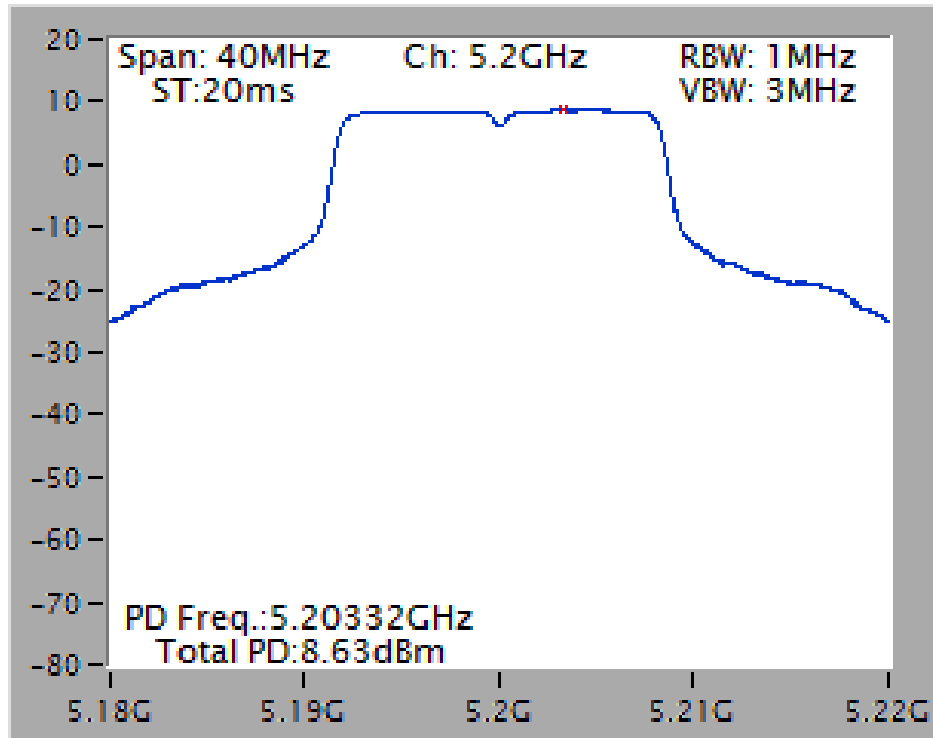

Power Density Plot on Configuration IEEE 802.11a / Ant. 0 / 5785 MHz

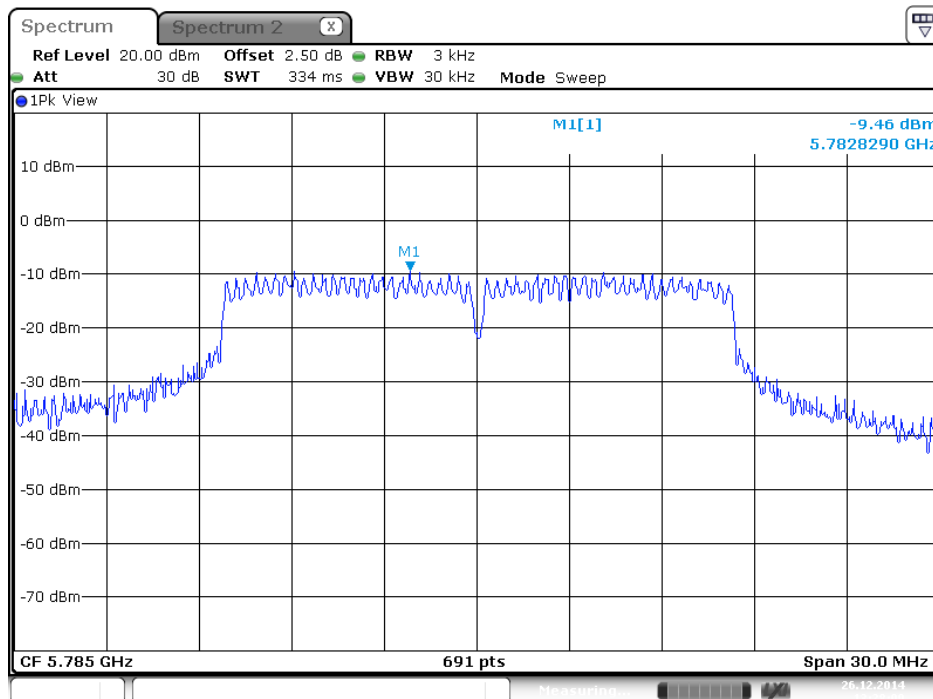

Date: 26 DEC 2014 13:28:09

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

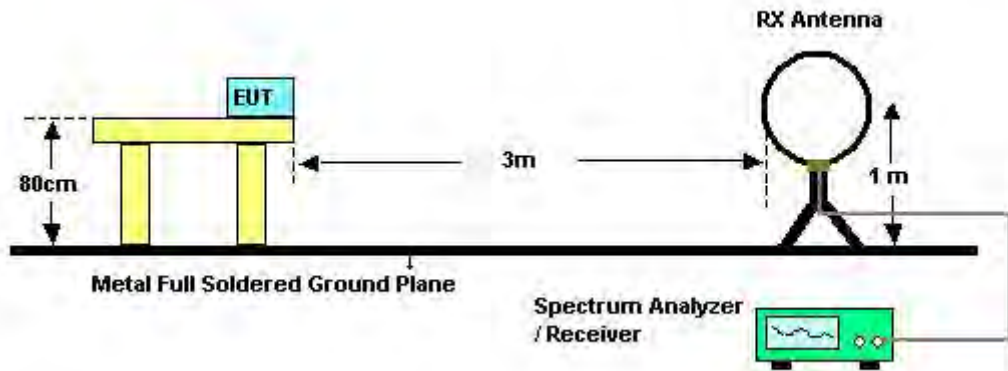

For Radiated Emissions: 30MHz~1GHz

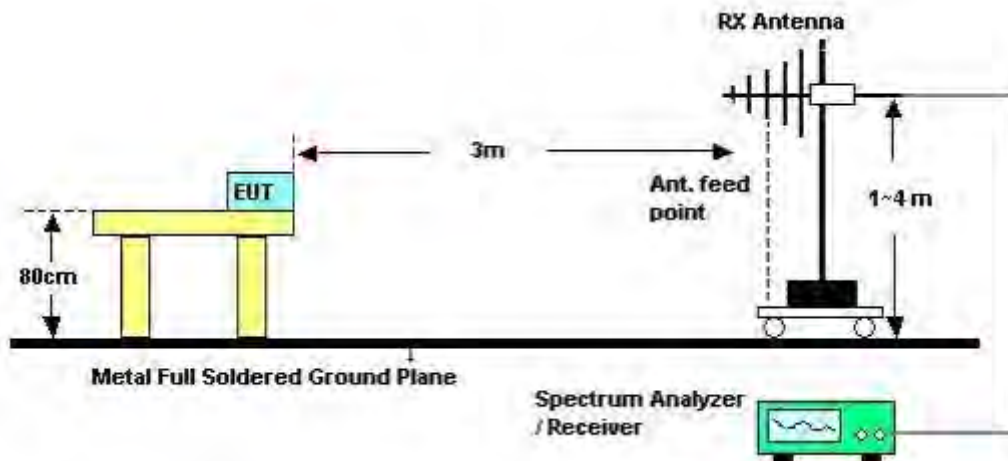

For Radiated Emissions: Above 1GHz

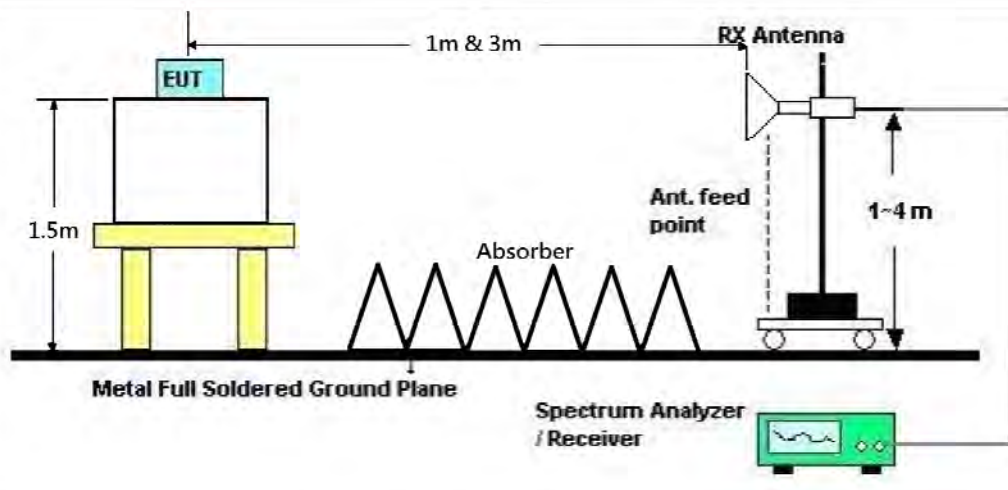

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Nov. 01, 2014		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	61%
Test Engineer	Taka Hsu	Configurations	Normal Link

Horizontal

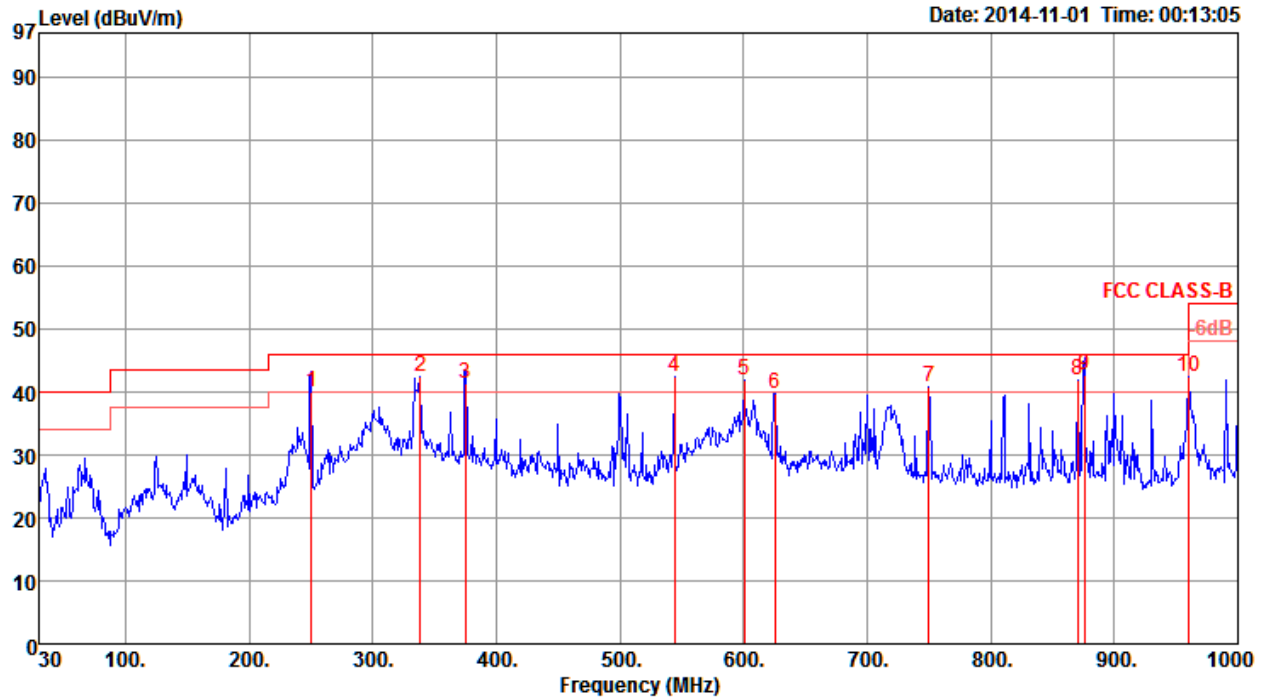

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	Pol/Phase
1	250.19	40.12	46.00	-5.88	52.47	1.40	13.20	26.95	17	126	HORIZONTAL
2	338.46	42.46	46.00	-3.54	52.56	1.69	15.21	27.00	0	100	HORIZONTAL
3	375.32	41.40	46.00	-4.60	50.81	1.79	16.06	27.26	301	108	HORIZONTAL
4	544.10	42.46	46.00	-3.54	49.28	2.21	18.86	27.89	0	100	HORIZONTAL
5	600.36	41.83	46.00	-4.17	47.47	2.36	19.60	27.60	0	100	HORIZONTAL
6	625.58	39.83	46.00	-6.17	45.19	2.42	19.80	27.58	0	100	HORIZONTAL
7	749.74	40.83	46.00	-5.17	44.70	2.65	20.60	27.12	0	100	HORIZONTAL
8	870.02	41.96	46.00	-4.04	44.23	2.88	21.72	26.87	0	100	HORIZONTAL
9	875.84	42.67	46.00	-3.33	44.88	2.89	21.76	26.86	186	100	HORIZONTAL
10	960.00	42.52	46.00	-3.48	43.50	3.05	22.42	26.45	0	100	HORIZONTAL

**Vertical**

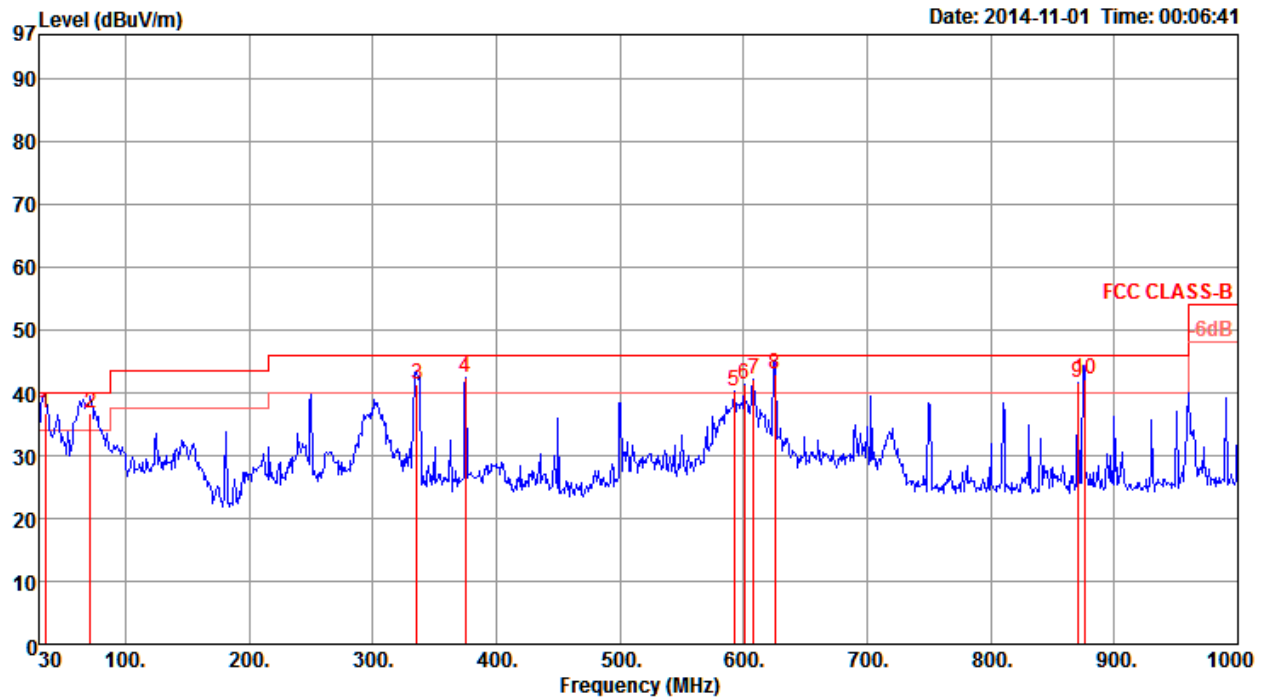

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
						dB	dB/m	dB			
1	34.85	36.74	40.00	-3.26	47.51	0.43	16.80	28.00	177	100	VERTICAL
2	71.71	36.82	40.00	-3.18	57.11	0.69	6.95	27.93	192	100	VERTICAL
3	335.55	41.36	46.00	-4.64	51.55	1.69	15.11	26.99	50	138	VERTICAL
4	375.32	42.35	46.00	-3.65	51.76	1.79	16.06	27.26	0	400	VERTICAL
5	592.60	40.31	46.00	-5.69	46.10	2.34	19.51	27.64	0	400	VERTICAL
6	600.36	41.33	46.00	-4.67	46.97	2.36	19.60	27.60	0	400	VERTICAL
7	608.12	42.21	46.00	-3.79	47.76	2.38	19.66	27.59	0	400	VERTICAL
8	625.58	42.99	46.00	-3.01	48.35	2.42	19.80	27.58	259	121	VERTICAL
9	870.02	41.58	46.00	-4.42	43.85	2.88	21.72	26.87	0	400	VERTICAL
10	875.84	42.28	46.00	-3.72	44.49	2.89	21.76	26.86	213	116	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 36 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15538.40	44.04	54.00	-9.96	30.74	10.77	38.12	35.59	Average	153	112	HORIZONTAL
2	15548.36	56.91	74.00	-17.09	43.60	10.78	38.12	35.59	Peak	153	112	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15542.56	44.48	54.00	-9.52	31.18	10.77	38.12	35.59	Average	178	253	VERTICAL
2	15543.00	56.97	74.00	-17.03	43.67	10.77	38.12	35.59	Peak	178	253	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 40 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15592.16	57.63	74.00	-16.37	44.39	10.78	38.04	35.58	Peak	113	333	HORIZONTAL
2	15604.44	44.63	54.00	-9.37	31.39	10.78	38.04	35.58	Average	113	333	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15595.44	58.21	74.00	-15.79	44.97	10.78	38.04	35.58	Peak	140	313	VERTICAL
2	15597.20	45.86	54.00	-8.14	32.62	10.78	38.04	35.58	Average	140	313	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 48 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15717.56	43.91	54.00	-10.09	30.83	10.79	37.85	35.56	Average	158	85	HORIZONTAL
2	15722.92	56.66	74.00	-17.34	43.58	10.79	37.85	35.56	Peak	158	85	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15711.68	56.99	74.00	-17.01	43.91	10.79	37.85	35.56	Peak	172	189	VERTICAL
2	15724.20	44.35	54.00	-9.65	31.27	10.79	37.85	35.56	Average	172	189	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 149 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11486.92	54.57	74.00	-19.43	40.91	9.24	39.50	35.08	Peak	161	216	HORIZONTAL
2	11488.72	42.04	54.00	-11.96	28.38	9.24	39.50	35.08	Average	161	216	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11484.76	41.97	54.00	-12.03	28.31	9.24	39.50	35.08	Average	141	94	VERTICAL
2	11487.24	54.62	74.00	-19.38	40.96	9.24	39.50	35.08	Peak	141	94	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 157 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11571.60	41.58	54.00	-12.42	27.94	9.26	39.47	35.09	Average	140	284	HORIZONTAL
2	11577.52	54.61	74.00	-19.39	40.96	9.26	39.47	35.08	Peak	140	268	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11570.68	54.36	74.00	-19.64	40.72	9.26	39.47	35.09	Peak	163	238	VERTICAL
2	11578.60	41.86	54.00	-12.14	28.21	9.26	39.47	35.08	Average	163	238	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 165 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11645.68	42.30	54.00	-11.70	28.65	9.28	39.44	35.07	Average	166	232	HORIZONTAL
2	11653.12	55.23	74.00	-18.77	41.58	9.28	39.44	35.07	Peak	166	232	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11644.92	55.15	74.00	-18.85	41.50	9.28	39.44	35.07	Peak	205	140	VERTICAL
2	11654.28	42.17	54.00	-11.83	28.52	9.28	39.44	35.07	Average	205	140	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 38 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15572.88	56.90	74.00	-17.10	43.63	10.78	38.07	35.58	Peak	150	353	HORIZONTAL
2	15575.36	44.04	54.00	-9.96	30.77	10.78	38.07	35.58	Average	150	353	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15575.76	57.74	74.00	-16.26	44.47	10.78	38.07	35.58	Peak	130	280	VERTICAL
2	15577.52	43.93	54.00	-10.07	30.66	10.78	38.07	35.58	Average	130	280	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 46 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15694.52	44.84	54.00	-9.16	31.73	10.79	37.88	35.56	Average	162	202	HORIZONTAL
2	15695.16	57.82	74.00	-16.18	44.71	10.79	37.88	35.56	Peak	162	202	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15680.60	44.74	54.00	-9.26	31.60	10.79	37.91	35.56	Average	159	226	VERTICAL
2	15699.68	57.49	74.00	-16.51	44.38	10.79	37.88	35.56	Peak	159	226	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 151 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11506.20	41.71	54.00	-12.29	28.06	9.25	39.50	35.10	Average	168	306	HORIZONTAL
2	11508.88	54.40	74.00	-19.60	40.75	9.25	39.50	35.10	Peak	169	306	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11501.00	41.94	54.00	-12.06	28.29	9.25	39.50	35.10	Average	208	120	VERTICAL
2	11509.84	54.90	74.00	-19.10	41.25	9.25	39.50	35.10	Peak	208	120	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 159 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11586.96	56.22	74.00	-17.78	42.56	9.27	39.47	35.08	Peak	163	241	HORIZONTAL
2	11591.44	42.09	54.00	-11.91	28.43	9.27	39.47	35.08	Average	163	241	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11581.08	40.48	54.00	-13.52	26.83	9.26	39.47	35.08	Average	190	198	VERTICAL
2	11593.64	55.23	74.00	-18.77	41.57	9.27	39.47	35.08	Peak	190	198	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 36 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15536.32	43.97	54.00	-10.03	30.64	10.77	38.15	35.59	Average	114	246 HORIZONTAL
2	15542.56	57.08	74.00	-16.92	43.78	10.77	38.12	35.59	Peak	114	246 HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15533.56	44.12	54.00	-9.88	30.79	10.77	38.15	35.59	Average	171	236 VERTICAL
2	15533.76	56.96	74.00	-17.04	43.63	10.77	38.15	35.59	Peak	171	235 VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 40 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15597.36	59.31	74.00	-14.69	46.07	10.78	38.04	35.58	Peak	131	149	HORIZONTAL
2	15602.28	45.24	54.00	-8.76	32.00	10.78	38.04	35.58	Average	131	149	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15597.48	60.11	74.00	-13.89	46.87	10.78	38.04	35.58	Peak	149	290	VERTICAL
2	15598.52	46.94	54.00	-7.06	33.70	10.78	38.04	35.58	Average	149	290	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 48 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15593.24	56.70	74.00	-17.30	43.46	10.78	38.04	35.58	Peak	143	325	HORIZONTAL
2	15608.48	44.32	54.00	-9.68	31.10	10.78	38.01	35.57	Average	143	325	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.92	44.28	54.00	-9.72	31.04	10.78	38.04	35.58	Average	104	44	VERTICAL
2	15601.60	57.61	74.00	-16.39	44.37	10.78	38.04	35.58	Peak	104	44	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11491.00	42.18	54.00	-11.82	28.52	9.24	39.50	35.08	Average	164	251	HORIZONTAL
2	11495.84	55.09	74.00	-18.91	41.45	9.24	39.50	35.10	Peak	164	251	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11480.08	42.01	54.00	-11.99	28.36	9.23	39.50	35.08	Average	184	303	VERTICAL
2	11497.28	55.37	74.00	-18.63	41.73	9.24	39.50	35.10	Peak	184	303	VERTICAL





<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11572.32	42.42	54.00	-11.58	28.77	9.26	39.47	35.08	Average	158	205	HORIZONTAL
2	11576.32	54.94	74.00	-19.06	41.29	9.26	39.47	35.08	Peak	158	205	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11560.40	55.05	74.00	-18.95	41.40	9.26	39.48	35.09	Peak	191	234	VERTICAL
2	11577.92	42.02	54.00	-11.98	28.37	9.26	39.47	35.08	Average	191	234	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11640.48	55.15	74.00	-18.85	41.50	9.28	39.44	35.07	Peak	131	173	HORIZONTAL
2	11652.20	42.36	54.00	-11.64	28.71	9.28	39.44	35.07	Average	129	168	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11641.96	55.75	74.00	-18.25	42.10	9.28	39.44	35.07	Peak	176	236	VERTICAL
2	11645.88	42.14	54.00	-11.86	28.49	9.28	39.44	35.07	Average	175	236	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 0, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 36, 40, 48 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

##### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.77	54.00	-0.23	48.83	6.13	34.01	35.20	Average	144	358	HORIZONTAL
2	5150.00	69.08	74.00	-4.92	64.14	6.13	34.01	35.20	Peak	144	358	HORIZONTAL
3	5186.60	106.66			101.63	6.15	34.08	35.20	Average	144	358	HORIZONTAL
4	5186.60	117.85			112.82	6.15	34.08	35.20	Peak	144	358	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4961.60	63.46	74.00	-10.54	59.02	6.00	33.64	35.20	Peak	156	354	HORIZONTAL
2	4964.00	52.66	54.00	-1.34	48.22	6.00	33.64	35.20	Average	156	354	HORIZONTAL
3	5197.60	121.67			116.60	6.16	34.11	35.20	Peak	156	354	HORIZONTAL
4	5203.60	110.90			105.83	6.16	34.11	35.20	Average	156	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4994.00	64.88	74.00	-9.12	60.35	6.03	33.70	35.20	Peak	141	351	HORIZONTAL
2	4998.80	53.53	54.00	-0.47	49.00	6.03	33.70	35.20	Average	141	351	HORIZONTAL
3	5242.40	111.10			105.92	6.20	34.18	35.20	Average	141	351	HORIZONTAL
4	5244.80	121.29			116.11	6.20	34.18	35.20	Peak	141	351	HORIZONTAL
5	5406.40	52.33	54.00	-1.67	46.71	6.29	34.53	35.20	Average	141	351	HORIZONTAL
6	5407.60	64.13	74.00	-9.87	58.51	6.29	34.53	35.20	Peak	141	351	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT20 CH 149, 157, 165 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5714.40	68.08	68.20	-0.12	61.97	6.44	34.87	35.20 Peak	138	360	HORIZONTAL
2	5725.00	77.93	78.20	-0.27	71.79	6.45	34.89	35.20 Peak	138	360	HORIZONTAL
3	5749.80	105.01			98.86	6.45	34.90	35.20 Average	138	360	HORIZONTAL
4	5751.00	115.89			109.74	6.45	34.90	35.20 Peak	138	360	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5542.20	64.98	68.20	-3.22	59.07	6.37	34.74	35.20 Peak	149	357	HORIZONTAL
2	5722.60	60.31	78.20	-17.89	54.19	6.45	34.87	35.20 Peak	149	357	HORIZONTAL
3	5780.20	105.78			99.59	6.46	34.93	35.20 Average	149	357	HORIZONTAL
4	5783.80	115.89			109.70	6.46	34.93	35.20 Peak	149	357	HORIZONTAL
5	5857.20	59.52	78.20	-18.68	53.24	6.50	34.98	35.20 Peak	149	357	HORIZONTAL
6	5869.60	60.47	68.20	-7.73	54.18	6.50	34.99	35.20 Peak	149	357	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5668.20	63.98	68.20	-4.22	57.92	6.43	34.83	35.20 Peak	157	355	HORIZONTAL
2	5725.00	60.28	78.20	-17.92	54.14	6.45	34.89	35.20 Peak	157	355	HORIZONTAL
3	5822.60	114.14			107.91	6.48	34.95	35.20 Peak	157	355	HORIZONTAL
4	5827.40	104.37			98.12	6.48	34.97	35.20 Average	157	355	HORIZONTAL
5	5850.00	66.37	78.20	-11.83	60.10	6.49	34.98	35.20 Peak	157	355	HORIZONTAL
6	5899.60	61.16	68.20	-7.04	54.83	6.51	35.02	35.20 Peak	157	355	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 38, 46 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

### Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.00	67.14	74.00	-6.86	62.20	6.13	34.01	35.20	Peak	176	352	HORIZONTAL
2	5150.00	53.28	54.00	-0.72	48.34	6.13	34.01	35.20	Average	176	352	HORIZONTAL
3	5194.00	110.65			105.61	6.16	34.08	35.20	Peak	176	352	HORIZONTAL
4	5196.80	99.94			94.87	6.16	34.11	35.20	Average	176	352	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4996.40	62.95	74.00	-11.05	58.42	6.03	33.70	35.20	Peak	154	353	HORIZONTAL
2	4998.80	51.41	54.00	-2.59	46.88	6.03	33.70	35.20	Average	154	353	HORIZONTAL
3	5231.20	107.31			102.15	6.18	34.18	35.20	Average	154	353	HORIZONTAL
4	5233.60	118.25			113.09	6.18	34.18	35.20	Peak	154	353	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11n MCS8 HT40 CH 151, 159 / Ant. 0 + Ant. 1
<b>Test Date</b>	Dec. 13, 2014		

### Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5710.60	67.56	68.20	-0.64	61.45	6.44	34.87	35.20	Peak	159	359	HORIZONTAL
2	5721.40	72.11	78.20	-6.09	65.99	6.45	34.87	35.20	Peak	159	359	HORIZONTAL
3	5746.20	99.34			93.19	6.45	34.90	35.20	Average	159	359	HORIZONTAL
4	5763.00	109.76			103.59	6.46	34.91	35.20	Peak	159	359	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

### Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5572.20	62.44	68.20	-5.76	56.48	6.39	34.77	35.20	Peak	172	356	HORIZONTAL
2	5723.80	62.35	78.20	-15.85	56.21	6.45	34.89	35.20	Peak	172	356	HORIZONTAL
3	5789.00	101.43			95.23	6.47	34.93	35.20	Average	172	356	HORIZONTAL
4	5790.20	112.10			105.90	6.47	34.93	35.20	Peak	172	356	HORIZONTAL
5	5850.00	59.84	78.20	-18.36	53.57	6.49	34.98	35.20	Peak	172	356	HORIZONTAL
6	5860.00	59.67	68.20	-8.53	53.38	6.50	34.99	35.20	Peak	172	356	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Channel 36**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.72	54.00	-0.28	48.78	6.13	34.01	35.20	Average	154	358	HORIZONTAL
2	5150.00	69.34	74.00	-4.66	64.40	6.13	34.01	35.20	Peak	154	358	HORIZONTAL
3	5181.60	114.85			109.82	6.15	34.08	35.20	Peak	154	358	HORIZONTAL
4	5182.20	105.36			100.33	6.15	34.08	35.20	Average	154	358	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.40	67.47	74.00	-6.53	62.53	6.13	34.01	35.20	Peak	144	353	HORIZONTAL
2	5150.00	51.68	54.00	-2.32	46.74	6.13	34.01	35.20	Average	144	353	HORIZONTAL
3	5193.60	121.67			116.63	6.16	34.08	35.20	Peak	144	353	HORIZONTAL
4	5195.20	111.66			106.59	6.16	34.11	35.20	Average	144	353	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4992.00	63.99	74.00	-10.01	59.46	6.03	33.70	35.20	Peak	172	350	HORIZONTAL
2	4994.00	53.86	54.00	-0.14	49.33	6.03	33.70	35.20	Average	172	350	HORIZONTAL
3	5242.00	111.05			105.87	6.20	34.18	35.20	Average	172	350	HORIZONTAL
4	5243.00	120.92			115.74	6.20	34.18	35.20	Peak	172	350	HORIZONTAL
5	5400.00	64.33	74.00	-9.67	58.71	6.29	34.53	35.20	Peak	172	350	HORIZONTAL
6	5408.00	52.39	54.00	-1.61	46.77	6.29	34.53	35.20	Average	172	350	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Taka Hsu	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Ant. 0
<b>Test Date</b>	Dec. 13, 2014		

**Channel 149**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5713.80	66.96	68.20	-1.24	60.85	6.44	34.87	35.20	Peak	149	356	HORIZONTAL
2	5725.00	76.54	78.20	-1.66	70.40	6.45	34.89	35.20	Peak	149	356	HORIZONTAL
3	5746.40	113.88			107.73	6.45	34.90	35.20	Peak	149	356	HORIZONTAL
4	5747.00	104.22			98.07	6.45	34.90	35.20	Average	149	356	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5550.60	64.92	68.20	-3.28	59.00	6.38	34.74	35.20	Peak	149	359	HORIZONTAL
2	5722.60	62.85	78.20	-15.35	56.73	6.45	34.87	35.20	Peak	149	359	HORIZONTAL
3	5781.40	108.37			102.18	6.46	34.93	35.20	Average	149	359	HORIZONTAL
4	5781.40	117.72			111.53	6.46	34.93	35.20	Peak	149	359	HORIZONTAL
5	5859.60	60.31	78.20	-17.89	54.02	6.50	34.99	35.20	Peak	149	359	HORIZONTAL
6	5878.00	61.29	68.20	-6.91	54.98	6.50	35.01	35.20	Peak	149	359	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5671.80	64.71	68.20	-3.49	58.63	6.43	34.85	35.20	Peak	157	354	HORIZONTAL
2	5720.20	61.35	78.20	-16.85	55.23	6.45	34.87	35.20	Peak	157	354	HORIZONTAL
3	5826.20	115.63			109.38	6.48	34.97	35.20	Peak	157	354	HORIZONTAL
4	5828.60	106.43			100.18	6.48	34.97	35.20	Average	100	360	HORIZONTAL
5	5850.00	74.60	78.20	-3.60	68.33	6.49	34.98	35.20	Peak	157	354	HORIZONTAL
6	5860.00	67.80	68.20	-0.40	61.51	6.50	34.99	35.20	Peak	157	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5825 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

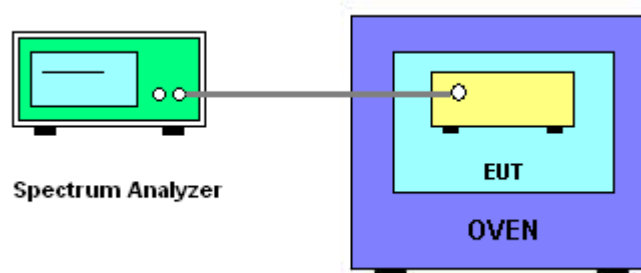

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Test Date</b>	Dec. 26, 2014

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)	
		5200 MHz
126.50	5200.0463	5785.0473
110.00	5200.0460	5785.0516
93.50	5200.0458	5785.0567
Max. Deviation (MHz)	0.0463	0.0567
Max. Deviation (ppm)	8.91	9.80

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	
		5200 MHz
0	5200.0651	5785.0431
10	5200.0531	5785.0483
20	5200.0470	5785.0516
30	5200.0463	5785.0529
40	5200.0321	5785.0536
Max. Deviation (MHz)	0.0651	0.0536
Max. Deviation (ppm)	12.52	9.27

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec.12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02009	1GHz ~ 26.5GHz	Dec. 17, 2014	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	--	26GHz ~ 40GHz	Feb. 17, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100080	9kHz ~ 40GHz	Oct. 15, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%