

EXHIBIT KK – Response to Item #2


FCC ID O2Z-BT1

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/05/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, high frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

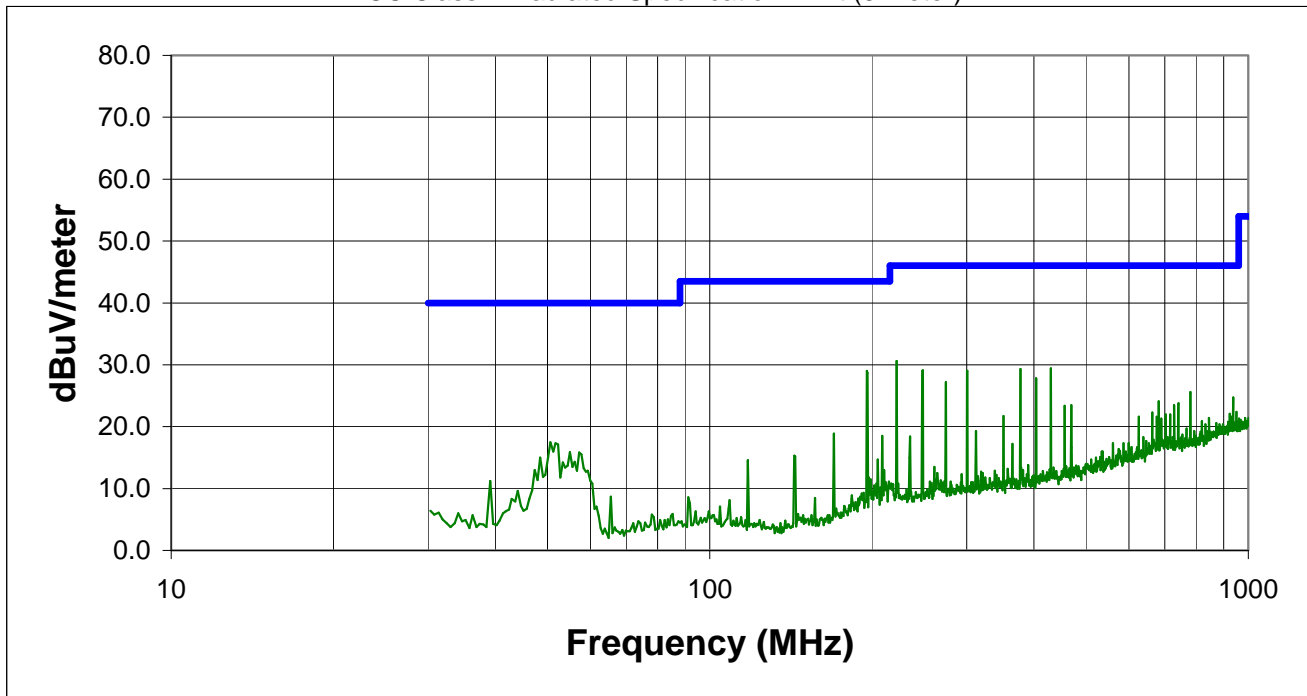

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	46.8	Hor.	-15.0	31.8	46.0	-14.2
195.549	49.2	Hor.	-20.2	29.0	43.5	-14.5
221.948	49.6	Hor.	-19.0	30.6	46.0	-15.4
377.392	44.9	Hor.	-14.5	30.4	46.0	-15.6
429.579	43.0	Hor.	-13.6	29.4	46.0	-16.6
248.073	47.3	Hor.	-18.2	29.1	46.0	-16.9
300.047	45.4	Hor.	-16.4	29.0	46.0	-17.0
324.851	44.2	Hor.	-15.6	28.6	46.0	-17.4
403.663	42.1	Hor.	-14.1	28.0	46.0	-18.0
274.197	44.8	Hor.	-17.6	27.2	46.0	-18.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/05/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, low frequency. Antenna 'D'</b>			

Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
--------------------------------	--------------------------

### Test System


### Test Equipment


FCC Class B Radiated Specification Limit (3 meter)

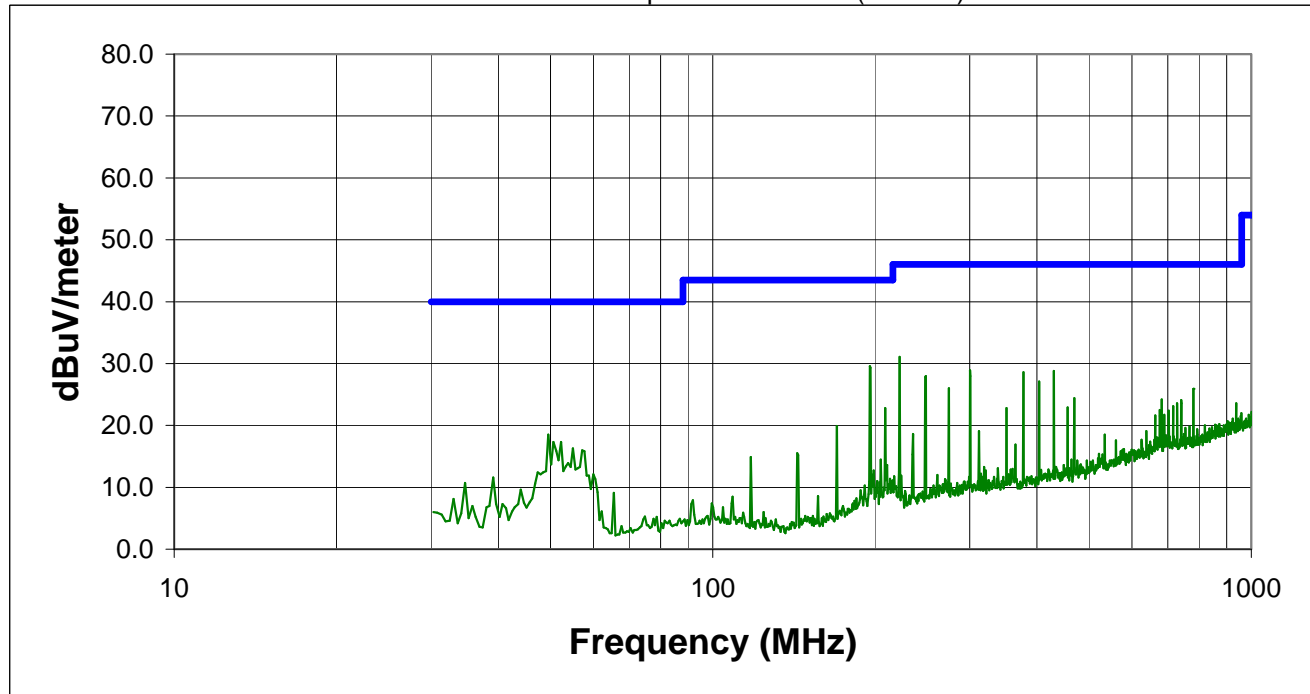


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
195.549	49.8	Hor.	-20.2	29.6	43.5	-13.9
351.122	47.0	Hor.	-15.0	32.0	46.0	-14.0
221.673	50.4	Hor.	-19.1	31.3	46.0	-14.7
377.392	43.4	Hor.	-14.5	28.9	46.0	-17.1
300.047	45.3	Hor.	-16.4	28.9	46.0	-17.1
429.579	42.4	Hor.	-13.6	28.8	46.0	-17.2
324.851	44.0	Hor.	-15.6	28.4	46.0	-17.6
248.073	46.2	Hor.	-18.2	28.0	46.0	-18.0
403.308	41.2	Hor.	-14.1	27.1	46.0	-18.9

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/05/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, mid frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

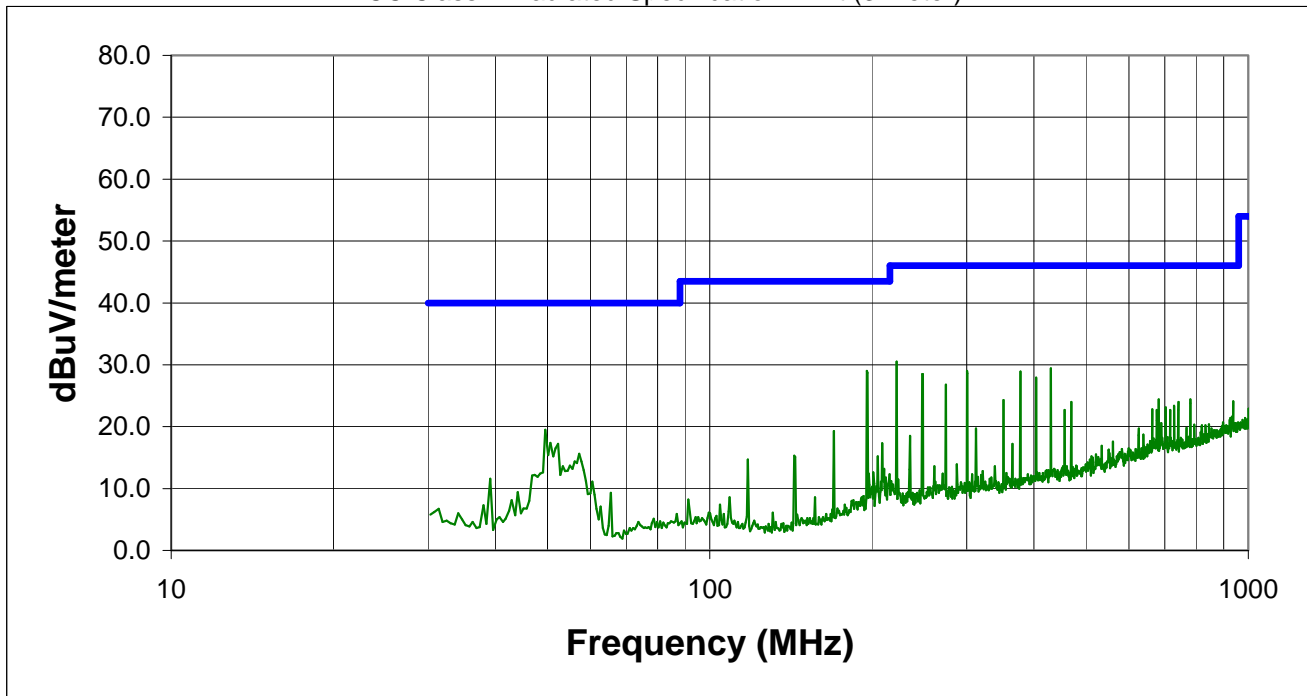


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	46.7	Hor.	-15.0	31.7	46.0	-14.3
195.549	49.2	Hor.	-20.2	29.0	43.5	-14.5
221.948	49.5	Hor.	-19.0	30.5	46.0	-15.5
377.392	44.6	Hor.	-14.5	30.1	46.0	-15.9
429.224	43.0	Hor.	-13.6	29.4	46.0	-16.6
300.047	45.4	Hor.	-16.4	29.0	46.0	-17.0
248.073	46.7	Hor.	-18.2	28.5	46.0	-17.5
324.851	43.8	Hor.	-15.6	28.2	46.0	-17.8
403.663	42.1	Hor.	-14.1	28.0	46.0	-18.0
273.922	44.7	Hor.	-17.6	27.1	46.0	-18.9

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>No hop mode, high frequency. Antenna 'D'</b>		
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

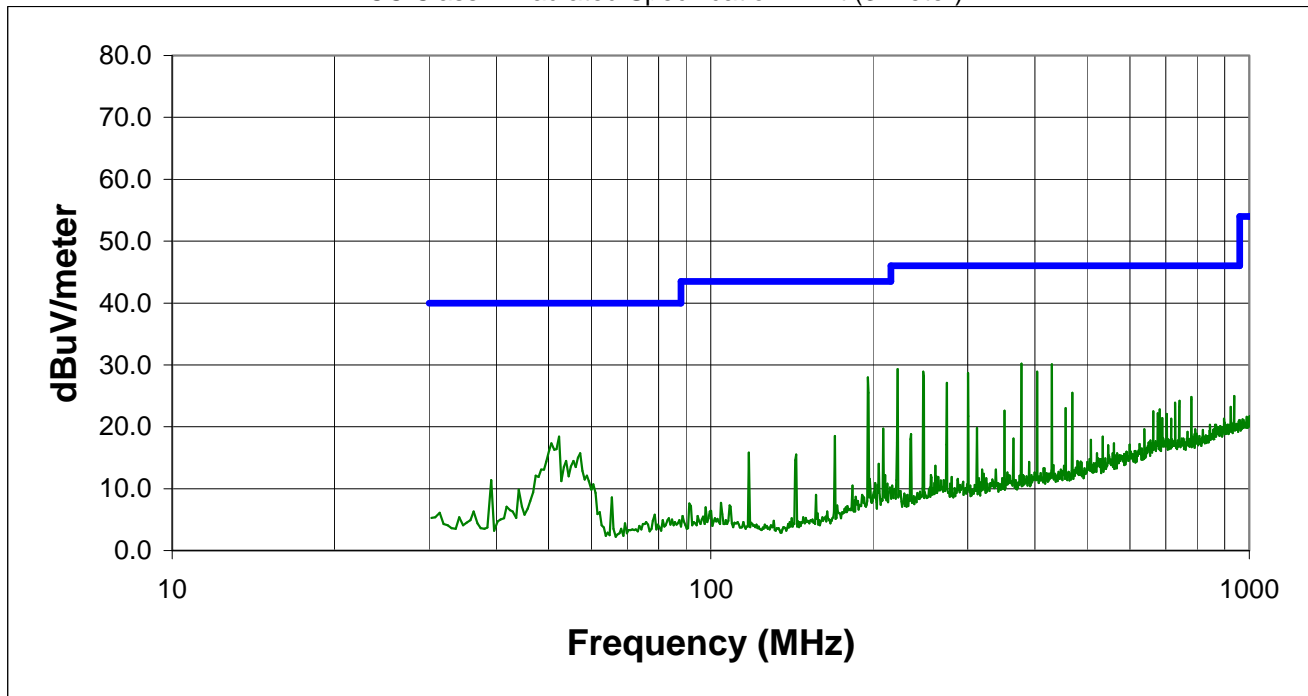


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	47.3	Hor.	-15.0	32.3	46.0	-13.7

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>No hop mode, mid frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

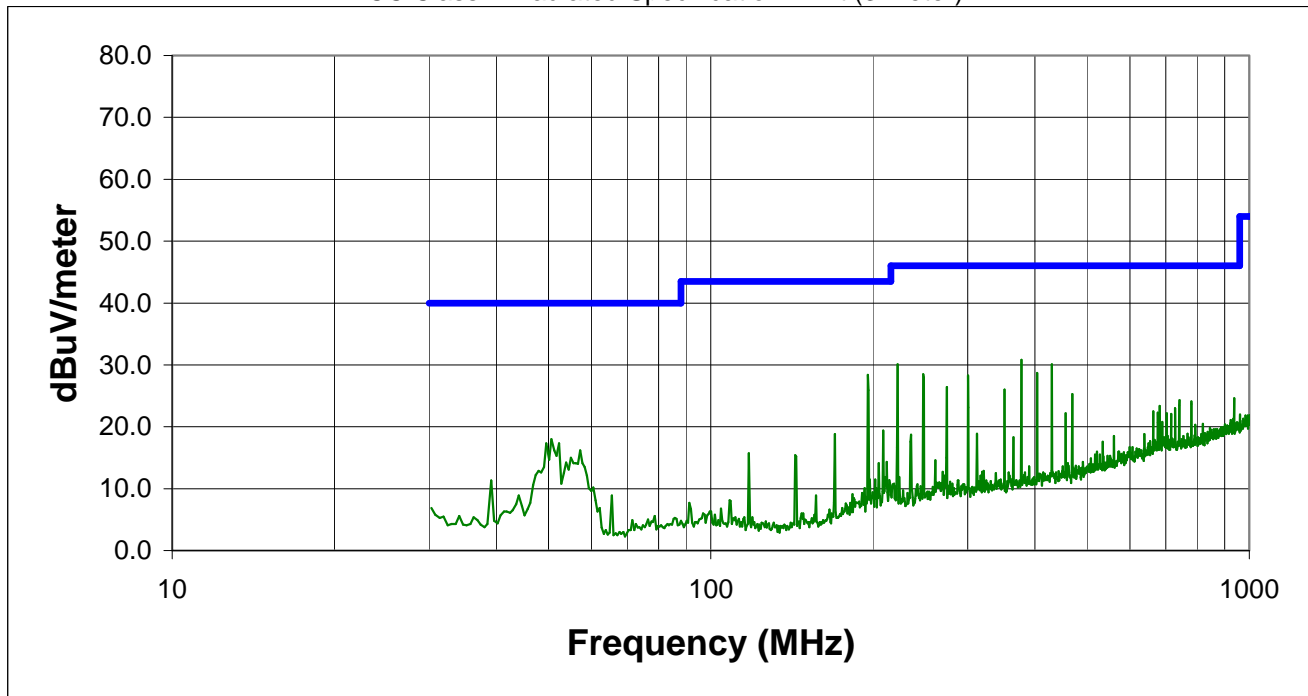


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	48.0	Hor.	-15.0	33.0	46.0	-13.0

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>No hop mode, low frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

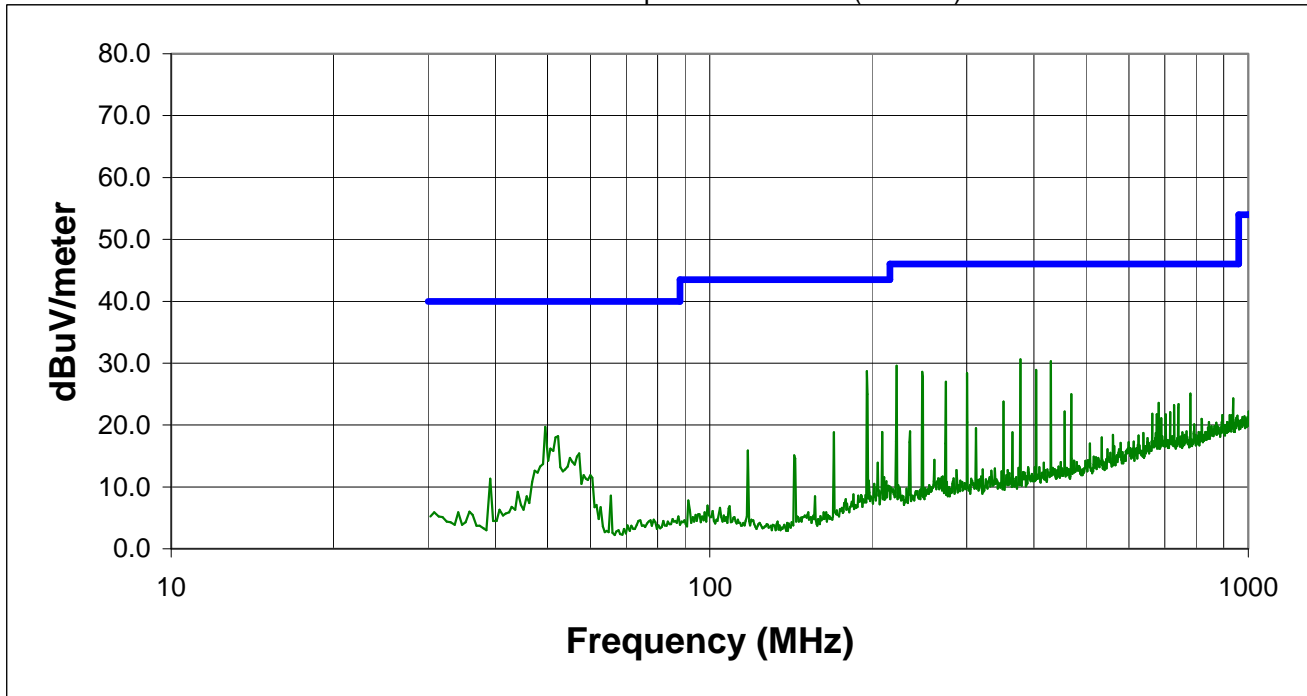


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	47.8	Hor.	-15.0	32.8	46.0	-13.2
195.549	48.9	Hor.	-20.2	28.7	43.5	-14.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, high frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

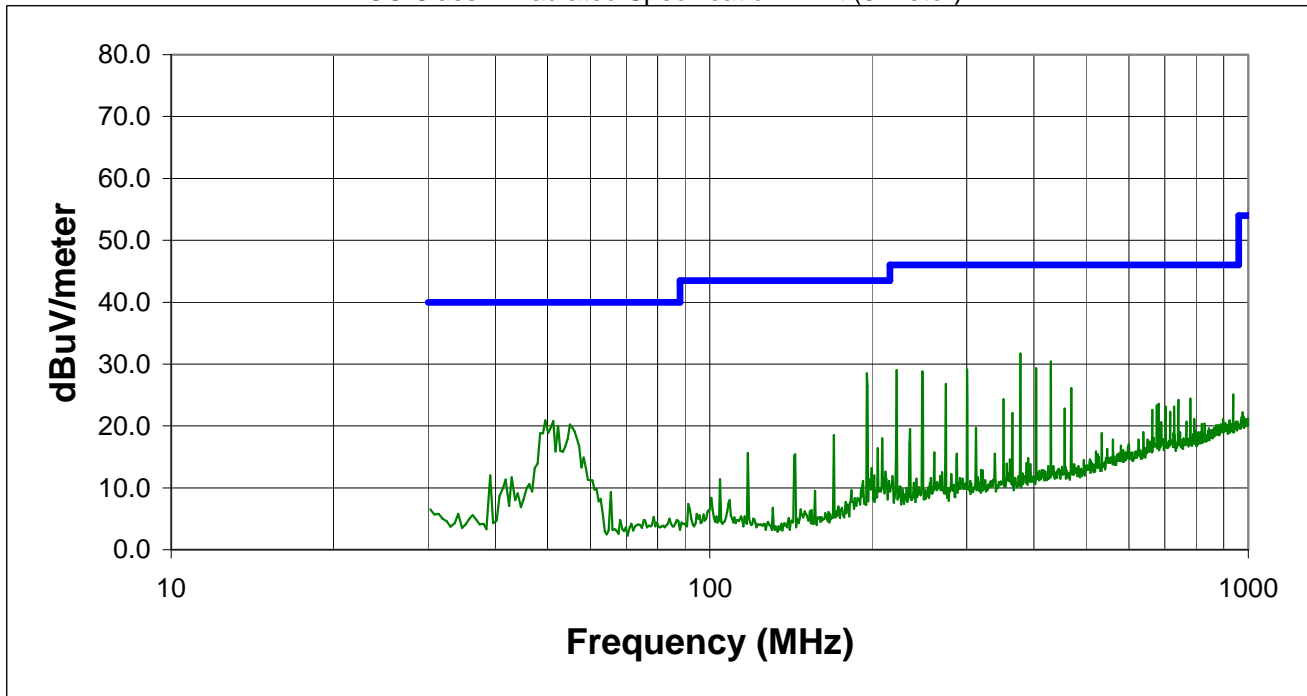

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	47.2	Hor.	-15.0	32.2	46.0	-13.8
377.037	46.2	Hor.	-14.5	31.7	46.0	-14.3
195.549	48.7	Hor.	-20.2	28.5	43.5	-15.0




## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, low frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

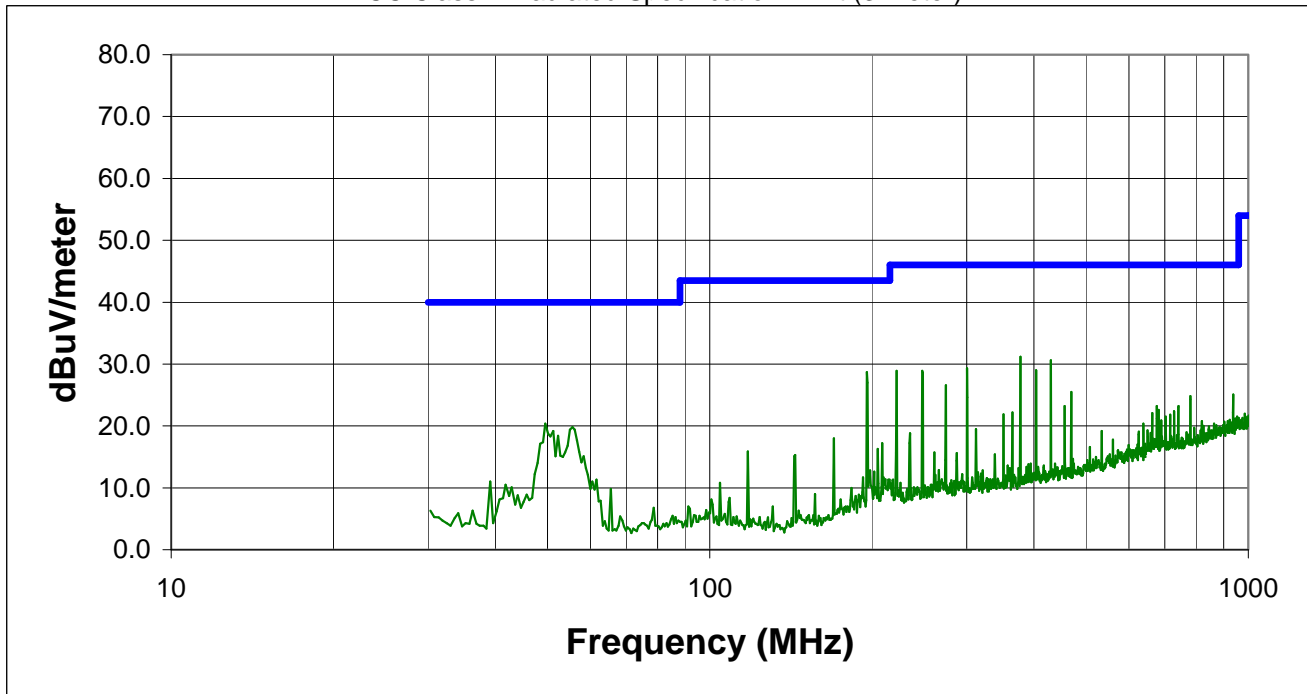


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	47.5	Hor.	-15.0	32.5	46.0	-13.5
195.549	48.9	Hor.	-20.2	28.7	43.5	-14.8
377.037	45.7	Hor.	-14.5	31.2	46.0	-14.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, mid frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

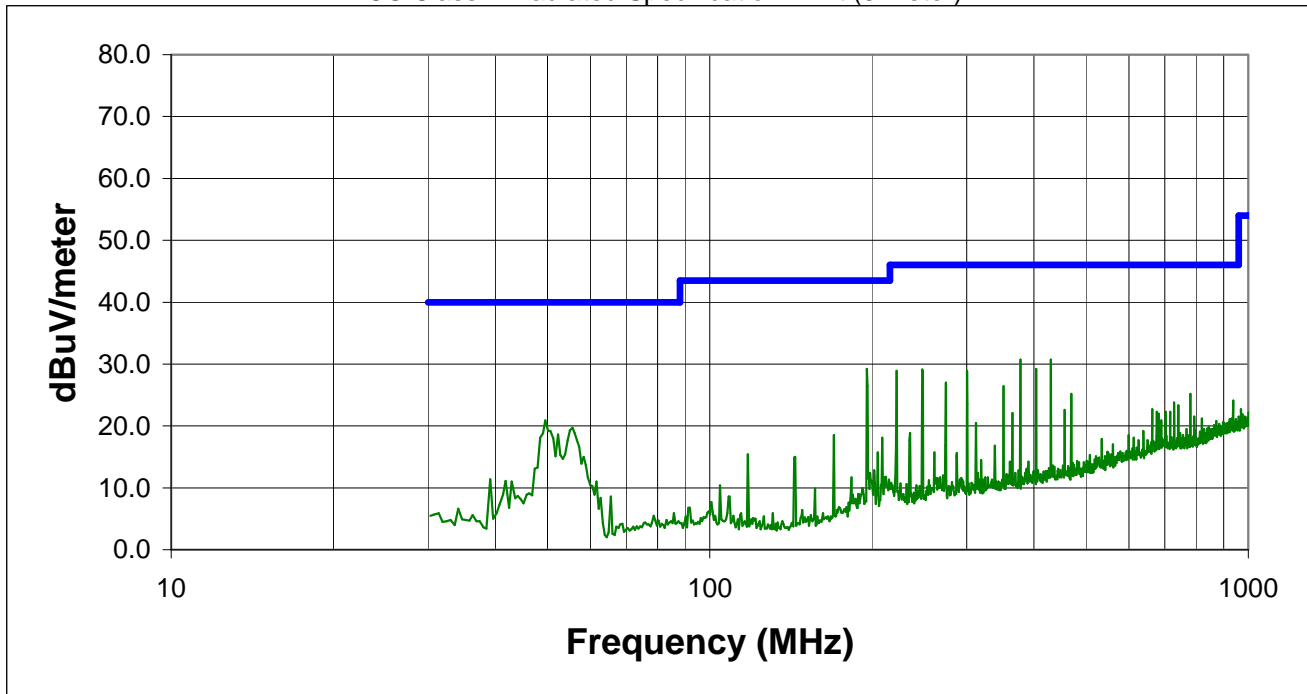


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
351.122	47.2	Hor.	-15.0	32.2	46.0	-13.8
195.549	49.4	Hor.	-20.2	29.2	43.5	-14.3
377.392	45.7	Hor.	-14.5	31.2	46.0	-14.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>DSS mode, low frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

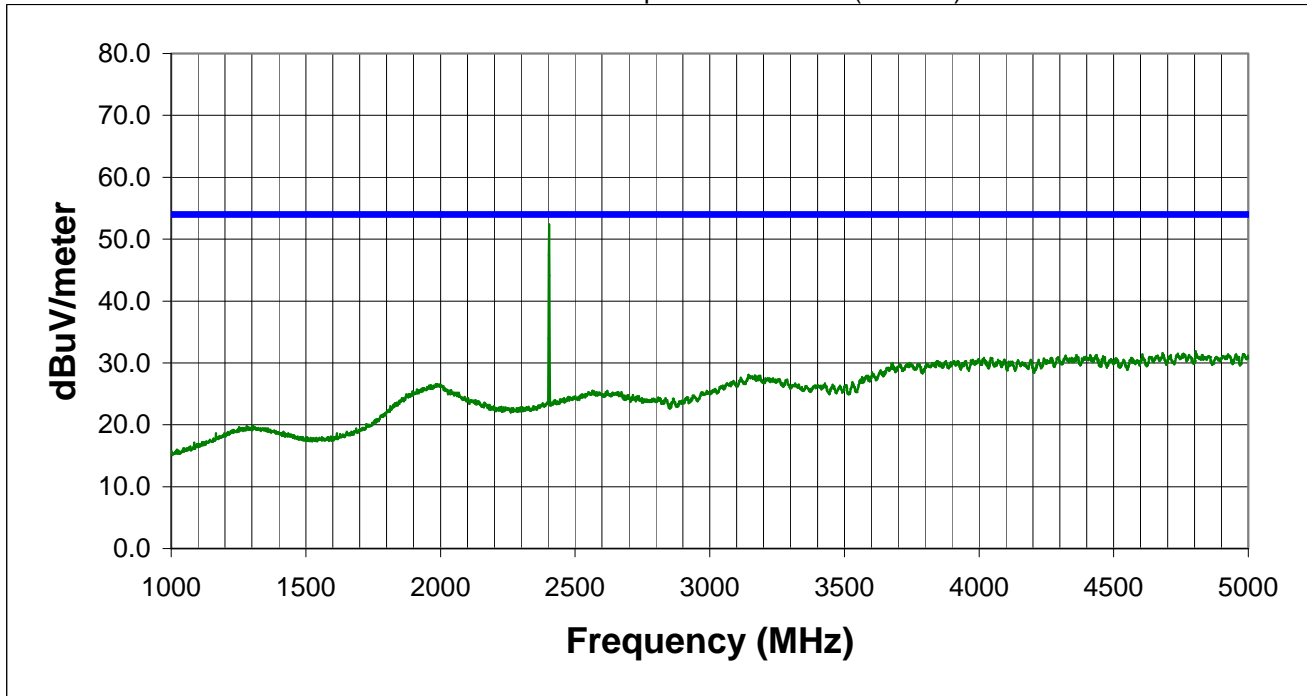


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2402.908	55.2	Ver.	-2.8	52.4	54.0	-1.6

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>		Job Number: <b>INSC00x2</b>		Date: <b>05/04/00</b>	
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>		Job Site: <b>EV01</b>			
Customer Reference Number:		Software:		Power:			
Comments: <b>No hop mode, low frequency. Antenna 'D'</b>							
				Temperature (°C): <b>21</b>		% Humidity: <b>45</b>	
<b>Test System</b>							
<b>Test Equipment</b>							

FCC Class B Radiated Specification Limit (3 meter)

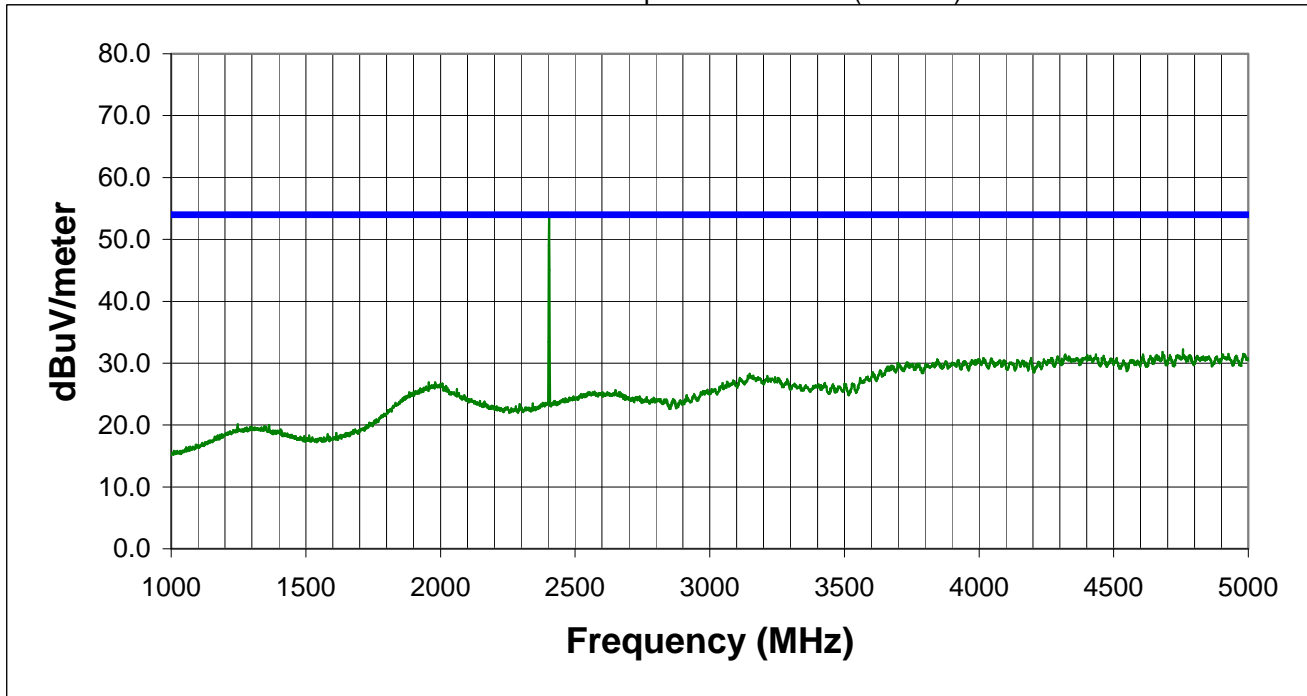


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2402.398	56.4	Ver.	-2.8	53.6	54.0	-0.4
2402.908	56.4	Ver.	-2.8	53.6	54.0	-0.4

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>Receive mode, low frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

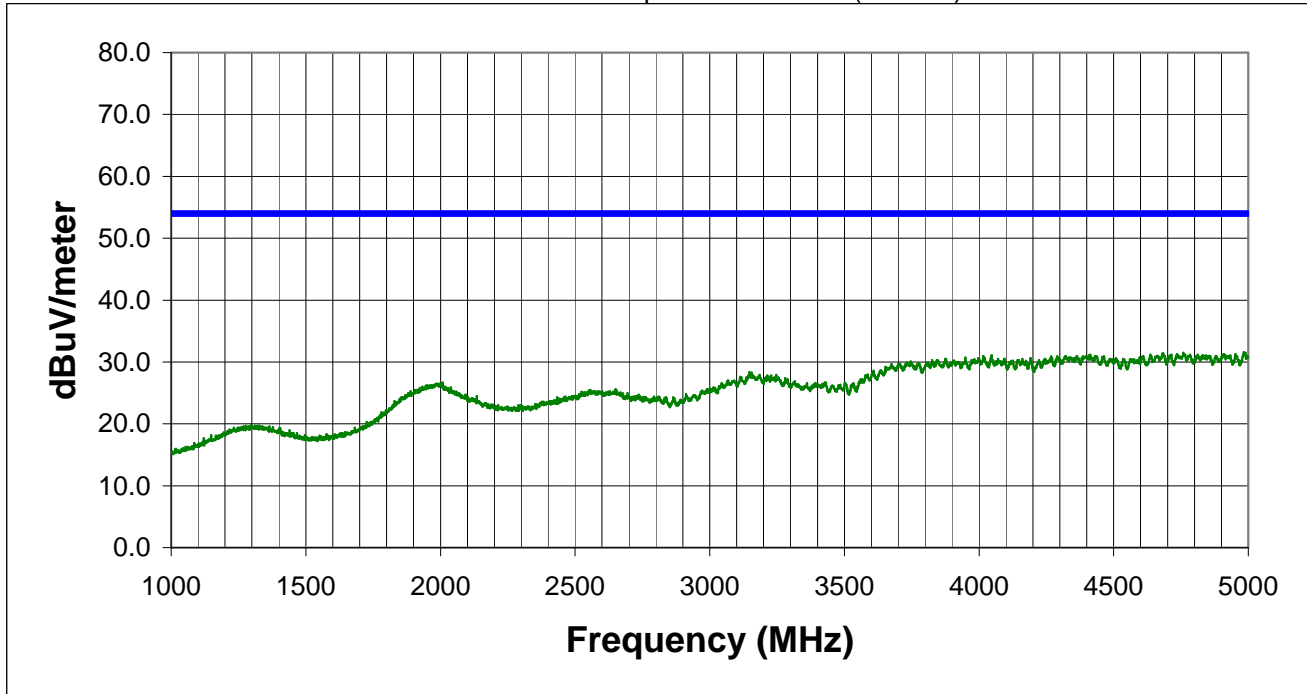


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
--------------------	-------------------------	---------------------	-----------------------------	-----------------------------------	-------------------------------------	----------------

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/05/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>Receive mode, high frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
Test System				
Test Equipment				

FCC Class B Radiated Specification Limit (3 meter)

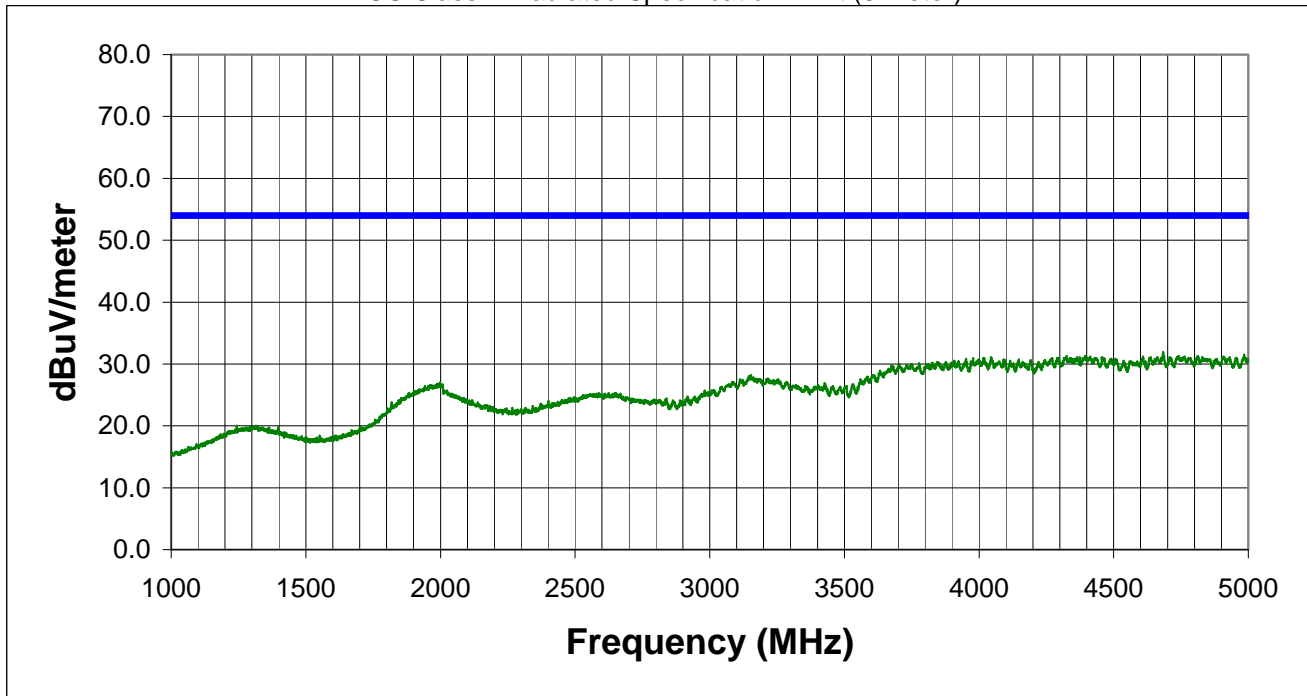


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
-----------------	----------------------	------------------	--------------------------	-----------------------------	----------------------------------	-------------

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>No hop mode, mid frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

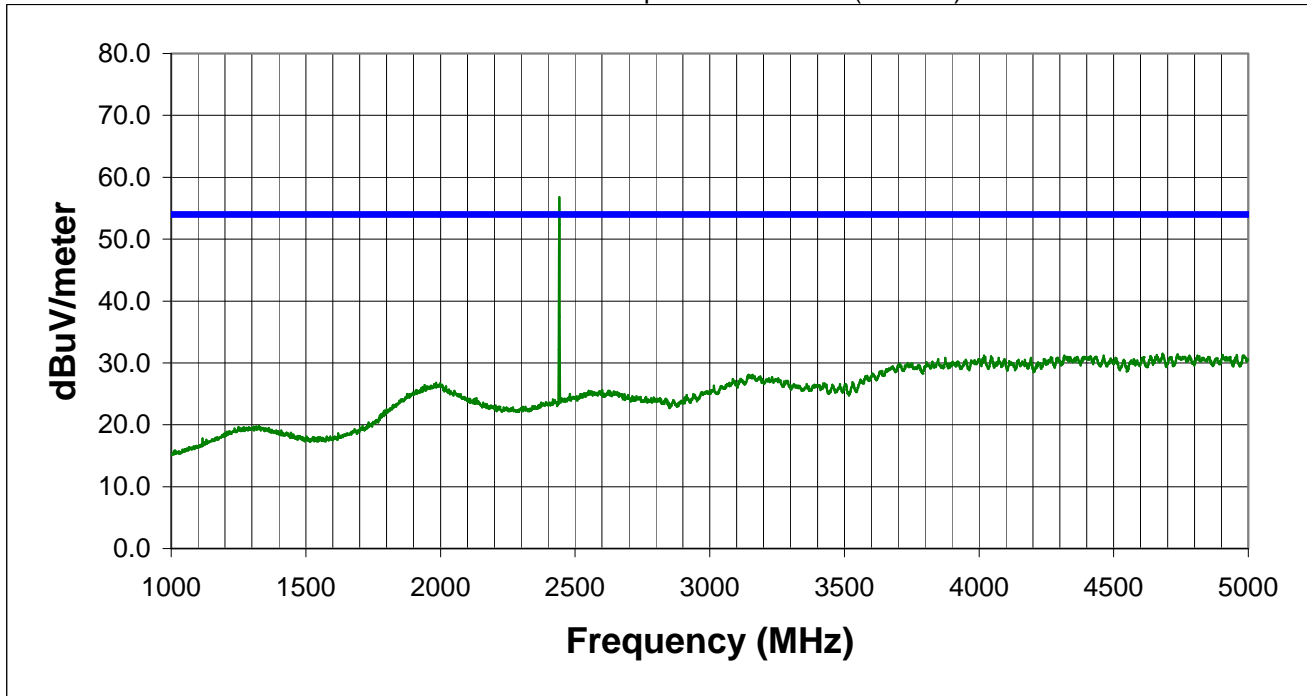


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2440.648	59.8	Ver.	-3.0	56.8	54.0	2.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>Receive mode, mid frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
Test System				
Test Equipment				

FCC Class B Radiated Specification Limit (3 meter)

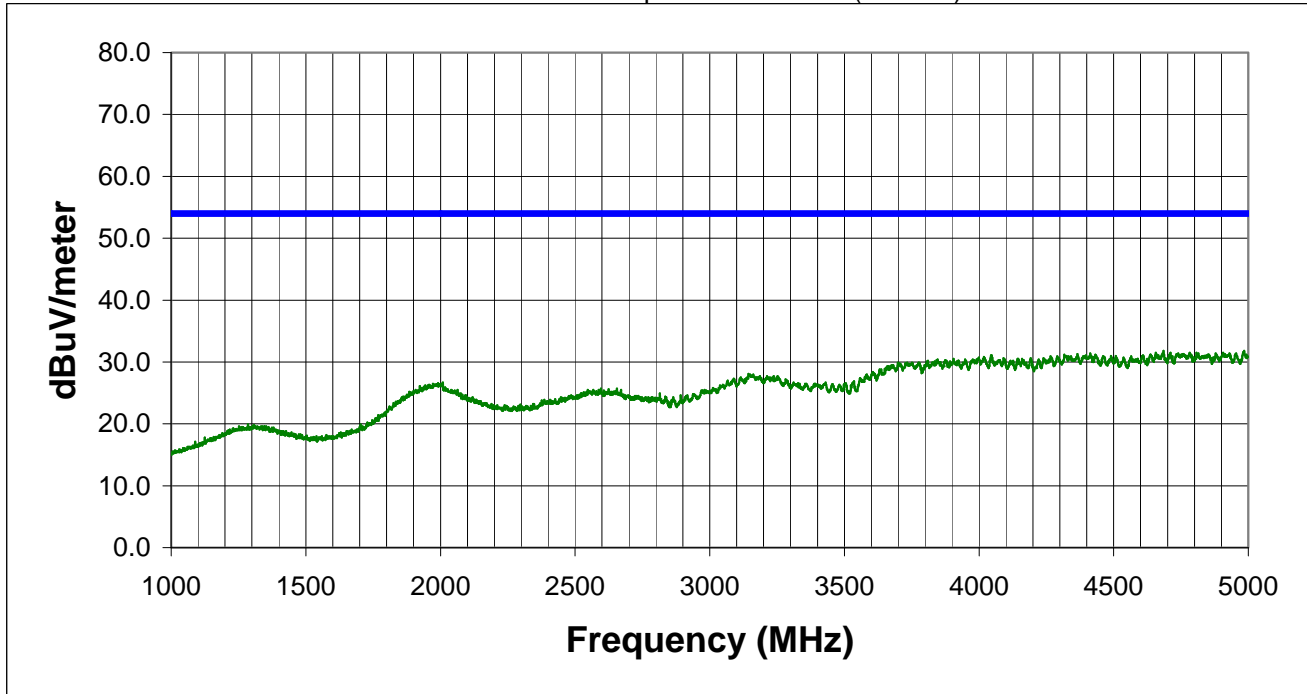

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
--------------------	-------------------------	---------------------	-----------------------------	-----------------------------------	-------------------------------------	----------------




## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>No hop mode, high frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

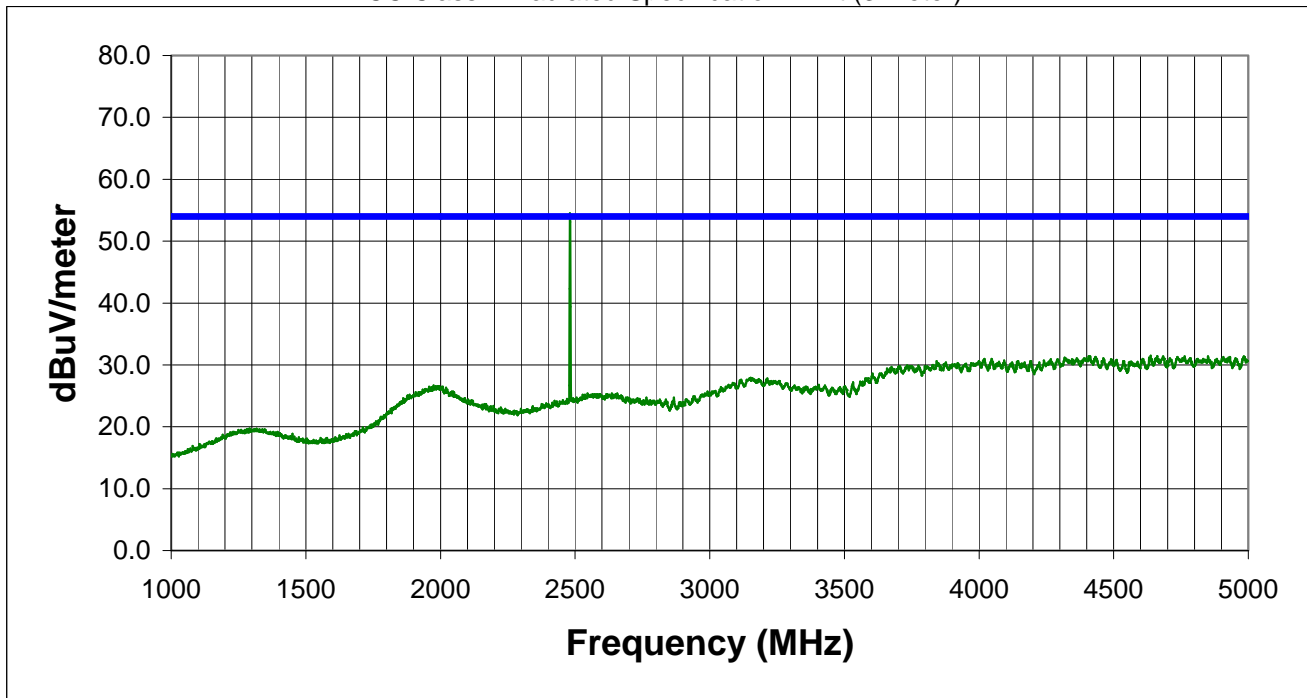


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2480.939	58.0	Ver.	-3.2	54.8	54.0	0.8

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>DSS mode, mid frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

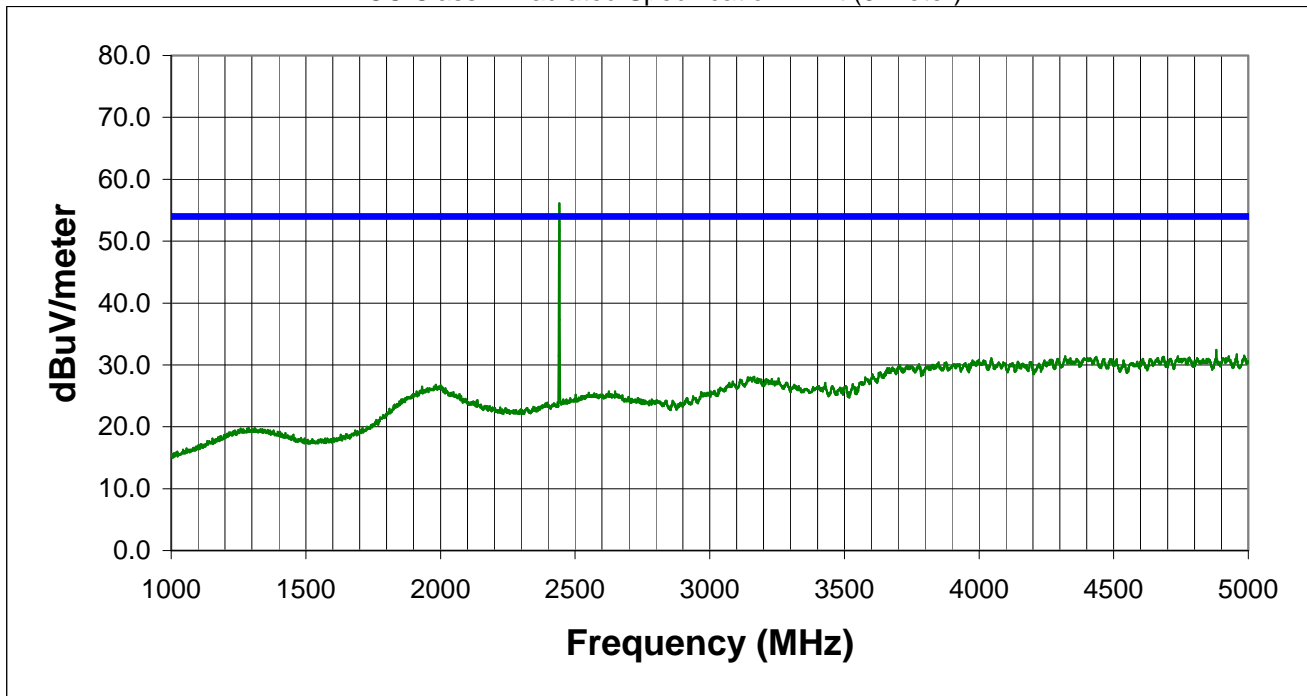


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2441.158	59.2	Ver.	-3.0	56.2	54.0	2.2

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>		Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>		Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:		Software:	Power:	
Comments:	<b>DSS mode, high frequency. Antenna 'D'</b>			
			Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>				
<b>Test Equipment</b>				

FCC Class B Radiated Specification Limit (3 meter)

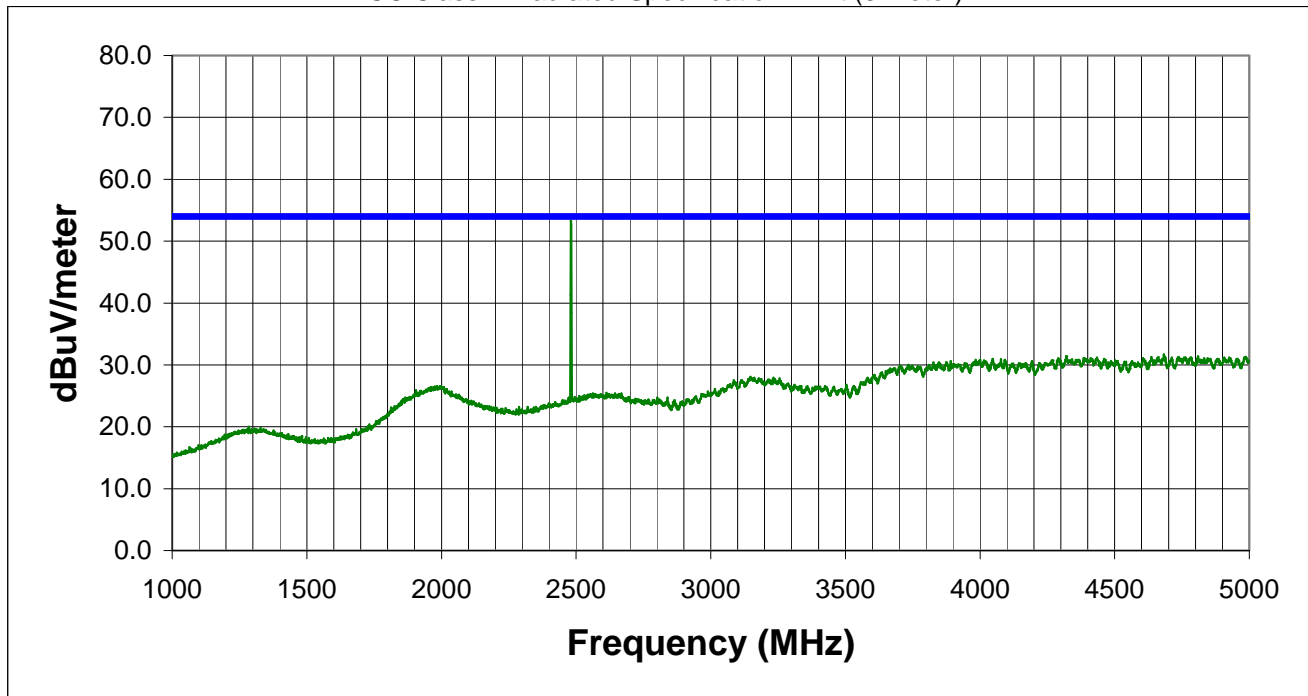


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
2480.939	57.1	Ver.	-3.2	53.9	54.0	-0.1

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, low frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

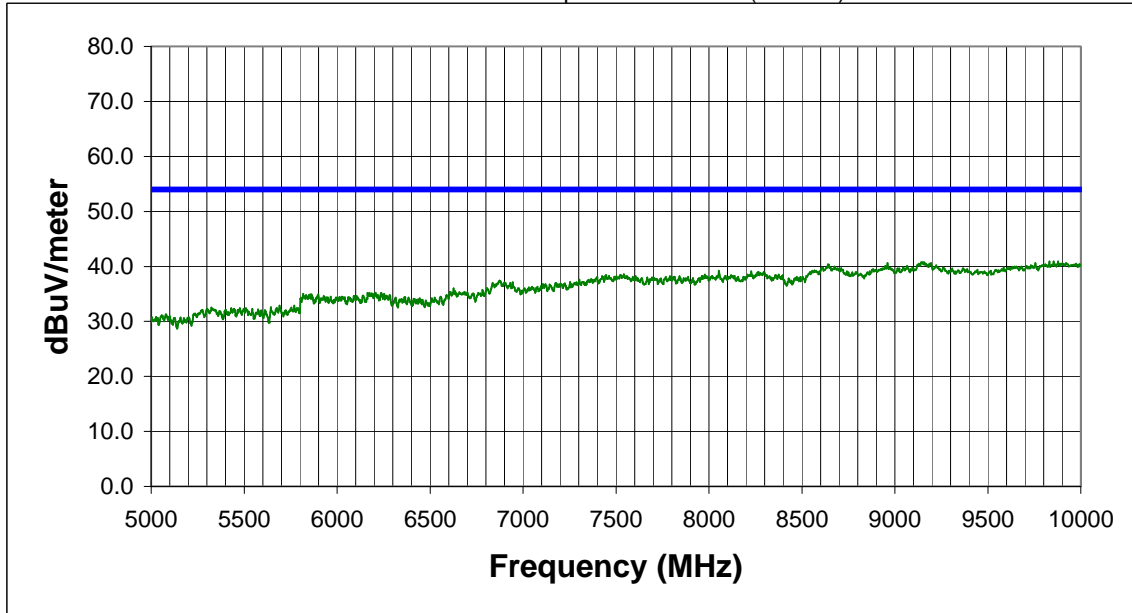


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9853.000	27.2	Ver.	13.7	40.9	54.0	-13.1
9829.000	27.3	Ver.	13.6	40.9	54.0	-13.1
9134.500	27.2	Hor.	13.7	40.9	54.0	-13.1
9875.500	27.0	Hor.	13.9	40.9	54.0	-13.1
9143.500	27.1	Hor.	13.7	40.8	54.0	-13.2
9149.500	27.1	Ver.	13.7	40.8	54.0	-13.2
9926.500	26.8	Hor.	14.0	40.8	54.0	-13.2
9884.500	26.8	Hor.	13.9	40.7	54.0	-13.3
9800.500	27.1	Hor.	13.6	40.7	54.0	-13.3
9154.000	27.0	Hor.	13.7	40.7	54.0	-13.3
9899.500	26.7	Ver.	13.9	40.6	54.0	-13.4
8959.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9193.000	27.0	Hor.	13.6	40.6	54.0	-13.4
9754.000	27.1	Hor.	13.5	40.6	54.0	-13.4
9919.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9973.000	26.4	Ver.	14.1	40.5	54.0	-13.5
9890.500	26.6	Hor.	13.9	40.5	54.0	-13.5
9184.000	26.9	Hor.	13.6	40.5	54.0	-13.5
9902.500	26.6	Ver.	13.9	40.5	54.0	-13.5
9788.500	26.9	Ver.	13.6	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, mid frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

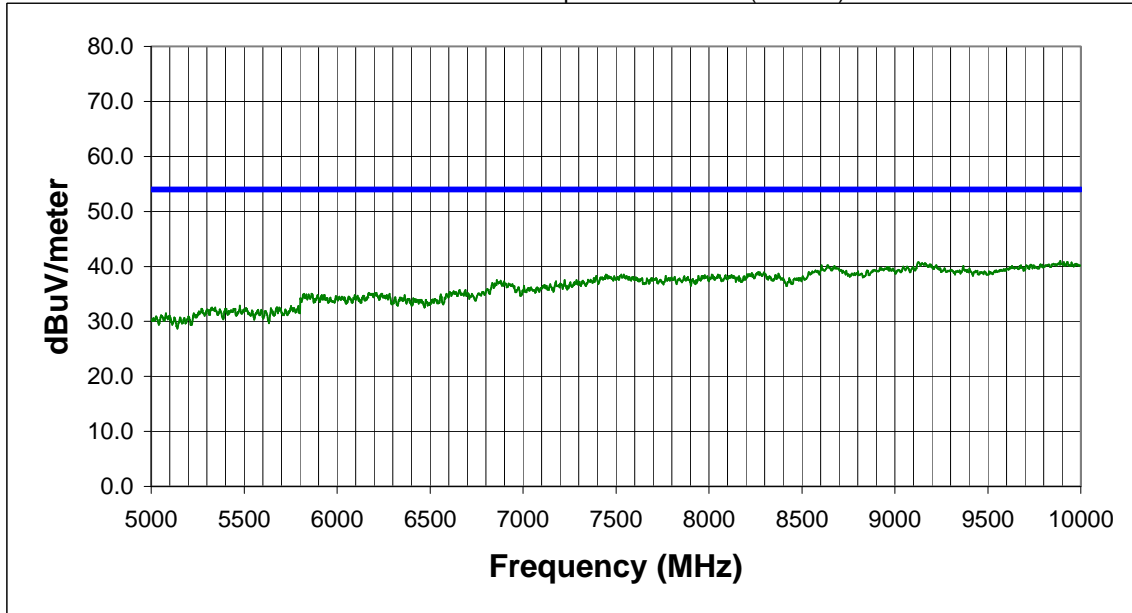

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9889.000	27.1	Hor.	13.9	41.0	54.0	-13.0
9124.000	27.1	Ver.	13.7	40.8	54.0	-13.2
9925.000	26.8	Ver.	14.0	40.8	54.0	-13.2
9907.000	26.8	Hor.	14.0	40.8	54.0	-13.2
9949.000	26.7	Ver.	14.0	40.7	54.0	-13.3
9974.500	26.6	Ver.	14.1	40.7	54.0	-13.3
9830.500	27.1	Hor.	13.6	40.7	54.0	-13.3
9883.000	26.8	Hor.	13.9	40.7	54.0	-13.3
9899.500	26.7	Ver.	13.9	40.6	54.0	-13.4
9121.000	26.8	Ver.	13.8	40.6	54.0	-13.4
9944.500	26.6	Hor.	14.0	40.6	54.0	-13.4
9145.000	26.9	Hor.	13.7	40.6	54.0	-13.4
9922.000	26.6	Ver.	14.0	40.6	54.0	-13.4
9160.000	27.0	Hor.	13.6	40.6	54.0	-13.4
9130.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9167.500	26.9	Ver.	13.6	40.5	54.0	-13.5
9152.500	26.8	Ver.	13.7	40.5	54.0	-13.5
9857.500	26.8	Ver.	13.7	40.5	54.0	-13.5
9869.500	26.6	Ver.	13.9	40.5	54.0	-13.5
9872.500	26.6	Hor.	13.9	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, high frequency. Antenna 'D'</b>			

Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (3 meter)

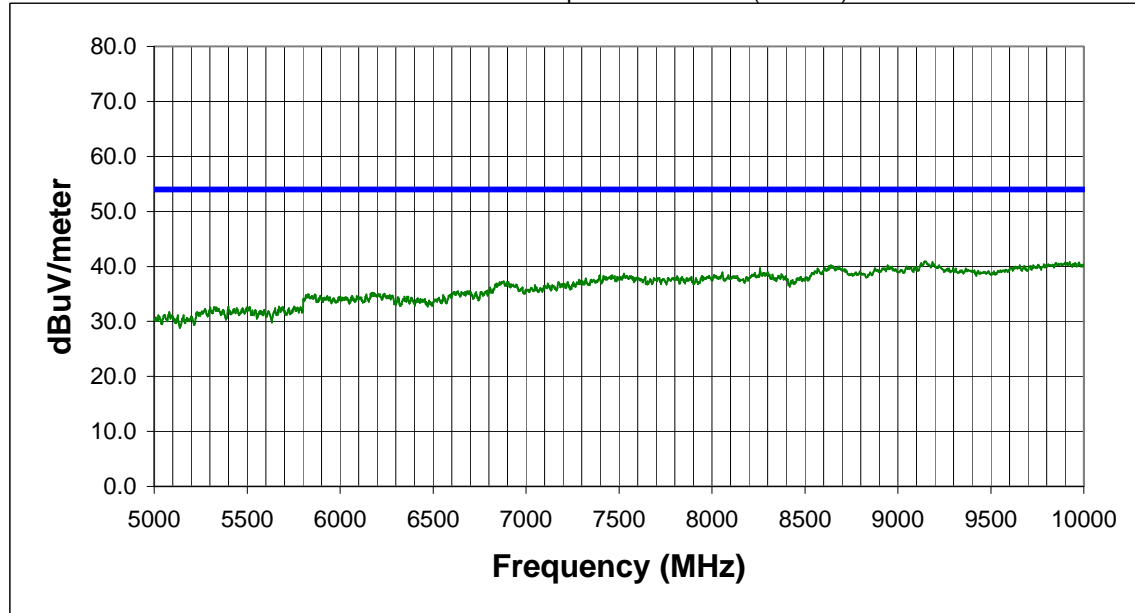

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9143.500	27.4	Ver.	13.7	41.1	54.0	-12.9
9148.000	27.2	Ver.	13.7	40.9	54.0	-13.1
9152.500	27.1	Hor.	13.7	40.8	54.0	-13.2
9922.000	26.8	Ver.	14.0	40.8	54.0	-13.2
9184.000	27.2	Hor.	13.6	40.8	54.0	-13.2
9973.000	26.6	Ver.	14.1	40.7	54.0	-13.3
9926.500	26.7	Ver.	14.0	40.7	54.0	-13.3
9875.500	26.8	Hor.	13.9	40.7	54.0	-13.3
9752.500	27.2	Ver.	13.5	40.7	54.0	-13.3
9898.000	26.8	Ver.	13.9	40.7	54.0	-13.3
9866.500	27.0	Ver.	13.7	40.7	54.0	-13.3
9884.500	26.7	Ver.	13.9	40.6	54.0	-13.4
9893.500	26.7	Ver.	13.9	40.6	54.0	-13.4
9850.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9847.000	26.9	Hor.	13.7	40.6	54.0	-13.4
9124.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9910.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9950.500	26.6	Hor.	14.0	40.6	54.0	-13.4
9862.000	26.8	Hor.	13.7	40.5	54.0	-13.5
9955.000	26.5	Hor.	14.0	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	


Comments: **No hop mode, high frequency. Antenna 'D'**

Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (3 meter)

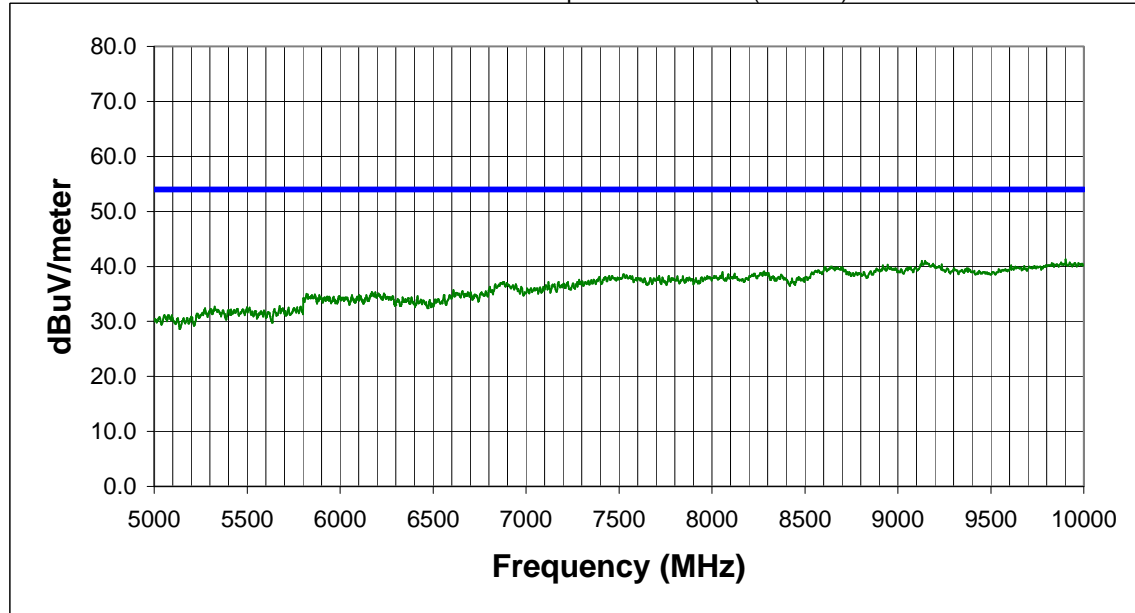

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9901.000	27.4	Hor.	13.9	41.3	54.0	-12.7
9145.000	27.3	Hor.	13.7	41.0	54.0	-13.0
9127.000	27.3	Hor.	13.7	41.0	54.0	-13.0
9920.500	26.9	Hor.	14.0	40.9	54.0	-13.1
9932.500	26.8	Ver.	14.0	40.8	54.0	-13.2
9953.500	26.8	Hor.	14.0	40.8	54.0	-13.2
9140.500	27.0	Hor.	13.7	40.7	54.0	-13.3
9779.500	27.1	Hor.	13.6	40.7	54.0	-13.3
9131.500	27.0	Hor.	13.7	40.7	54.0	-13.3
9877.000	26.8	Ver.	13.9	40.7	54.0	-13.3
9161.500	27.1	Hor.	13.6	40.7	54.0	-13.3
9904.000	26.7	Hor.	13.9	40.6	54.0	-13.4
9826.000	27.0	Hor.	13.6	40.6	54.0	-13.4
9970.000	26.5	Ver.	14.1	40.6	54.0	-13.4
9890.500	26.7	Hor.	13.9	40.6	54.0	-13.4
9188.500	27.0	Hor.	13.6	40.6	54.0	-13.4
9925.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9157.000	26.9	Hor.	13.7	40.6	54.0	-13.4
9985.000	26.4	Hor.	14.1	40.5	54.0	-13.5
9854.500	26.8	Ver.	13.7	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	


Comments: **No hop mode, mid frequency. Antenna 'D'**

Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (3 meter)

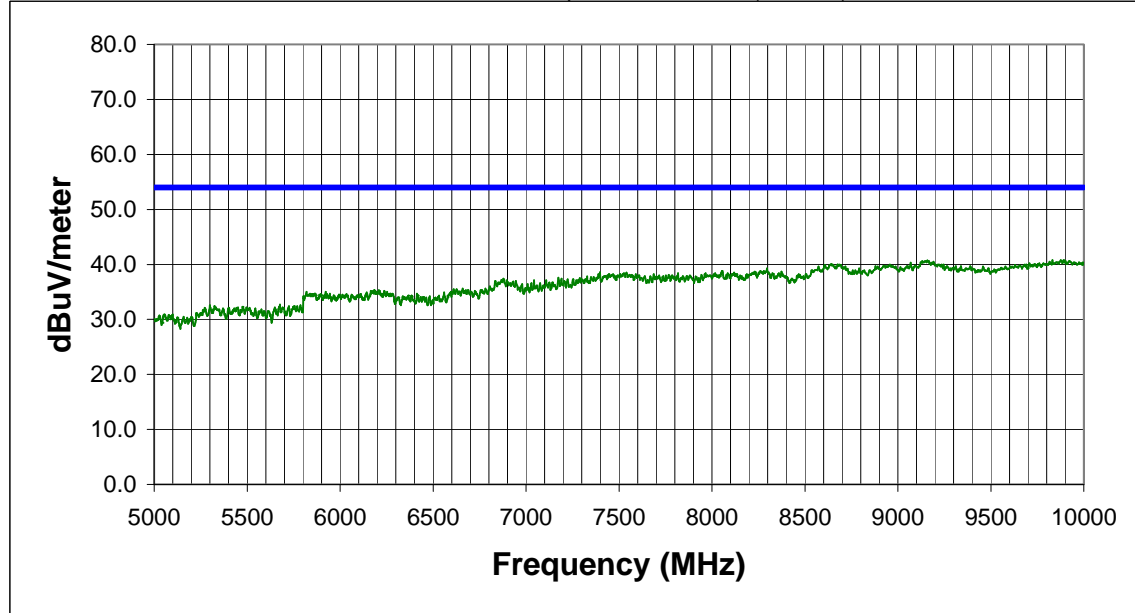

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9146.500	27.5	Ver.	13.7	41.2	54.0	-12.8
9829.000	27.2	Ver.	13.6	40.8	54.0	-13.2
9892.000	26.9	Hor.	13.9	40.8	54.0	-13.2
9899.500	26.9	Hor.	13.9	40.8	54.0	-13.2
9874.000	26.9	Ver.	13.9	40.8	54.0	-13.2
9857.500	27.1	Ver.	13.7	40.8	54.0	-13.2
9974.500	26.6	Hor.	14.1	40.7	54.0	-13.3
9140.500	27.0	Hor.	13.7	40.7	54.0	-13.3
9157.000	27.0	Ver.	13.7	40.7	54.0	-13.3
9845.500	26.9	Hor.	13.7	40.6	54.0	-13.4
9130.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9128.500	26.9	Ver.	13.7	40.6	54.0	-13.4
9919.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9160.000	27.0	Ver.	13.6	40.6	54.0	-13.4
9190.000	26.9	Ver.	13.6	40.5	54.0	-13.5
9868.000	26.8	Ver.	13.7	40.5	54.0	-13.5
9188.500	26.9	Ver.	13.6	40.5	54.0	-13.5
9814.000	26.9	Ver.	13.6	40.5	54.0	-13.5
9925.000	26.5	Hor.	14.0	40.5	54.0	-13.5
9806.500	26.8	Ver.	13.6	40.4	54.0	-13.6



**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	


Comments: **No hop mode, low frequency. Antenna 'D'**

Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (3 meter)

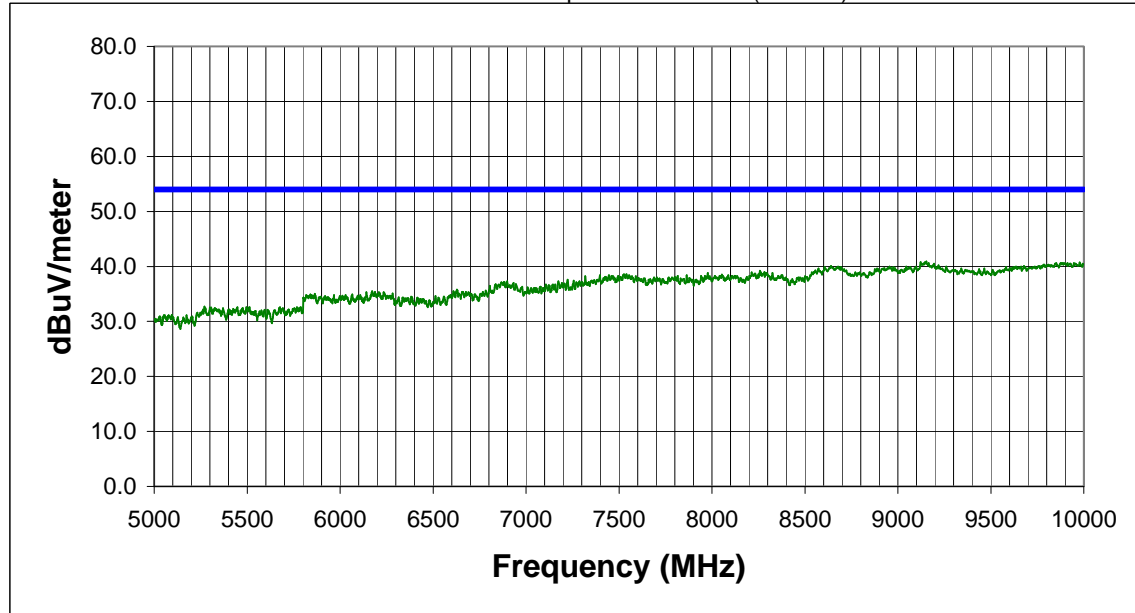


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9151.000	27.2	Hor.	13.7	40.9	54.0	-13.1
9143.500	27.1	Ver.	13.7	40.8	54.0	-13.2
9121.000	27.0	Ver.	13.8	40.8	54.0	-13.2
9890.500	26.8	Ver.	13.9	40.7	54.0	-13.3
9134.500	27.0	Hor.	13.7	40.7	54.0	-13.3
9872.500	26.8	Hor.	13.9	40.7	54.0	-13.3
9976.000	26.6	Ver.	14.1	40.7	54.0	-13.3
9809.500	27.1	Hor.	13.6	40.7	54.0	-13.3
9923.500	26.7	Hor.	14.0	40.7	54.0	-13.3
9968.500	26.6	Hor.	14.1	40.7	54.0	-13.3
9883.000	26.7	Ver.	13.9	40.6	54.0	-13.4
9905.500	26.6	Ver.	14.0	40.6	54.0	-13.4
9910.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9850.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9161.500	27.0	Ver.	13.6	40.6	54.0	-13.4
9188.500	27.0	Ver.	13.6	40.6	54.0	-13.4
9946.000	26.6	Ver.	14.0	40.6	54.0	-13.4
9127.000	26.8	Hor.	13.7	40.5	54.0	-13.5
9788.500	26.9	Hor.	13.6	40.5	54.0	-13.5
9955.000	26.5	Ver.	14.0	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, low frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

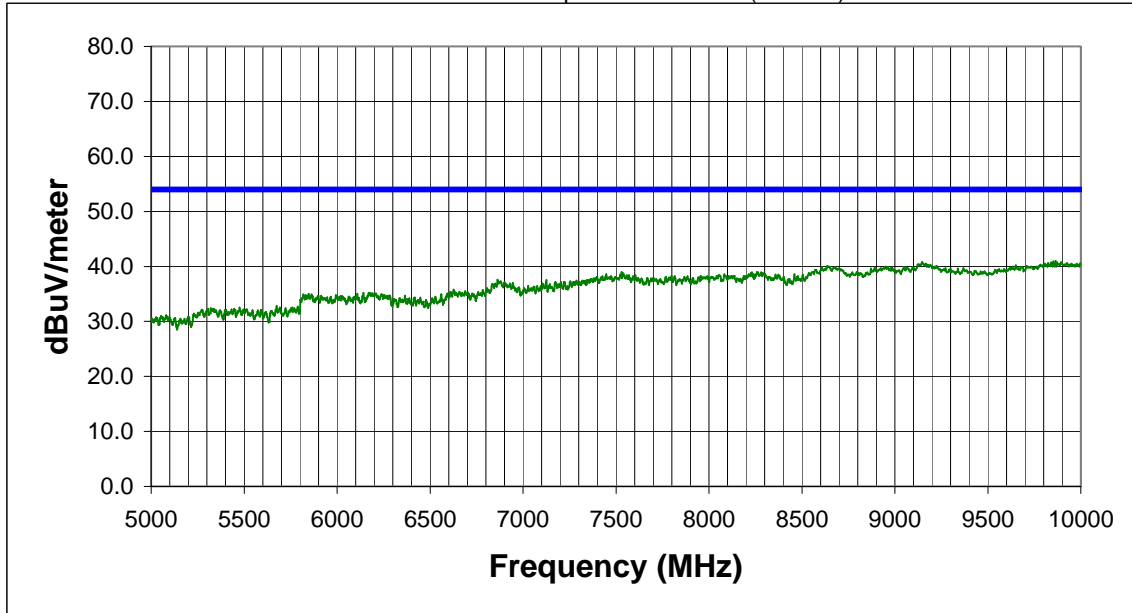


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9143.500	27.5	Ver.	13.7	41.2	54.0	-12.8
9862.000	27.3	Hor.	13.7	41.0	54.0	-13.0
9850.000	27.2	Ver.	13.7	40.9	54.0	-13.1
9149.500	27.2	Ver.	13.7	40.9	54.0	-13.1
9838.000	27.1	Ver.	13.6	40.7	54.0	-13.3
9917.500	26.7	Ver.	14.0	40.7	54.0	-13.3
9871.000	26.8	Hor.	13.9	40.7	54.0	-13.3
9895.000	26.8	Ver.	13.9	40.7	54.0	-13.3
9892.000	26.8	Hor.	13.9	40.7	54.0	-13.3
9823.000	27.0	Hor.	13.6	40.6	54.0	-13.4
9986.500	26.5	Hor.	14.1	40.6	54.0	-13.4
9997.000	26.5	Hor.	14.1	40.6	54.0	-13.4
9844.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9119.500	26.8	Hor.	13.8	40.6	54.0	-13.4
9925.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9152.500	26.9	Ver.	13.7	40.6	54.0	-13.4
9947.500	26.5	Ver.	14.0	40.5	54.0	-13.5
9977.500	26.4	Hor.	14.1	40.5	54.0	-13.5
9131.500	26.8	Ver.	13.7	40.5	54.0	-13.5
9976.000	26.4	Hor.	14.1	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/04/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, mid frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

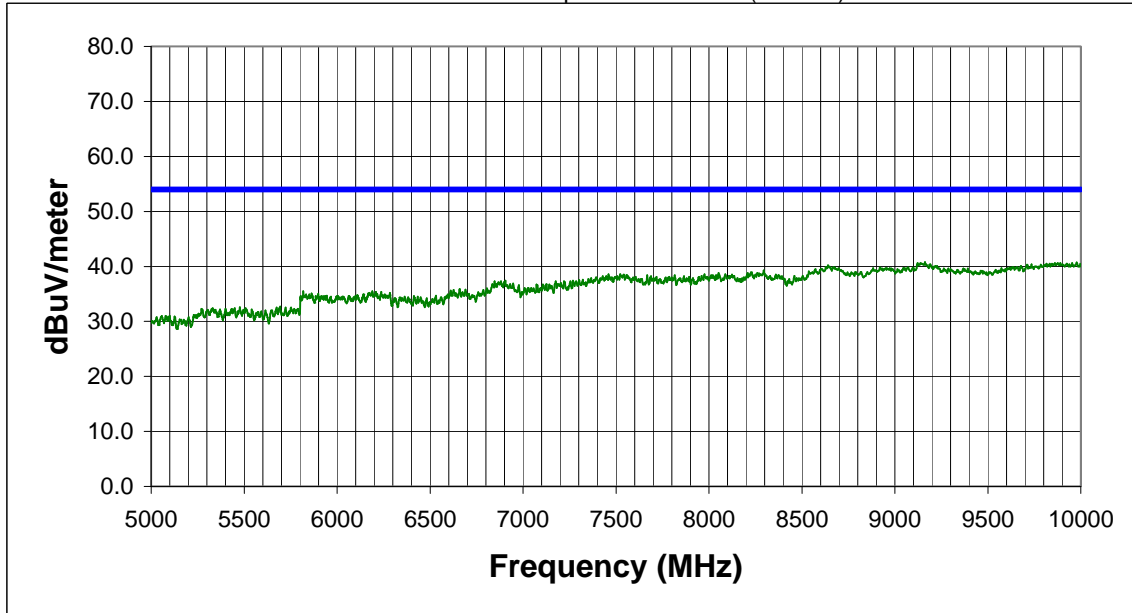


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9149.500	27.4	Ver.	13.7	41.1	54.0	-12.9
9911.500	26.8	Ver.	14.0	40.8	54.0	-13.2
9160.000	27.2	Ver.	13.6	40.8	54.0	-13.2
9878.500	26.8	Hor.	13.9	40.7	54.0	-13.3
9976.000	26.6	Ver.	14.1	40.7	54.0	-13.3
9752.500	27.2	Hor.	13.5	40.7	54.0	-13.3
9889.000	26.7	Hor.	13.9	40.6	54.0	-13.4
9902.500	26.7	Hor.	13.9	40.6	54.0	-13.4
9899.500	26.7	Hor.	13.9	40.6	54.0	-13.4
9152.500	26.9	Ver.	13.7	40.6	54.0	-13.4
9952.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9920.500	26.6	Ver.	14.0	40.6	54.0	-13.4
9926.500	26.6	Hor.	14.0	40.6	54.0	-13.4
9121.000	26.8	Ver.	13.8	40.6	54.0	-13.4
9859.000	26.9	Hor.	13.7	40.6	54.0	-13.4
9136.000	26.9	Ver.	13.7	40.6	54.0	-13.4
9814.000	26.9	Ver.	13.6	40.5	54.0	-13.5
9791.500	26.9	Hor.	13.6	40.5	54.0	-13.5
9886.000	26.6	Ver.	13.9	40.5	54.0	-13.5
9139.000	26.8	Hor.	13.7	40.5	54.0	-13.5

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00x2</b>	Date: <b>05/05/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, high frequency. Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>45</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (3 meter)

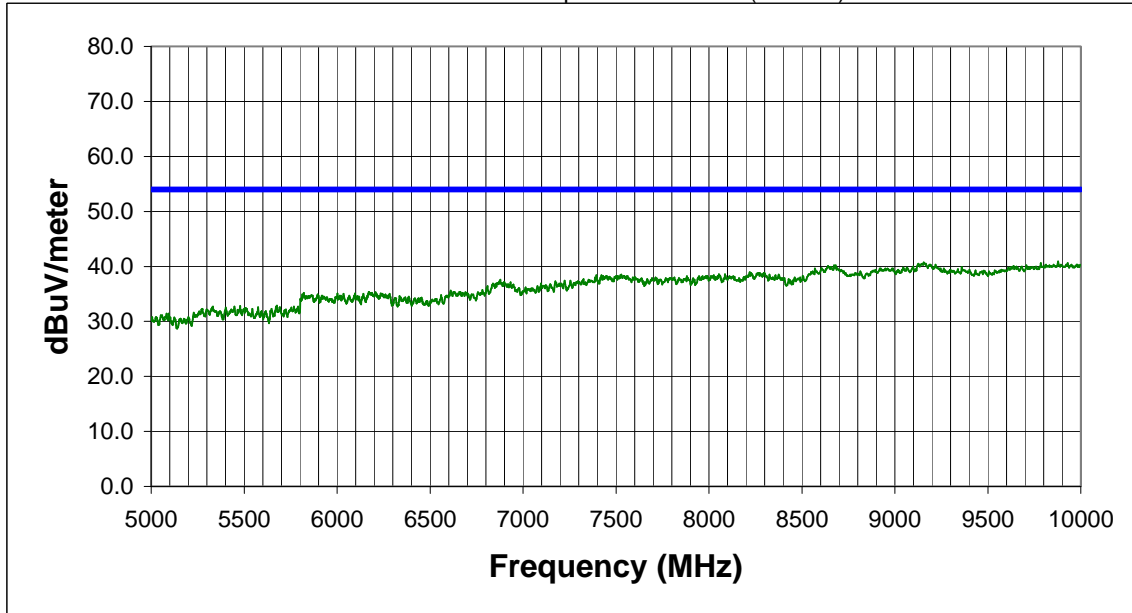

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
9877.000	27.0	Hor.	13.9	40.9	54.0	-13.1
9152.500	27.0	Ver.	13.7	40.7	54.0	-13.3
9146.500	27.0	Hor.	13.7	40.7	54.0	-13.3
9830.500	27.0	Hor.	13.6	40.6	54.0	-13.4
9784.000	27.0	Hor.	13.6	40.6	54.0	-13.4
9928.000	26.6	Hor.	14.0	40.6	54.0	-13.4
9137.500	26.9	Ver.	13.7	40.6	54.0	-13.4
9167.500	26.9	Ver.	13.6	40.5	54.0	-13.5
9160.000	26.9	Ver.	13.6	40.5	54.0	-13.5
9896.500	26.6	Ver.	13.9	40.5	54.0	-13.5
9124.000	26.8	Hor.	13.7	40.5	54.0	-13.5
9887.500	26.6	Hor.	13.9	40.5	54.0	-13.5
9818.500	26.9	Hor.	13.6	40.5	54.0	-13.5
9869.500	26.6	Hor.	13.9	40.5	54.0	-13.5
9845.500	26.7	Hor.	13.7	40.4	54.0	-13.6
9884.500	26.5	Ver.	13.9	40.4	54.0	-13.6
9806.500	26.8	Ver.	13.6	40.4	54.0	-13.6
9920.500	26.4	Ver.	14.0	40.4	54.0	-13.6
9632.500	27.1	Ver.	13.3	40.4	54.0	-13.6
9947.500	26.4	Hor.	14.0	40.4	54.0	-13.6

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>DSS mode, high frequency, Antenna 'D'</b>		
	Temperature (°C): <b>21</b>	% Humidity: <b>60</b>	

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

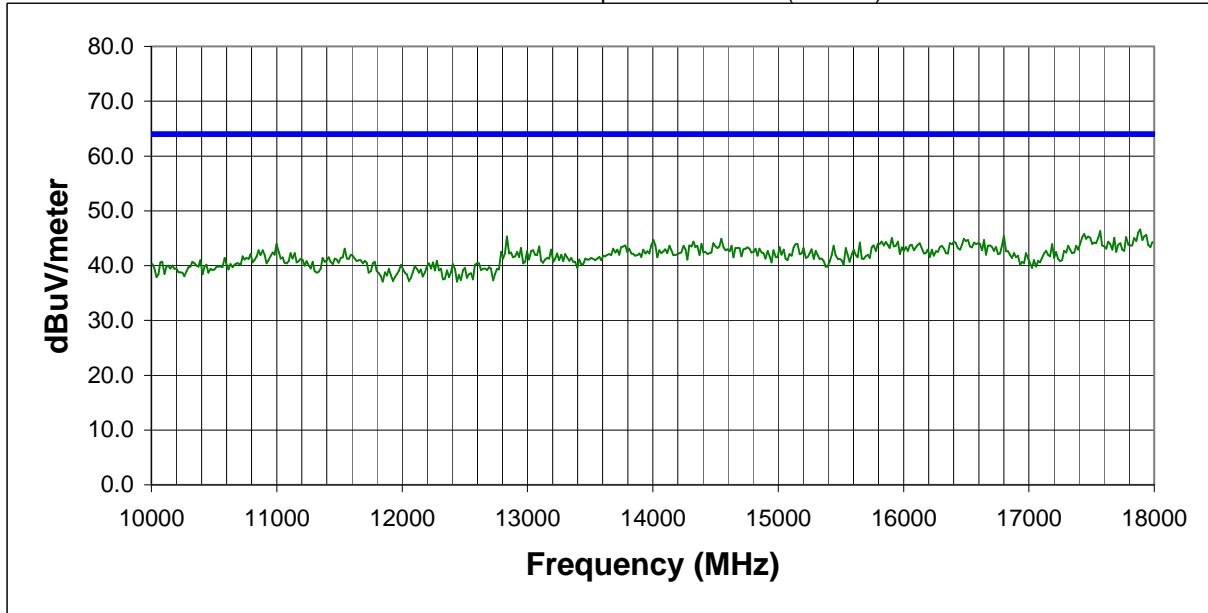

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17880.301	31.1	Ver.	15.5	46.6	64.0	-17.4
17560.609	31.9	Ver.	14.4	46.3	64.0	-17.7
17864.311	30.6	Hor.	15.5	46.1	64.0	-17.9
17472.699	31.8	Hor.	14.1	45.9	64.0	-18.1
17432.730	31.9	Ver.	13.9	45.8	64.0	-18.2
17928.250	30.0	Ver.	15.6	45.6	64.0	-18.4
17952.230	29.7	Ver.	15.8	45.5	64.0	-18.5
16793.359	33.5	Hor.	11.9	45.4	64.0	-18.6
12829.230	33.8	Hor.	11.5	45.3	64.0	-18.7
17416.750	31.4	Hor.	13.8	45.2	64.0	-18.8
17768.410	30.0	Hor.	15.2	45.2	64.0	-18.8
17672.500	30.2	Hor.	14.9	45.1	64.0	-18.9
16002.130	33.5	Ver.	11.6	45.1	64.0	-18.9
15906.230	33.6	Ver.	11.5	45.1	64.0	-18.9
17544.631	30.7	Hor.	14.4	45.1	64.0	-18.9
16465.680	33.2	Ver.	11.8	45.0	64.0	-19.0
16577.570	33.1	Hor.	11.9	45.0	64.0	-19.0
17984.199	29.1	Ver.	15.9	45.0	64.0	-19.0
14539.560	32.2	Ver.	12.7	44.9	64.0	-19.1
16513.631	33.0	Ver.	11.9	44.9	64.0	-19.1

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, mid frequency, Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>60</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

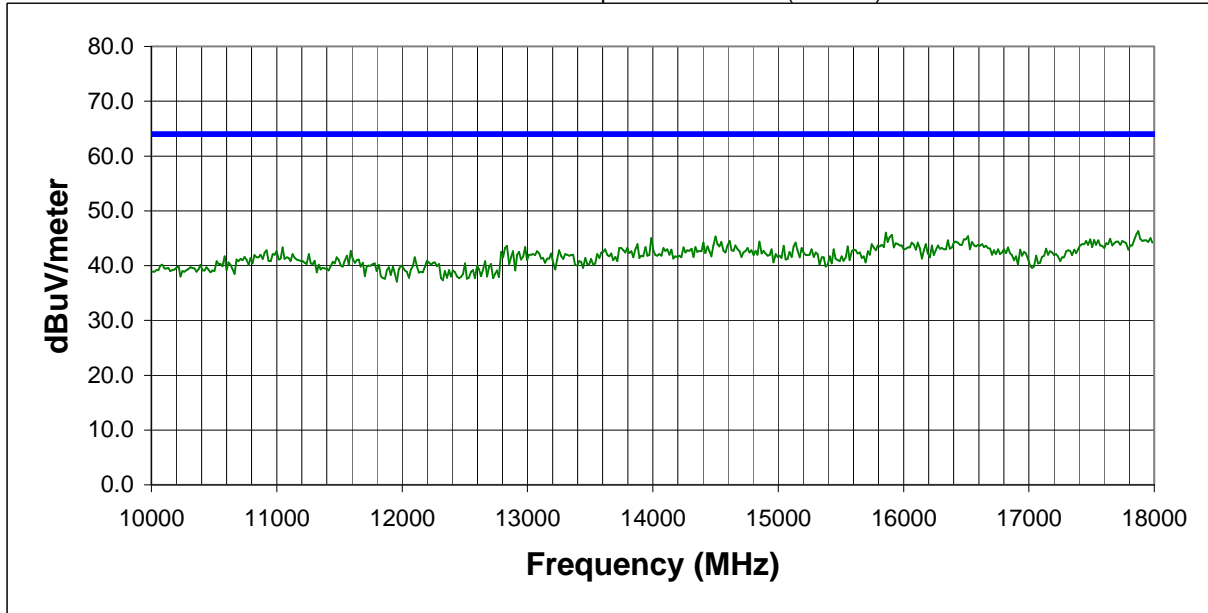

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17472.699	32.4	Hor.	14.1	46.5	64.0	-17.5
17864.311	30.8	Hor.	15.5	46.3	64.0	-17.7
17456.711	32.3	Hor.	14.0	46.3	64.0	-17.7
15850.280	34.6	Ver.	11.4	46.0	64.0	-18.0
17792.381	30.4	Hor.	15.2	45.6	64.0	-18.4
15898.230	34.1	Hor.	11.5	45.6	64.0	-18.4
15810.320	34.1	Ver.	11.5	45.6	64.0	-18.4
17992.188	29.7	Ver.	15.9	45.6	64.0	-18.4
17552.619	31.0	Hor.	14.4	45.4	64.0	-18.6
16505.641	33.5	Hor.	11.9	45.4	64.0	-18.6
17760.410	30.1	Ver.	15.2	45.3	64.0	-18.7
14491.610	32.6	Hor.	12.7	45.3	64.0	-18.7
17888.289	29.6	Ver.	15.6	45.2	64.0	-18.8
16593.551	33.2	Hor.	11.9	45.1	64.0	-18.9
16545.600	33.3	Ver.	11.8	45.1	64.0	-18.9
13980.110	32.6	Ver.	12.4	45.0	64.0	-19.0
17936.240	29.2	Ver.	15.7	44.9	64.0	-19.1
17640.529	30.2	Ver.	14.7	44.9	64.0	-19.1
17712.461	29.9	Ver.	15.0	44.9	64.0	-19.1
16417.730	33.1	Ver.	11.8	44.9	64.0	-19.1

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>DSS mode, low frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>60</b>
--------------------------------	--------------------------

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

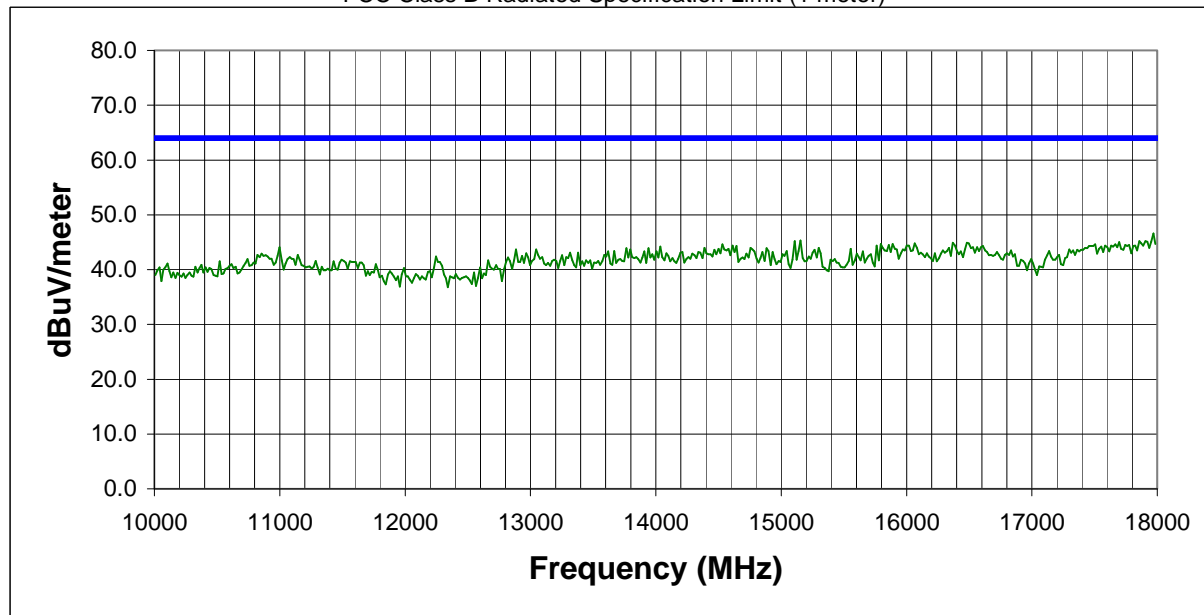

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17960.221	30.8	Ver.	15.8	46.6	64.0	-17.4
17992.188	30.3	Ver.	15.9	46.2	64.0	-17.8
17872.301	30.6	Hor.	15.5	46.1	64.0	-17.9
17488.680	31.5	Ver.	14.2	45.7	64.0	-18.3
17712.461	30.5	Hor.	15.0	45.5	64.0	-18.5
17456.711	31.4	Ver.	14.0	45.4	64.0	-18.6
16417.730	33.6	Ver.	11.8	45.4	64.0	-18.6
15858.270	33.9	Hor.	11.4	45.3	64.0	-18.7
15146.970	33.3	Ver.	12.0	45.3	64.0	-18.7
17848.330	29.7	Ver.	15.5	45.2	64.0	-18.8
17552.619	30.8	Hor.	14.4	45.2	64.0	-18.8
15099.020	33.1	Hor.	12.1	45.2	64.0	-18.8
14723.380	32.6	Hor.	12.5	45.1	64.0	-18.9
16497.650	33.2	Ver.	11.9	45.1	64.0	-18.9
17688.480	30.1	Ver.	14.9	45.0	64.0	-19.0
16361.780	33.2	Ver.	11.7	44.9	64.0	-19.1
16058.080	33.2	Ver.	11.6	44.8	64.0	-19.2
16577.570	32.9	Hor.	11.9	44.8	64.0	-19.2
15954.180	33.3	Hor.	11.5	44.8	64.0	-19.2
16529.619	33.0	Ver.	11.8	44.8	64.0	-19.2

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>No hop mode, low frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>60</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

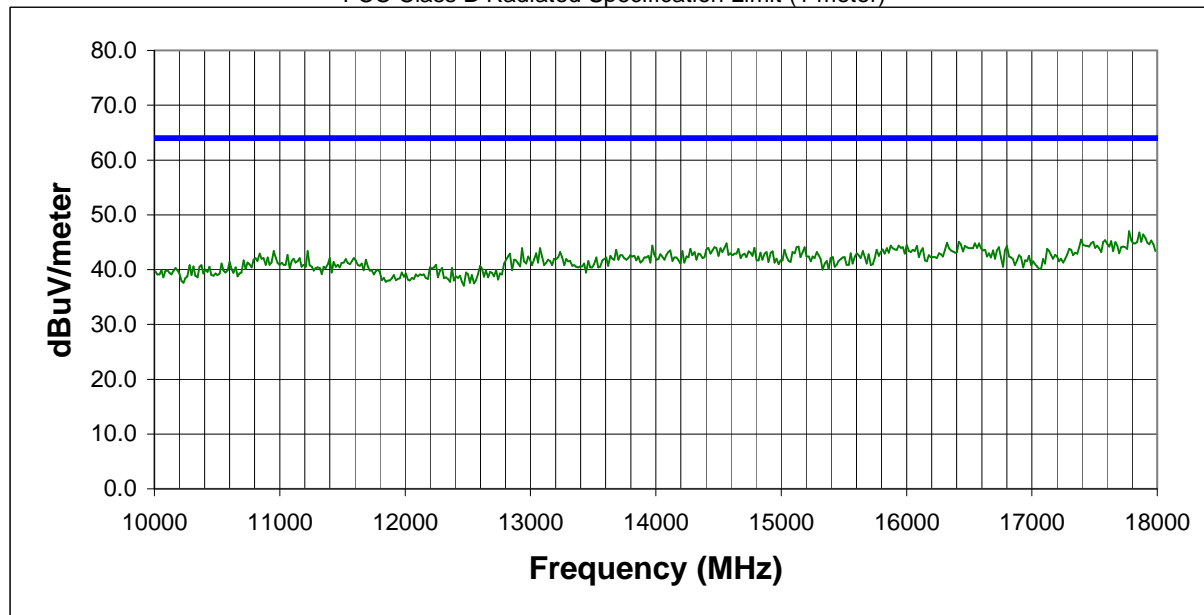

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17768.410	31.8	Hor.	15.2	47.0	64.0	-17.0
17848.330	31.3	Ver.	15.5	46.8	64.0	-17.2
17880.301	30.9	Ver.	15.5	46.4	64.0	-17.6
17520.650	32.0	Ver.	14.2	46.2	64.0	-17.8
17712.461	31.1	Ver.	15.0	46.1	64.0	-17.9
17952.230	30.1	Hor.	15.8	45.9	64.0	-18.1
15954.180	34.2	Hor.	11.5	45.7	64.0	-18.3
17384.779	31.8	Ver.	13.7	45.5	64.0	-18.5
17456.711	31.5	Ver.	14.0	45.5	64.0	-18.5
17576.590	30.9	Ver.	14.5	45.4	64.0	-18.6
17696.480	30.4	Ver.	14.9	45.3	64.0	-18.7
17624.551	30.5	Hor.	14.7	45.2	64.0	-18.8
14515.590	32.5	Ver.	12.7	45.2	64.0	-18.8
16409.730	33.3	Hor.	11.8	45.1	64.0	-18.9
17480.689	31.0	Ver.	14.1	45.1	64.0	-18.9
17656.520	30.2	Ver.	14.8	45.0	64.0	-19.0
16313.830	33.2	Hor.	11.7	44.9	64.0	-19.1
16569.580	32.9	Hor.	11.9	44.8	64.0	-19.2
15922.210	33.3	Hor.	11.5	44.8	64.0	-19.2
14555.550	32.1	Ver.	12.7	44.8	64.0	-19.2



Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>No hop mode, mid frequency, Antenna 'D'</b>		Temperature (°C): <b>21</b>	% Humidity: <b>60</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

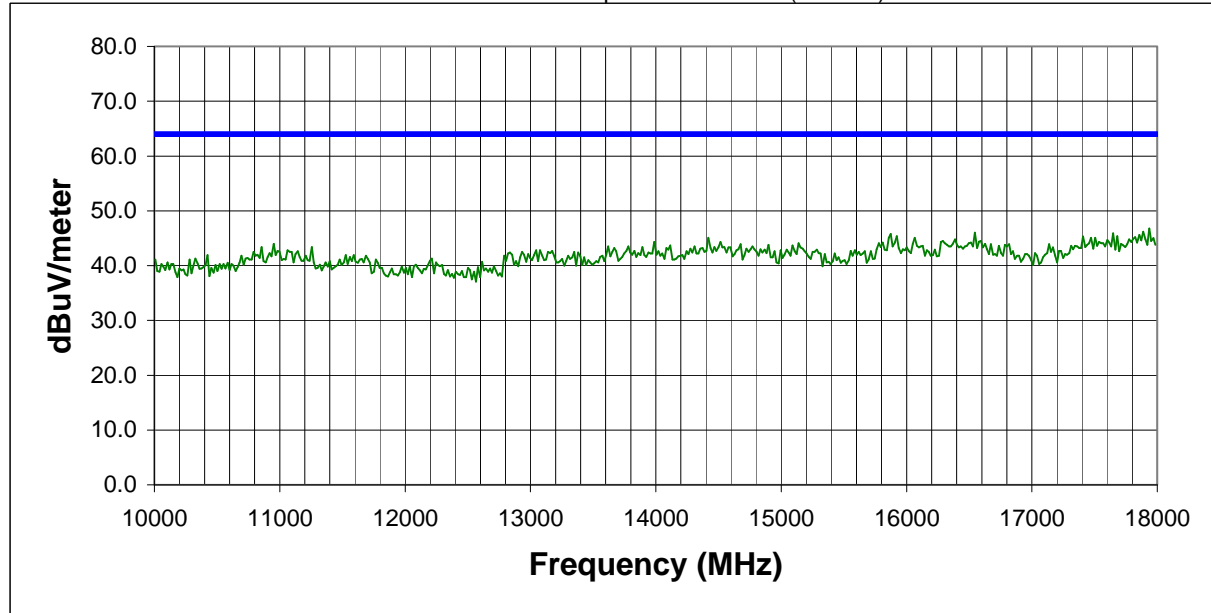

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17928.250	31.2	Ver.	15.6	46.8	64.0	-17.2
17952.230	30.9	Hor.	15.8	46.7	64.0	-17.3
17880.301	30.7	Hor.	15.5	46.2	64.0	-17.8
17680.490	31.2	Ver.	14.9	46.1	64.0	-17.9
16537.609	34.2	Ver.	11.8	46.0	64.0	-18.0
17640.529	31.2	Ver.	14.7	45.9	64.0	-18.1
15866.270	34.3	Hor.	11.5	45.8	64.0	-18.2
15906.230	34.3	Ver.	11.5	45.8	64.0	-18.2
17760.410	30.5	Hor.	15.2	45.7	64.0	-18.3
17848.330	30.1	Hor.	15.5	45.6	64.0	-18.4
15138.980	33.3	Hor.	12.1	45.4	64.0	-18.6
17400.770	31.6	Ver.	13.7	45.3	64.0	-18.7
17456.711	31.3	Hor.	14.0	45.3	64.0	-18.7
17824.350	30.0	Ver.	15.3	45.3	64.0	-18.7
17728.449	30.2	Hor.	15.0	45.2	64.0	-18.8
14627.480	32.6	Hor.	12.6	45.2	64.0	-18.8
14411.690	32.5	Ver.	12.6	45.1	64.0	-18.9
16058.080	33.5	Hor.	11.6	45.1	64.0	-18.9
17496.670	30.9	Hor.	14.2	45.1	64.0	-18.9
17992.188	29.1	Ver.	15.9	45.0	64.0	-19.0

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>No hop mode, high frequency, Antenna 'D'</b>		
	Temperature (°C): <b>21</b>	% Humidity: <b>60</b>	

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

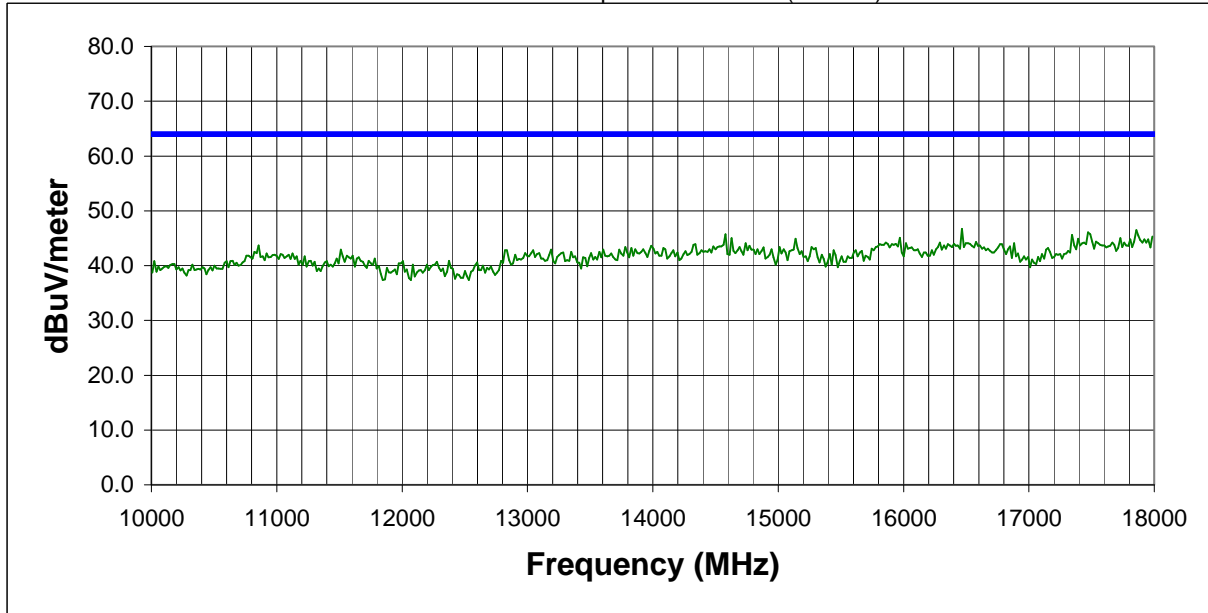

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17888.289	31.5	Ver.	15.6	47.1	64.0	-16.9
16457.689	35.0	Ver.	11.7	46.7	64.0	-17.3
17848.330	31.0	Ver.	15.5	46.5	64.0	-17.5
17464.699	32.0	Ver.	14.1	46.1	64.0	-17.9
16481.660	34.0	Ver.	11.9	45.9	64.0	-18.1
17480.689	31.6	Ver.	14.1	45.7	64.0	-18.3
14571.530	33.1	Ver.	12.6	45.7	64.0	-18.3
17336.830	32.2	Ver.	13.4	45.6	64.0	-18.4
17976.199	29.5	Ver.	15.8	45.3	64.0	-18.7
17936.240	29.6	Ver.	15.7	45.3	64.0	-18.7
17696.480	30.4	Hor.	14.9	45.3	64.0	-18.7
17776.400	30.0	Ver.	15.2	45.2	64.0	-18.8
15962.170	33.6	Hor.	11.5	45.1	64.0	-18.9
17720.449	30.0	Ver.	15.0	45.0	64.0	-19.0
14619.480	32.4	Hor.	12.6	45.0	64.0	-19.0
15938.200	33.5	Hor.	11.5	45.0	64.0	-19.0
17984.199	29.1	Ver.	15.9	45.0	64.0	-19.0
17384.779	31.2	Ver.	13.7	44.9	64.0	-19.1
15130.980	32.8	Ver.	12.1	44.9	64.0	-19.1
16018.120	33.2	Hor.	11.6	44.8	64.0	-19.2

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>Receive mode, high frequency, Antenna 'D'</b>		
		Temperature (°C): <b>21</b>	% Humidity: <b>60</b>

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

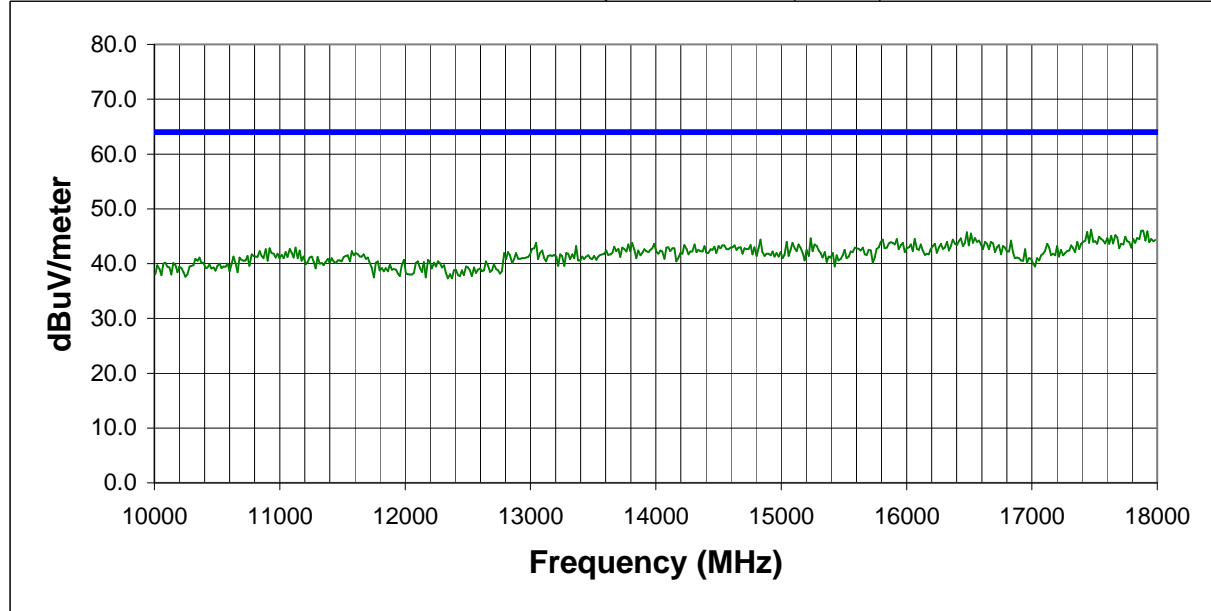


Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17488.680	32.3	Ver.	14.2	46.5	64.0	-17.5
17464.699	32.1	Hor.	14.1	46.2	64.0	-17.8
17880.301	30.5	Hor.	15.5	46.0	64.0	-18.0
17864.311	30.5	Ver.	15.5	46.0	64.0	-18.0
17912.270	30.3	Ver.	15.6	45.9	64.0	-18.1
17984.199	29.9	Ver.	15.9	45.8	64.0	-18.2
16473.670	33.8	Hor.	11.9	45.7	64.0	-18.3
17520.650	31.3	Hor.	14.2	45.5	64.0	-18.5
17824.350	30.1	Ver.	15.3	45.4	64.0	-18.6
15794.340	33.9	Ver.	11.4	45.3	64.0	-18.7
17656.520	30.4	Ver.	14.8	45.2	64.0	-18.8
17624.551	30.4	Ver.	14.7	45.1	64.0	-18.9
16417.730	33.2	Hor.	11.8	45.0	64.0	-19.0
15858.270	33.6	Hor.	11.4	45.0	64.0	-19.0
16321.820	33.1	Ver.	11.8	44.9	64.0	-19.1
17736.439	29.9	Ver.	15.0	44.9	64.0	-19.1
17672.500	29.9	Ver.	14.9	44.8	64.0	-19.2
14547.550	32.0	Ver.	12.7	44.7	64.0	-19.3
16537.609	32.9	Ver.	11.8	44.7	64.0	-19.3
16161.980	33.1	Hor.	11.6	44.7	64.0	-19.3

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>Receive mode, mid frequency, Antenna 'D'</b>		
		Temperature (°C): <b>21</b>	% Humidity: <b>60</b>
<b>Test System</b>			
<b>Test Equipment</b>			

FCC Class B Radiated Specification Limit (1 meter)

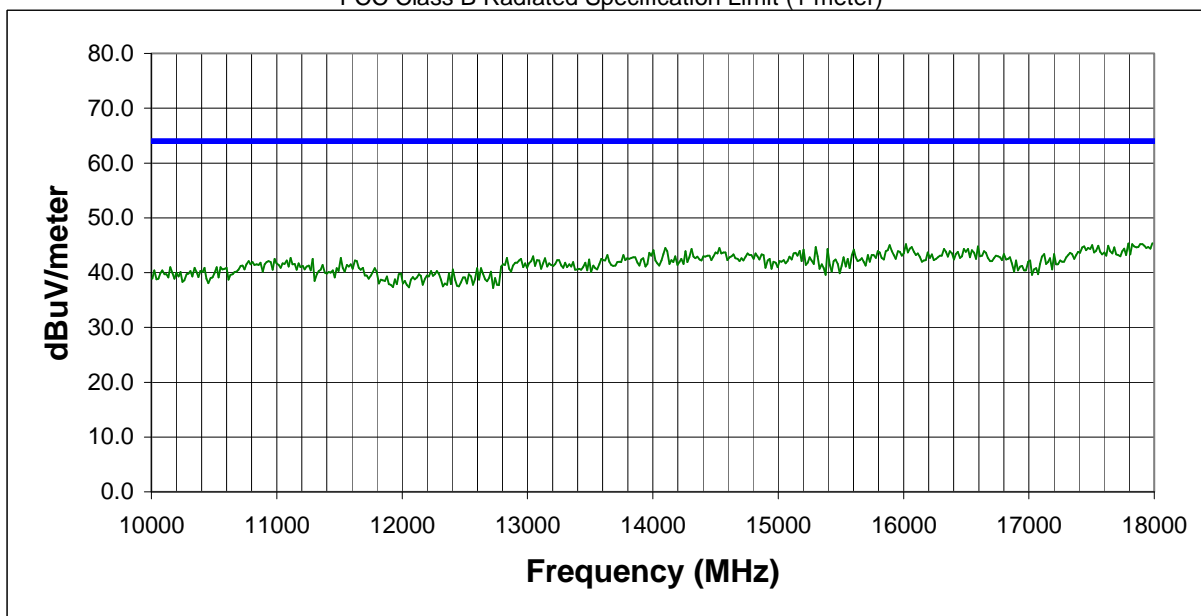

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
15922.210	34.5	Hor.	11.5	46.0	64.0	-18.0
17456.711	31.7	Ver.	14.0	45.7	64.0	-18.3
17976.199	29.6	Ver.	15.8	45.4	64.0	-18.6
17784.391	30.1	Hor.	15.2	45.3	64.0	-18.7
17472.699	31.2	Ver.	14.1	45.3	64.0	-18.7
17880.301	29.7	Ver.	15.5	45.2	64.0	-18.8
17408.760	31.4	Hor.	13.8	45.2	64.0	-18.8
17920.260	29.6	Ver.	15.6	45.2	64.0	-18.8
16010.130	33.6	Ver.	11.6	45.2	64.0	-18.8
17816.359	29.9	Ver.	15.3	45.2	64.0	-18.8
15986.150	33.5	Ver.	11.6	45.1	64.0	-18.9
16481.660	33.2	Ver.	11.9	45.1	64.0	-18.9
16321.820	33.2	Hor.	11.8	45.0	64.0	-19.0
15882.250	33.5	Ver.	11.5	45.0	64.0	-19.0
10839.180	34.9	Ver.	10.0	44.9	64.0	-19.1
17624.551	30.2	Hor.	14.7	44.9	64.0	-19.1
14515.590	32.2	Ver.	12.7	44.9	64.0	-19.1
17544.631	30.5	Ver.	14.4	44.9	64.0	-19.1
17856.320	29.3	Ver.	15.5	44.8	64.0	-19.2
14387.710	32.2	Hor.	12.6	44.8	64.0	-19.2

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>Receive mode, low frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>60</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

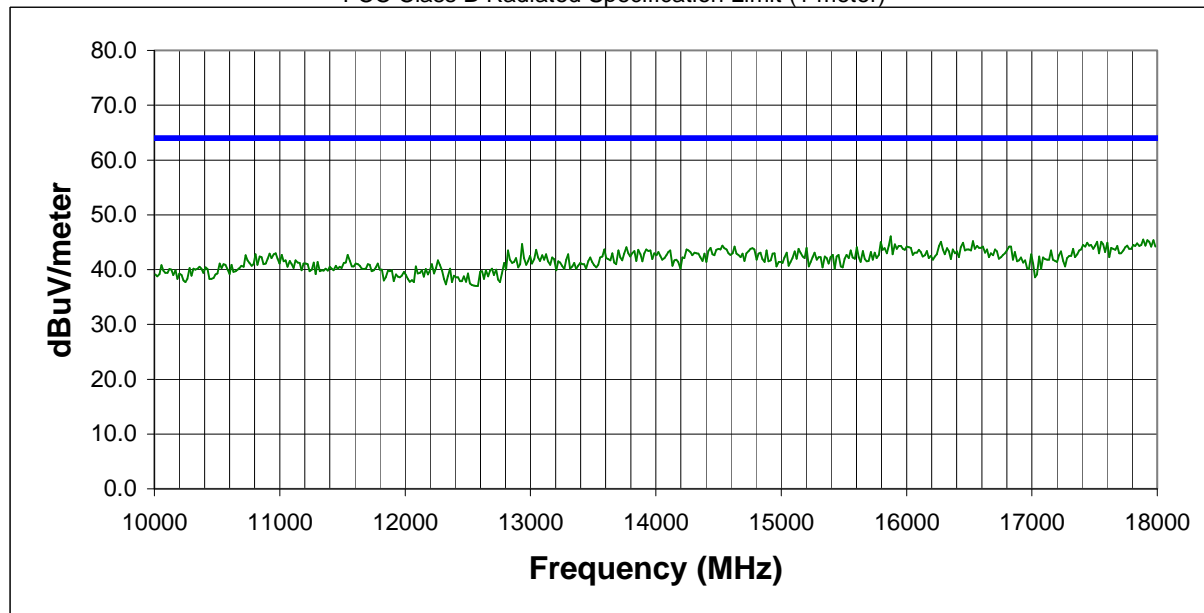

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
17456.711	32.8	Hor.	14.0	46.8	64.0	-17.2
15866.270	34.6	Hor.	11.5	46.1	64.0	-17.9
17952.230	30.1	Hor.	15.8	45.9	64.0	-18.1
17872.301	30.4	Hor.	15.5	45.9	64.0	-18.1
16481.660	33.9	Hor.	11.9	45.8	64.0	-18.2
17984.199	29.8	Ver.	15.9	45.7	64.0	-18.3
16417.730	33.8	Ver.	11.8	45.6	64.0	-18.4
17840.340	30.1	Ver.	15.4	45.5	64.0	-18.5
17520.650	31.2	Hor.	14.2	45.4	64.0	-18.6
17712.461	30.4	Hor.	15.0	45.4	64.0	-18.6
17912.270	29.8	Ver.	15.6	45.4	64.0	-18.6
17504.660	31.2	Hor.	14.2	45.4	64.0	-18.6
15746.380	34.0	Ver.	11.3	45.3	64.0	-18.7
14435.660	32.6	Hor.	12.7	45.3	64.0	-18.7
16521.631	33.3	Hor.	11.9	45.2	64.0	-18.8
16369.770	33.4	Hor.	11.7	45.1	64.0	-18.9
16561.590	33.2	Ver.	11.9	45.1	64.0	-18.9
16265.880	33.4	Hor.	11.7	45.1	64.0	-18.9
15138.980	32.9	Ver.	12.1	45.0	64.0	-19.0
15786.340	33.6	Hor.	11.4	45.0	64.0	-19.0

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>DSS mode, low frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>38</b>
--------------------------------	--------------------------

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

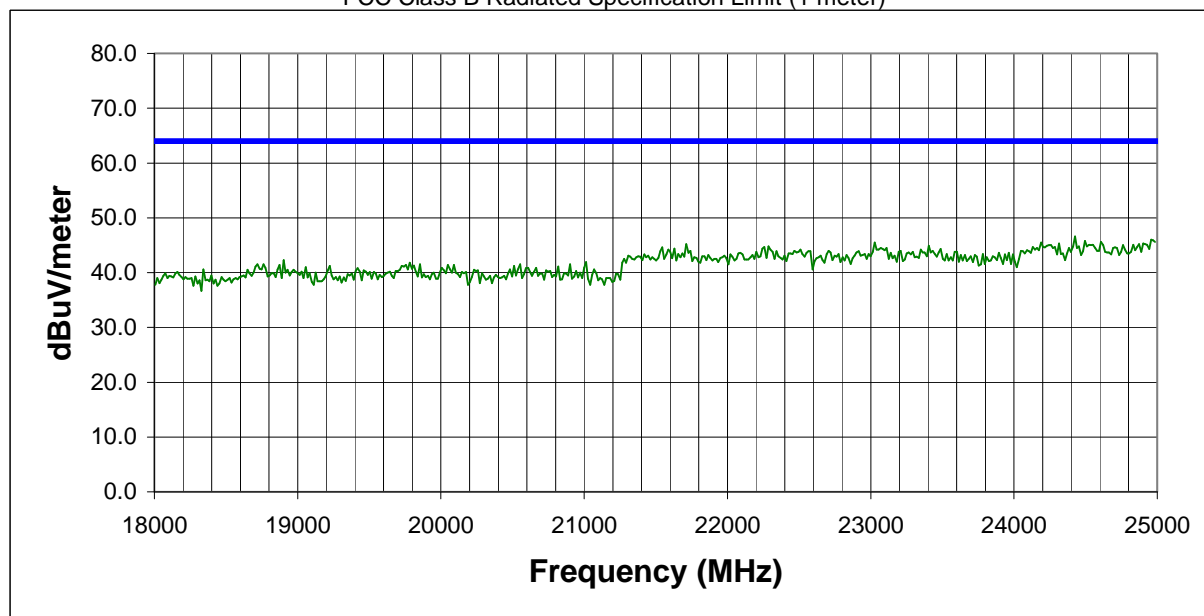

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24418.830	36.6	Hor.	10.0	46.6	64.0	-17.4
24957.230	36.3	Ver.	10.2	46.5	64.0	-17.5
24160.119	35.9	Ver.	10.0	45.9	64.0	-18.1
24488.750	35.7	Ver.	10.1	45.8	64.0	-18.2
24600.631	35.5	Hor.	10.1	45.6	64.0	-18.4
23020.391	35.3	Ver.	10.2	45.5	64.0	-18.5
24202.070	35.5	Ver.	10.0	45.5	64.0	-18.5
21586.990	35.3	Hor.	10.1	45.4	64.0	-18.6
24845.350	35.3	Hor.	10.1	45.4	64.0	-18.6
24894.301	35.2	Hor.	10.1	45.3	64.0	-18.7
24306.949	35.3	Hor.	10.0	45.3	64.0	-18.7
24866.330	35.1	Ver.	10.1	45.2	64.0	-18.8
21705.859	35.1	Hor.	10.1	45.2	64.0	-18.8
24516.721	35.0	Hor.	10.1	45.1	64.0	-18.9
24649.570	35.0	Ver.	10.1	45.1	64.0	-18.9
24544.689	35.0	Hor.	10.1	45.1	64.0	-18.9
24369.881	35.1	Hor.	10.0	45.1	64.0	-18.9
24614.609	34.9	Hor.	10.1	45.0	64.0	-19.0
24754.449	34.9	Ver.	10.1	45.0	64.0	-19.0
24237.029	35.0	Ver.	10.0	45.0	64.0	-19.0

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>DSS mode, mid frequency, Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>38</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

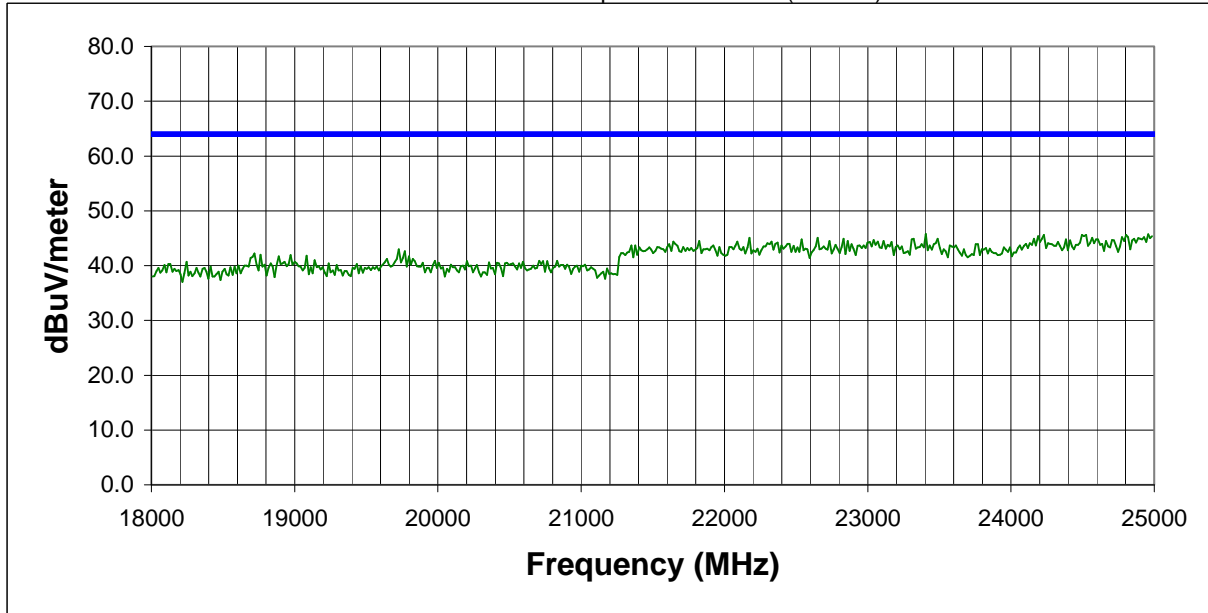

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24901.289	36.4	Ver.	10.1	46.5	64.0	-17.5
24943.240	36.1	Hor.	10.2	46.3	64.0	-17.7
24957.230	36.0	Hor.	10.2	46.2	64.0	-17.8
24174.100	36.0	Ver.	10.0	46.0	64.0	-18.0
24761.449	35.7	Hor.	10.1	45.8	64.0	-18.2
23397.971	35.7	Ver.	10.1	45.8	64.0	-18.2
24796.410	35.5	Hor.	10.1	45.6	64.0	-18.4
24516.721	35.5	Ver.	10.1	45.6	64.0	-18.4
24488.750	35.5	Hor.	10.1	45.6	64.0	-18.4
24223.051	35.6	Ver.	10.0	45.6	64.0	-18.4
24202.070	35.6	Ver.	10.0	45.6	64.0	-18.4
24621.600	35.4	Ver.	10.1	45.5	64.0	-18.5
24719.490	35.4	Ver.	10.1	45.5	64.0	-18.5
24411.840	35.5	Ver.	10.0	45.5	64.0	-18.5
24985.199	35.2	Ver.	10.2	45.4	64.0	-18.6
23013.400	35.1	Ver.	10.2	45.3	64.0	-18.7
24558.670	35.0	Ver.	10.1	45.1	64.0	-18.9
22167.340	34.9	Ver.	10.2	45.1	64.0	-18.9
22642.811	34.9	Hor.	10.2	45.1	64.0	-18.9
24132.150	35.1	Hor.	10.0	45.1	64.0	-18.9

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>DSS mode, high frequency, Antenna 'D'</b>		
		Temperature (°C): <b>21</b>	% Humidity: <b>38</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

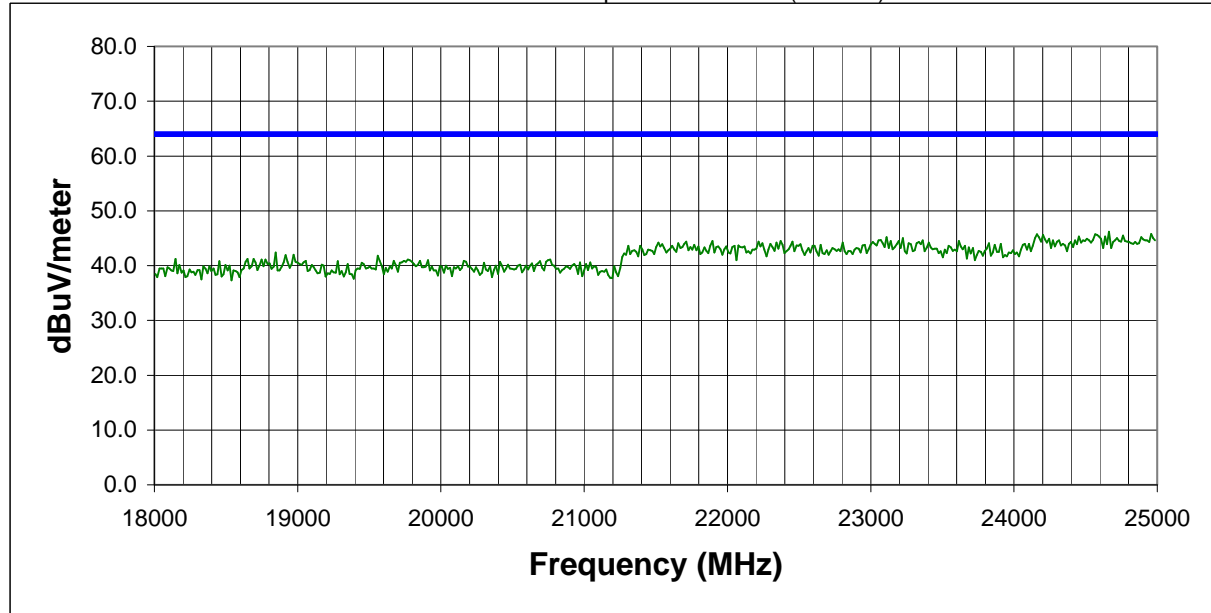

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24915.270	36.9	Hor.	10.1	47.0	64.0	-17.0
24537.699	36.2	Ver.	10.1	46.3	64.0	-17.7
24971.211	36.1	Hor.	10.2	46.3	64.0	-17.7
24656.561	36.1	Hor.	10.1	46.2	64.0	-17.8
24160.119	36.1	Ver.	10.0	46.1	64.0	-17.9
24950.230	35.6	Ver.	10.2	45.8	64.0	-18.2
24572.660	35.5	Hor.	10.1	45.6	64.0	-18.4
24195.080	35.6	Ver.	10.0	45.6	64.0	-18.4
24754.449	35.4	Ver.	10.1	45.5	64.0	-18.5
24607.619	35.2	Hor.	10.1	45.3	64.0	-18.7
24446.801	35.3	Ver.	10.0	45.3	64.0	-18.7
23335.039	35.2	Ver.	10.1	45.3	64.0	-18.7
24880.311	35.1	Hor.	10.1	45.2	64.0	-18.8
23104.301	35.1	Ver.	10.1	45.2	64.0	-18.8
24712.500	34.9	Hor.	10.1	45.0	64.0	-19.0
24691.520	34.9	Ver.	10.1	45.0	64.0	-19.0
24258.010	35.0	Ver.	10.0	45.0	64.0	-19.0
23216.170	34.9	Ver.	10.1	45.0	64.0	-19.0
24104.180	35.0	Hor.	10.0	45.0	64.0	-19.0
24132.150	35.0	Ver.	10.0	45.0	64.0	-19.0



Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>No hop mode, low frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>38</b>
--------------------------------	--------------------------

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

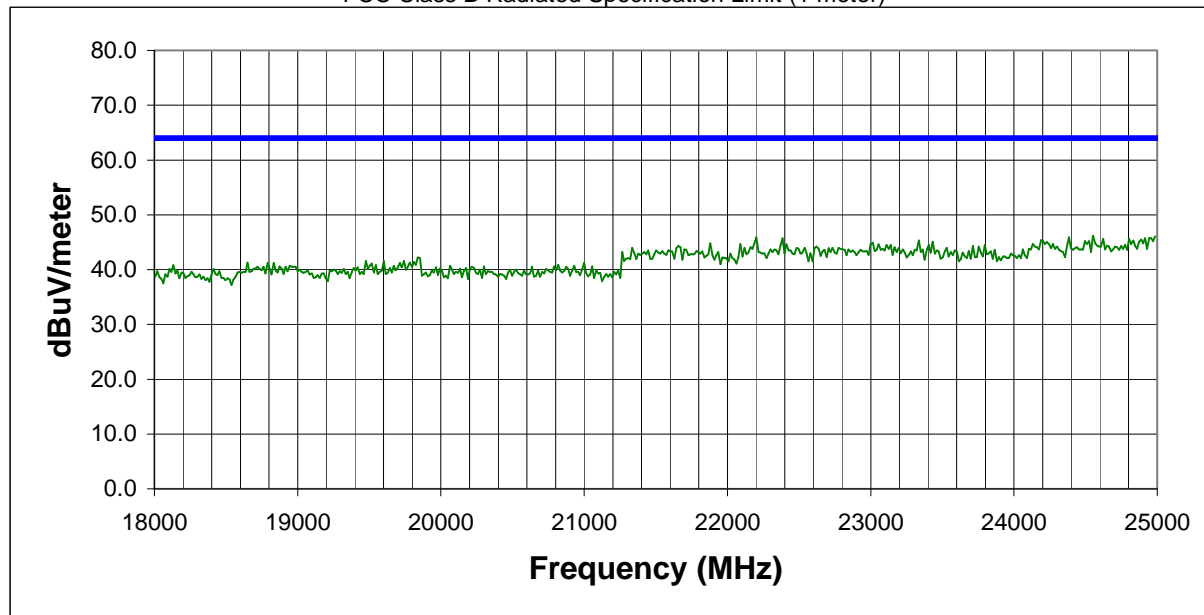

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24887.301	36.3	Ver.	10.1	46.4	64.0	-17.6
24544.689	36.1	Hor.	10.1	46.2	64.0	-17.8
24943.240	35.9	Hor.	10.2	46.1	64.0	-17.9
24978.199	35.9	Ver.	10.2	46.1	64.0	-17.9
24216.051	36.1	Hor.	10.0	46.1	64.0	-17.9
24376.881	35.9	Hor.	10.0	45.9	64.0	-18.1
24341.910	35.9	Hor.	10.0	45.9	64.0	-18.1
22195.311	35.7	Ver.	10.2	45.9	64.0	-18.1
24467.770	35.7	Hor.	10.1	45.8	64.0	-18.2
22377.109	35.4	Ver.	10.3	45.7	64.0	-18.3
24614.609	35.5	Hor.	10.1	45.6	64.0	-18.4
24796.410	35.5	Hor.	10.1	45.6	64.0	-18.4
23363.010	35.4	Hor.	10.1	45.5	64.0	-18.5
24181.090	35.4	Hor.	10.0	45.4	64.0	-18.6
22985.430	35.2	Ver.	10.2	45.4	64.0	-18.6
24579.650	35.3	Ver.	10.1	45.4	64.0	-18.6
24824.381	35.2	Hor.	10.1	45.3	64.0	-18.7
24761.449	35.2	Ver.	10.1	45.3	64.0	-18.7
23328.051	35.2	Hor.	10.1	45.3	64.0	-18.7
24062.230	35.3	Ver.	10.0	45.3	64.0	-18.7

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>No hop mode, mid frequency, Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>38</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

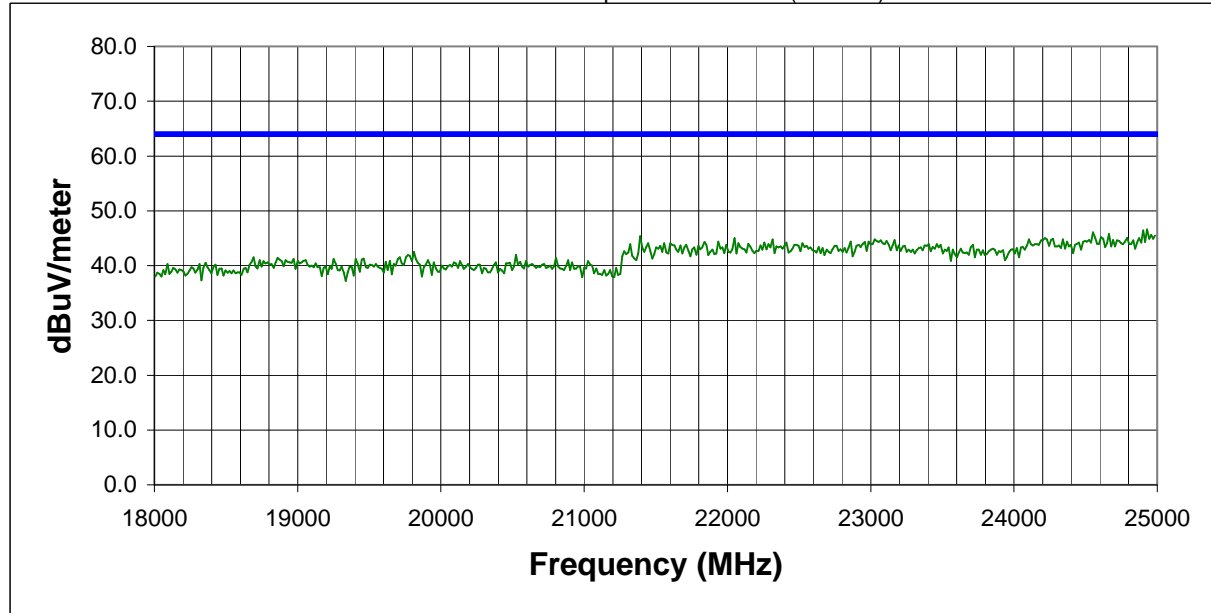

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24285.980	36.9	Ver.	10.0	46.9	64.0	-17.1
24922.270	36.5	Hor.	10.1	46.6	64.0	-17.4
24894.301	36.3	Ver.	10.1	46.4	64.0	-17.6
24544.689	36.0	Ver.	10.1	46.1	64.0	-17.9
24467.770	36.0	Hor.	10.1	46.1	64.0	-17.9
24957.230	35.9	Ver.	10.2	46.1	64.0	-17.9
24202.070	36.0	Ver.	10.0	46.0	64.0	-18.0
24803.400	35.8	Ver.	10.1	45.9	64.0	-18.1
24174.100	35.9	Hor.	10.0	45.9	64.0	-18.1
24656.561	35.7	Hor.	10.1	45.8	64.0	-18.2
24327.930	35.8	Ver.	10.0	45.8	64.0	-18.2
23181.211	35.6	Hor.	10.1	45.7	64.0	-18.3
24146.131	35.6	Ver.	10.0	45.6	64.0	-18.4
24230.039	35.6	Hor.	10.0	45.6	64.0	-18.4
24859.340	35.4	Ver.	10.1	45.5	64.0	-18.5
21384.221	35.5	Hor.	9.9	45.4	64.0	-18.6
24600.631	35.1	Ver.	10.1	45.2	64.0	-18.8
24985.199	35.0	Ver.	10.2	45.2	64.0	-18.8
24635.590	35.0	Ver.	10.1	45.1	64.0	-18.9
23363.010	35.0	Ver.	10.1	45.1	64.0	-18.9

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99


EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>No hop mode, high frequency, Antenna 'D'</b>		

Temperature (°C): <b>21</b>	% Humidity: <b>38</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

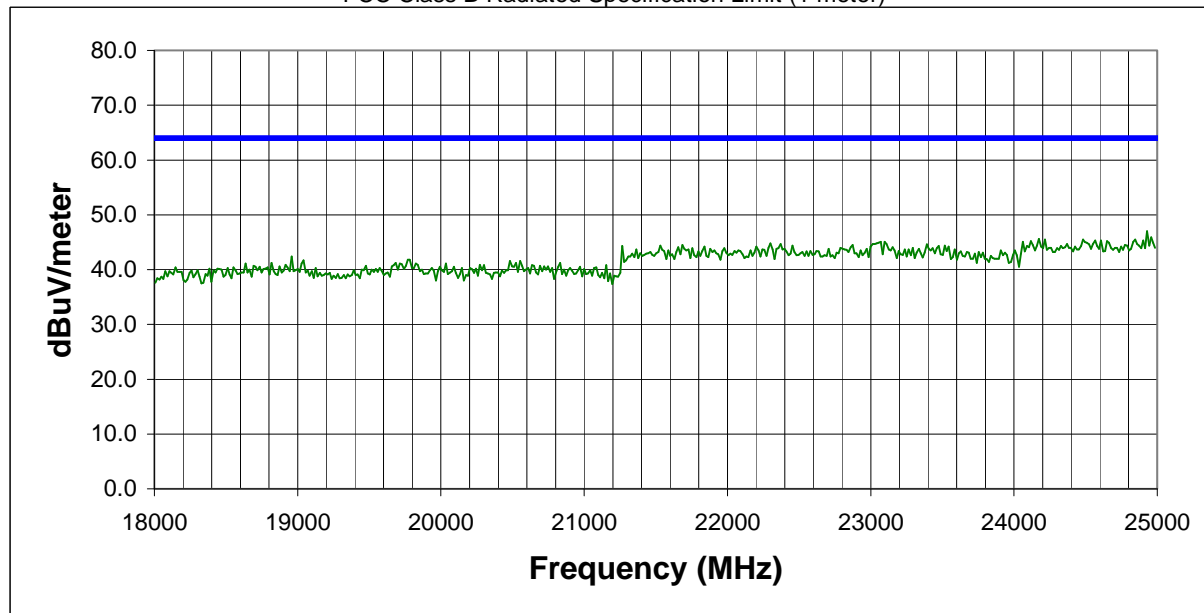

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24922.270	36.9	Hor.	10.1	47.0	64.0	-17.0
24160.119	36.0	Hor.	10.0	46.0	64.0	-18.0
24216.051	35.9	Hor.	10.0	45.9	64.0	-18.1
24887.301	35.5	Ver.	10.1	45.6	64.0	-18.4
24474.770	35.4	Ver.	10.1	45.5	64.0	-18.5
24838.359	35.4	Hor.	10.1	45.5	64.0	-18.5
24230.039	35.4	Hor.	10.0	45.4	64.0	-18.6
24509.730	35.3	Ver.	10.1	45.4	64.0	-18.6
22985.430	35.2	Ver.	10.2	45.4	64.0	-18.6
24600.631	35.2	Ver.	10.1	45.3	64.0	-18.7
24558.670	35.2	Ver.	10.1	45.3	64.0	-18.7
24111.170	35.2	Hor.	10.0	45.2	64.0	-18.8
24642.580	35.1	Hor.	10.1	45.2	64.0	-18.8
23062.340	34.9	Hor.	10.2	45.1	64.0	-18.9
24055.230	35.1	Ver.	10.0	45.1	64.0	-18.9
23111.289	35.0	Ver.	10.1	45.1	64.0	-18.9
23090.311	35.0	Hor.	10.1	45.1	64.0	-18.9
24146.131	35.0	Hor.	10.0	45.0	64.0	-19.0
24453.789	35.0	Hor.	10.0	45.0	64.0	-19.0
24873.320	34.8	Hor.	10.1	44.9	64.0	-19.1

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments: <b>Receive mode, low frequency, Antenna 'D'</b>			
		Temperature (°C): <b>21</b>	% Humidity: <b>38</b>

Test System


Test Equipment


FCC Class B Radiated Specification Limit (1 meter)

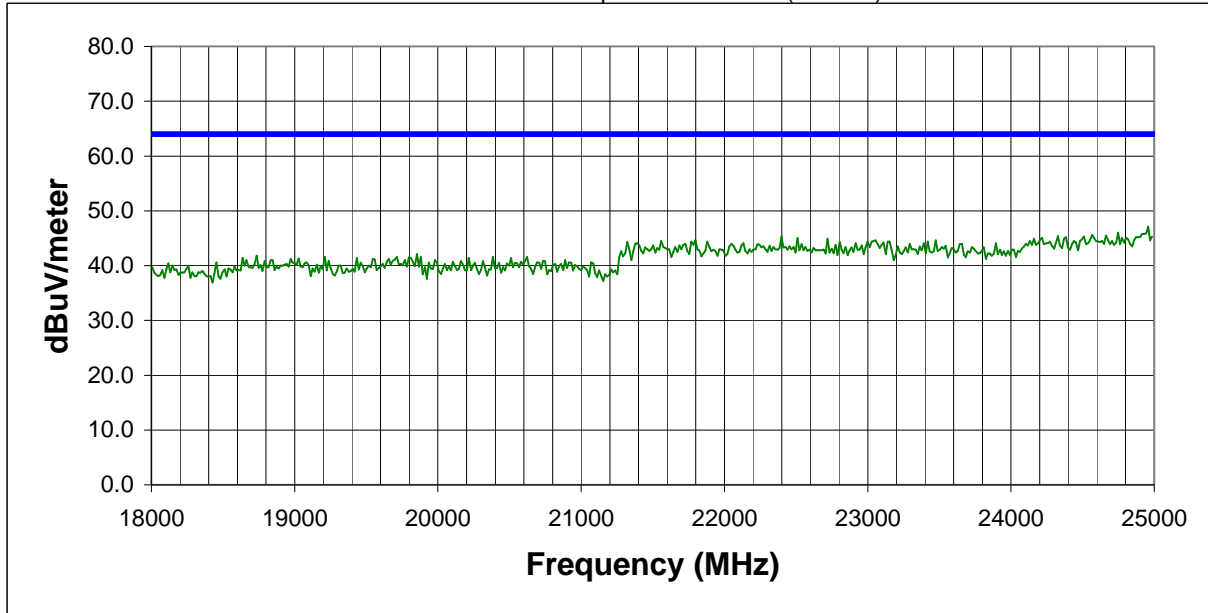

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24950.230	36.9	Hor.	10.2	47.1	64.0	-16.9
24230.039	36.7	Hor.	10.0	46.7	64.0	-17.3
24873.320	36.6	Hor.	10.1	46.7	64.0	-17.3
24740.471	35.9	Hor.	10.1	46.0	64.0	-18.0
24048.240	36.0	Hor.	10.0	46.0	64.0	-18.0
24908.279	35.7	Hor.	10.1	45.8	64.0	-18.2
24411.840	35.8	Hor.	10.0	45.8	64.0	-18.2
24558.670	35.5	Hor.	10.1	45.6	64.0	-18.4
23097.301	35.5	Ver.	10.1	45.6	64.0	-18.4
24649.570	35.4	Ver.	10.1	45.5	64.0	-18.5
24216.051	35.5	Hor.	10.0	45.5	64.0	-18.5
24579.650	35.3	Ver.	10.1	45.4	64.0	-18.6
24320.939	35.4	Ver.	10.0	45.4	64.0	-18.6
24160.119	35.4	Ver.	10.0	45.4	64.0	-18.6
24502.730	35.2	Ver.	10.1	45.3	64.0	-18.7
24621.600	35.2	Ver.	10.1	45.3	64.0	-18.7
22391.090	35.0	Hor.	10.3	45.3	64.0	-18.7
24376.881	35.2	Hor.	10.0	45.2	64.0	-18.8
24796.410	35.0	Hor.	10.1	45.1	64.0	-18.9
22020.510	34.9	Ver.	10.2	45.1	64.0	-18.9

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**


Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	
Comments:	<b>Receive mode, mid frequency, Antenna 'D'</b>		
		Temperature (°C): <b>21</b>	% Humidity: <b>38</b>

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

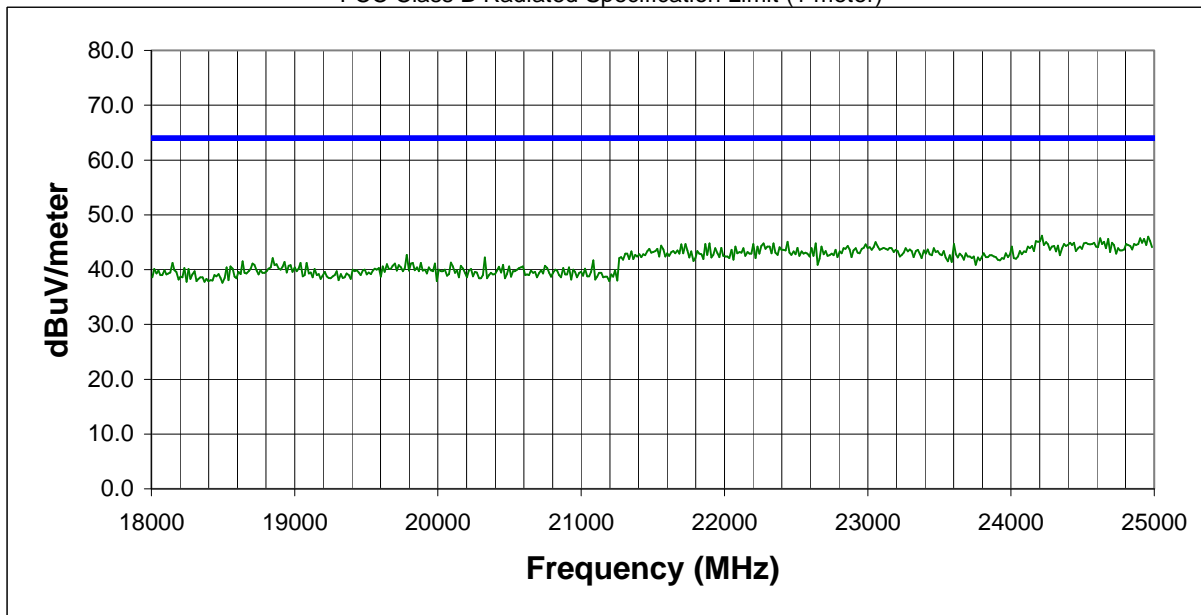

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24929.260	36.1	Hor.	10.2	46.3	64.0	-17.7
24209.061	36.2	Hor.	10.0	46.2	64.0	-17.8
24915.270	36.1	Ver.	10.1	46.2	64.0	-17.8
24859.340	36.0	Ver.	10.1	46.1	64.0	-17.9
24971.211	35.7	Ver.	10.2	45.9	64.0	-18.1
24607.619	35.8	Hor.	10.1	45.9	64.0	-18.1
24425.820	35.7	Ver.	10.0	45.7	64.0	-18.3
24670.551	35.5	Hor.	10.1	45.6	64.0	-18.4
24258.010	35.6	Ver.	10.0	45.6	64.0	-18.4
24369.881	35.6	Hor.	10.0	45.6	64.0	-18.4
24495.740	35.3	Ver.	10.1	45.4	64.0	-18.6
24565.660	35.3	Ver.	10.1	45.4	64.0	-18.6
24146.131	35.2	Hor.	10.0	45.2	64.0	-18.8
24167.109	35.2	Hor.	10.0	45.2	64.0	-18.8
23097.301	35.1	Hor.	10.1	45.2	64.0	-18.8
22146.369	34.9	Ver.	10.2	45.1	64.0	-18.9
22433.051	34.8	Hor.	10.3	45.1	64.0	-18.9
22006.520	34.8	Hor.	10.2	45.0	64.0	-19.0
23041.369	34.8	Hor.	10.2	45.0	64.0	-19.0
24237.029	35.0	Ver.	10.0	45.0	64.0	-19.0

**Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets**

Rev 3.3  
10/09/99

EUT: <b>Bluetooth/Ambler</b>	Serial Number: <b>RJ050100</b>	Job Number: <b>INSC00y2</b>	Date: <b>05/08/00</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power:	


Comments: **Receive mode, high frequency, Antenna 'D'**

Temperature (°C): <b>21</b>	% Humidity: <b>38</b>
--------------------------------	--------------------------

**Test System**


**Test Equipment**


FCC Class B Radiated Specification Limit (1 meter)

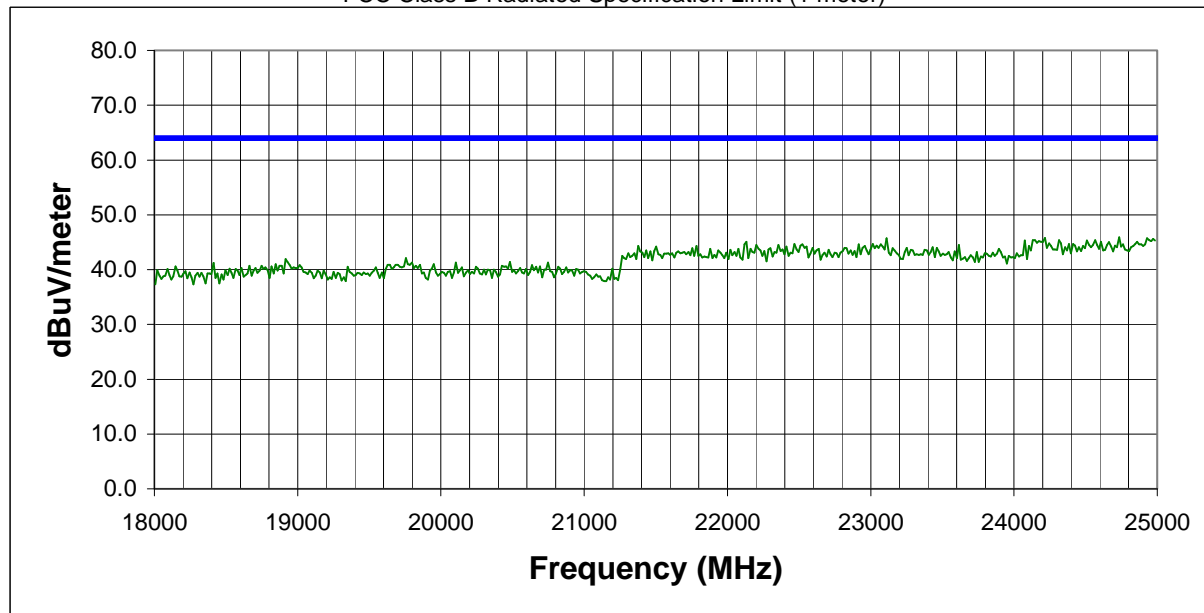

Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Correction Factor (dB/m)	Adjusted Level (dBuV/meter)	Specification Limit (dBuV/meter)	Margin (dB)
24397.850	36.5	Hor.	10.0	46.5	64.0	-17.5
24579.650	36.3	Ver.	10.1	46.4	64.0	-17.6
24957.230	35.7	Ver.	10.2	45.9	64.0	-18.1
24726.480	35.8	Ver.	10.1	45.9	64.0	-18.1
24209.061	35.8	Hor.	10.0	45.8	64.0	-18.2
24922.270	35.6	Ver.	10.1	45.7	64.0	-18.3
23104.301	35.6	Hor.	10.1	45.7	64.0	-18.3
24090.199	35.6	Ver.	10.0	45.6	64.0	-18.4
24649.570	35.4	Ver.	10.1	45.5	64.0	-18.5
24558.670	35.3	Hor.	10.1	45.4	64.0	-18.6
24125.160	35.4	Hor.	10.0	45.4	64.0	-18.6
24306.949	35.4	Hor.	10.0	45.4	64.0	-18.6
24992.188	35.2	Ver.	10.2	45.4	64.0	-18.6
24502.730	35.2	Hor.	10.1	45.3	64.0	-18.7
24069.221	35.3	Hor.	10.0	45.3	64.0	-18.7
24167.109	35.2	Ver.	10.0	45.2	64.0	-18.8
23139.260	35.1	Hor.	10.1	45.2	64.0	-18.8
24845.350	35.0	Hor.	10.1	45.1	64.0	-18.9
22125.391	34.9	Hor.	10.2	45.1	64.0	-18.9
24852.340	35.0	Ver.	10.1	45.1	64.0	-18.9