



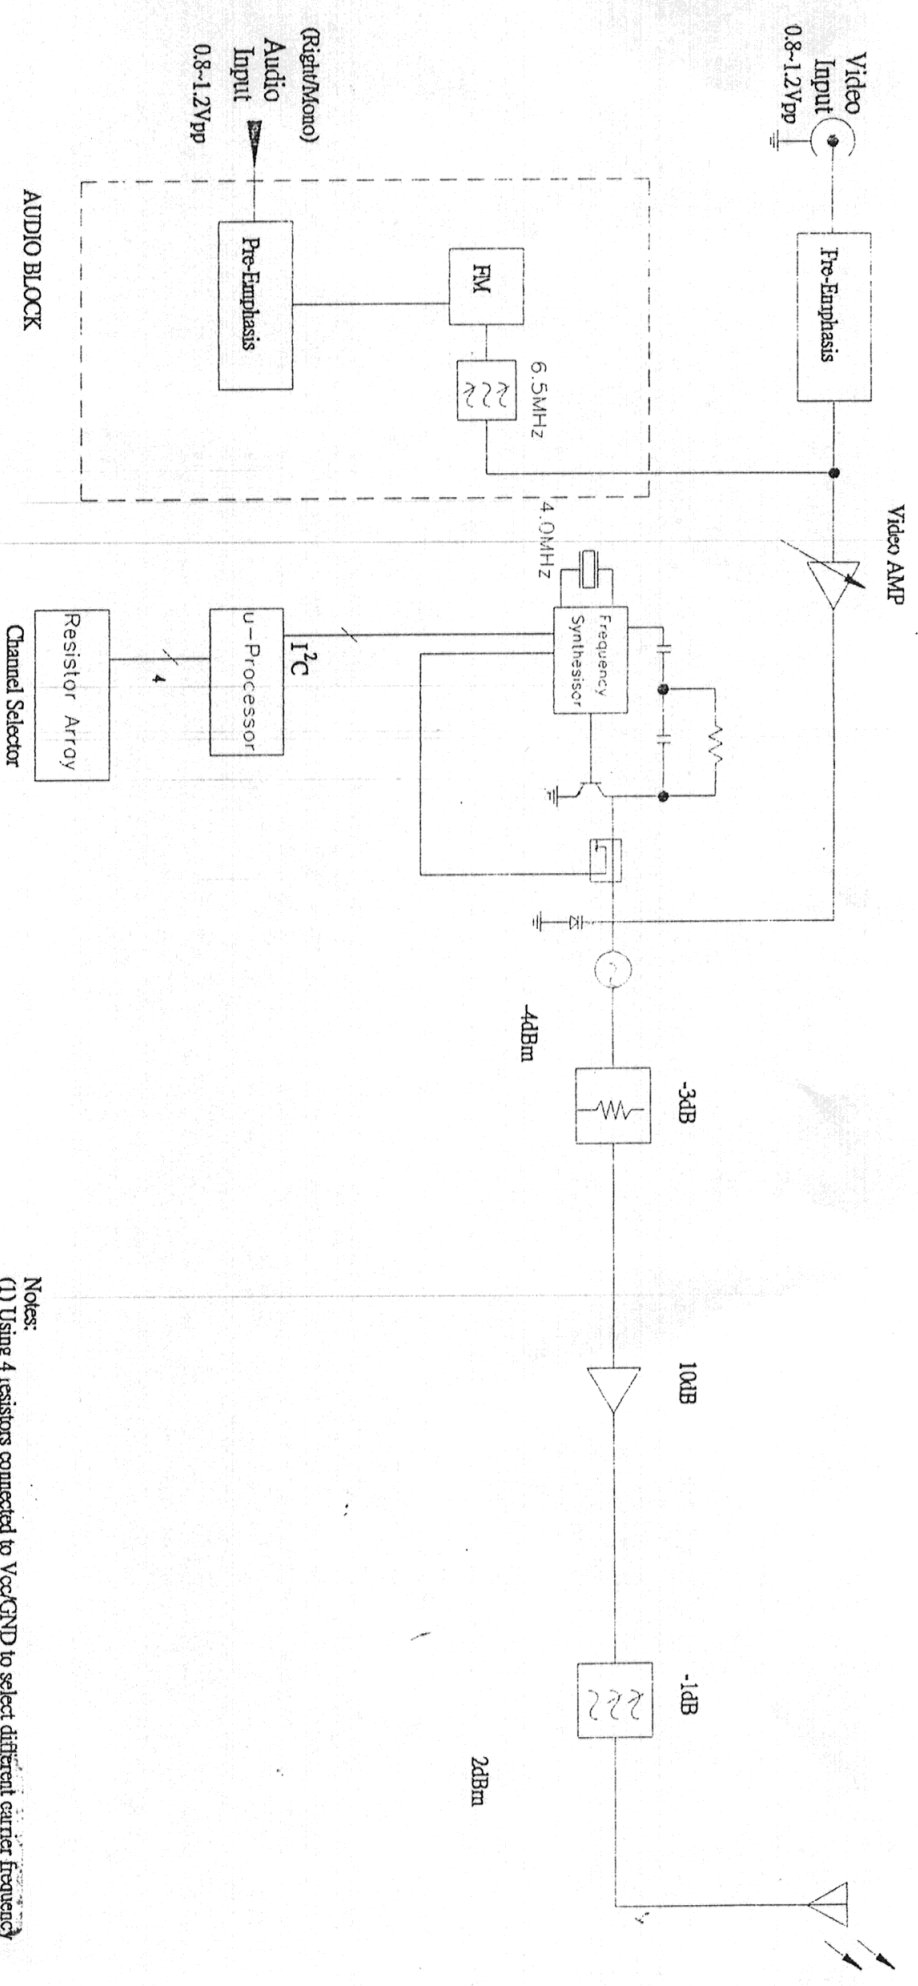

Notes:
 (1) Using 4 resistors connected to Vcc/GND to select different carrier frequency
 (2) AUDIO BLOCK IS NOT AVAILABLE FOR DVL-300TX'S

Feed: 03G DVL300TX'S

unless otherwise specified,
 all dimensions are in mm and tolerances are
 integral dimensions ± 0.2 angular dimensions $\pm 1^\circ$
 one place decimal ± 0.1 two place decimals ± 0.05



B	890308	BUDGET REVISED	戴裕國	3/23/00	MATERIAL	DRAW BY	戴裕國	3/23/00	SCALE	DWG. TITLE :	REV
REV	ECO No.	DESCRIPTION	ENGINEER	DATE	FINISH	ENG. BY	戴裕國	3/23/00	NA	DVL-300/300TX/B/C/D Block Diagram	B
DC-RR-001	A		B		PROCESS	CHECK BY	戴裕國	3/23/00	A4	BK-000022-1	1 OF 1

鼎新科技股份有限公司
 DigiCOM Corporation
 CADFILE: BK2201.DWG