

47 CFR PART 15 SUBPART C / RSS-210

TEST REPORT

for

Touch Screen Electronic Bluetooth Leverset + RFID

Model No.: A63WG040Z5

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

of

Applicant: Taiwan Fu Hsing Industrial Co., Ltd.

Address: No.88, Yucai Rd., Gangshan Dist., Kaohsiung City 820,
Taiwan (R.O.C.)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.


FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22311-23067-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

TABLE OF CONTENTS

1 GENERAL INFORMATION.....2

1.1 NOTES.....2

1.2 TESTING LABORATORY3

 1.2.1 Location3

 1.2.2 Details of accreditation status3

1.3 DETAILS OF APPROVAL HOLDER.....4

1.4 APPLICATION DETAILS4

1.5 GENERAL INFORMATION OF TEST ITEM4

1.6 TEST STANDARDS.....4

2 TECHNICAL TEST5

2.1 SUMMARY OF TEST RESULTS5

2.2 TEST ENVIRONMENT5

2.3 TEST EQUIPMENT LIST6

2.4 GENERAL TEST PROCEDURE9

3 TEST RESULTS (ENCLOSURE)11

3.1 OUTPUT POWER (FIELD STRENGTH)12


3.2 OUT OF BAND RADIATED EMISSIONS.....14

3.3 OCCUPIED BANDWIDTH15

3.4 FREQUENCY TOLERANCE16

3.5 POWER LINE CONDUCTED EMISSION18

APPENDIX19



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

December 01, 2023

Brian Ng

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

December 01, 2023


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

1.2 Testing laboratory

1.2.1 Location

10m OATS
No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber
No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228


Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory
FCC filed test laboratory Reg. No.: TW1477, TW1072
Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.
Accredited number: ./.
Street: ./.
Town: ./.
Country: ./.



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

1.3 Details of approval holder

Name: Taiwan Fu Hsing Industrial Co., Ltd.
Street: No.88, Yucai Rd., Gangshan Dist.,
City: Kaohsiung City 820,
Country: Taiwan (R.O.C.)

1.4 Application details

Date of receipt of test item: November 21, 2023
Date of test: from November 22, 2023 to November 30, 2023

1.5 General information of Test item


Description of test item: Touch Screen Electronic Bluetooth Leverset + RFID
Type identification: A63WG040Z5
Multi-listing model number: ./.
Transmitting frequency: 13.56 MHz
Operation mode: Duplex
Voltage supply: 6Vd.c. (AAA batteries*4)
Antenna type: Loop antenna
Sample no.: #01

Manufacturer: (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.225 (2021-10)
RSS-210 Issue 10 Amendment (2020-04)



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations were ascertained in the course of the tests performed.

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply: 6Vd.c. (AAA batteries*4)

Extreme conditions parameters: ./.

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 0.94 dB Voltage probe : 0.96 dB Include Pulse Limiter : 1.52 dB
Estimation Result of Uncertainty of Radiated Emission(3M-966A) (Output Power (Field Strength), Out of Band Radiated Emissions, Band Edge)	Expanded Uncertainty : 0.009-30 MHz : 1.88 dB 30-1000 MHz : 3.20 dB 1-18 GHz : 3.56 dB 18-40 GHz : 2.94 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement (Frequency tolerance)	Expanded Uncertainty : 6.11 Hz

The decision rule is: Measurement uncertainty is not included in the calculation of test results.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2023/6/12	2024/6/11
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2023/9/19	2024/9/18
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2023/9/25	2024/9/24
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2023/7/24	2024/7/23
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2023/10/26	2024/10/25
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2023/7/17	2024/7/16
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2023/6/12	2024/6/11
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2023/10/19	2024/10/18
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2023/7/21	2024/7/20
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2023/6/9	2024/6/8
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2023/6/28	2024/6/27
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2023/5/5	2024/5/4
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2023/3/2	2024/3/1
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2023/7/28	2024/7/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2023/7/31	2024/7/30
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2023/2/20	2024/2/19
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2023/10/22	2024/10/21
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2023/9/15	2024/9/14
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2023/5/25	2024/5/24
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2023/1/4	2024/1/3
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2023/10/24	2024/10/23
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2023/6/7	2024/6/6
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2023/8/4	2024/8/3
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2023/8/4	2024/8/3
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2023/8/4	2024/8/3
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2023/8/4	2024/8/3
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2023/2/20	2024/2/19
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2023/5/26	2024/5/25
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2023/3/21	2024/3/20
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2023/9/20	2024/9/19
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2022/12/22	2023/12/21
ETSTW-RE 177	TRILOG Broadband Antenna	VULB 9168&EMCI-N-6-06	01380&AT-06007	SCHWARZBECK&EMC	2023/8/24	2024/8/23
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2023/6/13	2024/6/12
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2023/5/28	2024/5/27
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2023/3/22	2024/3/21
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2023/5/10	2024/5/9
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2023/10/18	2024/10/17
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2023/8/28	2024/8/27
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2023/4/24	2024/4/23
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2023/8/4	2024/8/3
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2023/6/26	2024/6/25
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2023/4/27	2024/4/26
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2023/9/15	2024/9/14
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2023/9/15	2024/9/14
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

ETSTW-Cable 045	Microwave Cable	SUCOFLEX 104	325536	HUBER+SUHNER	2023/10/20	2024/10/19
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2023/5/26	2024/5/25
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2023/10/23	2024/10/22
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 076	SMA type cable (1m)	N/A	812652/4	HUBER+SUHNER	2023/2/20	2024/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2023/7/21	2024/7/20
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2023/10/20	2024/10/19



Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 Section 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22311-23067-C-1


FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Output Power Field Strength	15.225 (a) (b) (c) RSS-210 Annex B B.6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Radiated Emissions	15.225 (d) RSS-210 Annex B B.6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge	15.225 (d) RSS-210 Annex B B.6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	2.1049 RSS-Gen 6.7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Stability	15.225 (e) RSS-210 Annex B B.6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207 (a) RSS-Gen 8.8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



Registration number: W6M22311-23067-C-1

FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35

Operation within the band 13.110 - 14.010 MHz

Limit


(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


Measurement Results:

The field strength at 3 meter distance as 43.98 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 3.98 dB μ V/m.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22311-23067-C-1
 FCC ID: O3I-A63WG040Z5
 IC: 10365A-A63WG040Z5

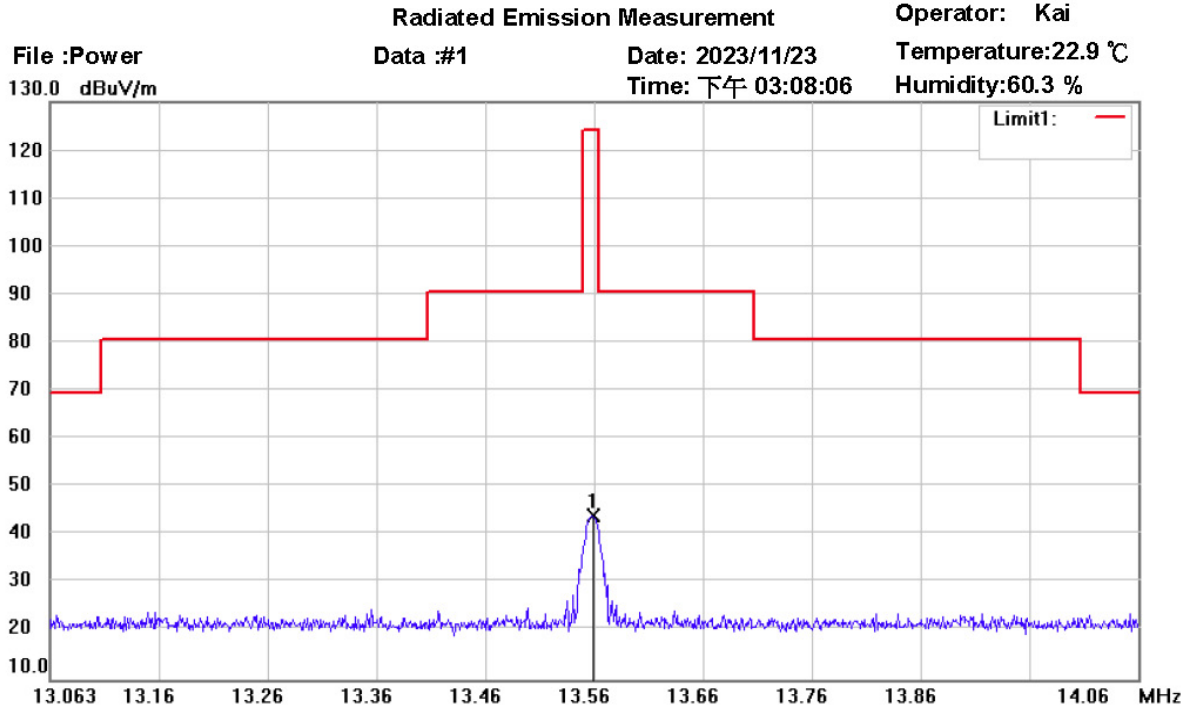


Site : Chamber
 Condition : FCC 15.225 power (3m)(13.56MHz)
 EUT : W6M22311-23067
 M/N:
 Test Mode : TX 13.56MHz
 Note :

Polarization:
 Power : 6 Vd.c.
 Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5615	10.10	peak	33.88	43.98	124.00	100	0	-80.02	

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M22311-23067-C-1
 FCC ID: O3I-A63WG040Z5
 IC: 10365A-A63WG040Z5

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency of Emission (MHz)	Limit	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots

Model: A63WG040Z5 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Note:

- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. See attached diagrams in appendix.**

All other not noted test plots do not contain significant test results in relation to the limits
 Test results: The unit meet the FCC requirements.


Test equipment used: ETSTW-RE 153, ETSTW-RE 154, ETSTW-RE 156, ETSTW-RE 160,
 ETSTW-RE 176, ETSTW-RE 177, ETSTW-RE 179, ETSTW-RE 180,
 ETSTW-RE 181, ETSTW-Cable 049, ETSTW-Cable 077, ETSTW-Cable 084,
 ETSTW-Cable 089



Registration number: W6M22311-23067-C-1
 FCC ID: O3I-A63WG040Z5
 IC: 10365A-A63WG040Z5

3.3 Occupied Bandwidth

Test date: November 23, 2023
 Temperature: 23.3 °C
 Humidity: 59.9 %
 Tester: Kai

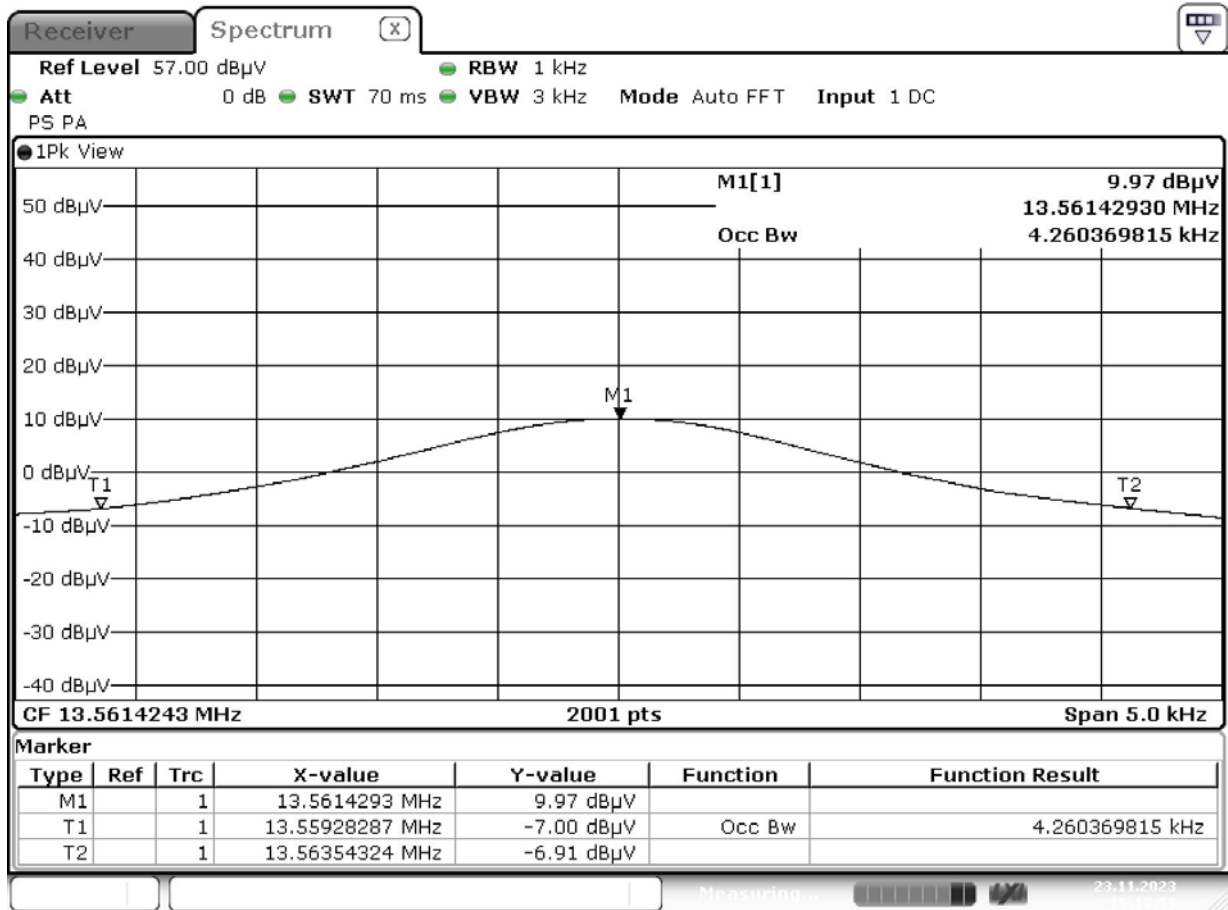

Date: 23.NOV.2023 15:19:53

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

3.4 Frequency tolerance


The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test date: November 30, 2023
Temperature: 26.0 °C
Humidity: 52.5 %
Tester: Brian

Measurement Results:

Voltage	Duration Time	Frequency (MHz)	Frequency deviation (kHz)	Result
6Vd.c.	0 min	13.561538	0.000	0.00000%
	2min	13.561538	0.000	0.00000%
	5min	13.561538	0.000	0.00000%
	10min	13.561538	0.000	0.00000%
5.1Vd.c.	0 min	13.561538	0.000	0.00000%
	2min	13.561538	0.000	0.00000%
	5min	13.561538	0.000	0.00000%
	10min	13.561538	0.000	0.00000%
6.9Vd.c.	0 min	13.561538	0.000	0.00000%
	2min	13.561538	0.000	0.00000%
	5min	13.561538	0.000	0.00000%
	10min	13.561538	0.000	0.00000%

*Represent test standard frequency



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22311-23067-C-1


FCC ID: O3I-A63WG040Z5

IC: 10365A-A63WG040Z5

Test Temp	Duration Time (minutes)	Frequency (MHz)	Frequency deviation (kHz)	Result
50°C	0	13.561410	-0.128	-0.00095%
50°C	2	13.561410	-0.128	-0.00095%
50°C	5	13.561410	-0.128	-0.00095%
50°C	10	13.561410	-0.128	-0.00095%
40°C	0	13.561538	0.000	0.00000%
40°C	2	13.561506	-0.032	-0.00024%
40°C	5	13.561506	-0.032	-0.00024%
40°C	10	13.561506	-0.032	-0.00024%
30°C	0	13.561538	0.000	0.00000%
30°C	2	13.561538	0.000	0.00000%
30°C	5	13.561538	0.000	0.00000%
30°C	10	13.561538	0.000	0.00000%
20°C	0	13.561538	0.000	0.00000%
20°C	2	13.561538	0.000	0.00000%
20°C	5	13.561538	0.000	0.00000%
20°C	10	13.561538	0.000	0.00000%
10°C	0	13.561538	0.000	0.00000%
10°C	2	13.561538	0.000	0.00000%
10°C	5	13.561538	0.000	0.00000%
10°C	10	13.561538	0.000	0.00000%
0°C	0	13.561538	0.000	0.00000%
0°C	2	13.561538	0.000	0.00000%
0°C	5	13.561538	0.000	0.00000%
0°C	10	13.561538	0.000	0.00000%
-10°C	0	13.561506	-0.032	-0.00024%
-10°C	2	13.561506	-0.032	-0.00024%
-10°C	5	13.561506	-0.032	-0.00024%
-10°C	10	13.561506	-0.032	-0.00024%
-20°C	0	13.561506	-0.032	-0.00024%
-20°C	2	13.561506	-0.032	-0.00024%
-20°C	5	13.561474	-0.064	-0.00047%
-20°C	10	13.561474	-0.064	-0.00047%

*Represent test standard frequency

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M22311-23067-C-1
 FCC ID: O3I-A63WG040Z5
 IC: 10365A-A63WG040Z5

3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.


Frequency	Level (dB μ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

- Note:**
1. The formula of measured value as: **Test Result = Reading + Correction Factor**
 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.
 6. This test is not required because the EUT is powered by battery.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22311-23067-C-1
FCC ID: O3I-A63WG040Z5
IC: 10365A-A63WG040Z5

Appendix

Measurement diagrams

Radiated Emissions



Radiated Emission Measurement

Operator: Kai

File :1

Data :#1


Date: 2023/11/23

Temperature:22.9 °C

140.0 dBuV/m

Time: 下午 03:25:50

Humidity:60.3 %

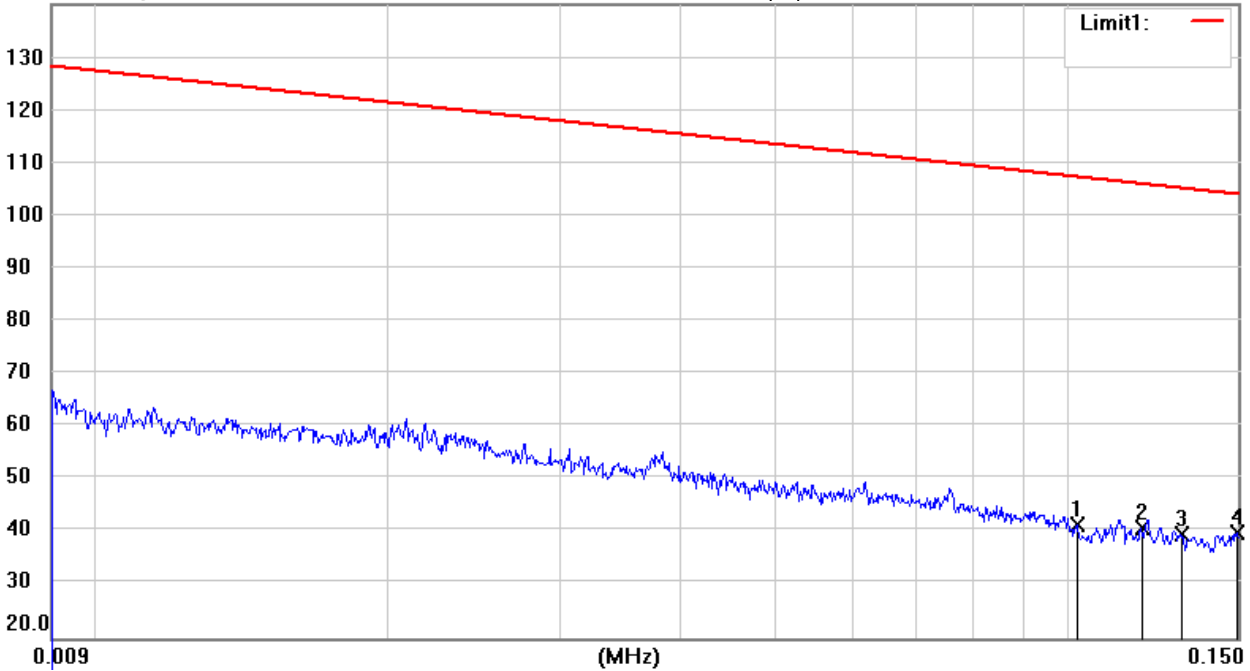

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

Polarization:

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.1024	-23.25	peak	64.66	41.41	107.32	100	201	-65.91	
	0.1194	-23.03	peak	63.92	40.89	105.99	100	199	-65.10	
	0.1313	-23.69	peak	63.39	39.70	105.17	100	258	-65.47	
*	0.1496	-22.76	peak	62.59	39.83	104.04	100	65	-64.21	



Radiated Emission Measurement


Operator: Kai

File :2
 120.0 dBuV/m

Data :#1

Date: 2023/11/23
 Time: 下午 03:29:07

Temperature:22.9 °C
 Humidity:60.3 %

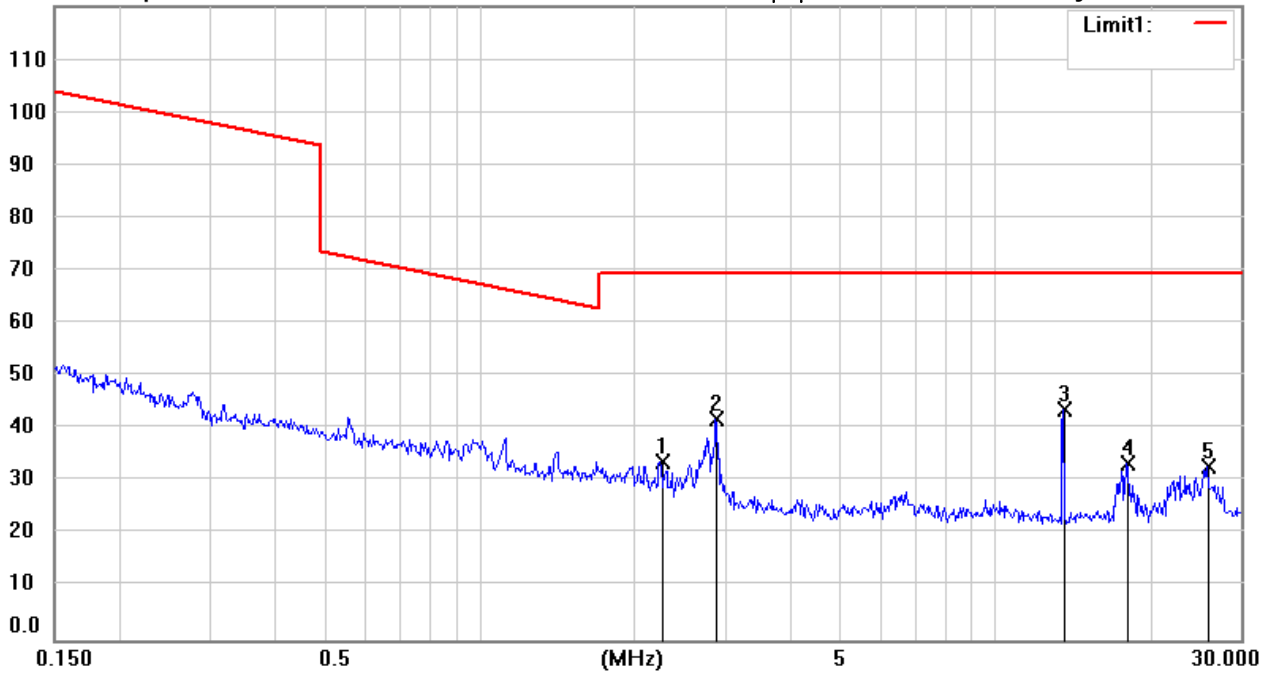

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22311-23067

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2.2664	-7.19	peak	40.92	33.73	69.54	100	102	-35.81	
	2.8768	3.27	peak	38.46	41.73	69.54	100	13	-27.81	
*	13.5868	9.86	peak	33.88	43.74	69.54			-25.80	RF Power
	17.9917	-0.18	peak	33.66	33.48	69.54	100	15	-36.06	
	26.0012	-0.48	peak	33.26	32.78	69.54	100	226	-36.76	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2023/11/23

Temperature:22.9 °C

80.0 dBuV/m

Time: 下午 03:54:21

Humidity:60.3 %

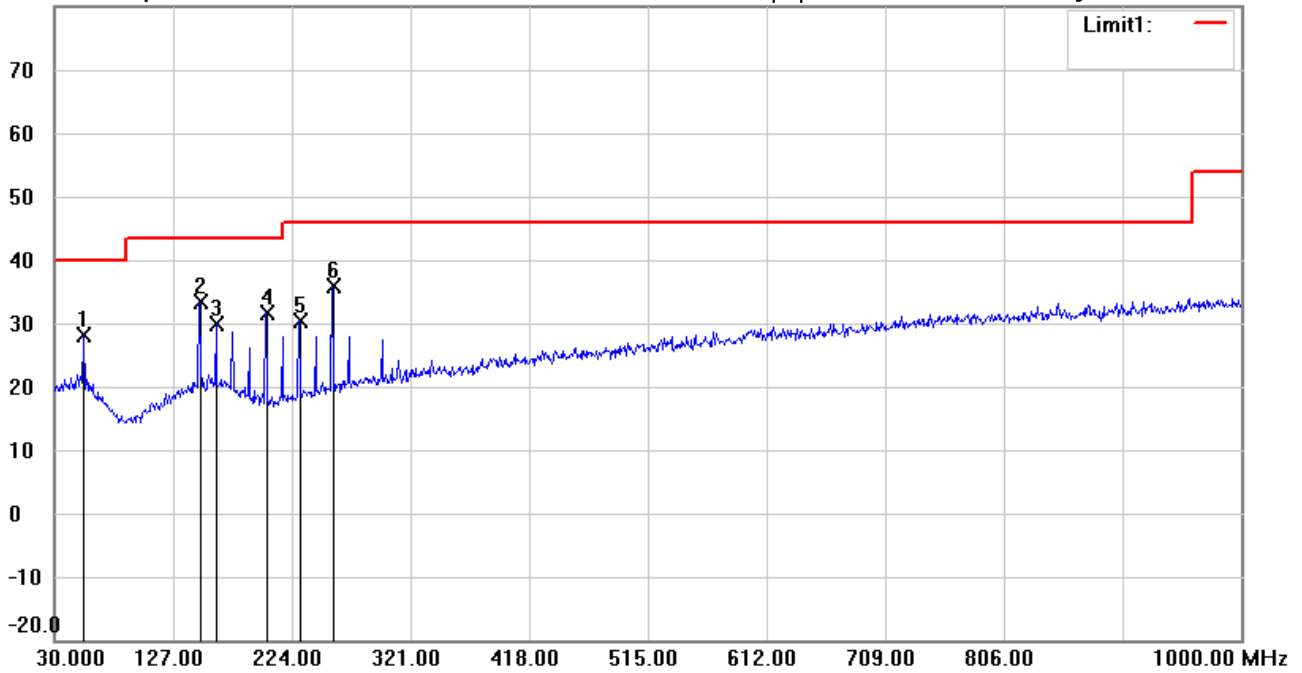

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	54.2500	40.37	peak	-12.23	28.14	40.00	100	136	-11.86	
*	148.8250	45.20	peak	-11.87	33.33	43.50	100	279	-10.17	
	162.4050	41.53	peak	-11.67	29.86	43.50	100	109	-13.64	
	203.1450	46.20	peak	-14.53	31.67	43.50	100	291	-11.83	
	230.3050	44.23	peak	-13.79	30.44	46.00	100	343	-15.56	
	257.4650	48.34	peak	-12.58	35.76	46.00	100	255	-10.24	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2023/11/23

Temperature:22.9 °C

80.0 dBuV/m

Time: 下午 03:55:21

Humidity:60.3 %

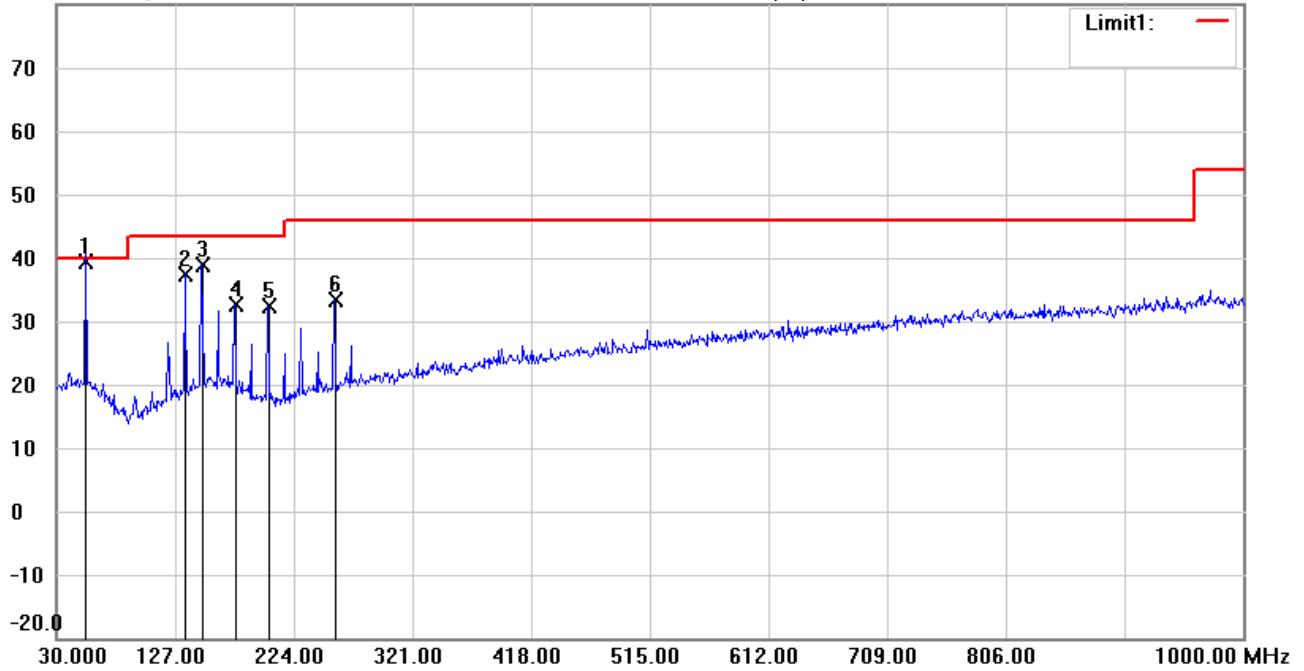

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	54.2500	51.66	QP	-12.23	39.43	40.00	100	260	-0.57	
	135.2450	50.29	peak	-13.00	37.29	43.50	100	213	-6.21	
	148.8250	50.63	peak	-11.87	38.76	43.50	100	119	-4.74	
	175.9850	45.24	peak	-12.71	32.53	43.50	100	67	-10.97	
	203.1450	46.96	peak	-14.53	32.43	43.50	100	359	-11.07	
	257.4650	45.98	peak	-12.58	33.40	46.00	100	354	-12.60	



Radiated Emission Measurement

Operator: Kai

File :1

Data :#1


Date: 2023/11/23

Temperature:22.9 °C

140.0 dBuV/m

Time: 下午 03:34:34

Humidity:60.3 %

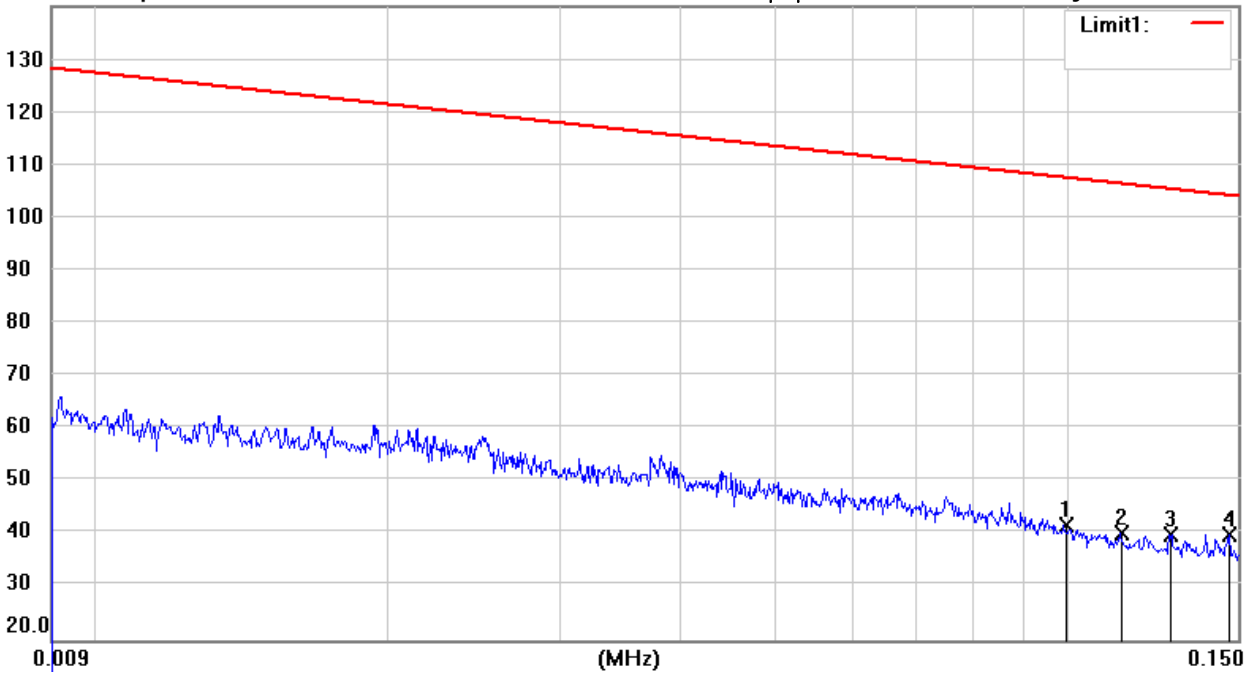

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

Polarization:

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0997	-23.00	peak	64.81	41.81	107.55	100	176	-65.74	
	0.1136	-24.06	peak	64.17	40.11	106.42	100	30	-66.31	
	0.1276	-23.47	peak	63.56	40.09	105.42	100	203	-65.33	
*	0.1471	-22.73	peak	62.70	39.97	104.19	100	145	-64.22	



Radiated Emission Measurement


Operator: Kai

File :2
 120.0 dBuV/m

Data :#1

Date: 2023/11/23
 Time: 下午 03:32:33

Temperature:22.9 °C
 Humidity:60.3 %

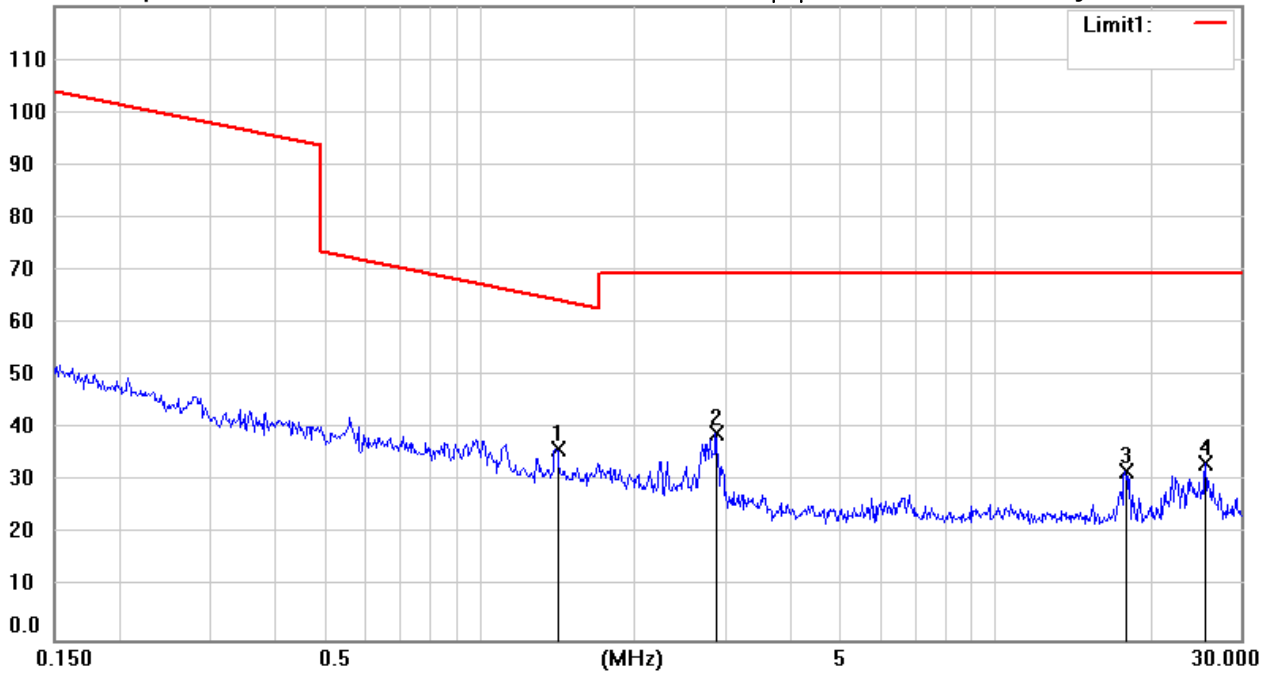

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22311-23067

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1.4144	-8.08	peak	44.36	36.28	64.58	100	128	-28.30	
	2.8768	0.82	peak	38.46	39.28	69.54	100	25	-30.26	
	17.9441	-1.69	peak	33.66	31.97	69.54	100	188	-37.57	
	25.5912	0.09	peak	33.28	33.37	69.54	100	64	-36.17	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2023/11/23

Temperature:22.9 °C

80.0 dBuV/m

Time: 下午 03:48:09

Humidity:60.3 %

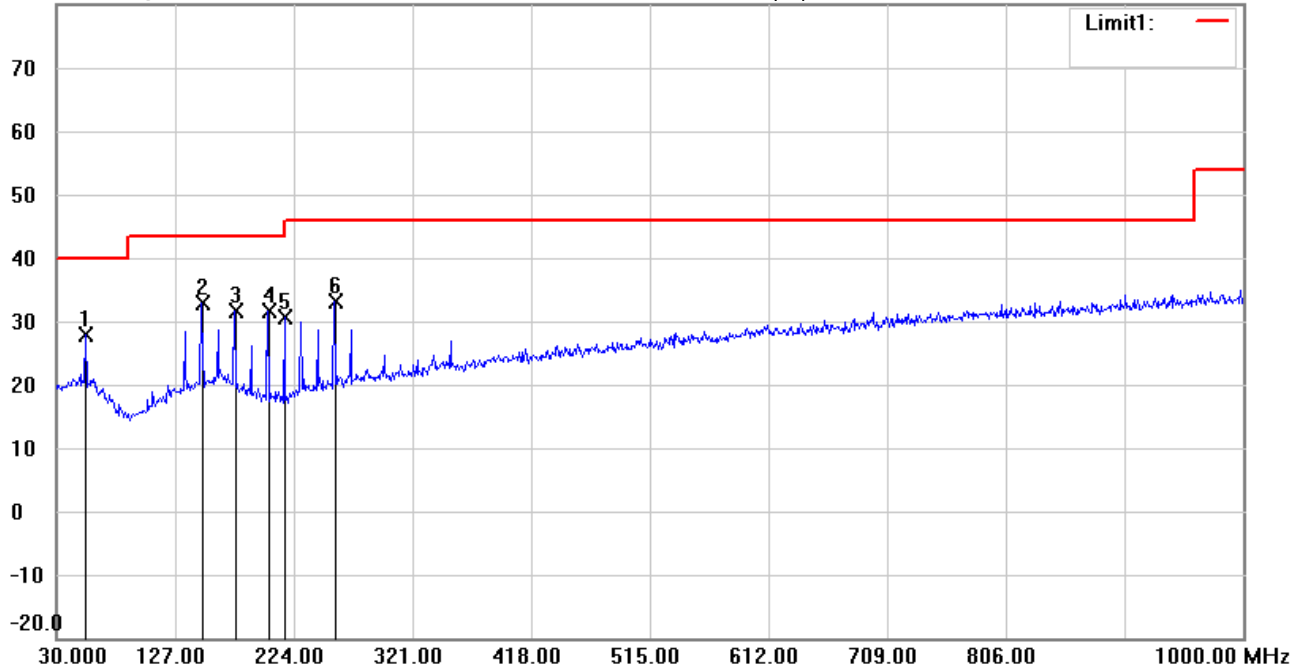

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	54.2500	40.12	peak	-12.23	27.89	40.00	100	101	-12.11	
*	148.8250	44.67	peak	-11.87	32.80	43.50	100	289	-10.70	
	175.9850	44.45	peak	-12.71	31.74	43.50	100	289	-11.76	
	203.1450	46.21	peak	-14.53	31.68	43.50	100	55	-11.82	
	216.7248	45.27	peak	-14.63	30.64	46.00	100	184	-15.36	
	257.4650	45.80	peak	-12.58	33.22	46.00	100	217	-12.78	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2023/11/23

Temperature:22.9 °C

80.0 dBuV/m

Time: 下午 03:49:08

Humidity:60.3 %

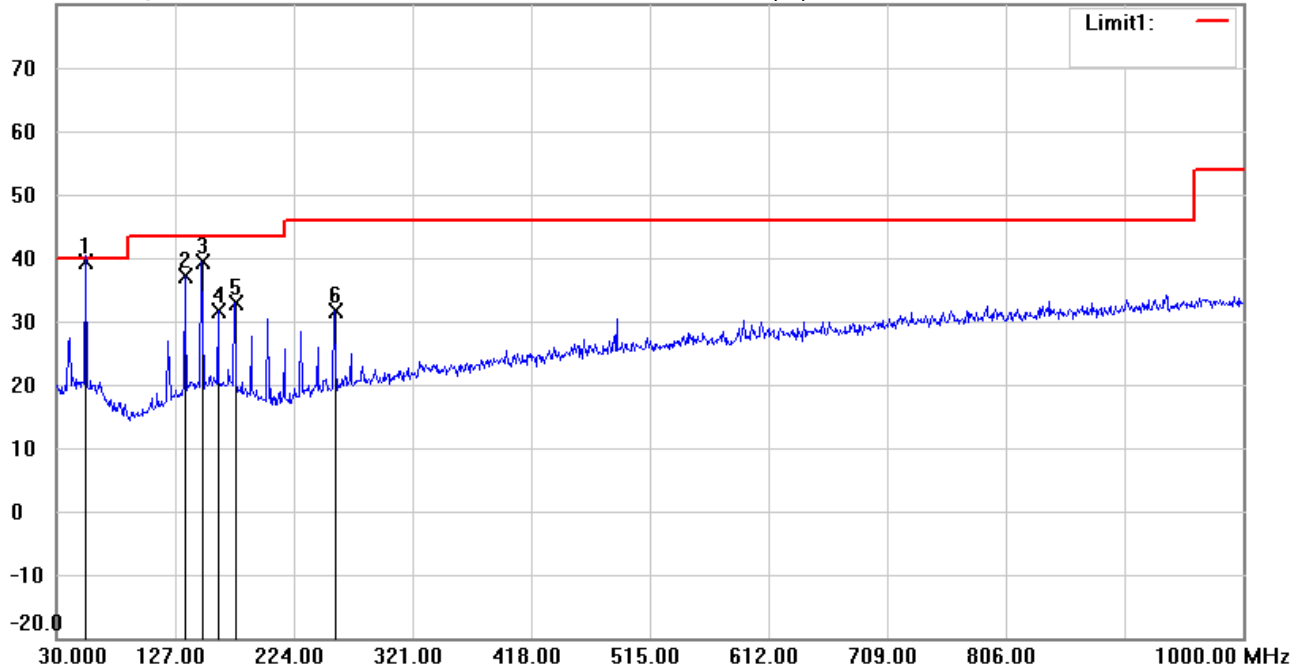

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M22311-23067

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 13.56MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	54.2500	51.68	QP	-12.23	39.45	40.00	100	177	-0.55	
	135.2450	50.24	peak	-13.00	37.24	43.50	100	281	-6.26	
	148.8250	51.17	peak	-11.87	39.30	43.50	100	247	-4.20	
	162.4050	43.21	peak	-11.67	31.54	43.50	100	12	-11.96	
	175.9850	45.65	peak	-12.71	32.94	43.50	100	214	-10.56	
	257.4650	44.12	peak	-12.58	31.54	46.00	100	55	-14.46	