


ENGINEERING TEST REPORT



NBS55XX
Model No.: NBS55XXTXXX
FCC ID: O3JNBS55XXT

Applicant:

NBS Technologies Inc.
703 Evans Avenue, Suite 400
Toronto, ON
Canada, M9C 5E9

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, PARTS 2, 22 (Subpart H) and 24 (Subpart E)

UltraTech's File No.: MIS-053FCC22-24

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: April 25, 2006



Report Prepared by: JaeWook Choi

Tested by: Hung Trinh, RFI/EMI Technician

Issued Date: April 25, 2006

Test Dates: April 10-12, 2006

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com


31040/SIT


C-1376


46390-2049


200093-0


SL2-IN-E-1119R


00-034



TABLE OF CONTENTS

EXHIBIT 1.	SUBMITTAL CHECK LIST.....	1
EXHIBIT 2.	INTRODUCTION.....	2
2.1.	SCOPE.....	2
2.2.	RELATED SUBMITTAL(S)/GRANT(S).....	2
2.3.	NORMATIVE REFERENCES.....	2
EXHIBIT 3.	PERFORMANCE ASSESSMENT.....	3
3.1.	CLIENT INFORMATION.....	3
3.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION.....	3
3.3.	EUT'S TECHNICAL SPECIFICATIONS.....	4
3.4.	LIST OF EUT'S PORTS.....	4
3.5.	ANCILLARY EQUIPMENT.....	4
EXHIBIT 4.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
4.1.	CLIMATE TEST CONDITIONS.....	5
4.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	5
EXHIBIT 5.	SUMMARY OF TEST RESULTS.....	6
5.1.	LOCATION OF TESTS.....	6
5.2.	APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....	6
5.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
5.4.	DEVIATION OF STANDARD TEST PROCEDURES.....	6
EXHIBIT 6.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	7
6.1.	TEST PROCEDURES.....	7
6.2.	MEASUREMENT UNCERTAINTIES.....	7
6.3.	MEASUREMENT EQUIPMENT USED.....	7
6.4.	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....	7
6.5.	RF POWER OUTPUT [§§ 2.1046 & 22.913 & 24.232].....	8
6.5.1.	<i>Limits</i>	8
6.5.2.	<i>Method of Measurements</i>	8
6.5.3.	<i>Test Equipment List</i>	8
6.5.4.	<i>Test Data</i>	8
6.6.	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 22.917 & 24.238].....	9
6.6.1.	<i>Limits</i>	9
6.6.2.	<i>Method of Measurements</i>	9
6.6.3.	<i>Test Equipment List</i>	9
6.6.4.	<i>Test Data</i>	10
EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	13
7.1.	RADIATED EMISSION MEASUREMENT UNCERTAINTY.....	13
EXHIBIT 8.	MEASUREMENT METHODS.....	14
8.1.	CONDUCTED POWER MEASUREMENTS.....	14
8.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD.....	15
8.2.1.	<i>Maximizing RF Emission Level (E-Field)</i>	15
8.2.2.	<i>Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method</i>	16

EXHIBIT 1. SUBMITTAL CHECK LIST

Annex No.	Exhibit Type	Description of Contents	Quality Check (OK)
--	Test Report	Exhibit 1: Submittal check lists Exhibit 2: Introduction Exhibit 3: Performance Assessment Exhibit 4: EUT Operation and Configuration during Tests Exhibit 5: Summary of test Results Exhibit 6: Measurement Data Exhibit 7: Measurement Uncertainty Exhibit 8: Measurement Methods	Yes
1	Test Setup Photos	Radiated Emission Setup Photos	Yes
2	External Photos of EUT	External EUT Photos	N/A
3	Internal Photos of EUT	Internal EUT Photos	N/A
4	Cover Letters	Letter from Ultratech for Certification Request Letter from the Applicant to appoint Ultratech to act as an agent Letters from the Applicant to request for Confidentiality Filing	Yes
5	Attestation Statements	--	--
6	ID Label/Location Info	ID Label Location of ID Label	N/A
7	Block Diagrams	Block Diagram Wireless POS terminal Block Diagram Wavecom Radio Module	N/A
8	Schematic Diagrams	Schematics of CDMA radio interface	Yes
9	Parts List/Tune Up Info	Parts List/Tune Up Info	N/A
10	Operational Description	Operational Description	N/A
11	RF Exposure Info	SAR Test Report	Yes
12	Users Manual	Installation and Operation Manual	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: http://www.ultratech-labs.com

File #: MIS-028FCC22-24

April 25, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. INTRODUCTION

2.1. SCOPE

Reference:	FCC Parts 2, 22 and 24
Title:	Telecommunication – 47 Code of Federal Regulations (CFR), Parts 2, 22 & 24
Purpose of Test:	To gain FCC Certification Authorization for Radio operating in the frequency bands 824.70 – 848.97 MHz and 1851.25 – 1908.75 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

2.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2005	Code of Federal Regulations – Telecommunication
ANSI C63.4	2004	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1	2003	Specification for Radio Disturbance and Immunity measuring apparatus and methods

EXHIBIT 3. PERFORMANCE ASSESSMENT

3.1. CLIENT INFORMATION

APPLICANT	
Name:	NBS Technologies Inc.
Address:	703 Evans Avenue, Suite 400 Toronto, ON Canada, M9C 5E9
Contact Person:	Mr. Dragoslav Jovanovic Phone #: 416-621-1911 Fax #: 416-621-8875 Email Address: djovanovic@nbstech.com

MANUFACTURER	
Name:	SAGEM Monetel
Address:	1, Rue Claude Chappe – BP346 07503 Guilherand-Granges France
Contact Person:	Mr. Clement Lormeau Phone #: +33 4 75 81 40 47 Fax #: +33 4 75 81 41 57 Email Address: clement.lormeau@sagem.com

3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	NBS
Product Name:	NBS55XX
Model Name or Number:	NBS55XXTXXX
Serial Number:	Preproduction
Type of Equipment:	Non-broadcast Radio Communication Equipment
Power Supply:	3.6 Vdc, 1.5Ah - Ni-MH Battery
Transmitting/Receiving Antenna Type:	Integral
Primary User Functions of EUT:	Wireless point-of-sale (POS) terminal to provide processing of payments.
Operating temperature range:	+5 °C to +45°C

EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	3.6 V Ni-MH battery

4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	None.
Special Hardware Used:	None.
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use.

Transmitter Test Signals	
Frequency Band(s):	<ul style="list-style-type: none"> ▪ 824.70 – 848.97 MHz (CDMA) ▪ 1851.25 – 1908.75 MHz (PCS CDMA)
Frequency(ies) Tested: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	<ul style="list-style-type: none"> ▪ 824.70 MHz ▪ 836.52 MHz ▪ 848.97 MHz ▪ 1851.25 MHz ▪ 1880.00 MHz ▪ 1908.75 MHz
RF Power Output (measured maximum output power):	<ul style="list-style-type: none"> ▪ 824.70 – 848.97 MHz (CDMA): 23.80 dBm peak conducted ▪ 1851.25 – 1908.75 MHz (PCS CDMA): 23.30 dBm peak conducted
Normal Test Modulation:	CDMA
Modulating Signal Source:	Internal

EXHIBIT 5. SUMMARY OF TEST RESULTS

5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June. 20, 2005.

5.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	See Ultratech SAR Test Report
2.1046, 22.913 & 24.232	RF Power Output	Yes
2.1047(a)	Audio Frequency Response	See original filing test report
2.1047(b)	Modulation Limiting	See original filing test report
2.1049	Emission Limitation & Emission Mask	See original filing test report
2.1051, 2.1057, 22.917 & 24.238	Spurious emissions at antenna terminal	See original filing test report
2.1053, 2.1057, 22.917 & 24.238	Field strength of spurious radiation	Yes
2.1055	Frequency Stability	See original filing test report
Wireless CDMA POS Terminal, by NBS Technologies Inc., has also been tested and found to comply with FCC Part 15, Subpart B – Class A Digital Devices.		

5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

5.4. DEVIATION OF STANDARD TEST PROCEDURES

None.

EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

6.1. TEST PROCEDURES

Please refer to Ultratech Test Procedures, File # ULTR P001-2004, ANSI C63.4, and Exhibit 8 of this test report.

6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

6.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

6.5. RF POWER OUTPUT [§§ 2.1046 & 22.913 & 24.232]

6.5.1. Limits

§22.913 (a) The Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

§ 24.232 (b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

6.5.2. Method of Measurements

Refer to ULTRATECH Test Procedures, File # ULTR P001-2004, ANSI C63.4 and Exhibit 8, section 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details.

6.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Digital radiocommunications tester	Rohde & Schwarz	CMD80	DE29573	9 kHz – 26.5 GHz
Attenuator	Weinschel Corp	46-20-34	BM1347	DC – 18 GHz

6.5.4. Test Data

Cellular Band: 824 – 849 MHz

Transmitter Channel Output	Fundamental Frequency (MHz)	Measured Peak Conducted Power (dBm)	ERP (dBm) Measured Using substitution Method	ERP Limit
Lowest	824.70	23.80	18.51	38.5
Middle	836.52	23.80	13.61	38.5
Highest	848.97	23.70	19.14	38.5

* The antenna gain was obtained for the following formula:

$$\text{ERP} = (\text{peak conducted power in dBm}) + (\text{antenna gain in dBi}) - 2.15$$

PCS Band: 1850 – 1910 MHz

Transmitter Channel Output	Fundamental Frequency (MHz)	Measured Peak Conducted Power (dBm)	*Calculated e.i.r.p. (dBm)	e.i.r.p. Limit
Lowest	1851.25	23.10	31.83	33.0
Middle	1880.00	23.30	32.86	33.0
Highest	1908.75	22.60	31.85	33.0

* The antenna gain was obtained for the following formula:

$$\text{ERP} = (\text{peak conducted power in dBm}) + (\text{antenna gain in dBi})$$

6.6. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 22.917 & 24.238]

6.6.1. Limits

§§22.917 (a) & 24.238 (a) On any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43+10\log(P)$ dB (P = transmitter conducted power in watts).

6.6.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, Section 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter’s antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter’s antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
 $\text{Lowest ERP of the carrier} = \text{EIRP} - 2.15 \text{ dB} = P_c + G - 2.15 \text{ dB} = x \text{ dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

$$\text{ERP of spurious/harmonic (dBc)} = \text{ERP of carrier (dBm)} - \text{ERP of spurious/harmonic emission (dBm)}$$

6.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 4 GHz
RF Amplifier	Com-Power	PA-102		1 MHz to 1 GHz, 30 dB gain nominal
Microwave Amplifier	Hewlett Packard	HP 83017A	3116A00661	1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3142	10005	30 MHz to 2 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 GHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 GHz – 1 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz
RF Signal Generator	Hewlett Packard	HP 83752B	3610A00457	0.01 – 20 GHz

6.6.4. Test Data

6.6.4.1. Cellular Band (824-849 MHz)

Carrier Frequency (MHz): 824.70
 Power (dBm): 23.80
 Limit (dBc): $-(43+10\log P(\text{in watts}))$ 36.8
 Test Frequency Range (MHz): 30-9000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
824.70	113.78	Peak	V	16.48	--	--	--
824.70	115.86	Peak	H	18.51	--	--	--
1648.4	63.12	Peak	V	-40.37	62.8	43.31	-19.5
1648.4	65.02	Peak	H	-39.75	62.8	43.31	-19.5

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

Carrier Frequency (MHz): 836.52
 Power (dBm): 23.80
 Limit (dBc): $-(43+10\log P(\text{in watts}))$ 36.8
 Test Frequency Range (MHz): 30-9000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
836.4	113.77	Peak	V	16.42	--	--	--
836.4	115.80	Peak	H	18.45	--	--	--

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

Carrier Frequency (MHz): 848.97
 Power (dBm): 23.70
 Limit (dBc): $-(43+10\log P(\text{in watts}))$ 36.70
 Test Frequency Range (MHz): 30-9000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
848.97	115.72	Peak	V	18.37	--	--	--
848.97	116.49	Peak	H	19.14	--	--	--

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

6.6.4.2. PCS Cellular Band: 1850-1910 MHz

Carrier Frequency (MHz): 1851.25
 Power (dBm): 23.1
 Limit (dBc): $-(43+10\log P(\text{in watts}))$ 36.1
 Test Frequency Range (MHz): 30-20000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
1851.25	125.65	Peak	V	30.45	--	--	--
1851.25	127.03	Peak	H	31.83	--	--	--
3702.5	68.96	Peak	V	-33.39	56.5	36.1	-20.4
3702.5	69.26	Peak	H	-31.76	54.9	36.1	-18.8
5553.8	66.56	Peak	V	-35.69	58.8	36.1	-22.7
5553.8	63.48	Peak	H	-37.84	60.9	36.1	-24.8
7405.0	69.17	Peak	V	-28.46	51.6	36.1	-15.5
7405.0	64.62	Peak	H	-34.03	57.1	36.1	-21.0

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

Carrier Frequency (MHz): 1880.00
 ERP (dBm): 23.3
 Limit (dBc): $-(43+10\log P(\text{in watts}))$ 36.3
 Test Frequency Range (MHz): 30-20000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
1880.00	125.55	Peak	V	30.35	--	--	--
1880.00	128.06	Peak	H	32.86	--	--	--
3760.0	71.33	Peak	V	-31.88	55.2	36.3	-18.9
3760.0	71.03	Peak	H	-32.87	56.2	36.3	-19.9
5640.0	68.46	Peak	V	-34.65	58.0	36.3	-21.7
5640.0	69.57	Peak	H	-34.23	57.5	36.3	-21.2
7520.0	67.02	Peak	V	-34.54	57.8	36.3	-21.5
7520.0	63.36	Peak	H	-37.99	61.3	36.3	-25.0

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

Carrier Frequency (MHz): 1908.75
 ERP (dBm): 22.6
 Limit (dBc): $-(43+10\log P_{\text{(in watts)}})$ 35.6
 Test Frequency Range (MHz): 30-20000

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
1908.75	127.05	Peak	V	31.85	--	--	--
1908.75	127.71	Peak	H	32.51	--	--	--
3817.5	71.32	Peak	V	-32.94	55.5	35.6	-19.9
3817.5	71.29	Peak	H	-32.01	54.6	35.6	-19.0
5726.3	68.94	Peak	V	-35.12	57.7	35.6	-22.1
5726.3	70.90	Peak	H	-32.20	54.8	35.6	-19.2
7635.0	65.24	Peak	V	-35.63	58.2	35.6	-22.6
7635.0	63.45	Peak	H	-38.99	61.6	35.6	-26.0

No spurious emissions were found. All harmonics emissions more than 30 dB below the limit were recorded.

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

{ X = 1 for continuous transmission => $10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

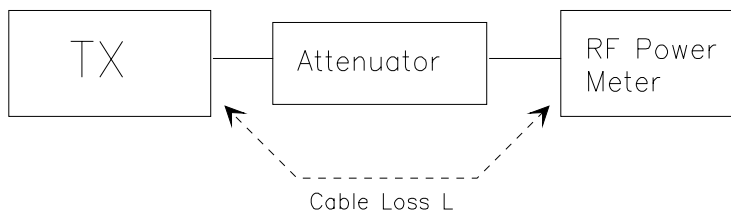

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 10 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna:

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2

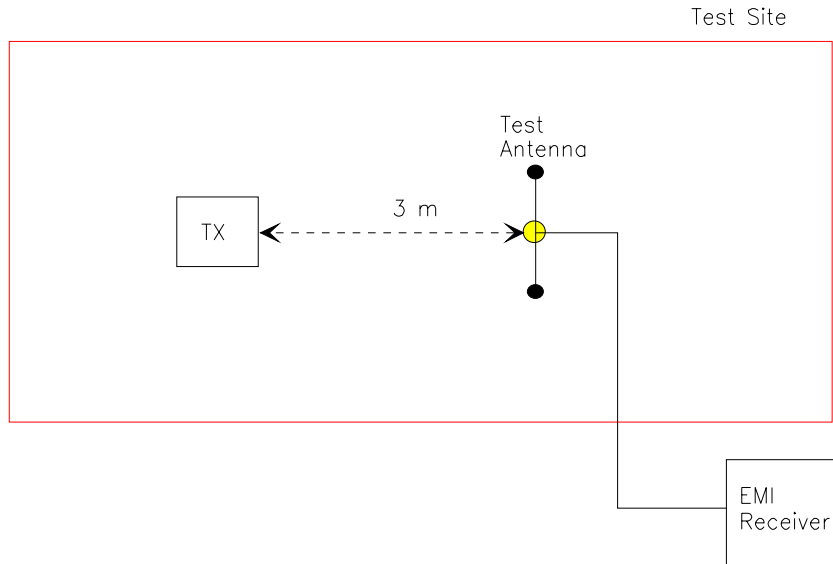


Figure 3

