

Playmates Asia Services Limited

Application
For
Certification
(FCC ID: O3U-10011)

Computer Peripheral, Model : Asst. No.: 10010, Stock No.: 10011

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart B for Unintentional Radiator, mention 47 CFR [10-1-99 edition]

WO# 0100228
WN/at
February 28, 2001

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited

FCC ID : O3U-10011

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>General Description</u>	2
1.1 Product Description.....	2
1.2 Related Submittal(s) Grants.....	2
1.3 Test Methodology.....	3
1.4 Test Facility	3
2.0 <u>System Test Configuration</u>	5
2.1 Justification.....	5
2.2 EUT Exercising Software	5
2.3 Special Accessories	5
2.4 Equipment Modification.....	6
2.5 Support Equipment List and Description	6
3.0 <u>Emission Results</u>	8
3.1 Field Strength Calculation	9
3.1 Field Strength Calculation (cont'd)	10
3.2 Radiated Emission Configuration Photograph	11
3.3 Radiated Emission Data	12
3.4 Conducted Emission Configuration Photograph	14
3.5 Conducted Emission Data	15
4.0 <u>Equipment Photographs</u>	17
5.0 <u>Product Labelling</u>	19
6.0 <u>Technical Specifications</u>	21
7.0 <u>Instruction Manual</u>	23

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	filename
Cover Letter	Letter of Agency	letter.pdf
Test Report	Test Report	report.doc
Operation Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated1.jpg to radiated2.jpg
Test Setup Photo	Conducted Emission	conducted1.jpg to conducted3.jpg
External Photo	External Photo	ophoto1.jpg to ophoto2.jpg
Internal Photo	Internal Photo	ipphoto1.jpg to ipphoto3.jpg
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a computer controlled toy. The EUT is powered by three “AA” batteries. There is a ON/OFF switch and a USB cable. The computer can control the EUT (e.g. talking, singing and remind you at a important day) through the specified software. (Dot-pals)

The brief circuit description is listed as follows:

- Q1, Q2, Q3, Q4, Q5, Q6, Q7 and Q8 and associated circuit act as Motor Driver.
- L3, L4, C25, C26 and associated circuit act as filter circuit.
- U1 and associated circuit act as CPU.
- U2 and associated circuit act as D/A Converter
- U3 and associated circuit act as audio amplifier.

1.2 Related Submittal(s) Grants

This is a single application for certification of a computer peripheral.

INTERTEK TESTING SERVICES

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (1992.)

The EUT was powered by three "AA" batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simplicity of testing, the unit was wired to transmit continuously.

2.2 EUT Exercising Software

There was a special software (Dot Pals) to exercise the device.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

INTERTEK TESTING SERVICES

2.4 Equipment Modification

Any modifications installed previous to testing by Playmates Asia Services Limited will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services.


2.5 Support Equipment List and Description

This product was tested in a standalone configuration.

All the items listed under section 2.0 of this report are

Confirmed by:

*Wilbur Ng
Manager
Intertek Testing Services
Agent for Playmates Asia Services Limited*

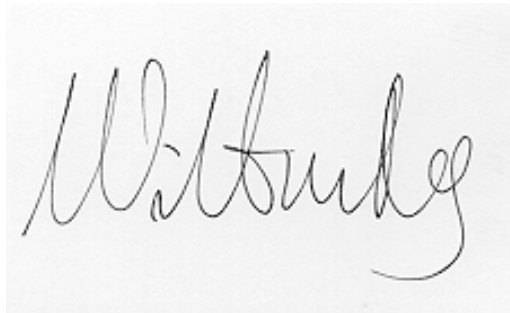

Signature

February 28, 2001 Date

INTERTEK TESTING SERVICES

EXHIBIT 3

EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation (cont'd)

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission

42.560 and 54.600 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated1.jpg to radiated2.jpg

INTERTEK TESTING SERVICES

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 13.3 dB

TEST PERSONNEL:



Signature

Anthony K. M. Chan, Compliance Engineer
Typed/Printed Name

February 28, 2001
Date

INTERTEK TESTING SERVICES

Company: Playmates Asia Services Limited
Model: Asst. No.: 10010, Stock No.: 10011

Date of Test: January 18, 2001

Table 1

Radiated Emissions

Polarity	Frequency (M H z)	Reading (dB μ V)	Antenna Factor (dB)	Net at 3m (dB μ V /m)	Limit at 3m (dB μ V /m)	Margin (dB)
V	36.400	14.7	10	24.7	40.0	-15.3
V	42.560	16.7	10	26.7	40.0	-13.3
V	48.535	13.8	11	24.8	40.0	-15.2
V	54.600	15.7	11	26.7	40.0	-13.3
V	60.665	13.3	10	23.3	40.0	-16.7
V	66.730	16.7	9	25.7	40.0	-14.3
V	72.795	17.6	7	24.6	40.0	-15.4
H	78.860	20.6	6	26.6	40.0	-13.4
H	84.925	17.8	8	25.8	40.0	-14.2
H	127.900	9.1	13	22.1	43.5	-21.4
H	242.911	11.1	19	30.1	43.5	-13.4
H	267.412	2.1	22	24.1	43.5	-19.4

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3 meter distance were measured at 0.3 meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3 meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna and average detector are used for the emission over 1000MHz.
- *Emission within the restricted band meets the requirement of part 15.205. The corresponding limit as per 15.209 is based on Quasi peak detector data for frequencies below 1000 MHz and average detector data for frequencies over 1000 MHz.

Test Engineer: Anthony K. M. Chan

INTERTEK TESTING SERVICES

3.4 Conducted Emission Configuration Photograph

Worst Case Conducted Emission

0.675 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: conducted1.jpg to conducted3.jpg

INTERTEK TESTING SERVICES

3.5 Conducted Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 12.7 dB

TEST PERSONNEL:



Signature

Anthony K. M. Chan, Compliance Engineer
Typed/Printed Name

February 28, 2001
Date

INTERTEK TESTING SERVICES

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: ophoto1.jpg to ophoto2.jpg and iphoto1.jpg to iphoto3.jpg

INTERTEK TESTING SERVICES

EXHIBIT 5

PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf

INTERTEK TESTING SERVICES

EXHIBIT 6

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 **Technical Specifications**

For electronic filing, the block diagram and schematics are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 7

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

This manual will be provided to the end-user with each unit sold/leased in the United States.