

MEASUREMENT REPORT of Bluetooth Personal Digital Assistant

Applicant : Palm Solutions Group
EUT : Bluetooth PDA
Model : Zire72
FCC ID : O3W810
Report No. : A5415337

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 **FAX : 886-2-26934440**

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant	: Palm Solutions Group
Applicant address	: 400 N. McCarthy Blvd. Milpitas, CA 95035-5112
Product name	: Bluetooth PDA
Model	: Zire72
FCC ID	: O3W810
Report No.	: A5415337
Test date	: November 21, 2003

Prepared by:



Jack Tsai

Approved by:



Frank Tsai

Conditions of issue :

- (1) This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- (2) This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.

★ NVLAP LAB CODE: 200174-0

Declaration of Conformity (DoC)

For the Following Equipment:

Product name Bluetooth PDA

Model name Zire72

Trade name palm

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the [report number : A5415337](#)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	9
1.6 Test Procedure	11
1.7 Location of the Test Site	11
1.8 General Test Condition	11
 II. Section 15.101(a): Equipment authorization of unintentional radiators	 12
 III. Section 15.203 : Antenna Requirement.....	 13
 IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	 14
4.1 Test Condition & Setup	14
4.2 List of Test Instruments	14
4.3 Test Results of Conducted Emissions	15
TX, CH 01	15
TX, CH 39	16
TX, CH 79	17
RX mode	18
 V. Section 15.247(a) : Technical Description of the EUT	 19
 VI. Section 15.247(a)(1) : Carrier Frequency Separation.....	 20
6.1 Test Condition	20
6.2 Test Instruments Configuration	20
6.3 List of Test Instruments	21
6.4 Test Results	21
 VII. Section 15.247(a)(1)(ii) : Number of Hopping Frequencies	 22
7.1 Test Condition	22
7.2 List of Test Instruments	22

7.3 Test Instruments Configuration	22
7.4 Test Results	23
VIII. Section 15.247(a)(1)(ii) : Time of Occupancy (Dwell time)	24
8.1 Test Condition	24
8.2 List of Test Instruments	24
8.3 Test Instruments Configuration	25
8.4 Test Results	25
IX. Section 15.247(a)(1)(ii) : 20dB Bandwidth.....	27
9.1 Test Condition	27
9.2 Test Instruments Configuration	27
9.3 List of Test Instruments	28
9.4 Test Results	28
X. Section 15.247(b) : Peak Output Power.....	31
10.1 Test Condition & Setup	31
10.2 List of Test Instruments	31
10.3 Test Results	31
XI. Section 15.247(c) : Band-edge Compliance	32
11.1 Test Condition & Setup.....	32
11.2 List of Test Instruments.....	32
11.3 Test Instruments Configuration	33
11.4 Test Results	33
Lowest (CH 01)	34
Highest (CH 79)	35
XII. Section 15.247(c) : Spurious Radiated Emissions	36
12.1 Test Condition & Setup.....	36
12.2 List of Test Instruments.....	37
12.3 Test Results of Spurious Radiated Emissions	38
Below 1GHz	38
Above 1GHz	40

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with RSS210 of the Commission's Rules and Regulations.

1.2 Description of EUT

Granted FCC ID : O3W810
Product Name : Bluetooth Personal Digital Assistant
Model Name : Zire72
Frequency Range : 2402MHz to 2480MHz
Support Channel : 79 Channels
Channel Spacing : 1 MHz
Modulation Skill : GFSK
Power Type : (1) Rechargeable Battery (3.7V Li-ion 900mAh)
Mfg.: SAMSUNG SDI CO., LTD.
(2) Power adapter
Mfg.: Palm
Model: R3W005-500
I/P: 120VAC, 60Hz, 100mA ; O/P: 5.2VDC, 500mA
Power cable 190cm length, non-shielded, no ferrite core
Data Cable : USB cable, 153cm long, shielded, no ferrite core

1.3 Test method

1. Connected EUT to the USB interface of PC.
2. Using the PC and software provided by the applicant to control EUT. The PDA software of applicant is operated under the Palm OS, and making EUT to the linking mode with support equipments (another PDA) in the unintentional test.
3. The PDA software making EUT to the charging mode and setting continuous transmission or receiver in the intentional test.
4. Set different channel (CH1/CH39/CH79) being tested and repeat the procedures above.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : **HP Pavilion**

Model No. : P8574A

Serial No. : TW219204335

FCC ID : N/A, DoC (Declaration of Confirmation) Approved

檢磁 : 3902H097

Power type : 100 ~ 127VAC / 4A, 200 ~ 240VAC/2A, 50 ~ 60Hz, 5A, Switching

Power cord : Non-shielded, 2.33 m length, Plastic hood, No ferrite core

Monitor : **HP 15' Color Monitor**

Model No. : D2827A

Serial No. : KR91161719

FCC ID : C5F7NFCMC1518X

檢磁 : 3872B039

Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching

Power cord : Shielded, 1.83m long, No ferrite core

Data cable : Shielded, 1.46m long, with two ferrite cores

Keyboard : **HP**

Model No. : 5181

Serial No. : BE21700405

FCC ID : DoC Approved

檢磁 : 3892C981

Power type : By PC

Data cable : Shielded, 1.70m length, with ferrite core

Mouse : **HP**

Model No. : M-UR89

Serial No. : LZS21750238

FCC ID : DoC Approved

檢磁 : 3892D767

Power type : By PC

Power cord : Shielded, 1.80m length, No ferrite core

USB

Gamepad : **Rockfire**
Model No. : QF-337uv
Serial No. : 10600545, KR91379759
FCC ID : None (CE approval)
檢磁 : 3862A574
Power type : By computer
Data Cable : Shielded, 1.81m long, Plastic, with ferrite core

Fax/Modem : **Aceex**

Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable : RS-232→Shielded, 1.30m long, Metal hoods , No bead
RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead

Printer : **HP**

Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : DoC Approved
檢磁 : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm long, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm long, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m long, No ferrite core


Headphone : **MIC**

Model No. : MIC-03
Data cable : Non-shielded, 1.6m length, no ferrite core
Power type : Powered by EUT

1.5 Configuration of System Under Test

(Conducted and Radiated of unintentional for USB interface)


Turtable

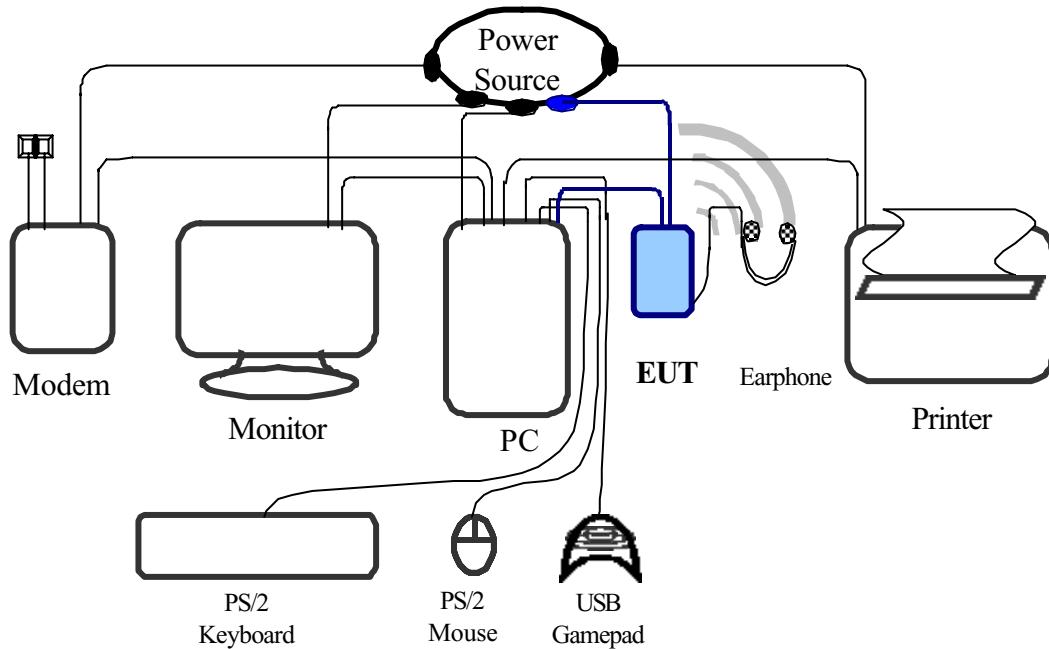

Far



(Radiated of intentional for USB interface)

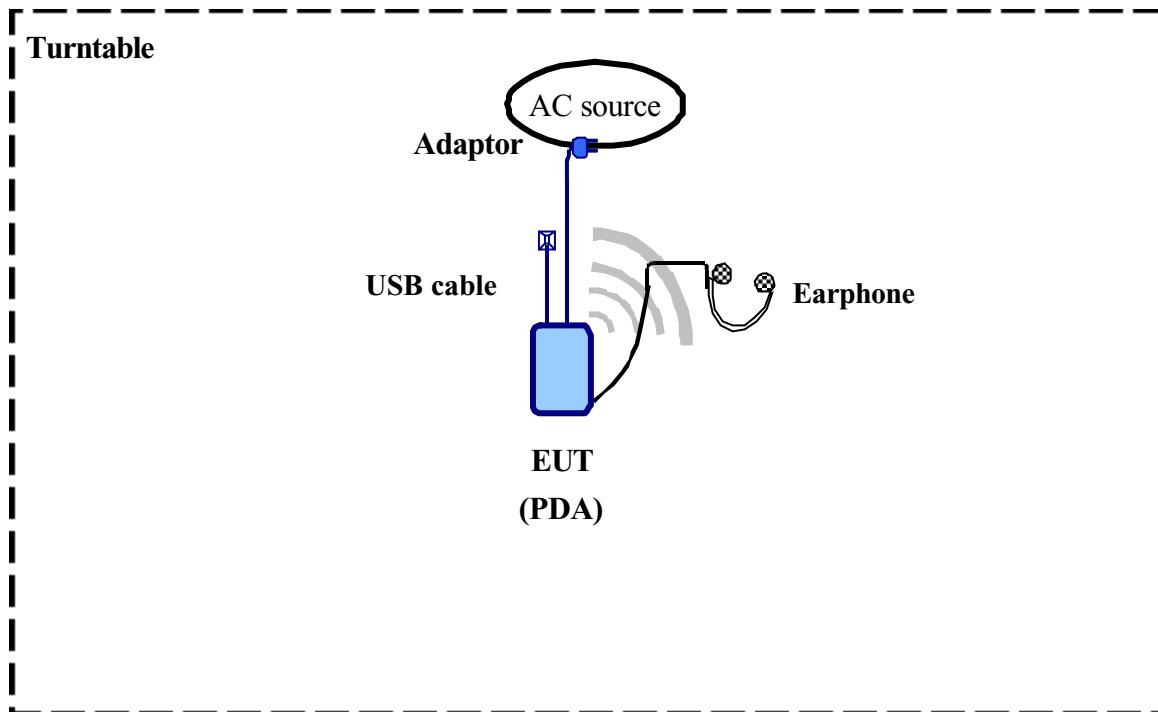

Connections of Equipment

PC:

- *VGA Port --- a monitor
- *Serial Port --- an external modem
- *Parallel Port --- a printer
- *PS/2 Ports --- a PS/2 keyboard and PS/2 mouse
- *USB A-Port --- a USB gamepad
- *USB B-Port --- **EUT**

EUT:

USB Cradle: *USB Cable x 1 --- 153cm length, shielded, no ferrite core

Adaptor: *Power Cable x 1 --- 190cm length, non-shielded, no ferrite core

1.6 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written 1.3 test method, the detail setup was written on each test item.

1.7 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* – No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in an anechoic chamber also located at *Training Research Co., Ltd.*

255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C., *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal uses were investigated.

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH39) and the other in bottom (CH79).

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a universal serial bus and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT is equipped with an integral antenna, it is permanently installed inside its case. The antenna cannot be removed or modified without any tools from outside in order to prevent the un-authorized modification. This makes that complies with the antenna requirement stated in Section 15.203 is inapplicable to this EUT.

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH39) and the other in bottom (CH79).

4.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Calibration Date	
				Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
LISN (EUT)	LISN-01	TRC	9912-03,04	07/21/03	07/21/04
LISN (Support E.)	LISN-01	TRC	9912-05	06/21/03	06/21/04
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(< 30MHz)					

The level of confidence of 95%, the uncertainty of measurement of conducted emission is +2.43dB / -2.53dB.

4.3 Test Results of Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: CH1, TX mode

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	166.000	49.63	---	---	65.54	55.54	-5.91
	191.000	47.73	---	---	64.83	54.83	-7.10
	222.000	45.80	---	---	63.94	53.94	-8.14
	252.000	44.33	---	---	63.09	53.09	-8.76
	314.000	41.53	---	---	61.31	51.31	-9.78
	370.000	39.22	---	---	59.71	49.71	-10.49
	434.000	36.50	---	---	57.89	47.89	-11.39
	499.000	33.90	---	---	56.03	46.03	-12.13
	11610.000	35.42	---	---	60.00	50.00	-14.58
	23230.000	30.18	---	---	60.00	50.00	-19.82
Line 2	155.000	48.11	---	---	65.86	55.86	-7.75
	193.000	47.03	---	---	64.77	54.77	-7.74
	224.000	45.75	---	---	63.89	53.89	-8.14
	269.000	44.99	---	---	62.60	52.60	-7.61
	370.000	43.44	---	---	59.71	49.71	-6.27
	439.000	43.02	---	---	57.74	47.74	-4.72
	464.880	42.83	---	---	56.03	46.03	-3.20
	581.980	42.02	---	---	56.00	46.00	-3.98
	11560.000	40.84	---	---	60.00	50.00	-9.16
	23350.000	31.48	---	---	60.00	50.00	-18.52

NOTE:

(1) Margin = Peak Amplitude – Limit.

(2) A "+" sign in the margin column means the emission is OVER the Class B Limit

and "–" sign of means UNDER the Class B limit, The reading amplitudes are all under limit.

Test mode: CH39, TX mode

Conductor	Frequency (KHz)	Power Connected Emissions			Class B		
		Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	161.000	50.03	---	---	65.69	55.69	-5.66
	189.000	47.34	---	---	64.89	54.89	-7.55
	216.000	45.75	---	---	64.11	54.11	-8.36
	240.000	44.74	---	---	63.43	53.43	-8.69
	288.000	42.25	---	---	62.06	52.06	-9.81
	352.000	39.63	---	---	60.23	50.23	-10.60
	430.000	36.45	---	---	58.00	48.00	-11.55
	499.000	33.66	---	---	56.03	46.03	-12.37
	11610.000	36.09	---	---	60.00	50.00	-13.91
	23230.000	29.78	---	---	60.00	50.00	-20.22
Line 2	191.000	46.68	---	---	64.83	54.83	-8.15
	236.000	45.32	---	---	63.54	53.54	-8.22
	277.000	44.26	---	---	62.37	52.37	-8.11
	338.000	43.81	---	---	60.63	50.63	-6.82
	401.000	43.16	---	---	58.83	48.83	-5.67
	471.950	42.67	---	---	56.43	46.43	-3.76
	565.200	42.32	---	---	56.00	46.00	-3.68
	662.000	41.55	---	---	56.00	46.00	-4.45
	11500.000	36.43	---	---	60.00	50.00	-13.57
	22910.000	32.91	---	---	60.00	50.00	-17.09

Test mode: CH79, TX mode

Conductor	Frequency (KHz)	Power Connected Emissions			Class B		
		Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	155.000	49.70	---	---	65.86	55.86	-6.16
	174.000	48.46	---	---	65.31	55.31	-6.85
	208.000	46.28	---	---	64.34	54.34	-8.06
	250.000	43.72	---	---	63.14	53.14	-9.42
	320.000	40.40	---	---	61.14	51.14	-10.74
	377.000	38.34	---	---	59.51	49.51	-11.17
	443.000	36.18	---	---	57.63	47.63	-11.45
	490.000	33.64	---	---	56.29	46.29	-12.65
	11400.000	37.28	---	---	60.00	50.00	-12.72
	22910.000	29.42	---	---	60.00	50.00	-20.58
Line 2	158.000	47.27	---	---	65.77	55.77	-8.50
	193.000	46.07	---	---	64.77	54.77	-8.70
	220.000	45.45	---	---	64.00	54.00	-8.55
	282.000	44.31	---	---	62.23	52.23	-7.92
	363.000	42.95	---	---	59.91	49.91	-6.96
	439.000	42.39	---	---	57.74	47.74	-5.35
	485.000	42.32	---	---	56.43	46.43	-4.11
	497.250	42.02	---	---	56.00	46.00	-3.98
	633.000	41.51	---	---	56.00	46.00	-4.49
	11290.000	36.78	---	---	60.00	50.00	-13.22

Test mode: RX mode

Conductor	Frequency (KHz)	Power Connected Emissions			Class B		
		Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	155.000	49.21	---	---	65.86	55.86	-6.65
	155.600	50.51	---	---	64.29	54.29	-3.78
	222.000	45.02	---	---	63.94	53.94	-8.92
	231.500	49.37	---	---	62.06	52.06	-2.69
	302.000	45.84	---	---	61.66	51.66	-5.82
	331.000	45.13	---	---	60.83	50.83	-5.70
	370.000	38.36	---	---	59.71	49.71	-11.35
	518.000	35.63	---	---	56.00	46.00	-10.37
	11500.000	35.21	---	---	60.00	50.00	-14.79
	22070.000	29.87	---	---	60.00	50.00	-20.13
Line 2	166.000	46.51	---	---	65.54	55.54	-9.03
	208.000	45.11	---	---	64.34	54.34	-9.23
	269.000	43.76	---	---	62.60	52.60	-8.84
	345.000	42.37	---	---	60.43	50.43	-8.06
	434.000	41.97	---	---	57.89	47.89	-5.92
	513.000	41.67	---	---	56.00	46.00	-4.33
	563.000	41.65	---	---	56.00	46.00	-4.35
	1070.000	32.01	---	---	56.00	46.00	-13.99
	11400.000	36.11	---	---	60.00	50.00	-13.89
	22700.000	30.52	---	---	60.00	50.00	-19.48

V. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Frequency Hopping Spectrum System* is a spread spectrum system in which the carrier has been modulated by a *high speed spreading code* and an *information data stream* with its *known hopping algorithm* and *avoidance method*. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the *operational description* demonstrates the operation principles of the base-band processor employed by the EUT, shows that which is a complete FHSS base-band processor and meets the definition of the *Frequency Hopping Spectrum System*.

VI. Section 15.247(a)(1): Carrier Frequency Separation

6.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = Auto


Detector Function = peak

Trace = max hold

Setting up procedure is written on 1.3 test method.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channel. The limit is specified in one of the subparagraphs of this section. Submit this plot.

6.2 Test Instruments Configuration

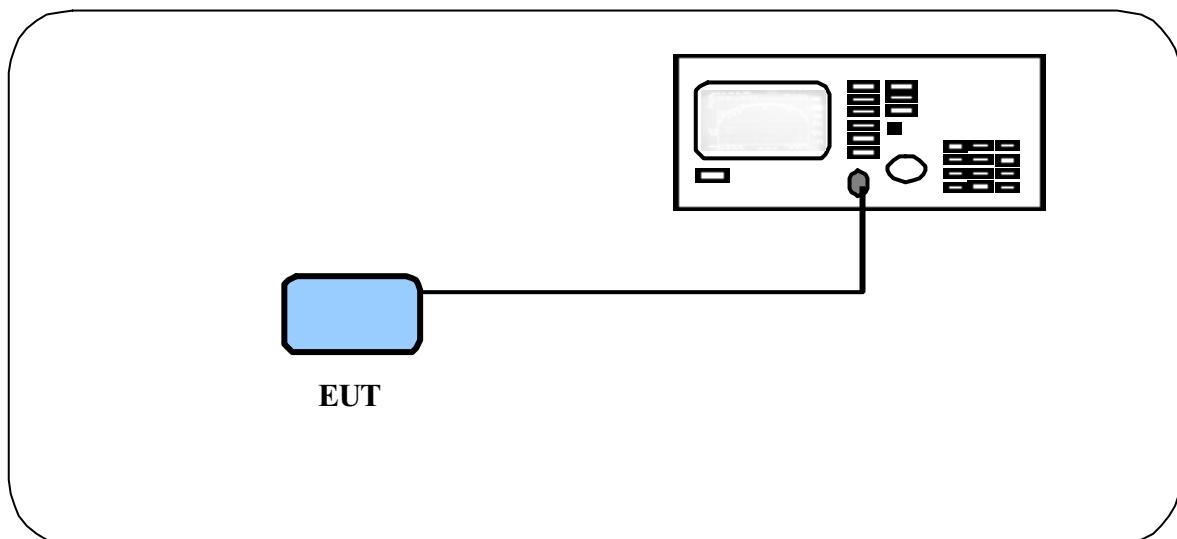

Test Configuration of carrier frequency separation

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04

6.4 Test Results

Channel Separation: 1MHz



VII. Section 15.247(a)(1)(ii): Number of Hopping Frequencies

7.1 Test Condition

The EUT must have its Hopping function enabled. Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this section. Submit this plots.



7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04

7.3 Test Instruments Configuration

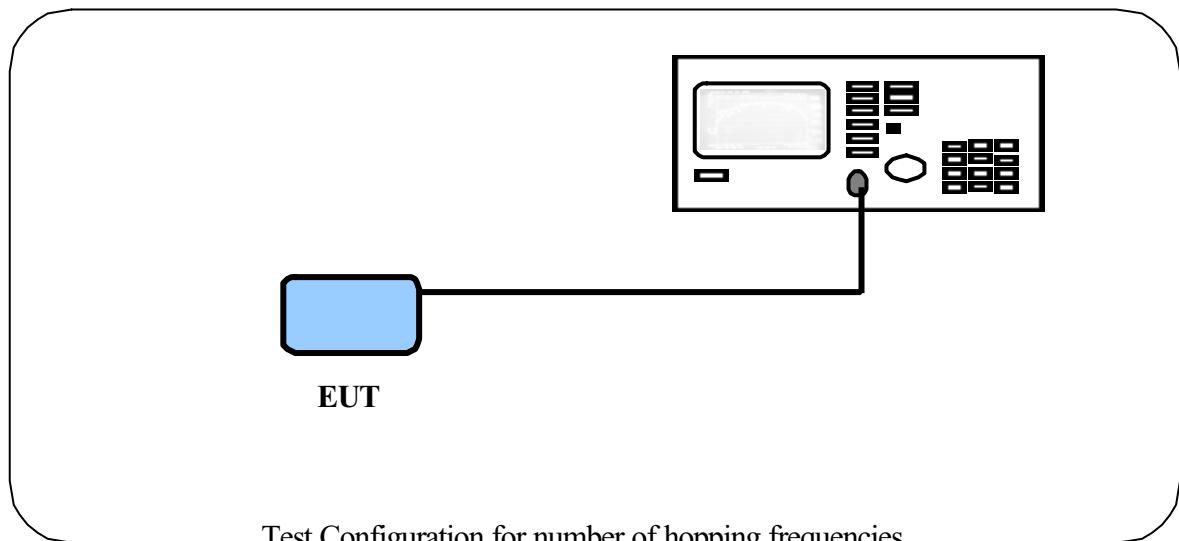

7.4 Test Results

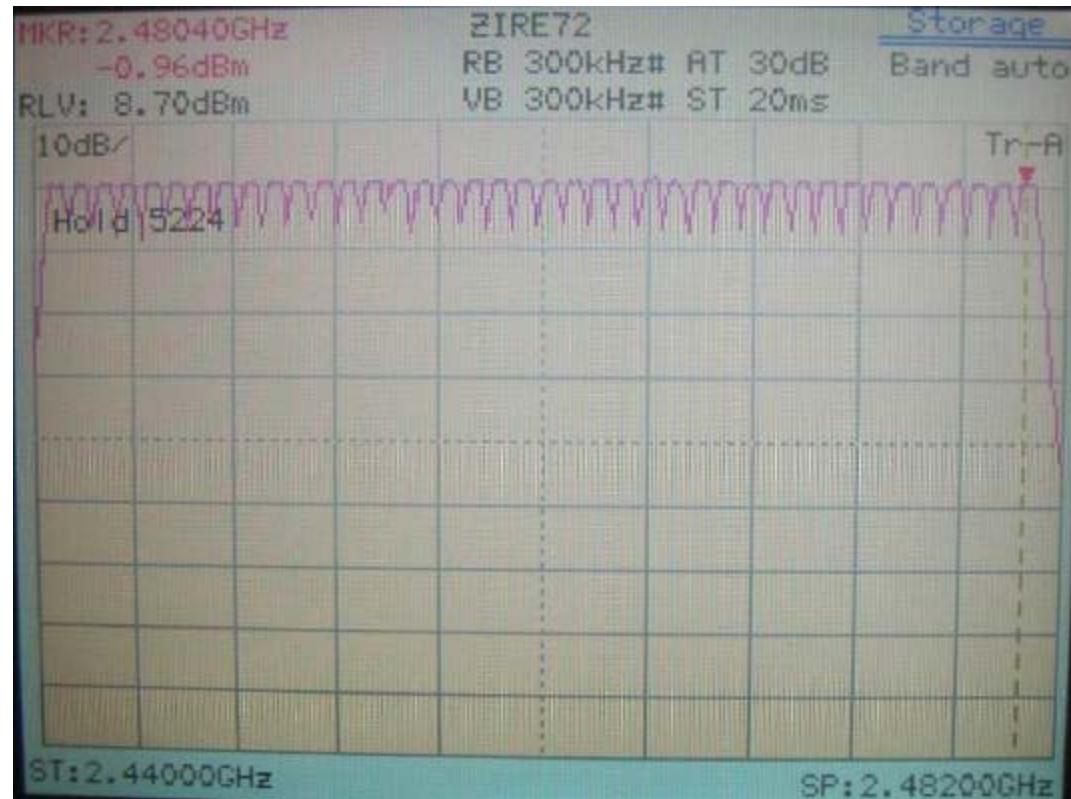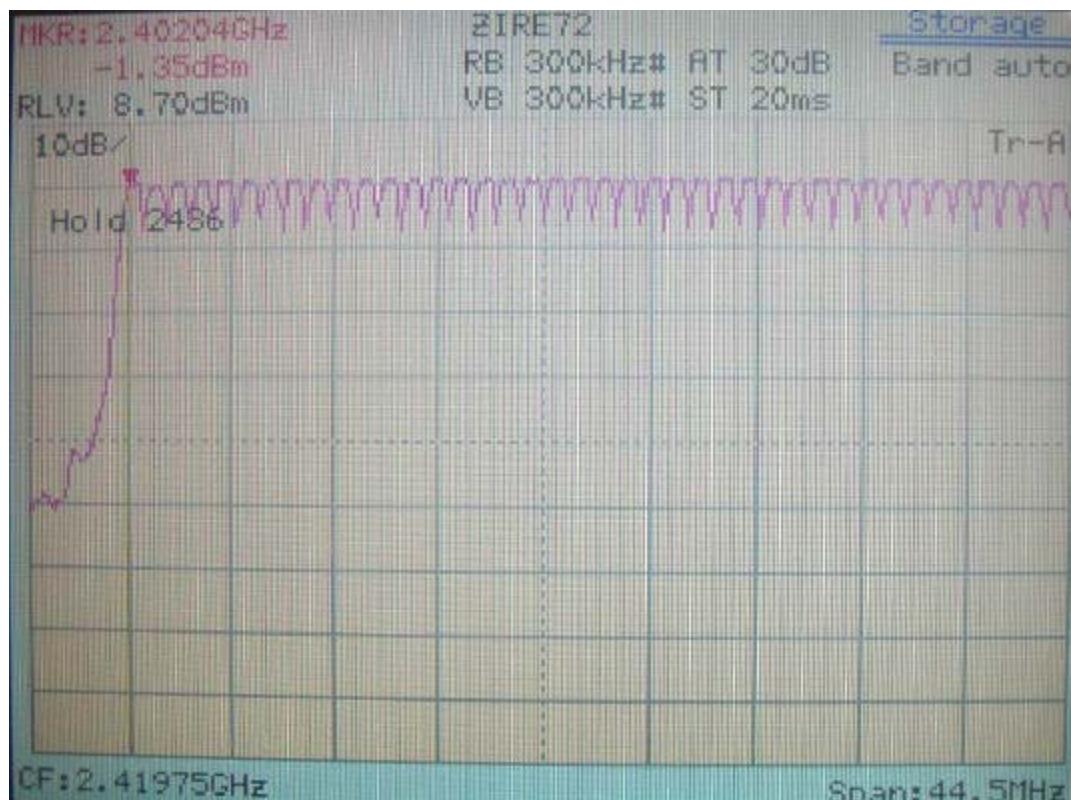

VIII. Section 15.247(a)(1)(ii): Time of Occupancy (Dwell Time)

8.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 1M

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak


Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

8.2 List of Test Instruments



Instrument Name	Model No	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	8564E	H P	3720A00840	07/23/03	07/23/04
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04
Microwave Preamplifier	84125C	H P	US36433002	07/30/03	07/30/04
Horn Antenna	3115	EMCO	9104 – 3668	12/24/02	12/24/03

8.3 Test Instruments Configuration

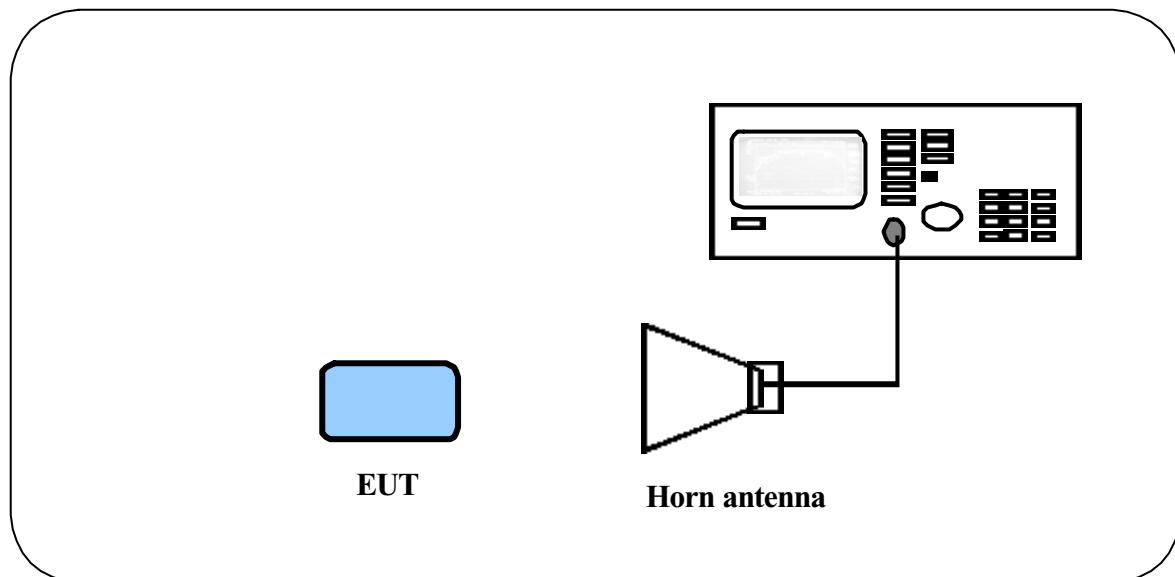

8.4 Test Results

1. Pulse width of one slot measurement:
Results: $188\mu\text{Sec}$
2. Dwell time measurement
Time period of each burst is $188\mu\text{Sec}$ in 1.0mSec sweep time.
There are 100 bursts in 3 second.
So, the occupancy time within 30 second is $(30/3) * 100 * 188 = 0.188 \text{ Sec}$
Results: 0.188 second
3. Limits: The average time of occupancy is less than 0.4 second within a 30 second period.
4. As following page.

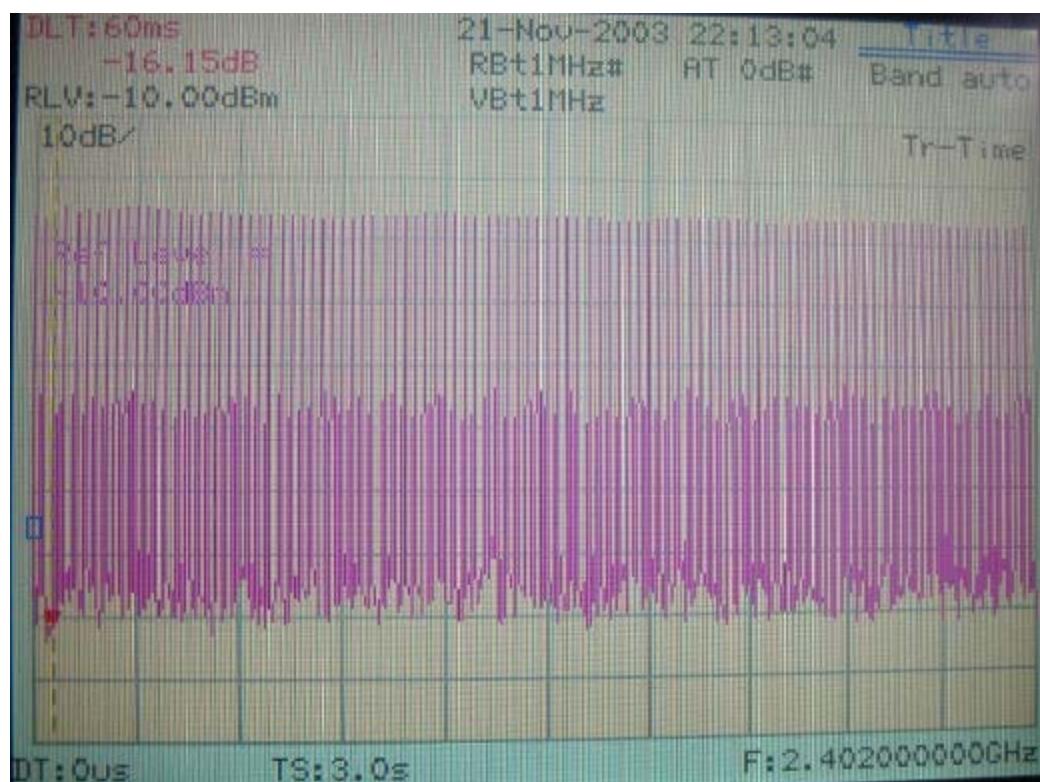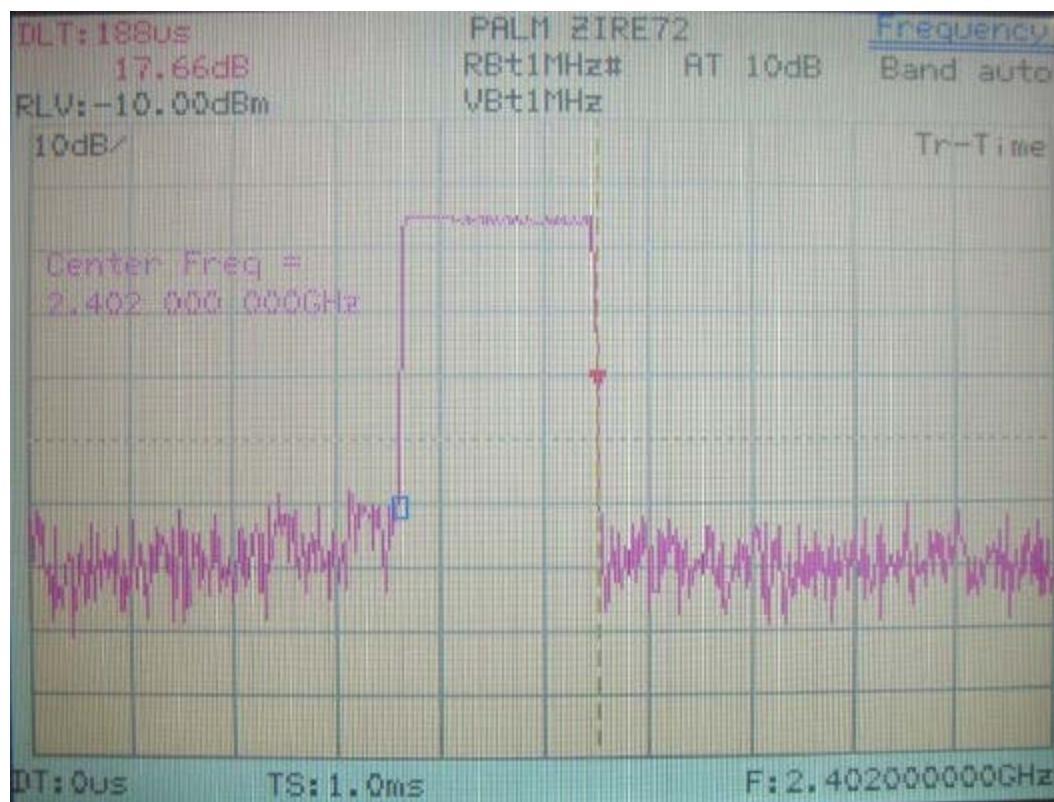

IX. Section 15.247(a)(1)(ii): 20dB Bandwidth

9.1 Test Condition

Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the emission bandwidth

VBW \geq RBW


Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s).

9.2 Test Instruments Configuration

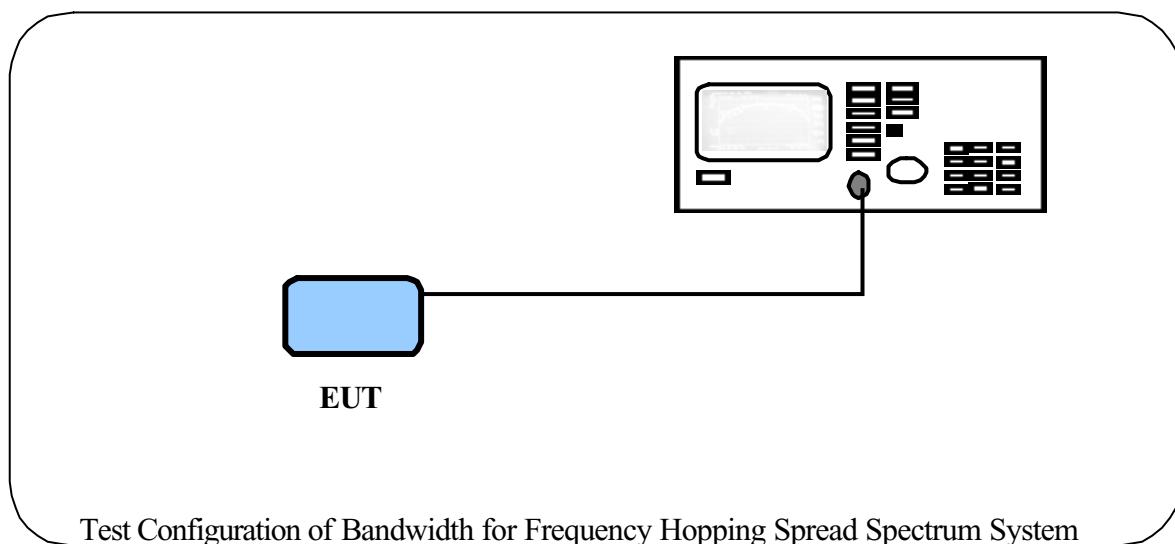

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04

9.4 Test Results

Channel	Bandwidth
Channel 01	952 kHz
Channel 39	968 kHz
Channel 79	964 kHz

Note:

The data in the above table are summarizing the following attachment spectrum analyzer.


20dB Bandwidth of Channel 1: 952kHz**20dB Bandwidth of Channel 39: 968kHz**

20dB Bandwidth of Channel 79: 964kHz



X. Section 15.247(b): Peak Output Power

10.1 Test Condition & Setup

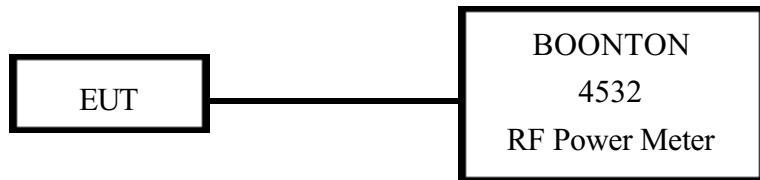

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will be shown in the dBm directly are the transmitter output peak power. Recording as follows.

10.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
RF Power Meter	4532	BOONTON	117501	04/12/03	04/12/04
Peak Power Sensor	57340	BOONTON	2698	04/12/03	04/12/04

10.3 Test Result

Formula:

Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator dBm	Cable Loss dBm	Output peak power	
			dBm	mW
CH 01	-0.19	0.70	0.51	1.125
CH 39	-0.27	0.70	0.43	1.104
CH 79	-0.31	0.70	0.39	1.094

XI. Section 15.247(c): Band-edge Compliance

11.1 Test Condition

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a)*,


We perform this section by the *radiated manner*, the RBW is set to 100kHz and $VBW > RBW$. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The test setup is same as chapter 12.1.

11.2 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	8564E	H P	3720A00840	07/23/03	07/23/04
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04
Microwave	84125C	H P	US36433002	07/30/03	07/30/04
Preamplifier					
Horn Antenna	3115	EMCO	9104 – 3668	12/24/02	12/24/03

11.3 Test Instruments Configuration

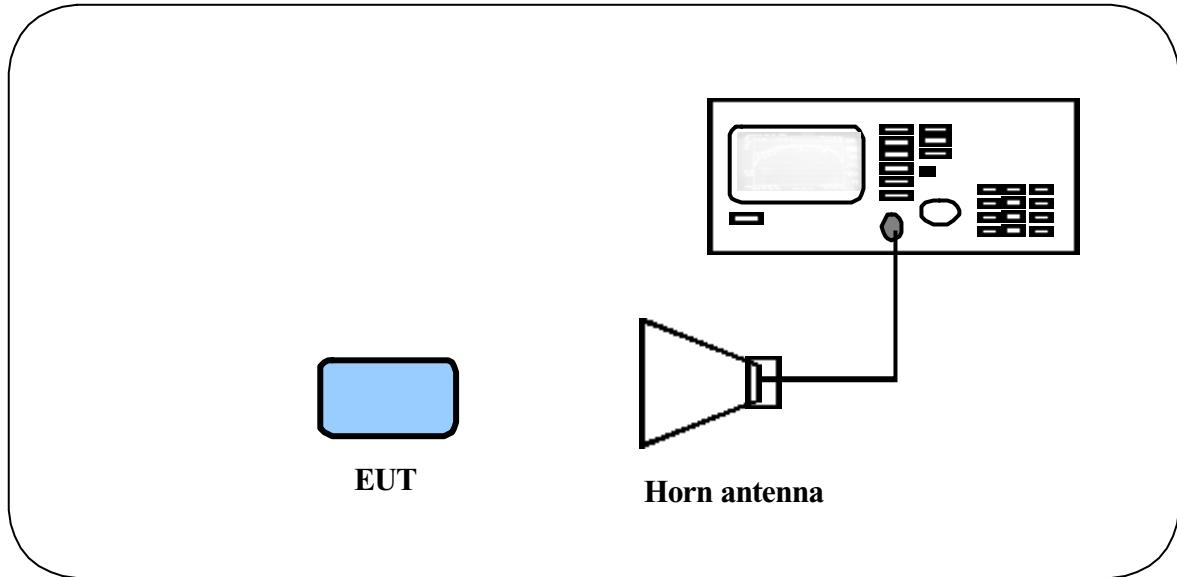

11.4 Test Result of the Bandedge

The following pages show our observations referring to the channel 1 and 79 respectively.

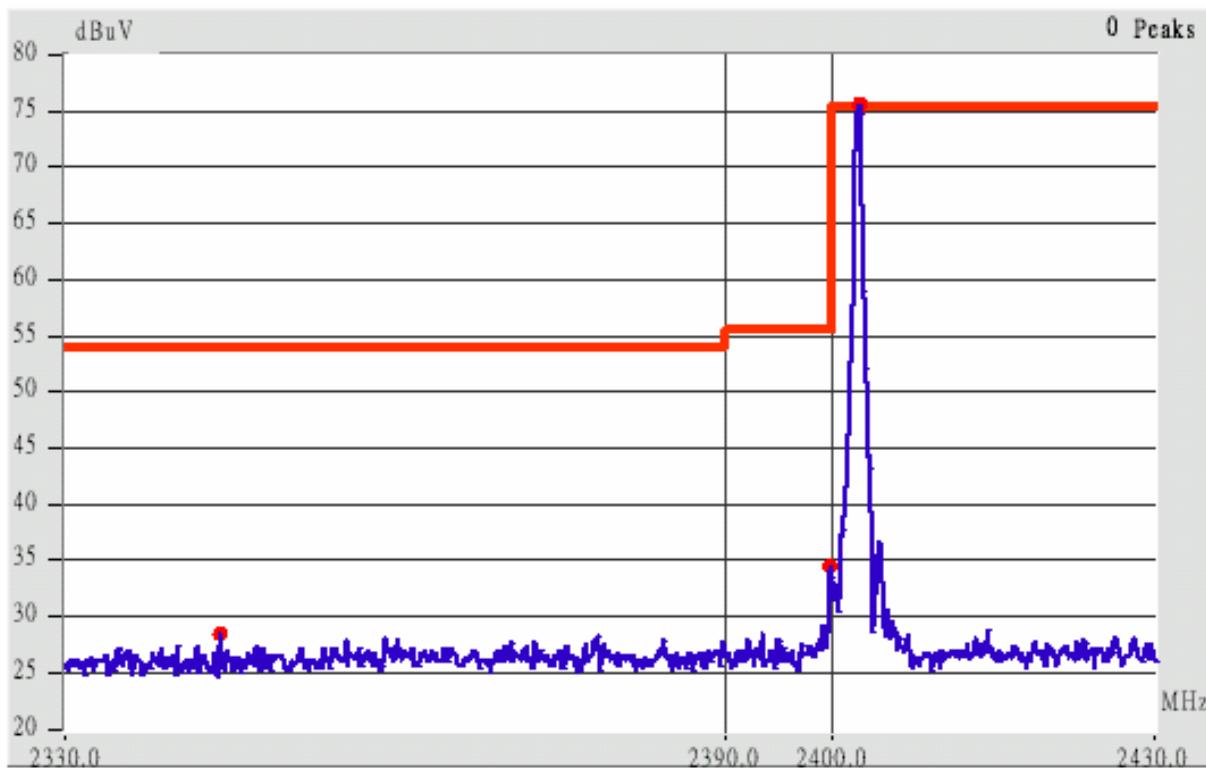
Channel 1

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with Part 15.209(a) – as below

Frequency (MHz)	Radiated Emission					Corrected Amplitude (dB μ V/m)	FCC Class B			
	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	Peak		Limit (dB μ V/m)		Margin (dB)	
							Peak	Ave.		
2367.54	Hor	1.00	151	3.06	38.73	---	74.00	53.96	-15.23	
2390.02	Hor	1.00	223	3.13	36.63	---	74.00	53.96	-17.33	
2376.04	Ver	1.00	149	3.09	38.59	---	74.00	53.96	-15.37	
2390.02	Ver	1.00	167	3.13	37.47	---	74.00	53.96	-16.49	

Channel 79

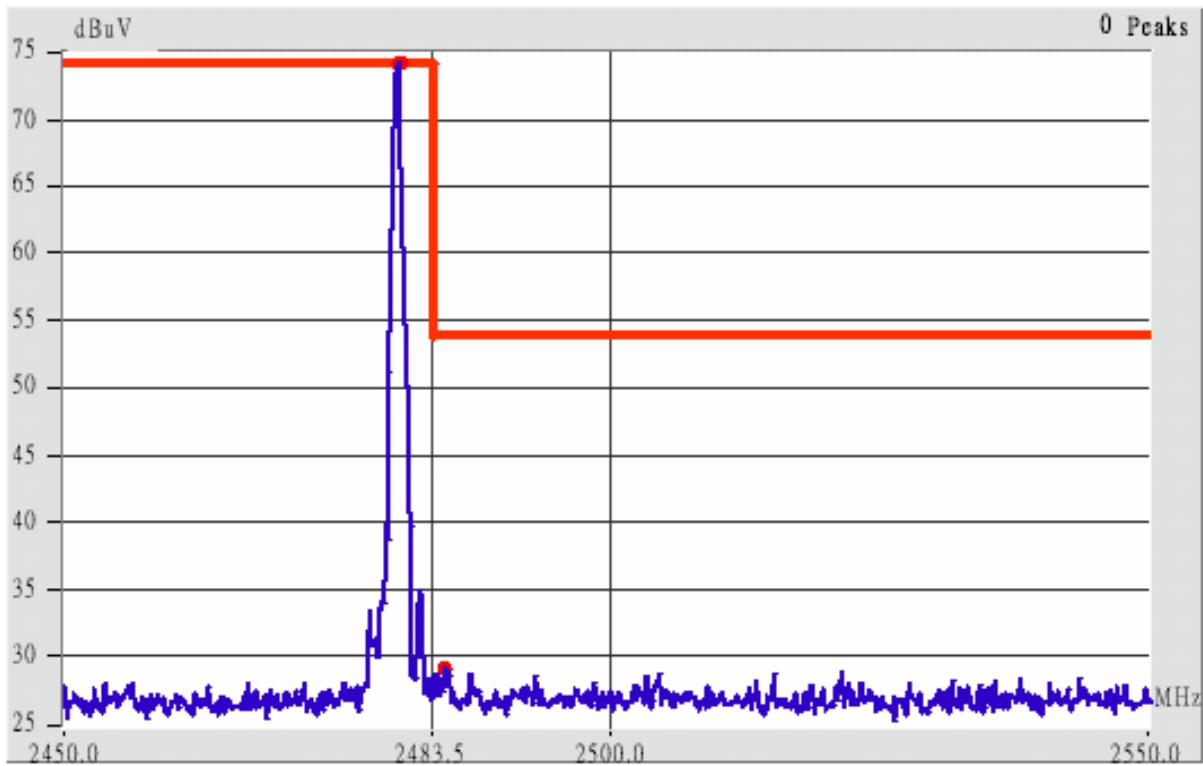

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with Part 15.209(a) – as below.

Frequency (MHz)	Radiated Emission					Corrected Amplitude (dB μ V/m)	FCC Class B			
	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	Peak		Limit (dB μ V/m)		Margin (dB)	
							Peak	Ave.		
2483.50	Hor	1.00	307	3.45	37.78	---	74.00	53.96	-16.18	
2498.37	Hor	1.00	118	3.49	39.16	---	74.00	53.96	-14.80	
2500.01	Hor	1.00	257	3.50	37.17	---	74.00	53.96	-16.79	
2531.86	Hor	1.00	69	3.54	39.38	---	74.00	53.96	-14.58	
2485.72	Ver	1.00	264	3.45	38.79	---	74.00	53.96	-15.17	
2525.79	Ver	1.00	39	3.53	39.03	---	74.00	53.96	-14.93	

XII. Section 15.247(c): Spurious Radiated Emissions

12.1 Test Condition and Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use three orthogonal planes.) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8546A EMI Receiver, CHASE whole range Bi-log antenna (Model No.: CBL 6141A) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH1), one in the middle (CH39) and the other in bottom (CH79). The setting up procedure is recorded on <1.3 test method >

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

12.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
Bi-log Antenna	CBL 6141A	CHASE	4206	05/27/03	05/27/04
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	11/20/03	11/20/04
Spectrum Analyzer	8564E	HP	3720A00840	07/23/03	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/03	07/30/04
Horn Antenna	3115	EMCO	9104-3668	12/24/02	12/24/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/03	05/20/04

The level of confidence of 95% , the uncertainty of measurement of radiated emission is +3.05dB / -3.84dB.

12.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

30MHz to 1GHz for TX mode, X-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
72.44	27.31	1.00	145	1.92	29.23	40.00	-10.77
158.52	40.14	1.00	236	-2.44	37.70	43.50	-5.80
313.72	40.97	1.00	329	-2.05	38.92	46.00	-7.08
418.00	32.98	1.00	291	1.23	34.21	46.00	-11.79
519.85	31.25	1.00	129	5.34	36.59	46.00	-9.41
728.40	27.16	1.00	182	12.65	39.81	46.00	-6.19

30MHz to 1GHz TX mode, X-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
45.76	27.77	1.00	175	4.71	32.48	40.00	-7.52
157.31	33.95	1.00	291	-2.37	31.58	43.50	-11.92
190.05	32.51	1.00	313	-2.55	29.96	43.50	-13.54
519.85	32.09	1.00	247	5.34	37.43	46.00	-8.57
728.40	27.76	1.00	209	12.65	40.41	46.00	-5.59
881.17	24.11	1.00	352	16.53	40.64	46.00	-5.36

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)

30MHz to 25GHz for RX mode, X-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
105.17	41.33	1.00	307	0.05	41.38	43.50	-2.12
154.89	40.31	1.00	24	-2.23	38.08	43.50	-5.42
191.26	41.72	1.00	317	-2.51	39.21	43.50	-4.29
260.37	43.59	1.00	340	-2.73	40.86	46.00	-5.14
289.47	42.30	1.00	340	-2.46	39.84	46.00	-6.16
453.16	36.95	1.00	87	2.24	39.19	46.00	-6.81

30MHz to 25GHz for RX mode, X-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
49.40	26.31	1.00	171	4.16	30.47	40.00	-9.53
106.39	34.38	1.00	168	0.00	34.38	43.50	-9.12
187.62	37.21	1.00	358	-2.60	34.61	43.50	-8.89
386.47	34.68	1.00	197	0.15	34.83	46.00	-11.17
519.85	35.63	1.00	39	5.34	40.97	46.00	-5.03
881.17	24.57	1.00	27	16.53	41.10	46.00	-4.90

30MHz to 1GHz for TX mode, Y-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
39.70	32.80	1.00	140	5.62	38.42	40.00	-1.58
72.44	29.04	1.00	150	1.92	30.96	40.00	-9.04
141.55	33.69	1.00	183	-1.74	31.95	43.50	-11.55
148.82	34.04	1.00	167	-1.92	32.12	43.50	-11.38
519.85	34.00	1.00	159	5.34	39.34	46.00	-6.66
728.40	28.24	1.00	340	12.65	40.89	46.00	-5.11

30MHz to 1GHz TX mode, Y-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
44.55	26.49	1.00	88	4.90	31.39	40.00	-8.61
79.71	27.55	1.00	236	1.70	29.25	40.00	-10.75
190.05	31.98	1.00	104	-2.55	29.43	43.50	-14.07
380.41	29.98	1.00	253	-0.11	29.87	46.00	-16.13
519.85	29.72	1.00	315	5.34	35.06	46.00	-10.94
728.40	29.28	1.00	219	12.65	41.93	46.00	-4.07

30MHz to 25GHz for RX mode, Y-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
116.09	40.77	1.00	197	-0.82	39.95	43.50	-3.55
194.90	40.79	1.00	329	-2.39	38.40	43.50	-5.10
289.47	44.50	1.00	279	-2.46	42.04	46.00	-3.96
313.72	47.20	1.00	301	-2.05	45.15	46.00	-0.85
337.97	40.97	1.00	199	-1.64	39.33	46.00	-6.67
387.69	38.75	1.00	196	0.21	38.96	46.00	-7.04

30MHz to 25GHz for RX mode, Y-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
51.83	28.16	1.00	173	3.82	31.98	40.00	-8.02
113.66	39.16	1.00	306	-0.56	38.60	43.50	-4.90
313.72	41.04	1.00	358	-2.05	38.99	46.00	-7.01
386.47	39.57	1.00	284	0.15	39.72	46.00	-6.28
519.85	35.38	1.00	176	5.34	40.72	46.00	-5.28
728.40	25.90	1.00	325	12.65	38.55	46.00	-7.45

30MHz to 1GHz for TX mode, Z-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
39.70	27.73	1.00	117	5.62	33.35	40.00	-6.65
142.76	35.38	1.00	167	-1.77	33.61	43.50	-9.89
313.72	39.47	1.00	346	-2.05	37.42	46.00	-8.58
439.82	43.36	1.00	138	1.82	45.18	46.00	-0.82
519.85	27.40	1.00	82	5.34	32.74	46.00	-13.26
728.40	31.46	1.00	198	12.65	44.11	46.00	-1.89

30MHz to 1GHz TX mode, Z-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
51.83	26.87	1.00	134	3.82	30.69	40.00	-9.31
154.89	32.24	1.00	249	-2.23	30.01	43.50	-13.49
233.70	31.53	1.00	192	-2.61	28.92	46.00	-17.08
379.20	30.29	1.00	246	-0.16	30.13	46.00	-15.87
519.85	30.97	1.00	313	5.34	36.31	46.00	-9.69
728.40	27.60	1.00	26	12.65	40.25	46.00	-5.75

30MHz to 25GHz for RX mode, Z-axis [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
110.02	40.09	1.00	308	-0.17	39.92	43.50	-3.58
187.62	44.10	1.00	306	-2.60	41.50	43.50	-2.00
217.94	42.28	1.00	234	-2.44	39.84	46.00	-6.16
289.47	45.56	1.00	18	-2.46	43.10	46.00	-2.90
313.72	42.24	1.00	316	-2.05	40.19	46.00	-5.81
337.97	42.51	1.00	213	-1.64	40.87	46.00	-5.13

30MHz to 25GHz for RX mode, Z-axis [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
174.29	41.28	1.00	81	-2.57	38.71	43.50	-4.79
183.99	41.75	1.00	38	-2.67	39.08	43.50	-4.42
224.00	39.65	1.00	319	-2.46	37.19	46.00	-8.81
519.85	34.16	1.00	184	5.34	39.50	46.00	-6.50
573.20	29.40	1.00	180	7.85	37.25	46.00	-8.75
881.17	24.32	1.00	16	16.53	40.85	46.00	-5.15

1GHz to 25GHz for channel 1, X-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4805.00	1.00	96	3.69	43.13	---	74.00	53.96	-10.83
7205.56	1.00	109	9.93	44.20	---	74.00	53.96	-9.76
9606.11	1.00	22	11.48	44.59	---	74.00	53.96	-9.37

1GHz to 25GHz for channel 1, X-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4805.00	1.00	69	3.69	43.63	---	74.00	53.96	-10.33
7205.56	1.00	179	9.93	44.53	---	74.00	53.96	-9.43
9606.11	1.00	247	11.48	44.59	---	74.00	53.96	-9.37

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

1GHz to 25GHz for channel 39, X-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4881.53	1.00	251	3.98	41.09	---	74.00	53.96	-12.87
7322.36	1.00	47	10.32	42.60	---	74.00	53.96	-11.36
9763.19	1.00	96	11.90	44.01	---	74.00	53.96	-9.95

1GHz to 25GHz for channel 39, X-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4881.53	1.00	317	3.98	43.92	---	74.00	53.96	-10.04
7322.36	1.00	229	10.32	42.43	---	74.00	53.96	-11.53
9763.19	1.00	267	11.90	43.51	---	74.00	53.96	-10.45

1GHz to 25GHz for channel 79, X-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4958.06	1.00	51	4.24	39.01	---	74.00	53.96	-14.95
7439.17	1.00	164	10.33	42.44	---	74.00	53.96	-11.52
9920.28	1.00	331	11.68	44.95	---	74.00	53.96	-9.01

1GHz to 25GHz for channel 79, X-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4958.06	1.00	131	4.24	40.35	---	74.00	53.96	-13.61
7439.17	1.00	149	10.33	43.11	---	74.00	53.96	-10.85
9920.28	1.00	337	11.68	44.45	---	74.00	53.96	-9.51

1GHz to 25GHz for channel 1, Y-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4805.00	1.00	25	3.69	44.13	---	74.00	53.96	-9.83
7197.50	1.00	319	9.88	44.16	---	74.00	53.96	-9.80
9608.12	1.00	46	11.47	45.08	---	74.00	53.96	-8.88

1GHz to 25GHz for channel 1, Y-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4690.21	1.00	23	3.23	43.34	---	74.00	53.96	-10.62
7203.54	1.00	191	9.91	44.85	---	74.00	53.96	-9.11
9608.12	1.00	107	11.47	46.58	---	74.00	53.96	-7.38

1GHz to 25GHz for channel 39, Y-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4883.54	1.00	47	3.99	43.76	---	74.00	53.96	-10.20
7324.37	1.00	196	10.33	42.93	---	74.00	53.96	-11.03
9765.21	1.00	44	11.90	44.18	---	74.00	53.96	-9.78

1GHz to 25GHz for channel 39, Y-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4883.54	1.00	114	3.99	42.26	---	74.00	53.96	-11.70
7324.37	1.00	29	10.33	41.93	---	74.00	53.96	-12.03
9765.21	1.00	107	11.90	44.34	---	74.00	53.96	-9.62

1GHz to 25GHz for channel 79, Y-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4962.08	1.00	54	4.25	42.69	---	74.00	53.96	-11.27
7439.17	1.00	182	10.33	42.94	---	74.00	53.96	-11.02
9916.25	1.00	176	11.70	43.97	---	74.00	53.96	-9.99

1GHz to 25GHz for channel 79, Y-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4962.08	1.00	9	4.25	40.53	---	74.00	53.96	-13.43
7439.17	1.00	351	10.33	42.44	---	74.00	53.96	-11.52
9922.29	1.00	117	11.66	44.44	---	74.00	53.96	-9.52

1GHz to 25GHz for channel 1, Z-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4805.00	1.00	149	3.69	43.63	---	74.00	53.96	-10.33
7203.54	1.00	227	9.91	45.02	---	74.00	53.96	-8.94
9608.12	1.00	307	11.47	47.58	---	74.00	53.96	-6.38

1GHz to 25GHz for channel 1, Z-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Average	Margin (dB)
4805.00	1.00	114	3.69	44.46	---	74.00	53.96	-9.50
7209.58	1.00	347	9.95	45.39	---	74.00	53.96	-8.57
9608.12	1.00	229	11.47	44.74	---	74.00	53.96	-9.22

1GHz to 25GHz for channel 39, Z-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Ave.	Margin (dB)
4883.54	1.00	267	3.99	44.10	---	74.00	53.96	-9.86
7324.37	1.00	29	10.33	42.10	---	74.00	53.96	-11.86
9765.21	1.00	284	11.90	44.01	---	74.00	53.96	-9.95

1GHz to 25GHz for channel 39, Z-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)			Peak	Ave.	Margin (dB)
4883.54	1.00	190	3.99	45.60	---	74.00	53.96	-8.36
7324.37	1.00	217	10.33	42.77	---	74.00	53.96	-11.19
9765.21	1.00	46	11.90	43.51	---	74.00	53.96	-10.45

1GHz to 25GHz for channel 79, Z-axis [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4962.08	1.00	42	4.25	41.03	---	74.00	53.96	-12.93
7439.17	1.00	249	10.33	43.77	---	74.00	53.96	-10.19
9916.25	1.00	161	11.70	44.47	---	74.00	53.96	-9.49

1GHz to 25GHz for channel 79, Z-axis [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4962.08	1.00	254	4.25	41.03	---	74.00	53.96	-12.93
7439.17	1.00	18	10.33	41.77	---	74.00	53.96	-12.19
9922.29	1.00	190	11.66	44.44	---	74.00	53.96	-9.52