

S

T

S

L

A

B



FCC TEST REPORT

Report No:STS1809205W04

Issued for

DewertOkin GmbH

Weststr. 1, 32278 Kirchlingern, Germany

Product Name:	CU165 (CONTROL BOX)
Brand Name:	N/A
Model Name:	A1179
Series Model:	N/A
FCC ID:	O3YCU165
IC ID:	10744A-CU165
Test Standard:	FCC Part 15.249
	RSS 210 Issue 9

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's name : DewertOkin GmbH
Address : Weststr. 1, 32278 Kirchlingern, Germany
Manufacture's Name : DewertOkin GmbH
Address : Weststr. 1, 32278 Kirchlingern, Germany

Product description

Product Name: CU165 (CONTROL BOX)
Brand Name: N/A
Model Name.....: A1179
Series Model: N/A
Test Standards.....: FCC Part15.249
RSS 210 Issue 9
Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC&IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :
Date of performance of tests : 25 Sept.2018 ~30 Sept.2018
Date of Issue : 16 Oct.2018
Test Result : Pass

Testing Engineer :

Chris chen

(Chris chen)

Technical Manager :

Sean she

(Sean she)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS	11
2.5 EQUIPMENTS LIST	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. BANDWIDTH TEST	30
4.2 TEST SETUP	30
4.3 EUT OPERATION CONDITIONS	30
4.4 TEST RESULTS	31
5. ANTENNA REQUIREMENT	33
5.1 STANDARD REQUIREMENT	33
5.2 EUT ANTENNA	33
APPENDIX- PHOTOS OF TEST SETUP	34



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	16 Oct.2018	STS1809205W04	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C RSS 210 Issue 9			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen Issue 4 (8.8)	Conducted Emission	Pass	--
15.203 RSS-Gen Issue 4	Antenna Requirement	Pass	--
15.249 RSS 210 Issue 9 (B.10)	Radiated Spurious Emission	Pass	--
15.205	Radiated Band Edge Emission	Pass	--
15.249 RSS-Gen Issue 4	Occupied Bandwidth	Pass	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	± 2.88 dB
2	Conducted Emission (150KHz-30MHz)	± 2.67 dB
3	RF power,conducted	± 0.71 dB
4	Spurious emissions,conducted	± 0.63 dB
5	All emissions,radiated (9KHz-30MHz)	± 3.02 dB
6	All emissions,radiated (30MHz-200MHz)	± 3.80 dB
7	All emissions,radiated (200MHz-1000MHz)	± 3.97 dB



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	CU165 (CONTROL BOX)
Trade Name	N/A
Model Name	A1179
Series Model	N/A
Model Difference	N/A
Product Description	The EUT is CU165 (CONTROL BOX)
	Operation Frequency: 2403-2480MHz
	Modulation Type: GFSK
	Antenna Designation: PCB Antenna
	Antenna Gain(Peak): 0 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Power Rating	Input:30V DC Output: 30V DC
Hardware version number	1003799
Software version number	90586
Radio Hardware version	1003799
Radio Software version	90586

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		
21	2423	42	2444	63	2465		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	A1179	PCB	NA	0	Antenna



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	GFSK
Mode 2	TX CH59	GFSK
Mode 3	TX CH78	GFSK

Note:

(1) All above mode have been measurement, only worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report


For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Continue TX


2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Spurious Emission Test



Conducted Emission Test

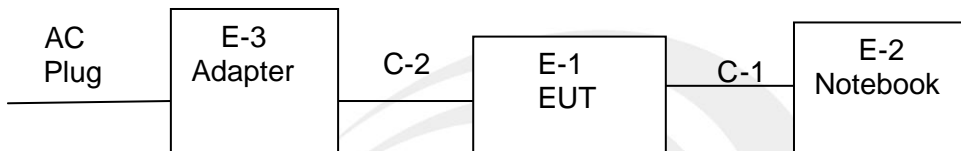



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-3	Adapter	Dewertokin	09-290018	RBD7201004466	N/A
C-2	DC Cable	Dewertokin	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2018.11.01
Horn Antenna	Schwarzbeck	BBHA 9120D (1201)	9120D-1343	2017.10.27	2018.10.26
Passive Loop (9K--30MHz)	ZHNAN	ZN3090C	16035	2018.03.11	2019.03.10
Pre-mpplier (0.1M-3GHz)	EM	EM330	60538	2018.03.11	2019.03.10
PreAmplifier	Agilent	8449B	60538	2017.10.15	2018.10.14
USB RF power sensor	DARE	RPR3006W	15I00041SNO0 3	2017.10.15	2018.10.14
Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2018.10.14

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
conduction Cable	EM	C01	N/A	2018.03.11	2019.03.10
Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2018.10.14

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249& RSS-Gen Issue 4 (8.8) limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

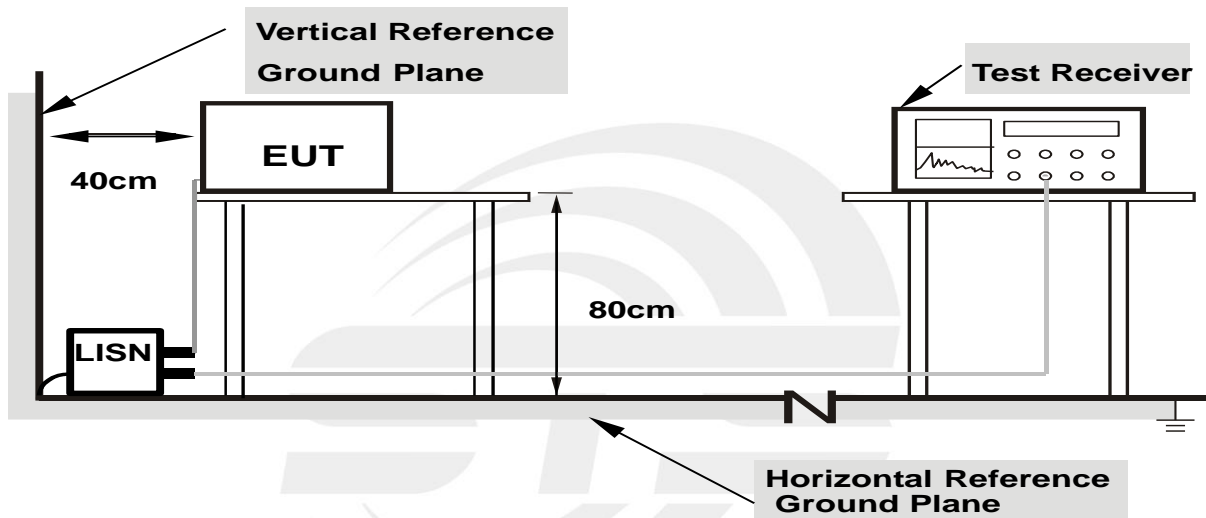

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULTS

Temperature:	26.8°C	Relative Humidity:	66%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1620	39.90	19.79	59.69	65.36	-5.67	QP
0.1620	24.94	19.79	44.73	55.36	-10.63	AVG
0.4700	28.81	20.03	48.84	56.51	-7.67	QP
0.4700	21.54	20.03	41.57	46.51	-4.94	AVG
1.0340	25.08	19.80	44.88	56.00	-11.12	QP
1.0340	18.26	19.80	38.06	46.00	-7.94	AVG
2.6740	30.74	19.80	50.54	56.00	-5.46	QP
2.6740	19.47	19.80	39.27	46.00	-6.73	AVG
10.2500	32.75	20.21	52.96	60.00	-7.04	QP
10.2500	21.69	20.21	41.90	50.00	-8.10	AVG
29.0620	32.23	20.27	52.50	60.00	-7.50	QP
29.0620	20.27	20.27	40.54	50.00	-9.46	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

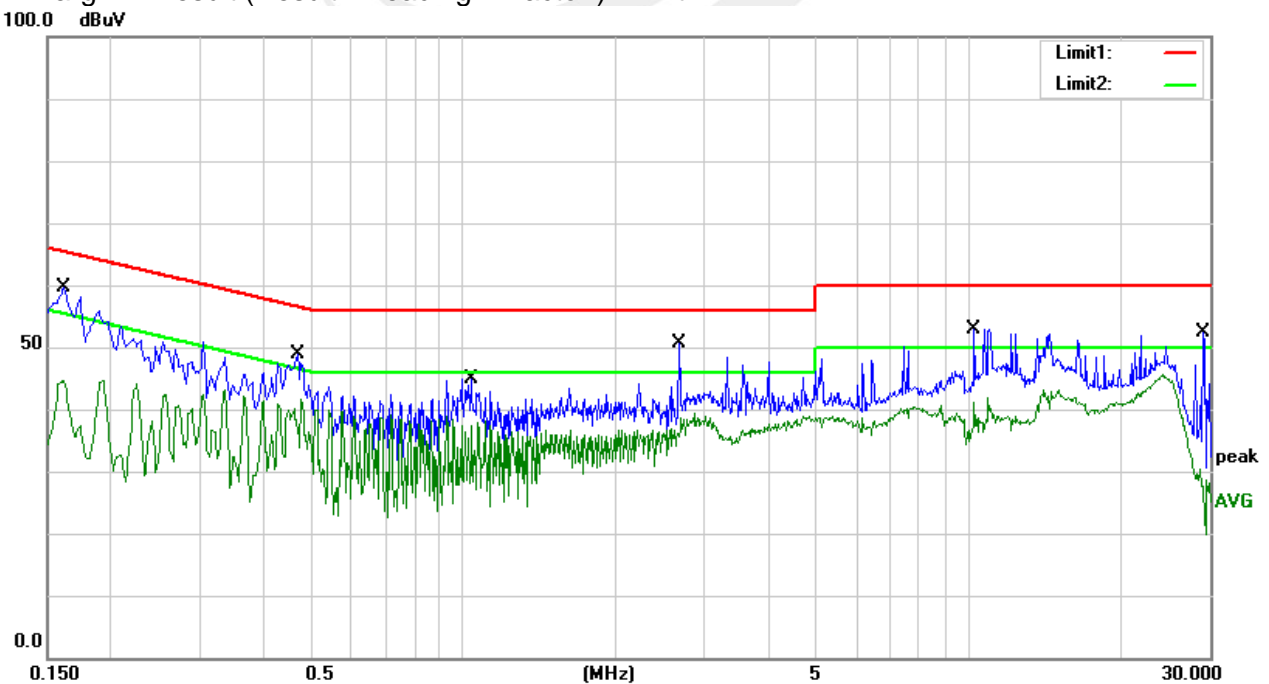




Temperature:	26.8°C	Relative Humidity:	66%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1620	39.90	19.79	59.69	65.36	-5.67	QP
0.1620	24.94	19.79	44.73	55.36	-10.63	AVG
0.4700	27.81	20.03	47.84	56.51	-8.67	QP
0.4700	20.82	20.03	40.85	46.51	-5.66	AVG
0.9900	24.96	19.80	44.76	56.00	-11.24	QP
0.9900	18.96	19.80	38.76	46.00	-7.24	AVG
2.6740	28.74	19.80	48.54	56.00	-7.46	QP
2.6740	17.97	19.80	37.77	46.00	-8.23	AVG
5.1300	27.74	19.85	47.59	60.00	-12.41	QP
5.1300	19.76	19.85	39.61	50.00	-10.39	AVG
11.0140	31.18	20.22	51.40	60.00	-8.60	QP
11.0140	21.72	20.22	41.94	50.00	-8.06	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBUV

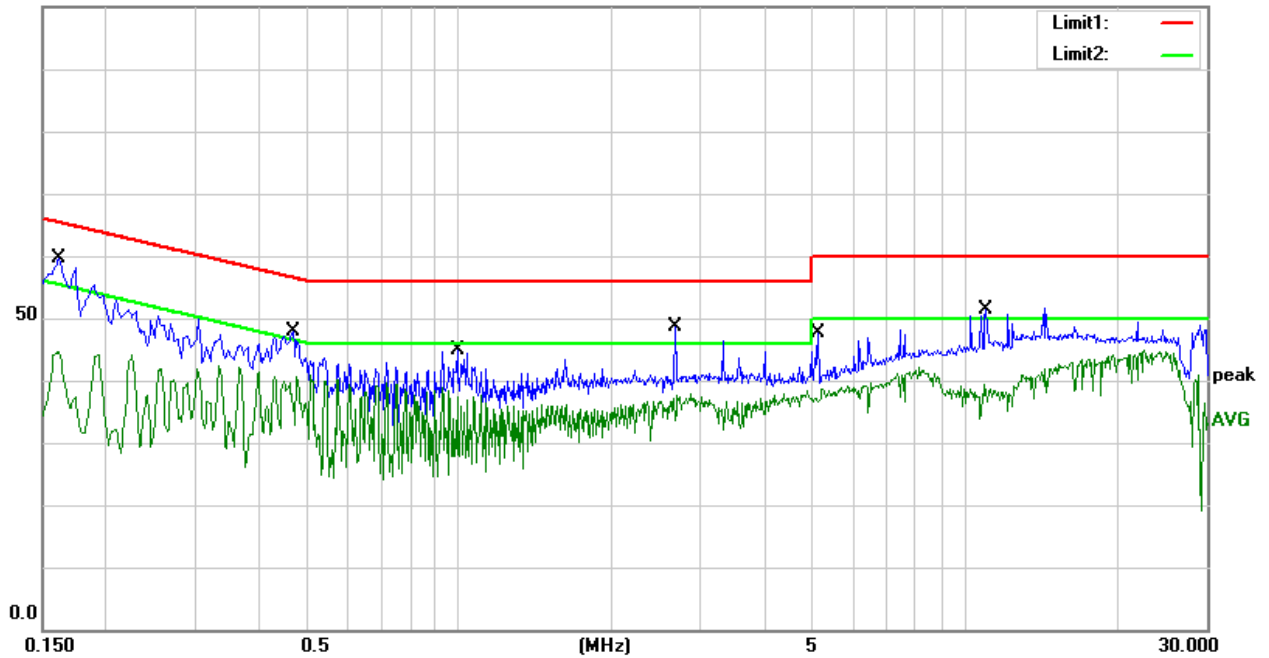



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

In case the emission fall within the restricted band specified on RSS-Gen Issue 4 limit in the followed

. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:

(a) If the equipment operates below 10 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

Particular attention should be paid to harmonics and sub-harmonics of the carrier frequency, as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

When limits are expressed in absolute terms, compliance with the emission limits below 1000 MHz shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limits can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.

Above 1000 MHz, compliance with the emission limits shall be demonstrated using an average detector with a minimum resolution bandwidth of 1 MHz.

In case the emission fall within the restricted band specified on RSS 210 Issue 9 (B.10) limit in the followed

1. The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

The field strength limits shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

2. Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

NOTE:

(1)The limit for radiated test was performed according to RSS 210 Issue 9

(2)Emission level (dBuV/m)=20log Emission level (uV/m).



Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

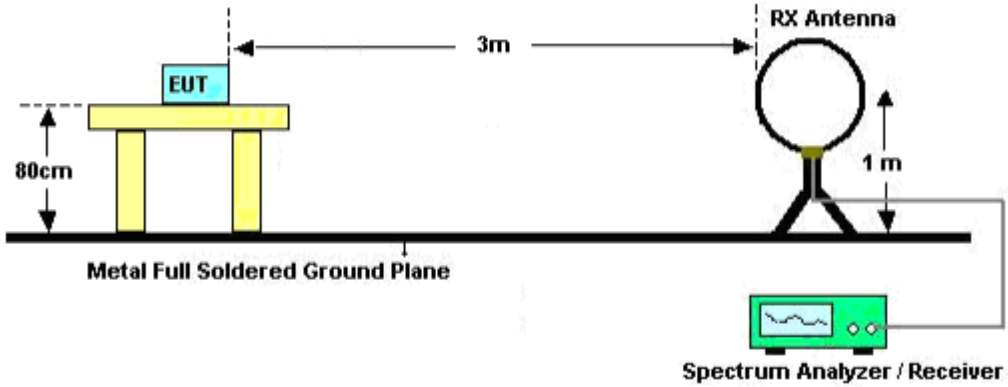

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

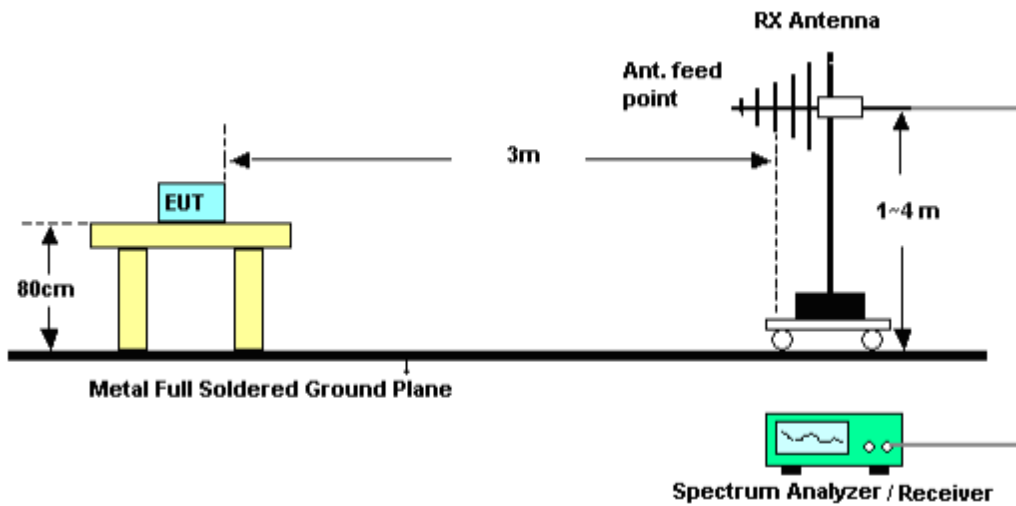

(C) Radiated Emission Test-Up Frequency Above 1GHz

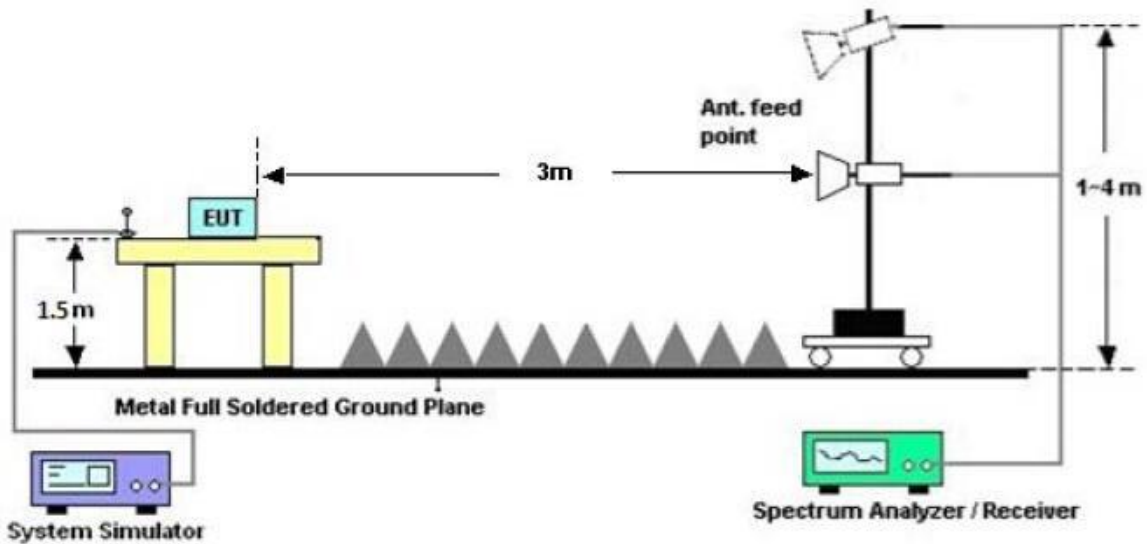



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	25.3 °C	Relative Humidity:	55%
Test Voltage:	DC 30V	Polarization:	---
Test Mode:	--		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	25.3 °C	Relative Humidity:	55%
Test Voltage:	DC 30V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.8260	41.09	-20.36	20.73	40.00	-19.27	QP
70.0903	40.89	-24.09	16.80	40.00	-23.20	QP
115.3205	34.25	-17.99	16.26	43.50	-27.24	QP
267.5455	48.19	-15.38	32.81	46.00	-13.19	QP
750.1083	29.44	-3.56	25.88	46.00	-20.12	QP
972.3374	28.29	-0.14	28.15	54.00	-25.85	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

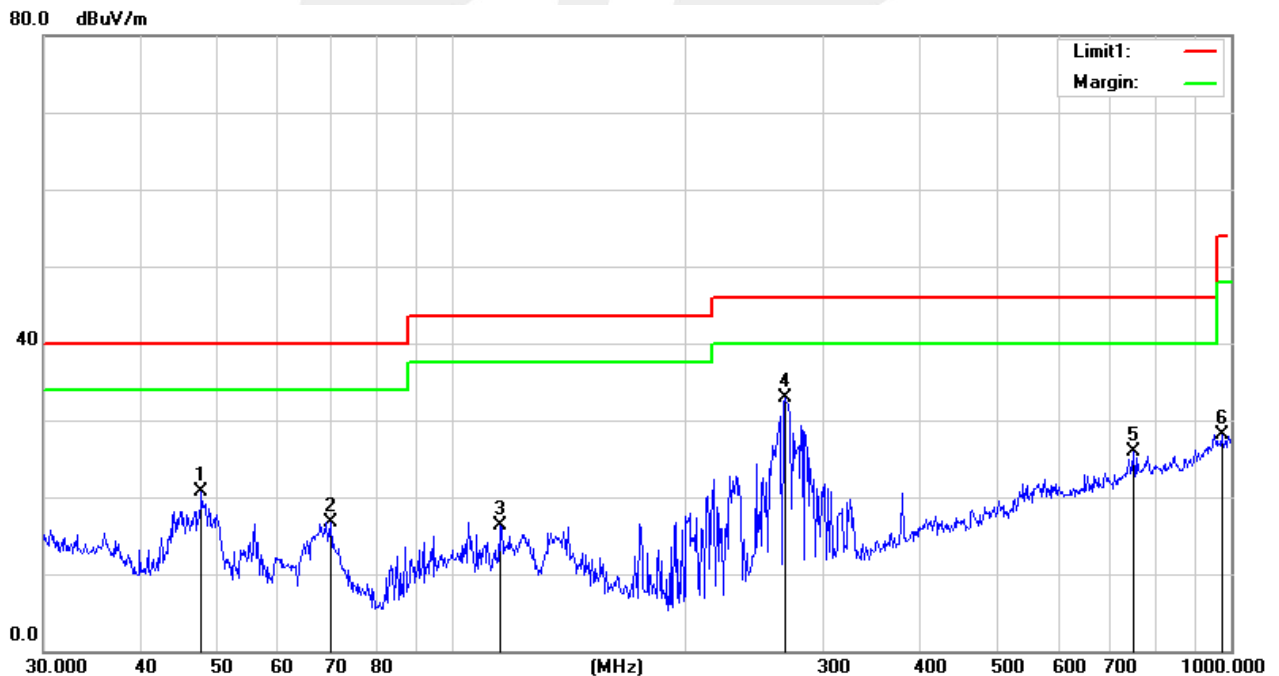




Temperature:	25.3 °C	Relative Humidity:	55%
Test Voltage:	DC 30V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
44.9006	43.54	-18.86	24.68	40.00	-15.32	QP
67.2022	41.10	-24.17	16.93	40.00	-23.07	QP
103.8055	40.36	-18.87	21.49	43.50	-22.01	QP
267.5455	41.65	-15.38	26.27	46.00	-19.73	QP
495.9344	37.09	-9.00	28.09	46.00	-17.91	QP
962.1623	28.46	-0.12	28.34	54.00	-25.66	QP

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result =Reading + Factor)–Limit

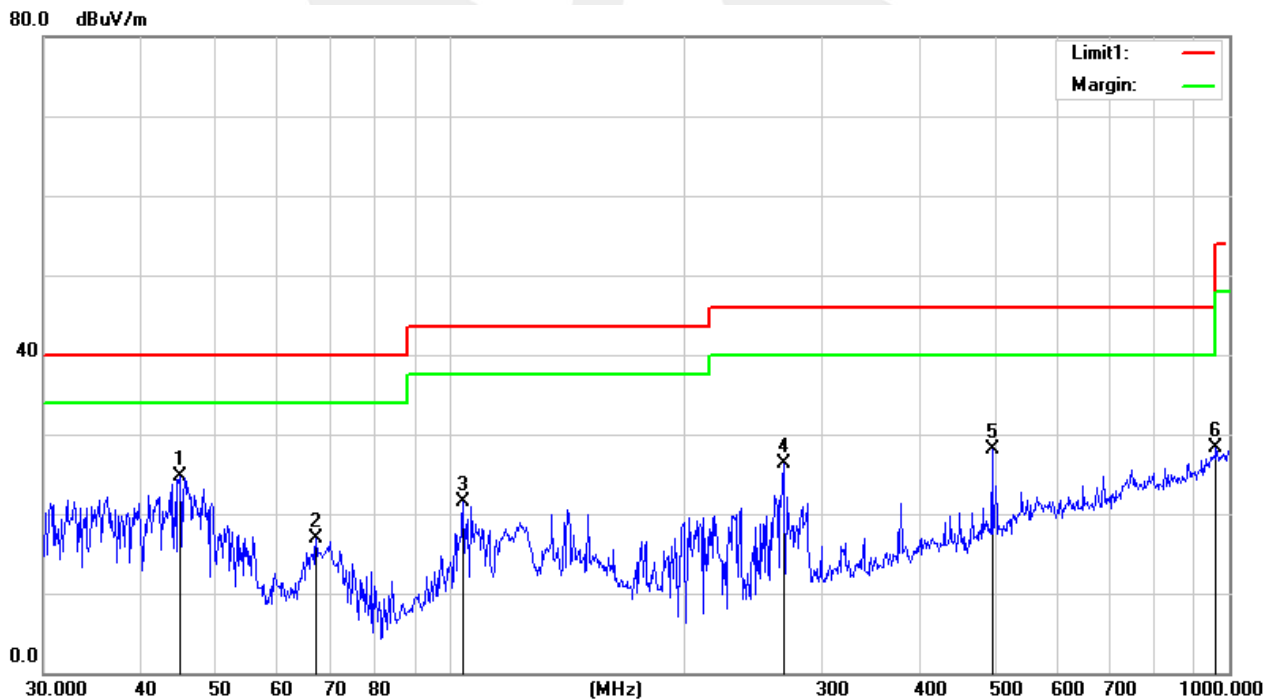



Fundamental frequency:

PK

Frequency (MHz)	Reading (dB μ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin(dB)	Polarization
	PEAK				Corr.	PEAK	PEAK	PEAK	
2403	99.840	44.40	6.03	27.60	-10.77	89.07	114	-24.93	Vertical
2403	97.581	44.40	6.03	27.60	-10.77	86.81	114	-27.19	Horizontal
2440	98.665	44.40	6.04	27.63	-10.73	87.94	114	-26.06	Vertical
2440	96.841	44.40	6.04	27.63	-10.73	86.11	114	-27.89	Horizontal
2480	99.648	44.40	6.06	27.66	-10.68	88.97	114	-25.03	Vertical
2480	97.364	44.40	6.06	27.66	-10.68	86.69	114	-27.31	Horizontal

AV

Frequency (MHz)	Reading (dB μ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin(dB)	Polarization
	AV				Corr.	AV	AV	AV	
2403	74.931	44.40	6.03	27.60	-10.77	64.16	94	-29.84	Vertical
2403	73.680	44.40	6.03	27.60	-10.77	62.91	94	-31.09	Horizontal
2440	67.177	44.40	6.04	27.63	-10.73	56.45	94	-37.55	Vertical
2440	66.060	44.40	6.04	27.63	-10.73	55.33	94	-38.67	Horizontal
2480	71.112	44.40	6.06	27.66	-10.68	60.44	94	-33.56	Vertical
2480	69.893	44.40	6.06	27.66	-10.68	59.22	94	-34.78	Horizontal

Note: RBW>20BW; VBW=3xRBW



Above 1G Radiation Spurious

Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2403 MHz)										
3264.89	48.08	44.70	6.70	28.20	-9.80	38.28	74.00	-35.72	PK	Vertical
3264.89	38.72	44.70	6.70	28.20	-9.80	28.92	54.00	-25.08	AV	Vertical
3264.85	49.21	44.70	6.70	28.20	-9.80	39.41	74.00	-34.59	PK	Horizontal
3264.85	38.54	44.70	6.70	28.20	-9.80	28.74	54.00	-25.26	AV	Horizontal
4880.49	58.50	44.20	9.04	31.60	-3.56	54.94	74.00	-19.06	PK	Vertical
4880.49	39.18	44.20	9.04	31.60	-3.56	35.62	54.00	-18.38	AV	Vertical
4880.47	58.94	44.20	9.04	31.60	-3.56	55.38	74.00	-18.62	PK	Horizontal
4880.47	38.36	44.20	9.04	31.60	-3.56	34.80	54.00	-19.20	AV	Horizontal
5359.62	45.20	44.20	9.86	32.00	-2.34	42.86	74.00	-31.14	PK	Vertical
5359.62	37.96	44.20	9.86	32.00	-2.34	35.62	54.00	-18.38	AV	Vertical
5359.72	46.09	44.20	9.86	32.00	-2.34	43.75	74.00	-30.25	PK	Horizontal
5359.72	37.75	44.20	9.86	32.00	-2.34	35.41	54.00	-18.59	AV	Horizontal
7320.70	51.60	43.50	11.40	35.50	3.40	55.00	74.00	-19.00	PK	Vertical
7320.70	33.13	43.50	11.40	35.50	3.40	36.53	54.00	-17.47	AV	Vertical
7320.72	50.53	43.50	11.40	35.50	3.40	53.93	74.00	-20.07	PK	Horizontal
7320.72	33.11	43.50	11.40	35.50	3.40	36.51	54.00	-17.49	AV	Horizontal



Frequency (MHz)	Reading (dB μ V)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Middle Channel (2440 MHz)										
3264.87	48.65	44.70	6.70	28.20	-9.80	38.85	74.00	-35.15	PK	Vertical
3264.87	39.39	44.70	6.70	28.20	-9.80	29.59	54.00	-24.41	AV	Vertical
3264.61	48.98	44.70	6.70	28.20	-9.80	39.18	74.00	-34.82	PK	Horizontal
3264.61	38.00	44.70	6.70	28.20	-9.80	28.20	54.00	-25.80	AV	Horizontal
4880.33	59.00	44.20	9.04	31.60	-3.56	55.44	74.00	-18.56	PK	Vertical
4880.33	39.59	44.20	9.04	31.60	-3.56	36.03	54.00	-17.97	AV	Vertical
4880.44	58.88	44.20	9.04	31.60	-3.56	55.32	74.00	-18.68	PK	Horizontal
4880.44	38.23	44.20	9.04	31.60	-3.56	34.67	54.00	-19.33	AV	Horizontal
5359.62	45.88	44.20	9.86	32.00	-2.34	43.54	74.00	-30.46	PK	Vertical
5359.62	38.13	44.20	9.86	32.00	-2.34	35.79	54.00	-18.21	AV	Vertical
5359.67	45.43	44.20	9.86	32.00	-2.34	43.09	74.00	-30.91	PK	Horizontal
5359.67	37.33	44.20	9.86	32.00	-2.34	34.99	54.00	-19.01	AV	Horizontal
7320.74	51.70	43.50	11.40	35.50	3.40	55.10	74.00	-18.90	PK	Vertical
7320.74	32.75	43.50	11.40	35.50	3.40	36.15	54.00	-17.85	AV	Vertical
7320.71	51.49	43.50	11.40	35.50	3.40	54.89	74.00	-19.11	PK	Horizontal
7320.71	33.26	43.50	11.40	35.50	3.40	36.66	54.00	-17.34	AV	Horizontal



Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
High Channel (2480 MHz)										
3264.77	48.25	44.70	6.70	28.20	-9.80	38.45	74.00	-35.55	PK	Vertical
3264.77	39.05	44.70	6.70	28.20	-9.80	29.25	54.00	-24.75	AV	Vertical
3264.58	48.84	44.70	6.70	28.20	-9.80	39.04	74.00	-34.96	PK	Horizontal
3264.58	38.01	44.70	6.70	28.20	-9.80	28.21	54.00	-25.79	AV	Horizontal
4960.32	59.16	44.20	9.04	31.60	-3.56	55.60	74.00	-18.40	PK	Vertical
4960.32	39.58	44.20	9.04	31.60	-3.56	36.02	54.00	-17.98	AV	Vertical
4960.53	58.29	44.20	9.04	31.60	-3.56	54.73	74.00	-19.27	PK	Horizontal
4960.53	39.20	44.20	9.04	31.60	-3.56	35.64	54.00	-18.36	AV	Horizontal
5359.61	45.98	44.20	9.86	32.00	-2.34	43.64	74.00	-30.36	PK	Vertical
5359.61	38.15	44.20	9.86	32.00	-2.34	35.81	54.00	-18.19	AV	Vertical
5359.72	46.28	44.20	9.86	32.00	-2.34	43.94	74.00	-30.06	PK	Horizontal
5359.72	38.00	44.20	9.86	32.00	-2.34	35.66	54.00	-18.34	AV	Horizontal
7439.87	51.91	43.50	11.40	35.50	3.40	55.31	74.00	-18.69	PK	Vertical
7439.87	32.61	43.50	11.40	35.50	3.40	36.01	54.00	-17.99	AV	Vertical
7439.70	50.98	43.50	11.40	35.50	3.40	54.38	74.00	-19.62	PK	Horizontal
7439.70	33.82	43.50	11.40	35.50	3.40	37.22	54.00	-16.78	AV	Horizontal

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are below the limit, the frequency emission is mainly from the environment noise.




(Radiation Band edge)

GFSK-Low
Horizontal

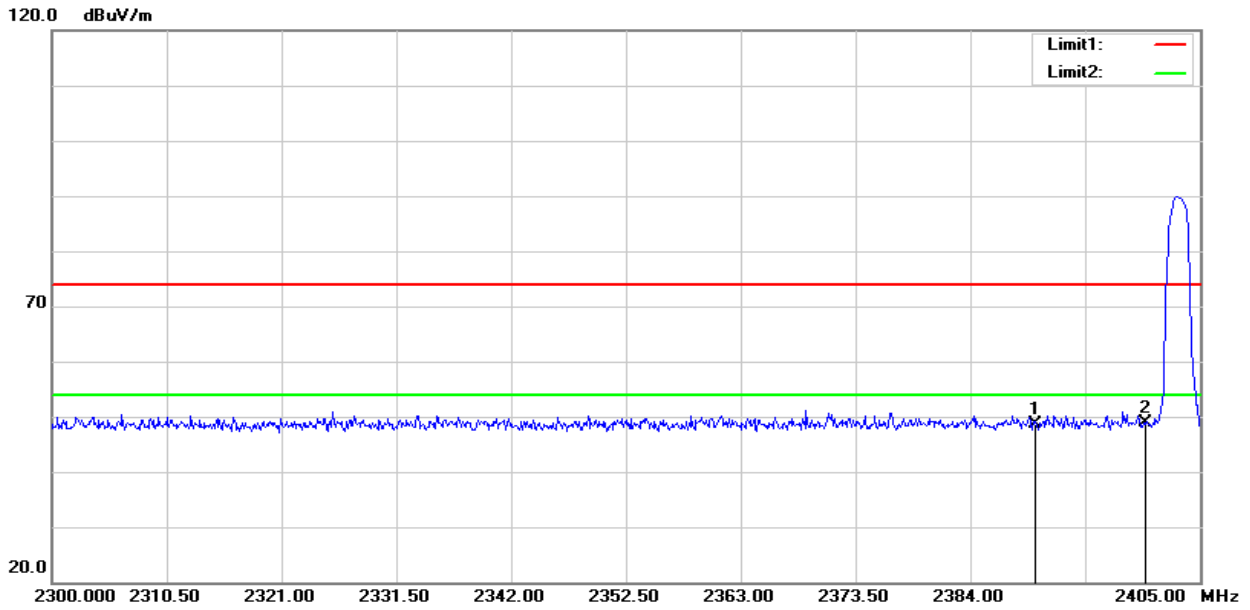

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	59.21	-10.48	48.73	74.00	-25.27	peak
2	2400.000	59.22	-10.41	48.81	74.00	-25.19	peak


Vertical

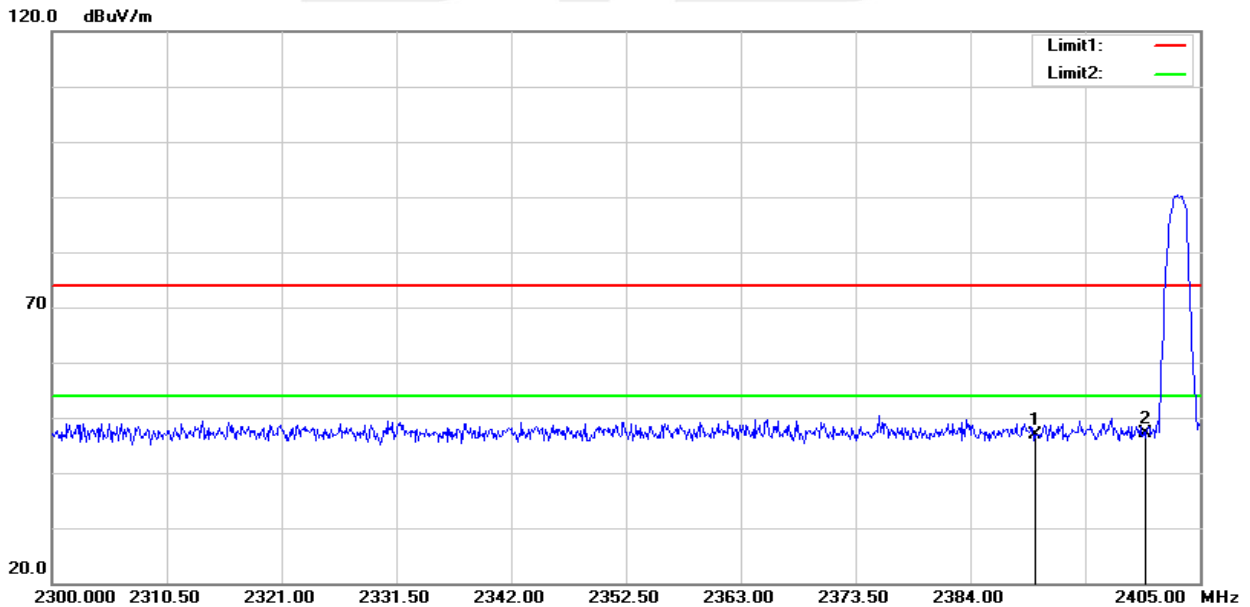

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	57.45	-10.48	46.97	74.00	-27.03	peak
2	2400.000	57.42	-10.41	47.01	74.00	-26.99	peak




GFSK-High
Horizontal

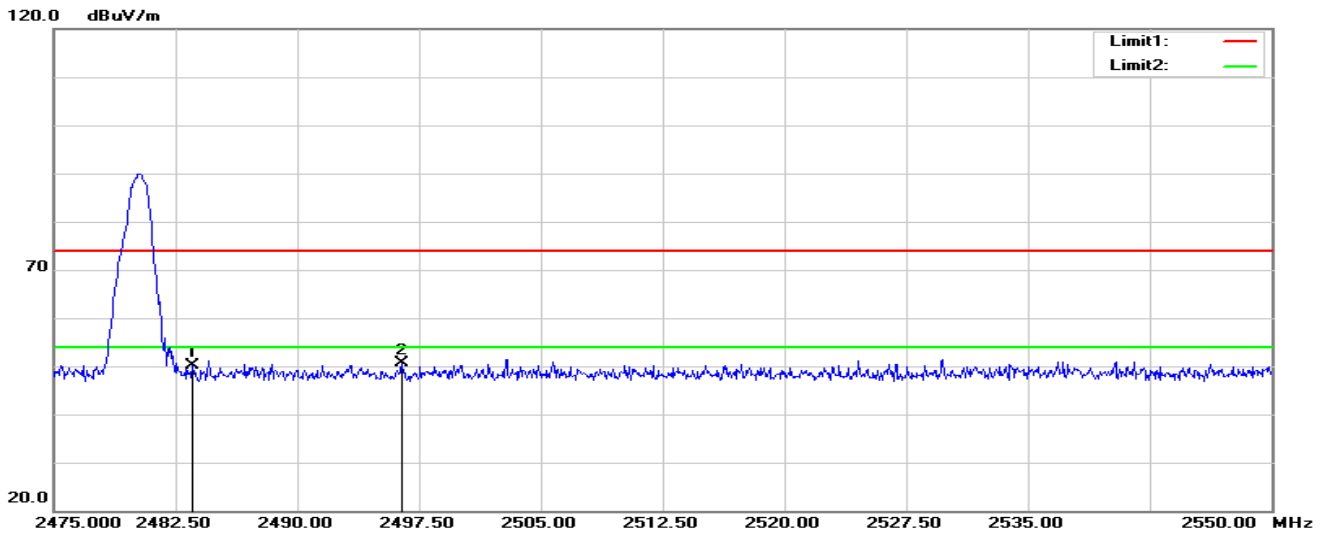

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.13	-9.99	50.14	74.00	-23.86	peak
2	2496.450	60.61	-9.93	50.68	74.00	-23.32	peak

Vertical

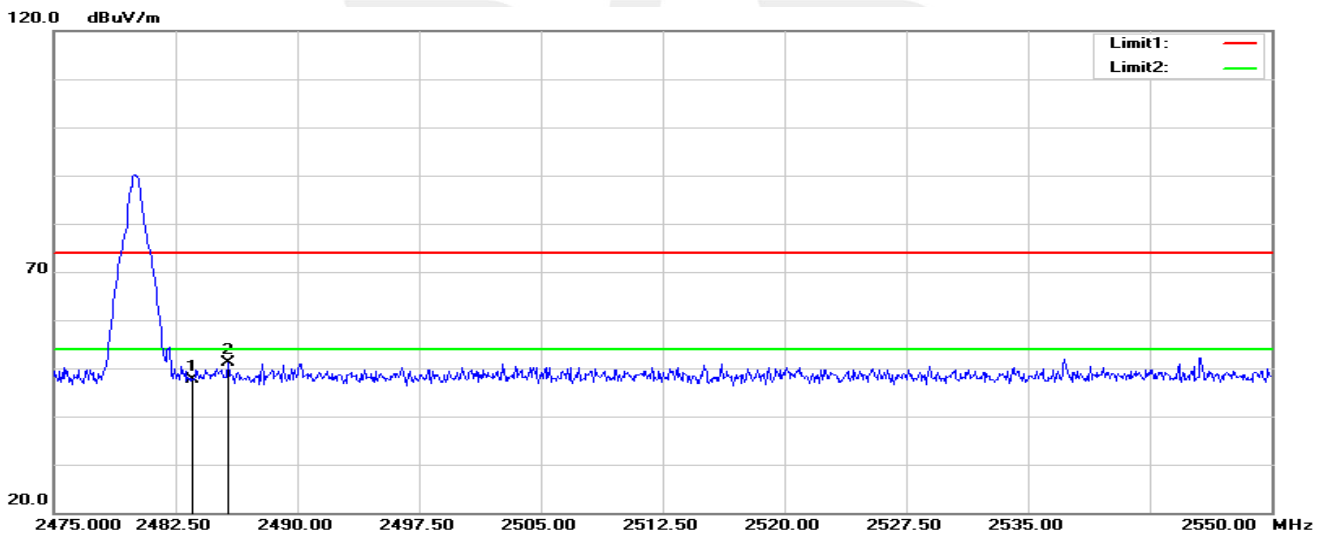

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.57	-9.99	47.58	74.00	-26.42	peak
2	2485.725	61.03	-9.98	51.05	74.00	-22.95	peak



4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 30KHz, VBW \geq RBW, Sweep time = Auto.

4.2 TEST SETUP



4.3 EUT OPERATION CONDITIONS

TX mode.






4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 30V		


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	2403	0.927	0.898
CH59	2440	0.938	0.869
CH78	2480	0.929	0.869

The Lowest Channel:2403MHz

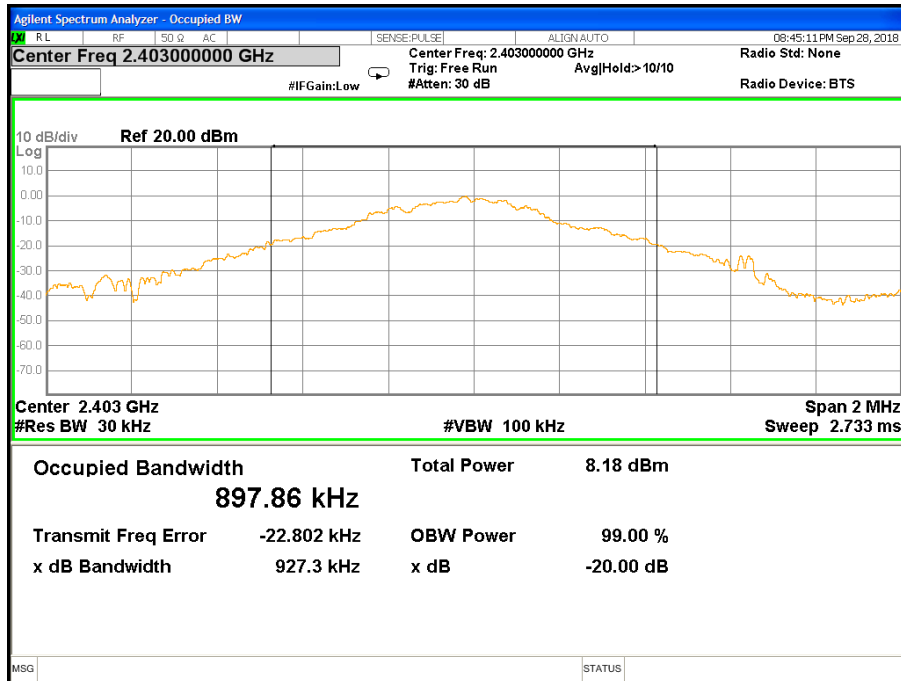




The Middle Channel:2440MHz

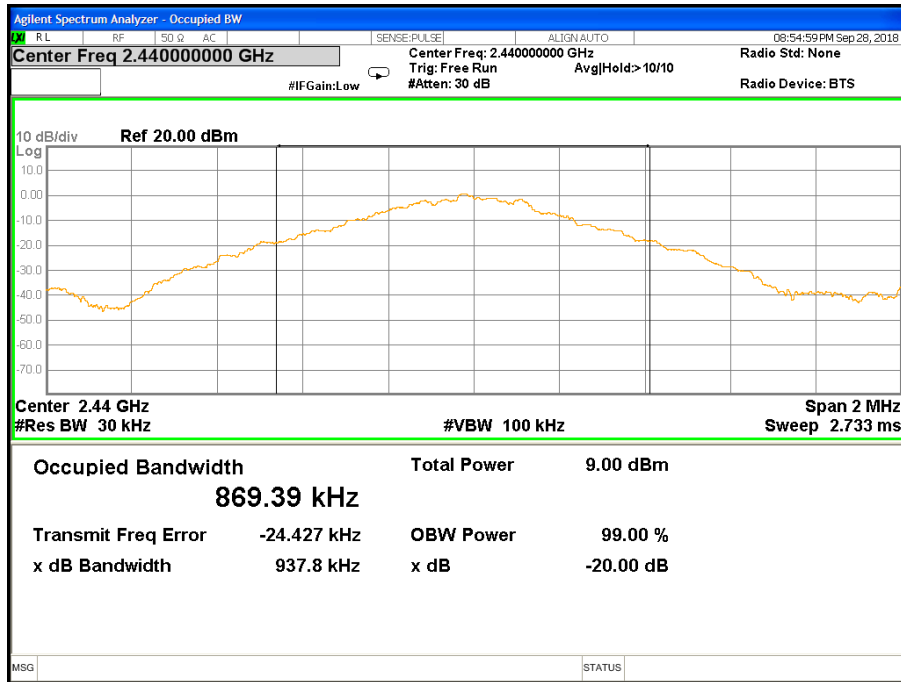

The High Channel: 2480MHz

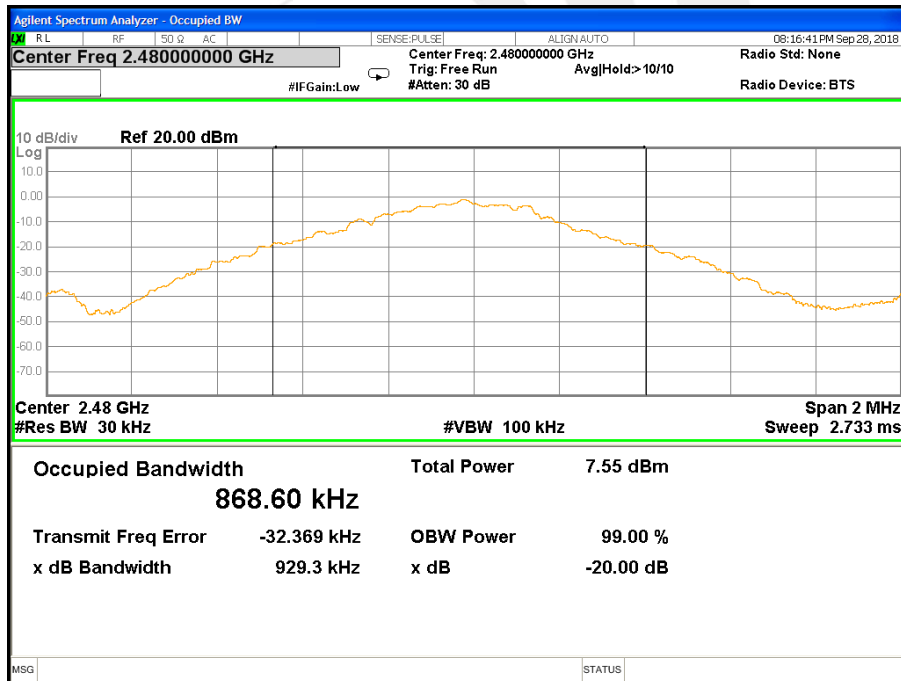



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203& RSS-Gen Issue 4, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is PCB Antenna.It conforms to the standard requirements.





APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****

