

S

T

S

L

A

B



## FCC TEST REPORT

Report No: STS1712387W02

Issued for

DewertOkin GmbH

Weststr. 1,32278 Kirchlingern, Germany

<b>Product Name:</b>	CU165
<b>Brand Name:</b>	N/A
<b>Model Name:</b>	A1125
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	O3YCUA1125
<b>Test Standard:</b>	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's name : DewertOkin GmbH
Address : Weststr. 1,32278 Kirchlengern, Germany
Manufacture's Name : DewertOkin GmbH
Address : Weststr. 1,32278 Kirchlengern, Germany

Product description

Product Name : CU165
Brand Name : N/A
Model Name : A1125
Series Model : N/A

Test Standards : FCC Part15.249
Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :
Date of performance of tests : 03 Jan. 2018 ~ 27 Feb. 2018
Date of Issue : 27 Feb. 2018
Test Result : Pass

Testing Engineer : [Signature]
( Chris chen )

Technical Manager : [Signature]
( Sean she )

Authorized Signatory : [Signature]
(Vita Li)





<b>Table of Contents</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
<b>3. EMC EMISSION TEST</b>	<b>12</b>
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 RADIATED EMISSION MEASUREMENT	16
<b>4. BANDWIDTH TEST</b>	<b>28</b>
4.2 TEST SETUP	28
4.3 EUT OPERATION CONDITIONS	28
4.4 TEST RESULTS	29
<b>5. ANTENNA REQUIREMENT</b>	<b>31</b>
5.1 STANDARD REQUIREMENT	31
5.2 EUT ANTENNA	31
<b>APPENDIX- PHOTOS OF TEST SETUP</b>	<b>32</b>



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	27 Feb. 2018	STS1712387W02	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.205	Radiated Band Edge Emission	Pass	
15.249	20dB Bandwidth	Pass	

### NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013



### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88$ dB
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67$ dB
3	RF power,conducted	$\pm 0.71$ dB
4	Spurious emissions,conducted	$\pm 0.63$ dB
5	All emissions,radiated (9KHz-30MHz)	$\pm 3.02$ dB
6	All emissions,radiated (30MHz-200MHz)	$\pm 3.80$ dB
7	All emissions,radiated (200MHz-1000MHz)	$\pm 3.97$ dB



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name	CU165								
Trade Name	N/A								
Model Name	A1125								
Series Model	N/A								
Model Difference	N/A								
Product Description	<p>The EUT is a CU165</p> <table border="1"><tr><td>Operation Frequency:</td><td>2403-2480MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Antenna Designation:</td><td>PCB Antenna</td></tr><tr><td>Antenna Gain(Peak):</td><td>2.3 dBi</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2403-2480MHz	Modulation Type:	GFSK	Antenna Designation:	PCB Antenna	Antenna Gain(Peak):	2.3 dBi
Operation Frequency:	2403-2480MHz								
Modulation Type:	GFSK								
Antenna Designation:	PCB Antenna								
Antenna Gain(Peak):	2.3 dBi								
Power Supply	DC 29V, Max 4A, 60W								
Hardware version number	V1.2								
Software version number	R3								

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	A1125	PCB	NA	2.3	Antenna



## 2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions  
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	GFSK
Mode 2	TX CH02	GFSK
Mode 3	TX CH03	GFSK

Note:

- (1) All above mode have been measurement, only worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report

For AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 4 : Keeping TX



### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

#### Radiated Spurious Emission Test

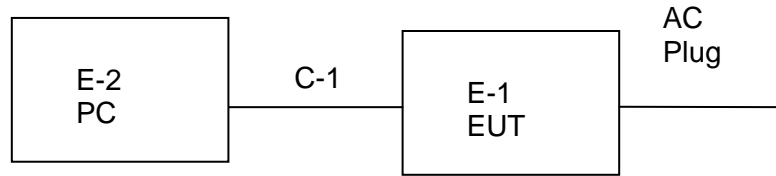

#### Conducted Emission Test





## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	PC	DELL	VOSTRO.3800	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable shielded line	NO	100cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESW	101535	2017.06.01	2018.05.31
Bilog Antenna	TESEQ	CBL6111D	34678	2017.03.24	2018.03.23
Horn Antenna	Schwarzbeck	BBHA 9120D (1201)	9120D-1343	2017.03.06	2018.03.05
Operational Manual Passive Loop (9K--30MHz)	ETS	6512	00165355	2017.03.06	2018.03.05
Pre-mpifier (0.1M-3GHz)	EM	EM330	60538	2017.03.12	2018.03.11
PreAmplifier	Agilent	8449B	60538	2017.10.15	2018.10.14
USB RF power sensor	DARE	RPR3006W	15I00041SNO0 3	2017.10.15	2018.10.14
Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2018.10.14

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
conduction Cable	EM	C01	N/A	2017.03.12	2018.03.11
Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2018.10.14

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

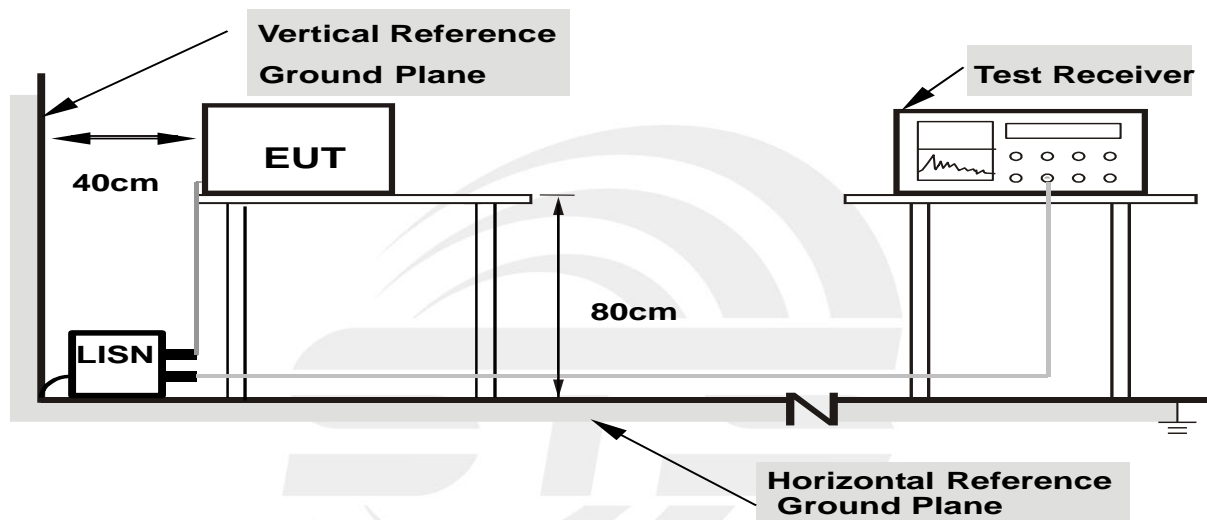

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULTS


Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1620	42.05	9.79	51.84	65.36	-13.52	QP
0.1620	10.16	9.79	19.95	55.36	-35.41	AVG
0.2060	37.92	9.81	47.73	63.37	-15.64	QP
0.2060	7.82	9.81	17.63	53.37	-35.74	AVG
0.3460	35.21	10.13	45.34	59.06	-13.72	QP
0.3460	5.32	10.13	15.45	49.06	-33.61	AVG
0.5700	32.31	9.96	42.27	56.00	-13.73	QP
0.5700	2.63	9.96	12.59	46.00	-33.41	AVG
0.7340	31.23	9.83	41.06	56.00	-14.94	QP
0.7340	-2.57	9.83	7.26	46.00	-38.74	AVG
5.3260	17.49	9.85	27.34	60.00	-32.66	QP
5.3260	-0.44	9.85	9.41	50.00	-40.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

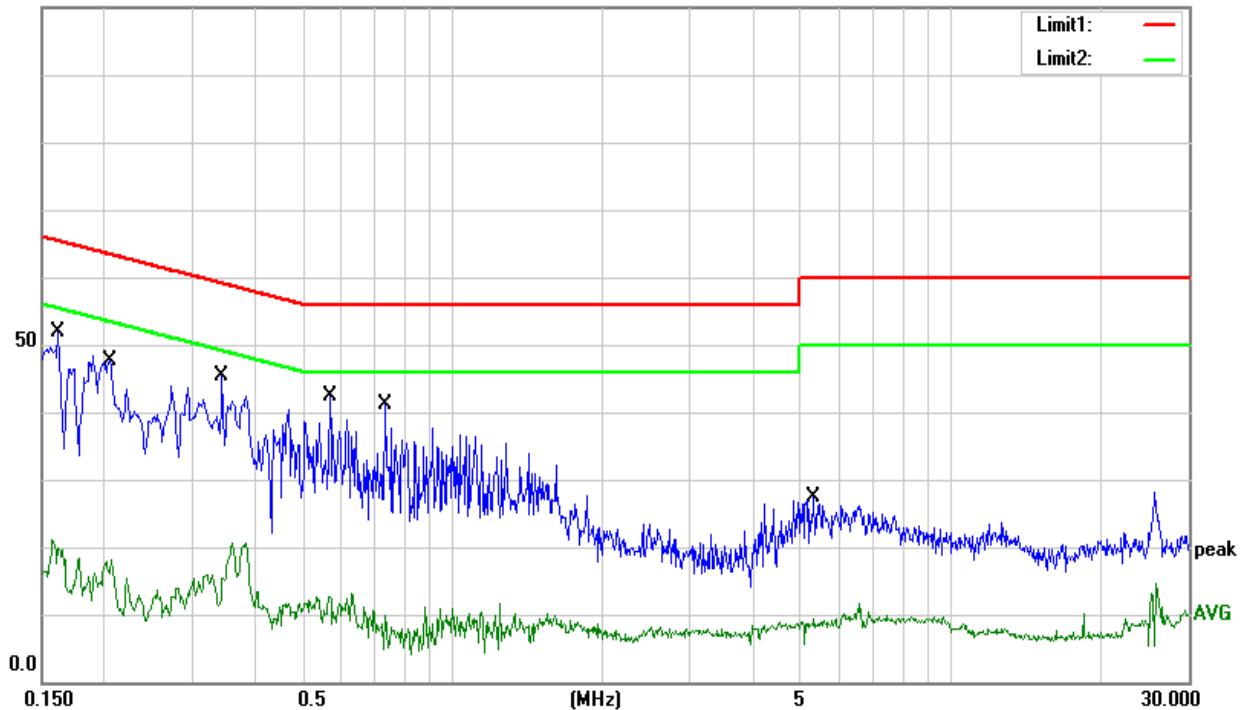




Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	42.52	9.75	52.27	66.00	-13.73	QP
0.1500	10.13	9.75	19.88	56.00	-36.12	AVG
0.1820	43.02	9.83	52.85	64.39	-11.54	QP
0.1820	7.20	9.83	17.03	54.39	-37.36	AVG
0.2180	40.22	9.94	50.16	62.89	-12.73	QP
0.2180	6.52	9.94	16.46	52.89	-36.43	AVG
0.3500	33.20	10.16	43.36	58.96	-15.60	QP
0.3500	5.22	10.16	15.38	48.96	-33.58	AVG
0.5180	28.08	9.97	38.05	56.00	-17.95	QP
0.5180	1.17	9.97	11.14	46.00	-34.86	AVG
1.1300	24.23	9.81	34.04	56.00	-21.96	QP
1.1300	-3.43	9.81	6.38	46.00	-39.62	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBuV

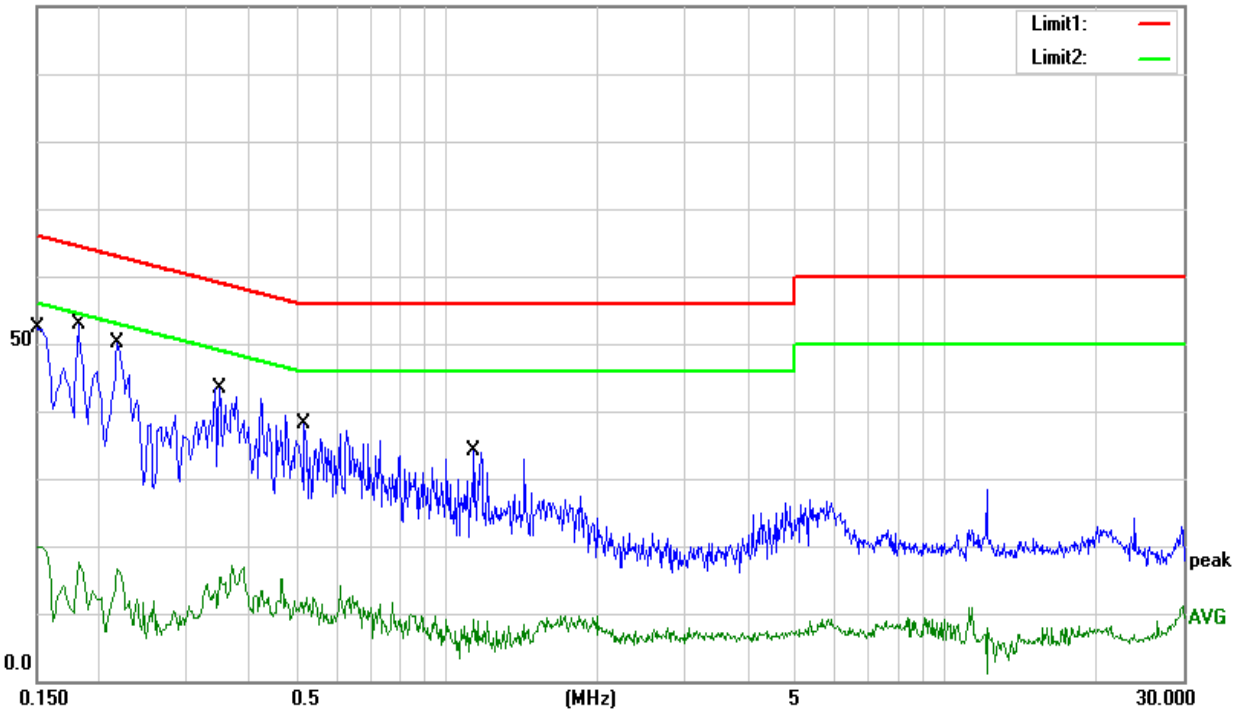



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of arotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- b. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)
- 9. For the actual test configuration, please refer to the related Item –EUT Test Photos.  
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

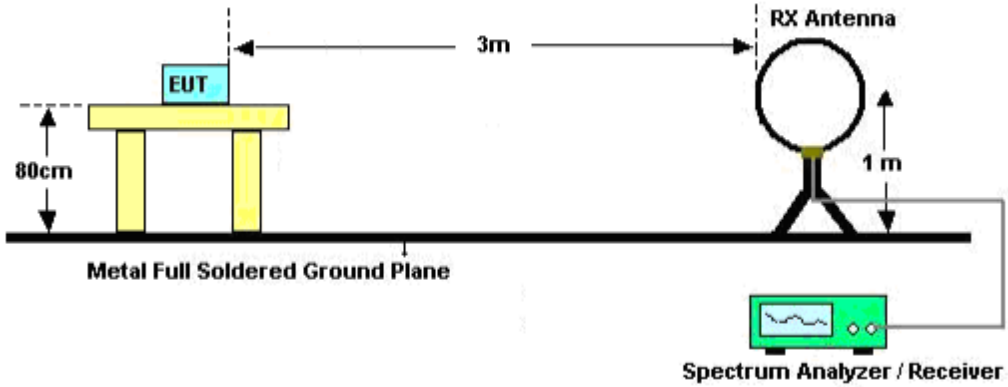

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

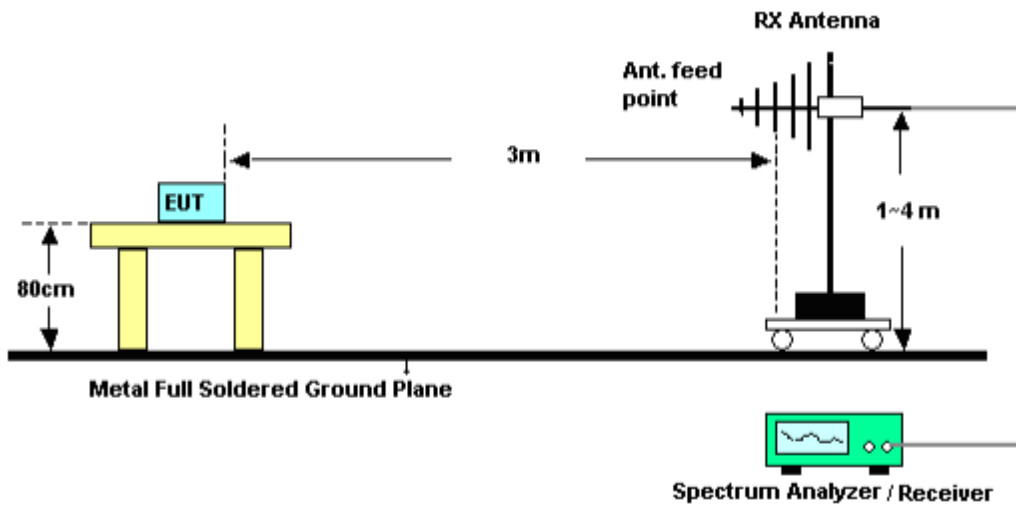

(C) Radiated Emission Test-Up Frequency Above 1GHz

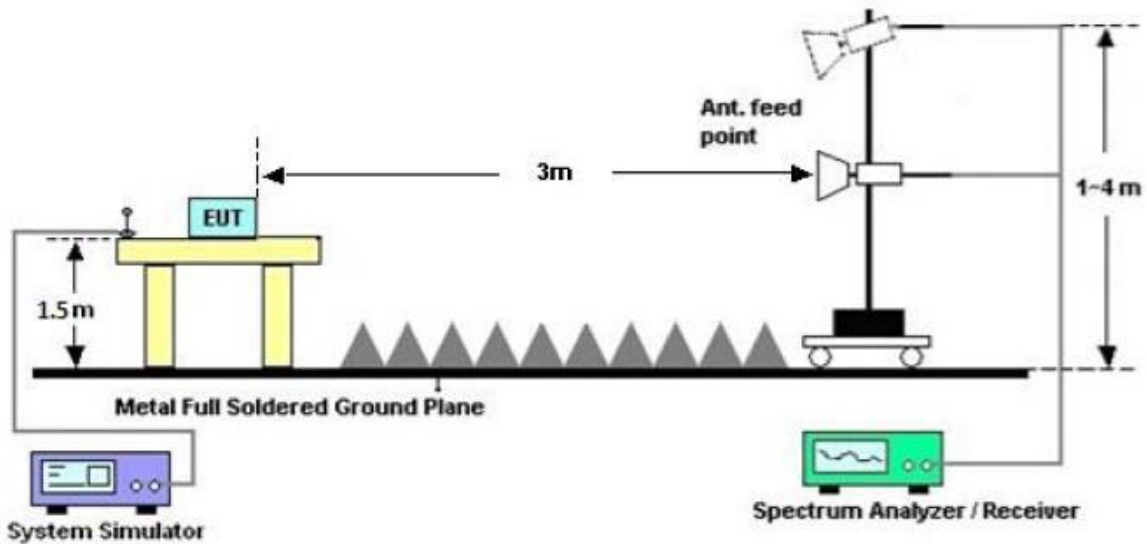



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





### 3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	DC 29V	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	24.6 °C	Relative Humidity:	58%
Test Voltage:	DC 29V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
88.3421	38.60	-20.62	17.98	43.50	-25.52	QP
106.7587	39.95	-18.61	21.34	43.50	-22.16	QP
252.9482	40.14	-15.95	24.19	46.00	-21.81	QP
572.6144	32.12	-6.65	25.47	46.00	-20.53	QP
709.1823	35.50	-5.02	30.48	46.00	-15.52	QP
909.6666	33.20	-1.93	31.27	46.00	-14.73	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor )–Limit

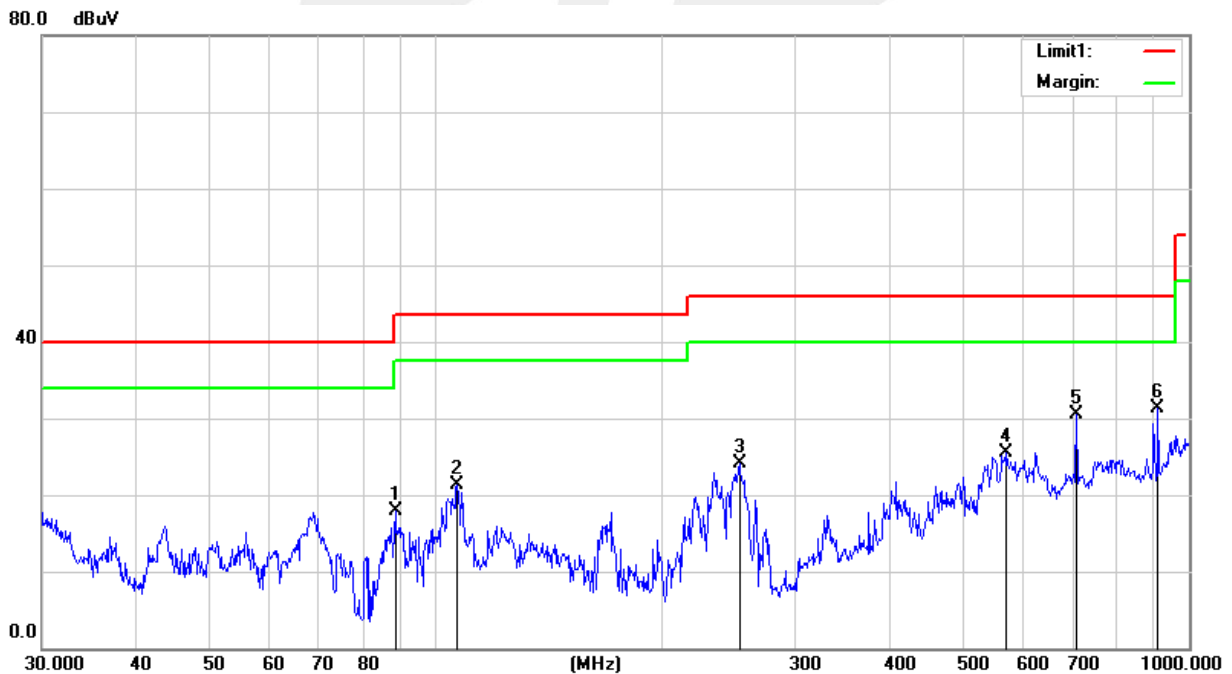




Temperature:	24.6 °C	Relative Humidity:	58%
Test Voltage:	DC 29V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
37.2854	37.88	-14.93	22.95	40.00	-17.05	QP
94.4282	42.06	-19.75	22.31	43.50	-21.19	QP
150.0107	39.73	-17.97	21.76	43.50	-21.74	QP
265.6757	36.48	-15.29	21.19	46.00	-24.81	QP
533.8320	35.48	-7.58	27.90	46.00	-18.10	QP
896.9963	31.04	-2.30	28.74	46.00	-17.26	QP

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result =Reading + Factor )–Limit

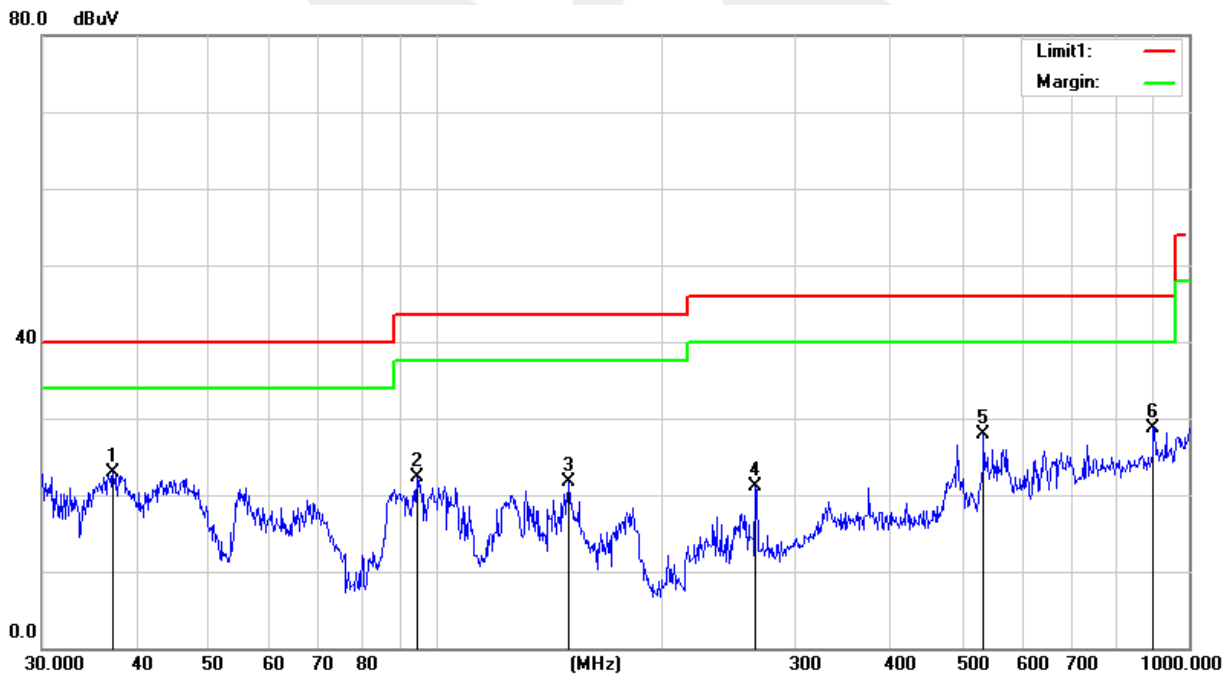



Fundamental frequency:

PK

Frequency (MHz)	Reading (dB $\mu$ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin(dB)	Polarization
	PEAK				Corr.	PEAK	PEAK	PEAK	
2403	95.863	44.40	6.03	27.60	-10.77	85.10	114	-28.90	Vertical
2403	93.429	44.40	6.03	27.60	-10.77	82.66	114	-31.34	Horizontal
2440	87.438	44.40	6.04	27.63	-10.73	76.71	114	-37.29	Vertical
2440	85.153	44.40	6.04	27.63	-10.73	74.43	114	-39.57	Horizontal
2480	91.531	44.40	6.06	27.66	-10.68	80.85	114	-33.15	Vertical
2480	89.347	44.40	6.06	27.66	-10.68	78.67	114	-35.33	Horizontal

AV

Frequency (MHz)	Reading (dB $\mu$ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin(dB)	Polarization
	AV				Corr.	AV	PEAK	PEAK	
2403	75.225	44.40	6.03	27.60	-10.77	64.46	94	-29.54	Vertical
2403	74.732	44.40	6.03	27.60	-10.77	63.97	94	-30.03	Horizontal
2440	67.915	44.40	6.04	27.63	-10.73	57.19	94	-36.81	Vertical
2440	65.254	44.40	6.04	27.63	-10.73	54.53	94	-39.47	Horizontal
2480	71.791	44.40	6.06	27.66	-10.68	61.11	94	-32.89	Vertical
2480	69.226	44.40	6.06	27.66	-10.68	58.55	94	-35.45	Horizontal

Note: RBW>20BW; VBW=3xRBW



Above 1G Radiation Spurious

Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2403 MHz)										
3264.82	48.80	44.70	6.70	28.20	-9.80	39.00	74.00	-35.00	PK	Vertical
3264.82	38.94	44.70	6.70	28.20	-9.80	29.14	54.00	-24.86	AV	Vertical
3264.63	48.03	44.70	6.70	28.20	-9.80	38.23	74.00	-35.77	PK	Horizontal
3264.63	38.07	44.70	6.70	28.20	-9.80	28.27	54.00	-25.73	AV	Horizontal
4806.52	58.17	44.20	9.04	31.60	-3.56	54.61	74.00	-19.39	PK	Vertical
4806.52	39.58	44.20	9.04	31.60	-3.56	36.02	54.00	-17.98	AV	Vertical
4806.46	58.85	44.20	9.04	31.60	-3.56	55.29	74.00	-18.71	PK	Horizontal
4806.46	38.34	44.20	9.04	31.60	-3.56	34.78	54.00	-19.22	AV	Horizontal
5359.63	45.16	44.20	9.86	32.00	-2.34	42.82	74.00	-31.18	PK	Vertical
5359.63	38.00	44.20	9.86	32.00	-2.34	35.66	54.00	-18.34	AV	Vertical
5359.63	46.23	44.20	9.86	32.00	-2.34	43.89	74.00	-30.11	PK	Horizontal
5359.63	37.29	44.20	9.86	32.00	-2.34	34.95	54.00	-19.05	AV	Horizontal
7209.76	51.64	43.50	11.40	35.50	3.40	55.04	74.00	-18.96	PK	Vertical
7209.76	33.26	43.50	11.40	35.50	3.40	36.66	54.00	-17.34	AV	Vertical
7209.84	50.98	43.50	11.40	35.50	3.40	54.38	74.00	-19.62	PK	Horizontal
7209.84	32.56	43.50	11.40	35.50	3.40	35.96	54.00	-18.04	AV	Horizontal





Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Middle Channel (2440 MHz)										
3264.70	48.17	44.70	6.70	28.20	-9.80	38.37	74.00	-35.63	PK	Vertical
3264.70	39.07	44.70	6.70	28.20	-9.80	29.27	54.00	-24.73	AV	Vertical
3264.64	48.40	44.70	6.70	28.20	-9.80	38.60	74.00	-35.40	PK	Horizontal
3264.64	38.80	44.70	6.70	28.20	-9.80	29.00	54.00	-25.00	AV	Horizontal
4880.46	59.00	44.20	9.04	31.60	-3.56	55.44	74.00	-18.56	PK	Vertical
4880.46	39.33	44.20	9.04	31.60	-3.56	35.77	54.00	-18.23	AV	Vertical
4880.41	58.36	44.20	9.04	31.60	-3.56	54.80	74.00	-19.20	PK	Horizontal
4880.41	38.57	44.20	9.04	31.60	-3.56	35.01	54.00	-18.99	AV	Horizontal
5359.81	45.23	44.20	9.86	32.00	-2.34	42.89	74.00	-31.11	PK	Vertical
5359.81	37.61	44.20	9.86	32.00	-2.34	35.27	54.00	-18.73	AV	Vertical
5359.71	45.68	44.20	9.86	32.00	-2.34	43.34	74.00	-30.66	PK	Horizontal
5359.71	38.06	44.20	9.86	32.00	-2.34	35.72	54.00	-18.28	AV	Horizontal
7320.77	51.51	43.50	11.40	35.50	3.40	54.91	74.00	-19.09	PK	Vertical
7320.77	33.24	43.50	11.40	35.50	3.40	36.64	54.00	-17.36	AV	Vertical
7320.78	51.50	43.50	11.40	35.50	3.40	54.90	74.00	-19.10	PK	Horizontal
7320.78	32.66	43.50	11.40	35.50	3.40	36.06	54.00	-17.94	AV	Horizontal



Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
High Channel (2480 MHz)										
3264.76	48.98	44.70	6.70	28.20	-9.80	39.18	74.00	-34.82	PK	Vertical
3264.76	38.47	44.70	6.70	28.20	-9.80	28.67	54.00	-25.33	AV	Vertical
3264.81	48.98	44.70	6.70	28.20	-9.80	39.18	74.00	-34.82	PK	Horizontal
3264.81	38.92	44.70	6.70	28.20	-9.80	29.12	54.00	-24.88	AV	Horizontal
4960.39	58.43	44.20	9.04	31.60	-3.56	54.87	74.00	-19.13	PK	Vertical
4960.39	39.44	44.20	9.04	31.60	-3.56	35.88	54.00	-18.12	AV	Vertical
4960.40	58.67	44.20	9.04	31.60	-3.56	55.11	74.00	-18.89	PK	Horizontal
4960.40	38.64	44.20	9.04	31.60	-3.56	35.08	54.00	-18.92	AV	Horizontal
5359.69	45.95	44.20	9.86	32.00	-2.34	43.61	74.00	-30.39	PK	Vertical
5359.69	37.82	44.20	9.86	32.00	-2.34	35.48	54.00	-18.52	AV	Vertical
5359.67	45.57	44.20	9.86	32.00	-2.34	43.23	74.00	-30.77	PK	Horizontal
5359.67	37.88	44.20	9.86	32.00	-2.34	35.54	54.00	-18.46	AV	Horizontal
7440.83	51.78	43.50	11.40	35.50	3.40	55.18	74.00	-18.82	PK	Vertical
7440.83	33.24	43.50	11.40	35.50	3.40	36.64	54.00	-17.36	AV	Vertical
7440.82	51.46	43.50	11.40	35.50	3.40	54.86	74.00	-19.14	PK	Horizontal
7440.82	32.99	43.50	11.40	35.50	3.40	36.39	54.00	-17.61	AV	Horizontal

## Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are below the limit,  
the frequency emission is mainly from the environment noise.



(Radiation Band edge)

Frequency (MHz)	Reading (dB $\mu$ V)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
GFSK										
2400.00	67.62	43.80	4.91	25.90	-12.99	54.63	74	-19.37	PK	Vertical
2400.00	53.21	43.80	4.91	25.90	-12.99	40.22	54	-13.78	AV	Vertical
2400.00	68.97	43.80	4.91	25.90	-12.99	55.98	74	-18.02	PK	Horizontal
2400.00	52.67	43.80	4.91	25.90	-12.99	39.68	54	-14.32	AV	Horizontal
2483.50	69.91	43.80	5.12	25.90	-12.78	57.13	74	-16.87	PK	Vertical
2483.50	53.09	43.80	5.12	25.90	-12.78	40.31	54	-13.69	AV	Vertical
2483.50	70.22	43.80	5.12	25.90	-12.78	57.44	74	-16.56	PK	Horizontal
2483.50	52.83	43.80	5.12	25.90	-12.78	40.05	54	-13.95	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.

## 4. BANDWIDTH TEST

### 4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 30KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 4.2 TEST SETUP



### 4.3 EUT OPERATION CONDITIONS

TX mode.






4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 29 V		


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	2403	1.131	1.042
CH02	2440	0.986	1.001
CH03	2480	0.902	0.902

The Lowest Channel:2403MHz

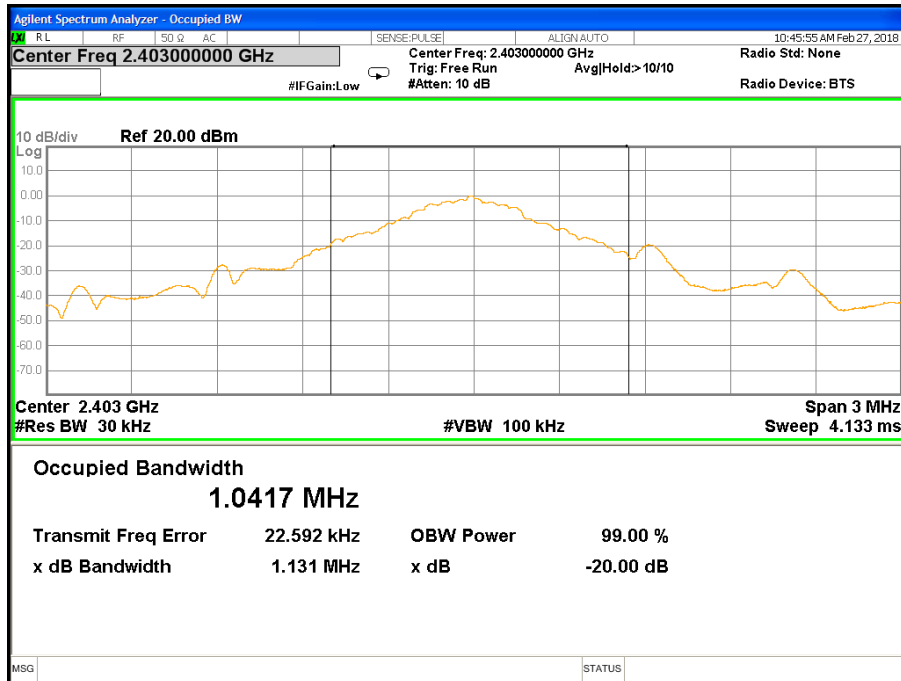




### The Middle Channel:2440MHz

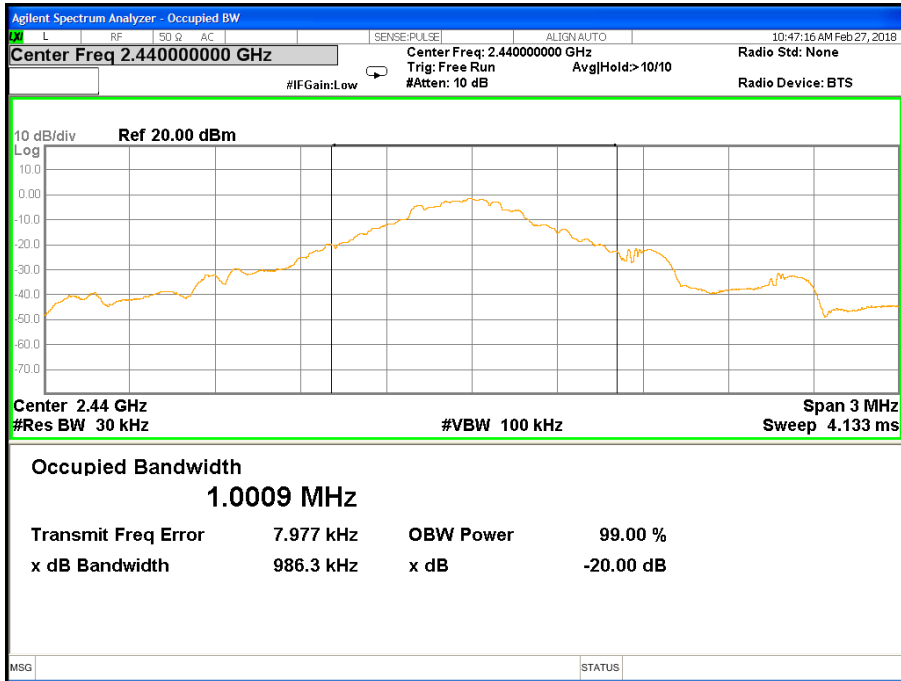

### The High Channel: 2480MHz

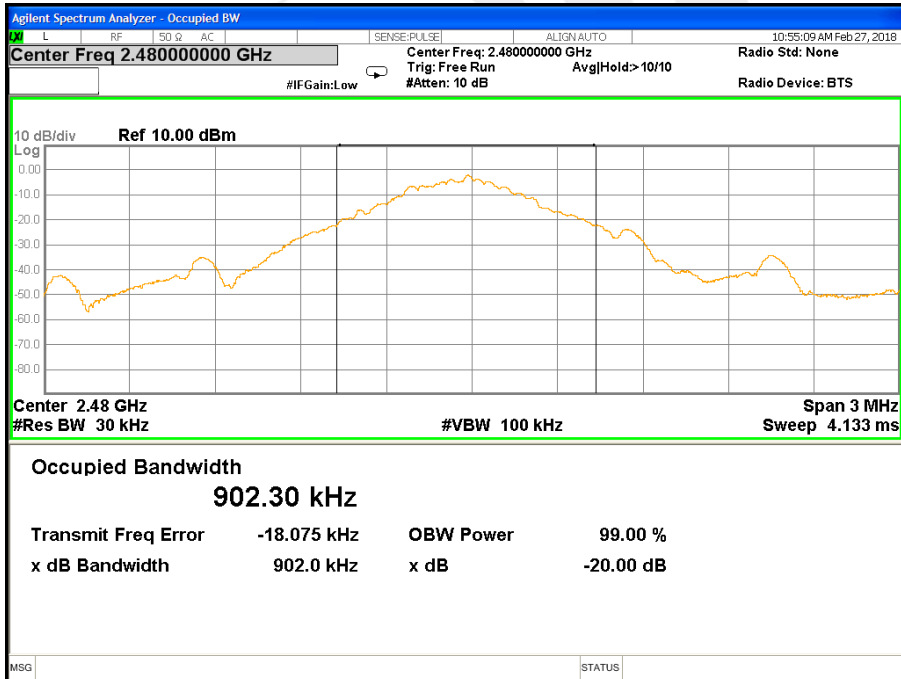



## 5. ANTENNA REQUIREMENT

### 5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



### 5.2 EUT ANTENNA

The EUT antenna is Internal PCB Antenna. It conforms to the standard requirements.



## APPENDIX- PHOTOS OF TEST SETUP

### Radiated Measurement Photos

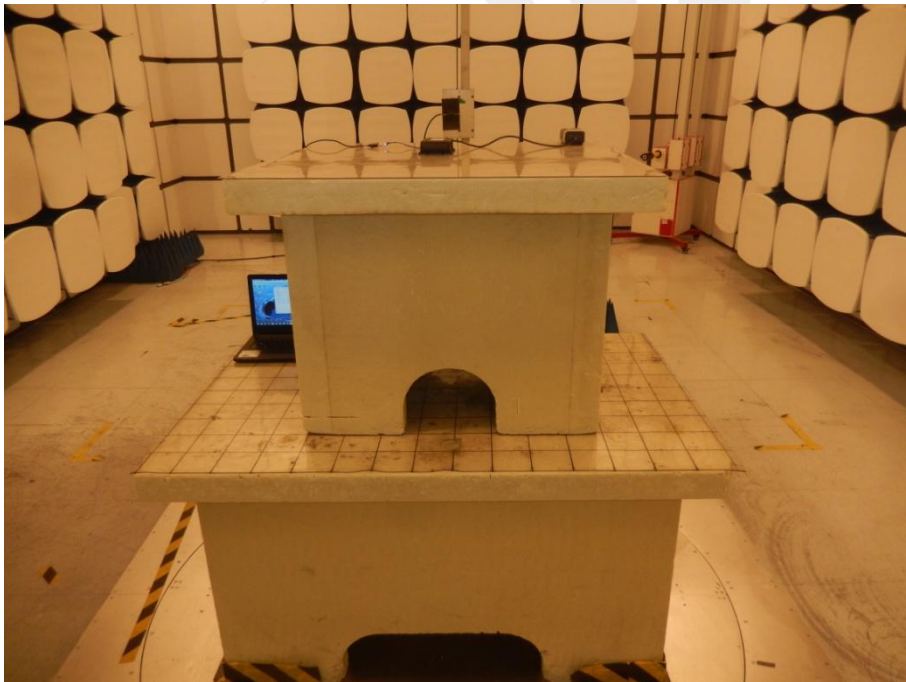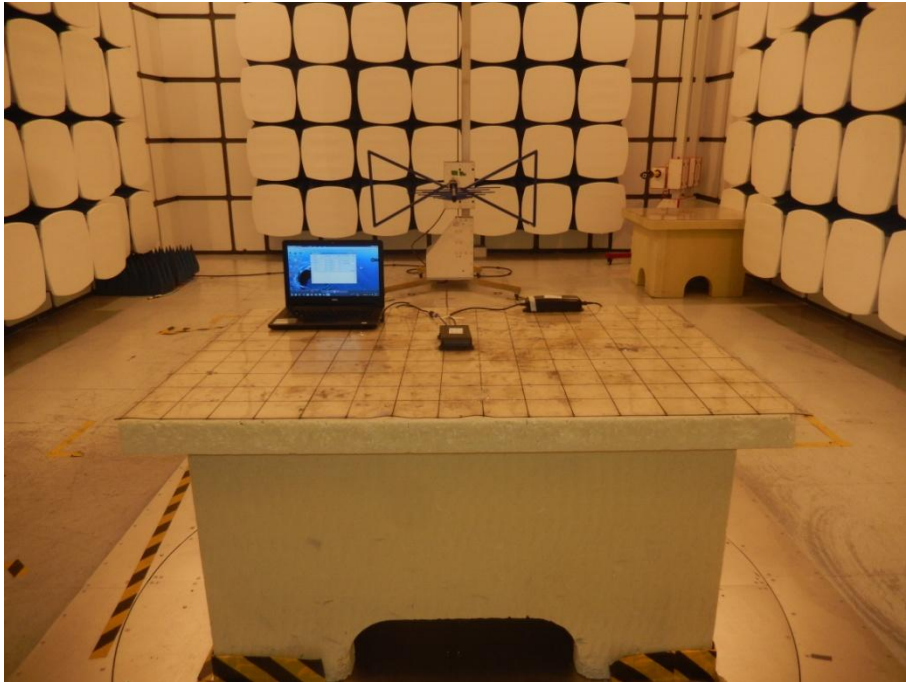



### Conducted Measurement Photo



※※※※END OF THE REPORT※※※※