




# FCC Part 15C Measurement and Test Report

For

**DewertOkin GmbH**

Weststr. 1, 32278 Kirchlingern, Germany

**FCC ID: O3YOM339**

<b>FCC Rule(s):</b>	<u>FCC Part 15.249</u>
<b>Product Description:</b>	<u>OKIMAT IPS</u>
<b>Tested Model:</b>	<u>OM339</u>
<b>Report No.:</b>	<u>STR15058055I</u>
<b>Tested Date:</b>	<u>2015-05-11 to 2015-06-02</u>
<b>Issued Date:</b>	<u>2015-06-02</u>
<b>Tested By:</b>	<u>Jong Wang / Engineer</u> 
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> 
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    1.2 TEST STANDARDS.....4

    1.3 TEST METHODOLOGY.....4

    1.4 TEST FACILITY.....4

    1.5 EUT SETUP AND TEST MODE.....5

**2. SUMMARY OF TEST RESULTS .....6**

**3. ANTENNA REQUIREMENTS.....7**

    3.1 STANDARD APPLICABLE.....7

    3.2 TEST RESULT.....7

**4. RADIATED EMISSIONS.....8**

    4.1 MEASUREMENT UNCERTAINTY .....8

    4.2 STANDARD APPLICABLE.....8

    4.3 TEST EQUIPMENT LIST AND DETAILS .....8

    4.4 TEST PROCEDURE.....9

    4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....10

    4.6 ENVIRONMENTAL CONDITIONS .....10

    4.7 SUMMARY OF TEST RESULTS/PLOTS .....10

**5. OUT OF BAND EMISSIONS.....19**

    5.1 STANDARD APPLICABLE.....19

    5.2 TEST EQUIPMENT LIST AND DETAILS .....19

    5.3 TEST PROCEDURE.....19

    5.4 ENVIRONMENTAL CONDITIONS .....19

    5.5 SUMMARY OF TEST RESULTS/PLOTS .....19

**6. EMISSION BANDWIDTH.....22**

    6.1 STANDARD APPLICABLE.....22

    6.2 TEST EQUIPMENT LIST AND DETAILS .....22

    6.3 TEST PROCEDURE.....22

    6.4 ENVIRONMENTAL CONDITIONS .....22

    6.5 SUMMARY OF TEST RESULTS/PLOTS .....22

**7. CONDUCTED EMISSIONS .....25**

    7.1 MEASUREMENT UNCERTAINTY .....25

    7.2 TEST EQUIPMENT LIST AND DETAILS .....25

    7.3 TEST PROCEDURE.....25

    7.4 BASIC TEST SETUP BLOCK DIAGRAM.....25

    7.5 ENVIRONMENTAL CONDITIONS .....26

    7.6 TEST RECEIVER SETUP .....26

    7.7 SUMMARY OF TEST RESULTS/PLOTS .....26


    7.8 CONDUCTED EMISSIONS TEST DATA.....26

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: DewertOkin GmbH  
 Address of applicant: Weststr. 1, 32278 Kirchleugern, Germany  
 Manufacturer: Shenzhen C&D Electronics Co., Ltd  
 Address of manufacturer: The 9<sup>th</sup> floor of 9<sup>th</sup> A Building Baoneng technology park, Longhua Town, BaoAn District, Shenzhen, Guangdong, China

General Description of EUT	
Product Name:	OKIMAT IPS
Trade Name:	
Model No.:	OM339
Adding Model(s):	/
Rated Voltage:	AC 100-120V/60Hz
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2403-2480MHz
Max. Field Strength:	93.96dBuV/m
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	78
Channel Separation:	1MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	16MHz

## 1.2 Test Standards

The following report is prepared on behalf of the DewertOkin GmbH in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	Low Channel	2403MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2480MHz

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
/	/	/	/

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a PCB antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23
Horn Antenna	ETS	3116B	00088203	2015-05-24	2016-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2015-05-24	2016-05-23





#### 4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

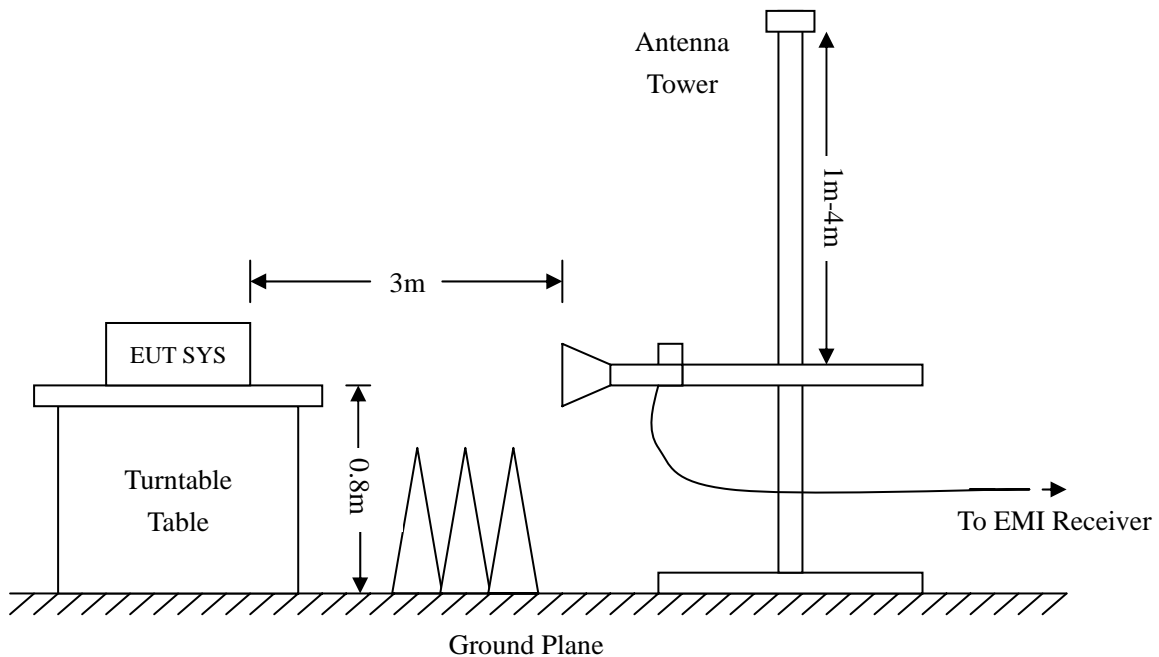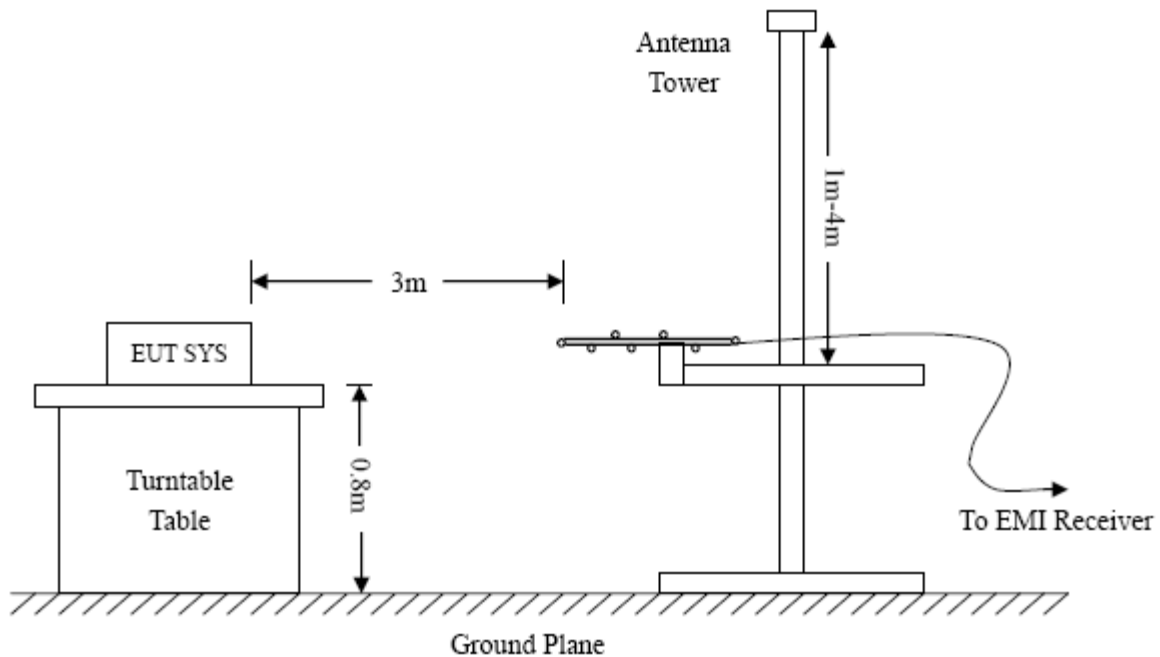

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

**4.5 Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

**4.6 Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

**4.7 Summary of Test Results/Plots**


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:

**-9.59 dB at 45.5348 MHz in the Vertical polarization, High Channel, Peak detector , 9 kHz to 25 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**

EUT: *OKIMAT IPS*  
 Tested Model: *OM339*  
 Operating Condition: *Transmitting Low Channel (2403Hz)*  
 Comment: *AC 120V/60Hz*  
  
 Test Specification: *Horizontal*

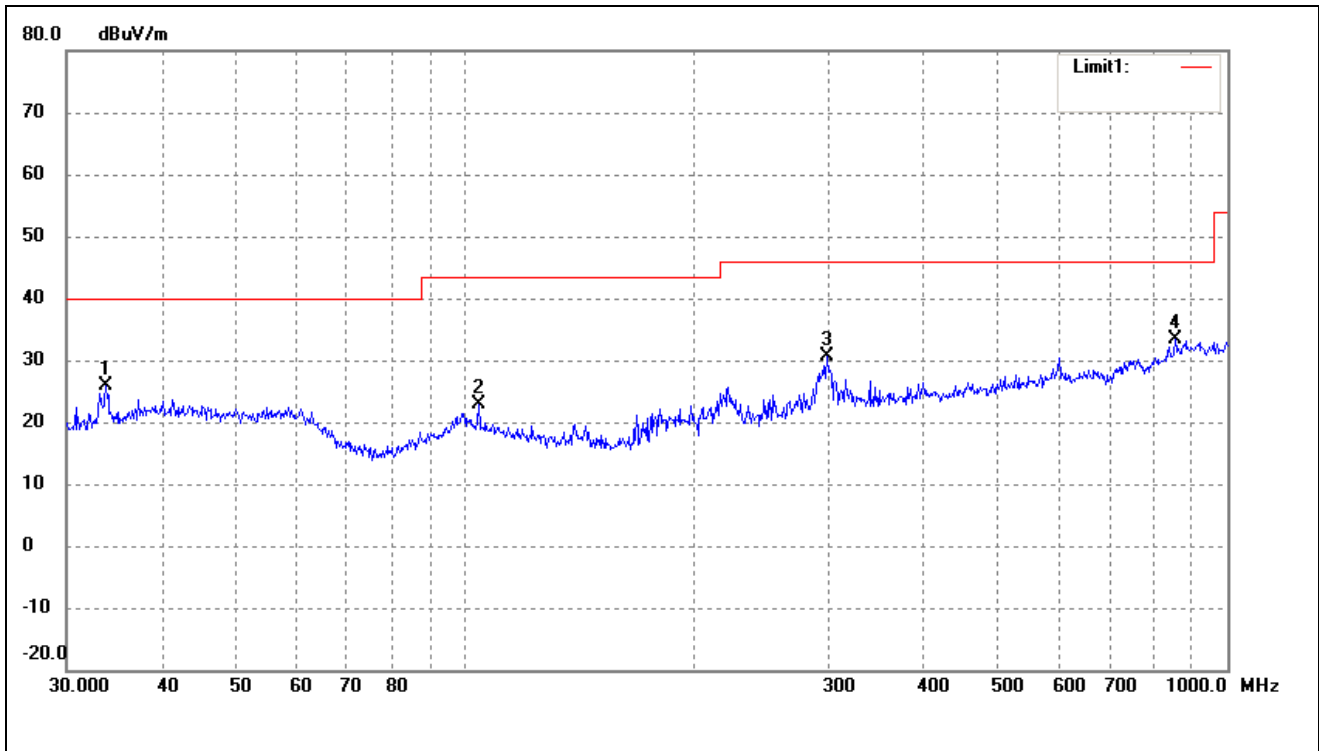

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.7986	19.36	6.59	25.95	40.00	-14.05	264	100	peak
2	104.1701	17.12	5.69	22.81	43.50	-20.69	113	100	peak
3	298.2681	21.54	9.11	30.65	46.00	-15.35	287	100	peak
4	854.0247	17.36	16.08	33.44	46.00	-12.56	185	100	peak

Test Specification: Vertical

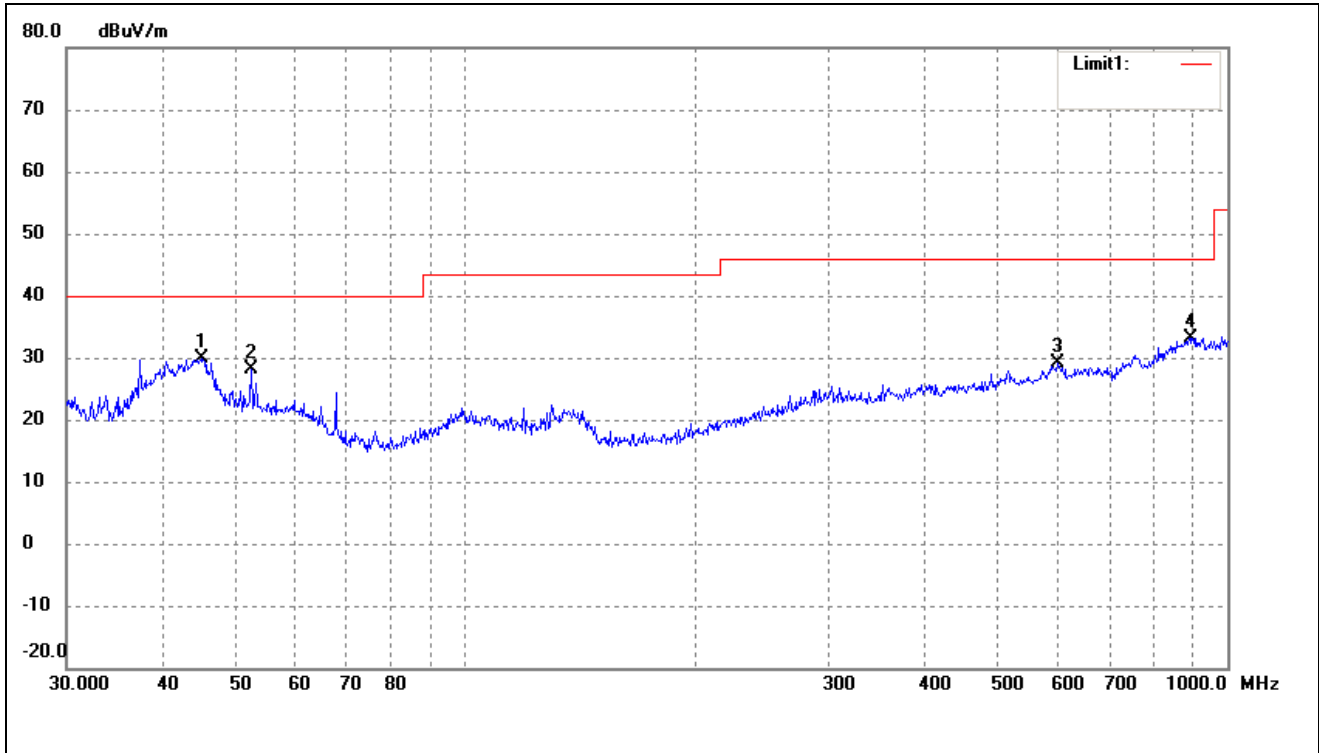


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	45.0583	22.57	7.25	29.82	40.00	-10.18	67	100	peak
2	52.3913	21.55	6.53	28.08	40.00	-11.92	101	100	peak
3	599.3213	15.89	13.30	29.19	46.00	-16.81	163	100	peak
4	893.8567	16.34	16.85	33.19	46.00	-12.81	211	100	peak

Operating Condition: Transmitting Middle Channel (2440MHz)


Comment: AC 120V/60Hz

Test Specification: Horizontal

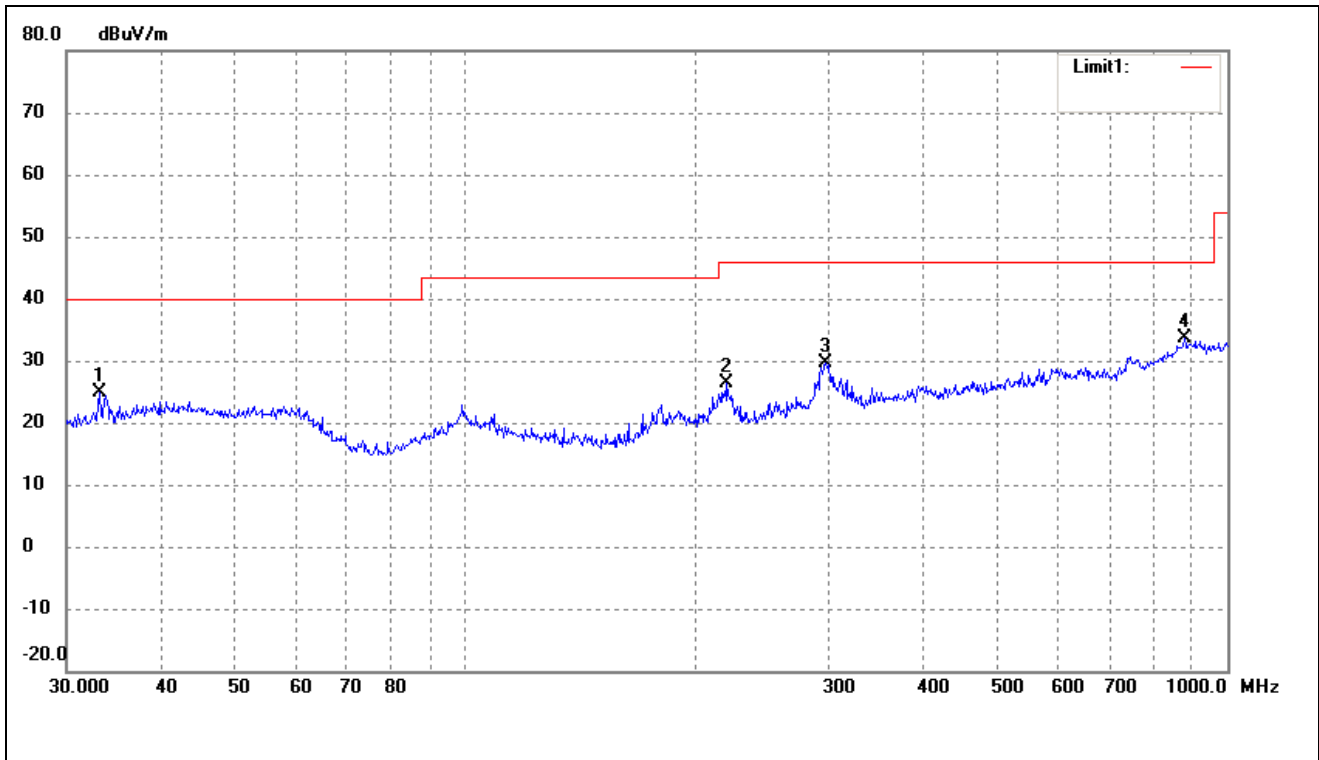

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	18.37	6.41	24.78	40.00	-15.22	33	100	peak
2	220.6171	21.14	5.14	26.28	46.00	-19.72	134	100	peak
3	297.2241	20.51	9.06	29.57	46.00	-16.43	158	100	peak
4	878.3214	16.74	16.78	33.52	46.00	-12.48	236	100	peak

Test Specification: Vertical

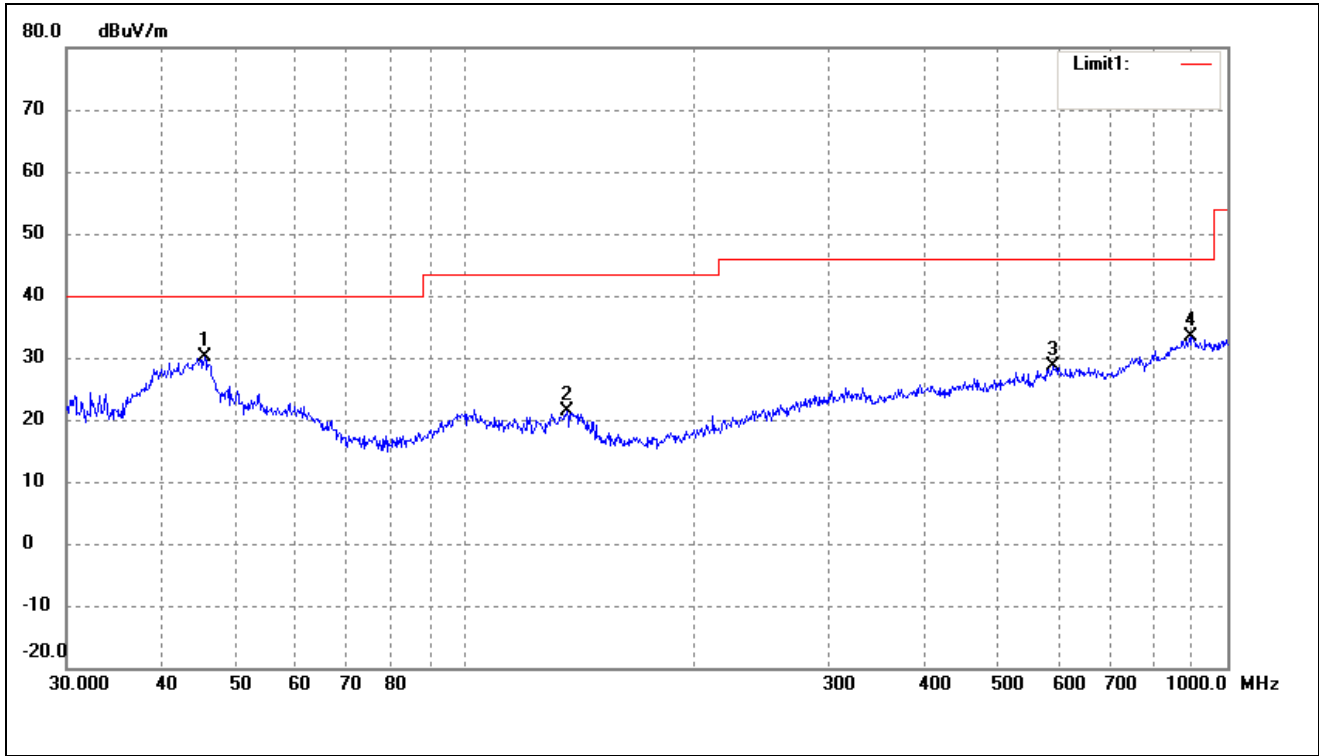


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	45.5348	22.88	7.15	30.03	40.00	-9.97	55	100	peak
2	135.9822	18.54	2.73	21.27	43.50	-22.23	79	100	peak
3	590.9737	15.61	12.97	28.58	46.00	-17.42	148	100	peak
4	896.9965	16.53	16.85	33.38	46.00	-12.62	193	100	peak

Operating Condition: Transmitting High Channel (2480MHz)


Comment: AC 120V/60Hz

Test Specification: Horizontal

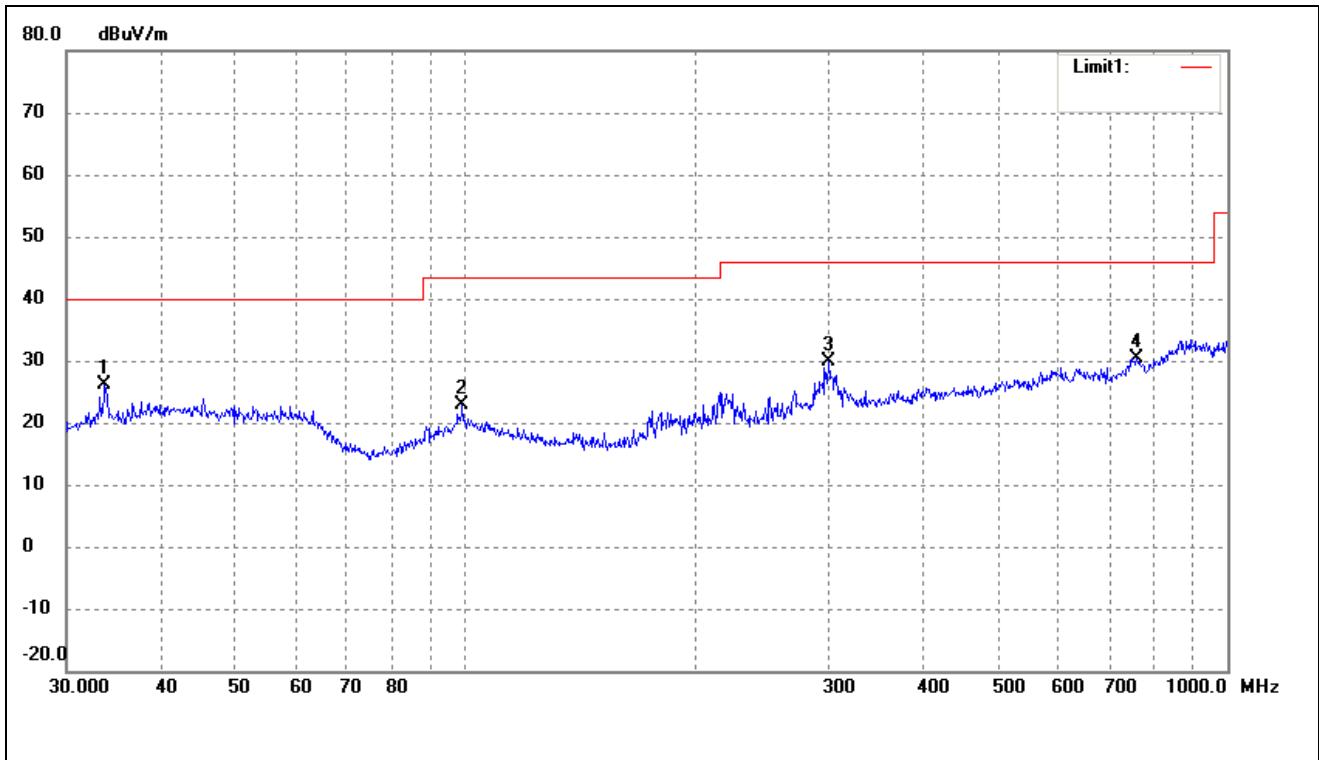

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.6803	19.66	6.56	26.22	40.00	-13.78	26	100	peak
2	99.1797	16.90	5.92	22.82	43.50	-20.68	117	100	peak
3	300.3673	20.65	9.18	29.83	46.00	-16.17	194	100	peak
4	760.7036	15.76	14.61	30.37	46.00	-15.63	126	100	peak

Test Specification: Vertical

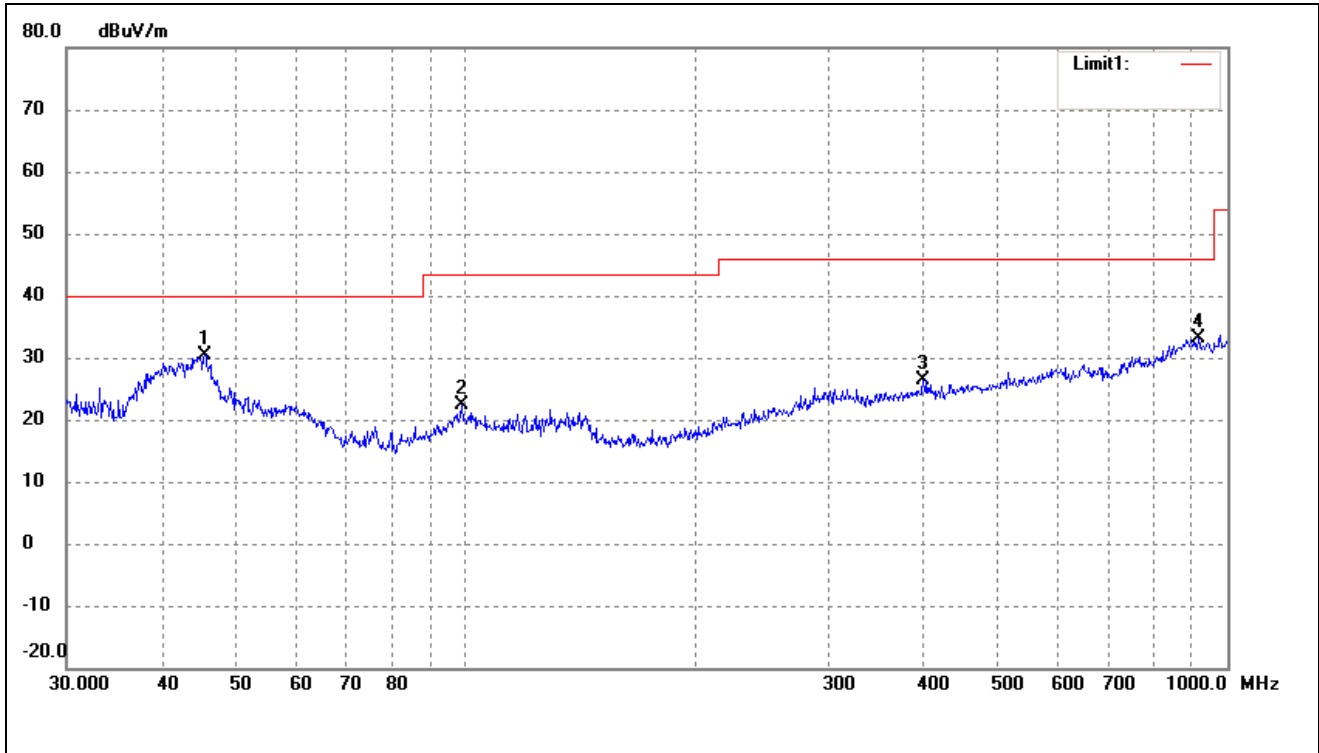

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	45.5348	23.26	7.15	30.41	40.00	-9.59	61	100	peak
2	99.1797	16.57	5.92	22.49	43.50	-21.01	137	100	peak
3	399.0302	16.27	10.09	26.36	46.00	-19.64	168	100	peak
4	916.0687	16.56	16.56	33.12	46.00	-12.88	273	100	peak



*Spurious Emissions Above 1GHz*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2403MHz							
2403	97.46	-3.50	93.96	114	-20.04	H	PK
2403	86.30	-3.50	82.80	94	-11.20	H	AV
4806	51.60	0.55	52.15	74	-21.85	H	PK
4806	36.98	0.55	37.53	54	-16.47	H	AV
7209	28.37	3.67	32.04	74	-41.96	H	PK
7209	16.78	3.67	20.45	54	-33.55	H	AV
2403	89.61	-3.50	86.11	114	-27.89	V	PK
2403	78.51	-3.50	75.01	94	-18.99	V	AV
4806	45.93	0.55	46.48	74	-27.52	V	PK
4806	32.18	0.55	32.73	54	-21.27	V	AV
7209	28.25	3.67	31.92	74	-42.08	V	PK
7209	16.62	3.67	20.29	54	-33.71	V	AV
Middle Channel-2440MHz							
2440	97.01	-3.43	93.58	114	-20.42	H	PK
2440	86.12	-3.43	82.69	94	-11.31	H	AV
4880	52.42	0.66	53.08	74	-20.92	H	PK
4880	37.48	0.66	38.14	54	-15.86	H	AV
7320	31.62	3.75	35.37	74	-38.63	H	PK
7320	19.49	3.75	23.24	54	-30.76	H	AV
2440	85.77	-3.43	82.34	114	-31.66	V	PK
2440	74.91	-3.43	71.48	94	-22.52	V	AV
4880	44.23	0.66	44.89	74	-29.11	V	PK
4880	31.86	0.66	32.52	54	-21.48	V	AV
7320	30.83	3.75	34.58	74	-39.42	V	PK
7320	19.29	3.75	23.04	54	-30.96	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2480MHz							
2480	96.47	-3.34	93.13	114	-20.87	H	PK
2480	84.73	-3.34	81.39	94	-12.61	H	AV
4960	52.40	0.78	53.18	74	-20.82	H	PK
4960	37.54	0.78	38.32	54	-15.68	H	AV
7440	31.72	3.85	35.57	74	-38.43	H	PK
7440	19.20	3.85	23.05	54	-30.95	H	AV
2480	84.47	-3.34	81.13	114	-32.87	V	PK
2480	72.72	-3.34	69.38	94	-24.62	V	AV
4960	43.06	0.77	43.83	74	-30.17	V	PK
4960	30.86	0.77	31.63	54	-22.37	V	AV
7440	30.27	3.85	34.12	74	-39.88	V	PK
7440	19.22	3.85	23.07	54	-30.93	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 5. Out of Band Emissions

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23

### 5.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

### 5.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


### 5.5 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge  
Vertical (Worst case)

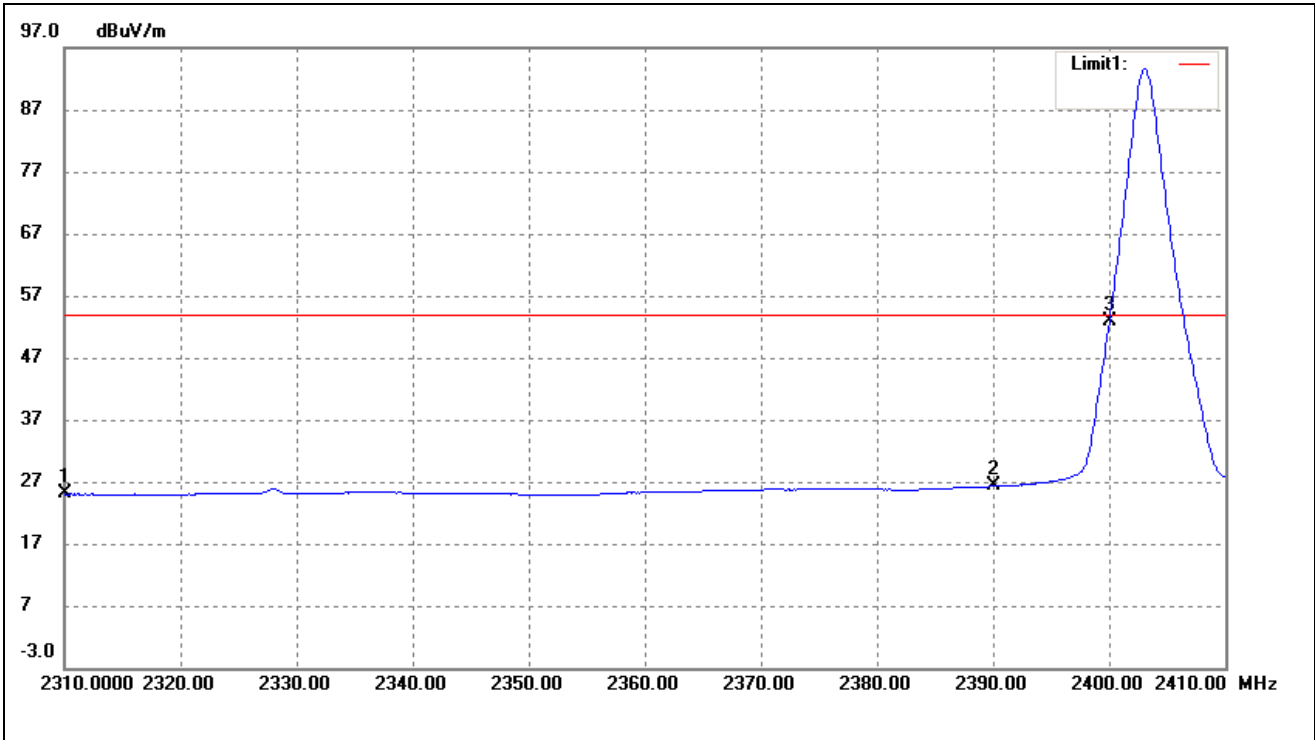

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	28.76	-3.71	25.05	54.00	-28.95	Ave Detector
	2310.000	41.69	-3.71	37.98	74.00	-36.02	Peak Detector
2	2390.000	29.90	-3.54	26.36	54.00	-27.64	Ave Detector
	2390.000	42.87	-3.54	39.33	74.00	-34.67	Peak Detector
3	2400.000	56.30	-3.51	52.79	54.00	-1.21	Ave Detector
	2400.000	58.54	-3.51	55.03	74.00	-18.97	Peak Detector

Highest Bandedge  
Vertical (Worst case)

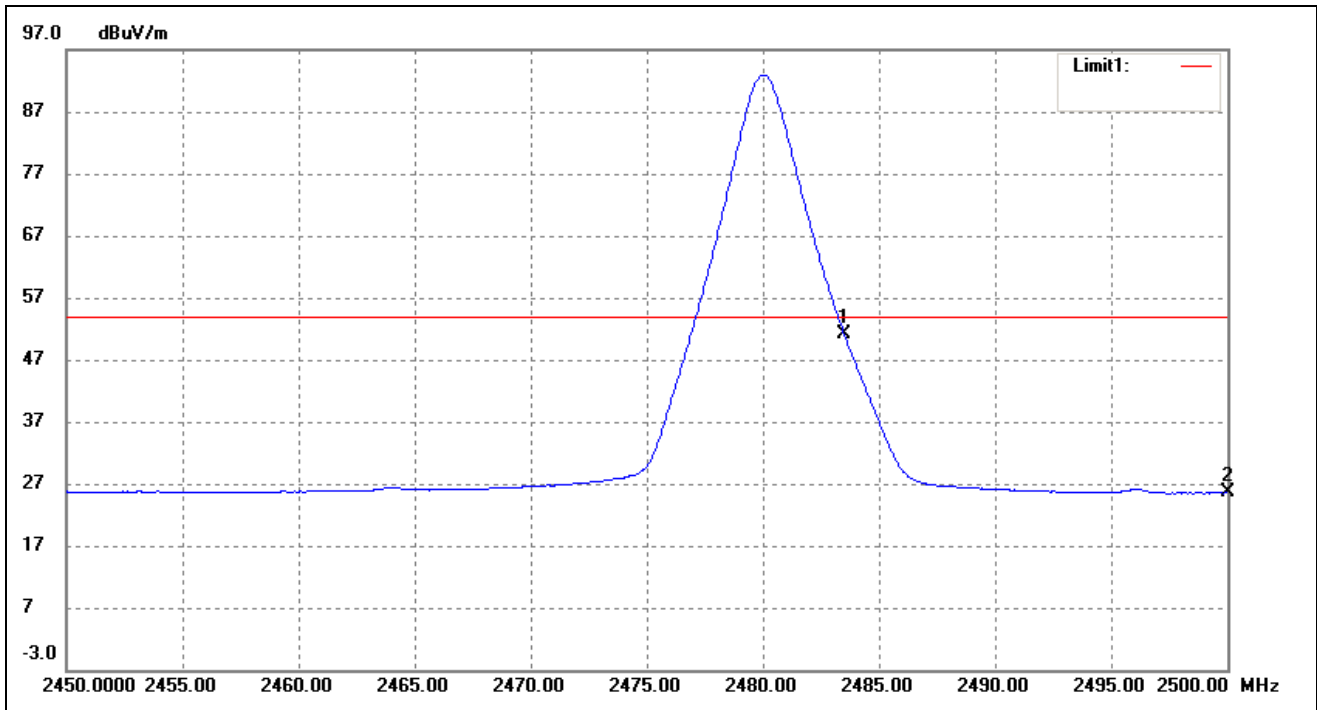

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.57	-3.33	51.24	54.00	-2.76	Ave Detector
	2483.500	56.34	-3.33	53.01	74.00	-20.99	Peak Detector
2	2500.000	28.82	-3.28	25.54	54.00	-28.46	Ave Detector
	2500.000	42.09	-3.28	38.81	74.00	-35.19	Peak Detector

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2015-05-28	2016-05-27
Attenuator	ATTEN	ATS100-4-20	/	2015-05-28	2016-05-27

### 6.3 Test Procedure

According to the ANSI 63.4-2009, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$ 1% 20dB Bandwidth, VBW  $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.4 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.5 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2403	1050	935.1416
Middle Channel	2440	1035	927.6951
High Channel	2480	1038	914.0291

Please refer to the following test plots


Low Channel:

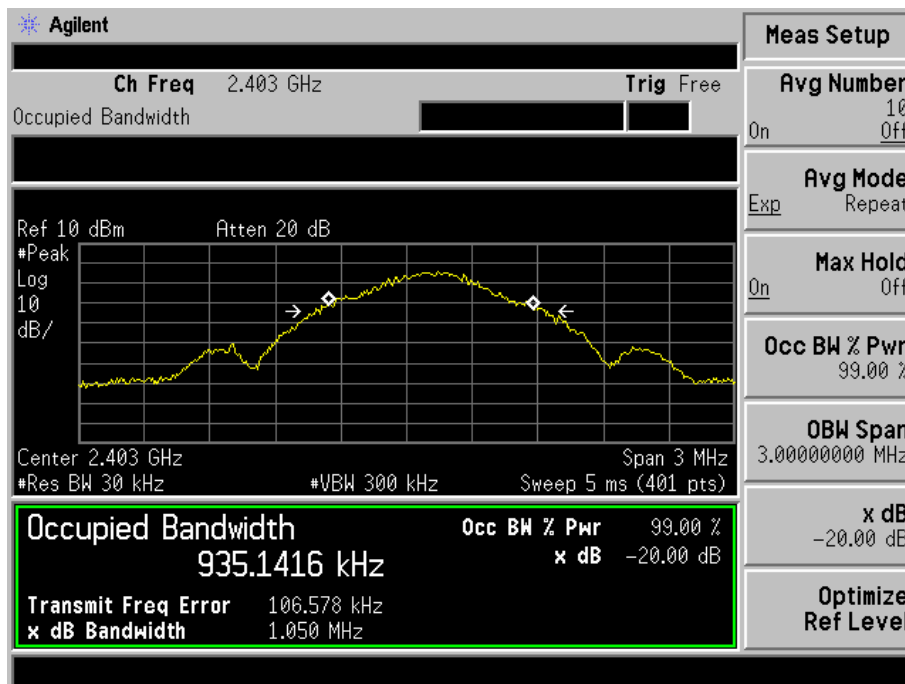

Middle Channel:

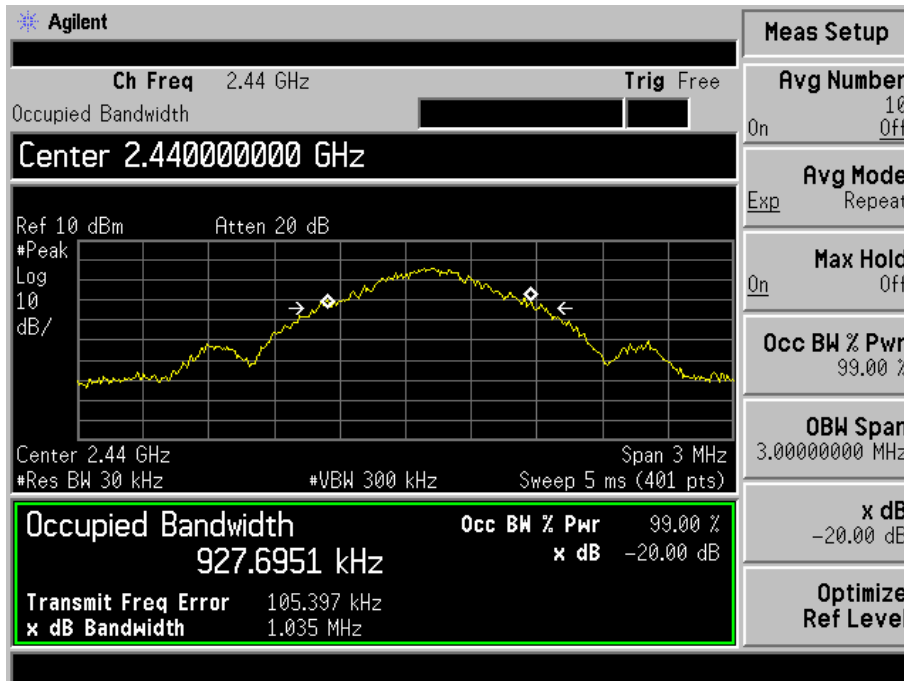

High Channel:

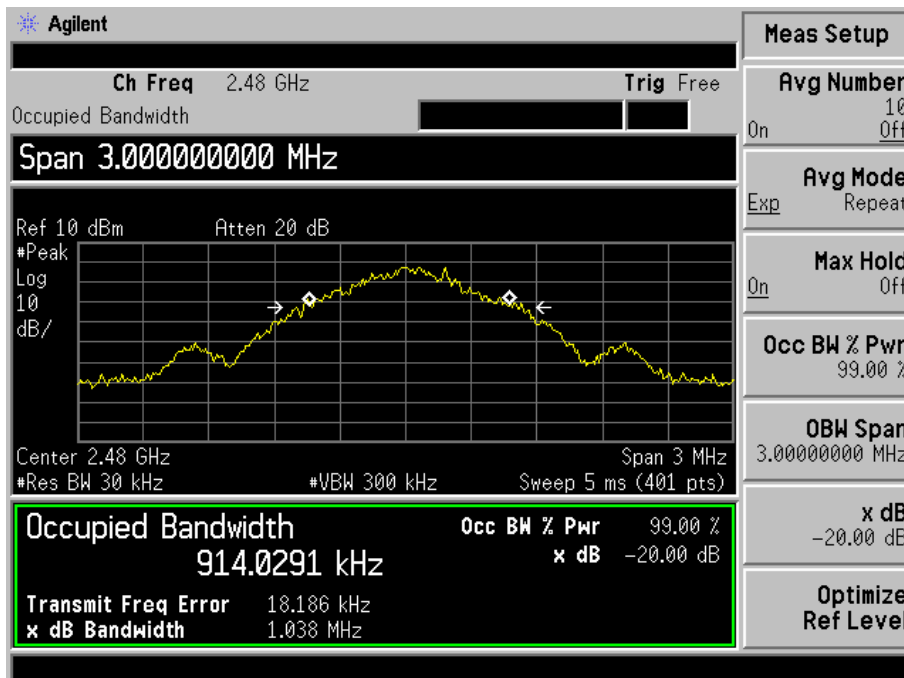



## 7. Conducted Emissions

### 7.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-05-28	2016-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-05-28	2016-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-05-28	2016-05-27


### 7.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 7.4 Basic Test Setup Block Diagram

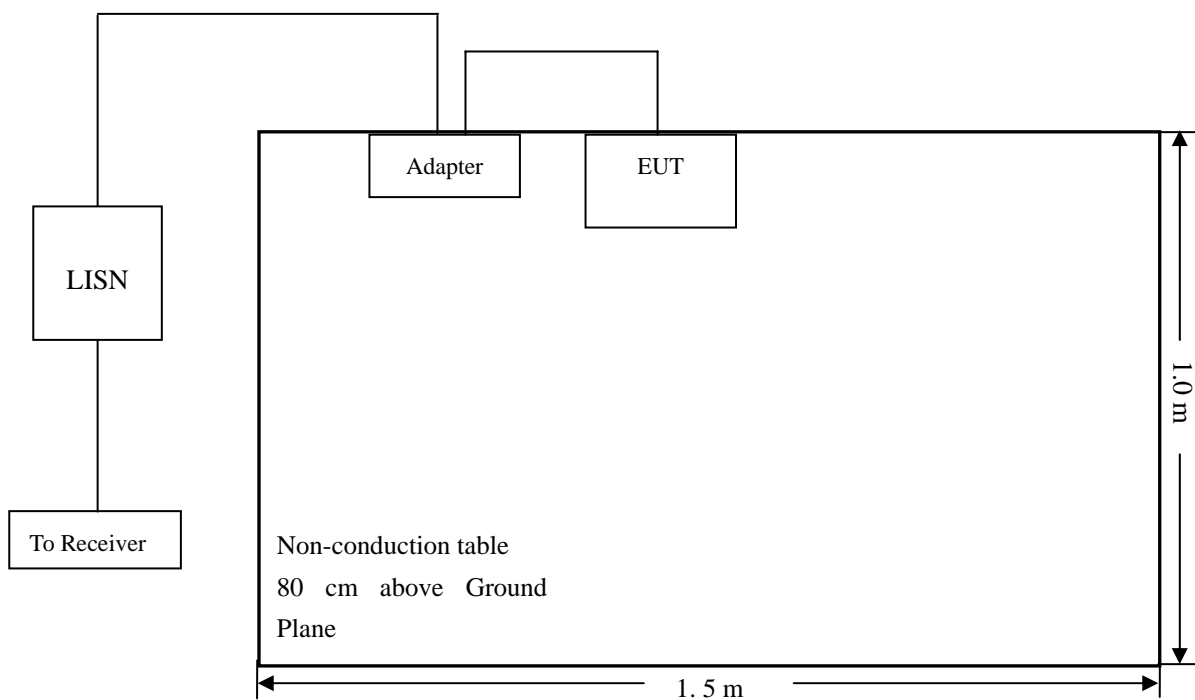

## 7.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 7.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

## 7.7 Summary of Test Results/Plots

According to the data in section 7.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


**-17 dB at 16.9460MHz in the Line mode, Peak detector, 0.15-30MHz**

## 7.8 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


EUT: OKIMAT IPS  
 Tested Model: OM339  
 Operating Condition: Transmitting  
 Comment: AC120V/60Hz

Test Specification: Neutral

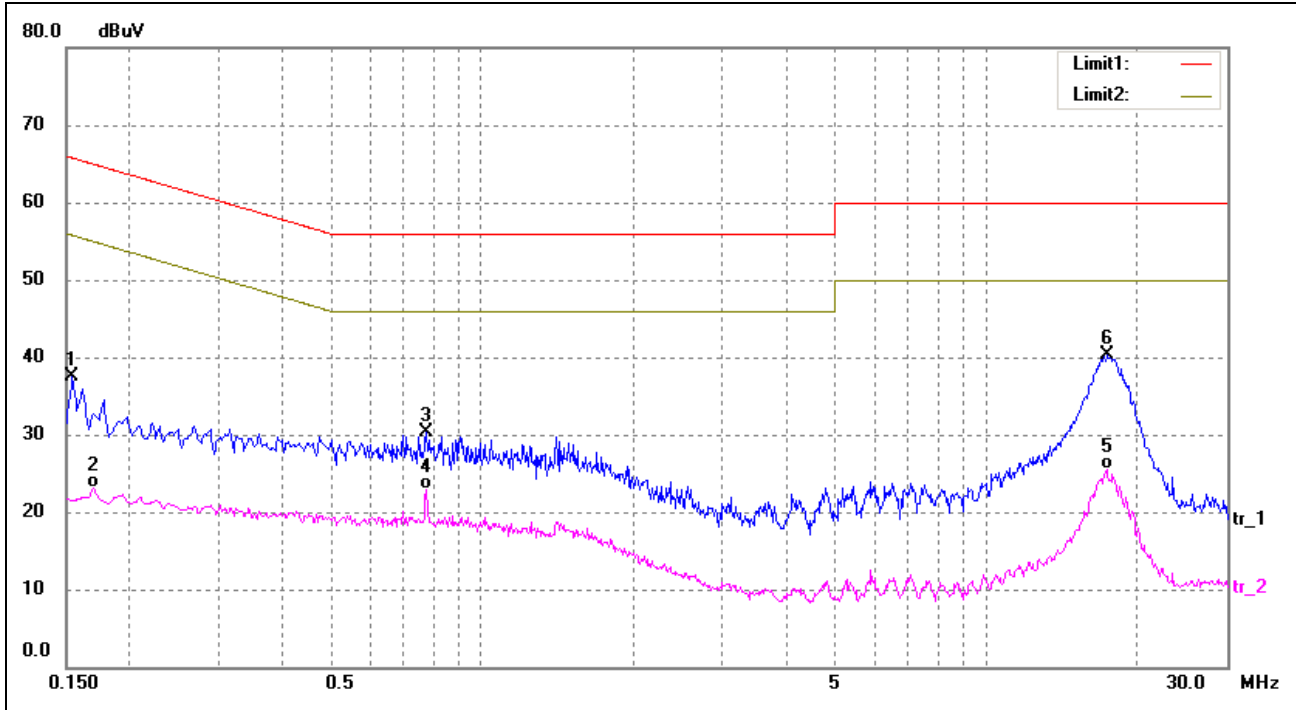

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	27.98	9.50	37.48	65.78	-28.30	peak
2	0.1700	13.51	9.50	23.01	54.96	-31.95	AVG
3	0.7780	20.53	9.78	30.31	56.00	-25.69	peak
4	0.7780	13.20	9.78	22.98	46.00	-23.02	AVG
5	17.3660	13.98	11.47	25.45	50.00	-24.55	AVG
6*	17.3860	28.86	11.48	40.34	60.00	-19.66	peak

Test Specification: Line

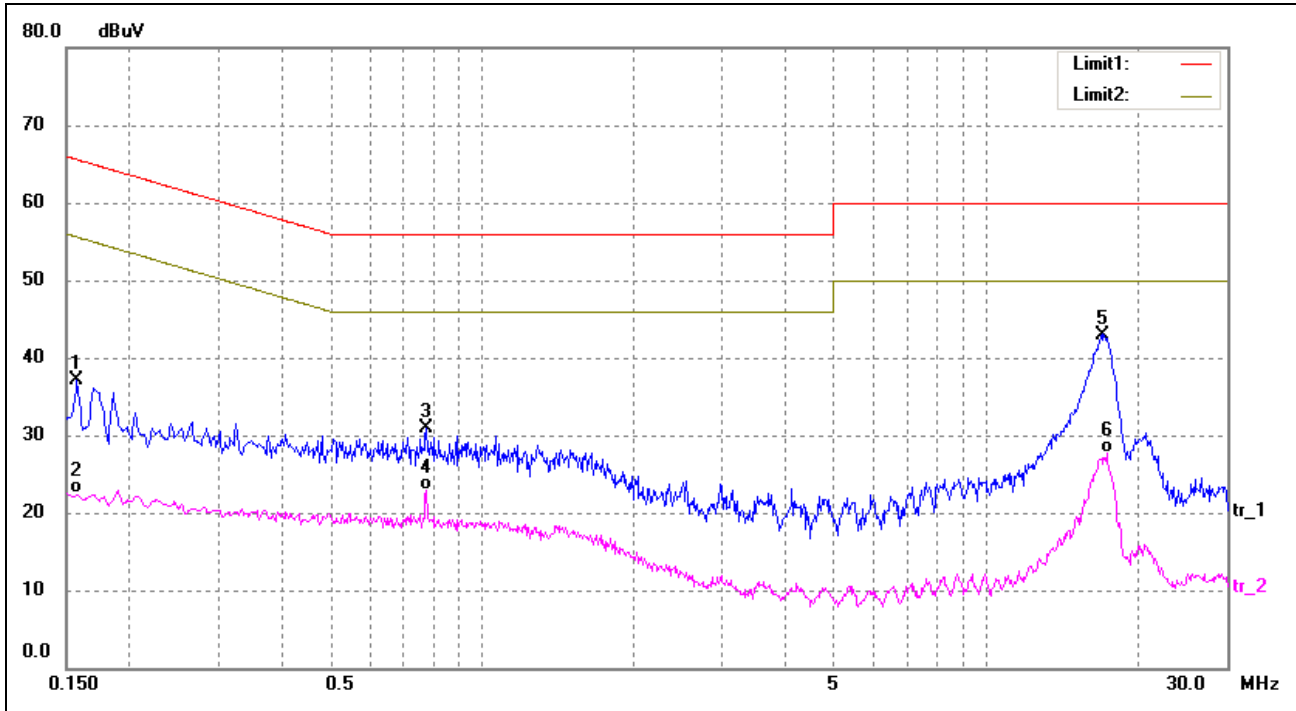

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	27.54	9.50	37.04	65.57	-28.53	peak
2	0.1580	13.04	9.50	22.54	55.57	-33.03	AVG
3	0.7780	21.12	9.78	30.90	56.00	-25.10	peak
4	0.7780	13.20	9.78	22.98	46.00	-23.02	AVG
5*	16.9460	31.61	11.39	43.00	60.00	-17.00	peak
6	17.3060	16.24	11.46	27.70	50.00	-22.30	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*