



YOUNGSHIN ELECTRONICS CO., LTD. TEST REPORT

FOR THE

**TRANSCEIVER OF CAR ALARM/REMOTE ENGINE STARTER,
COMPUSTAR 2000AS-REMOTE
(Only Transmitter Data In This Report)**

**FCC PART 15 SUBPART C
PART 15.231**

COMPLIANCE

DATE OF ISSUE: JULY 10, 2000

PREPARED FOR:

Youngshin Electronics Co., LTD.
4 FL Hirun Town Bldg 536-3
Unhaeng-Dong
Sihung, Kyungki-Do
Korea 429-060

PREPARED BY:

Joyce Walker
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: June 8-9, 2000

P.O. No: Wire transfer
W.O. No: 74524

Report No: FC00-062

DOCUMENTATION CONTROL:

Tracy Phillips
Documentation Control Supervisor
CKC Laboratories, Inc.

APPROVED BY:

Dennis Ward
Director of Laboratories
CKC Laboratories, Inc.

This report contains a total of 28 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Summary Of Results.....	4
Equipment Under Test (EUT) Description.....	4
Measurement Uncertainty.....	4
EUT Operating Frequency.....	4
Peripheral Devices	4
Report Of Measurements.....	5
Table 1: Fundamental Radiated Emission Levels	5
Table 2: Six Highest Radiated Emission Levels	6
Table A : List Of Test Equipment	7
EUT Setup	8
Test Instrumentation And Analyzer Settings.....	8
Table B : Analyzer Bandwidth Settings Per Frequency Range.....	8
Spectrum Analyzer Detector Functions.....	9
Peak	9
Quasi-Peak.....	9
Average.....	9
Test Methods	10
Radiated Emissions Testing.....	10
Transmit Times.....	10
Occupied Bandwidth	10
Sample Calculations	11
Appendix A : Information About The Equipment Under Test.....	12
I/O Ports.....	13
Crystal Oscillators	13
Printed Circuit Boards	13
Required EUT Changes To Comply.....	13
Photograph Showing Radiated Emissions.....	14
Photograph Showing Radiated Emissions.....	15
Photograph Showing Radiated Emissions.....	16
Photograph Showing Radiated Emissions.....	17
Appendix B : Measurement Data Sheets	18
Pulse Train Plot	19
On Time Plot	20
Time Out Plot	21
Total On Time Plot.....	22
Occupied Bandwidth Plot.....	23
Occupied Bandwidth Plot.....	24

CKC Laboratories, Inc. has Certificates of Accreditation from the following agencies:
DATEch (Germany); A2LA (USA); FCC (USA); VCCI (Japan); BSMI (Taiwan); HOKLAS (Hong Kong).
CKC Laboratories, Inc. has Letters of Acceptance through an MRA for the following agencies:
ACA/NATA (Australia); SABS (South Africa); SWEDAC (Sweden); TUV Rheinland-Germany; TUV Rheinland-Korea; TUV Rheinland-Russia; Radio Communications Agency (RA); NEMKO (Norway).

ADMINISTRATIVE INFORMATION

DATE OF TEST: June 8-9, 2000

PURPOSE OF TEST: To demonstrate the compliance of the Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote, with the requirements for FCC Part 15 Subpart C Part 15.231 devices.

MANUFACTURER: Youngshin Electronics Co., LTD.
4 FL Hirun Town Bldg 536-3
Unhaeng-Dong
Sihung, Kyungki-Do
Korea 429-060

REPRESENTATIVE: Young Il Chang

TEST LOCATION: CKC Laboratories, Inc.
22105 Wilson River Hwy
Tillamook, OR 97141

TEST PERSONNEL: Mike Wilkinson

TEST METHOD: ANSI C63.4 1992

FREQUENCY RANGE TESTED: 9 kHz - 5000 MHz

EQUIPMENT UNDER TEST: Transceiver of Car Alarm/Remote Engine Starter
Manuf: Young Shin Electronics, Co LTD
Model: 2000AS-Remote
Serial: None
FCC ID: XXXJ2000R (pending)

SUMMARY OF RESULTS

The Youngshin Electronics Co., LTD. Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote, was tested in accordance with ANSI C63.4 1992 for compliance with FCC Part 15 Subpart C Part 15.231.

As received, the above equipment was found to be fully compliant with the limits of FCC Part 15 Subpart C Part 15.231. The results in this report apply only to the items tested, as identified herein.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

A remote radio transceiver for an auto security device.

MEASUREMENT UNCERTAINTY

Associated with data in this report is a ± 4 dB measurement uncertainty.

EUT OPERATING FREQUENCY

The EUT was operating at 447.7 MHz.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.
The relative humidity was between 20% and 75%.

PERIPHERAL DEVICES

The EUT was not tested with peripheral devices.

REPORT OF MEASUREMENTS

The following tables report the highest worst case levels recorded during the tests performed on the Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote. All readings taken are peak readings unless otherwise noted by a “Q” or “A”. The data sheets from which these tables were compiled are contained in Appendix B.

Table 1: Fundamental Radiated Emission Levels									
FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Bilog dB	Amp dB	Cable dB	Duty Cycle dB				
447.684	98.3	17.0	-27.7	4.9	-13.0	79.5	81.3	-1.8	HA Back
447.684	90.0	17.0	-27.7	4.9	-13.0	71.2	81.3	-10.1	HA Vertical
447.688	96.4	17.0	-27.7	4.9	-13.0	77.6	81.3	-3.7	HA Side
447.695	97.4	17.0	-27.7	4.9	-13.0	78.6	81.3	-2.7	VA Vertical
447.708	84.6	17.0	-27.7	4.9	-13.0	65.8	81.3	-15.5	VA Back

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.231(b)
Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
V = Vertical Polarization
N = No Polarization
D = Dipole Reading
Q = Quasi Peak Reading
A = Average Reading

COMMENTS: EUT is placed on the table in 3 orthogonal planes as noted in each reading. EUT is transmitting continuously. Measured transmitter on time is 22.3 mSec with a PRF of 102.1 mSec yielding a 100 mSec duty cycle of .223 % or 13 dB correction factor. Each reading with this correction factor applied is noted. EUT is battery operated and a fresh battery is installed. The Temperature was 70°F and the humidity was 50 %.

Table 2: Six Highest Radiated Emission Levels									
FREQUENCY MHz	METER READING dBμV	CORRECTION FACTORS				CORRECTED READING dBμV/m	SPEC LIMIT dBμV/m	MARGIN dB	NOTES
		Ant dB	Amp dB	Cable dB	Duty Cycle dB				
895.250	79.1	23.3	-39.9	7.2	-13.0	56.7	61.3	-4.6	V Vertical
895.575	73.3	23.3	-39.9	7.2	-13.0	50.9	61.3	-10.4	V Side
1343.093	68.5	25.5	-38.2	5.4	-13.0	48.2	54.0	-5.8	V Vertical
1790.814	67.2	27.2	-36.9	5.7	-13.0	50.2	61.3	-11.1	V Vertical
2238.533	60.7	27.9	-36.0	6.5	-13.0	46.1	54.0	-7.9	V Vertical
2686.297	47.1	29.1	-35.0	7.5	-13.0	35.7	54.0	-18.3	H Vertical

Test Method: ANSI C63.4 1992
Spec Limit : FCC Part 15.231(b)
Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
V = Vertical Polarization
N = No Polarization
D = Dipole Reading
Q = Quasi Peak Reading
A = Average Reading

COMMENTS: EUT is placed on the table in 3 orthogonal planes as noted in each reading. EUT is transmitting continuously. Measured transmitter on time is 22.3 mSec with a PRF of 102.1 mSec yielding a 100 mSec duty cycle of .223 % or 13 dB correction factor. Each reading with this correction factor applied is noted. EUT is battery operated and a fresh battery is installed. The Temperature was 70°F and the humidity was 50 %. Frequency range investigated was 9 kHz to 5 GHz. Note: No readings were found below 30 MHz using the magnetic loop antenna.

TABLE A
LIST OF TEST EQUIPMENT

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8447D	2727A05392	02/14/2000	02/14/2001	10
Chase Bilog CBL6111C	2455	08/30/1999	08/30/2000	1992
HP 8593EM	3624A00159	10/05/1999	10/05/2000	2111
EMCO Horn 3115	9006-3413	05/02/2000	05/02/2001	327
HP 83017A	3123A00321	10/21/1999	10/21/2000	2114
ELEC Mech Mag Loop 6502	2156	1/26/2000	1/26/2001	00297

EUT SETUP

The equipment under test (EUT) was set up in a manner that represented their normal use. Any special conditions required for the EUT to operate normally are identified in the comments that accompany Table 1 for fundamental radiated emissions and Table 2 for radiated emissions. Additionally, a complete description of all the ports is included on the information sheets contained in Appendix A.

During radiated emissions testing, the EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters. This configuration is typical for radiated emissions testing of table top devices.

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Table A were used to collect the radiated emissions data for the Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote. For frequencies below 30 MHz the magnetic loop antenna was used. For frequencies from 30 to 1000 MHz, the biconilog antenna was used. For frequencies above 1000 MHz the horn antenna was used. All antennas were located at a distance of 3 meters from the edge of the EUT.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

TABLE B : ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE

TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
RADIATED EMISSIONS	9 kHz	30 MHz	200 Hz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	5 GHz	1 MHz

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in Tables 1 and 2 indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data for the Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

Average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

TEST METHODS

The radiated emissions data of the Transceiver of Car Alarm/Remote Engine Starter, Compustar 2000AS-Remote, was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna and amplifier gain, the data was reduced as shown in the "Sample Calculations". The corrected data was then compared to the FCC Part 15, Subpart C 15.231 emissions limits to determine compliance.

Preliminary and final measurements were taken in order to better ensure that all emissions from the EUT were found and maximized.

Radiated Emissions Testing

During the preliminary radiated scan, the EUT was powered up and operating in its defined FCC test mode. For frequencies below 30 MHz the magnetic loop antenna was used. The frequency range of 30 MHz - 1000 MHz was then scanned with the biconilog antenna located about 1.5 meter above the ground plane in the vertical polarity. During this scan, the turntable was rotated and all peaks, which were at or near the limit, were recorded. Lastly, a scan of the FM band from 88 - 110 MHz was made, using a reduced resolution bandwidth and a reduced frequency span. The biconilog antenna was changed to the horizontal polarity and the above steps were repeated. The horn antenna was used to scan for frequencies above 1000 MHz. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

For the final radiated scan, the equipment was again positioned facing the antenna. A thorough scan of all frequencies was manually made using a small frequency span, rotating the turntable as needed. Comparison with the previously recorded measurements was then made.

Using the peak readings from both scans as a guide, the test engineer then maximized the readings with respect to the table rotation and antenna. Photographs showing the final worst case configuration of the EUT are contained in Appendix A.

FCC Part 15.231(a)(2) & (3) - Transmit Times

The 5 second turn off measurements were made using a remote transmitter to key the transmitter EUT under test. Measurements were made of the "on time" and the "off time" (sleep mode). Plots showing the test results are contained in Appendix B.

FCC Part 15.231(c) - Occupied Bandwidth Measurements

In accordance with Part 15.215(c), the fundamental frequency was kept within the central 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Plots showing the test results are contained in Appendix B.

SAMPLE CALCULATIONS

The basic spectrum analyzer reading was converted using correction factors as shown in the emissions readings in Tables 1 and 2. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula:

$$\begin{aligned} & \text{Meter reading (dB}\mu\text{V)} \\ & + \text{Antenna Factor (dB)} \\ & + \text{Cable Loss (dB)} \\ & - \text{Distance Correction (dB)} \\ & - \text{Pre-amplifier Gain (dB)} \\ & = \text{Corrected Reading (dB}\mu\text{V/m)} \end{aligned}$$

This reading was then compared to the applicable specification limit to determine compliance.

A typical data sheet will display the following in column format:

#	Freq MHz	Rdng dB μ V	Cable	Amp	Bilog	Horn	Duty Cycle	Dist	Corr dB μ V/m	Spec	Margin	Polar
---	-------------	--------------------	-------	-----	-------	------	---------------	------	----------------------	------	--------	-------

means reading number

Freq MHz is the frequency in MHz of the obtained reading.

Rdng dB μ V is the reading obtained on the spectrum analyzer in dB μ V.

Amp is short for the preamplifier factor or gain in dB.

Bilog is the biconilog antenna factor in dB.

Horn is the horn antenna factor in dB.

Cable is the cable loss in dB of the coaxial cable on the OATS.

Dist is the distance factor (in dB). It is used when testing at a different test distance than the one stated in the spec.

Corr dB μ V/m is the corrected reading which is now in dB μ V/m (field strength).

Spec is the specification limit (dB) stated in the regulations.

Margin is the closeness to the specified limit in dB; + is over and - is under the limit.

Polar is the Polarity of the antenna with respect to earth.

Duty Cycle is the duty cycle factor used in dB.

APPENDIX A

INFORMATION ABOUT THE EQUIPMENT UNDER TEST

INFORMATION ABOUT THE EQUIPMENT UNDER TEST	
Test Software/Firmware:	
CRT was displaying:	
Power Supply Manufacturer:	
Power Supply Part Number:	
AC Line Filter Manufacturer:	
AC Line Filter Part Number:	
Line voltage used during testing:	

I/O PORTS	

CRYSTAL OSCILLATORS	
Type	Freq In MHz
Ceramic Resonator	4
Crystal	0.032768
Channel Crystal	447.7
Channel Crystal	469.1

PRINTED CIRCUIT BOARDS				
Function	Model & Rev	Clocks, MHz	Layers	Location
Control Board	Usrl&Rev0	4MHz	4	
Rf-Board	Usrrf&Rev0	447.7, 469.1	4	

REQUIRED EUT CHANGES TO COMPLY:
None.

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Vertical Front

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Vertical Back

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Side

PHOTOGRAPH SHOWING RADIATED EMISSIONS




Radiated Emissions - Back


APPENDIX B

MEASUREMENT DATA SHEETS

Pulse Train Plot

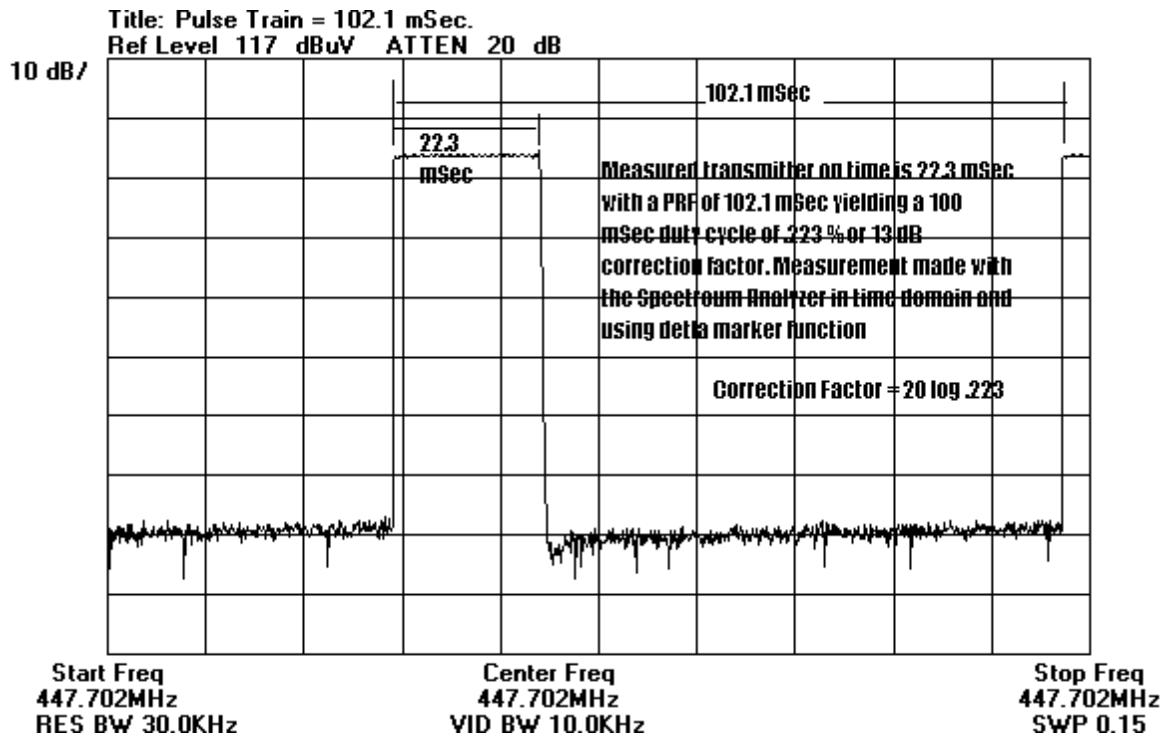


On Time Plot

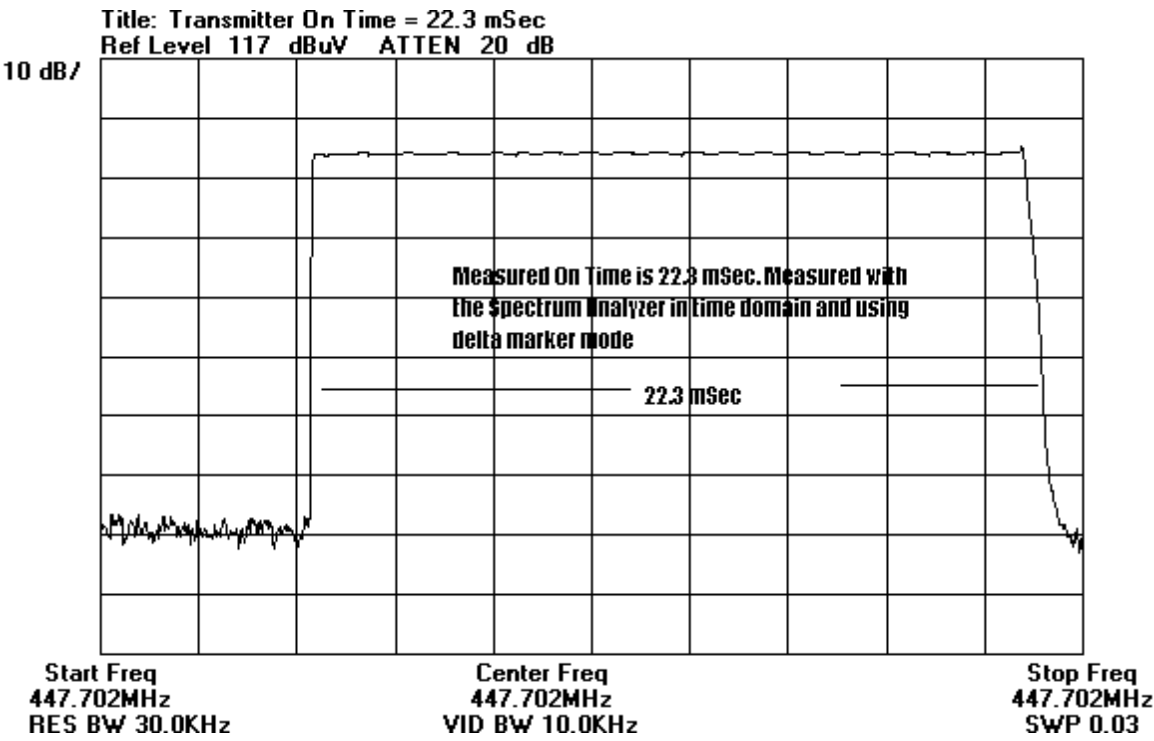


Time Out Plot

Title: Remote Sleep Operation. Button held down

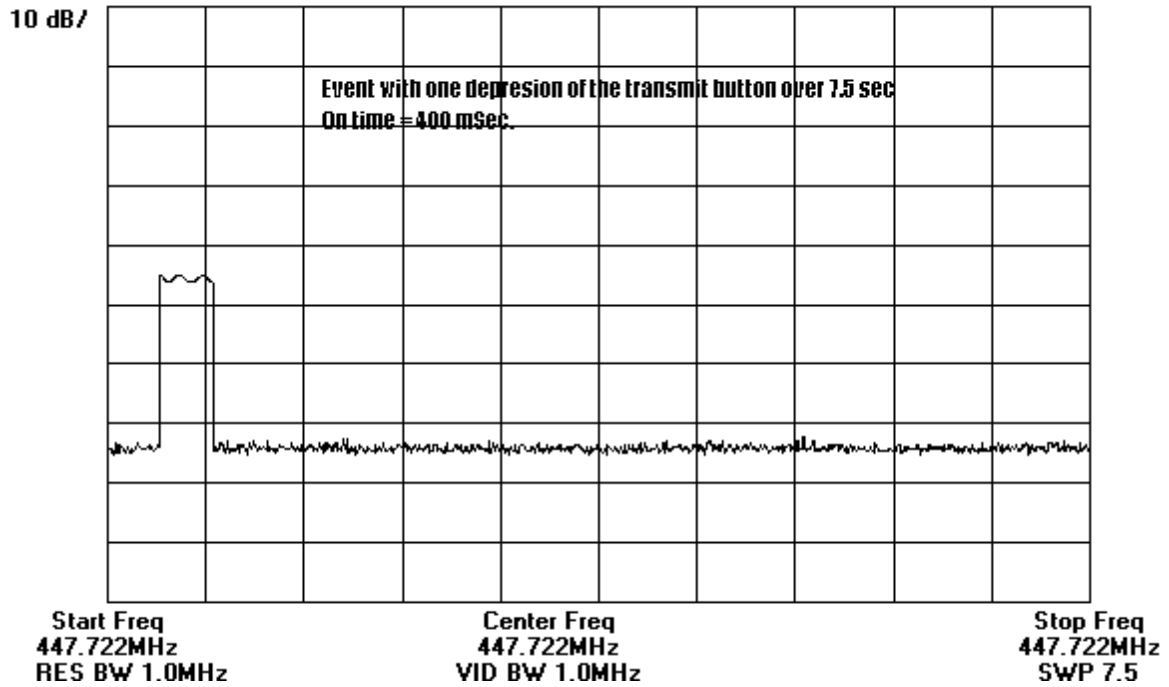


Total On Time Plot

Title: Remote Total On Time

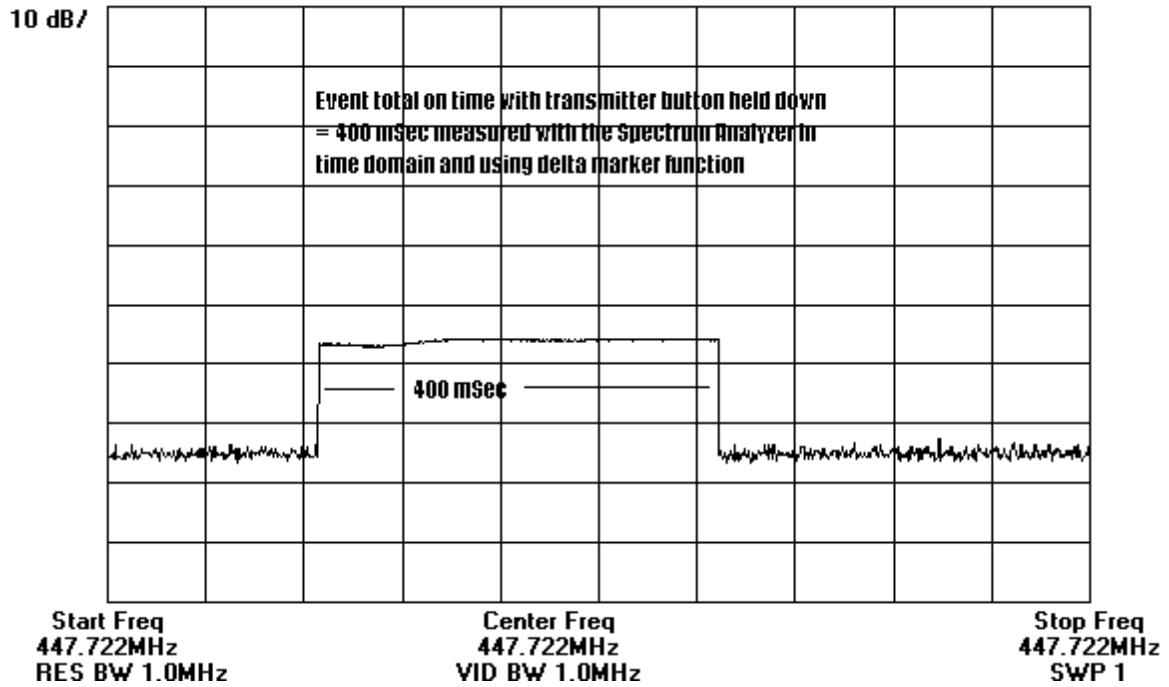


Occupied Bandwidth Plot

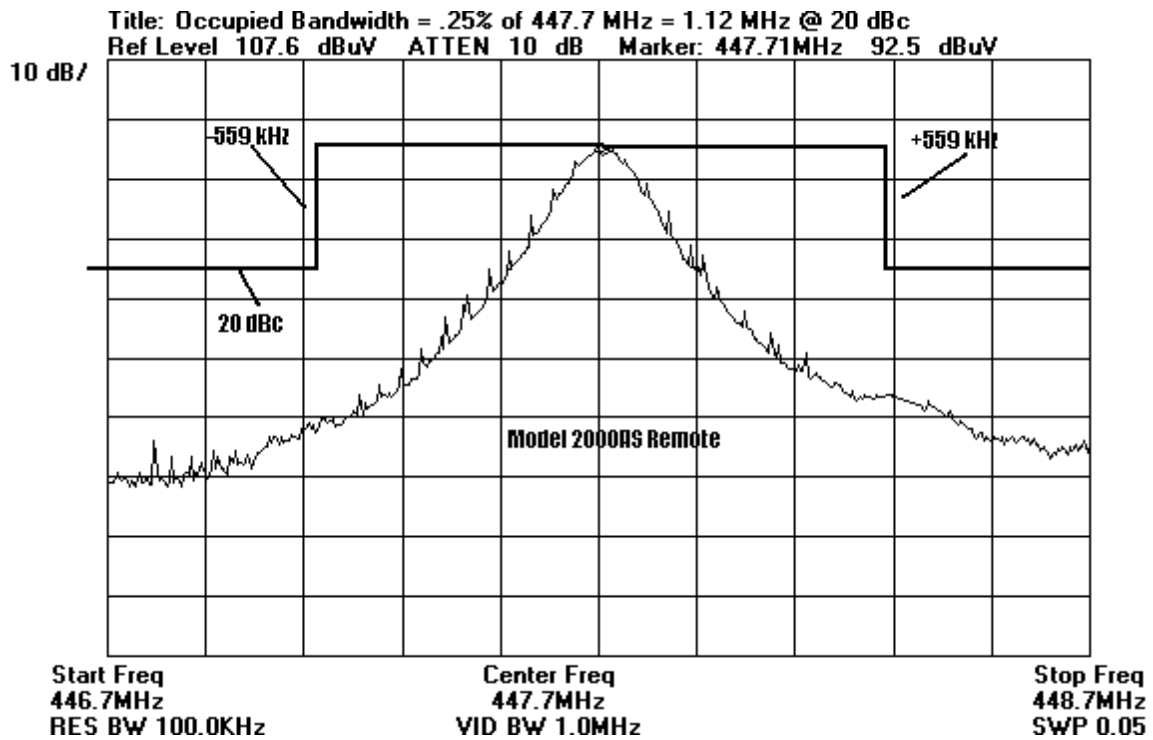

Note: Bandwidth plot amplitude values were corrected to the fundamental data sheet peak corrected readings.

Occupied Bandwidth Plot

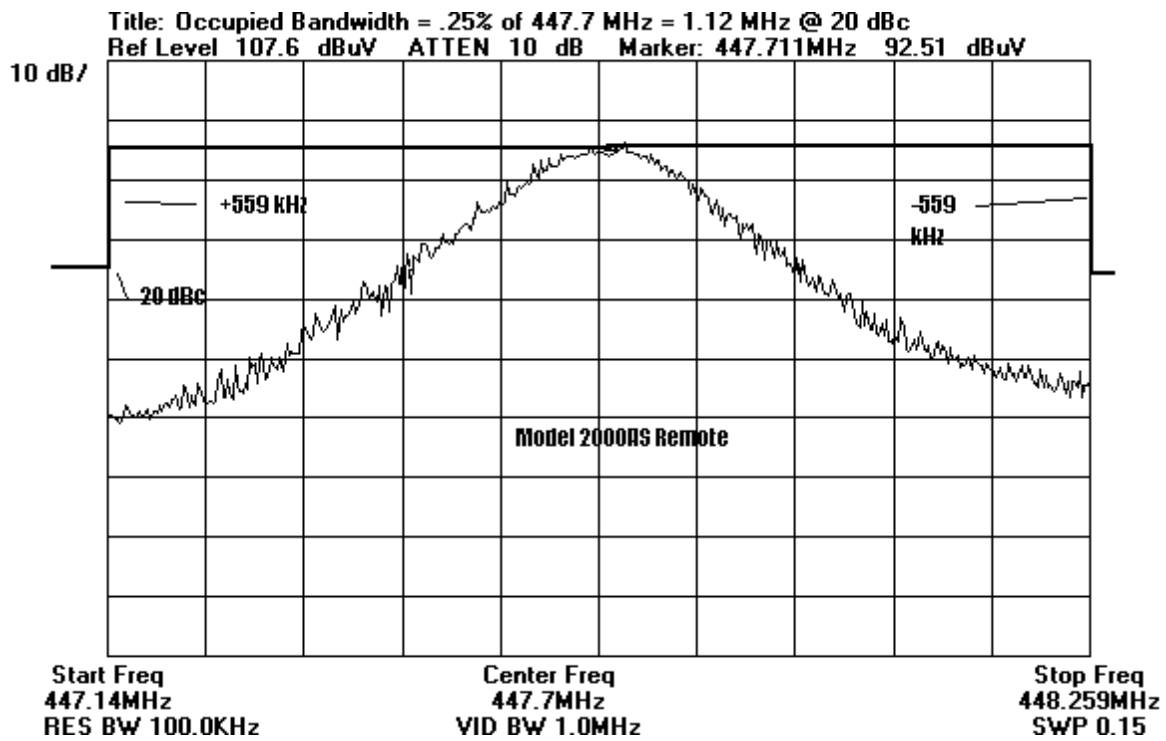

Note: Bandwidth plot amplitude values were corrected to the fundamental data sheet peak corrected readings.

Date: 06/09/2000
Time: 11:42:55
Sequence#: 3
Tested By: Mike Wilkinson

Function	Manufacturer	Model #	S/N
Car Alarm/Car Start*	Young Shin Electronics, Co LTD	2000AS Remote	None

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

COMMENTS: EUT is placed on the table in 3 orthogonal planes as noted in each reading. EUT is transmitting continuously. Measured transmitter on time is 22.3 mSec with a PRF of 102.1 mSec yielding a 100 mSec duty cycle of .223 % or 13 dB correction factor. Each reading with this correction factor applied is noted. EUT is battery operated and a fresh battery is installed. The Temperature was 70°F and the humidity was 50 %.

Test Distance: 3 Meters

Page 25 of 28
Report No: FC00-062

Test Location: CKC Laboratories, Inc. • 22105 Wilson River Hwy • Tillamook, OR 97141 • 800 500-4EMC

Customer: Youngshin Electronics

Specification: **15.231 spurs**

Work Order #: **74524**

Date: 06/09/2000

Test Type: **Maximized Emissions**

Time: 11:41:59

Equipment: **Car Alarm/Car Start**

Sequence#: 5

Manufacturer: Young Shin Electronics, Co LTD

Tested By: Mike Wilkinson

Model: 2000AS Remote

S/N: None

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Car Alarm/Car Start*	Young Shin Electronics, Co LTD	2000AS Remote	None

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

COMMENTS: EUT is placed on the table in 3 orthogonal planes as noted in each reading. EUT is transmitting continuously. Measured transmitter on time is 22.3 mSec with a PRF of 102.1 mSec yielding a 100 mSec duty cycle of .223 % or 13 dB correction factor. Each reading with this correction factor applied is noted. EUT is battery operated and a fresh battery is installed. The Temperature was 70°F and the humidity was 50 %. Frequency range investigated was 9 kHz to 5 GHz. Note: No readings were found below 30 MHz using the magnetic loop antenna.

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	Bilog Horn dB	Cable dB	Duty Cycle Cable dB	Amp dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	895.250M	79.1	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	56.7	61.3 Vertical position, 13 dB correction applied	-4.6	Vert
2	895.425M	78.5	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	56.1	61.3 Back position, 13 dB correction applied	-5.2	Horiz
3	1343.093M	68.5	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	48.2	54.0 Vertical position, 13 dB correction applied	-5.8	Vert
4	895.270M	77.9	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	55.5	61.3 Side position, 13 dB correction applied	-5.8	Horiz
5	895.480M	77.2	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	54.8	61.3 Back position, 13 dB correction applied	-6.5	Vert

6	2238.533M	60.7	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	46.1	54.0 Vertical position, 13 dB correction applied	-7.9	Vert
7	1343.122M	66.2	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	45.9	54.0 Back position, 13 dB correction applied	-8.1	Vert
8	2238.502M	58.2	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	43.6	54.0 Back position, 13 dB correction applied	-10.4	Vert
9	895.575M	73.3	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	50.9	61.3 Side position, 13 dB correction applied	-10.4	Vert
10	1343.162M	63.5	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	43.2	54.0 Side position, 13 dB correction applied	-10.8	Horiz
11	1790.814M	67.2	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	50.2	61.3 Vertical position, 13 dB correction applied	-11.1	Vert
12	2238.527M	56.5	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	41.9	54.0 Vertical position, 13 dB correction applied	-12.1	Horiz
13	1343.142M	62.1	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	41.8	54.0 Vertical position, 13 dB correction applied	-12.2	Horiz
14	895.375M	70.4	+23.3 +0.0	+7.2 +0.0	-13.0 +0.0	-39.9	+0.0	48.0	61.3 Vertical position, 13 dB correction applied	-13.3	Horiz
15	1343.137M	60.6	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	40.3	54.0 Back position, 13 dB correction applied	-13.7	Horiz
16	1343.192M	60.6	+0.0 +25.5	+0.0 +0.6	-13.0 +4.8	-38.2	+0.0	40.3	54.0 Side position, 13 dB correction applied	-13.7	Vert
17	2238.542M	54.0	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	39.4	54.0 Back position, 13 dB correction applied	-14.6	Horiz
18	1790.817M	63.7	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	46.7	61.3 Side position, 13 dB correction applied	-14.6	Horiz

19	2238.552M	54.0	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	39.4	54.0 Side position, 13 dB correction applied	-14.6	Vert
20	2238.522M	52.9	+0.0 +27.9	+0.0 +0.7	-13.0 +5.8	-36.0	+0.0	38.3	54.0 Side position, 13 dB correction applied	-15.7	Horiz
21	1790.872M	62.0	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	45.0	61.3 Side position, 13 dB correction applied	-16.3	Vert
22	1790.777M	61.4	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	44.4	61.3 Back position, 13 dB correction applied	-16.9	Vert
23	2686.297M	47.1	+0.0 +29.1	+0.0 +1.0	-13.0 +6.5	-35.0	+0.0	35.7	54.0 Vertical position, 13 dB correction applied	-18.3	Horiz
24	2686.242M	46.6	+0.0 +29.1	+0.0 +1.0	-13.0 +6.5	-35.0	+0.0	35.2	54.0 Back position, 13 dB correction applied	-18.8	Vert
25	4029.404M	38.6	+0.0 +32.0	+0.0 +1.9	-13.0 +9.0	-33.3	+0.0	35.2	54.0 Vertical position, 13 dB correction applied	-18.8	Vert
26	1790.812M	59.4	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	42.4	61.3 Vertical position, 13 dB correction applied	-18.9	Horiz
27	1790.767M	59.2	+0.0 +27.2	+0.0 +0.7	-13.0 +5.0	-36.9	+0.0	42.2	61.3 Back position, 13 dB correction applied	-19.1	Horiz
28	2686.239M	44.1	+0.0 +29.1	+0.0 +1.0	-13.0 +6.5	-35.0	+0.0	32.7	54.0 Vertical position, 13 dB correction applied	-21.3	Vert