



Hong Kong

FCC – Test report

Report Number : **60/760.8.121.01** Date of Issue: 8 June 2009

Model : **T-POD**

Product Type : Temperature Pod

Applicant : Dayton Industrial Co., Ltd.

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung,
: New Territories, Hong Kong

Production Facility : Kendy Enterprise Ltd.

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung,
: New Territories, Hong Kong

Test Result : **Positive** **Negative**

Total pages including Appendices : 19

TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards/ Results.....	5
5	General Remarks.....	6
6	Emission Test Results.....	7
6.1	Radiated Emission Test.....	7
7	Appendix A..... Photographs of EUT	17
8	Appendix B..... Photographs of Test Set Up	18



Hong Kong

2 Details about the Test Laboratory

Details about the Test Laboratory

Company name: TÜV SÜD HONG KONG LTD.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin
HK.

Telephone: 852 2776 1323
Fax: 852 2776 1372

Company name: The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street,
Taipo Industrial Estate,
N.T.,
Hong Kong



3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product:	Temperature Pod
Model no.:	T-POD
Serial number:	NIL
Options and accessories:	NIL
Rated Voltage:	3 V DC
Rated Current:	NIL
Rated Power:	NIL
Frequency:	NIL
Description of the EUT:	NIL



4 Summary of Test Standards and Results

Emission Tests						
Test Condition	Test Requirement	Test Method	Pages	Test Result		
				Pass	Fail	N/A
Radiated Emission (Fundamental & Spurious Emission)	FCC Part 15 Section 15.249	ANSI C63.4:2003	7-9	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission 30MHz – 1000MHz	FCC Part 15 Section 15.209	ANSI C63.4:2003	10-11	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emission on AC 150kHz to 30MHz	FCC Part 15 Section 15.207	ANSI C63.4:2003	NIL	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>



Hong Kong

5 General Remarks

Remarks

NIL

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - Not Performed

The Equipment Under Test

■ - Fulfills the general approval requirements.

□ - Does not fulfill the general approval requirements.

Sample Received Date: 28 October 2008


Testing Start Date: 5 February 2009

Testing End Date: 5 February 2009

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

Ivan Toa
Deputy Manager



Prepared by:

Twin Ngan
EMC Test Engineer


6 Emission Test Results

6.1 Radiated Emission Test (Fundamental)

Test Procedure :

The equipment under test (EUT) was placed on a test table with 0.8m high above the ground plane and the distance between the EUT and the broadband antenna is 3m. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables. The turntable was rotated to maximize the emission level and the antenna was moving along the mast from 1m up to 4m in both horizontal and vertical polarizations.

Test Setup :

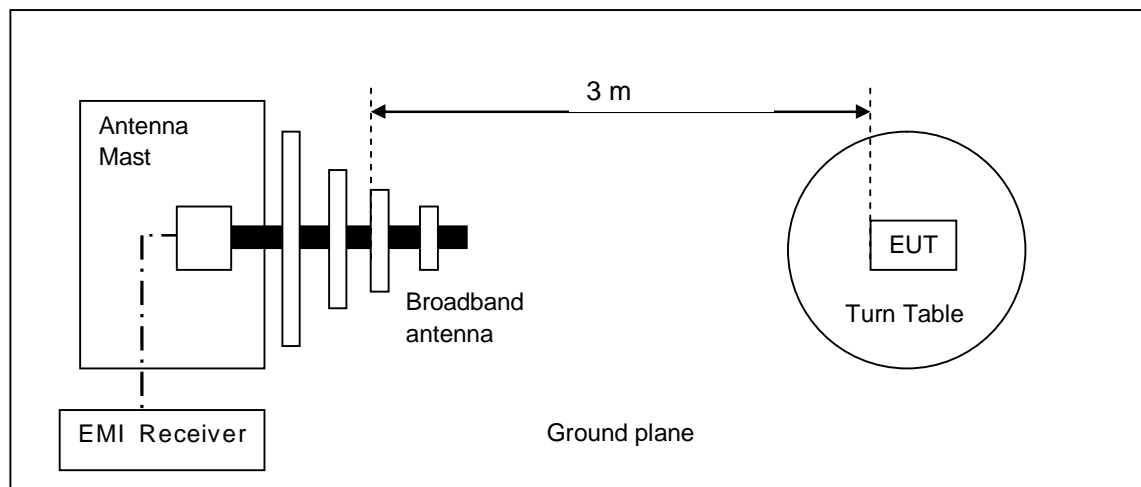



Radiated Emission Test (Fundamental)

Date of test : 5 February 2009

Test requirement : FCC Part 15 Section 15.249

Test method : ANSI C63.4:2003

Operating mode : On mode

Antenna polarity : Horizontal (Worse case, Horizontal > Vertical)

Remarks : Duty Cycle Correction = 20 Log (0.002)= -54dB

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Field Strength of Fundamental Emissions in Peak Value

Frequency MHz	Test result dBµV/m	Limit dBµV/m	Margin dB
2456.9	75.3	114.0	-38.7

Field Strength of Fundamental Emissions in Average Value

Frequency MHz	Test result dBµV/m	Limit dBµV/m	Margin dB
2456.9	21.3	94.0	-72.7

Radiated Emission Test (Spurious Emission)

Date of test : 5 February 2009

Test requirement : FCC Part 15 Section 15.249

Test method : ANSI C63.4:2003

Operating mode : On mode

Antenna polarity : Horizontal (Worse case, Horizontal > Vertical)

Remarks : Duty Cycle Correction = 20 Log (0.002)= -54.0dB

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Field Strength of Emissions in Peak Value

Frequency MHz	Test result dBμV/m	Limit dBμV/m	Margin dB
4913.60	44.2	74.0	-29.8
7370.40	<30.0	74.0	<-44.0
9827.20	<30.0	74.0	<-44.0
12284.00	<30.0	74.0	<-44.0
14740.80	<30.0	74.0	<-44.0
17197.60	<30.0	74.0	<-44.0
19654.40	<30.0	74.0	<-44.0
22111.20	<30.0	74.0	<-44.0
24568.00	<30.0	74.0	<-44.0


Field Strength of Fundamental Emissions in Average Value

Frequency MHz	Test result dBμV/m	Limit dBμV/m	Margin dB
4913.60	0	54.0	-54.0
7370.40	<30.0	54.0	<-24.0
9827.20	<30.0	54.0	<-24.0
12284.00	<30.0	54.0	<-24.0
14740.80	<30.0	54.0	<-24.0
17197.60	<30.0	54.0	<-24.0
19654.60	<30.0	54.0	<-24.0
22111.20	<30.0	54.0	<-24.0
24568.00	<30.0	54.0	<-24.0

Radiated Emission Test 30MHz - 1000MHz

Date of test : 5 February 2009
Test requirement : FCC Part 15 Section 15.209
Test method : ANSI C63.4:2003
Operating mode : On mode
Antenna polarity : Horizontal
Remarks : NIL


Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

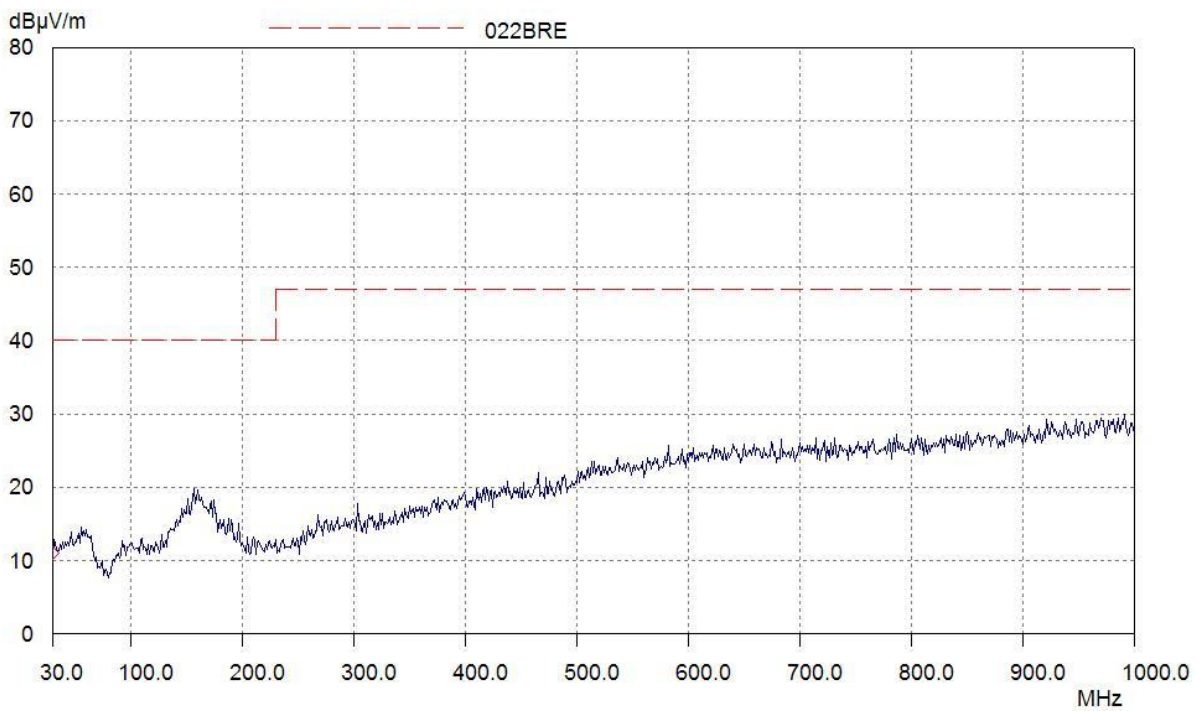

Radiated Emission Test 30MHz - 1000MHz

Date of test : 5 February 2009
Test requirement : FCC Part 15 Section 15.209
Test method : ANSI C63.4:2003
Operating mode : On mode
Antenna polarity : Vertical
Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

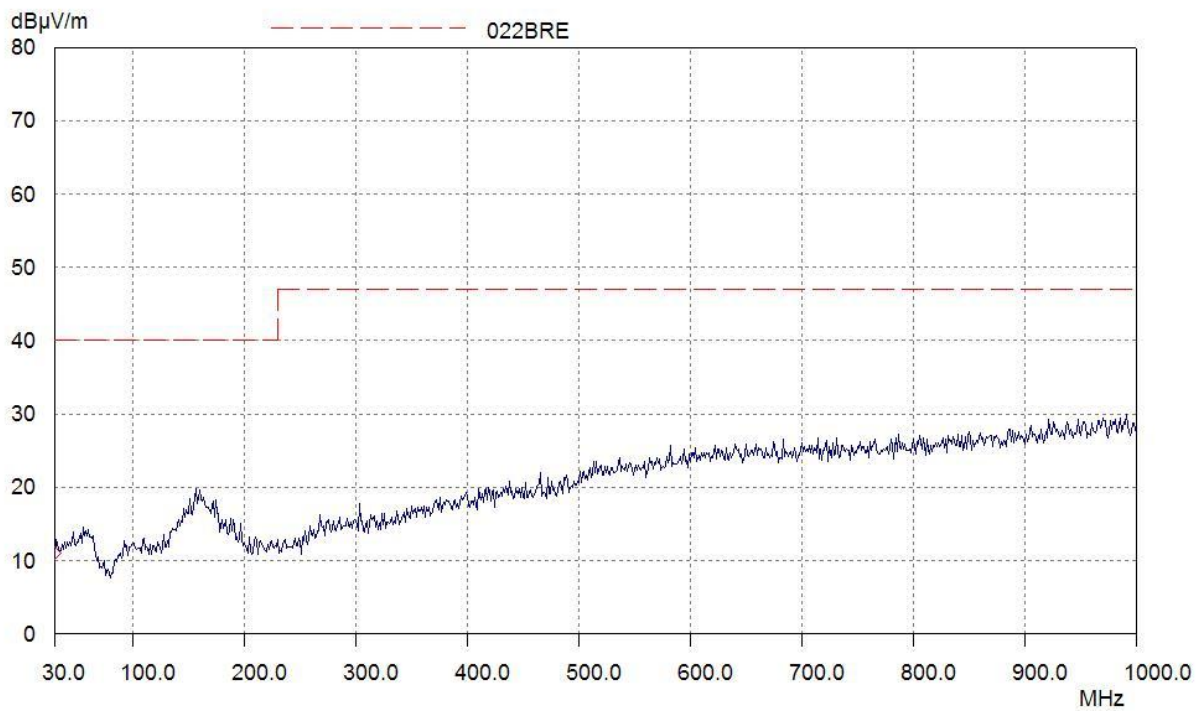



Hong Kong

Frequency Range of Fundamental Emission


Date of test : 5 February 2009
Test requirement : FCC Part 15 Section 15.249
Test method : ANSI C63.4:2003
Operating mode : On mode
Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Limits for Frequency Range of Fundamental Emission

Frequency MHz	Limits MHz
2456.9	2400-2483.5

Band Edge

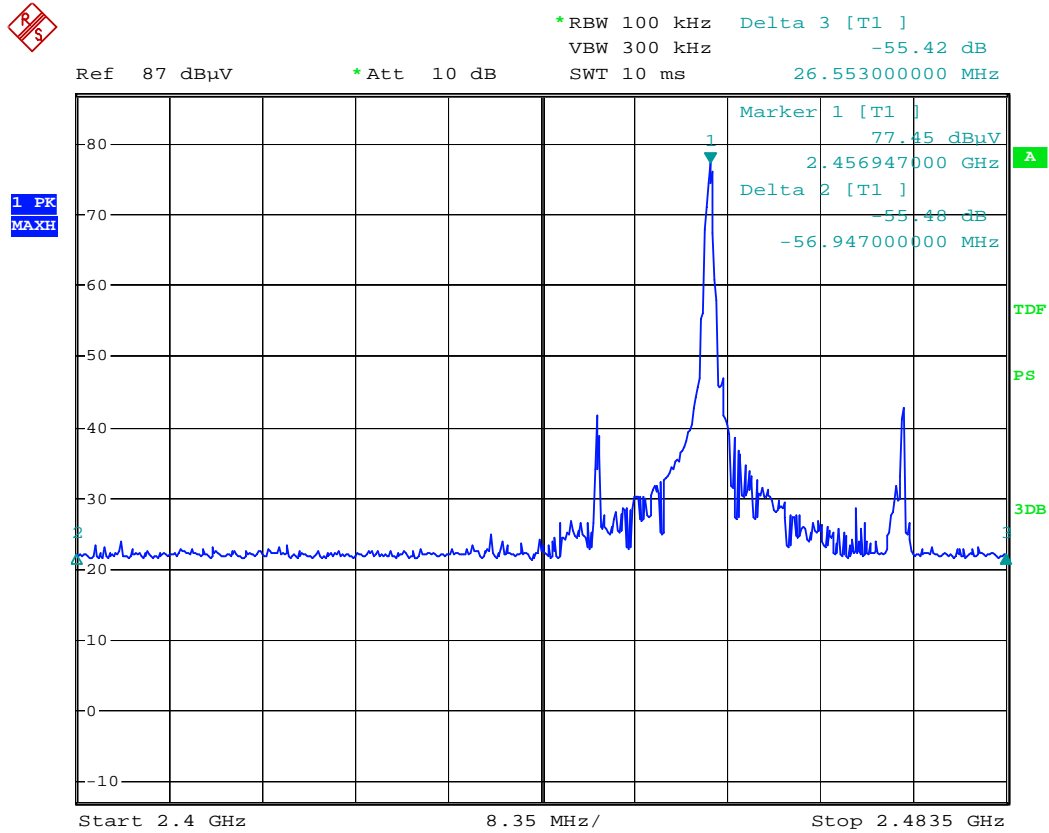

Band Edge (MHz)	dBc (dB)
2400.0	-55.5
2483.5	-55.4

Band Edge

Band Edge (MHz)	Highest emission of Fundamental dBuV/m at 2449.89 MHz		dBc	Field strength dBuV/m	
	P	AV		P	AV
2400	75.3	21.3	-55.5	19.8	0
2483.5	75.3	21.3	-55.4	19.9	0


NOTE: Band edge peak value is less than average limit of 54dBuV/m.

Duty Cycle Correction

Assuming any combination of short or long pulses may be obtained due to encoding the worst Case transmit duty cycle would be considered 0.2msec per 100msec = 0.2% duty cycle. Figure A and B show the characteristics of the pulse train.


$$\text{Duty Cycle Correction} = 20 \text{ Log } (0.002) = -54\text{dB}$$

Figure A (Pulse Train)

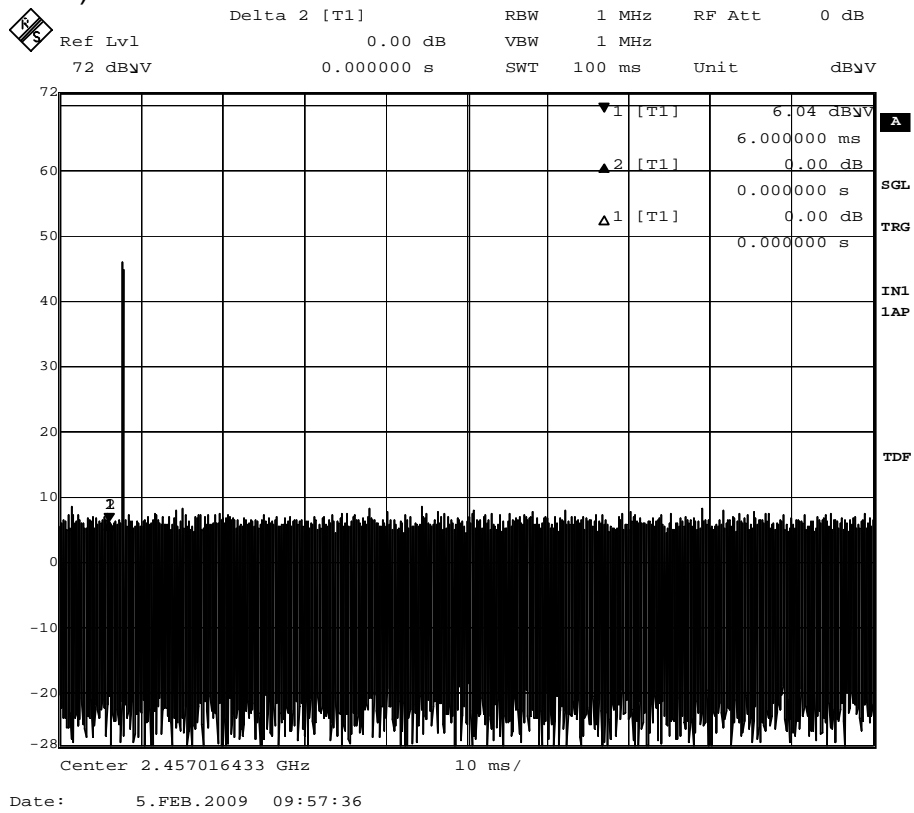

Duty Cycle Correction

Figure B (Pulse)

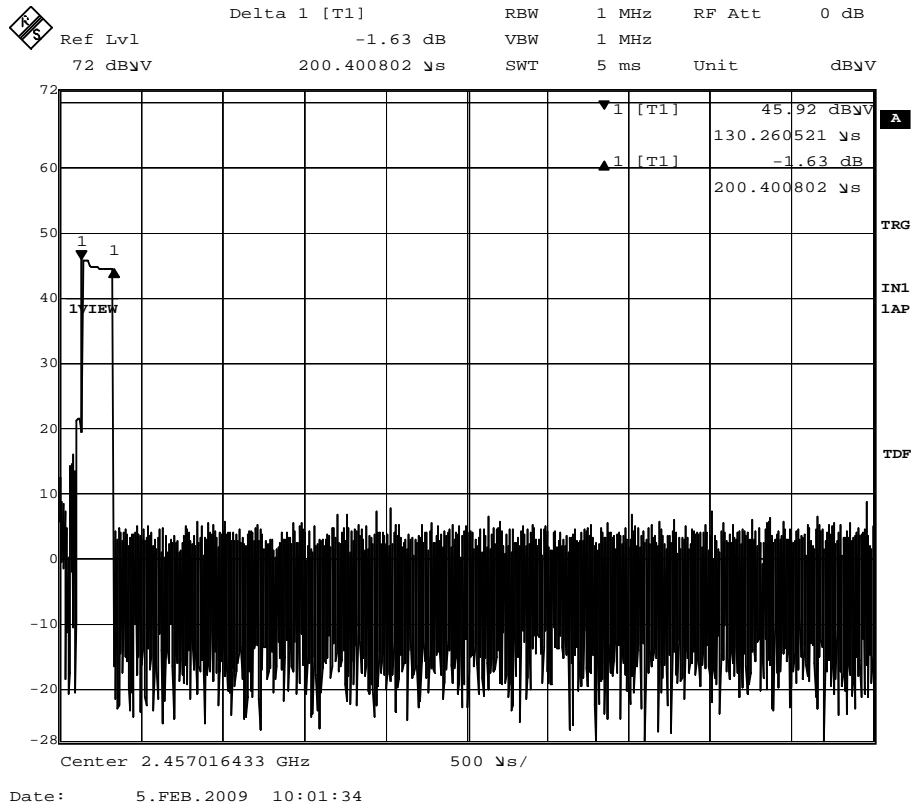

**Test Equipment List****Radiated Emission Test**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	DUE CAL. DATE
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2006/05/02	2009/05/02
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2006/08/23	2010/09/08
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248	2007/07/20	2009/08/20
EM020	HORN ANTENNA	EMCO	3115	4032	2006/07/11	2009/07/11
EM223	DOUBLE-RIDGED WAVEGUIDE HORN	EMCO	3116	00060088	2008/05/27	2010/05/27

7 Appendix A



8 Appendix B

Radiated Emission Test Set Up

