



Hong Kong

## FCC / IC – Test report

Report Number : **60/790.14.007.01** Date of Issue: April 25, 2014

Model : **Trip 300**

Product Type : **BIKE COMPUTER**

Applicant : Dayton Industrial Co., Ltd

Address : 2-12 Kwai Fat Road, Kwai Chung, New Territories, Hong Kong

Production Facility : Kendy Electronics (Dongguan) Co.Ltd,

Address : Xingsi Huangtang Village, Hengli Town, Dongguan City, Guangdong Province, P.R.China

Test Result :  **Positive**     **Negative**

Total pages including Appendices : 17

*TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*

Report Number: **60/790.14.007.01**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.  
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 1 of 17

Rev. no.: 2.1



## 1. Table of Contents

1. Table of Contents .....	2
2. Details about the Test Laboratory .....	3
3. Description of the Equipment Under Test .....	4
4. Summary of Test Standards .....	5
5. Summary of Test Standards and Results .....	6
6. General Remarks .....	7
7. Emission Test Results .....	8
7.1 Radiated Emission Test .....	8
7.2 20dB & 99% bandwidth measurement .....	12
7.3 Bandedge measurement .....	14
8. System Measurement Uncertainty .....	17



Hong Kong

## 2. Details about the Test Laboratory

### Details about the Test Laboratory

#### Test site 1

Company name: TÜV SÜD HONG KONG LTD.  
3/F, West Wing, Lakeside 2,  
10 Science Park West Avenue,  
Science Park, Shatin  
HK.

Telephone: 852 2776 1323

Fax: 852 2776 1372

#### Test site 2

Company name: TMC-Telecommunication Metrology Center of M.I.I.T  
No 52 Hua Yuanbei Road, Haidian District, Beijing, P.R.China



### 3. Description of the Equipment Under Test

#### Description of the Equipment Under Test

Product:	BIKE COMPUTER
Model no.:	Trip 300
Serial number:	NIL
Options and accessories:	NIL
FCC ID:	O4GTRIP300
IC:	7666A-TRIP300
Rated Voltage:	3 VDC
Rated Current:	NIL
Rated Power:	NIL
Frequency:	2457MHz
RF Transmission Frequency:	2457MHz
Antenna gain:	0 dBi
No. of Operated Channel:	1
Modulation:	GFSK
Description of the EUT:	Battery operated – 1x 3.0V CR2032 battery



#### 4. Summary of Test Standards

<b>Test Standards</b>	
FCC Part 15 Subpart C, Intentional Radiators, 10-1-12 Edition	PART 15 – RADIO FREQUENCY DEVICES Subpart C – Intentional Radiators
RSS-Gen Issue 3 December 2010	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 Issue 8 December 2010	RSS-210 — Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

## 5. Summary of Test Standards and Results

Emission Tests					
Test Condition	Pages	Test site	Test Result		
			Pass	Fail	N/A
Conducted Emission (47 CFR 15.207, 15.209 & RSS-GEN 7.2.4)	NIL	/	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Radiated Emission (47 CFR 15.249, 15.209 & RSS-210 A2.9, GEN 7.2.5 & RSS-GEN 6.1)	9	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth (47 CFR 15.215)	16	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
99% occupied bandwidth (RSS-GEN 4.6.1)	16	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Bandedge Emission (47 CFR 15.249)	19	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

## 6. General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: O4GTRIP300, complies with the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for IC: 7666A-TRIP300, complies with the IC RSS 210 and RSS-GEN Rules.

All the configurations of the product were tested and only the worst test results are listed in the report.

### SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed
- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.
- **Does not** fulfill the general approval requirements.


Sample Received Date: April 10, 2014

Testing Start Date: April 14, 2014

Testing End Date: April 28, 2014

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

  
Edmond FUNG



Prepared by:

  
CHAN Kwong Ngai

## 7. Emission Test Results

### 7.1 Radiated Emission Test

Date of test : April 16, 2014

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009

Operating mode : Transmit mode

Frequency channel : 2457MHz

Remarks : Fundamental

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Frequency (MHz)	Polarity (H/V)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
2457.000	H	87.5	114	-26.5	Peak
2457.000	H	86.8	94	-7.2	Average
2457.000	V	85.3	114	-28.7	Peak
2457.000	V	84.7	94	-9.3	Average

Remark: 1. The EUT was placed on the top of the turntable in test site area.  
 The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.  
 For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable. The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.  
 Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.  
 Adjust the emission and slightly height of the antenna to locate the position with maximum reading.



## Radiated Emission Test

Date of test : April 16, 2014  
 Test requirement : FCC Part 15  
 Test method : ANSI C63.4:2009  
 Operating mode : Transmit mode  
 Frequency channel : 2457MHz  
 Remarks : 9kHz-25GHz

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Frequency (MHz)	Polarity (H/V)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
466.380	H	16.8	46.00	-29.2	Quasi Peak
490.920	H	22.5	46.00	-23.5	Quasi Peak
750.060	H	19.9	46.00	-26.1	Quasi Peak
760.920	H	21.0	46.00	-25.0	Quasi Peak
4914.000	H	48.1	74.00	-25.9	Peak
4914.000	H	37.7	54.00	-16.3	Average
7371.000	H	56.3	74.00	-17.7	Peak
7371.000	H	50.6	54.00	-3.4	Average

Remark: 1.The EUT was placed on the top of the turntable in test site area.  
 The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.  
 For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable.  
 The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.  
 Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.  
 Adjust the emission and slightly height of the antenna to locate the position with maximum reading.

## Radiated Emission Test

Date of test : April 16, 2014

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009

Operating mode : Transmit mode

Frequency channel : 2457MHz

Remarks : 9kHz-25GHz

Test Result

Passed

Not Passed

Frequency (MHz)	Polarity (H/V)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
44.400	V	21.4	40.00	-19.6	Quasi Peak
490.920	V	23.5	46.00	-22.5	Quasi Peak
662.700	V	27.4	46.00	-18.6	Quasi Peak
687.300	V	24.5	46.00	-21.5	Quasi Peak
4914.000	V	46.7	74.00	-27.3	Peak
4914.000	V	37.5	54.00	-16.5	Average
7371.000	V	51.4	74.00	-22.6	Peak
7371.000	V	43.9	54.00	-10.1	Average

Remark: 1. The EUT was placed on the top of the turntable in test site area.  
 The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.  
 For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable.  
 The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.  
 Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.  
 Adjust the emission and slightly height of the antenna to locate the position with maximum reading.

## Test Equipment List

### Radiated Emission Test

DESCRIPTION	Type No.	Serial No.	Calibrated date	Calibrated until
Antenna	VULB9163	9163 330	2014.02.25	2015.02.24
Antenna	3117	00066577	2014.04.02	2015.04.01
Antenna	3160-09	00118388	2013.09.06	2014.09.05
Loop Antenna	6512	29604	2013.09.25	2014.09.24
Spectrum Analyzer	FSP 40	100378	2013.12.23	2014.12.22
EMI Test Receiver	ESCI	100701	2013.08.04	2014.08.03
Spectrum Analyzer	FSV40	100903	2014.01.27	2015.01.26
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.18	2015.02.17
Amplifier	150A250	326446	2014.03.19	2015.03.17
Temp. & Humid. Chamber	FACT5-2.0	4166	2013.11.22	2014.11.21



Hong Kong

### 7.2 20dB & 99% bandwidth measurement

Date of test : April 16, 2014

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Operating mode : Transmit mode

Frequency channel : 2457MHz

Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

20 dB Bandwidth	99% OBW	Result
kHz	kHz	
160.3	247.4	Pass

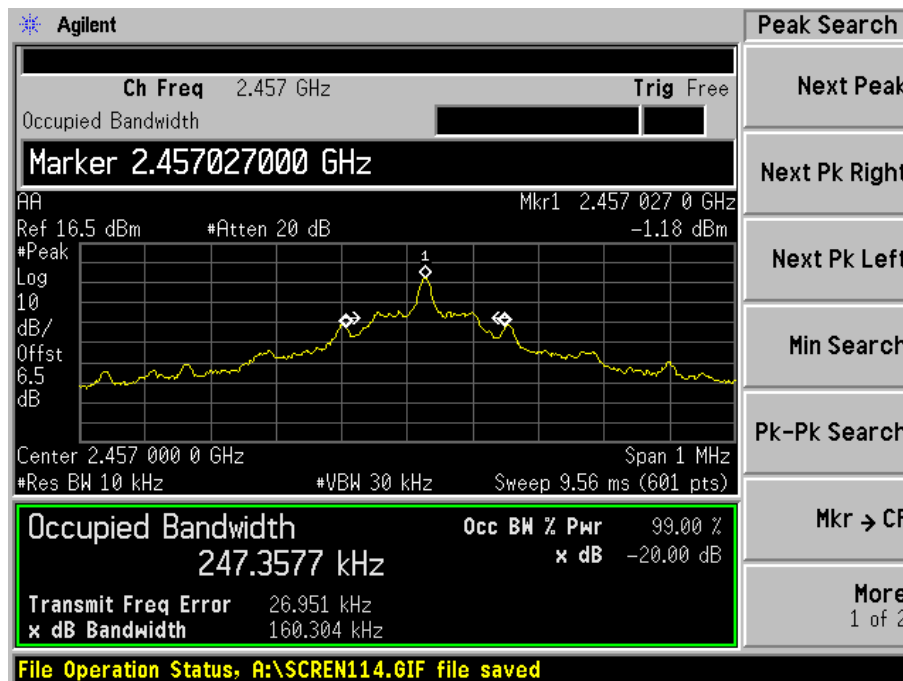



Hong Kong

## Test Equipment List


### 20dB & 99% bandwidth measurement

DESCRIPTION	Type No.	Serial No.	Calibrated date	Calibrated until
Agilent	E4445A	MY46181814	2013.12.11	2014.12.10

### 7.3 Bandedge measurement

Date of test : April 16, 2014  
 Test requirement : FCC Part 15  
 Test method : ANSI C63.4:2009  
 Operating mode : Transmit mode  
 Frequency channel : 2457MHz  
 Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

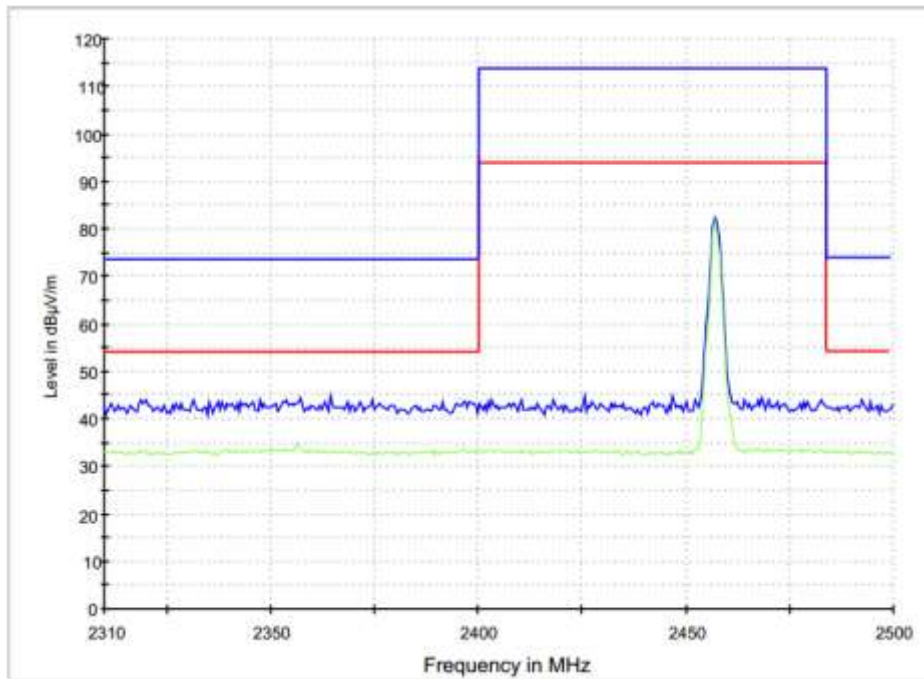


Band	Frequency (MHz)	Polarity (H/V)	Test result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
Low	2396.000	H	43.7	74.0	-30.3	Peak
	2396.000	H	33.2	54.0	-20.8	Average
High	2491.000	H	44.1	74.0	-29.9	Peak
	2491.000	H	33.8	54.0	-20.2	Average

Remark: 1. Use the following spectrum analyzer settings:  
 Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation  
 RBW ≥ 1% of the span  
 VBW ≥ RBW  
 Sweep = auto  
 Detector function = peak

Date of test : April 16, 2014  
 Test requirement : FCC Part 15  
 Test method : ANSI C63.4:2009  
 Operating mode : Transmit mode  
 Frequency channel : 2457MHz  
 Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

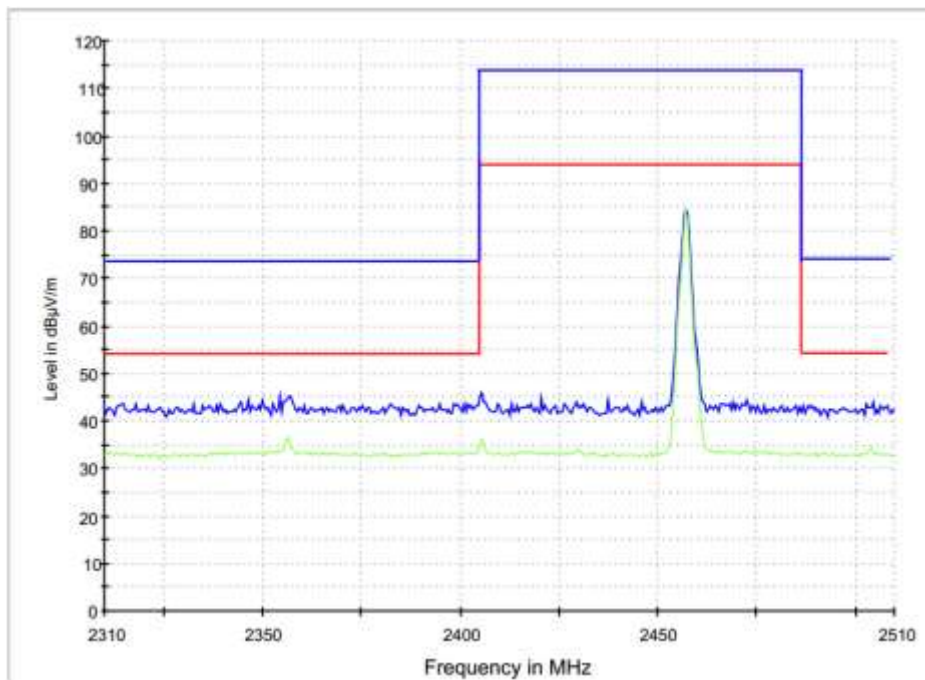

Band	Frequency (MHz)	Polarity (H/V)	Test result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
Low	2399.000	V	45.2	74.0	-28.8	Peak
	2399.000	V	35.5	54.0	-18.5	Average
High	2486.000	V	43.9	74.0	-30.1	Peak
	2486.000	V	34.1	54.0	-19.9	Average

Remark: 1. Use the following spectrum analyzer settings:  
 Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation  
 RBW ≥ 1% of the span  
 VBW ≥ RBW  
 Sweep = auto  
 Detector function = peak



Hong Kong

## Test Equipment List

### Bandedge measurement

DESCRIPTION	Type No.	Serial No.	Calibrated date	Calibrated until
Antenna	VULB9163	9163 330	2014.02.25	2015.02.24
Antenna	3117	00066577	2014.04.02	2015.04.01
Antenna	3160-09	00118388	2013.09.06	2014.09.05
Loop Antenna	6512	29604	2013.09.25	2014.09.24
Spectrum Analyzer	FSP 40	100378	2013.12.23	2014.12.22
EMI Test Receiver	ESCI	100701	2013.08.04	2014.08.03
Spectrum Analyzer	FSV40	100903	2014.01.27	2015.01.26
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.18	2015.02.17
Amplifier	150A250	326446	2014.03.19	2015.03.17
Temp. & Humid. Chamber	FACT5-2.0	4166	2013.11.22	2014.11.21



## 8. System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength (dB $\mu$ V/m)	U=3.59dB (9kHz-30MHz) U=5.08dB (30MHz-1GHz) U=4.56dB (1GHz-18GHz) U=4.42dB (18GHz-25GHz)
CE	Disturbance Voltage (dB $\mu$ V)	U=2.7dB