

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 (e) and subpart B
RSS-210 issue 8 Annex 1, ICES-003 Issue 5:2012

FOR:

Elpas Solutions Ltd.
Curtain PIR detector
Model: 5-PIR00433
FCC ID:O4X5-PIR00433
IC:1467G-5PIR00433

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 issue 8 Annex 1 requirements	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions	11
7.3	Occupied bandwidth test	23
7.4	Antenna requirements	26
8	Unintentional emissions	27
8.1	Radiated emission measurements	27
9	APPENDIX A Test equipment and ancillaries used for tests	31
10	APPENDIX B Measurement uncertainties	32
11	APPENDIX C Test laboratory description	33
12	APPENDIX D Specification references	33
13	APPENDIX E Test equipment correction factors	34
14	APPENDIX F Abbreviations and acronyms	45

1 Applicant information

Client name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1421
Fax: +972 3768 1415
E-mail: MErenkrantz@tycoint.com
Contact name: Mr. Meir Erenkrantz

2 Equipment under test attributes

Product name: Curtain PIR detector
Product type: Transceiver operating at 433 MHz
Model(s): 5-PIR00433
Serial number: Prototype
Hardware version: 00
Software release: B1
Receipt date: 3/8/2012

3 Manufacturer information

Manufacturer name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1421
Fax: +972 3768 1415
E-Mail: MErenkrantz@tycoint.com
Contact name: Mr. Meir Erenkrantz




4 Test details

Project ID: 22955
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 3/8/2012
Test completed: 2/17/2013
Test specification(s): FCC 47CFR part 15, subpart C, §15.231(e) subpart B;
RSS-210 issue 8 Annex 1, RSS-Gen issue 3, ICES-003 issue 5:2012

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements	Pass
FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 7.2.4, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / RSS-Gen, Section 7.2.4, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 6.1, ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	February 17, 2013	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	March 6, 2013	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	April 4, 2013	




6 EUT description

6.1 General information

The EUT is an access unit with PIR detector, powered by 3 V battery, comprises 433 MHz transceiver.

6.2 Test configuration

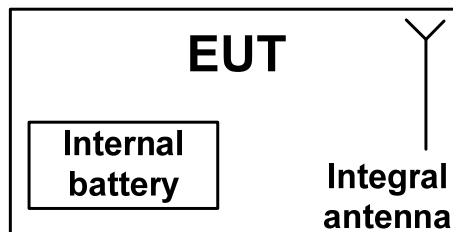

6.3 Changes made in EUT

No changes were performed in the EUT.



6.4 Transmitter characteristics

Type of equipment					
X	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Operating frequency		433.92 MHz			
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm
		Field strength at 3 m distance			89.6 dB(μV/m)
Is transmitter output power variable?		X	No		
			Yes		
			continuous variable		
			stepped variable with stepsize		
		minimum RF power		dBm	
		maximum RF power		dBm	
Antenna connection					
	unique coupling		standard connector	X	integral
				X	with temporary RF connector
					without temporary RF connector
Antenna/s technical characteristics					
Type	Manufacturer		Model number		
Internal	Elpas		Built-in helical antenna		
Transmitter aggregate data rate/s		19.2 kbps			
Type of modulation		ASK			
Transmitter power source					
X	Battery	Nominal rated voltage	3.0 VDC	Battery type	Lithium
	DC	Nominal rated voltage	VDC		
	AC mains	Nominal rated voltage	VAC	Frequency	
Common power source for transmitter and receiver				X	yes
					no



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	1/29/2013		
Temperature: 23 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: 3V battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 issue 8 Annex 1 requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- Duration of each transmission shall not be greater than 1 second;
- Silent period between transmissions shall be at least 30 times the duration of the transmission;
- Silent period between transmissions shall be in no case less than 10 seconds.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in the associated plots. The test results were recorded in Table 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test





Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	1/29/2013		
Temperature: 23 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: 3V battery
Remarks:			


Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
Duration of each transmission shall not be greater than 1 second	Plot 7.1.1	Comply
Silent period between transmissions shall be at least 30 times the duration of the transmission	Plot 7.1.2	Comply
Silent period between transmissions shall be in no case less than 10 seconds	Plot 7.1.2	Comply




Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	1/29/2013		
Temperature: 23 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: 3V battery
Remarks:			

Plot 7.1.1 Transmitter pulse duration

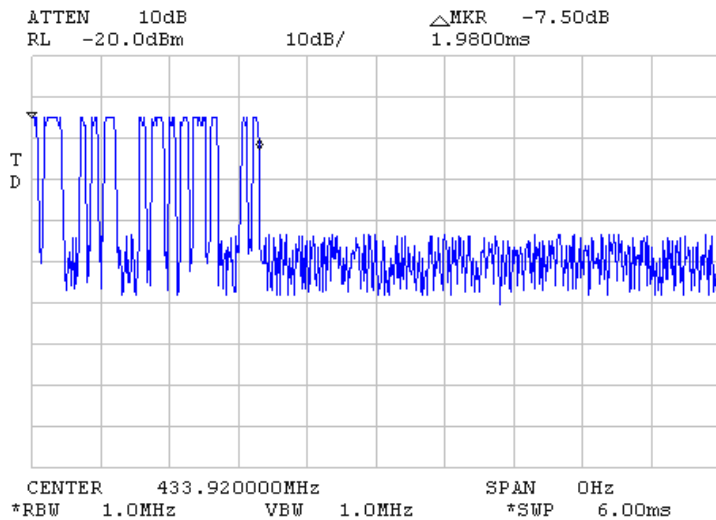

Plot 7.1.2 Transmission pulse period

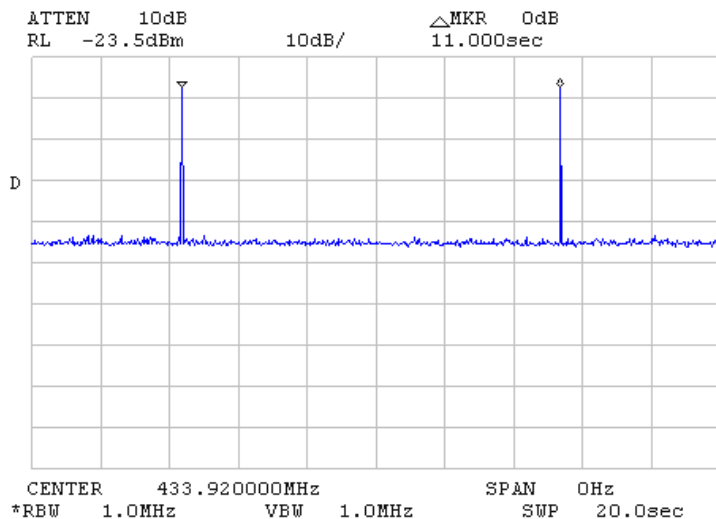



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):	1/29/2013		
Temperature: 23 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: 3V battery
Remarks:			

Table 7.1.2 Total duration of transmissions

Total transmission duration, ms	Silent period between transmissions, s	Silent period between transmissions limit, s	Margin, s	Verdict
1.98	11	10	-1	Pass

Reference numbers of test equipment used

HL 1424							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.9	92.9	72.9

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	72.9	52.9
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$
 where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

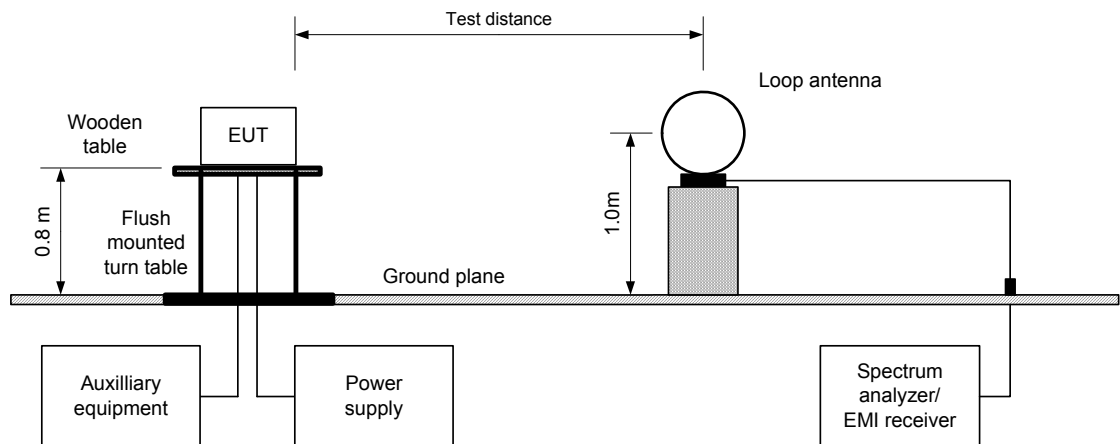



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

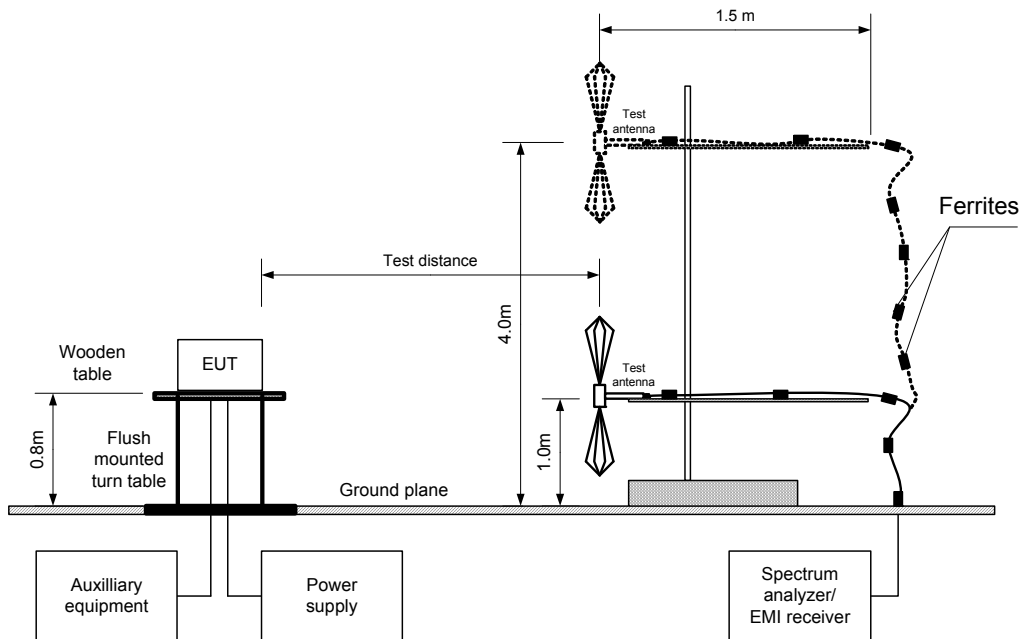



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: ASK
 MODULATING SIGNAL: PRBS
 BIT RATE: 19.2 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 - 4500 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 1.0 MHz (above 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Log periodic (200 MHz – 1000 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**		Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
Fundamental emission***											
433.9245	V	1.4	360	89.60	92.90	-3.30	-34	55.60	72.90	-17.30	Pass
Spurious emissions											
867.8555	V	1.2	300	41.68	72.90	-31.22	-34	7.68	52.90	-45.22	Pass
1301.628	V	1.2	330	47.87	74.00	-26.13	-34	13.87	54.00	-40.13	
4339.403	V	1.3	360	51.73	74.00	-22.27	-34	17.73	54.00	-36.27	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = dB below (negative if above) specification limit.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, s	Duration, ms	Period, ms		
2	11	NA	NA	NA	-34

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$$

Reference numbers of test equipment used

HL 0446	HL 0569	HL 2432	HL 2780	HL 3206	HL 3531	HL 3901	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: ASK
 MODULATING SIGNAL: PRBS
 BIT RATE: 19.2 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emission was found								Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3617				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict:		PASS	
Date(s):	3/18/2012				
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery		
Remarks:					

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-210, Section 2.7


MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)
 INPUT VOLTAGE: Unom 3V

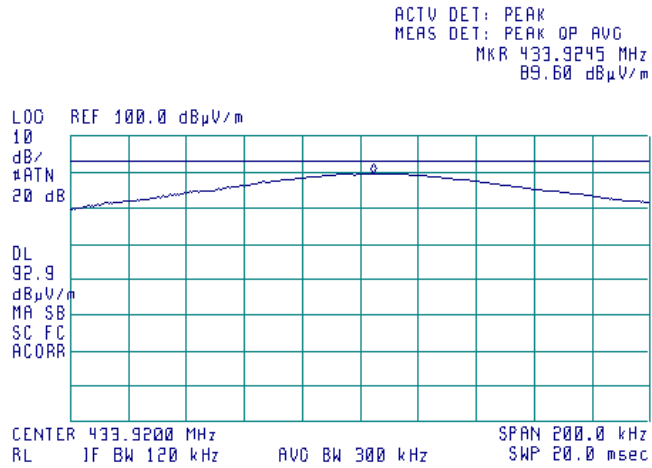

Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Typical (Vertical)
 INPUT VOLTAGE: Unom 3V

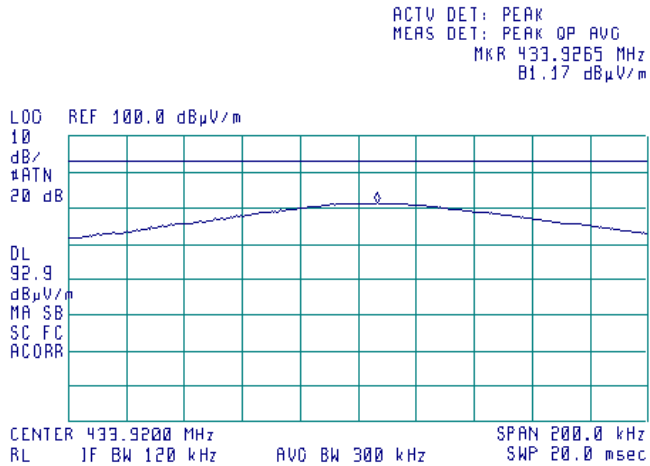




Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			


Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

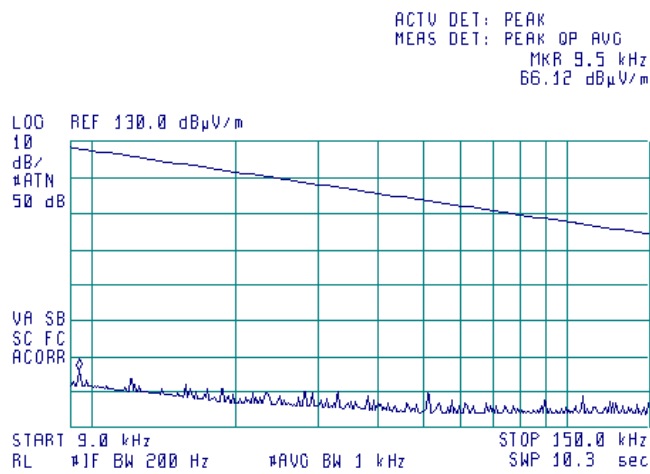

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

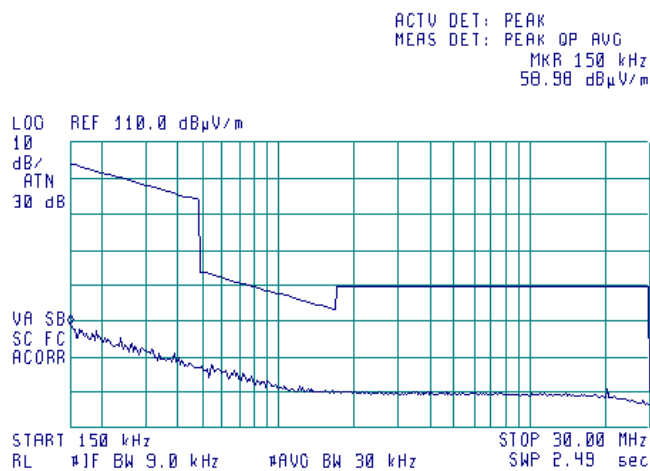




Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			


Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Typical (Vertical)

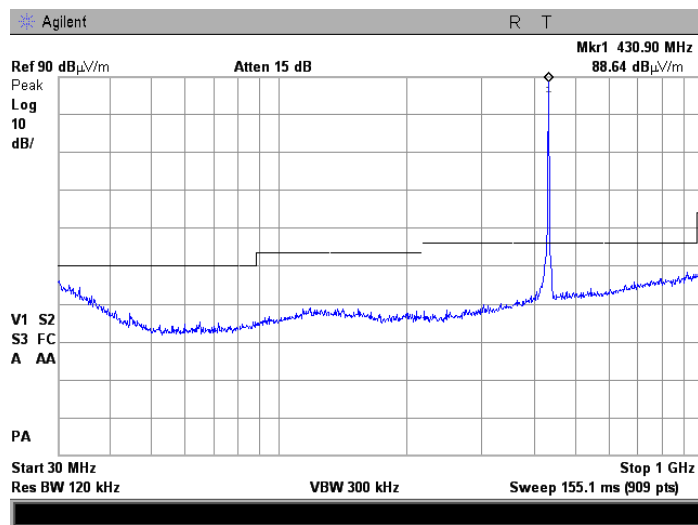

Plot 7.2.6 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Typical (Vertical)

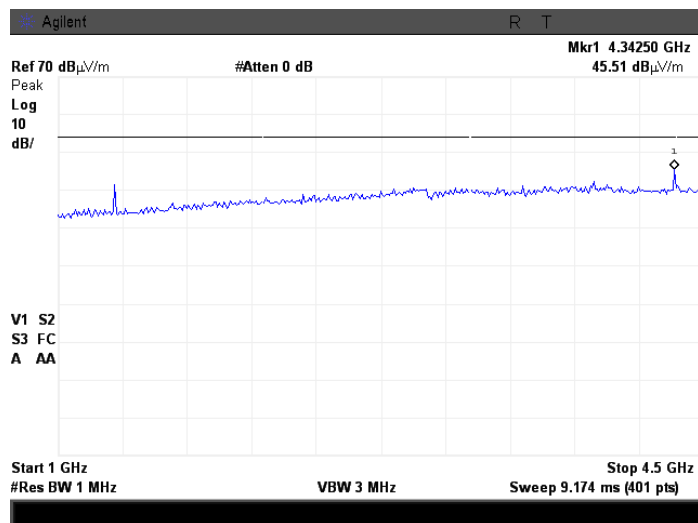




Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			


Plot 7.2.7 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

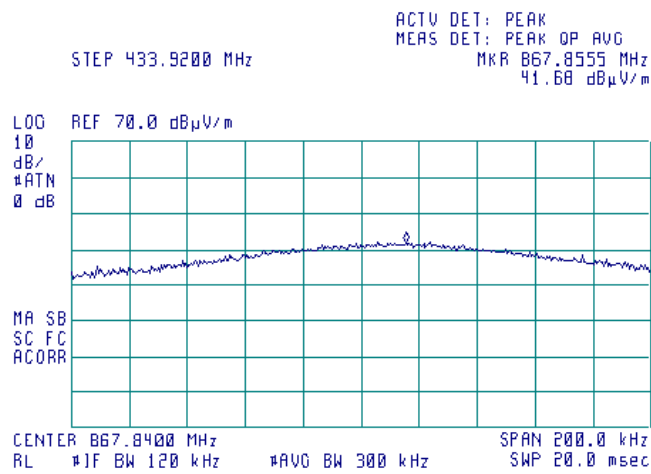

Plot 7.2.8 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Typical (Vertical)

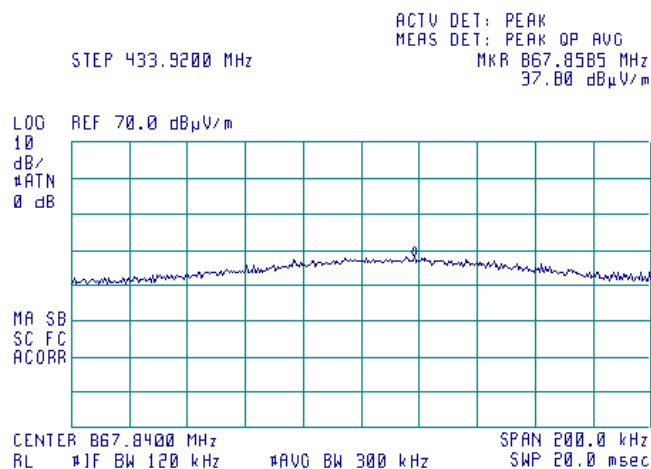




Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			


Plot 7.2.9 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

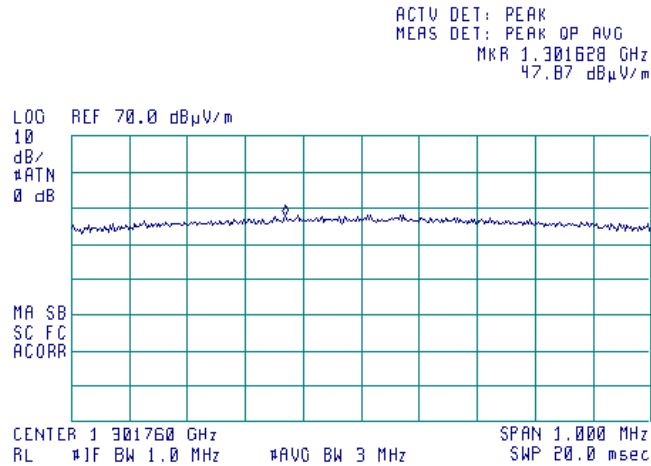

Plot 7.2.10 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

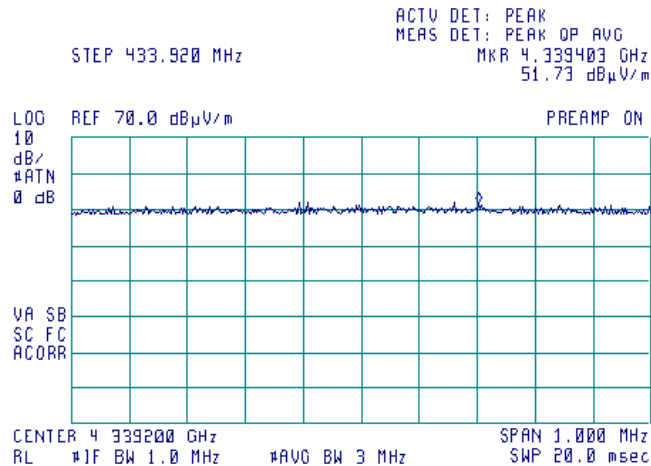



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 41 %	Power Supply: 3V battery
Remarks:			

Intentionally blank



Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/17/2013		
Temperature: 21.1 °C	Air Pressure: 1016 hPa	Relative Humidity: 50 %	Power Supply: 3V battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0 dBc*/99% BW	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Occupied bandwidth test setup





Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/17/2013		
Temperature: 21.1 °C	Air Pressure: 1016 hPa	Relative Humidity: 50 %	Power Supply: 3V battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: ASK
 MODULATING SIGNAL: ID code
 BIT RATE: 19.2 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	67.5	0.25	1084.8	-1017.3	Pass

Reference numbers of test equipment used

HL 1425	HL 4135							
---------	---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth			
Test procedure: ANSI C63.4, Section 13.1.7			
Test mode: Compliance	Verdict: PASS		
Date(s): 2/17/2013			
Temperature: 21.1 °C	Air Pressure: 1016 hPa	Relative Humidity: 50 %	Power Supply: 3V battery
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

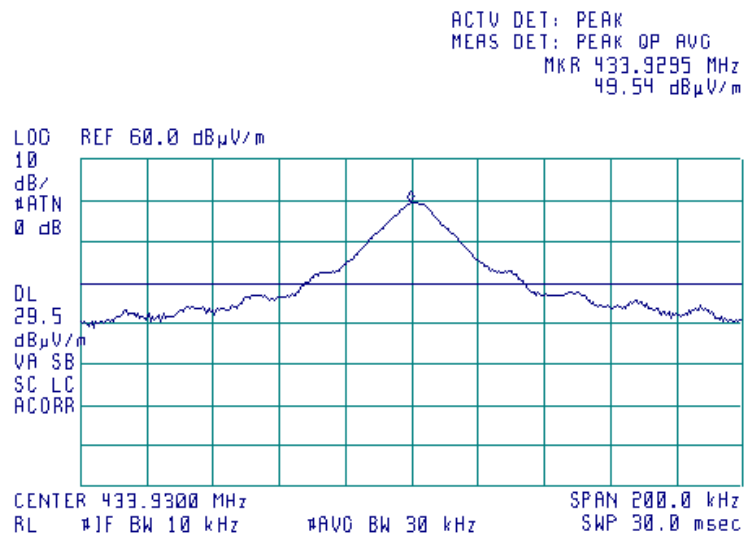

Plot 7.3.2 Occupied bandwidth test result

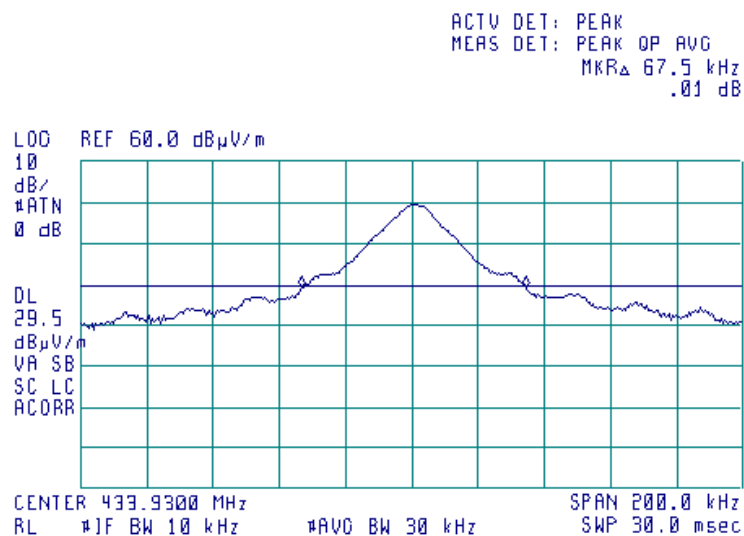



Test specification:	FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/18/2012		
Temperature: 22 °C	Air Pressure: 1031 hPa	Relative Humidity: 38 %	Power Supply: 3V battery
Remarks:			


7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

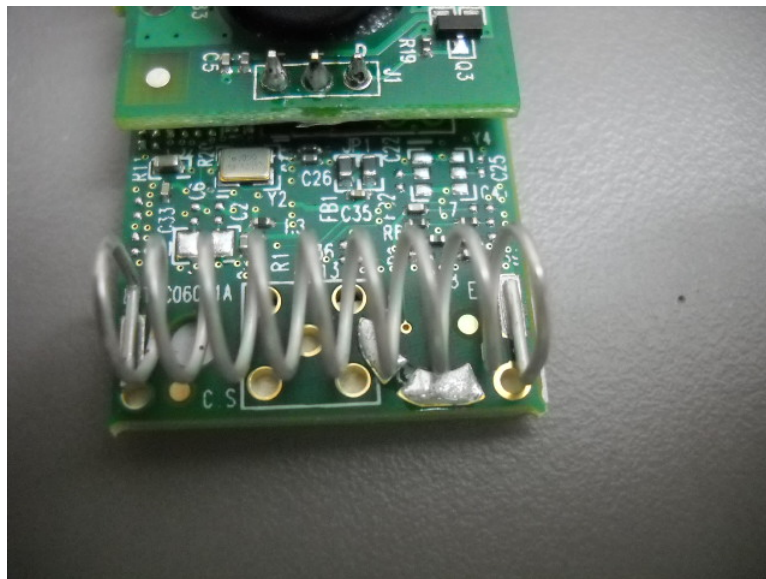



Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/8/2012		
Temperature: 21 °C	Air Pressure: 1021 hPa	Relative Humidity: 39 %	Power Supply: 3V battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1 and in Table 8.1.2.

Table 8.1.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003 section 6.2

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S2} = Lim_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen Section 6.1

Frequency, MHz	Field strength limit at 3 m test distance, dB(μ V/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 rd harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.


8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.



Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/8/2012		
Temperature: 21 °C	Air Pressure: 1021 hPa	Relative Humidity: 39 %	Power Supply: 3V battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

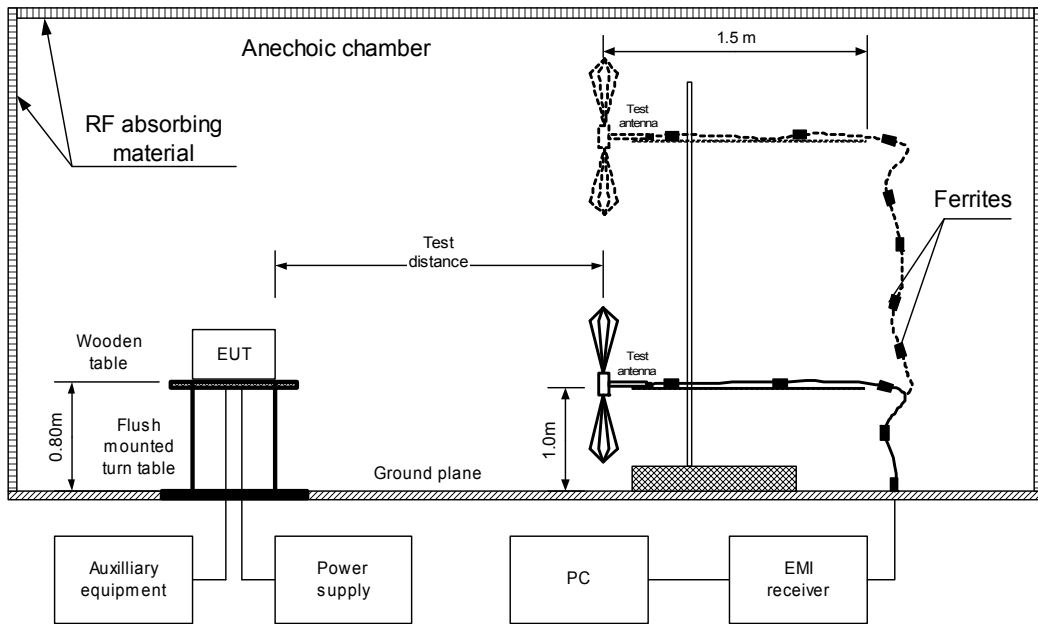



Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict: PASS	
Date(s):	3/8/2012		
Temperature: 21 °C	Air Pressure: 1021 hPa	Relative Humidity: 39 %	Power Supply: 3V battery
Remarks:			

Table 8.1.3 Radiated emission test results

EUT SET UP: TABLE-TOP
 LIMIT: Class B
 EUT OPERATING MODE: Receive / Stand-by
 TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m

DETECTORS USED: PEAK / QUASI-PEAK
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								Pass

DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz – 4500 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2909	HL 2871	HL 2883	HL 3390	HL 3623
---------	---------	---------	---------	---------	---------	---------	---------


Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	3/8/2012		
Temperature: 21 °C	Air Pressure: 1021 hPa	Relative Humidity: 39 %	Power Supply: 3V battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

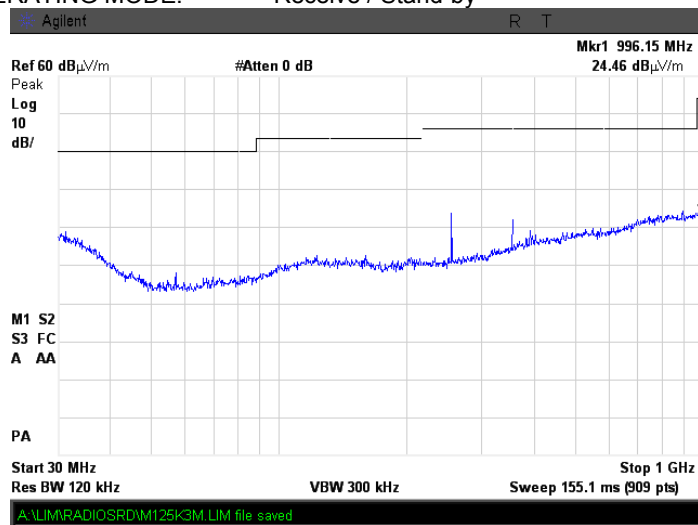

Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

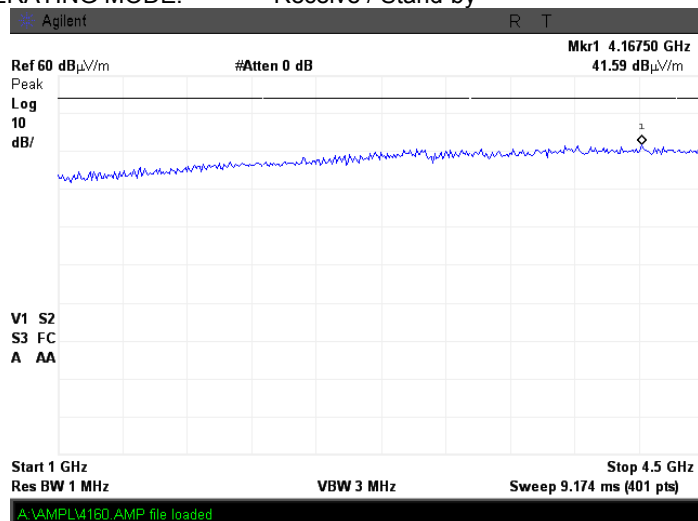

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-12	03-Jul-13
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	24-Sep-12	24-Sep-13
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	20-May-12	20-May-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	26-Aug-12	26-Aug-13
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	07-Dec-12	07-Dec-13
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	07-Dec-12	07-Dec-13
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	09-Jul-12	09-Jul-13
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-12	04-Dec-13
2883	Cable, 18 GHz N-type, M-F, 3 m	Bird Electronic Corp.	TC-MNFN-3.0	211539 003	04-Dec-12	04-Dec-13
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	20-Dec-12	20-Dec-13
3206	Cable 40 GHz, 0.6 m	Gore	GOR245	05118336	30-Dec-12	30-Dec-13
3390	Microwave Cable Assembly, 26.5 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3390	06-Feb-13	06-Feb-14
3531	Amplifier, low noise, 2 to 8 GHz	Quinstar Technology	QLJ-02084040-J0	111590020 02	25-Dec-12	25-Dec-13
3617	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	RG 214/U	NA	30-Dec-12	30-Dec-13
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	09-May-12	09-May-13
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1225/2A	06-Feb-13	06-Feb-14
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 136	11-Apr-12	11-Apr-13

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB
Vertical polarization	Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2012	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement



13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8
28	7.8
30	7.8
40	7.2
60	7.1
70	8.5
80	9.4
90	9.8
100	9.7
110	9.3
120	8.8
130	8.7
140	9.2
150	9.8
160	10.2
170	10.4
180	10.4
190	10.3
200	10.6
220	11.6
240	12.4
260	12.8
280	13.7
300	14.7
320	15.2
340	15.4
360	16.1
380	16.4
400	16.6
420	16.7
440	17.0
460	17.7
480	18.1
500	18.5
520	19.1
540	19.5
560	19.8
580	20.6
600	21.3
620	21.5
640	21.2
660	21.4
680	21.9
700	22.2
720	22.2
740	22.1
760	22.3
780	22.6
800	22.7
820	22.9
840	23.1
860	23.4
880	23.8
900	24.1
920	24.1

Frequency, MHz	Antenna Factor, dB(1/m)
940	24.0
960	24.1
980	24.5
1000	24.9
1020	25.0
1040	25.2
1060	25.4
1080	25.6
1100	25.7
1120	26.0
1140	26.4
1160	27.0
1180	27.0
1200	26.7
1220	26.5
1240	26.5
1260	26.5
1280	26.6
1300	27.0
1320	27.8
1340	28.3
1360	28.2
1380	27.9
1400	27.9
1420	27.9
1440	27.8
1460	27.8
1480	28.0
1500	28.5
1520	28.9
1540	29.6
1560	29.8
1580	29.6
1600	29.5
1620	29.3
1640	29.2
1660	29.4
1680	29.6
1700	29.8
1720	30.3
1740	30.8
1760	31.1
1780	31.0
1800	30.9
1820	30.7
1840	30.6
1860	30.6
1880	30.6
1900	30.6
1920	30.7
1940	30.9
1960	31.2
1980	31.6
2000	32.0

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



Cable loss
Cable coaxial, Bird, 18 GHz, N-type, M-F, model TC-MNFN-3.0, S/N 211539 003
HL 2883

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	5750	1.70	12000	2.46
30	0.12	6000	1.75	12250	2.48
100	0.21	6250	1.80	12500	2.52
250	0.34	6500	1.81	12750	2.50
500	0.47	6750	1.86	13000	2.54
750	0.59	7000	1.86	13250	2.48
1000	0.67	7250	1.92	13500	2.63
1250	0.76	7500	1.96	13750	2.65
1500	0.84	7750	1.98	14000	2.72
1750	0.92	8000	2.02	14250	2.67
2000	0.98	8250	2.03	14500	2.70
2250	1.05	8500	2.05	14750	2.72
2500	1.12	8750	2.11	15000	2.79
2750	1.17	9000	2.17	15250	2.80
3000	1.22	9250	2.17	15500	2.83
3250	1.27	9500	2.20	15750	2.75
3500	1.33	9750	2.19	16000	2.82
3750	1.38	10000	2.22	16250	2.85
4000	1.42	10250	2.25	16500	2.90
4250	1.46	10500	2.30	16750	2.89
4500	1.51	10750	2.28	17000	2.88
4750	1.54	11000	2.32	17250	2.85
5000	1.59	11250	2.34	17500	2.96
5250	1.62	11500	2.39	17750	3.04
5500	1.65	11750	2.42	18000	3.04



Cable loss
Cable coaxial, GORE-TEX, GOR245, 40 GHz, 0.6 m, SMA-SMA, S/N 05118336
HL 3206

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	4900	0.85	10000	1.20	15200	1.51	29500	1.94
30	0.09	5000	0.85	10100	1.23	15300	1.56	30000	2.11
50	0.10	5100	0.86	10200	1.24	15400	1.54	30500	2.25
100	0.14	5200	0.87	10300	1.25	15500	1.55	31000	2.23
200	0.18	5300	0.88	10400	1.24	15600	1.50	31500	2.24
300	0.22	5400	0.89	10500	1.20	15700	1.56	32000	2.21
400	0.26	5500	0.90	10600	1.23	15800	1.50	32500	2.19
500	0.29	5600	0.92	10700	1.25	15900	1.58	33000	2.24
600	0.31	5700	0.93	10800	1.28	16000	1.56	33500	2.26
700	0.33	5800	0.93	10900	1.35	16100	1.59	34000	2.25
800	0.35	5900	0.95	11000	1.30	16200	1.57	34500	2.28
900	0.38	6000	0.93	11100	1.31	16300	1.59	35000	2.27
1000	0.39	6100	0.97	11200	1.31	16400	1.57	35500	2.31
1100	0.41	6200	0.95	11300	1.35	16500	1.60	36000	2.36
1200	0.42	6300	0.99	11400	1.32	16600	1.60	36500	2.39
1300	0.45	6400	0.98	11500	1.38	16700	1.63	37000	2.39
1400	0.46	6500	0.99	11600	1.33	16800	1.66	37500	2.41
1500	0.48	6600	0.99	11700	1.37	16900	1.64	38000	2.40
1600	0.49	6700	0.99	11800	1.36	17000	1.66	38500	2.40
1700	0.50	6800	0.99	11900	1.42	17100	1.65	39000	2.54
1800	0.52	6900	1.02	12000	1.34	17200	1.67	39500	2.39
1900	0.53	7000	1.02	12100	1.41	17300	1.66	40000	2.48
2000	0.53	7100	1.06	12200	1.36	17400	1.69		
2100	0.54	7200	1.05	12300	1.40	17500	1.66		
2200	0.55	7300	1.02	12400	1.34	17600	1.69		
2300	0.56	7400	1.03	12500	1.39	17700	1.70		
2400	0.57	7500	1.04	12600	1.40	17800	1.74		
2500	0.59	7600	1.05	12700	1.42	17900	1.67		
2600	0.60	7700	1.10	12800	1.37	18000	1.72		
2700	0.62	7800	1.11	12900	1.39	18500	1.72		
2800	0.62	7900	1.10	13000	1.40	19000	1.78		
2900	0.65	8000	1.10	13100	1.42	19500	1.77		
3000	0.65	8100	1.10	13200	1.41	20000	1.82		
3100	0.66	8200	1.10	13300	1.43	20500	1.82		
3200	0.67	8300	1.16	13400	1.45	21000	1.94		
3300	0.69	8400	1.15	13500	1.45	21500	1.92		
3400	0.70	8500	1.20	13600	1.54	22000	2.07		
3500	0.71	8600	1.19	13700	1.54	22500	1.90		
3600	0.71	8700	1.15	13800	1.49	23000	1.96		
3700	0.73	8800	1.16	13900	1.50	23500	1.88		
3800	0.74	8900	1.19	14000	1.50	24000	1.96		
3900	0.75	9000	1.18	14100	1.52	24500	1.96		
4000	0.76	9100	1.23	14200	1.60	25000	2.10		
4100	0.76	9200	1.20	14300	1.57	25500	2.05		
4200	0.78	9300	1.20	14400	1.57	26000	2.05		
4300	0.79	9400	1.19	14600	1.50	26500	2.05		
4400	0.80	9500	1.23	14700	1.54	27000	1.97		
4500	0.80	9600	1.21	14800	1.51	27500	2.09		
4600	0.82	9700	1.22	14900	1.54	28000	2.10		
4700	0.82	9800	1.20	15000	1.57	28500	2.05		
4800	0.83	9900	1.18	15100	1.56	29000	2.08		



Cable loss
Cable coaxial, Microwave Cable Assembly, 104EA, 18 GHz, 1.0 m
Suhner Sucoflex, HL 3390

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.03	4800	0.55	9800	0.89	14900	1.07
30	0.04	4900	0.56	9900	0.89	15000	1.07
50	0.05	5000	0.57	10000	0.86	15100	1.08
100	0.07	5100	0.58	10100	0.86	15200	1.07
200	0.10	5200	0.58	10200	0.88	15300	1.09
300	0.12	5300	0.59	10300	0.92	15400	1.10
400	0.14	5400	0.59	10400	0.94	15500	1.10
500	0.16	5500	0.60	10500	0.96	15600	1.12
600	0.17	5600	0.61	10600	0.93	15700	1.15
700	0.18	5700	0.61	10700	0.89	15800	1.15
800	0.20	5800	0.63	10800	0.89	15900	1.17
900	0.21	5900	0.63	10900	0.88	16000	1.14
1000	0.23	6000	0.64	11000	0.92	16100	1.14
1100	0.24	6100	0.64	11100	0.91	16200	1.15
1200	0.25	6200	0.64	11200	0.89	16300	1.14
1300	0.27	6300	0.65	11300	0.88	16400	1.13
1400	0.28	6400	0.65	11400	0.88	16500	1.13
1500	0.28	6500	0.66	11500	0.90	16600	1.13
1600	0.30	6600	0.67	11600	0.94	16700	1.14
1700	0.31	6700	0.67	11700	0.96	16800	1.14
1800	0.32	6800	0.67	11800	0.92	16900	1.14
1900	0.33	6900	0.68	11900	0.92	17000	1.14
2000	0.34	7000	0.67	12000	0.91	17100	1.15
2100	0.35	7100	0.68	12100	0.92	17200	1.14
2200	0.35	7200	0.69	12200	0.95	17300	1.15
2300	0.36	7300	0.69	12300	0.98	17400	1.15
2400	0.37	7400	0.68	12400	0.96	17500	1.16
2500	0.39	7500	0.69	12500	0.99	17600	1.16
2600	0.40	7600	0.70	12600	0.96	17700	1.16
2700	0.41	7700	0.71	12700	0.93	17800	1.19
2800	0.42	7800	0.72	12800	0.94	17900	1.21
2900	0.42	7900	0.72	12900	0.98	18000	1.25
3000	0.43	8000	0.72	13000	0.99		
3100	0.44	8100	0.73	13100	0.99		
3200	0.45	8200	0.74	13200	0.99		
3300	0.46	8300	0.75	13300	0.99		
3400	0.46	8400	0.74	13400	1.00		
3500	0.47	8500	0.73	13500	1.02		
3600	0.47	8600	0.73	13600	1.05		
3700	0.47	8700	0.75	13700	1.03		
3800	0.49	8800	0.77	13800	1.02		
3900	0.49	8900	0.77	13900	1.03		
4000	0.50	9000	0.77	14000	1.03		
4100	0.51	9100	0.77	14100	1.05		
4200	0.52	9200	0.78	14200	1.05		
4300	0.52	9300	0.80	14300	1.04		
4400	0.53	9400	0.82	14400	1.03		
4500	0.53	9500	0.82	14600	1.06		
4600	0.54	9600	0.83	14700	1.07		
4700	0.56	9700	0.89	14800	1.08		



Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3617

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2200	2.97	4500	5.10
50	0.33	2300	3.06	4600	5.20
100	0.48	2400	3.16	4700	5.34
200	0.71	2500	3.23	4800	5.36
300	0.89	2600	3.34	4900	5.48
400	1.04	2700	3.42	5000	5.52
500	1.19	2800	3.52	5100	5.61
600	1.32	2900	3.61	5200	5.72
700	1.44	3000	3.69	5300	5.81
800	1.56	3100	3.80	5400	5.93
900	1.68	3200	3.86	5500	6.08
1000	1.80	3300	3.98	5600	6.12
1100	1.90	3400	4.07	5700	6.25
1200	2.00	3500	4.14	5800	6.31
1300	2.11	3600	4.27	5900	6.41
1400	2.21	3700	4.36	6000	6.51
1500	2.30	3800	4.47	6100	6.62
1600	2.40	3900	4.62	6200	6.73
1700	2.49	4000	4.63	6300	6.86
1800	2.61	4100	4.76	6400	6.94
1900	2.69	4200	4.83	6500	7.06
2000	2.79	4300	4.89		
2100	2.88	4400	5.04		



Cable loss
Cable coaxial, MIL C-17, N type-N type, 6 m
Belden, HL 3623

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	2600	4.35	5300	7.67
50	0.30	2700	4.54	5400	7.79
100	0.45	2800	4.70	5500	7.89
200	0.69	2900	4.87	5600	7.94
300	0.89	3000	5.04	5700	8.01
400	1.06	3100	5.19	5800	8.12
500	1.24	3200	5.35	5900	8.19
600	1.38	3300	5.50	6000	8.30
700	1.54	3400	5.65	6100	8.35
800	1.69	3500	5.79	6200	8.45
900	1.83	3600	5.92	6300	8.55
1000	1.96	3700	6.07	6400	8.65
1100	2.14	3800	6.17	6500	8.75
1200	2.31	3900	6.30		
1300	2.38	4000	6.43		
1400	2.51	4100	6.53		
1500	2.63	4200	6.65		
1600	2.76	4300	6.75		
1700	2.90	4400	6.85		
1800	3.04	4500	7.01		
1900	3.19	4600	7.09		
2000	3.35	4700	7.20		
2100	3.51	4800	7.24		
2200	3.67	4900	7.31		
2300	3.84	5000	7.41		
2400	4.01	5100	7.48		
2500	4.18	5200	7.56		



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT