


# FCC PART 15.249 TEST REPORT

For

## Skyrocket Toys LLC

12910 Culver Blvd Suite F Los Angeles California United States

**FCC ID: O5318382RX24G**

<b>Report Type:</b> Original Report	<b>Product Type:</b> JOURNEY GPS Streaming Video Drone
<b>Report Number:</b>	DG2210604-21443E-00C
<b>Report Date:</b>	2021-07-23
<b>Reviewed By:</b>	Ivan Cao Assistant Manager 
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	3
TEST FACILITY .....	4
DECLARATIONS.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
ANTENNA CONNECTOR CONSTRUCTION .....	7
<b>FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
EUT SETUP .....	8
TEST EQUIPMENT SETUP .....	9
TEST PROCEDURE .....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST DATA .....	11
<b>FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
TEST PROCEDURE .....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA .....	16

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	JOURNEY GPS Streaming Video Drone
<b>EUT Model:</b>	18382
<b>Operation Frequency:</b>	2460-2478MHz
<b>Antenna Gain▲:</b>	0 dBi
<b>Modulation Type:</b>	GFSK
<b>Rated Input Voltage:</b>	DC 3.7V from battery
<b>Serial Number:</b>	DG2210604-21443E-RF-S-8L4
<b>EUT Received Date:</b>	2021.6.7
<b>EUT Received Status:</b>	Good

### Objective

This type approval report is prepared on behalf of *Skyrocket Toys LLC* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.215 and 15.249 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device employs total 19 channels as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2460	11	2470
2	2461	12	2471
3	2462	13	2472
4	2463	14	2473
5	2464	15	2474
6	2465	16	2475
7	2466	17	2476
8	2467	18	2477
9	2468	19	2478
10	2469	/	/

EUT was tested with channel 1, 10 and 19.


### EUT Exercise Software

No software was used during test, the test mode was changed by keys, which was provided by the manufacturer ▲.

### Equipment Modifications

No modifications were made to the EUT.

### Block Diagram of Test Setup

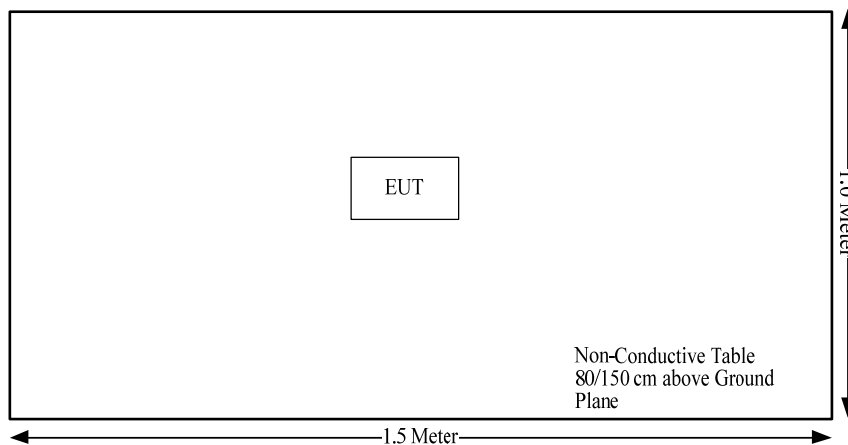

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Not Applicable: the device was powered by battery.

## FCC§15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Antenna Connector Construction

The EUT has one internal antenna, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Monopole	50	0 dBi/2.4~2.5GHz

**Result:** Compliant.

## FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

### Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


### EUT Setup

Below 1 GHz:

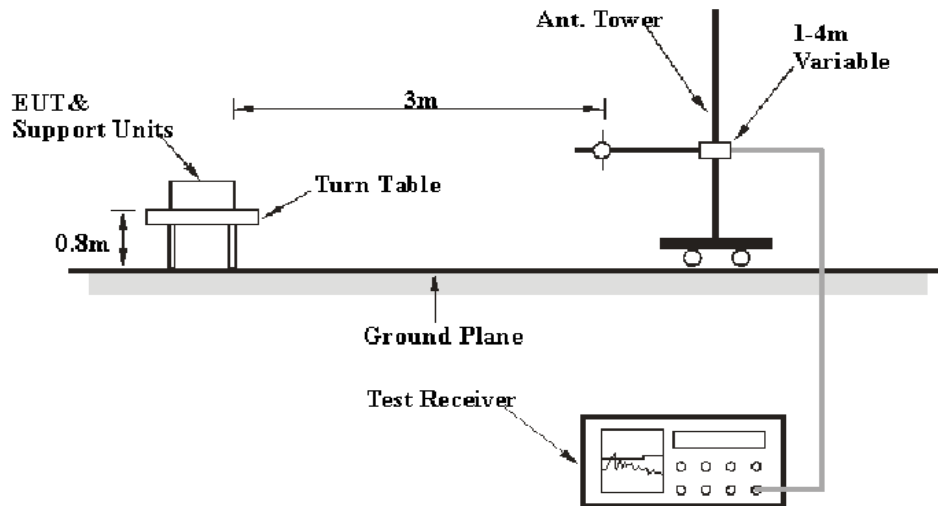



**1-25 GHz:**

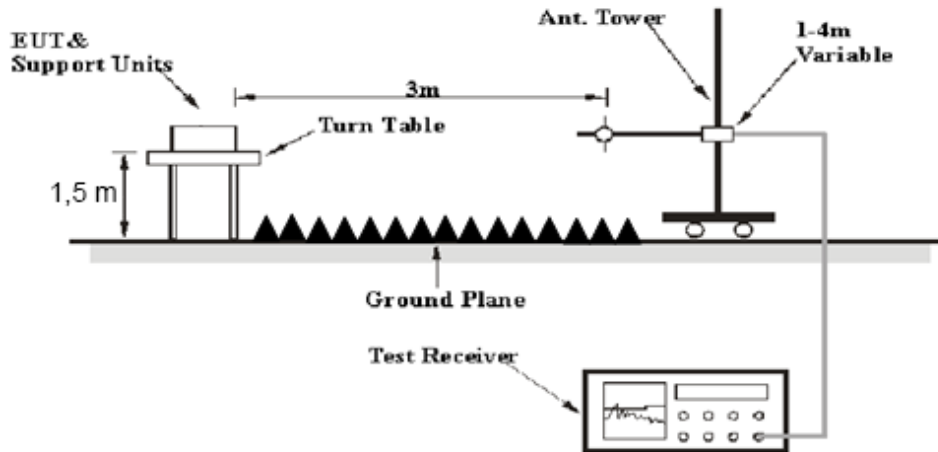

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.249 limits.

**Test Equipment Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2021-05-06	2022-05-05
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-06	2022-07-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2021-06-27	2022-06-26
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2021-06-27	2022-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2021-06-16	2022-06-15
Mini Circuits	High Pass Filter	VHF-6010+	31118	2021-06-16	2022-06-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**


Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	28.4°C	27.4°C
Relative Humidity:	56%	31 %
ATM Pressure:	100.0kPa	100.3kPa
Tester:	Alex Hu	Lee Li
Test Date:	2021-06-20	2021-07-20

Test Mode: Transmitting

1) 30MHz-1GHz(High channel was the worst)


Horizontal:

80.0 dBuV/m

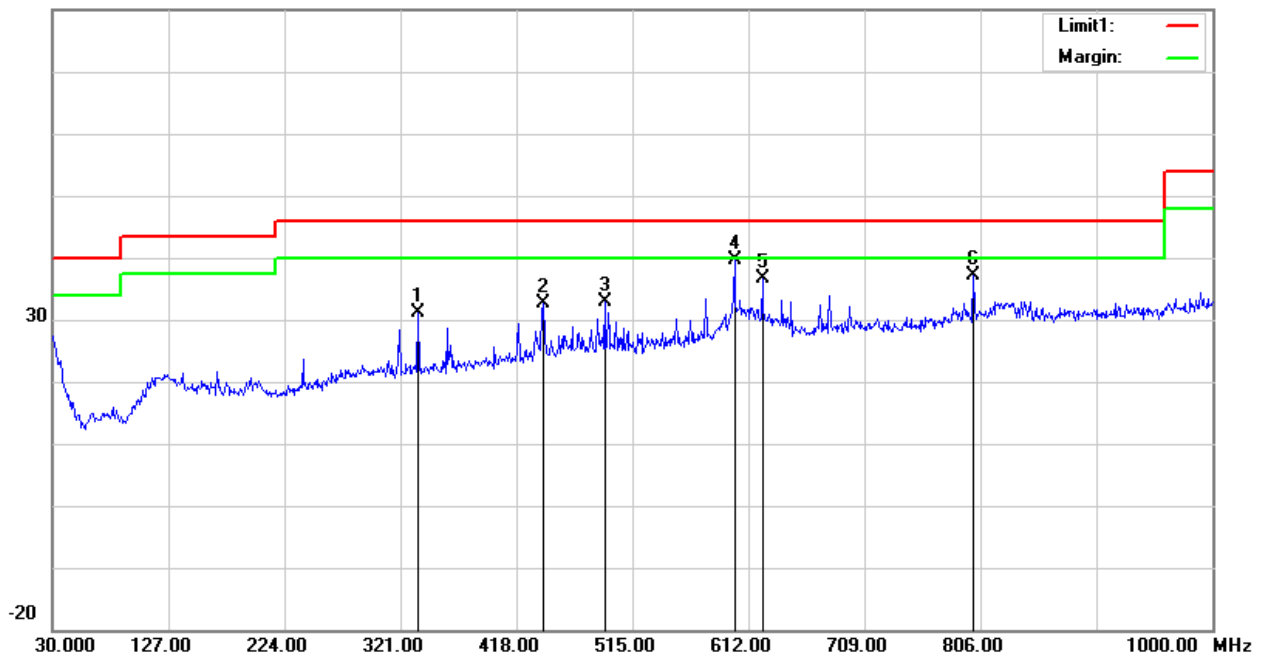

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	335.5500	34.36	peak	-3.35	31.01	46.00	14.99
2	440.3100	34.00	peak	-1.29	32.71	46.00	13.29
3	491.7200	33.49	peak	-0.49	33.00	46.00	13.00
4	600.3600	38.92	peak	0.76	39.68	46.00	6.32
5	623.6400	35.22	peak	1.37	36.59	46.00	9.41
6	800.1800	33.52	peak	3.71	37.23	46.00	8.77

**Vertical:**

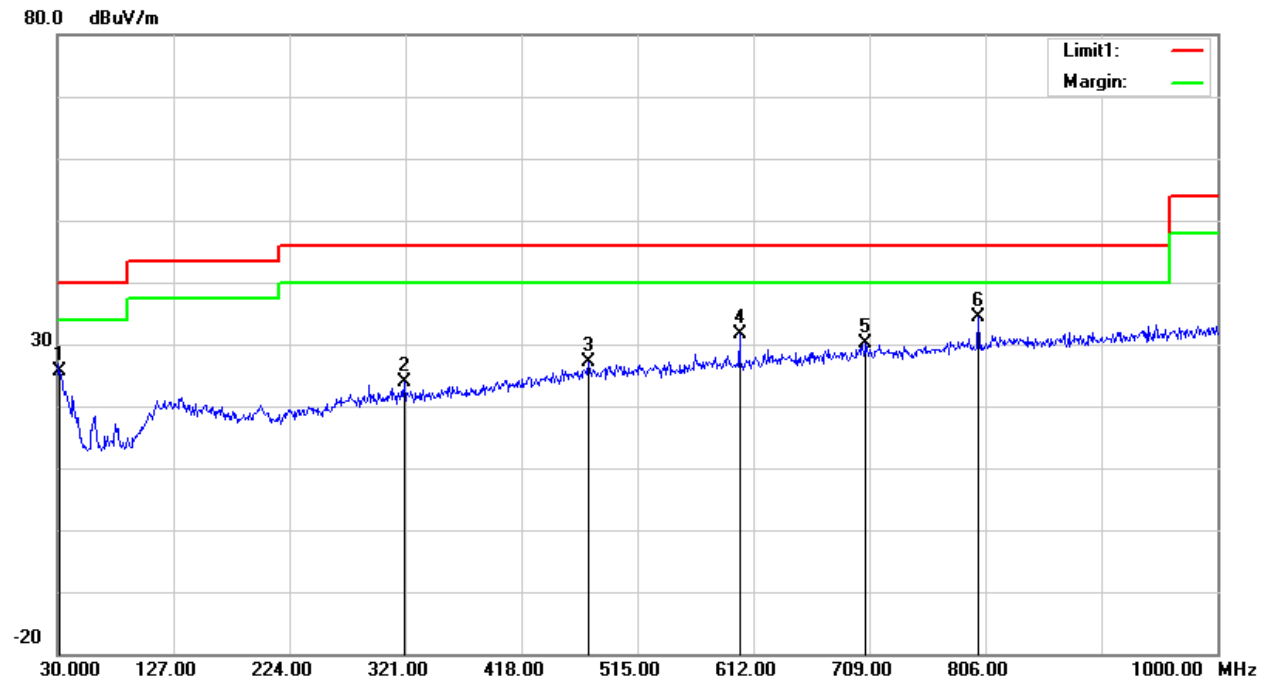

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	31.9400	25.57	peak	0.01	25.58	40.00	14.42
2	320.0300	27.39	peak	-3.44	23.95	46.00	22.05
3	474.2600	27.55	peak	-0.49	27.06	46.00	18.94
4	600.3600	30.75	peak	0.76	31.51	46.00	14.49
5	706.0900	27.19	peak	2.82	30.01	46.00	15.99
6	800.1800	30.75	peak	3.71	34.46	46.00	11.54




## 2) 1GHz-25GHz:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Detector	Polar	Factor					
MHz	dB $\mu$ V	PK/QP/AV	H/V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB
Low Channel									
2460.00	65.96	PK	H	28.22	1.83	0.00	96.01	113.98	17.97
2460.00	40.78	AV	H	28.22	1.83	0.00	70.83	93.98	23.15
2460.00	55.24	PK	V	28.22	1.83	0.00	85.29	113.98	28.69
2460.00	30.88	AV	V	28.22	1.83	0.00	60.93	93.98	33.05
2400.00	25.89	PK	H	28.10	1.80	0.00	55.79	74.00	18.21
2400.00	13.41	AV	H	28.10	1.80	0.00	43.31	54.00	10.69
4920.00	35.18	PK	H	33.14	3.28	25.66	45.94	74.00	28.06
4920.00	23.34	AV	H	33.14	3.28	25.66	34.10	54.00	19.90
7380.00	35.61	PK	H	36.19	4.52	25.79	50.53	74.00	23.47
7380.00	23.94	AV	H	36.19	4.52	25.79	38.86	54.00	15.14
Middle Channel									
2469.00	65.83	PK	H	28.24	1.83	0.00	95.90	113.98	18.08
2469.00	40.64	AV	H	28.24	1.83	0.00	70.71	93.98	23.27
2469.00	55.11	PK	V	28.24	1.83	0.00	85.18	113.98	28.80
2469.00	30.75	AV	V	28.24	1.83	0.00	60.82	93.98	33.16
4938.00	35.45	PK	H	33.18	3.25	25.64	46.24	74.00	27.76
4938.00	23.61	AV	H	33.18	3.25	25.64	34.40	54.00	19.60
7407.00	35.88	PK	H	36.26	4.47	25.81	50.80	74.00	23.20
7407.00	24.21	AV	H	36.26	4.47	25.81	39.13	54.00	14.87
High Channel									
2478.00	65.75	PK	H	28.26	1.84	0.00	95.85	113.98	18.13
2478.00	41.39	AV	H	28.26	1.84	0.00	71.49	93.98	22.49
2478.00	55.36	PK	V	28.26	1.84	0.00	85.46	113.98	28.52
2478.00	30.24	AV	V	28.26	1.84	0.00	60.34	93.98	33.64
2483.50	38.70	PK	H	28.27	1.84	0.00	68.81	74.00	5.19
2483.50	13.73	AV	H	28.27	1.84	0.00	43.84	54.00	10.16
4956.00	35.67	PK	H	33.21	3.23	25.63	46.48	74.00	27.52
4956.00	23.83	AV	H	33.21	3.23	25.63	34.64	54.00	19.36
7434.00	36.13	PK	H	36.33	4.42	25.84	51.04	74.00	22.96
7434.00	24.43	AV	H	36.33	4.42	25.84	39.34	54.00	14.66

Test plots(High Channel was the worst):




Horizontal

Fundamental  
Test with Band  
Rejection Filter

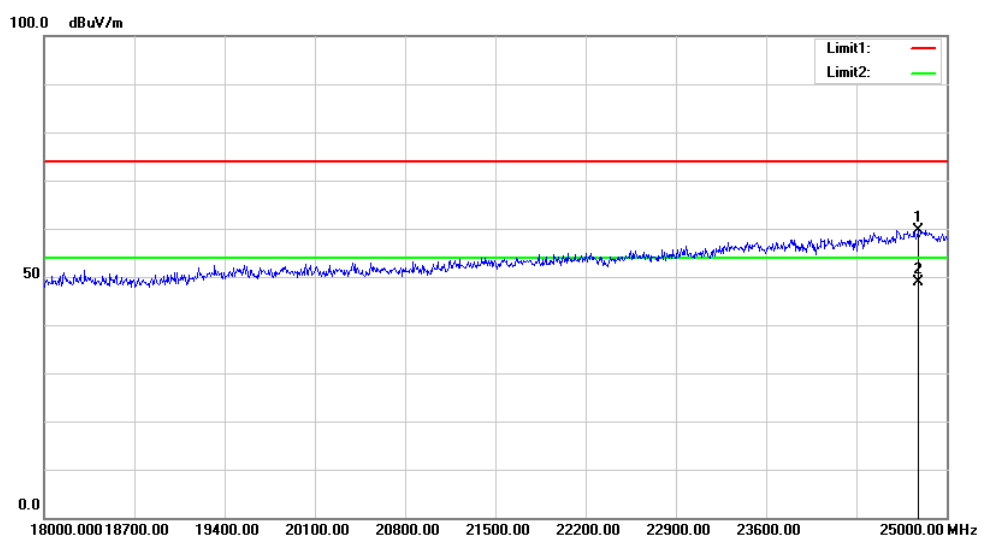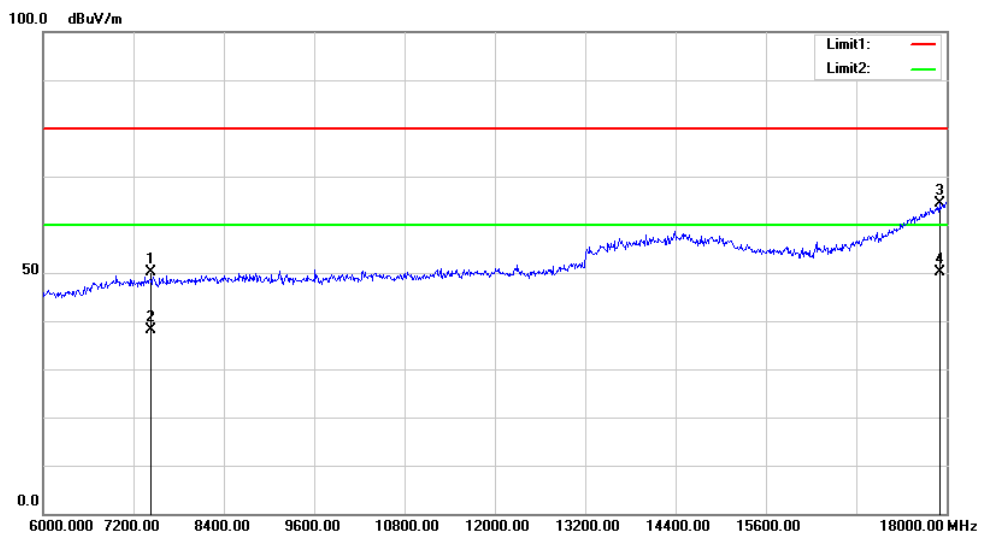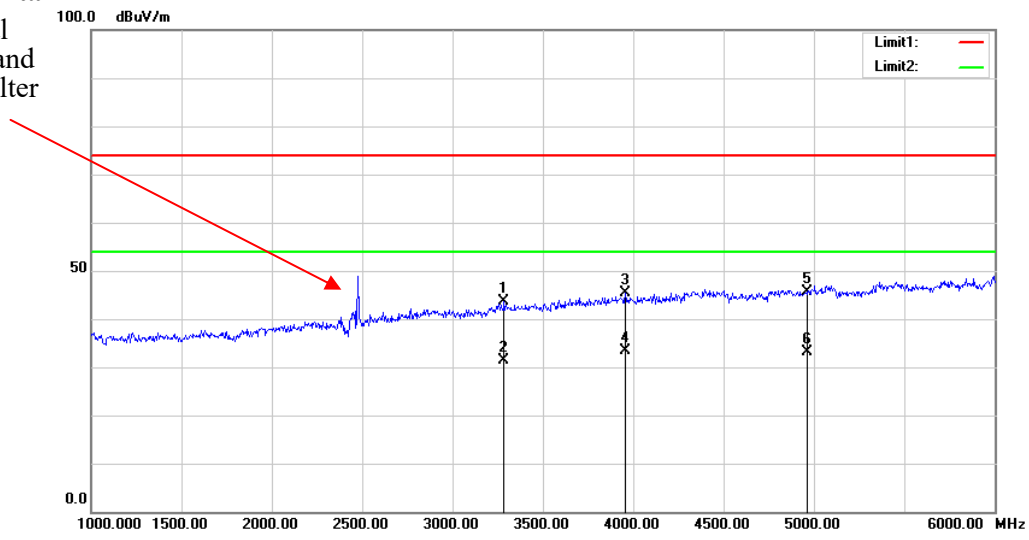

Vertical:

Fundamental  
Test with Band  
Rejection Filter

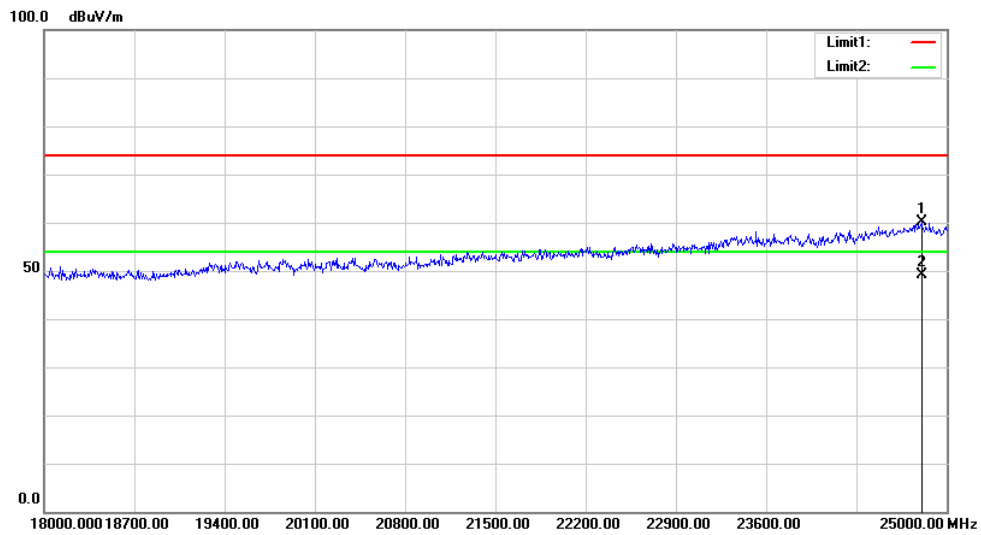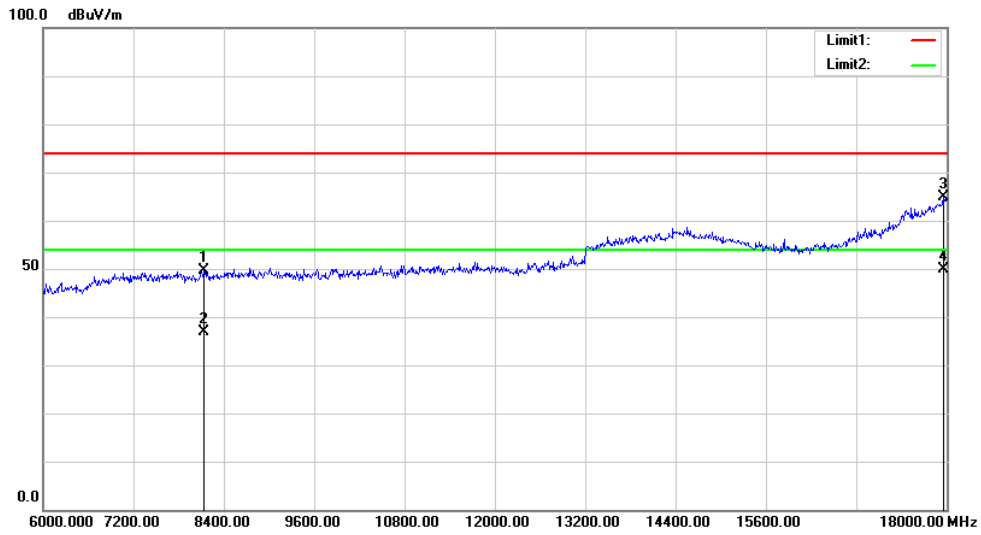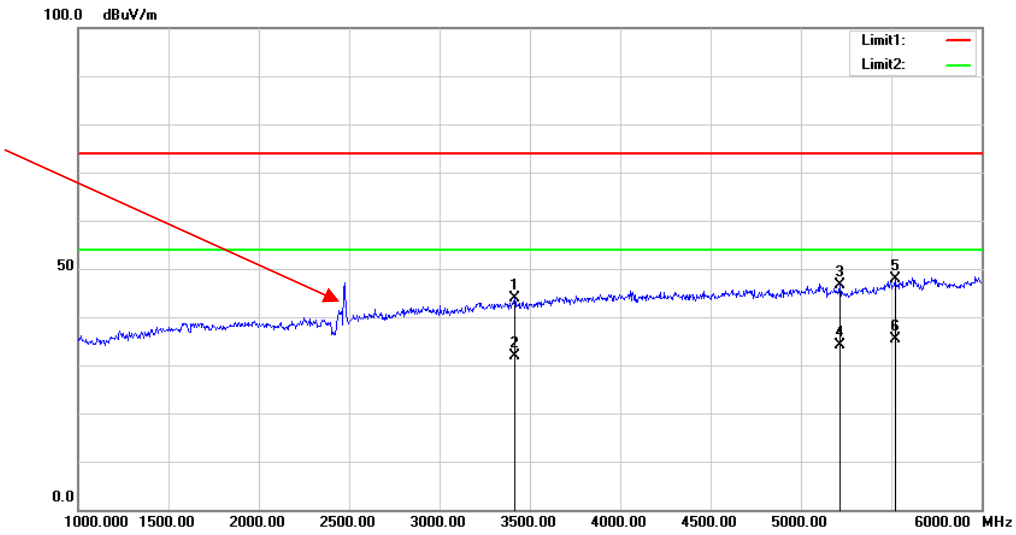

## FCC §15.215(c) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101591	2020-06-29	2021-06-28
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24.5°C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	100.3kPa
<b>Tester:</b>	Tiger Mo
<b>Test Date:</b>	2021-06-25


**Test Result:** Compliant. Please refer to following tables and plots



Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2460	1.103
Middle	2469	1.100
High	2478	1.103

2460 MHz

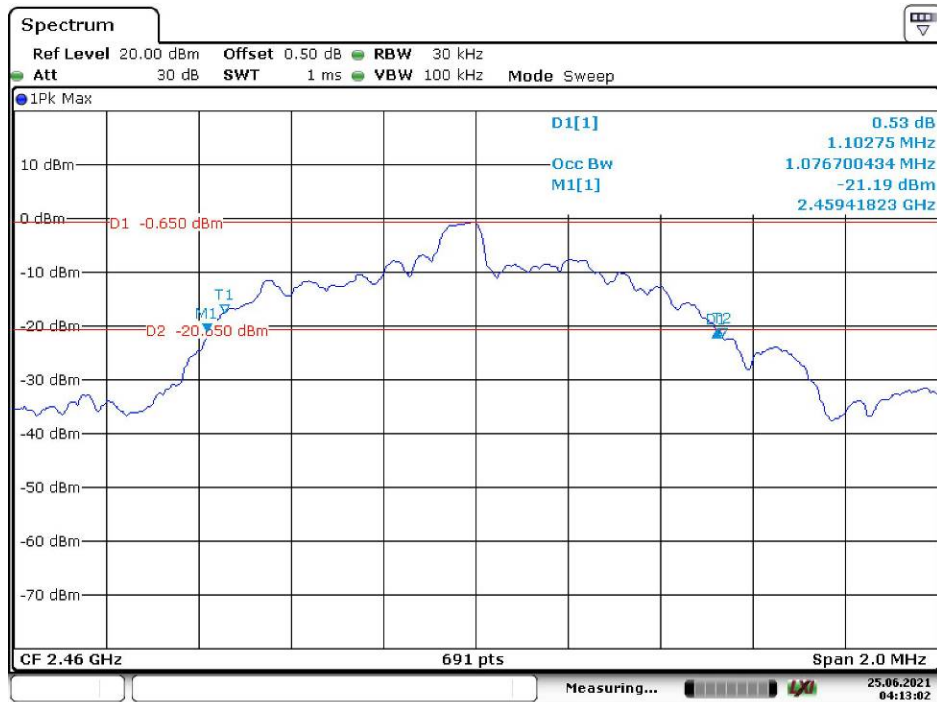

Date: 25.JUN.2021 04:13:02

2469MHz

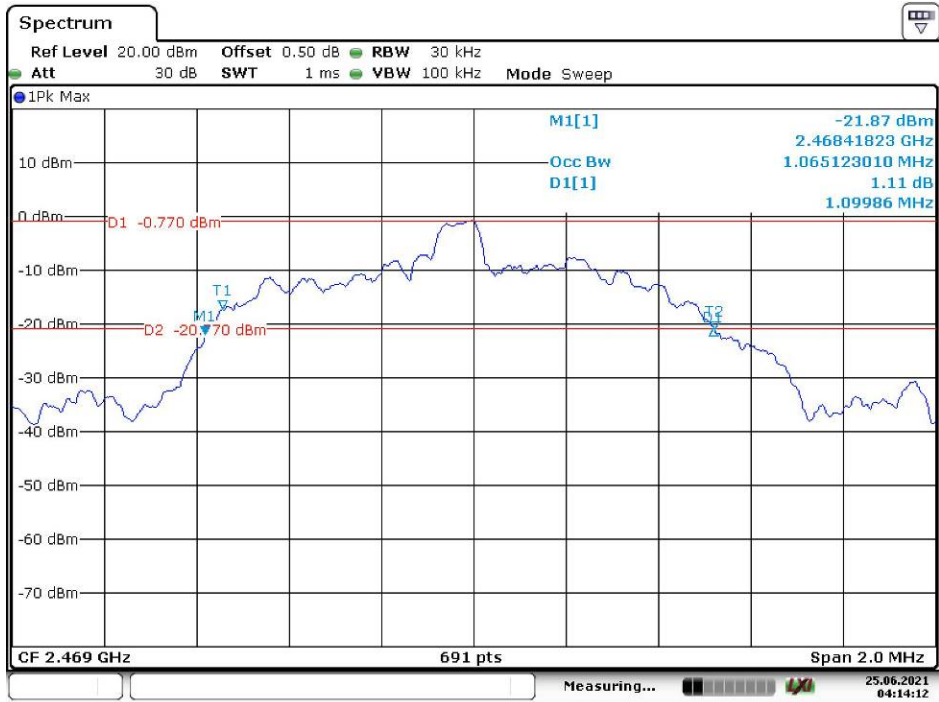

Date: 25.JUN.2021 04:14:12

2478 MHz



Date: 25.JUN.2021 04:14:54

\*\*\*\*\* END OF REPORT \*\*\*\*\*