



FCC PART 15.249

TEST REPORT

For

Skyrocket Toys LLC

12910 Culver Blvd, Suite F, Los Angeles, CA 90066, U.S.A

FCC ID: O53O1943RX24G

Report Type: Original Report	Product Name: FURY Stunt Drone
Report Number: RDG191204008-00A	
Report Date: 2019-12-20	
Reviewed By:	<i>Jerry Zhang</i>
Test Laboratory:	Jerry Zhang EMC Manager Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3
 OBJECTIVE.....3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST METHODOLOGY.....3
 MEASUREMENT UNCERTAINTY.....4
 TEST FACILITY.....4
 DECLARATIONS.....4

SYSTEM TEST CONFIGURATION.....5
 JUSTIFICATION.....5
 EUT EXERCISE SOFTWARE.....5
 EQUIPMENT MODIFICATIONS.....5
 BLOCK DIAGRAM OF TEST SETUP.....5

SUMMARY OF TEST RESULTS.....6

FCC§15.203 - ANTENNA REQUIREMENT.....7
 APPLICABLE STANDARD.....7
 ANTENNA CONNECTOR CONSTRUCTION.....7

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS.....8
 APPLICABLE STANDARD.....8
 EUT SETUP.....8
 TEST EQUIPMENT SETUP.....9
 TEST PROCEDURE.....10
 CORRECTED AMPLITUDE & MARGIN CALCULATION.....10
 TEST EQUIPMENT LIST AND DETAILS.....10
 TEST DATA.....11

FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....16
 APPLICABLE STANDARD.....16
 TEST PROCEDURE.....16
 TEST EQUIPMENT LIST AND DETAILS.....16
 TEST DATA.....16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	FURY Stunt Drone
EUT Model:	01943
Operation Frequency:	2408-2472 MHz
Modulation Type:	GFSK
Rated Input Voltage:	DC 3.7V from battery
Serial Number:	RDG191204008-RF-S1
EUT Received Date:	2019-12-04
EUT Received Status:	Good

Objective

This type approval report is prepared on behalf of *Skyrocket Toys LLC* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

Part of systems with FCC ID: O5301943TX24G

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured in operating mode for testing which was provided by the manufacturer.

The device employs total 65 channels as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2408	33	2440
2	2409	34	2441
3	2410
...	...	64	2471
32	2439	65	2472

2408MHz, 2440MHz, 2472MHz was tested.


EUT Exercise Software

No software was used in test.

Equipment Modifications

No modifications were made to the EUT.

Block Diagram of Test Setup

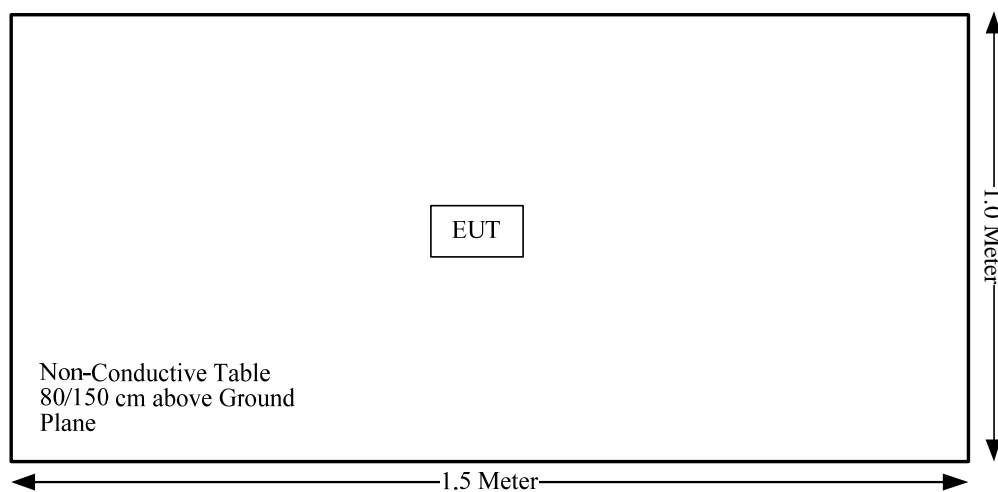

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Note: the device was powered by battery.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

Below 1 GHz:

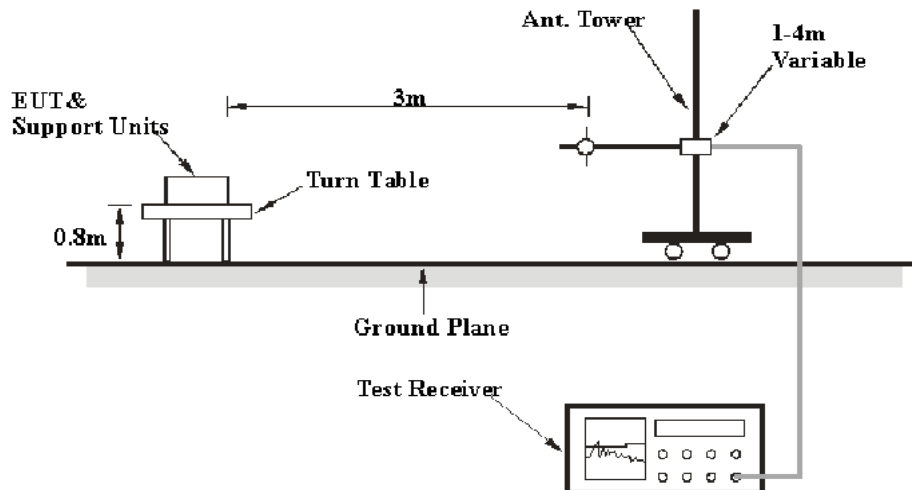

Above 1 GHz:

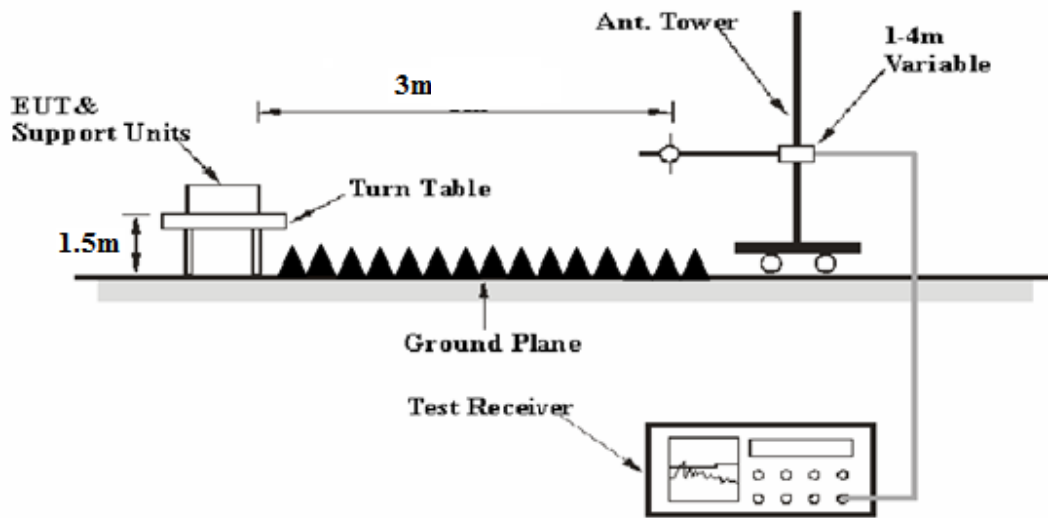

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.249 limits.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2019-11-18	2022-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	23.6°C	22.4°C
Relative Humidity:	43%	39%
ATM Pressure:	102.6 kPa	102.3 kPa
Tester:	Jackson Zhang	Lucy Lu
Test Date:	2019-12-16	2019-12-10

Test Mode: Transmitting


1) 30MHz-1GHz(Low channel is the worst):

Horizontal:

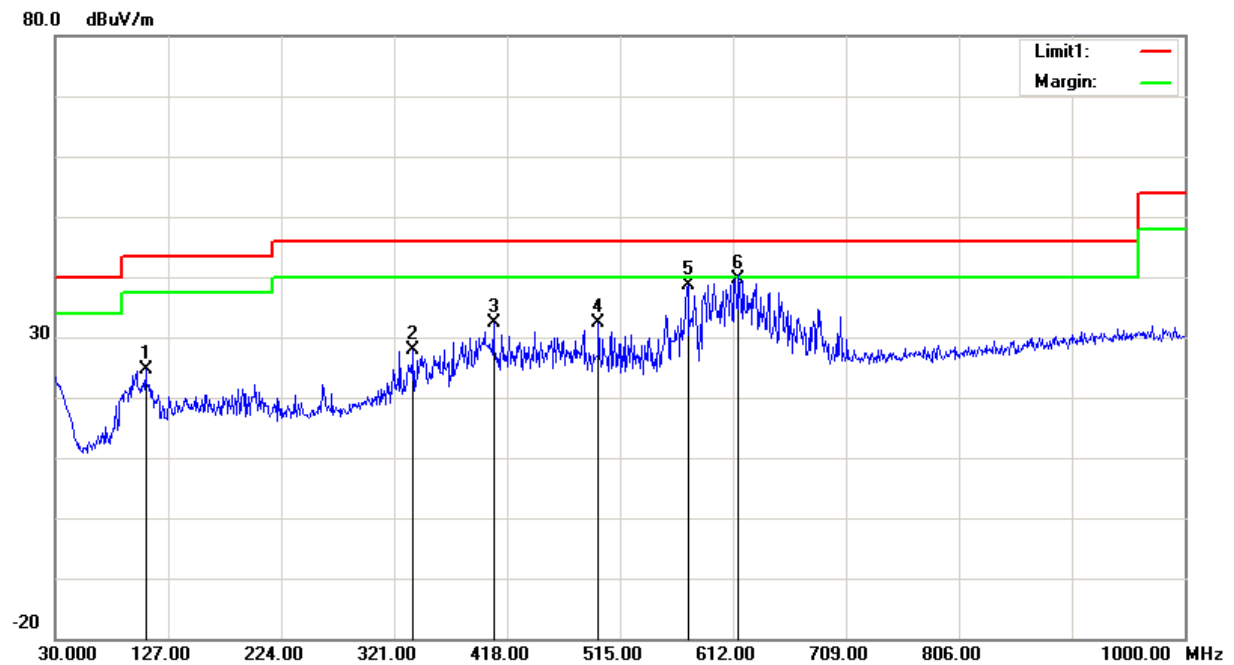

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
107.6000	37.86	peak	-13.27	24.59	43.50	18.91
337.4900	34.79	peak	-6.85	27.94	46.00	18.06
406.3600	37.42	peak	-4.99	32.43	46.00	13.57
496.5700	35.95	peak	-3.50	32.45	46.00	13.55
573.2000	40.05	peak	-1.46	38.59	46.00	7.41
616.8500	40.34	QP	-0.76	39.58	46.00	6.42

Vertical:



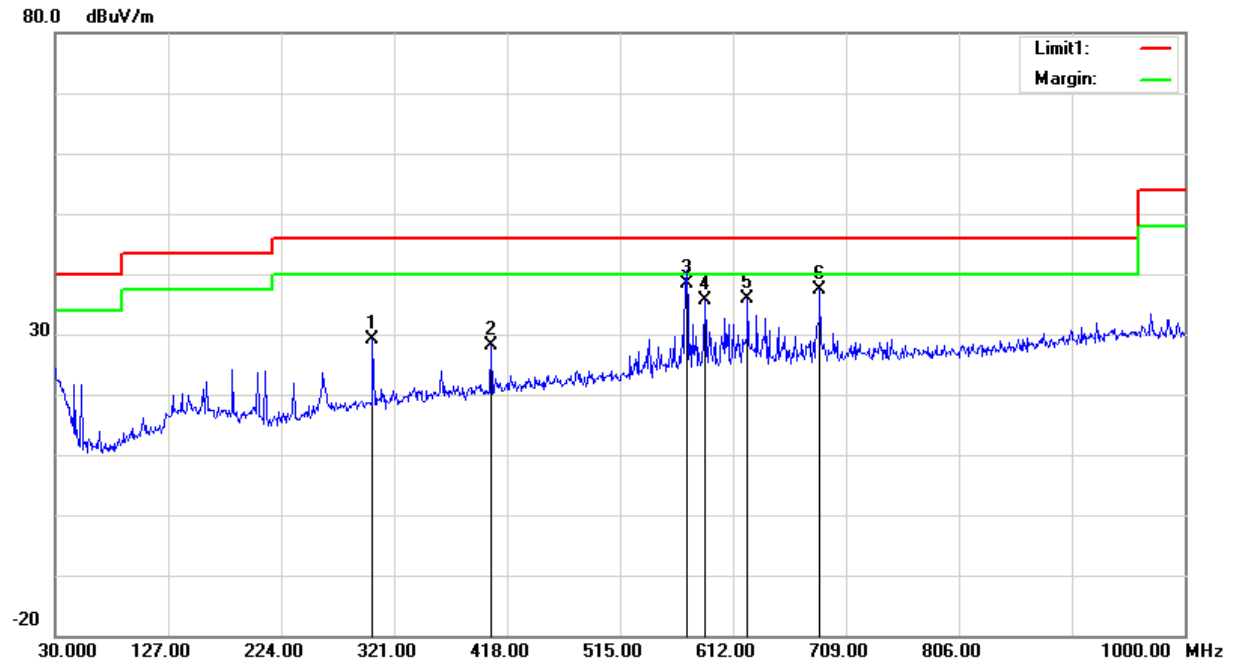


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
302.5700	36.53	peak	-7.34	29.19	46.00	16.81
404.4200	33.08	peak	-5.06	28.02	46.00	17.98
572.2300	39.96	QP	-1.46	38.50	46.00	7.50
587.7500	37.10	peak	-1.51	35.59	46.00	10.41
624.6100	36.56	peak	-0.76	35.80	46.00	10.20
686.6900	37.03	peak	0.26	37.29	46.00	8.71




2) 1GHz-25GHz

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2408 MHz									
2408.00	62.11	PK	H	28.12	1.80	0.00	92.03	113.98	21.95
2408.00	55.07	AV	H	28.12	1.80	0.00	84.99	93.98	8.99
2408.00	58.36	PK	V	28.12	1.80	0.00	88.28	113.98	25.70
2408.00	51.27	AV	V	28.12	1.80	0.00	81.19	93.98	12.79
2400.00	25.99	PK	H	28.10	1.80	0.00	55.89	74.00	18.11
2400.00	13.23	AV	H	28.10	1.80	0.00	43.13	54.00	10.87
4816.00	35.59	PK	H	32.93	3.18	25.61	46.09	74.00	27.91
4816.00	22.09	AV	H	32.93	3.18	25.61	32.59	54.00	21.41
7224.00	36.31	PK	H	35.78	4.79	25.62	51.26	74.00	22.74
7224.00	23.18	AV	H	35.78	4.79	25.62	38.13	54.00	15.87
Middle Channel: 2440 MHz									
2440.00	61.54	PK	H	28.18	1.82	0.00	91.54	113.98	22.44
2440.00	56.21	AV	H	28.18	1.82	0.00	86.21	93.98	7.77
2440.00	57.46	PK	V	28.18	1.82	0.00	87.46	113.98	26.52
2440.00	50.80	AV	V	28.18	1.82	0.00	80.80	93.98	13.18
4880.00	35.12	PK	H	33.06	3.27	25.66	45.79	74.00	28.21
4880.00	22.87	AV	H	33.06	3.27	25.66	33.54	54.00	20.46
7320.00	36.12	PK	H	36.03	4.62	25.72	51.05	74.00	22.95
7320.00	22.81	AV	H	36.03	4.62	25.72	37.74	54.00	16.26
High Channel: 2472 MHz									
2472.00	60.86	PK	H	28.24	1.84	0.00	90.94	113.98	23.04
2472.00	53.74	AV	H	28.24	1.84	0.00	83.82	93.98	10.16
2472.00	56.78	PK	V	28.24	1.84	0.00	86.86	113.98	27.12
2472.00	49.87	AV	V	28.24	1.84	0.00	79.95	93.98	14.03
2483.50	25.69	PK	H	28.27	1.84	0.00	55.80	74.00	18.20
2483.50	13.87	AV	H	28.27	1.84	0.00	43.98	54.00	10.02
4944.00	35.12	PK	H	33.19	3.25	25.64	45.92	74.00	28.08
4944.00	21.50	AV	H	33.19	3.25	25.64	32.30	54.00	21.70
7416.00	35.25	PK	H	36.28	4.46	25.82	50.17	74.00	23.84
7416.00	22.45	AV	H	36.28	4.46	25.82	37.37	54.00	16.63

Worst mode Test plots(Low channel) Horizontal

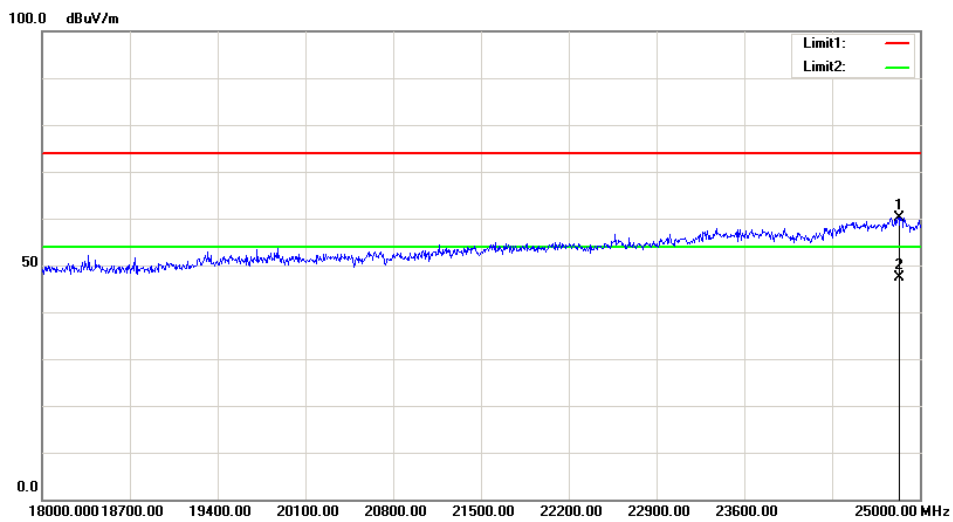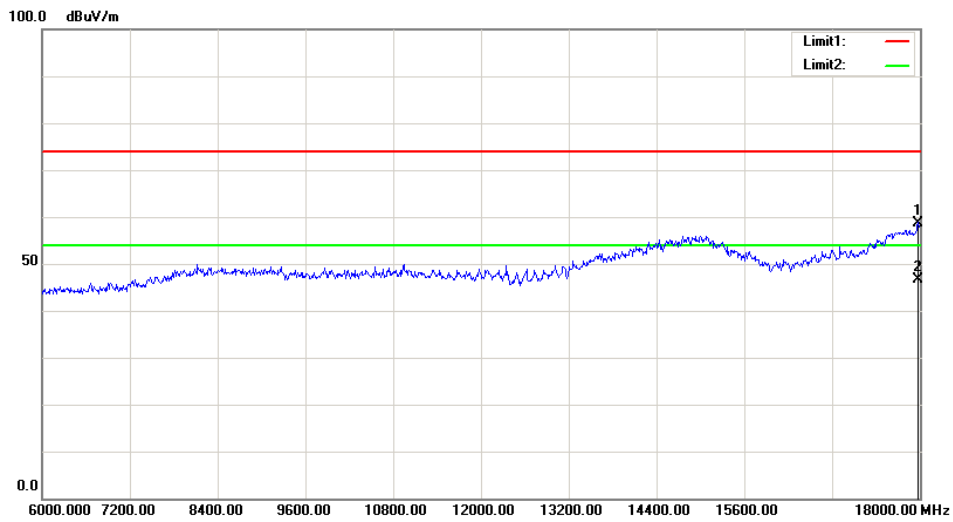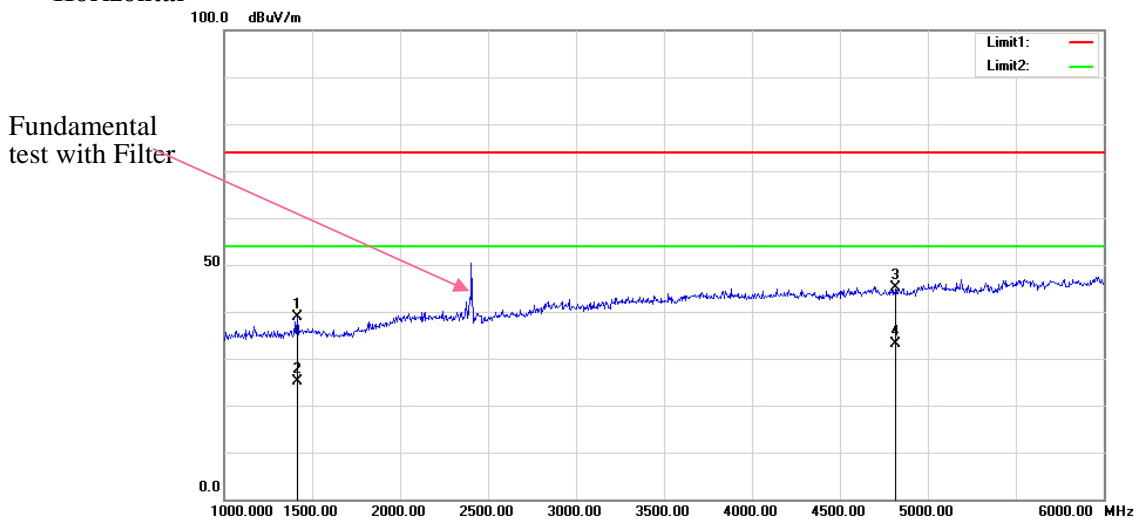

Vertical

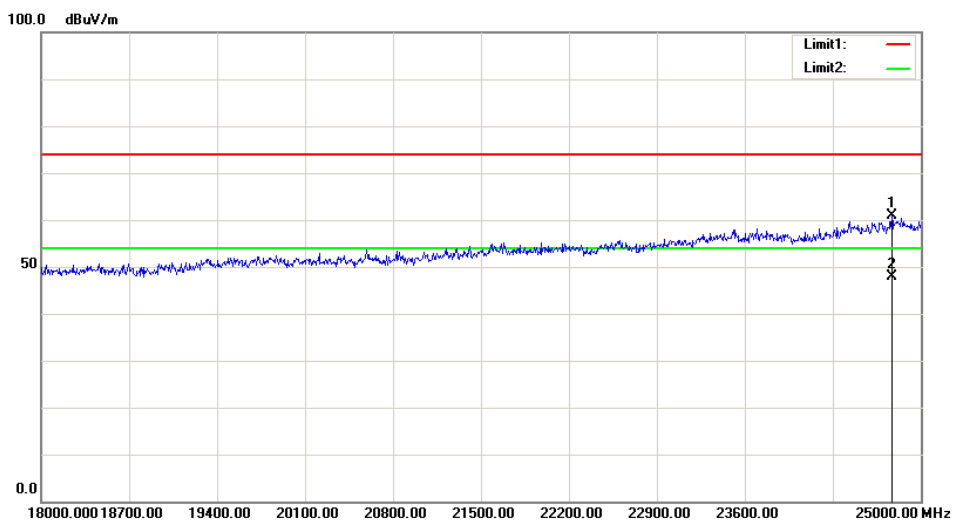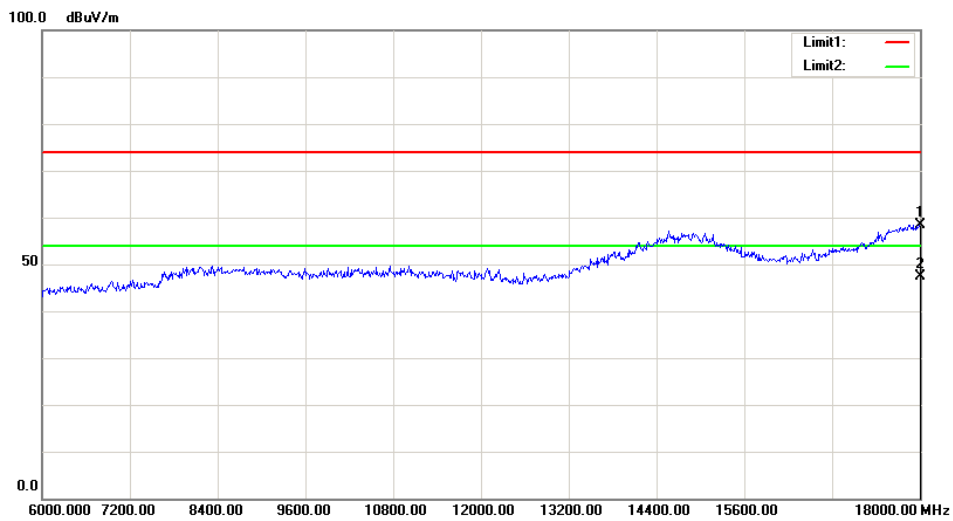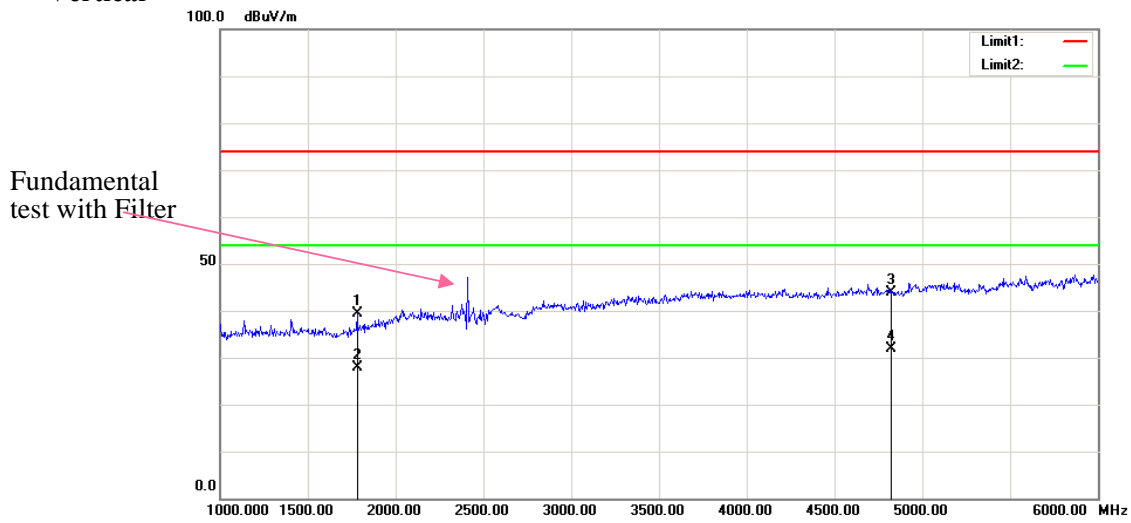

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	22.4°C
Relative Humidity:	39%
ATM Pressure:	102.3 kPa
Tester:	Lucy Lu
Test Date:	2019-12-10


Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2408	1.212
Middle	2440	1.212
High	2472	1.206


Low Channel

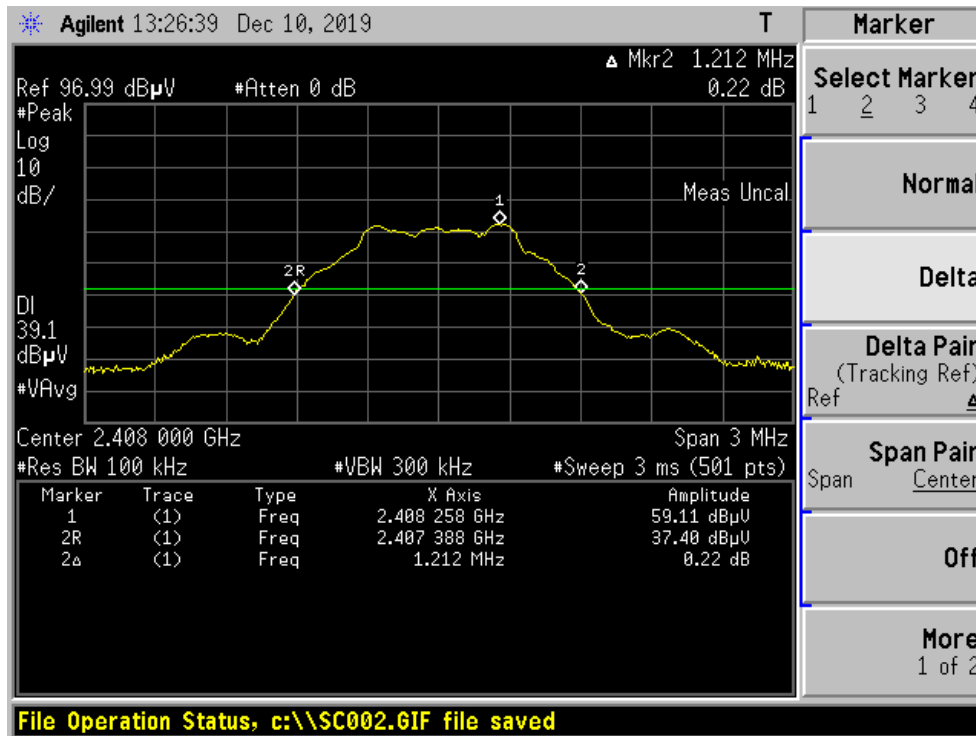

Middle Channel

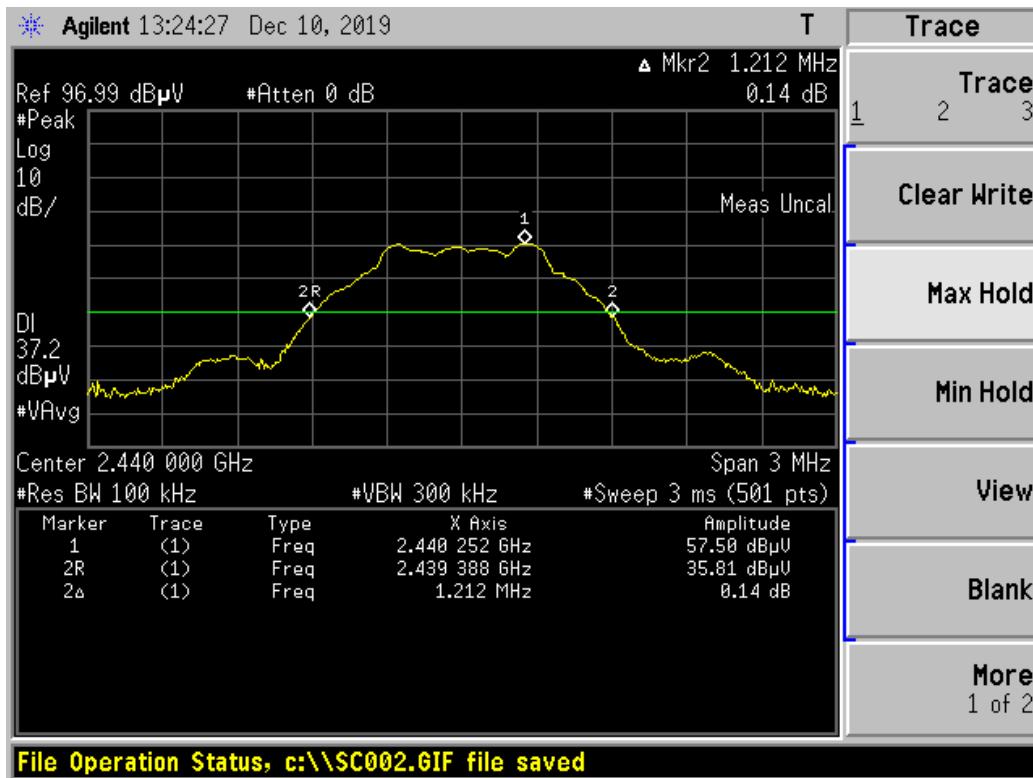

High Channel

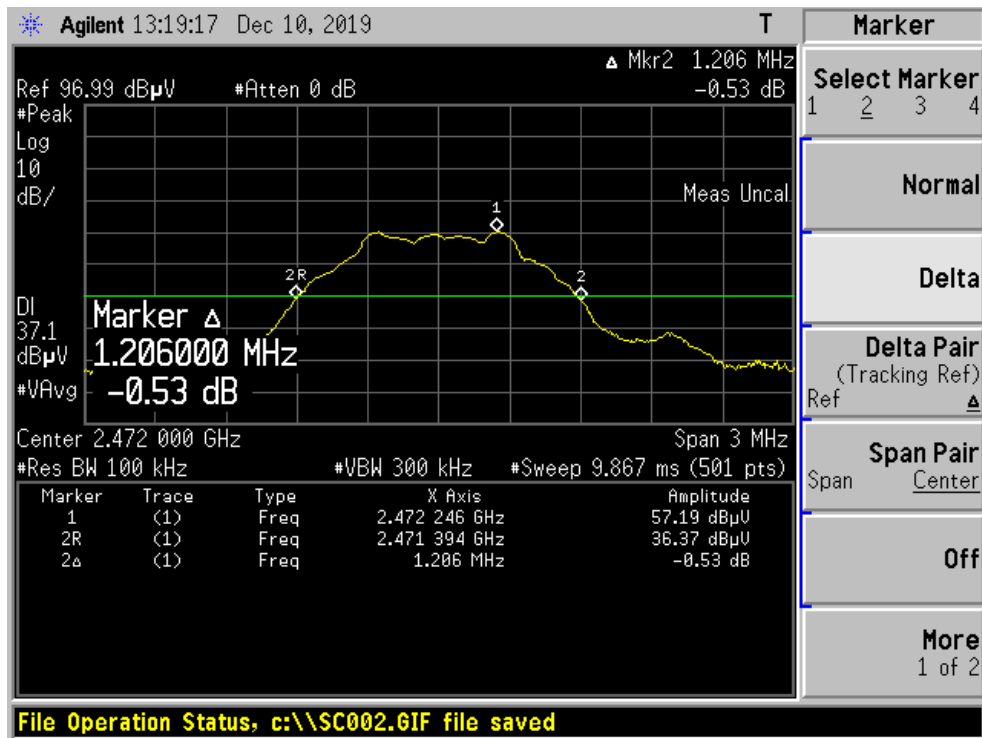

***** END OF REPORT *****