



SAR TEST REPORT

Product Name: 4G Tablet

Model Name: T10M

Family Model: UT10

FCC ID: O551014923

Issued For : SWAGTEK

10205 NW 19th Street STE101, Miami FL33172

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT23L042HA01

Sample Received Date: Jan. 08, 2024

Date of Test: Feb. 01, 2024~ Feb. 13, 2024

Date of Issue: Mar. 01, 2024

Max. SAR (1g): Body: 0.950 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	23
8.1 Body-worn Position Conditions	23
9. Uncertainty	24
9.1 Measurement Uncertainty	24
10. Conducted Power Measurement	25
10.1 Test Result:	25
11. EUT and Test Setup Photo	47
11.1 EUT Photos	47
11.2 Setup Photos	50
12. SAR Result Summary	54
12.1 Body-worn and Hotspot SAR	54
12.2 Simultaneous Multi-band Transmission Evaluation:	58
13. Equipment List	60
Appendix A. System Validation Plots	61
Appendix B. SAR Test Plots	79
Appendix C. Probe Calibration and Dipole Calibration Report	95



Revision History

Rev.	Issue Date	Contents
00	Mar. 01, 2024	Initial Issue



TEST REPORT CERTIFICATION

Applicant SWAGTEK
Address 10205 NW 19th Street STE101, Miami FL33172
Manufacture SWAGTEK
Address 10205 NW 19th Street STE101, Miami FL33172
Product Name 4G Tablet
Trademark LOGIC, UNONU, iSWAG
Model Name T10M
Family Model: UT10
Sample number LGT2401029-4

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Manager





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	4G Tablet
Trademark	LOGIC, UNONU, iSWAG
Model Name	T10M
Family Model	UT10
Model Difference	Only different in model name and Trademark.
Device Category	Portable
Product stage	Production unit
RF Exposure Environment	General Population / Uncontrolled
Hardware Version	WT_F31-Y_6762_BBA_MB_V1.1
Software Version	N/A
Frequency Range	GSM 850: 824 ~ 849 MHz PCS 1900: 1850 ~ 1910 MHz WCDMA Band II: 1850 ~ 1910 MHz WCDMA Band IV: 1710 ~ 1755 MHz WCDMA Band V: 824 ~ 849 MHz LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 7: 2500 ~ 2570.00 MHz LTE Band 17: 704 ~ 716 MHz LTE Band 38: 2570 ~ 2620 MHz LTE Band 66: 1710 ~ 1780 MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN 802.11n40: 2422 MHz ~ 2452 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5150 ~ 5250 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5250 ~ 5350 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5725 ~ 5850 MHz Bluetooth: 2402 ~ 2480 MHz



	Mode	Body Worn and Hotspot(W/kg)
Max. Reported SAR(1g): (Limit:1.6W/kg) Test distance: 0mm	GSM 850	0.321
	PCS 1900	0.444
	WCDMA Band II	0.370
	WCDMA Band IV	0.363
	WCDMA Band V	0.241
	LTE Band 2	0.595
	LTE Band 4	0.495
	LTE Band 5	0.347
	LTE Band 7	0.515
	LTE Band 17	0.950
	LTE Band 38	0.241
	LTE Band 66	0.339
	2.4G WLAN	0.529
	5.2G WLAN	0.275
	5.3G WLAN	0.270
5.8G WLAN	0.200	
	BT ^{Note1}	0.131
1-g Sum SAR		1.479
Battery	Rated Voltage:3.8V Capacity: 6000mAh	
Operating Mode:	GSM: GSM Voice; GPRS/EGPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN: 802.11b(DSSS): CCK, DQPSK, DBPSK 802.11g(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM 5G WLAN: 802.11a(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11ac (OFDM): BPSK, QPSK,16-QAM,64-QAM,256-QAM Bluetooth: GFSK + π /4DQPSK+8DPSK	
Antenna Specification	GSM/WCDMA/LTE: FPC Antenna Bluetooth: FPC Antenna WLAN: FPC Antenna	
Operating Mode	Maximum continuous output	
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.	
Hotspot Mode	Support	
DTM Mode	Not Support	
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power		



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices
11	FCC KDB 616217 D04 SAR for laptop and 4G Tablets v01r02	SAR Evaluation Considerations For Laptop, Notebook, Netbook And 4G Tablet Computers

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p>NOTE</p> <p>GENERAL POPULATION/UNCONTROLLED EXPOSURE</p> <p>PARTIAL BODY LIMIT</p> <p>1.6 W/kg</p>



3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

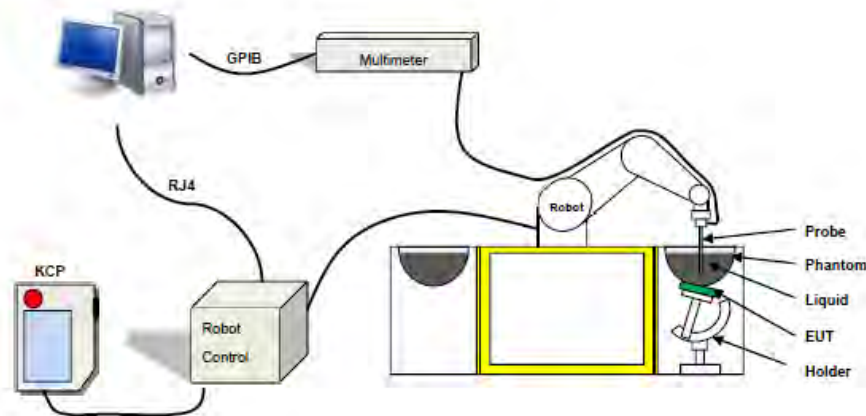

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPGO364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

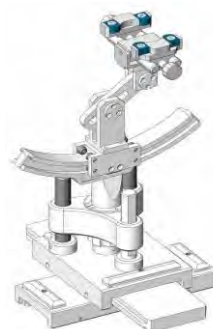


Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max _ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



LIQUID MEASUREMENT RESULTS

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2024-02-02	22.2	59	750	21.8	Permittivity	41.90	41.99	0.21	±5
					Conductivity	0.89	0.88	-1.12	±5
2024-02-13	21.6	54	835	21.3	Permittivity	41.50	41.56	0.14	±5
					Conductivity	0.90	0.89	-1.11	±5
2024-02-02	22.3	59	1800	22	Permittivity	40.00	40.69	1.72	±5
					Conductivity	1.40	1.41	0.71	±5
2024-02-01	20.6	54	1900	20.4	Permittivity	40.00	40.93	2.33	±5
					Conductivity	1.40	1.39	-0.71	±5
2024-02-13	21.6	54	2450	21.3	Permittivity	39.20	39.07	-0.33	±5
					Conductivity	1.80	1.83	1.67	±5
2024-02-01	20.7	54	2600	20.4	Permittivity	39.00	40.15	2.95	±5
					Conductivity	1.96	1.95	-0.51	±5
2024-02-04	20.6	50	5200	20.3	Permittivity	36.00	36.78	2.17	±5
					Conductivity	4.66	4.64	-0.43	±5
2024-02-04	20.6	50	5400	20.3	Permittivity	35.80	36.54	2.07	±5
					Conductivity	4.86	4.85	-0.21	±5
2024-02-04	20.7	50	5800	20.4	Permittivity	35.30	35.64	0.96	±5
					Conductivity	5.27	5.31	0.76	±5




5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

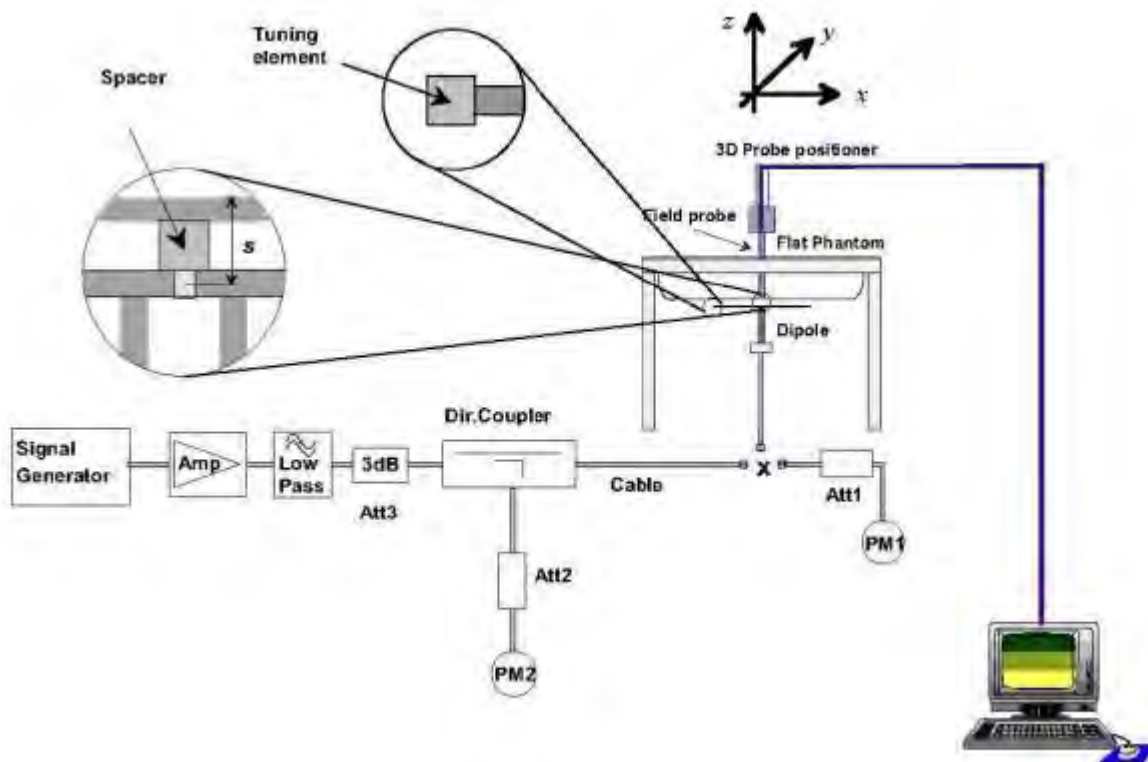



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of $\pm 10\%$.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2024-02-02	750	100	0.859	8.59	8.27	3.87	10
2024-02-13	835	100	0.949	9.49	9.75	-2.67	10
2024-02-02	1800	100	3.683	36.83	39.06	-5.71	10
2024-02-01	1900	100	4.055	40.55	40.85	-0.73	10
2024-02-13	2450	100	5.447	54.47	54.28	0.35	10
2024-02-01	2600	100	5.682	56.82	56.58	0.42	10
2024-02-04	5200	100	7.756	77.56	80.97	-4.21	10
2024-02-04	5400	100	8.038	80.38	84.61	-5.00	10
2024-02-04	5800	100	7.525	75.25	81.67	-7.86	10
2024-02-02	750	100	0.859	8.59	8.27	3.87	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface

- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.

- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.

- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan& Zoom Scan


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



7. EUT Antenna Location Sketch

It is a 4G Tablet, support GSM/WCDMA/LTE/WLAN/BT mode.

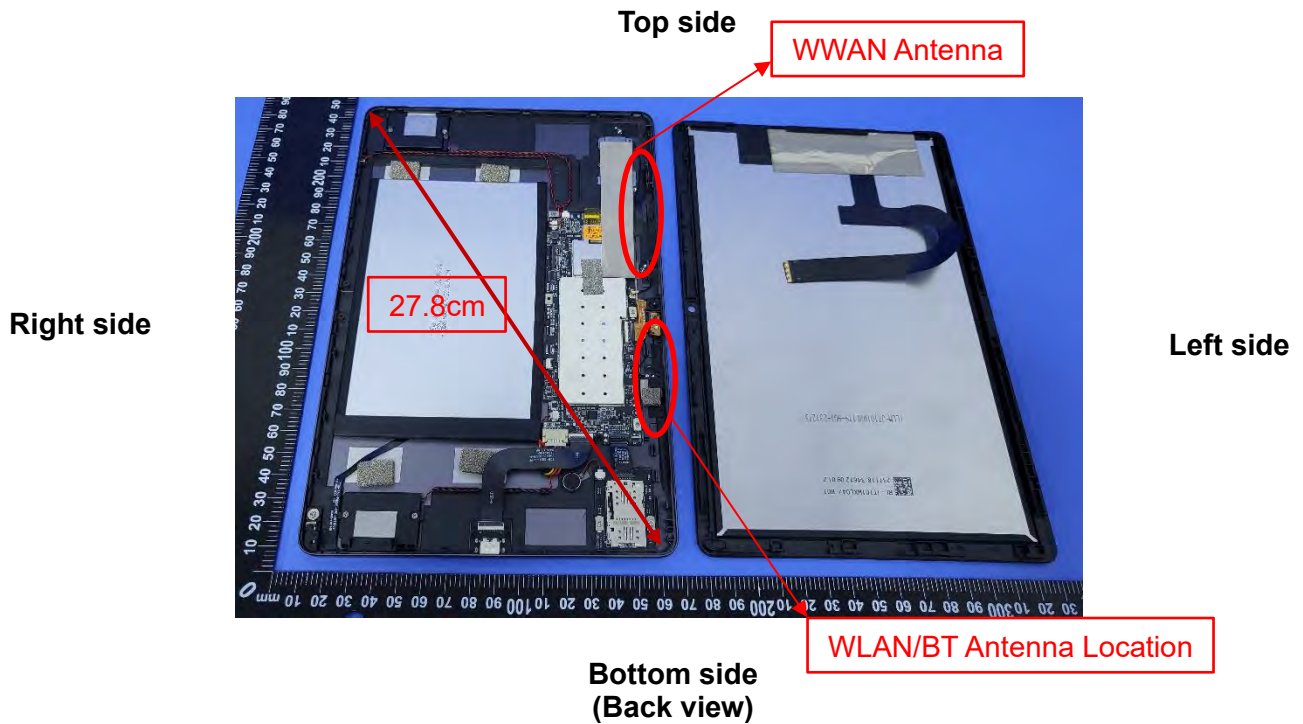

Antenna Separation Distance(mm)					
ANT	Back Side	Left Side	Right Side	Top Side	Bottom Side
WLAN/BT	5	71	129	5	146
WWAN	5	139	27	5	146

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA II	WCDMA IV	WCDMA V
	Calculated Frequency(GHz)	848.8	1880	1907.6	1740	846.6
	Maximum Turn-up power (dBm)	29.5	23.5	16	14.5	20
	Maximum rated power(mW)	891.25	223.87	39.81	28.18	100.00
Back Side	Separation distance (cm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.94	10.86	11.37	16.30
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (cm)	139	139	139	139	139
	exclusion threshold(mW)	666.43	999.40	998.60	1003.71	665.34
	Testing required?	YES	NO	NO	NO	NO
Right Edge	Separation distance (cm)	27	27	27	27	27
	exclusion threshold(mW)	87.92	59.08	58.65	61.41	88.03
	Testing required?	YES	YES	NO	NO	YES
Top Edge	Separation distance (cm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.94	10.86	11.37	16.30
	Testing required?	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (cm)	146	146	146	146	146
	exclusion threshold(mW)	706.04	1069.40	1068.60	1073.71	704.85
	Testing required?	YES	NO	NO	NO	NO



Exposure Position	Wireless Interface	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 17
	Calculated Frequency (GHz)	1900	1745	844	2560	710
	Maximum Turn-up power (dBm)	18	16.5	22	16	25
	Maximum rated power(mW)	63.10	44.67	158.49	39.81	316.23
Back Side	Separation distance (cm)	5	5	5	5	5
	exclusion threshold(mW)	10.88	11.36	16.33	9.38	17.80
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (cm)	139	139	139	139	139
	exclusion threshold(mW)	998.82	1003.55	664.05	983.75	599.28
	Testing required?	NO	NO	NO	NO	NO
Right Edge	Separation distance (cm)	27	27	27	27	27
	exclusion threshold(mW)	58.76	61.32	88.17	50.63	96.13
	Testing required?	YES	NO	YES	NO	YES
Top Edge	Separation distance (cm)	5	5	5	5	5
	exclusion threshold(mW)	10.88	11.36	16.33	9.38	17.80
	Testing required?	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (cm)	146	146	146	146	146
	exclusion threshold(mW)	1068.82	1073.55	703.44	1053.75	632.42
	Testing required?	NO	NO	NO	NO	NO



Exposure Position	Wireless Interface	LTE Band 38	LTE Band 66	BT	2.4G WLAN
	Calculated Frequency (GHz)	2580	1770	2441	2412
	Maximum Turn-up power (dBm)	16.5	16	5	16.5
	Maximum rated power(mW)	44.67	39.81	3.16	44.67
Back Side	Separation distance (cm)	5	5	5	5
	exclusion threshold(mW)	9.34	11.27	9.60	9.66
	Testing required?	YES	YES	NO	YES
Left Edge	Separation distance (cm)	139	139	71	71
	exclusion threshold(mW)	983.39	1002.75	306.01	306.58
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (cm)	27	27	129	129
	exclusion threshold(mW)	50.43	60.88	886.01	886.58
	Testing required?	NO	NO	NO	NO
Top Edge	Separation distance (cm)	5	5	5	5
	exclusion threshold(mW)	9.34	11.27	9.60	9.66
	Testing required?	YES	YES	NO	YES
Bottom Edge	Separation distance (cm)	146	146	146	146
	exclusion threshold(mW)	1053.39	1072.75	1056.01	1056.58
	Testing required?	NO	NO	NO	NO



Exposure Position	Wireless Interface	5.2G WLAN	5.3G WLAN	5.8G WLAN
	Calculated Frequency (GHz)	5240	5320	5745
	Maximum Turn-up power (dBm)	4.5	6	1
	Maximum rated power(mW)	2.82	3.98	1.26
Back Side	Separation distance (cm)	5	5	5
	exclusion threshold(mW)	6.55	6.50	6.26
	Testing required?	NO	NO	NO
Left Edge	Separation distance (cm)	71	71	71
	exclusion threshold(mW)	275.53	275.03	272.58
	Testing required?	NO	NO	NO
Right Edge	Separation distance (cm)	129	129	129
	exclusion threshold(mW)	855.53	855.03	852.58
	Testing required?	NO	NO	NO
Top Edge	Separation distance (cm)	5	5	5
	exclusion threshold(mW)	6.55	6.50	6.26
	Testing required?	NO	NO	NO
Bottom Edge	Separation distance (cm)	146	146	146
	exclusion threshold(mW)	1025.53	1025.03	1022.58
	Testing required?	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm,25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:

$$[(\text{max.power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})]^*[\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
, f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation.

The result is rounded to one decimal place for comparison



For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare

5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at > 1500MHz and ≤ 6GHz
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of 4G Tablet display screens are generally not necessary.




8. EUT Test Position

This EUT was tested in Back Side, Left Side, Right Edge, Top Side and Bottom Side.

8.1 Body-worn Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

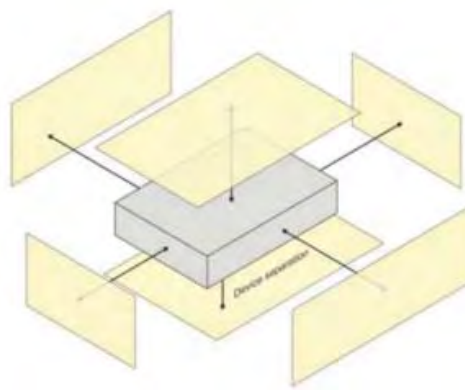



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Symbol	Uncertainty Component	Prob. Dist.	Unc. $a(x_i)$	Div. q_i	$u(x_i) = a(x_i)/q_i$	C_i	$u(y) = C_i * u(x_i)$	v_i
Measurement system errors								
CF	Probe calibration	N ($k = 2$)	5.8	2	2.90	1	2.90	∞
CF _{drift}	Probe calibration drift	R	0.12	$\sqrt{3}$	0.07	1	0.07	∞
LIN	Probe linearity and detection limit	R	1.91	$\sqrt{3}$	1.10	1	1.10	∞
BBS	Broadband signal	R	0.15	$\sqrt{3}$	0.09	1	0.09	∞
ISO	Probe isotropy	R	0.18	$\sqrt{3}$	0.10	1	0.10	∞
DAE	Other probe and data acquisition errors	N	2.7	1	2.70	1	2.70	∞
AMB	RF ambient and noise	N	1.73	1	1.73	1	1.73	∞
Δ_{xyz}	Probe positioning errors	N	0.81	1	0.81	$2/\delta$	0.81	
DAT	Data processing errors	N	2.5	1	2.50	1	2.50	∞
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Measurement of phantom conductivity(σ)	N	4.4	1	4.4	$c\epsilon, c\sigma$	4.40	∞
LIQ(T_c)	Temperature effects (medium)	R	2.9	$\sqrt{3}$	1.67	$c\epsilon, c\sigma$	1.67	∞
EPS	Shell permittivity	R	3.4	$\sqrt{3}$	1.96	See 8.4.2.3	0.49	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	N	0.8	1	0.8	2	1.60	∞
D _{xyz}	Repeatability of positioning the DUT or source against the phantom	N	1.5	1	1.5	1	1.50	5
H	Device holder effects	N	3	1	3	1	3.00	
MOD	Effect of operating mode on probe sensitivity	R	3.59	$\sqrt{3}$	2.07	1	2.07	∞
TAS	Time-average SAR	R	1.73	$\sqrt{3}$	1.00	1	1.00	∞
RF _{drift}	Variation in SAR due to drift in output of DUT	N	2.89	1	2.89	1	2.89	
VAL	Validation antenna uncertainty (validation measurement only)	N	1.45	1	1.45	1	1.45	
P _{in}	Uncertainty in accepted power (validation measurement only)	N	2.5	1	2.5	1	2.50	
Corrections to the SAR result (if applied)								
C(ϵ', σ)	Phantom deviation from target (ϵ', σ)	N	2.31	1	2.31	1	2.31	
C(R)	SAR scaling	R	1.15	$\sqrt{3}$	0.66	1	0.66	
u(Δ SAR)	Combined uncertainty						9.53	
U	Expanded uncertainty and effective degrees of freedom					U =	19.06	



10. Conducted Power Measurement

10.1 Test Result:

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	28.87	29.02	29.28	23.20	23.23	22.91
GPRS (GMSK, 1-Slot)	28.88	29.03	29.31	23.21	23.25	22.92
GPRS (GMSK, 2-Slot)	28.67	28.80	29.08	23.05	23.03	22.73
GPRS (GMSK, 3-Slot)	27.79	27.91	28.17	21.87	21.91	21.68
GPRS (GMSK, 4-Slot)	27.02	27.13	27.38	20.73	20.79	20.63
EGPRS (8PSK, 1-Slot)	26.30	25.22	25.89	22.62	22.41	22.95
EGPRS (8PSK, 2-Slot)	25.21	24.32	24.99	21.57	21.87	22.35
EGPRS (8PSK, 3-Slot)	22.67	21.93	22.30	19.48	19.60	20.04
EGPRS (8PSK, 4-Slot)	21.16	20.58	21.01	18.33	18.13	18.72

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.
 Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link
 Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link
 Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	19.84	19.99	20.25	14.17	14.20	13.88
GPRS (GMSK, 1-Slot)	19.85	20.00	20.28	14.18	14.22	13.89
GPRS (GMSK, 2-Slot)	22.65	22.78	23.06	17.03	17.01	16.71
GPRS (GMSK, 3-Slot)	23.53	23.65	23.91	17.61	17.65	17.42
GPRS (GMSK, 4-Slot)	24.01	24.12	24.37	17.72	17.78	17.62
EGPRS (8PSK, 1-Slot)	17.27	16.19	16.86	13.59	13.38	13.92
EGPRS (8PSK, 2-Slot)	19.19	18.30	18.97	15.55	15.85	16.33
EGPRS (8PSK, 3-Slot)	18.41	17.67	18.04	15.22	15.34	15.78
EGPRS (8PSK, 4-Slot)	18.15	17.57	18.00	15.32	15.12	15.71

Remark:
 1. SAR testing was performed on the maximum frame-averaged power mode.
 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum
 Burst - averaged power based on time slots. The calculated method is shown as below:
 Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB
 Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB
 Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB
 Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB



WCDMA

Band	WCDMA Band 2			WCDMA Band 4			WCDMA Band 5		
Channel	9262	9400	9538	9262	9400	9538	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6	1852.4	1880	1907.6	1852.4	1880	1907.6
RMC 12.2Kbps	15.64	15.58	15.67	14.35	14.43	14.32	19.42	19.6	19.77
HSDPA Subtest-1	14.69	14.64	14.72	13.33	13.41	13.33	18.42	18.63	18.79
HSDPA Subtest-2	14.31	14.18	14.3	12.67	12.92	12.86	18.06	18.24	18.42
HSDPA Subtest-3	12.87	12.86	13.28	11.58	11.9	11.82	17.02	17.06	17.24
HSDPA Subtest-4	13.39	13.14	13.29	11.57	11.7	11.41	16.62	16.94	17.33
HSUPA Subtest-1	13.47	14.41	14.48	12.1	13.2	13.09	17.23	18.48	18.59
HSUPA Subtest-2	14.51	14.52	14.61	13.17	13.22	13.26	18.33	18.53	18.73
HSUPA Subtest-3	12.9	13.35	13.44	11.53	12.07	11.96	16.72	17.18	17.62
HSUPA Subtest-4	14.67	14.62	14.71	13.31	13.43	13.32	18.45	18.64	18.79
HSUPA Subtest-5	13.28	14.03	13.89	11.99	12.72	12.48	17.28	17.79	18.13

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM (db)	MPR (db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



2.4G WLAN

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11b	1	2412	16.27	42.36
	6	2437	15.69	37.07
	11	2462	15.84	38.37
802.11g	1	2412	14.96	31.33
	6	2437	14.86	30.62
	11	2462	14.82	30.34
802.11 n-HT20	1	2412	13.09	20.37
	6	2437	12.68	18.54
	11	2462	12.65	18.41
802.11 n-HT40	3	2422	13.15	20.65
	6	2437	13.44	22.08
	9	2452	13.09	20.37

Bluetooth

BT				
Mode	Frequency (MHz)	Emission Level (dBuV/m)	EIRP (dBm)	EIRP (mW)
GFSK(1Mbps)	2402	91.71	3.03	2.01
	2441	90.56	4.74	2.98
	2480	91.71	2.99	1.99
π/4-QPSK(2Mbps)	2402	91.69	3.39	2.18
	2441	90.81	-1.84	0.65
	2480	91.4	2.57	1.81
8DPSK(3Mbps)	2402	90.39	3.27	2.12
	2441	90.61	4.28	2.68
	2480	90.75	2.59	1.82

Note: EIRP= Emission Level (dBuV/m)-95.2

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-2.78	0.53
	19	2440	-1.72	0.67
	39	2480	-3.52	0.44
GFSK(2Mbps)	0	2402	-2.77	0.53
	19	2440	-1.83	0.66
	39	2480	-3.56	0.44



WLAN (5.2Gband)

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	36	5180	4.92	3.10
	40	5200	5.21	3.32
	48	5240	5.47	3.52
802.11n-HT20	36	5180	3.73	2.36
	40	5200	4.10	2.57
	48	5240	3.95	2.48
802.11n-HT40	38	5190	2.78	1.90
	46	5230	2.33	1.71
802.11ac-VHT20	36	5180	1.38	1.37
	40	5200	1.27	1.34
	48	5240	2.15	1.64
802.11ac-VHT40	38	5190	1.91	1.55
	46	5230	2.16	1.64
802.11ac-VHT80	42	5210	1.00	1.26

WLAN (5.3G band)

5.3G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	52	5260	5.41	3.48
	60	5300	4.89	3.08
	64	5320	5.44	3.50
802.11n-HT20	52	5260	3.69	2.34
	60	5300	3.78	2.39
	64	5320	3.78	2.39
802.11n-HT40	54	5270	2.39	1.73
	62	5310	2.61	1.82
802.11ac-VHT20	52	5260	2.19	1.66
	60	5300	2.35	1.72
	64	5320	2.08	1.61
802.11ac-VHT40	54	5270	2.28	1.69
	62	5310	1.98	1.58
802.11ac-VHT80	58	5290	1.04	1.27



WLAN (5.8G band)

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	149	5745	0.80	1.20
	157	5785	0.69	1.17
	165	5825	0.39	1.09
802.11n-HT20	149	5745	-0.65	0.86
	157	5785	-0.70	0.85
	165	5825	-1.37	0.73
802.11n-HT40	151	5755	-1.65	0.68
	159	5795	-1.65	0.68
802.11ac-VHT20	149	5745	-2.57	0.55
	157	5785	-2.46	0.57
	165	5825	-3.00	0.50
802.11ac-VHT40	151	5755	-2.55	0.56
	159	5795	-2.55	0.56
802.11ac-VHT80	155	5775	-3.18	0.48



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	16.89	16.89	16.94
1.4	1	2		17.07	17.02	17.06
1.4	1	5		16.88	16.91	16.91
1.4	3	0		17.02	16.89	17.00
1.4	3	1		16.96	16.86	17.02
1.4	3	2		17.08	16.93	17.00
1.4	6	0		15.90	15.87	15.92
1.4	1	0	16-QAM	15.84	16.10	16.19
1.4	1	2		15.99	16.21	16.28
1.4	1	5		15.88	16.12	16.22
1.4	3	0		16.20	16.17	16.30
1.4	3	1		16.22	16.18	16.32
1.4	3	2		16.25	16.17	16.33
1.4	6	0		15.13	15.08	15.15
3	1	0	QPSK	16.96	16.94	16.97
3	1	7		17.30	17.23	17.31
3	1	14		17.01	16.94	16.94
3	8	0		15.95	15.91	16.03
3	8	4		16.02	15.92	16.02
3	8	7		16.05	15.91	16.03
3	15	0		15.98	15.91	15.97
3	1	0	16-QAM	16.24	15.85	16.51
3	1	7		16.75	16.29	16.73
3	1	14		16.25	15.81	16.50
3	8	0		14.99	14.91	15.07
3	8	4		15.08	14.93	15.08
3	8	7		15.04	14.92	15.02
3	15	0		14.97	14.96	15.04



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	16.79	16.76	16.86
5	1	12		17.26	17.15	17.21
5	1	24		16.89	16.82	16.89
5	12	0		15.91	15.90	16.00
5	12	6		16.04	15.96	16.07
5	12	11		16.01	15.92	15.97
5	25	0		15.99	15.86	16.02
5	1	0	16-QAM	16.27	16.49	16.28
5	1	12		16.76	16.80	16.76
5	1	24		16.31	16.52	16.34
5	12	0		14.97	14.96	14.94
5	12	6		15.08	14.97	15.02
5	12	11		15.04	14.89	14.87
5	25	0		14.96	14.93	15.04
10	1	0	QPSK	16.93	16.94	16.89
10	1	24		17.07	17.08	17.07
10	1	49		17.05	16.90	16.94
10	25	0		16.00	16.04	16.14
10	25	12		16.05	15.95	16.03
10	25	24		16.13	15.95	15.96
10	50	0		16.05	15.97	16.03
10	1	0	16-QAM	16.18	15.88	16.50
10	1	24		16.30	15.99	16.61
10	1	49		16.29	15.86	16.53
10	25	0		15.00	15.06	15.16
10	25	12		15.09	15.01	15.08
10	25	24		15.12	14.99	15.01
10	50	0		15.10	15.00	15.07



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	16.89	16.90	16.81
15	1	37		17.38	17.32	17.24
15	1	74		17.00	16.84	16.90
15	36	0		16.02	15.99	16.03
15	36	18		16.10	15.99	16.06
15	36	39		16.11	15.96	15.98
15	75	0		16.04	15.96	16.00
15	1	0	16-QAM	16.13	16.05	16.37
15	1	38		16.69	16.53	16.74
15	1	75		16.30	16.05	16.45
15	36	0		15.06	14.91	15.04
15	36	18		15.13	14.92	15.05
15	36	39		15.16	14.90	15.00
15	75	0		15.02	14.99	14.99
20	1	0	QPSK	17.26	17.23	17.23
20	1	49		17.56	17.48	17.66
20	1	99		17.35	17.15	17.36
20	50	0		16.52	16.50	16.54
20	50	24		16.58	16.46	16.51
20	50	49		16.64	16.48	16.31
20	100	0		16.56	16.49	16.46
20	1	0	16-QAM	16.62	16.69	16.52
20	1	49		16.94	16.80	16.94
20	1	99		16.76	16.62	16.65
20	50	0		15.59	15.61	15.58
20	50	24		15.66	15.54	15.53
20	50	49		15.66	15.57	15.33
20	100	0		15.61	15.54	15.48



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	15.33	15.41	15.41
1.4	1	2		15.41	15.57	15.50
1.4	1	5		15.18	15.42	15.43
1.4	3	0		15.33	15.45	15.35
1.4	3	1		15.31	15.44	15.43
1.4	3	2		15.32	15.42	15.39
1.4	6	0		14.23	14.40	14.38
1.4	1	0	16-QAM	14.48	14.30	14.60
1.4	1	2		14.58	14.46	14.66
1.4	1	5		14.44	14.30	14.58
1.4	3	0		14.59	14.62	14.58
1.4	3	1		14.59	14.67	14.63
1.4	3	2		14.61	14.66	14.61
1.4	6	0		13.52	13.69	13.60
3	1	0	QPSK	15.29	15.43	15.35
3	1	7		15.48	15.77	15.68
3	1	14		15.30	15.48	15.34
3	8	0		14.22	14.36	14.36
3	8	4		14.23	14.40	14.35
3	8	7		14.25	14.38	14.35
3	15	0		14.23	14.38	14.35
3	1	0	16-QAM	14.49	14.34	14.85
3	1	7		14.77	14.64	15.20
3	1	14		14.51	14.37	14.83
3	8	0		13.28	13.38	13.44
3	8	4		13.32	13.44	13.45
3	8	7		13.29	13.44	13.40
3	15	0		13.25	13.52	13.44



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	15.13	15.24	15.33
5	1	12		15.67	15.70	15.75
5	1	24		15.18	15.40	15.31
5	12	0		14.23	14.37	14.38
5	12	6		14.25	14.44	14.39
5	12	11		14.21	14.43	14.33
5	25	0		14.28	14.42	14.42
5	1	0	16-QAM	14.57	14.68	14.93
5	1	12		14.99	15.04	15.33
5	1	24		14.51	14.76	14.95
5	12	0		13.25	13.43	13.42
5	12	6		13.26	13.47	13.48
5	12	11		13.20	13.45	13.36
5	25	0		13.37	13.48	13.44
10	1	0	QPSK	15.26	15.37	15.54
10	1	24		15.33	15.52	15.59
10	1	49		15.30	15.52	15.47
10	25	0		14.34	14.42	14.56
10	25	12		14.27	14.42	14.43
10	25	24		14.29	14.52	14.39
10	50	0		14.31	14.47	14.48
10	1	0	16-QAM	14.76	14.58	14.41
10	1	24		14.84	14.73	14.47
10	1	49		14.84	14.72	14.29
10	25	0		13.39	13.45	13.57
10	25	12		13.34	13.47	13.51
10	25	24		13.37	13.62	13.45
10	50	0		13.40	13.60	13.53



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	15.21	15.19	15.44
15	1	37		15.61	15.67	15.84
15	1	74		15.29	15.44	15.31
15	36	0		14.30	14.34	14.49
15	36	18		14.28	14.42	14.53
15	36	39		14.32	14.50	14.37
15	75	0		14.30	14.45	14.47
15	1	0	16-QAM	14.34	14.68	14.60
15	1	38		14.66	15.24	15.03
15	1	75		14.42	14.92	14.55
15	36	0		13.28	13.37	13.55
15	36	18		13.27	13.50	13.57
15	36	39		13.29	13.57	13.48
15	75	0		13.40	13.50	13.53
20	1	0	QPSK	15.59	15.60	15.73
20	1	49		15.93	16.04	16.07
20	1	99		15.77	15.87	15.65
20	50	0		14.81	14.82	14.99
20	50	24		14.82	14.98	15.02
20	50	49		14.85	15.03	14.92
20	100	0		14.86	14.95	14.97
20	1	0	16-QAM	14.87	14.89	15.11
20	1	49		15.27	15.33	15.45
20	1	99		15.03	15.17	15.07
20	50	0		13.85	13.88	14.09
20	50	24		13.83	14.06	14.10
20	50	49		13.91	14.18	13.98
20	100	0		13.92	14.04	14.05



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	20.74	21.01	21.06
1.4	1	2		20.94	21.15	21.22
1.4	1	5		20.82	21.00	21.04
1.4	3	0		20.85	20.93	21.15
1.4	3	1		20.81	20.96	21.15
1.4	3	2		20.82	20.98	21.12
1.4	6	0		19.80	19.96	20.07
1.4	1	0	16-QAM	19.63	20.08	20.31
1.4	1	2		19.81	20.24	20.39
1.4	1	5		19.64	20.13	20.27
1.4	3	0		19.98	20.15	20.35
1.4	3	1		19.98	20.16	20.35
1.4	3	2		19.97	20.17	20.37
1.4	6	0		18.97	19.16	19.28
3	1	0	QPSK	20.84	20.93	21.16
3	1	7		21.15	21.29	21.26
3	1	14		20.88	20.99	21.13
3	8	0		19.77	19.98	20.12
3	8	4		19.85	19.98	20.17
3	8	7		19.80	20.01	20.14
3	15	0		19.77	19.91	20.12
3	1	0	16-QAM	19.75	20.41	20.37
3	1	7		20.02	20.80	20.65
3	1	14		19.69	20.45	20.34
3	8	0		18.83	19.02	19.19
3	8	4		18.84	19.06	19.22
3	8	7		18.87	19.05	19.16
3	15	0		18.90	19.03	19.11



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	20.71	20.77	21.06
5	1	12		21.18	21.40	21.51
5	1	24		20.76	20.93	21.07
5	12	0		19.78	19.95	20.13
5	12	6		19.82	20.04	20.19
5	12	11		19.79	19.98	20.12
5	25	0		19.82	20.00	20.12
5	1	0	16-QAM	20.03	20.18	20.59
5	1	12		20.30	20.58	21.02
5	1	24		20.09	20.31	20.69
5	12	0		18.71	18.99	19.20
5	12	6		18.84	19.06	19.21
5	12	11		18.71	19.04	19.14
5	25	0		18.84	19.00	19.14
10	1	0	QPSK	21.28	21.40	21.55
10	1	24		21.46	21.54	21.72
10	1	49		21.42	21.68	21.64
10	25	0		20.33	20.53	20.73
10	25	12		20.32	20.51	20.62
10	25	24		20.34	20.66	20.63
10	50	0		20.32	20.54	20.68
10	1	0	16-QAM	20.43	20.26	21.02
10	1	24		20.63	20.48	21.15
10	1	49		20.61	20.56	21.08
10	25	0		19.32	19.55	19.78
10	25	12		19.32	19.52	19.68
10	25	24		19.35	19.66	19.67
10	50	0		19.37	19.56	19.71



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	14.40	14.70	15.38
5	1	12		14.55	14.77	15.62
5	1	24		14.66	14.76	15.45
5	12	0		14.43	14.29	14.48
5	12	6		14.50	14.35	14.54
5	12	11		14.51	14.31	14.47
5	25	0		14.53	14.37	14.53
5	1	0	16-QAM	14.73	14.59	15.00
5	1	12		14.91	14.99	15.43
5	1	24		14.80	14.64	15.01
5	12	0		13.41	13.34	13.51
5	12	6		13.50	13.41	13.57
5	12	11		13.48	13.37	13.51
5	25	0		13.53	13.33	13.47
10	1	0	QPSK	14.62	14.82	15.46
10	1	24		14.63	14.69	15.52
10	1	49		14.98	15.00	15.55
10	25	0		14.45	14.36	14.52
10	25	12		14.51	14.31	14.49
10	25	24		14.59	14.39	14.52
10	50	0		14.57	14.42	14.58
10	1	0	16-QAM	14.42	14.82	14.66
10	1	24		14.46	14.88	14.84
10	1	49		14.46	14.86	14.73
10	25	0		13.51	13.43	13.55
10	25	12		13.54	13.39	13.49
10	25	24		13.67	13.45	13.55
10	50	0		13.51	13.43	13.58



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	14.49	14.77	15.41
15	1	37		14.62	14.69	15.47
15	1	74		15.03	15.15	15.48
15	36	0		14.42	14.34	14.56
15	36	18		14.56	14.42	14.52
15	36	39		14.56	14.38	14.56
15	75	0		14.54	14.41	14.55
15	1	0	16-QAM	14.89	14.51	14.61
15	1	38		15.08	14.77	14.87
15	1	75		14.85	14.50	14.69
15	36	0		13.51	13.42	13.54
15	36	18		13.60	13.46	13.50
15	36	39		13.62	13.46	13.52
15	75	0		13.52	13.36	13.61
20	1	0	QPSK	14.74	14.86	15.45
20	1	49		15.10	15.06	15.89
20	1	99		15.26	15.40	15.90
20	50	0		14.90	14.85	14.98
20	50	24		15.06	14.94	15.02
20	50	49		15.00	14.93	14.95
20	100	0		14.96	14.88	15.05
20	1	0	16-QAM	14.91	15.01	15.08
20	1	49		15.34	15.31	15.43
20	1	99		15.06	15.09	15.20
20	50	0		13.93	13.89	14.04
20	50	24		14.10	13.95	14.02
20	50	49		14.02	13.96	13.97
20	100	0		14.00	13.90	14.00



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.89	23.84	23.84
5	1	12		24.23	24.25	24.12
5	1	24		23.90	23.85	23.81
5	12	0		22.90	23.02	22.98
5	12	6		23.08	23.06	23.04
5	12	11		23.07	22.95	22.91
5	25	0		22.96	23.03	22.99
5	1	0	16-QAM	23.44	23.21	23.21
5	1	12		23.77	23.45	23.71
5	1	24		23.51	23.23	23.20
5	12	0		21.91	21.96	21.98
5	12	6		22.04	22.00	22.03
5	12	11		21.98	21.95	21.93
5	25	0		21.93	22.04	21.95
10	1	0	QPSK	24.40	24.45	24.37
10	1	24		24.55	24.59	24.46
10	1	49		24.48	24.42	24.38
10	25	0		23.41	23.45	23.54
10	25	12		23.54	23.56	23.51
10	25	24		23.50	23.51	23.55
10	50	0		23.48	23.54	23.54
10	1	0	16-QAM	23.60	23.30	23.84
10	1	24		23.75	23.44	23.93
10	1	49		23.68	23.39	23.88
10	25	0		22.40	22.48	22.60
10	25	12		22.47	22.52	22.52
10	25	24		22.47	22.49	22.56
10	50	0		22.49	22.49	22.55



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	15.30	15.23	14.99
5	1	12		15.60	15.48	15.27
5	1	24		15.32	15.15	15.02
5	12	0		14.38	14.28	14.13
5	12	6		14.45	14.33	14.25
5	12	11		14.40	14.25	14.18
5	25	0		14.42	14.32	14.17
5	1	0	16-QAM	15.02	14.60	14.41
5	1	12		15.32	14.83	14.73
5	1	24		15.05	14.55	14.46
5	12	0		13.40	13.24	13.14
5	12	6		13.48	13.30	13.26
5	12	11		13.43	13.21	13.19
5	25	0		13.38	13.35	13.16
10	1	0	QPSK	15.38	15.36	15.09
10	1	24		15.55	15.43	15.23
10	1	49		15.44	15.21	15.14
10	25	0		14.47	14.42	14.23
10	25	12		14.43	14.32	14.18
10	25	24		14.44	14.30	14.24
10	50	0		14.50	14.34	14.19
10	1	0	16-QAM	14.59	14.39	14.68
10	1	24		14.74	14.43	14.80
10	1	49		14.58	14.24	14.71
10	25	0		13.50	13.40	13.23
10	25	12		13.48	13.34	13.20
10	25	24		13.50	13.29	13.25
10	50	0		13.55	13.36	13.23



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	15.35	15.35	15.10
15	1	37		15.66	15.57	15.45
15	c	74		15.33	15.12	15.14
15	36	0		14.48	14.38	14.20
15	36	18		14.49	14.35	14.25
15	36	39		14.42	14.27	14.23
15	75	0		14.47	14.37	14.19
15	1	0	16-QAM	14.89	14.53	14.36
15	1	38		15.20	14.77	14.70
15	1	75		14.89	14.33	14.39
15	36	0		13.52	13.50	13.14
15	36	18		13.51	13.47	13.16
15	36	39		13.48	13.34	13.14
15	75	0		13.47	13.35	13.24
20	1	0	QPSK	15.66	15.72	15.45
20	1	49		16.11	16.02	15.83
20	1	99		15.66	15.45	15.49
20	50	0		14.96	14.96	14.67
20	50	24		14.96	14.89	14.73
20	50	49		14.91	14.76	14.64
20	100	0		14.94	14.83	14.66
20	1	0	16-QAM	15.03	14.99	14.68
20	1	49		15.48	15.28	15.05
20	1	99		15.07	14.80	14.74
20	50	0		14.06	13.92	13.70
20	50	24		14.04	13.85	13.79
20	50	49		14.01	13.69	13.71
20	100	0		13.94	13.86	13.70



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	14.95	14.96	15.19
1.4	1	2		15.06	15.19	15.41
1.4	1	5		14.89	15.01	15.25
1.4	3	0		14.83	15.08	15.23
1.4	3	1		14.88	15.06	15.25
1.4	3	2		14.89	15.07	15.29
1.4	6	0		13.88	14.00	14.19
1.4	1	0	16-QAM	14.06	14.24	14.14
1.4	1	2		14.23	14.33	14.28
1.4	1	5		14.07	14.25	14.14
1.4	3	0		14.11	14.33	14.45
1.4	3	1		14.09	14.35	14.43
1.4	3	2		14.10	14.41	14.47
1.4	6	0		13.06	13.25	13.48
3	1	0	QPSK	14.88	15.17	15.28
3	1	7		15.23	15.33	15.66
3	1	14		14.82	15.12	15.40
3	8	0		13.87	14.04	14.21
3	8	4		13.88	14.06	14.27
3	8	7		13.88	14.06	14.27
3	15	0		13.86	14.06	14.24
3	1	0	16-QAM	14.40	14.38	14.23
3	1	7		14.61	14.59	14.54
3	1	14		14.40	14.30	14.21
3	8	0		12.93	13.13	13.26
3	8	4		12.94	13.11	13.30
3	8	7		12.93	13.11	13.28
3	15	0		12.89	13.07	13.41



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	14.80	15.02	15.12
5	1	12		15.19	15.38	15.56
5	1	24		14.74	14.99	15.25
5	12	0		13.89	14.01	14.24
5	12	6		13.93	14.10	14.34
5	12	11		13.88	14.05	14.30
5	25	0		13.91	14.09	14.28
5	1	0	16-QAM	14.19	14.67	14.54
5	1	12		14.60	15.01	14.98
5	1	24		14.24	14.65	14.62
5	12	0		12.94	13.12	13.30
5	12	6		12.96	13.15	13.30
5	12	11		12.89	13.12	13.31
5	25	0		12.88	13.11	13.41
10	1	0	QPSK	14.88	15.16	15.17
10	1	24		14.94	15.23	15.39
10	1	49		14.85	15.09	15.34
10	25	0		13.96	14.13	14.25
10	25	12		13.93	14.09	14.25
10	25	24		13.87	14.08	14.25
10	50	0		13.94	14.15	14.30
10	1	0	16-QAM	14.37	14.35	14.08
10	1	24		14.46	14.45	14.25
10	1	49		14.37	14.25	14.25
10	25	0		12.99	13.14	13.29
10	25	12		12.94	13.13	13.24
10	25	24		12.91	13.09	13.30
10	50	0		12.97	13.26	13.36




LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	14.87	15.04	14.98
15	1	37		15.21	15.29	15.38
15	1	74		14.93	14.97	15.31
15	36	0		13.91	14.16	14.16
15	36	18		13.89	14.18	14.25
15	36	39		13.99	14.12	14.28
15	75	0		13.93	14.07	14.20
15	1	0	16-QAM	14.02	14.57	14.22
15	1	38		14.29	14.83	14.67
15	1	75		14.09	14.44	14.51
15	36	0		12.87	13.20	13.26
15	36	18		12.85	13.22	13.29
15	36	39		12.90	13.10	13.39
15	75	0		12.99	13.15	13.27
20	1	0	QPSK	15.16	15.32	15.31
20	1	49		15.45	15.70	15.83
20	1	99		15.40	15.33	15.69
20	50	0		14.49	14.67	14.64
20	50	24		14.43	14.65	14.66
20	50	49		14.51	14.52	14.63
20	100	0		14.49	14.55	14.65
20	1	0	16-QAM	14.49	14.78	14.54
20	1	49		14.77	15.15	15.11
20	1	99		14.68	14.74	14.96
20	50	0		13.53	13.76	13.68
20	50	24		13.52	13.75	13.69
20	50	49		13.59	13.63	13.69
20	100	0		13.59	13.66	13.72


11. EUT and Test Setup Photo

11.1 EUT Photos

Front side

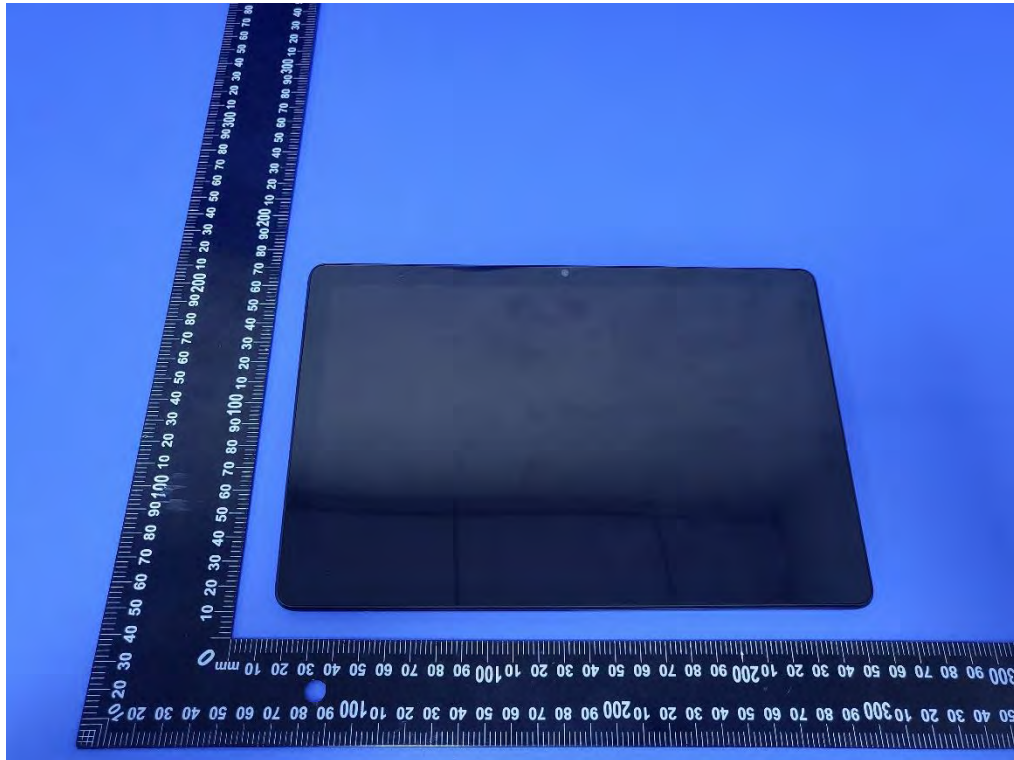


Back side

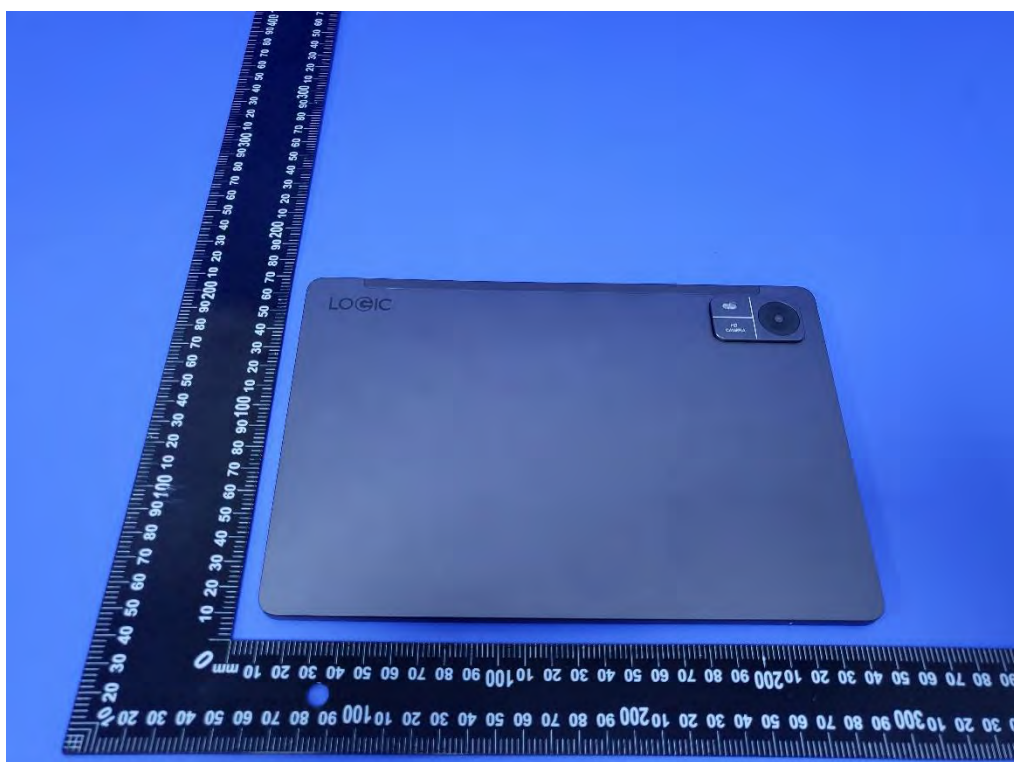




Right Edge

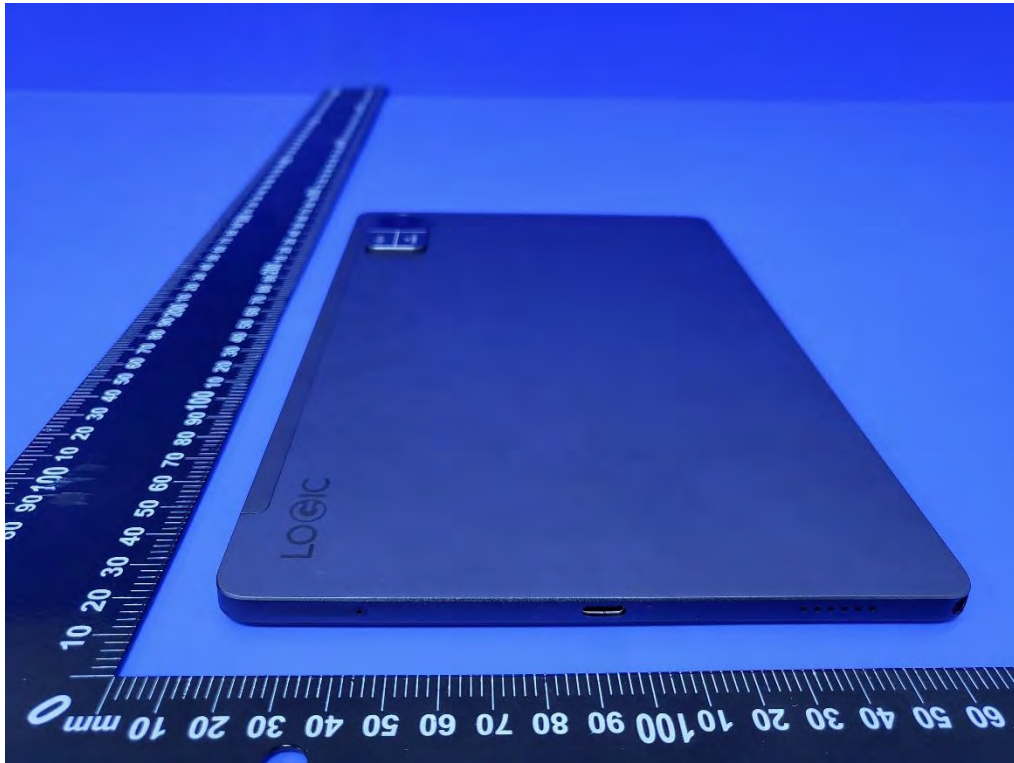


Left Edge

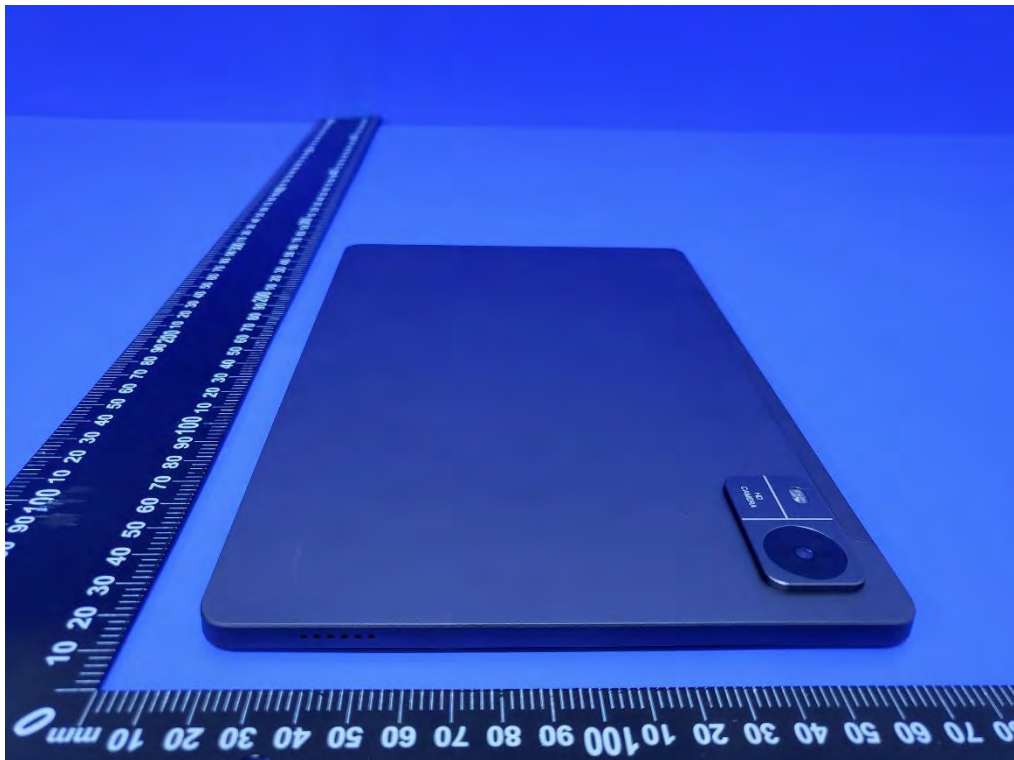




Top Edge

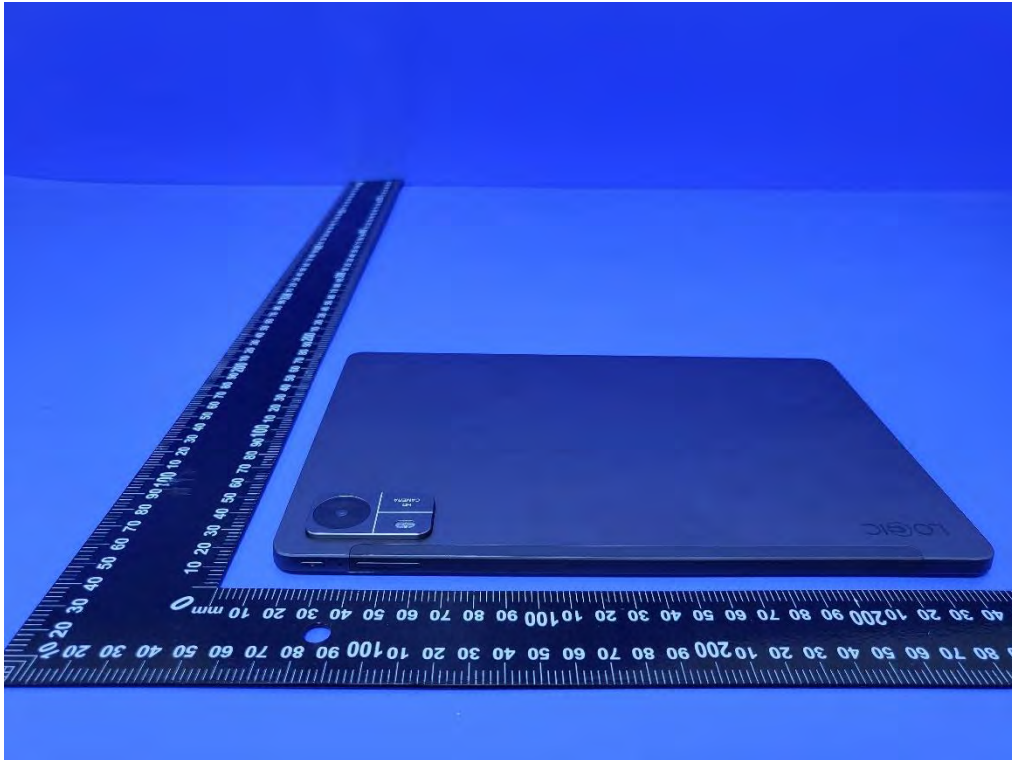


Bottom Edge

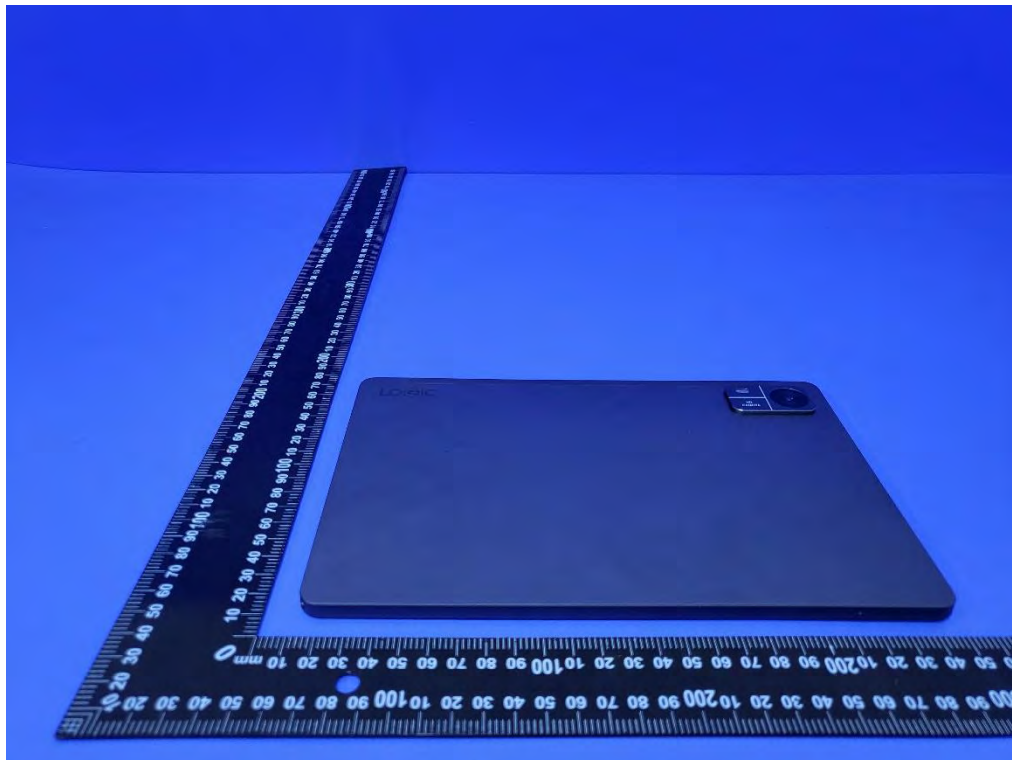



11.2 Setup Photos

Body Back side (separation distance 0mm)

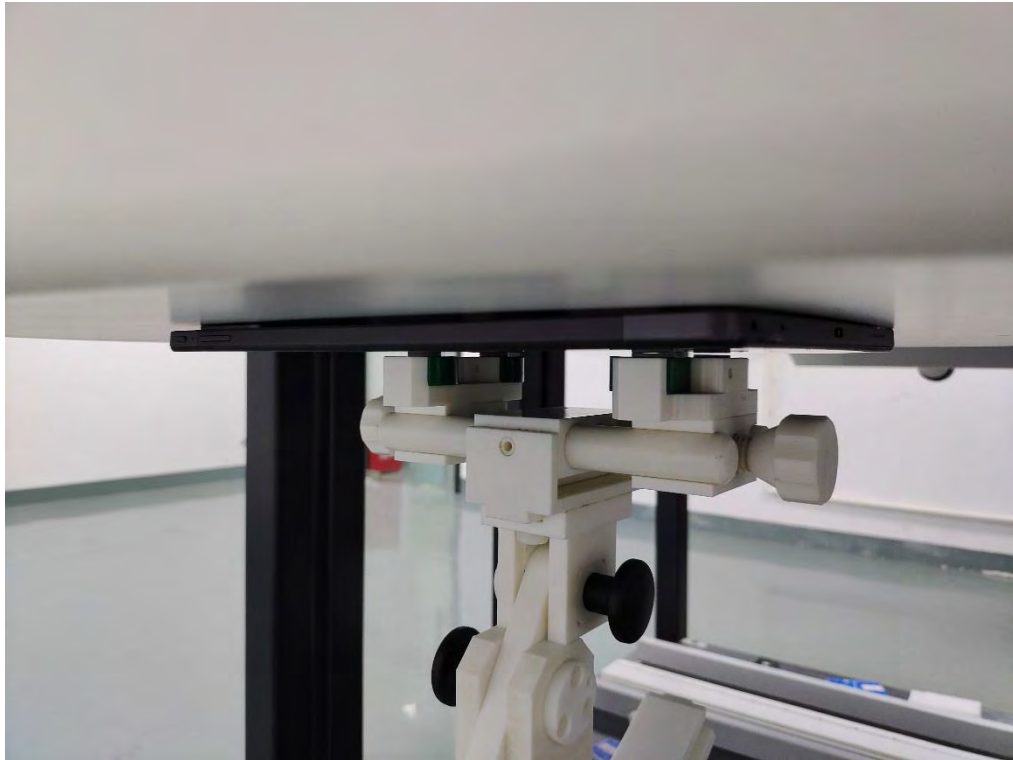


Body Left side (separation distance is 0mm)





Body Right side (separation distance is 0mm)

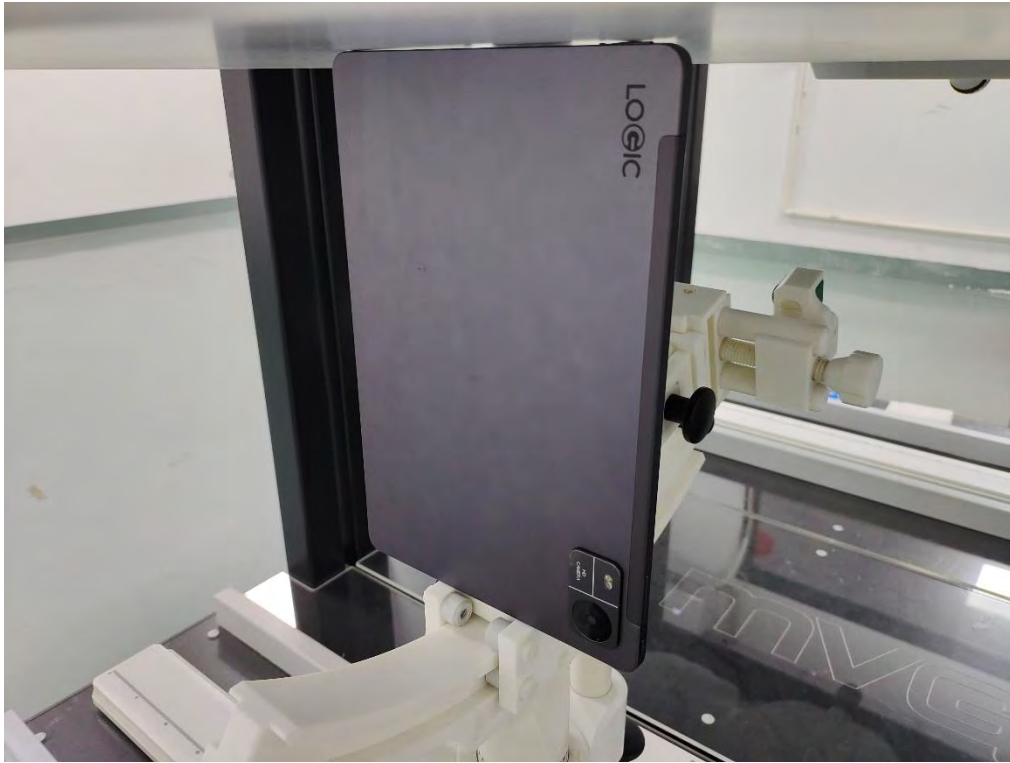

Body Top side (separation distance is 0mm)






Body Top side (separation distance is 0mm)





Liquid depth (15 cm)

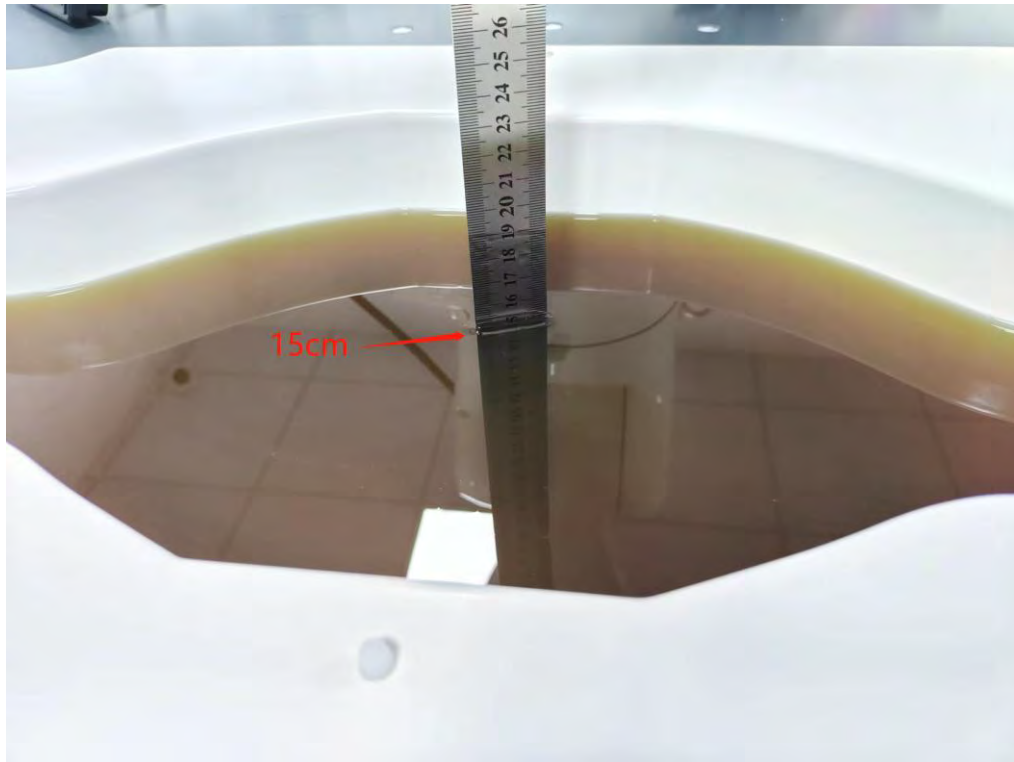



12. SAR Result Summary

12.1 Body-worn and Hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM850	Voice	Back Side	848.8	0.305	2.79	29.50	29.28	0.321	1
		Left Side	848.8	0.11	1.73	29.50	29.28	0.116	/
		Right Side	848.8	0.051	-1.01	29.50	29.28	0.054	/
		Top Side	848.8	0.231	3.02	29.50	29.28	0.243	/
		Bottom Side	848.8	0.046	3.88	29.50	29.28	0.048	/
PCS 1900	Voice	Back Side	1880	0.417	-3.23	23.50	23.23	0.444	2
		Left Side	1880	0.127	-2.40	23.50	23.23	0.135	/
		Right Side	1880	0.076	1.64	23.50	23.23	0.081	/
		Top Side	1880	0.321	-3.89	23.50	23.23	0.342	/
WCDMA Band II	RMC	Back Side	1907.6	0.343	-0.12	16.00	15.67	0.370	3
		Left Side	1907.6	0.104	1.28	16.00	15.67	0.112	/
		Right Side	1907.6	0.069	-2.69	16.00	15.67	0.074	/
		Top Side	1907.6	0.276	-3.10	16.00	15.67	0.298	/
WCDMA Band IV	RMC	Back Side	1907.6	0.336	0.81	16.00	15.67	0.363	4
		Left Side	1740	0.108	3.74	14.50	14.43	0.110	/
		Right Side	1740	0.056	1.62	14.50	14.43	0.057	/
		Top Side	1740	0.268	-0.90	14.50	14.43	0.272	/
WCDMA Band V	RMC	Back Side	1740	0.237	-3.89	14.50	14.43	0.241	5
		Left Side	846.6	0.083	-1.69	20.00	19.77	0.088	/
		Right Side	846.6	0.042	-2.82	20.00	19.77	0.044	/
		Top Side	846.6	0.213	3.31	20.00	19.77	0.225	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Back Side	1900	0.550	-2.04	18.00	17.66	0.595	10
			50	0	Back Side	1960	0.461	0.93	17.00	16.64	0.501	/
			1	0	Right Side	1900	0.334	1.83	18.00	17.66	0.361	/
			50	0	Right Side	1960	0.265	1.67	17.00	16.64	0.288	/
			1	0	Top Side	1900	0.367	-3.71	18.00	17.66	0.397	/
			50	0	Top Side	1960	0.300	1.11	17.00	16.64	0.326	/
LTE Band 4	20M	QPSK	1	0	Back Side	1745	0.448	3.35	16.50	16.07	0.495	11
			50	0	Back Side	1732.5	0.376	-2.63	15.50	15.03	0.419	/
			1	0	Top Side	1745	0.325	-2.85	16.50	16.07	0.359	/
			50	0	Top Side	1732.5	0.246	-1.27	15.50	15.03	0.274	/
LTE Band 5	10M	QPSK	1	0	Back Side	844	0.325	-1.43	22.00	21.72	0.347	12
			25	0	Back Side	844	0.258	-2.95	21.00	20.73	0.275	/
			1	0	Right Side	844	0.203	-0.65	22.00	21.72	0.217	/
			25	0	Right Side	844	0.172	-0.95	21.00	20.73	0.183	/
			1	0	Top Side	844	0.214	2.47	22.00	21.72	0.228	/
			25	0	Top Side	844	0.153	1.63	21.00	20.73	0.163	/
LTE Band 7	20M	QPSK	1	0	Back Side	2560	0.503	2.29	16.00	15.90	0.515	13
			50	0	Back Side	2510	0.400	-0.25	15.50	15.06	0.443	/
			1	0	Top Side	2560	0.366	2.95	16.00	15.90	0.375	/
			50	0	Top Side	2510	0.304	3.76	15.50	15.06	0.336	/
LTE Band 17	10M	QPSK	1	0	Back Side	710	0.725	3.65	25.00	24.59	0.797	/
			25	0	Back Side	710	0.578	0.46	24.00	23.56	0.640	/
			1	0	Right Side	710	0.453	-0.07	25.00	24.59	0.498	/
			25	0	Right Side	710	0.374	-0.53	24.00	23.56	0.414	/
			1	0	Top Side	709	0.793	-2.07	25.00	24.55	0.880	/
			1	0	Top Side	710	0.864	0.13	25.00	24.59	0.950	14
			1	0	Top Side	711	0.746	-1.00	25.00	24.46	0.845	/
			25	0	Top Side	710	0.697	-2.96	24.00	23.56	0.771	/



LTE Band 38	20M	QPSK	1	0	Back Side	2580	0.220	3.83	16.50	16.11	0.241	15
			50	0	Back Side	2610	0.167	-0.38	15.00	14.96	0.169	/
			1	0	Top Side	2580	0.166	1.63	16.50	16.11	0.182	/
			50	0	Top Side	2610	0.148	-3.12	15.00	14.96	0.149	/
LTE Band 66	20M	QPSK	1	0	Back Side	1770	0.326	-0.55	16.00	15.83	0.339	16
			50	0	Back Side	1745	0.263	3.78	15.00	14.67	0.284	/
			1	0	Top Side	1770	0.234	-1.32	16.00	15.83	0.243	/
			50	0	Top Side	1745	0.188	1.79	15.00	14.67	0.203	/

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
2.4GHz WLAN	802.11b	Back Side	2412	0.502	-3.64	16.50	16.27	0.529	13
		Back Side	2437	0.397	-3.87	16.50	15.69	0.478	/
		Back Side	2462	0.423	0.67	16.50	15.84	0.492	/
		Left Side	2412	0.134	-3.59	16.50	16.27	0.141	/
		Top Side	2412	0.379	2.87	16.50	16.27	0.400	/
5.2GHz WLAN	802.11a	Back Side	5240	0.243	1.02	6.00	5.47	0.275	14
		Left Side	5240	0.087	-1.33	6.00	5.47	0.098	/
		Top Side	5240	0.149	-2.69	6.00	5.47	0.168	/
5.3GHz WLAN	802.11a	Back Side	5320	0.237	1.48	6.00	5.44	0.270	15
		Left Side	5320	0.053	-1.18	6.00	5.44	0.060	/
		Top Side	5320	0.159	-2.18	6.00	5.44	0.181	/
5.8GHz WLAN	802.11a	Back Side	5745	0.191	-2.93	1.00	0.80	0.200	16
		Left Side	5745	0.058	-0.60	1.00	0.80	0.061	/
		Top Side	5745	0.076	2.60	1.00	0.80	0.080	/
BT	GFSK	Back Side	2441		2.36	5.00	4.47	0.000	/
		Top Side	2441		-2.08	5.00	4.47	0.000	/

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scaled SAR(W/kg) = Measured SAR(W/kg) *Tune-up Scaling Factor
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Repeated SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR(W/Kg)
LTE Band 17	20M	QPSK	1	0	Top Side	709	0.786	-3.19	25.00	24.55	0.872
			1	0	Top Side	710	0.823	-1.17	25.00	24.59	0.905
			1	0	Top Side	711	0.740	3.36	25.00	24.46	0.838

Repeated SAR measurement

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg) 1g (W/Kg)	1 st Repeated SAR 1g	Ratio
LTE Band 17	20M	QPSK	1	0	Top Side	709	0.793	0.786	1.009
			1	0	Top Side	710	0.864	0.823	1.050
			1	0	Top Side	711	0.746	0.740	1.008

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg.
4. The ratio is the difference in percentage between original and repeated measured SAR.



12.2 Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Body	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth

NOTE:

1. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.

2. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.

3. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

a) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})^x \cdot [\sqrt{f} \text{ (GHz)} / x]$
W/kg for test separation distances ≤ 50 mm;

Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR		Maximum Turn-up Power		Antenna to user(mm)	Frequency (GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	5	3.162	5	2.41	0.131
	Body			5	2.41	0.131



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Body	GSM	0.444	0.973
		2.4G WLAN	0.529	
GSM + Bluetooth	Body	GSM	0.444	0.575
		Bluetooth	0.131	
GSM + 5G WLAN	Body	GSM	0.444	0.719
		5G WLAN	0.275	
WCDMA + 2.4G WLAN	Body	WCDMA	0.370	0.899
		2.4G WLAN	0.529	
WCDMA + Bluetooth	Body	WCDMA	0.370	0.501
		Bluetooth	0.131	
WCDMA + 5G WLAN	Body	WCDMA	0.370	0.645
		5G WLAN	0.275	
LTE + 2.4G WLAN	Body	LTE	0.950	1.479
		2.4G WLAN	0.529	
LTE + Bluetooth	Body	LTE	0.950	1.081
		Bluetooth	0.131	
LTE + 5G WLAN	Body	LTE	0.950	1.225
		5G WLAN	0.275	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	DIP0G750	SN 06/22 DIP0G750-638	2022.02.11	2025.02.10
835MHz Dipole	MVG	DIP0G835	SN 06/22 DIP0G835-639	2022.02.11	2025.02.10
1800MHz Dipole	MVG	DIP1G800	SN 06/22 DIP1G800-640	2022.02.11	2025.02.10
1900MHz Dipole	MVG	DIP1G900	SN 06/22 DIP1G900-641	2022.02.11	2025.02.10
2450MHz Dipole	MVG	DIP2G450	SN 06/22 DIP2G450-645	2022.02.11	2025.02.10
2600MHz Dipole	MVG	DIP2G600	SN 06/22 DIP2G600-646	2022.02.11	2025.02.10
5000MHz Dipole	MVG	DIP5G000	SN 06/22 DIP5G000-653	2022.02.11	2025.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2024.02.07	2025.02.06
Liquid Calibration Kit	MVG	OCPG 87	SN 06/22 OCPG87	2024.02.07	2025.02.06
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDCP	202203280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2023.03.27	2024.03.26
Multi Meter	Keithley	DMM6500	DMM6500	2023.03.27	2024.03.26
Signal Generator	Keithley	N5182B	MY59100717	2023.04.07	2024.04.06
Wireless Communication Test Set	R&S	CMW500	137737	2023.04.14	2024.04.13
Power Sensor	R&S	Z11	116184	2023.03.27	2024.03.26
Temperature hygrometer	N/A	ST-W2318	N/A	2023.04.24	2024.04.23
Thermograph	N/A	TP101	N/A	2023.04.25	2024.04.24



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-02

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW
Frequency (MHz)	750.000
Relative permittivity	41.99
Conductivity (S/m)	0.88
Probe	SN 04/22 EPGO364
ConvF	1.69
Crest factor:	1:1

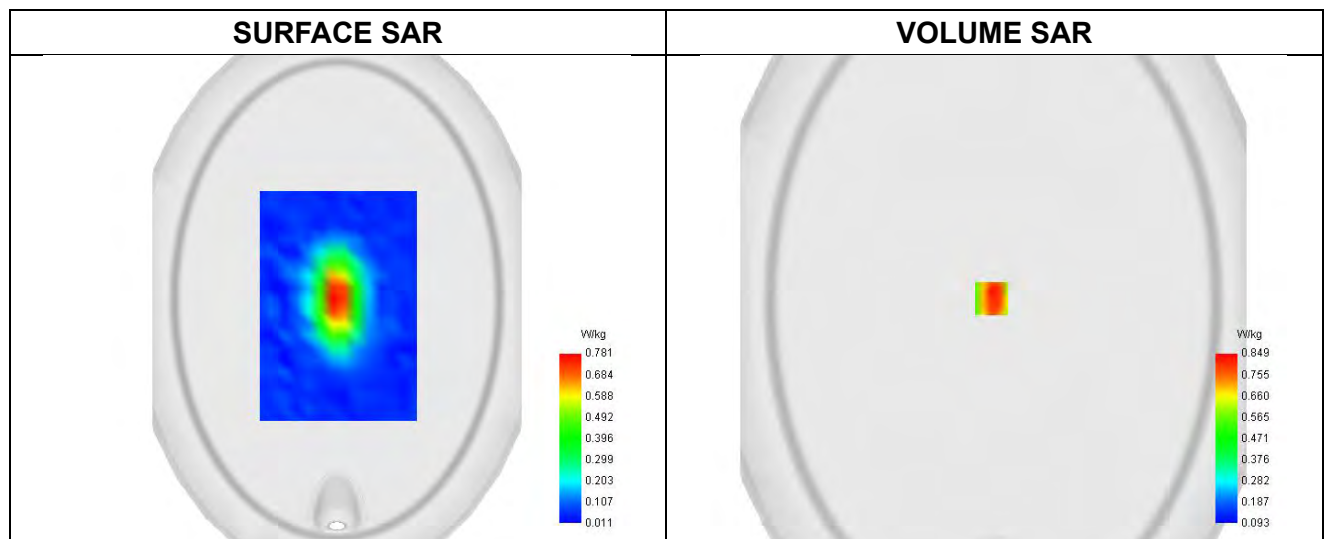


Maximum location: X=-3.00, Y=0.00 ; SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.522
SAR 1g (W/Kg)	0.859



Z Axis Scan

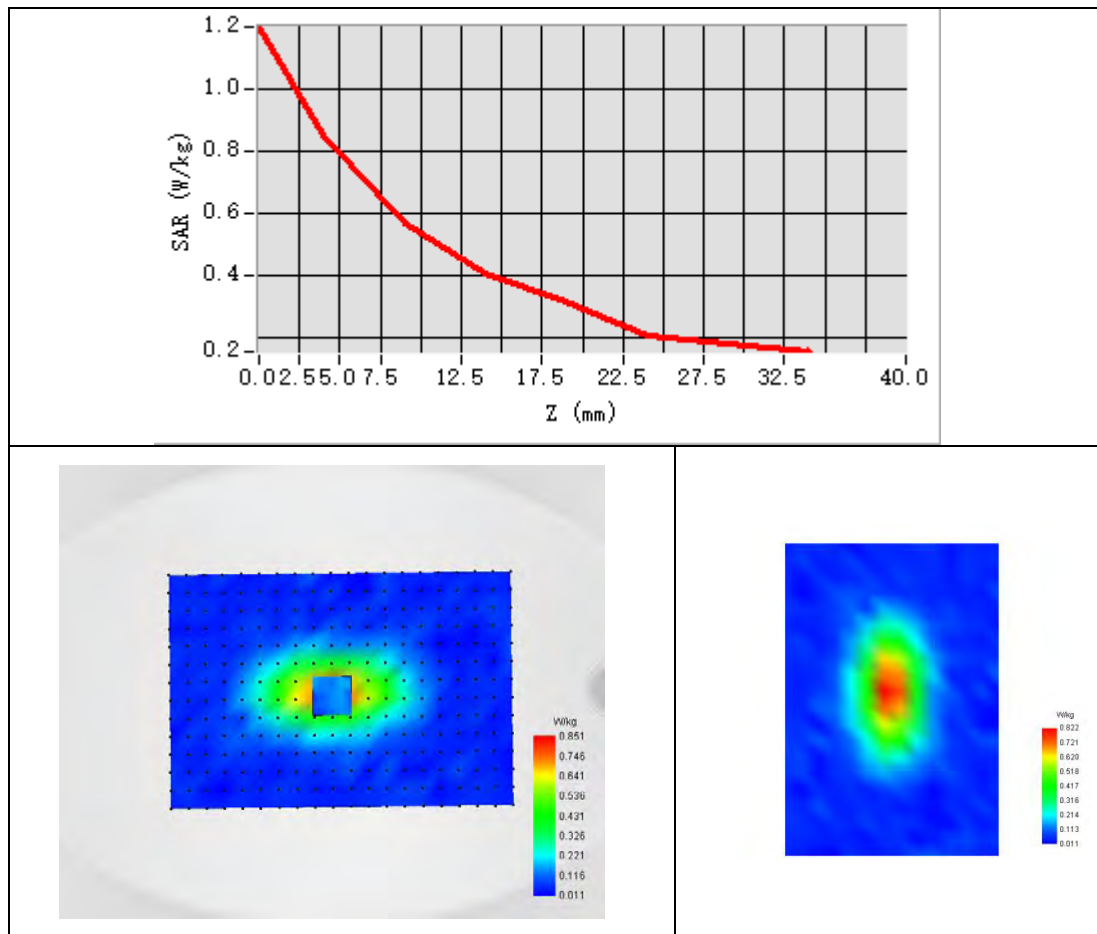



System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-13

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	41.56
Conductivity (S/m)	0.89
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

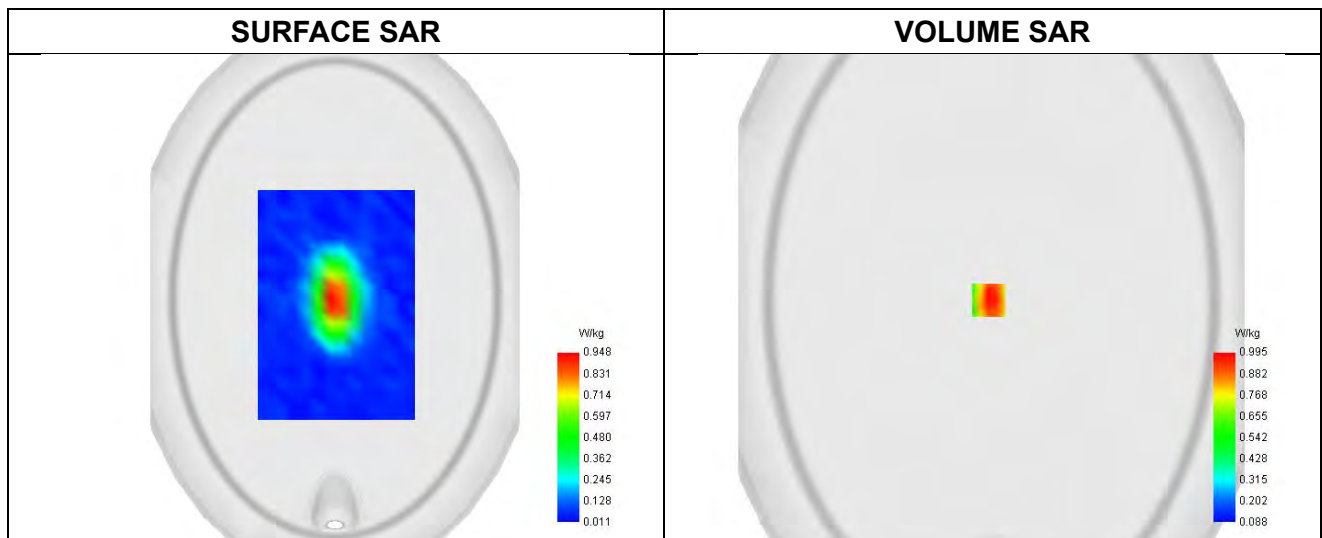


Maximum location: X=-3.00, Y=-1.00 ; SAR Peak: 1.46 W/kg

SAR 10g (W/Kg)	0.573
SAR 1g (W/Kg)	0.949



Z Axis Scan

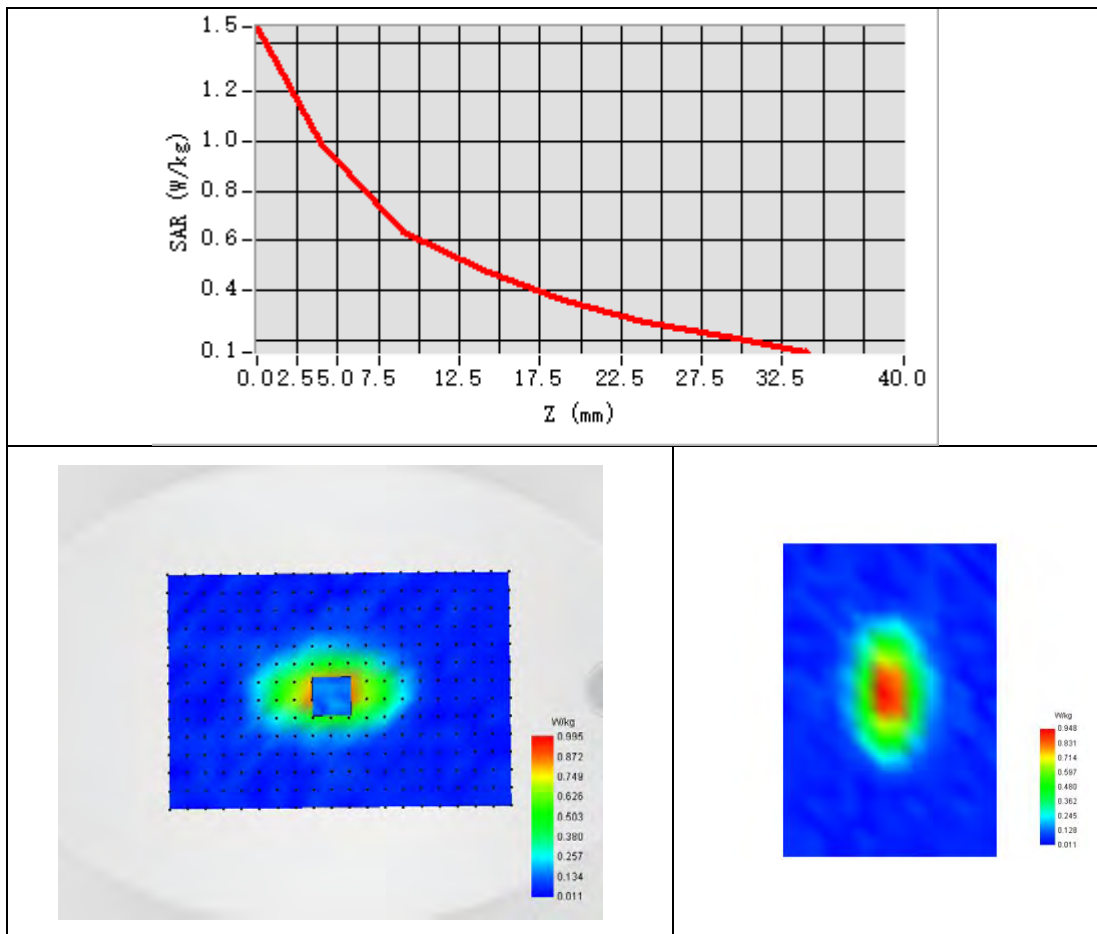



System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-02

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.69
Conductivity (S/m)	1.41
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

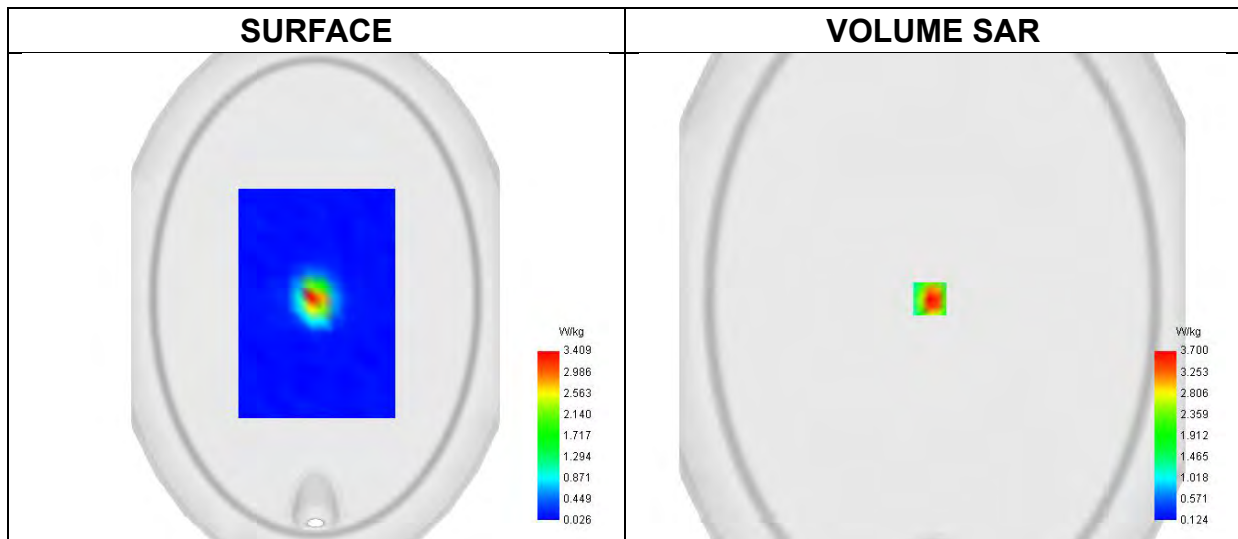


Maximum location: X=-2.00, Y=-1.00 ; SAR Peak: 5.81 W/kg

SAR 10g (W/Kg)	2.071
SAR 1g (W/Kg)	3.683



Z Axis Scan

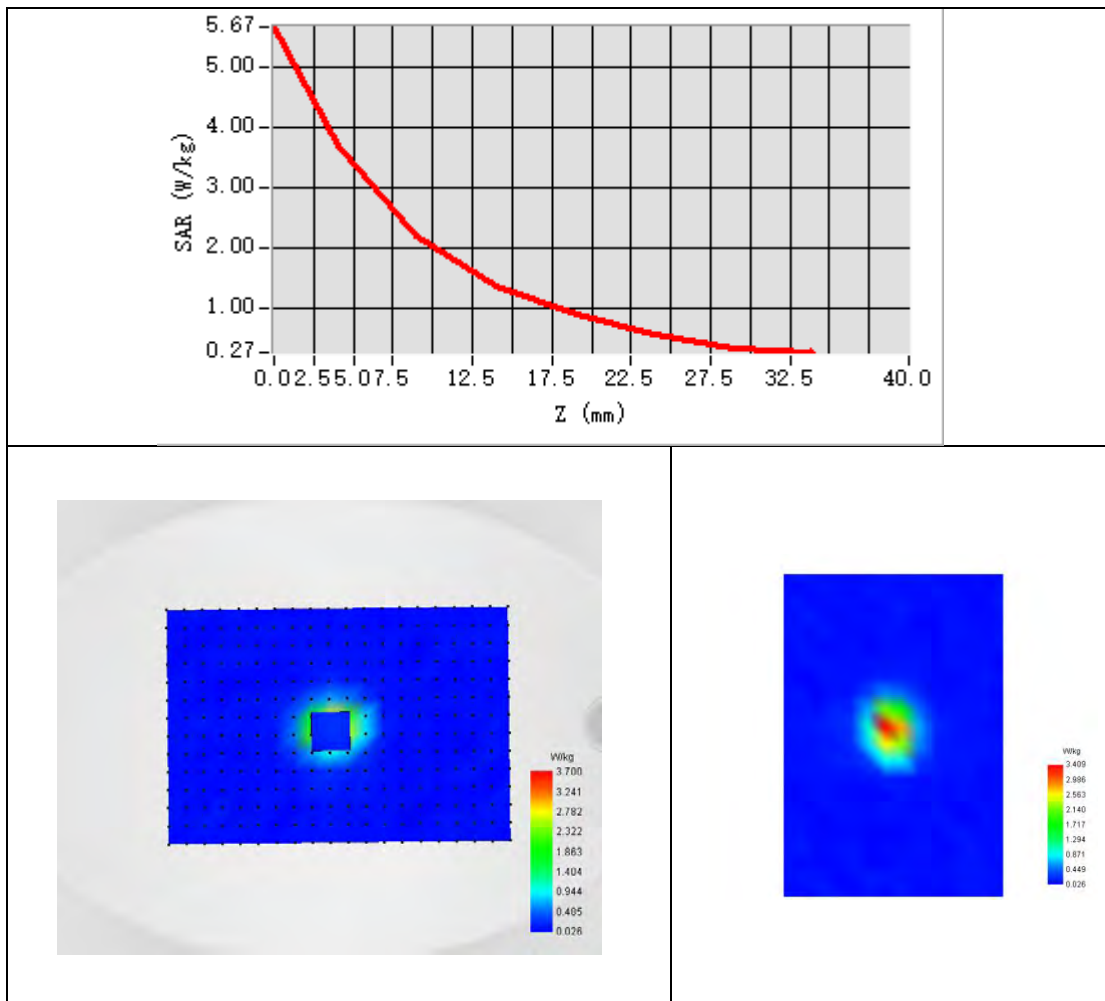



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-01

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.93
Conductivity (S/m)	1.39
Probe	SN 04/22 EPGO364
ConvF	2.25
Crest factor:	1:1

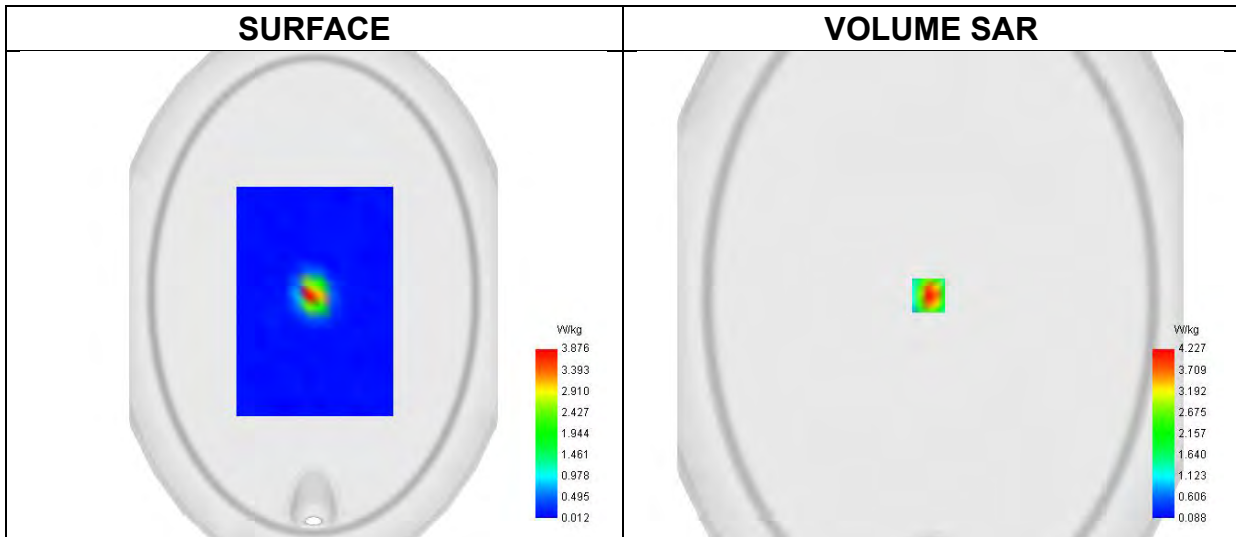


Maximum location: X=-2.00, Y=0.00 ; SAR Peak: 6.52 W/kg

SAR 10g (W/Kg)	2.074
SAR 1g (W/Kg)	4.055



Z Axis Scan

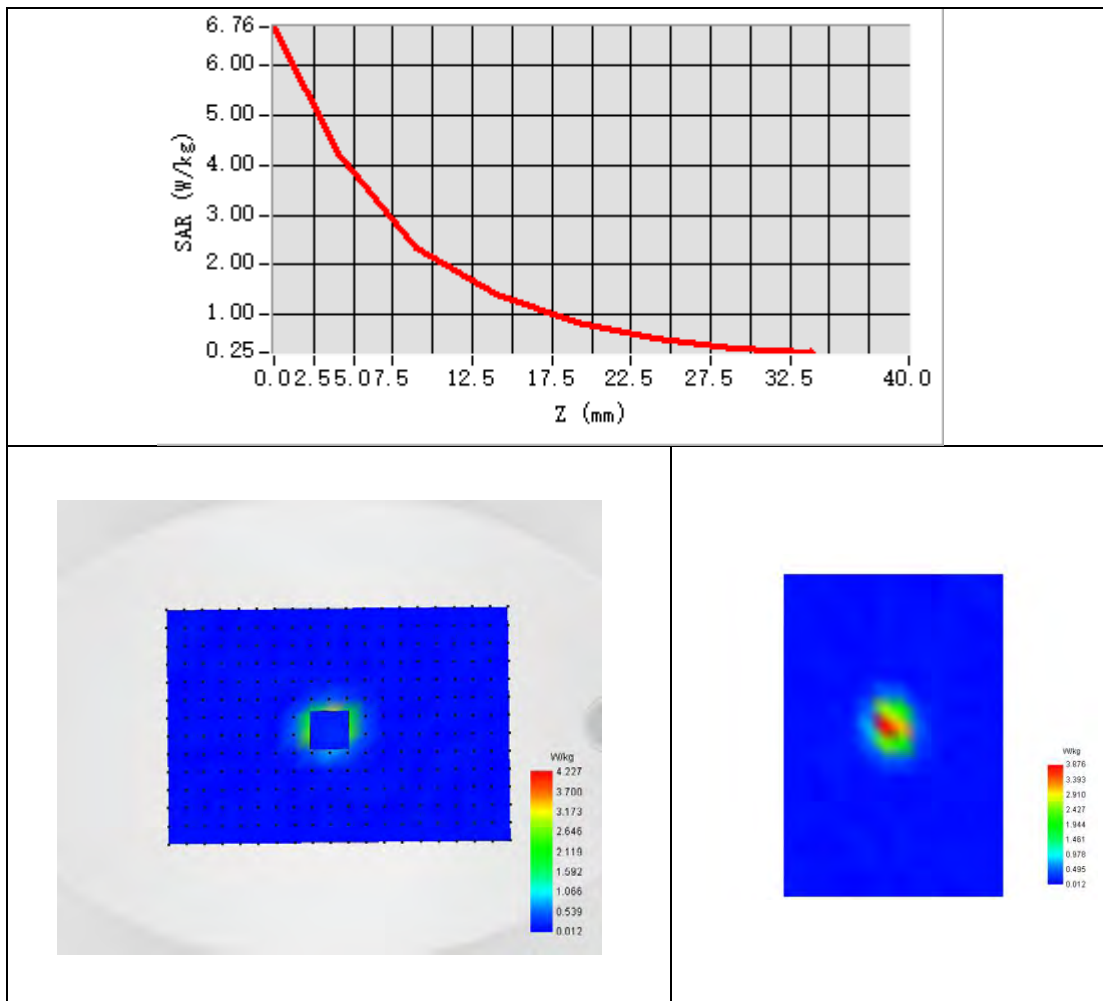



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-13

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	39.07
Conductivity (S/m)	1.83
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

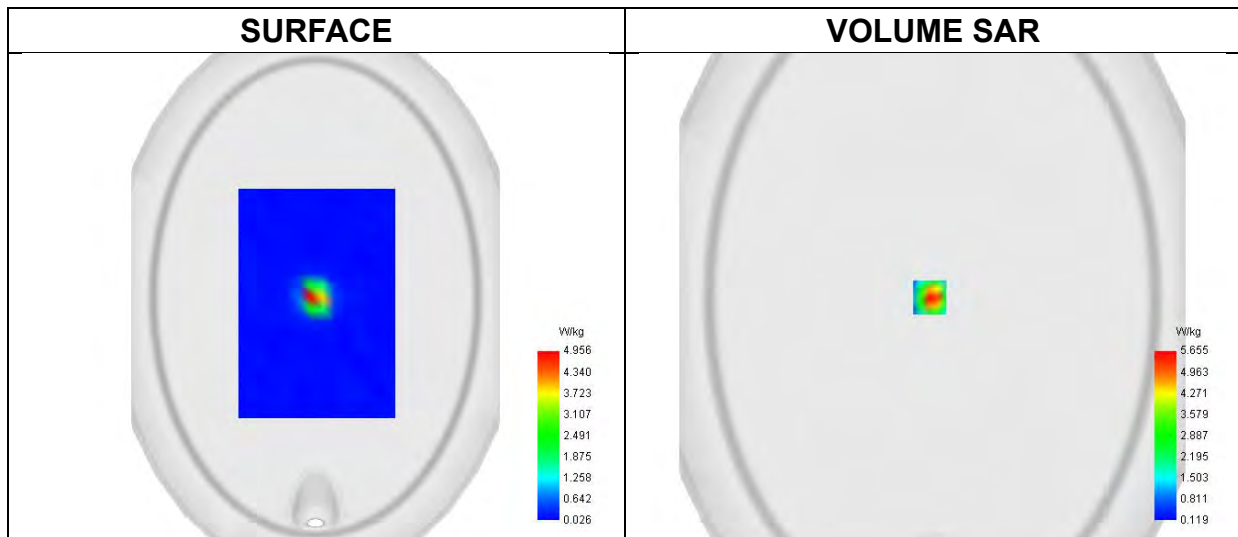


Maximum location: X=-3.00, Y=0.00 ; SAR Peak: 9.68 W/kg

SAR 10g (W/Kg)	2.351
SAR 1g (W/Kg)	5.447



Z Axis Scan

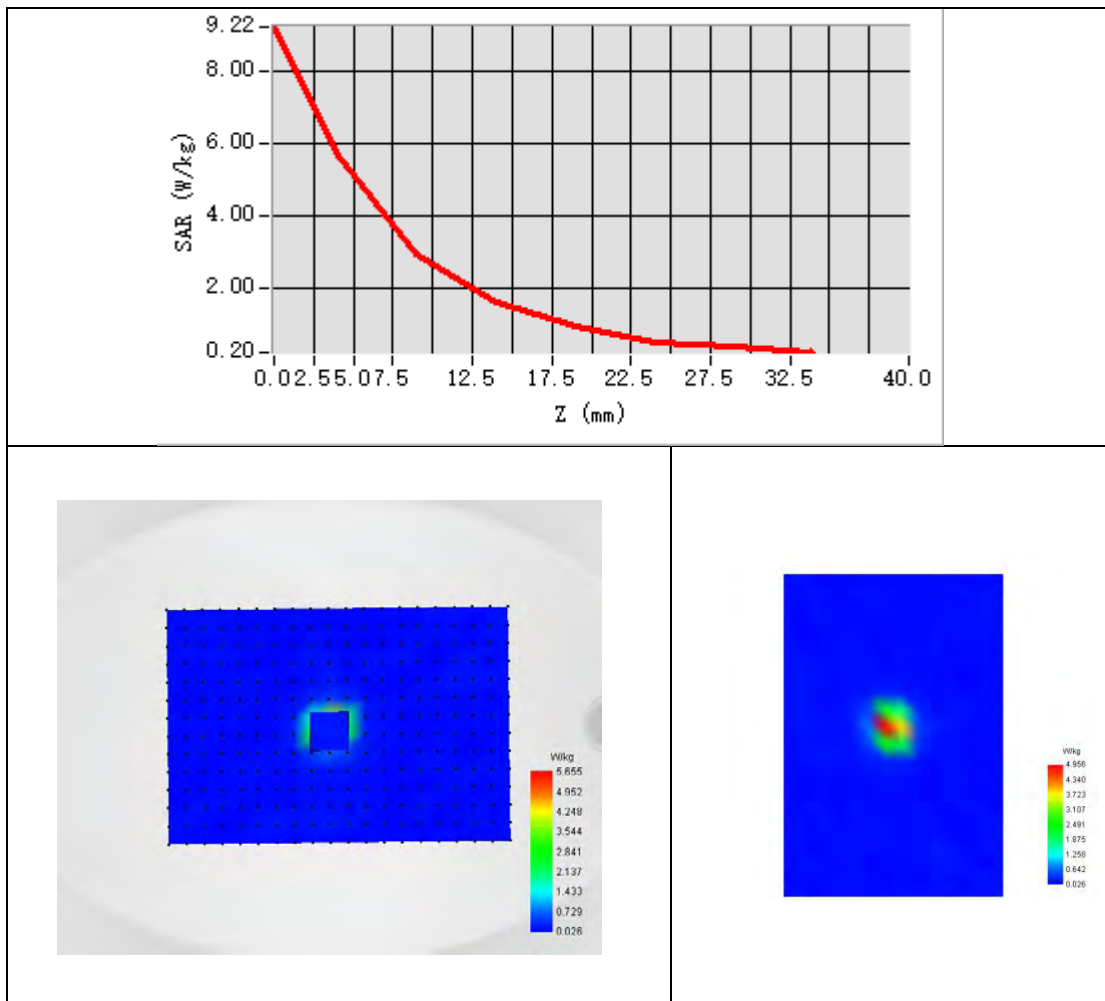



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-02-01

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	40.15
Conductivity (S/m)	1.95
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

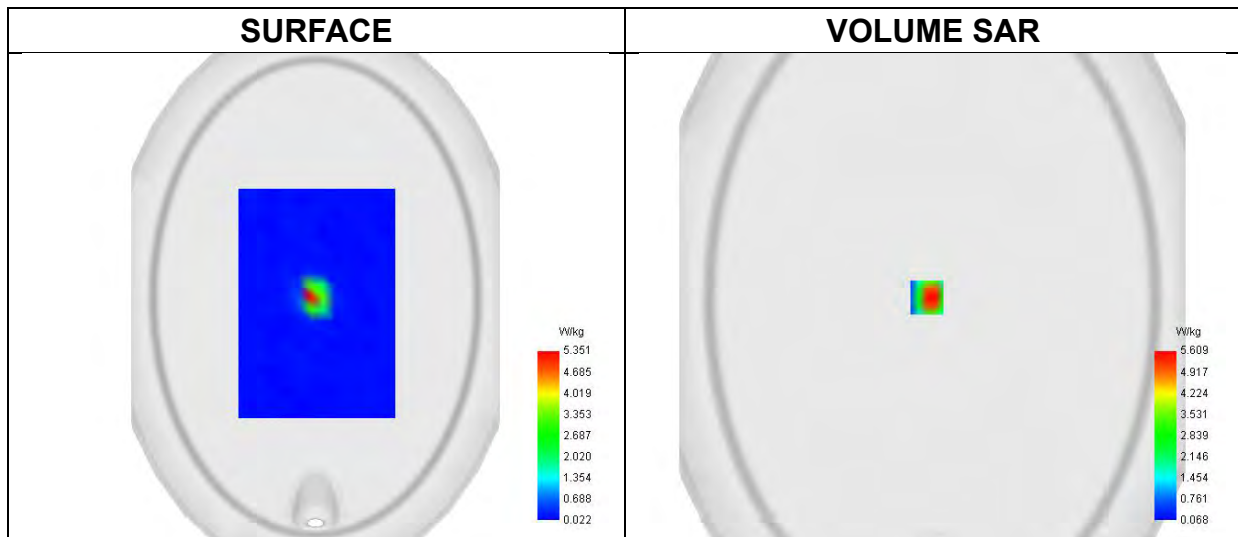


Maximum location: X=-5.00, Y=0.00 ; SAR Peak: 10.14 W/kg

SAR 10g (W/Kg)	2.427
SAR 1g (W/Kg)	5.682



Z Axis Scan

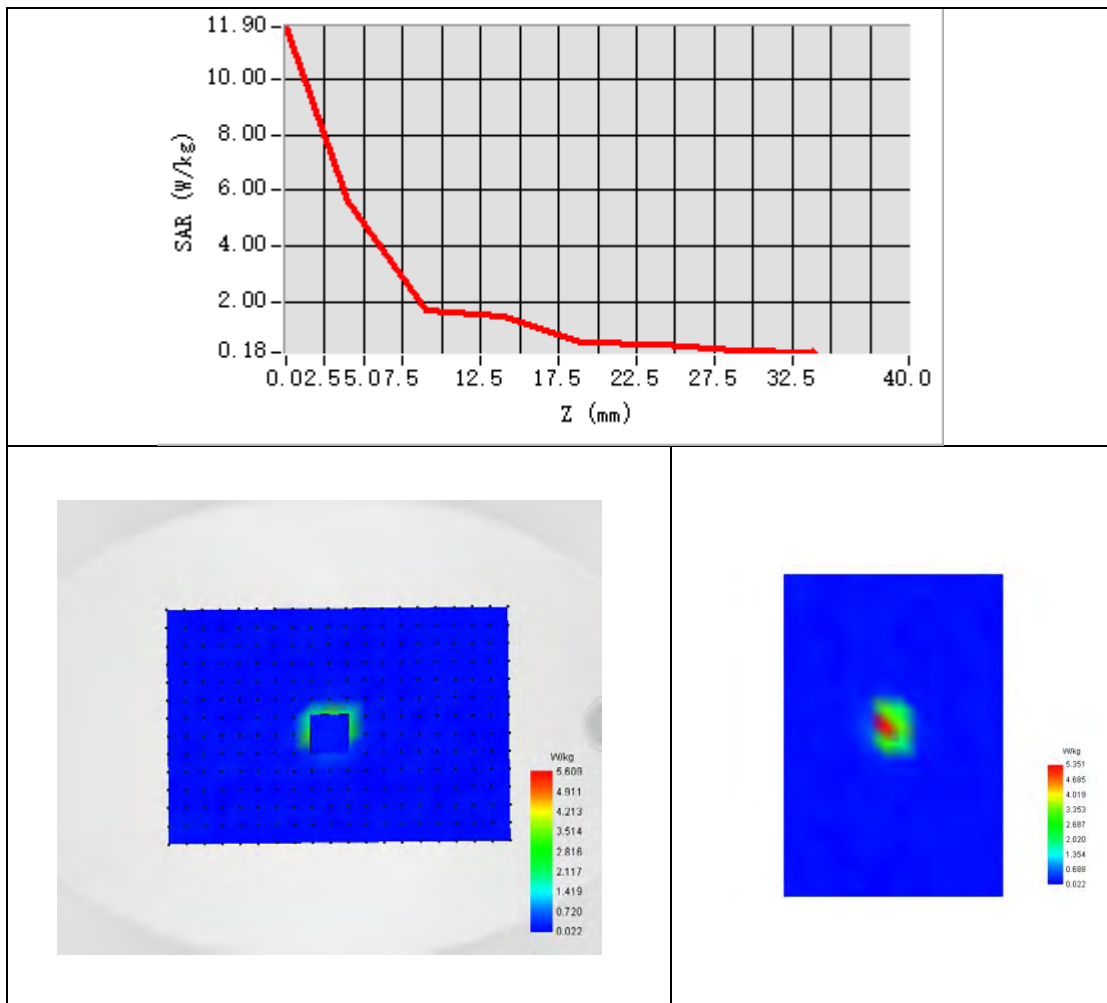



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2024-02-04

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.78
Conductivity (S/m)	4.64
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

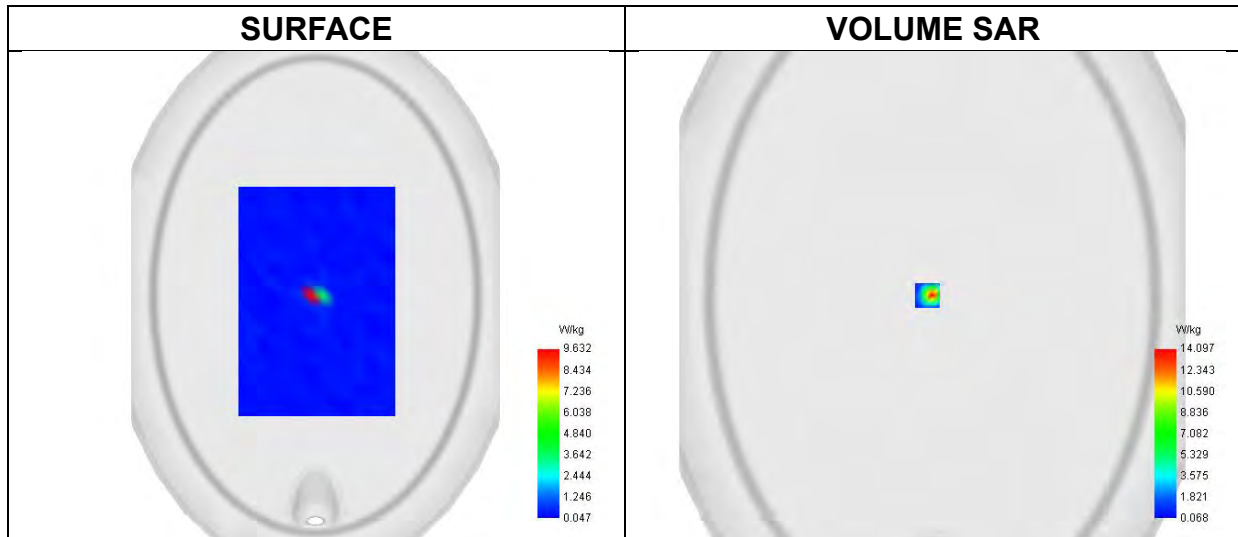


Maximum location: X=-5.00, Y=0.00 ; SAR Peak: 23.71 W/kg

SAR 10g (W/Kg)	2.146
SAR 1g (W/Kg)	7.756



Z Axis Scan

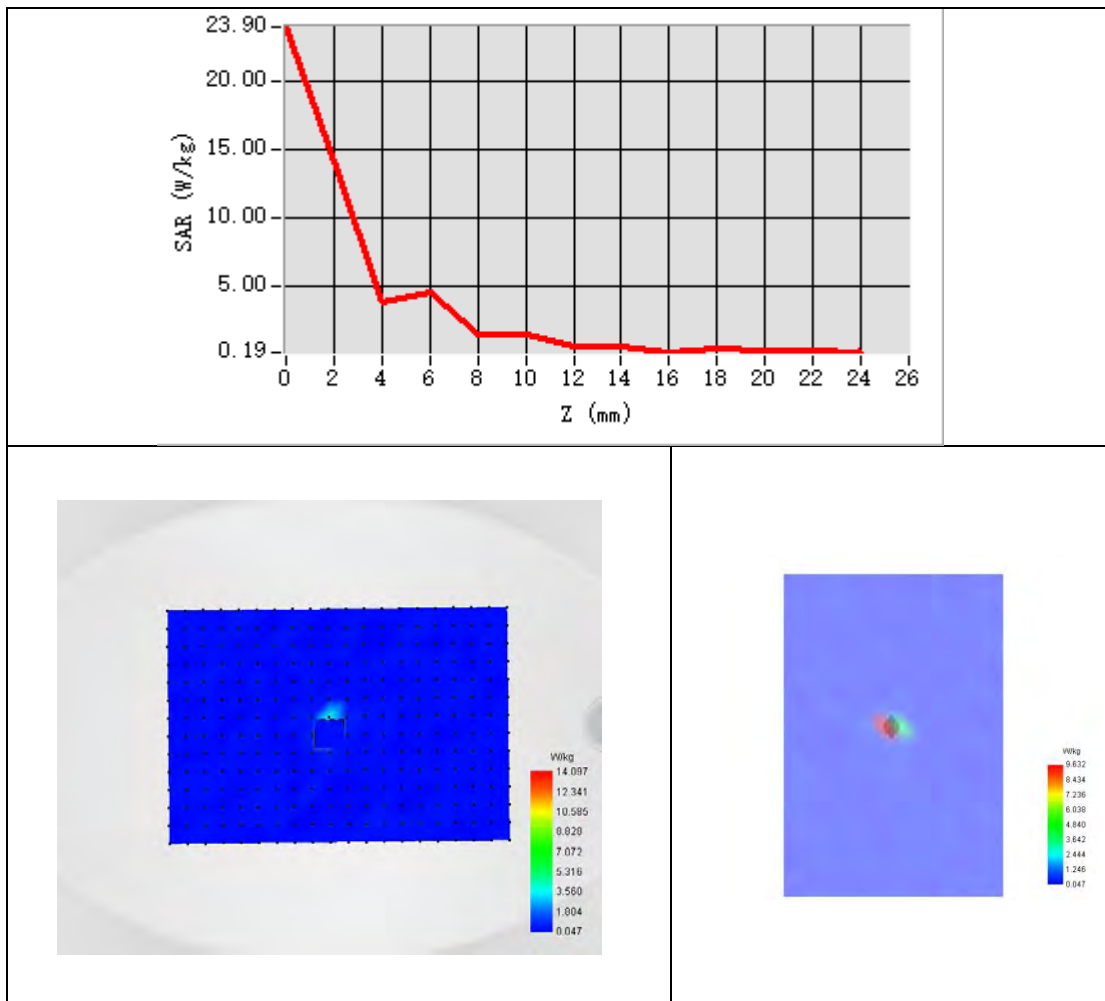



System Performance Check Data (5400MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2024-02-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW
Frequency (MHz)	5400.000
Relative permittivity	36.54
Conductivity (S/m)	4.85
Probe	SN 04/22 EPGO364
ConvF	1.85
Crest factor:	1:1

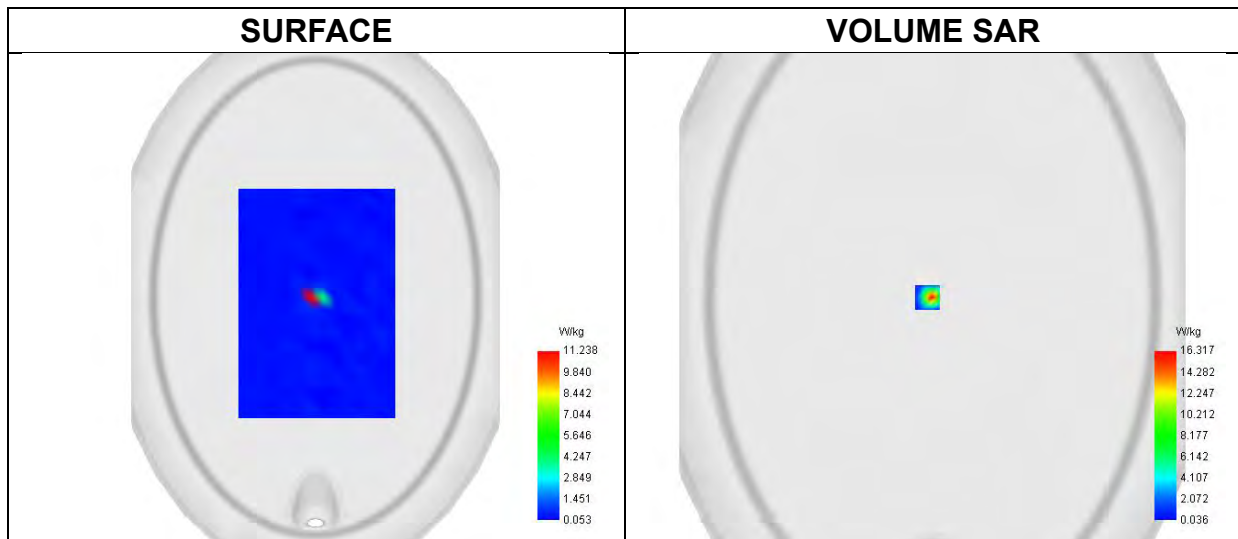


Maximum location: X=6.00, Y=5.00 ; SAR Peak: 25.66 W/kg

SAR 10g (W/Kg)	2.218
SAR 1g (W/Kg)	8.038



Z Axis Scan

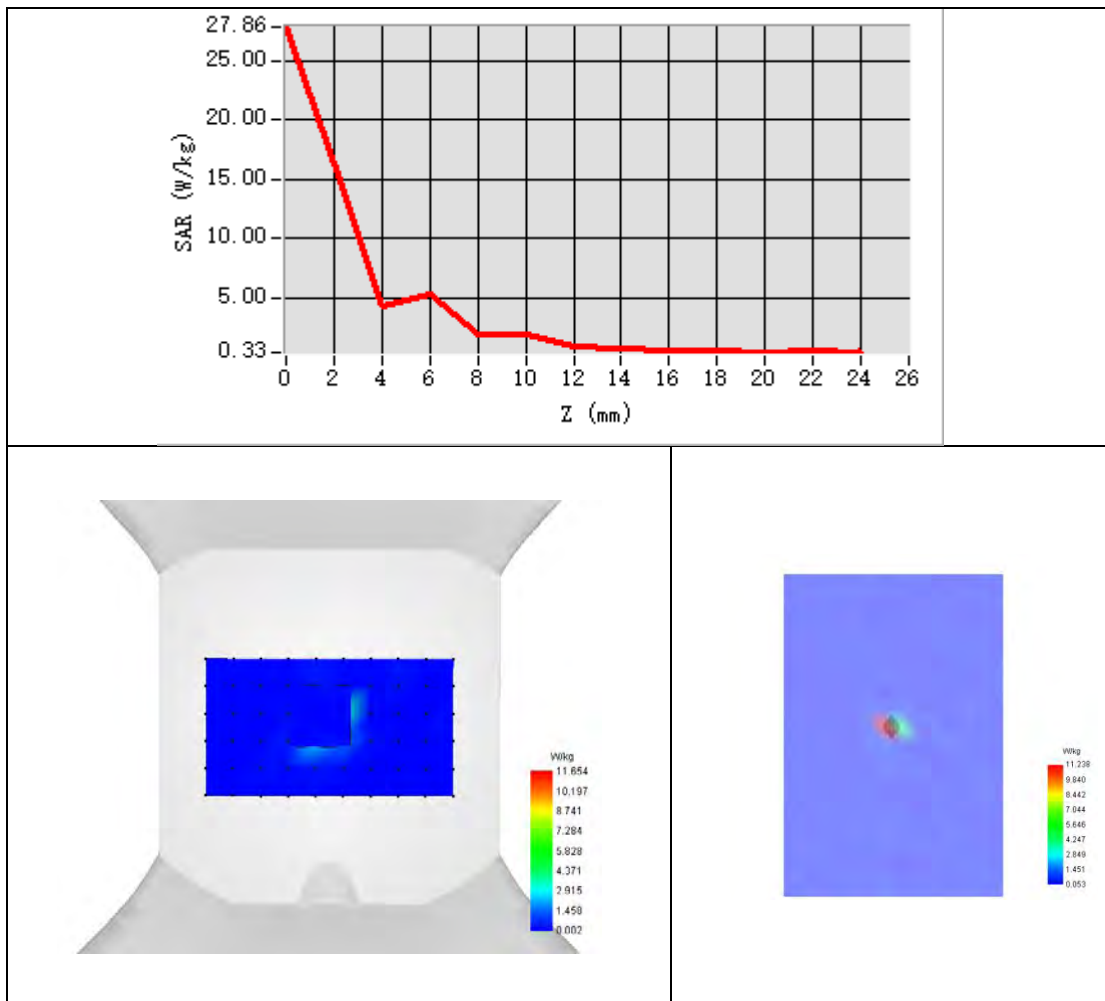



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2024-02-04

Experimental conditions.

Phantom	ELLI
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	35.64
Conductivity (S/m)	5.31
Probe	SN 04/22 EPGO364
ConvF	1.73
Crest factor:	1:1

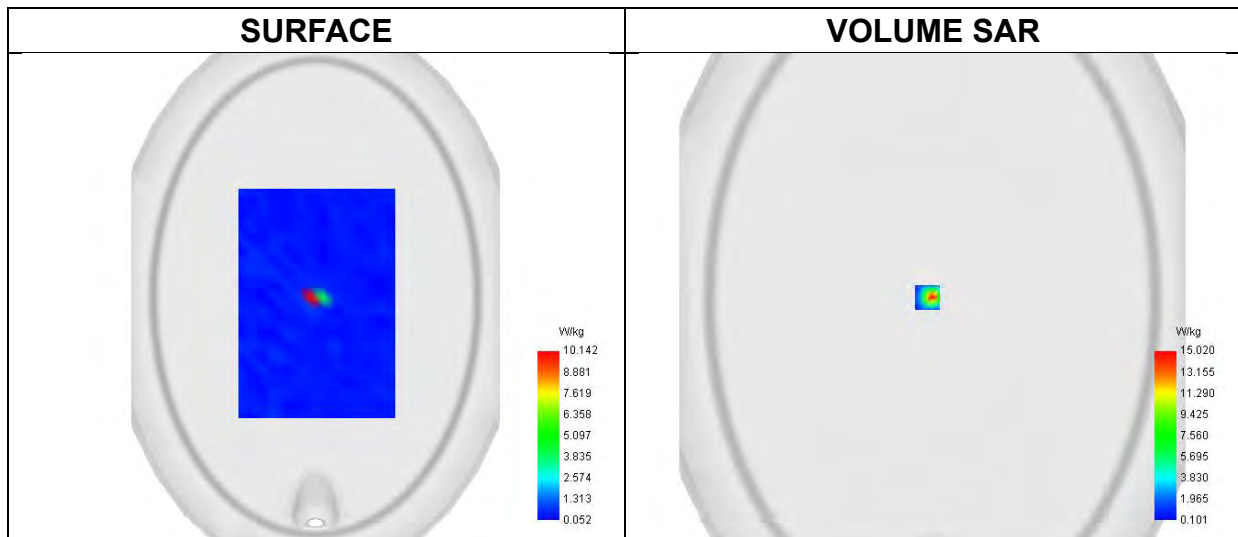


Maximum location: X=-5.00, Y=0.00 ; SAR Peak: 24.75 W/kg

SAR 10g (W/Kg)	2.138
SAR 1g (W/Kg)	7.525



Z Axis Scan

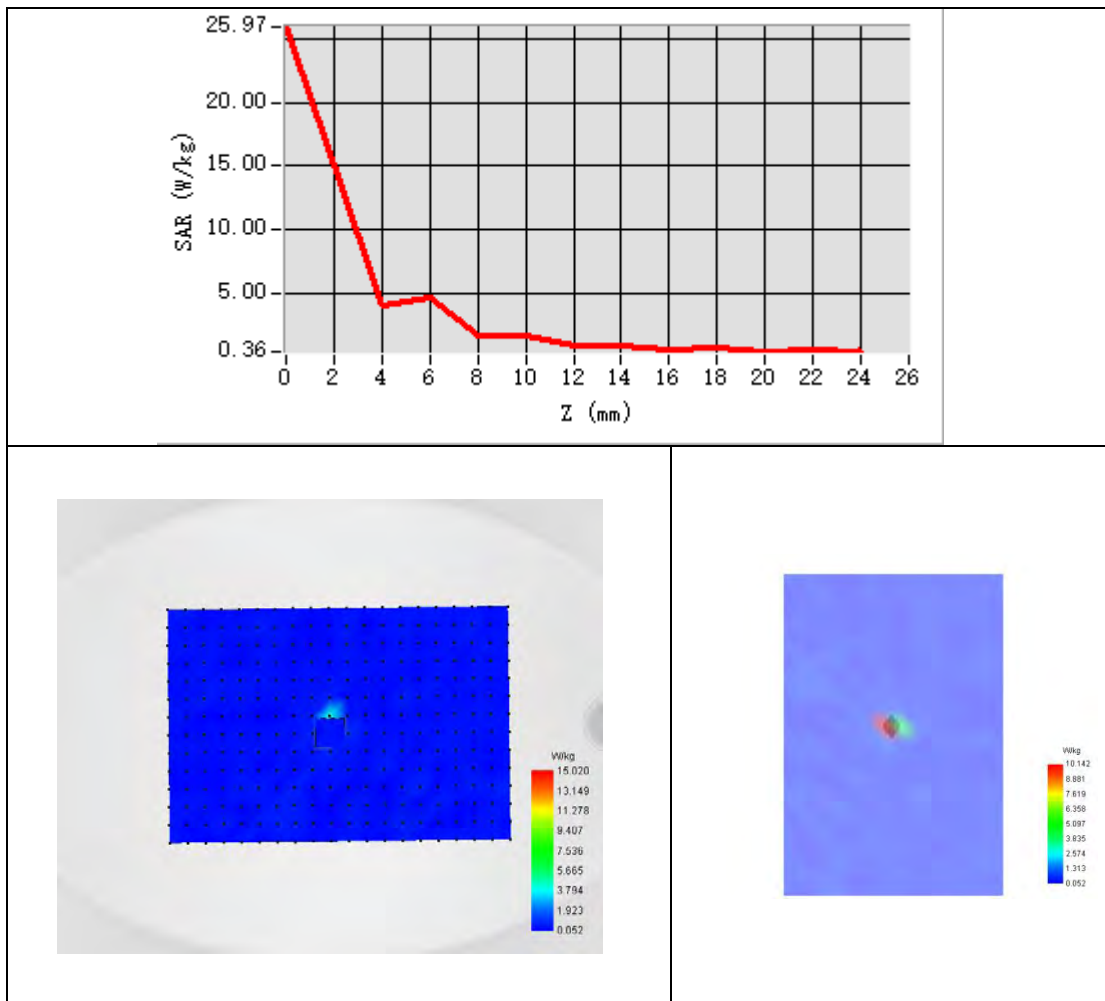




Appendix B. SAR Test Plots

Plot 1:

Test Date	2024-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
Relative permittivity	41.56
Conductivity (S/m)	0.89
ConvF	1.72
SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.305

Maximum location: X=-70.00, Y=-40.00 ; SAR Peak: 0.59 W/kg

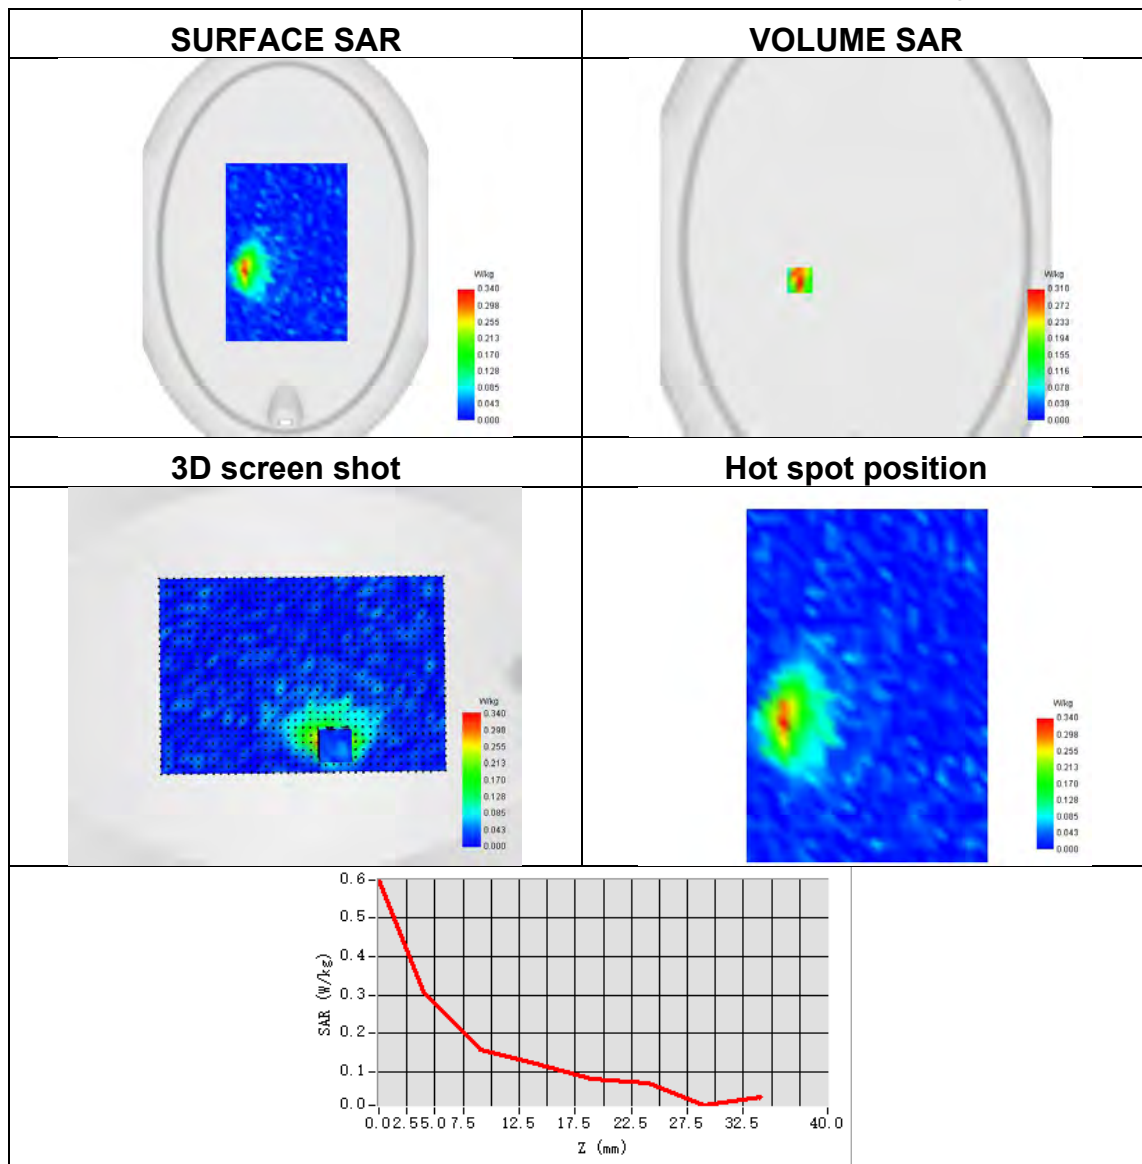




Plot 2:

Test Date	2024-02-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
Relative permittivity	40.93
Conductivity (S/m)	1.39
ConvF	2.25
SAR 10g (W/Kg)	0.189
SAR 1g (W/Kg)	0.417

Maximum location: X=-69.00, Y=-17.00 ; SAR Peak: 0.82 W/kg

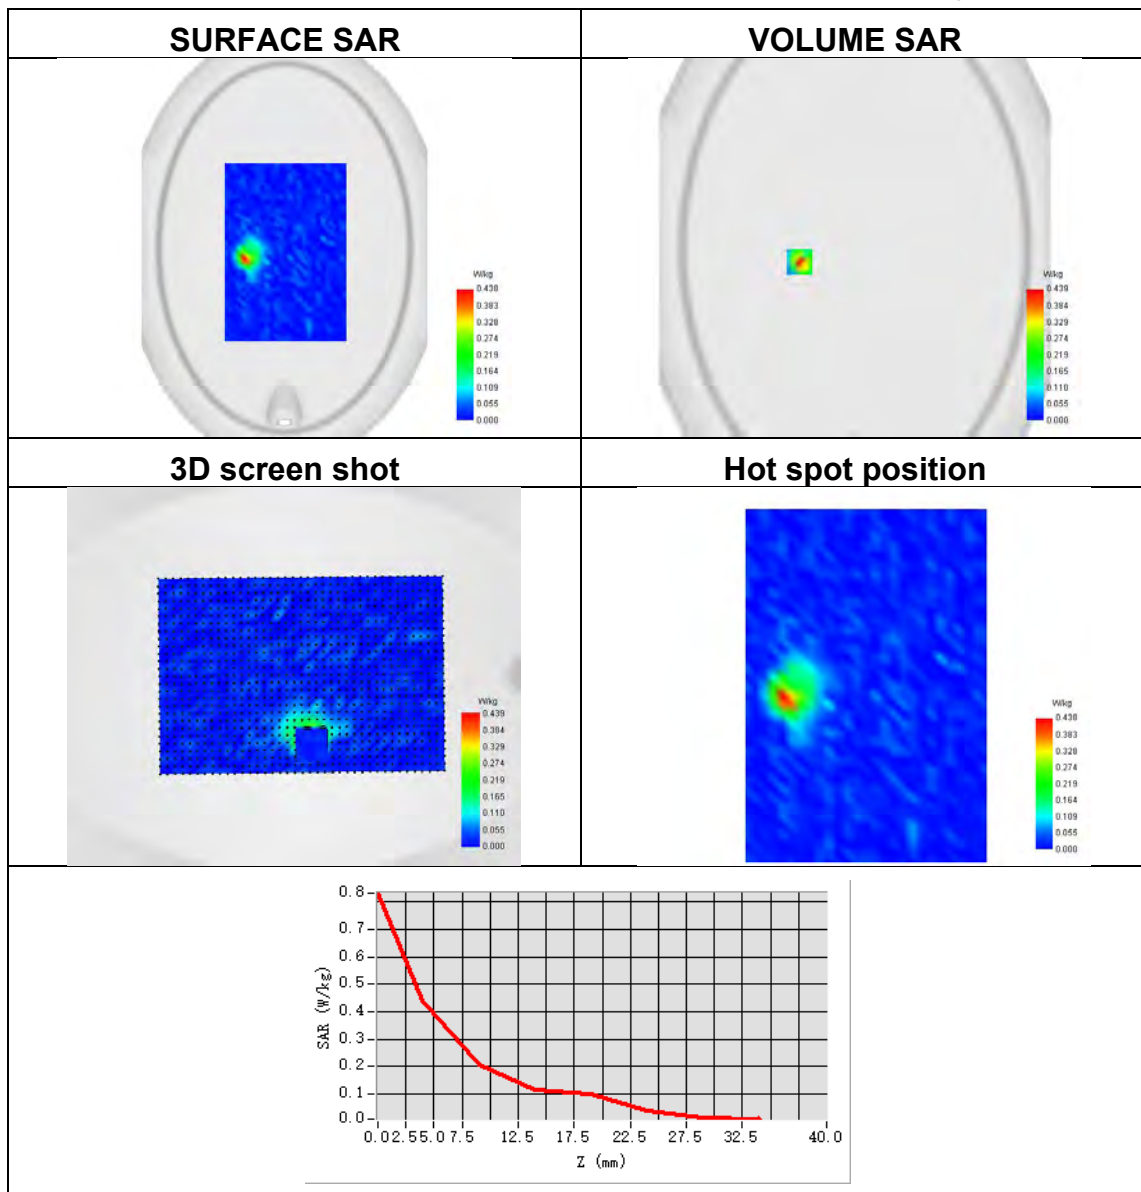




Plot 3:

Test Date	2024-02-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
Relative permittivity	40.93
Conductivity (S/m)	1.39
ConvF	2.25
SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.343

Maximum location: X=-53.00, Y=-32.00 ; SAR Peak: 0.59 W/kg

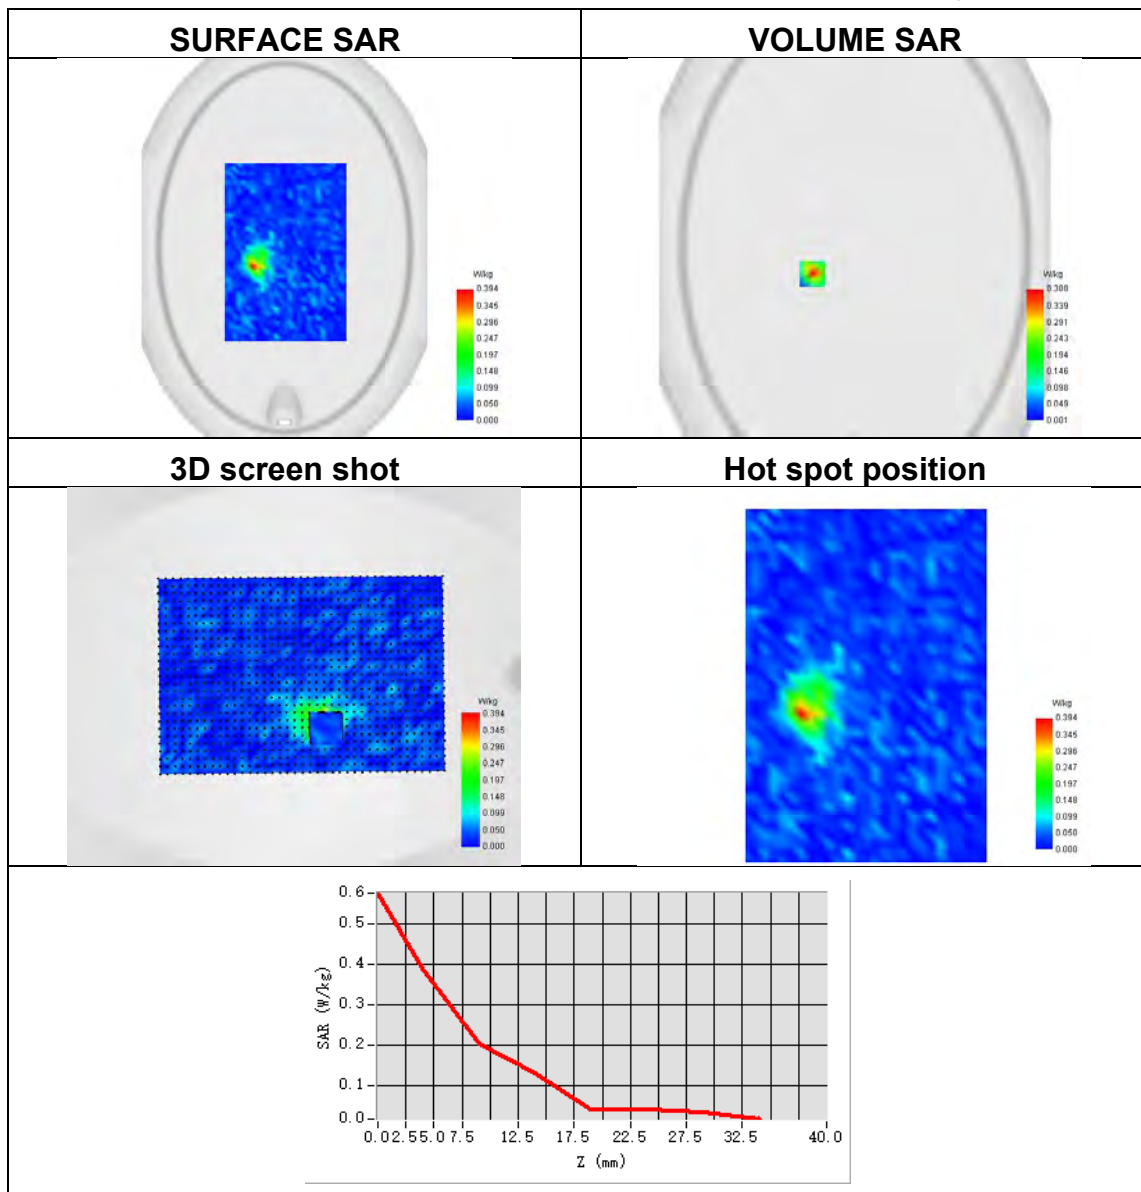




Plot 4:

Test Date	2024-02-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1907.6
Relative permittivity	40.93
Conductivity (S/m)	1.39
ConvF	2.25
SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.336

Maximum location: X=-54.00, Y=-32.00 ; SAR Peak: 0.65 W/kg

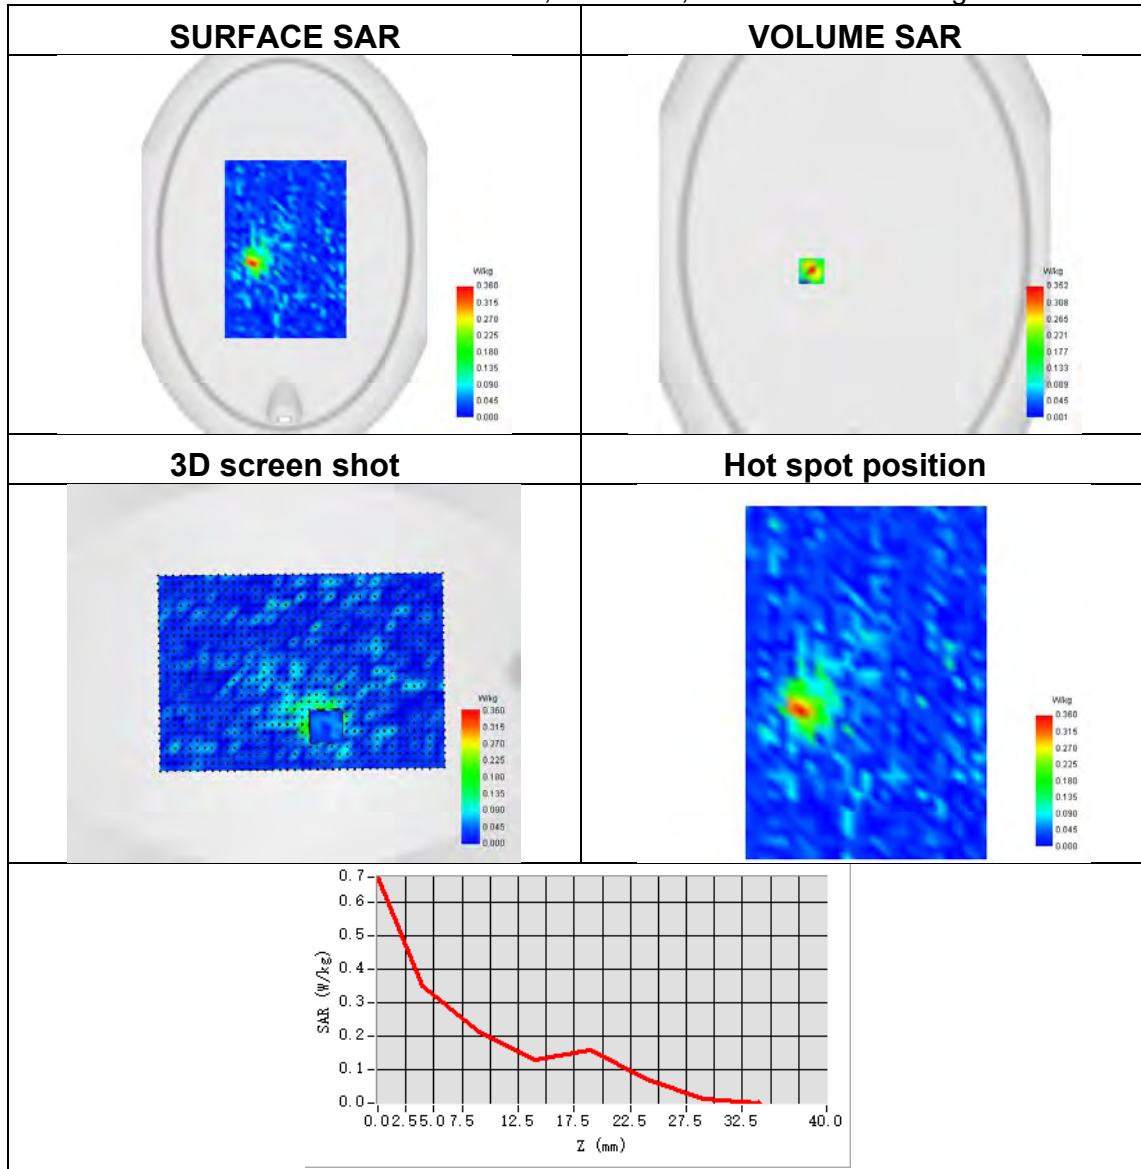




Plot 5:

Test Date	2024-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Right Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
Relative permittivity	41.56
Conductivity (S/m)	0.89
ConvF	1.72
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.237

Maximum location: X=-47.00, Y=-72.00 ; SAR Peak: 0.47 W/kg

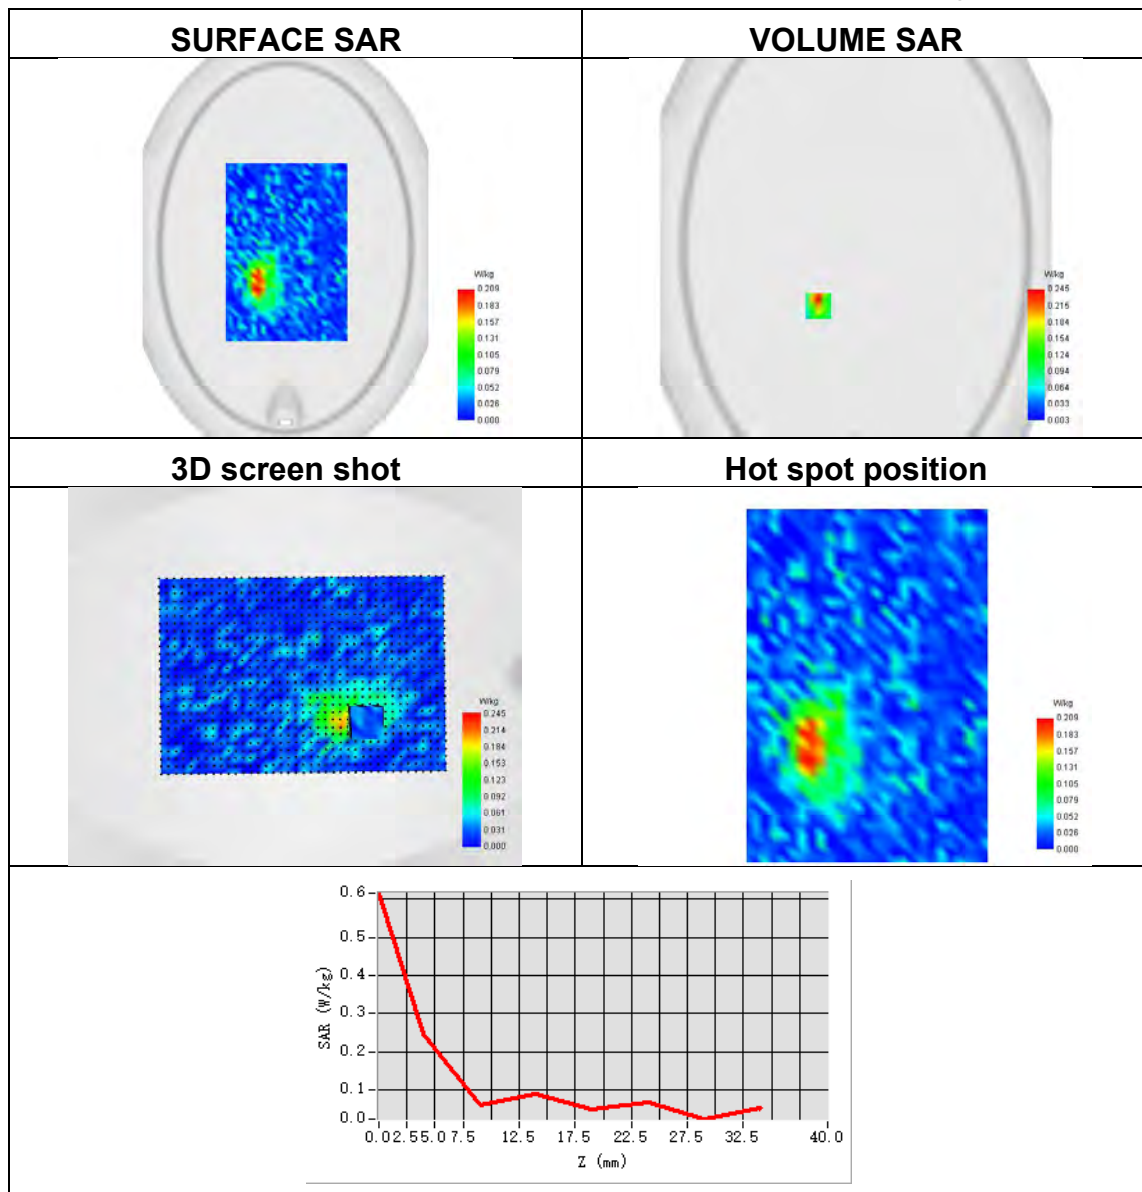




Plot 6:

Test Date	2024-02-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
Relative permittivity	40.93
Conductivity (S/m)	1.39
ConvF	2.25
SAR 10g (W/Kg)	0.251
SAR 1g (W/Kg)	0.550

Maximum location: X=-78.00, Y=-48.00 ; SAR Peak: 1.06 W/kg

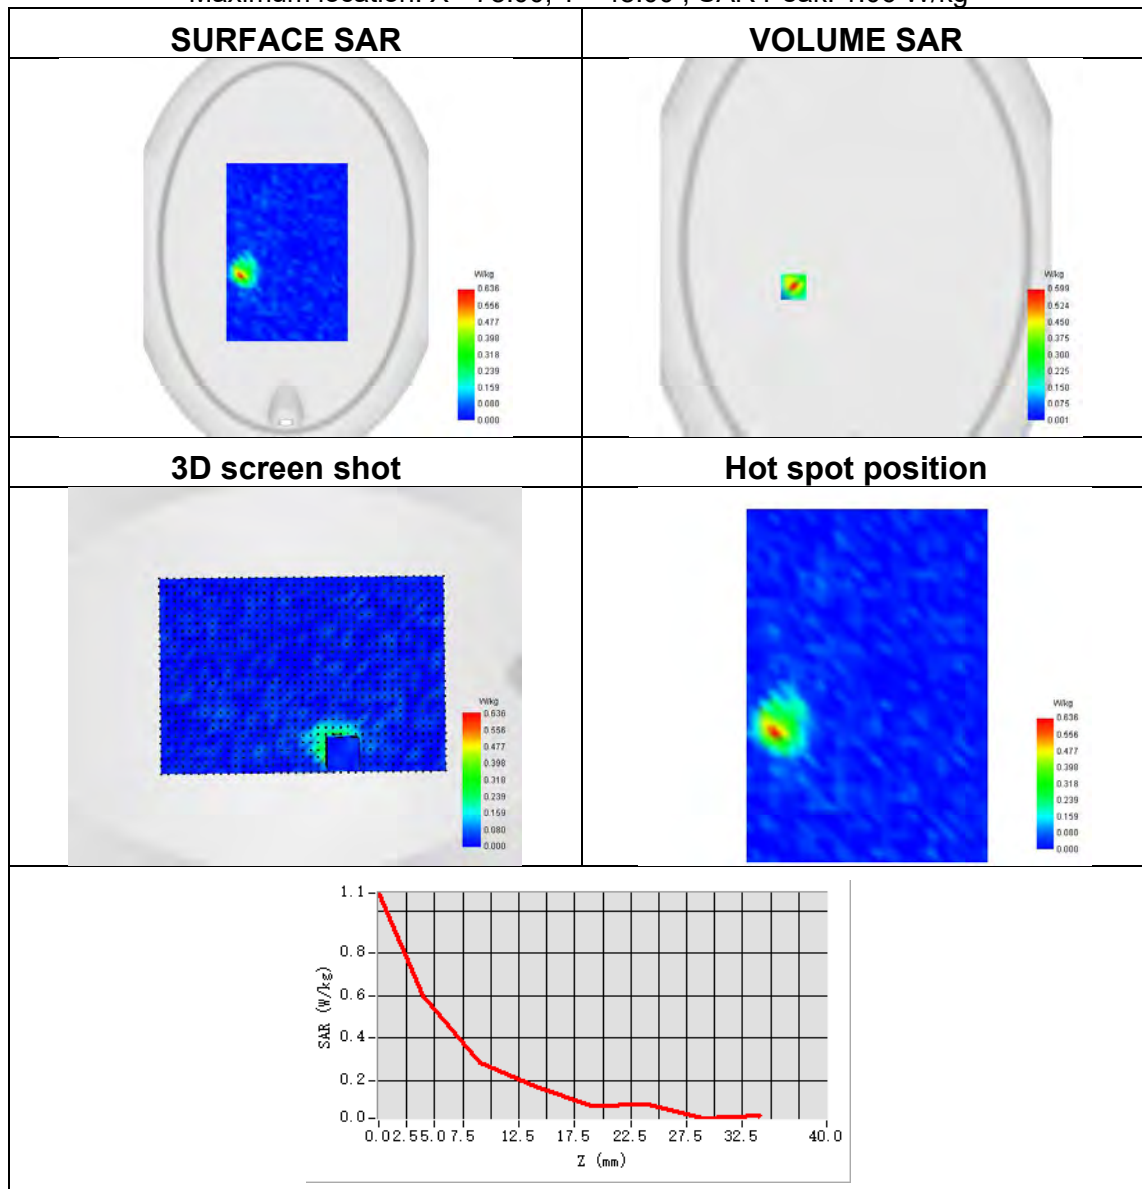




Plot 7:

Test Date	2024-02-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
Relative permittivity	40.69
Conductivity (S/m)	1.41
ConvF	1.95
SAR 10g (W/Kg)	0.210
SAR 1g (W/Kg)	0.448

Maximum location: X=-78.00, Y=-48.00 ; SAR Peak: 0.88 W/kg

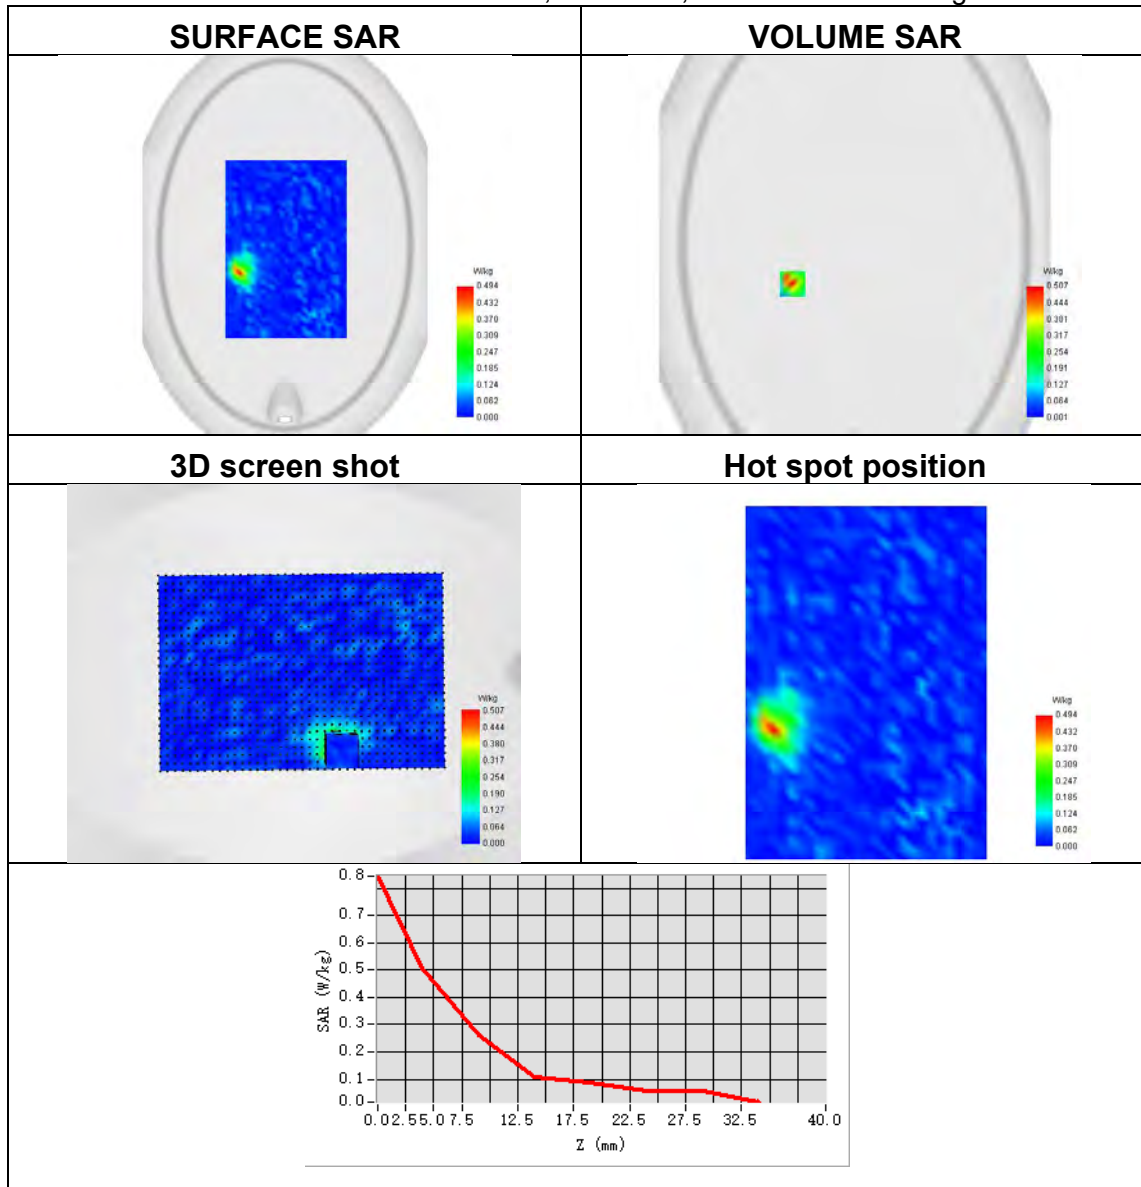




Plot 8:

Test Date	2024-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
Relative permittivity	41.56
Conductivity (S/m)	0.89
ConvF	1.72
SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.325

Maximum location: X=-80.00, Y=-78.00 ; SAR Peak: 0.61 W/kg

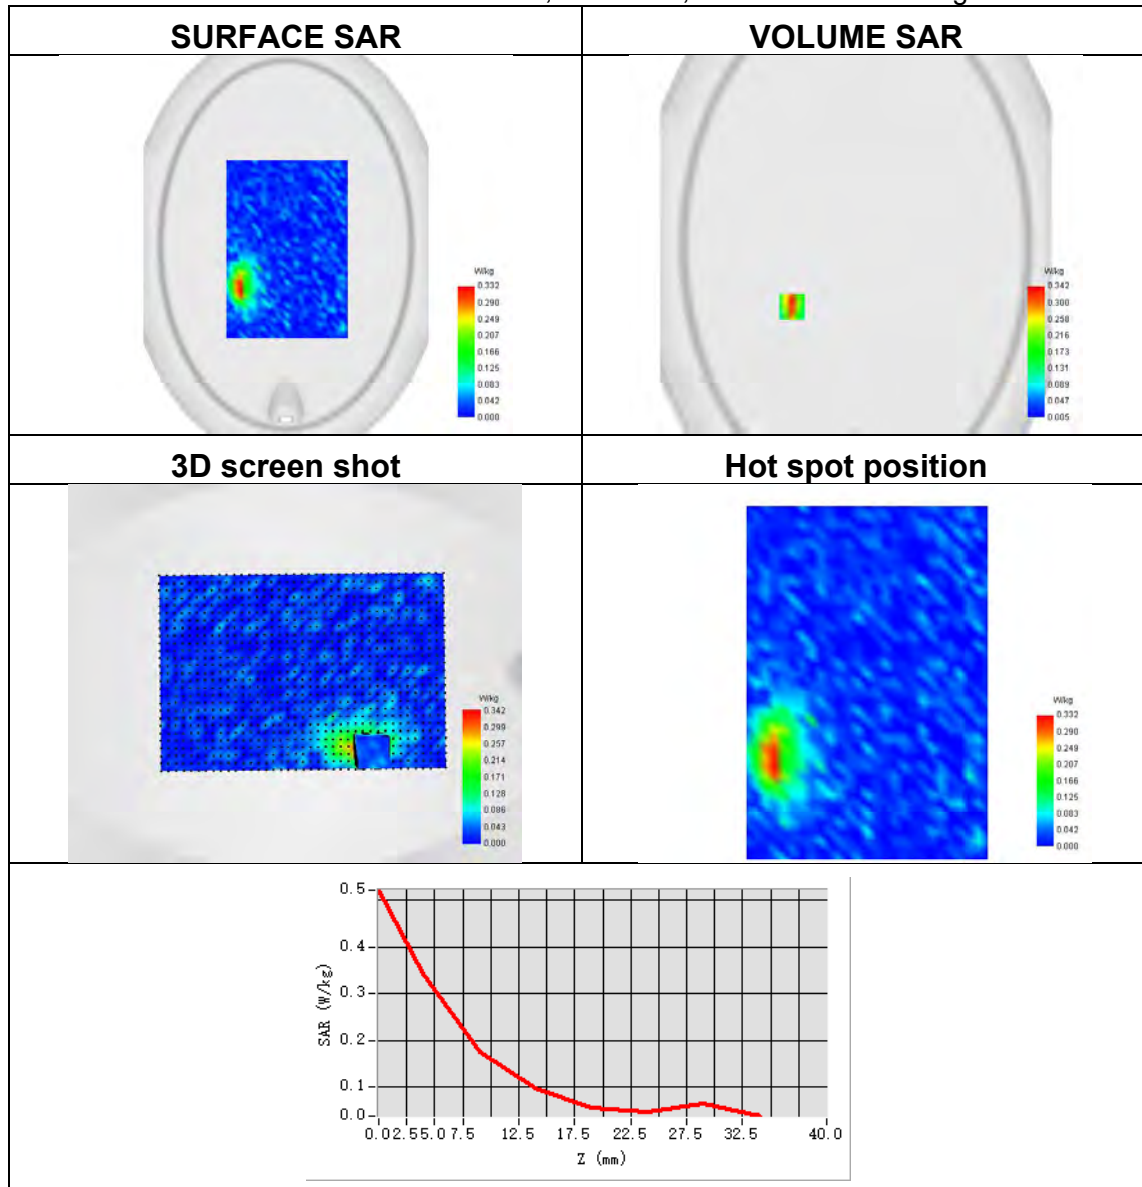




Plot 9:

Test Date	2023-09-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
Relative permittivity	40.15
Conductivity (S/m)	1.95
ConvF	2.36
SAR 10g (W/Kg)	0.206
SAR 1g (W/Kg)	0.503

Maximum location: X=-71.00, Y=-54.00 ; SAR Peak: 0.96 W/kg

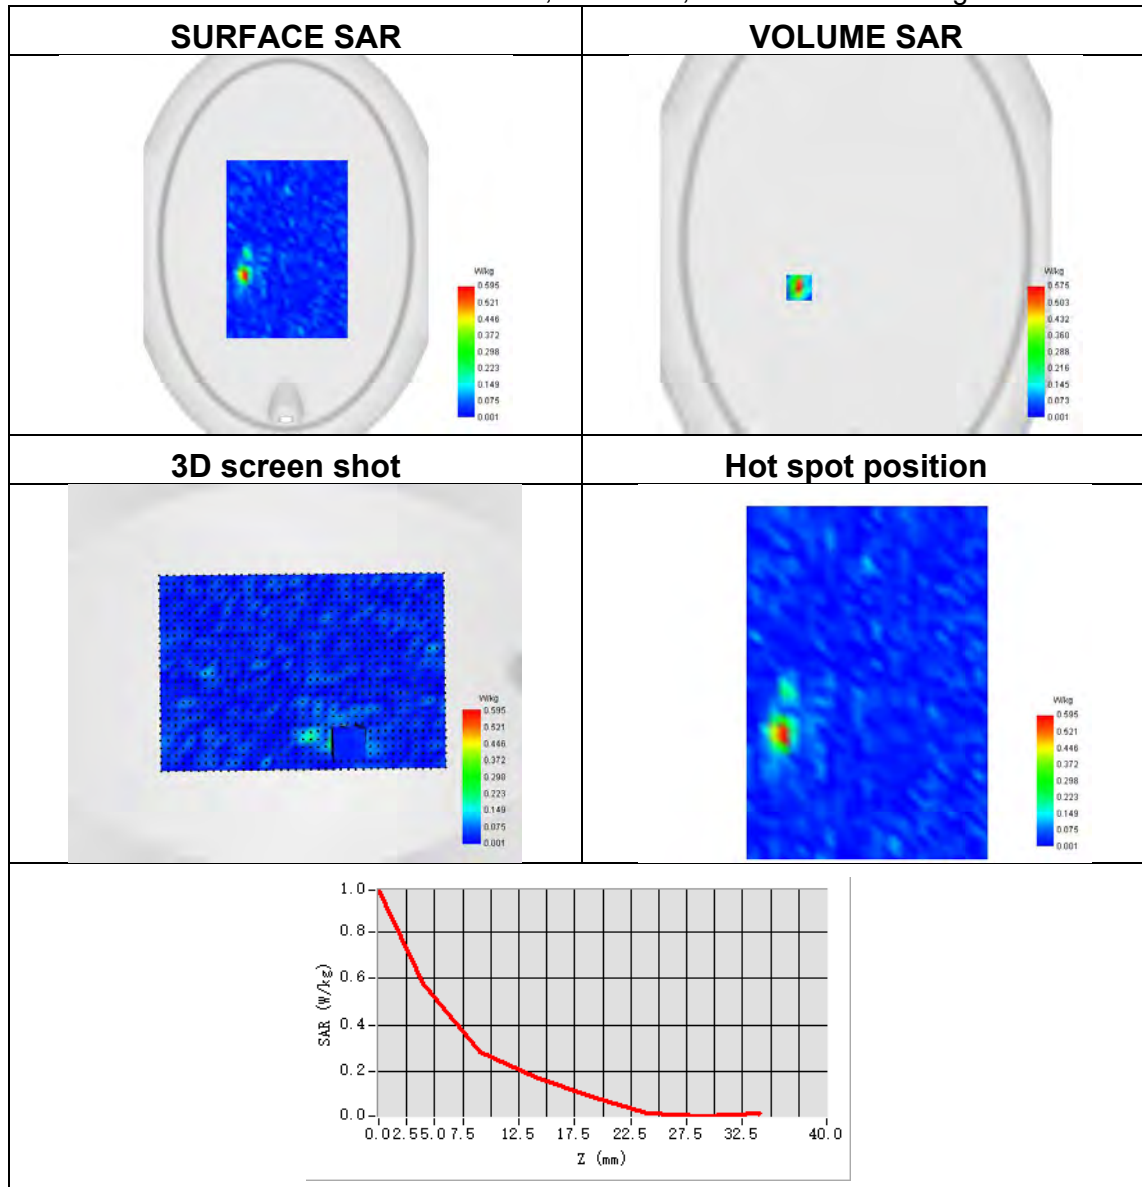




Plot 10:

Test Date	2024-02-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Top Side
Band	LTE band 17
Signal	LTE FDD
Frequency	710
Relative permittivity	41.99
Conductivity (S/m)	0.88
ConvF	1.69
SAR 10g (W/Kg)	0.469
SAR 1g (W/Kg)	0.864

Maximum location: X=-2.00, Y=-88.00 ; SAR Peak: 1.36 W/kg

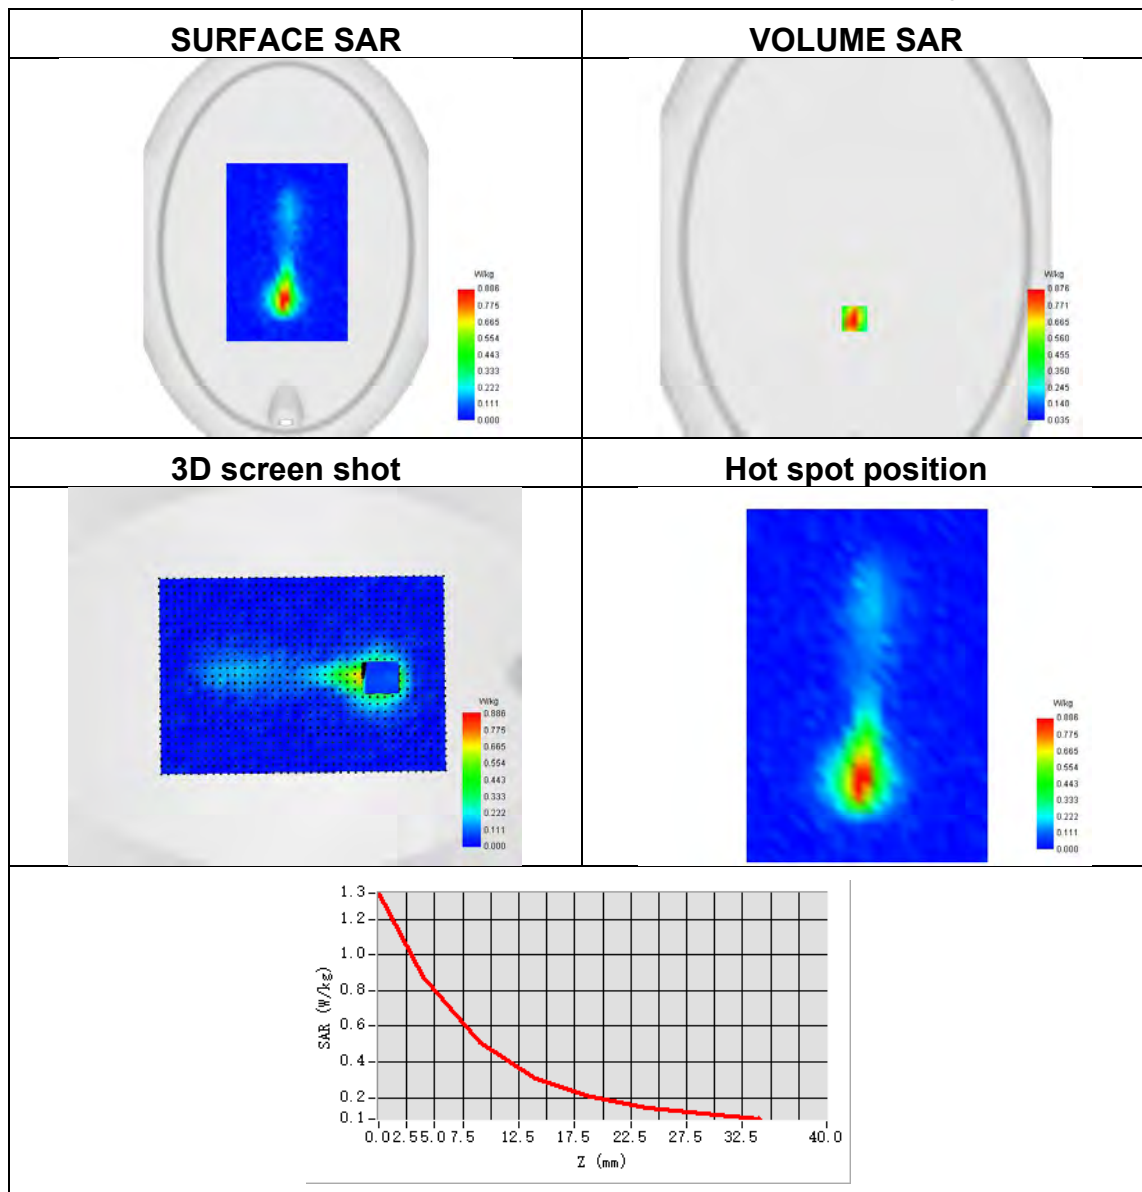




Plot 11:

Test Date	2024-02-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2580
Relative permittivity	40.15
Conductivity (S/m)	1.95
ConvF	2.36
SAR 10g (W/Kg)	0.082
SAR 1g (W/Kg)	0.220

Maximum location: X=-72.00, Y=-52.00 ; SAR Peak: 0.51 W/kg

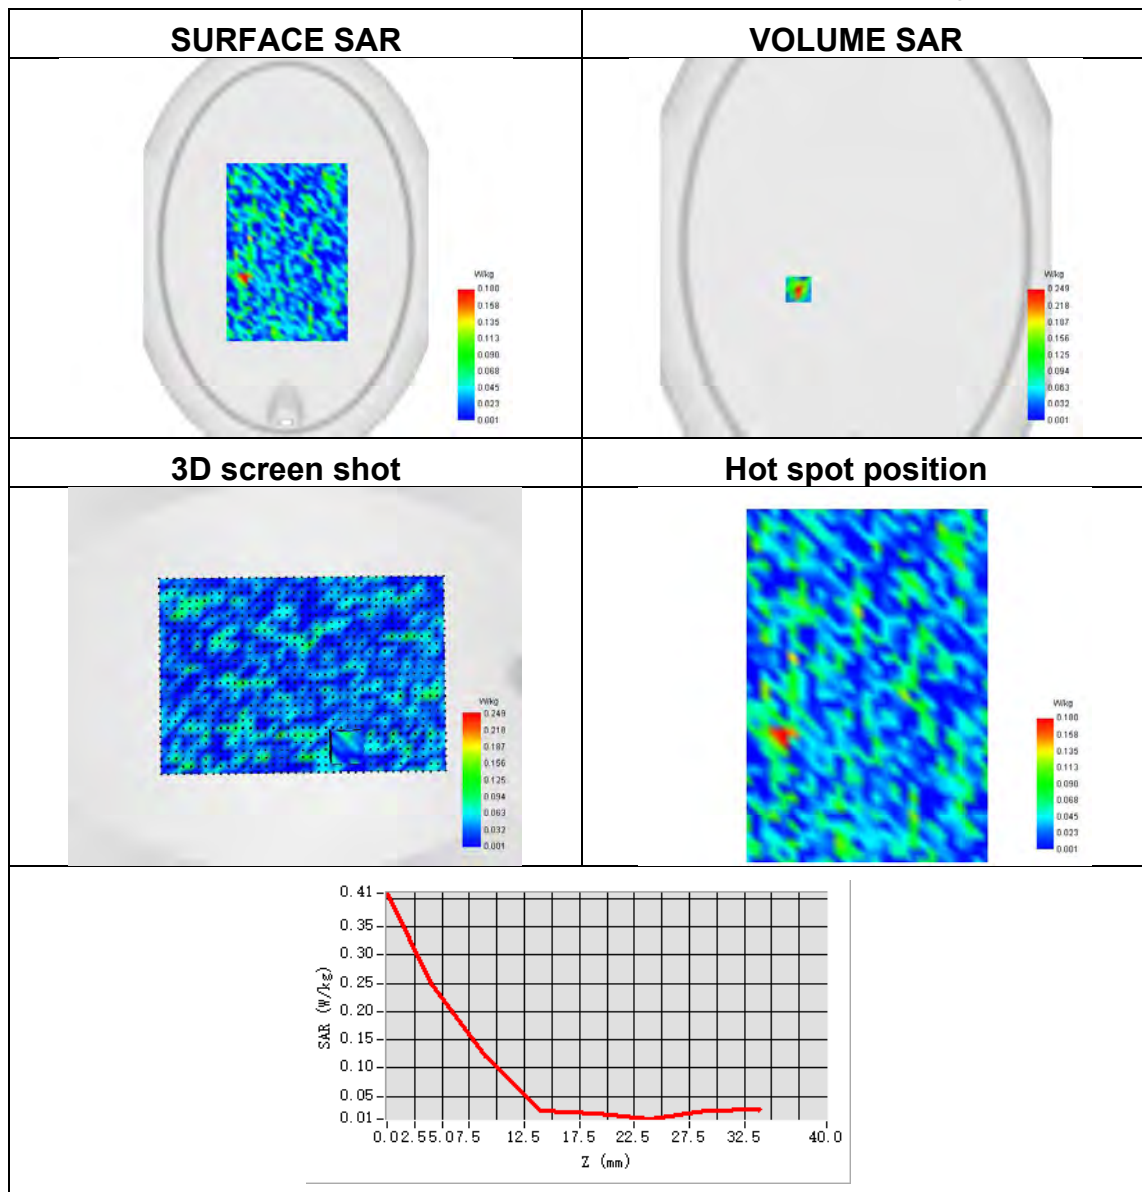




Plot 12:

Test Date	2024-02-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Top Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
Relative permittivity	40.69
Conductivity (S/m)	1.41
ConvF	1.95
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.326

Maximum location: X=-69.00, Y=-17.00 ; SAR Peak: 0.66 W/kg

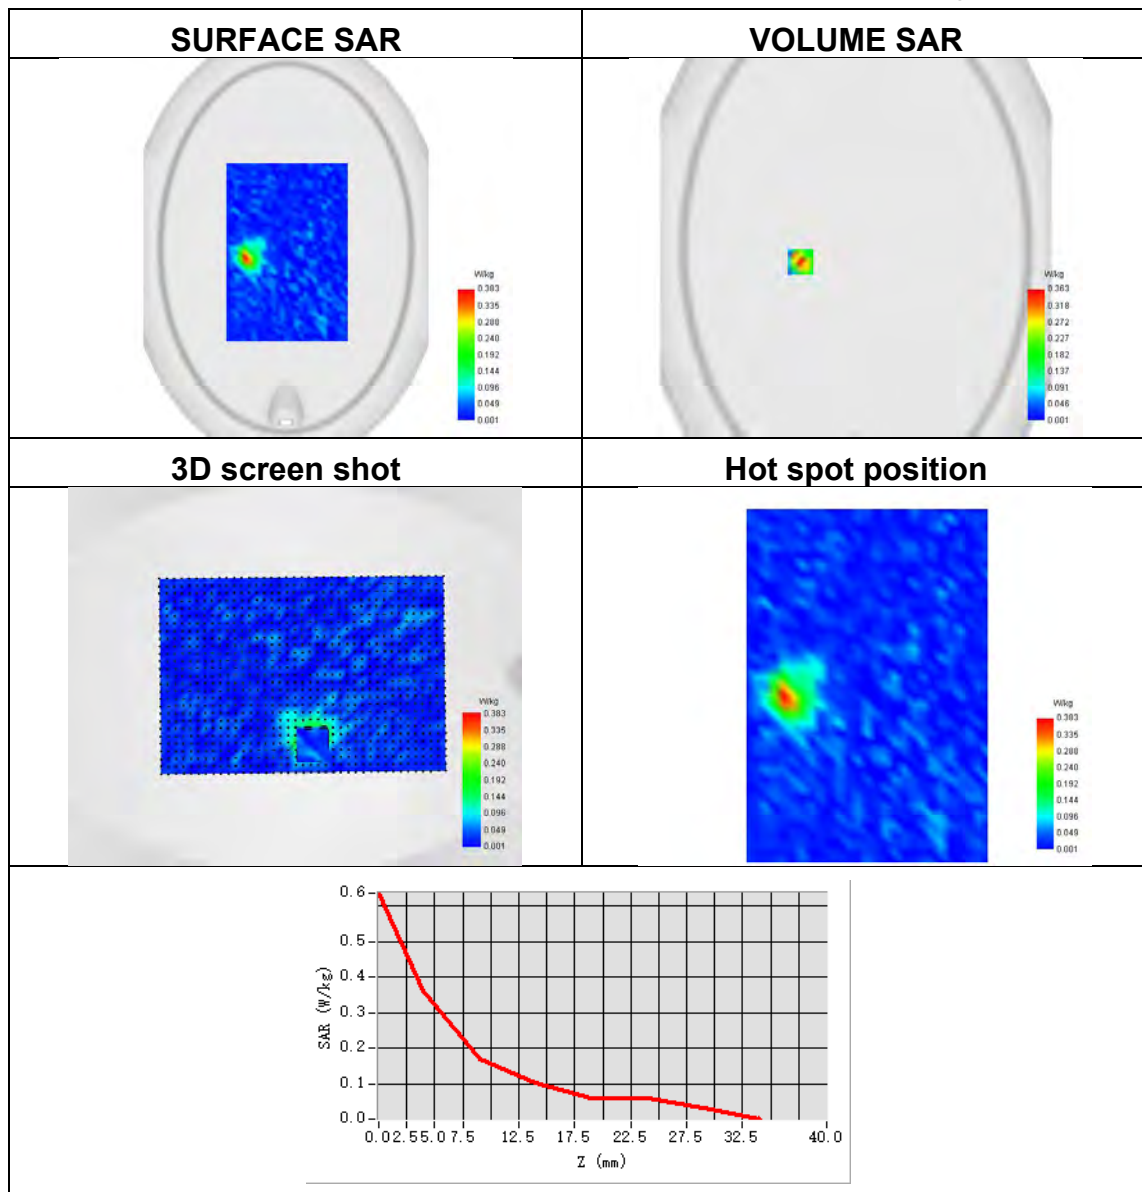




Plot 13:

Test Date	2024-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2412
Relative permittivity	39.07
Conductivity (S/m)	1.83
ConvF	2.33
SAR 10g (W/Kg)	0.231
SAR 1g (W/Kg)	0.502

Maximum location: X=-44.00, Y=41.00 ; SAR Peak: 0.96 W/kg

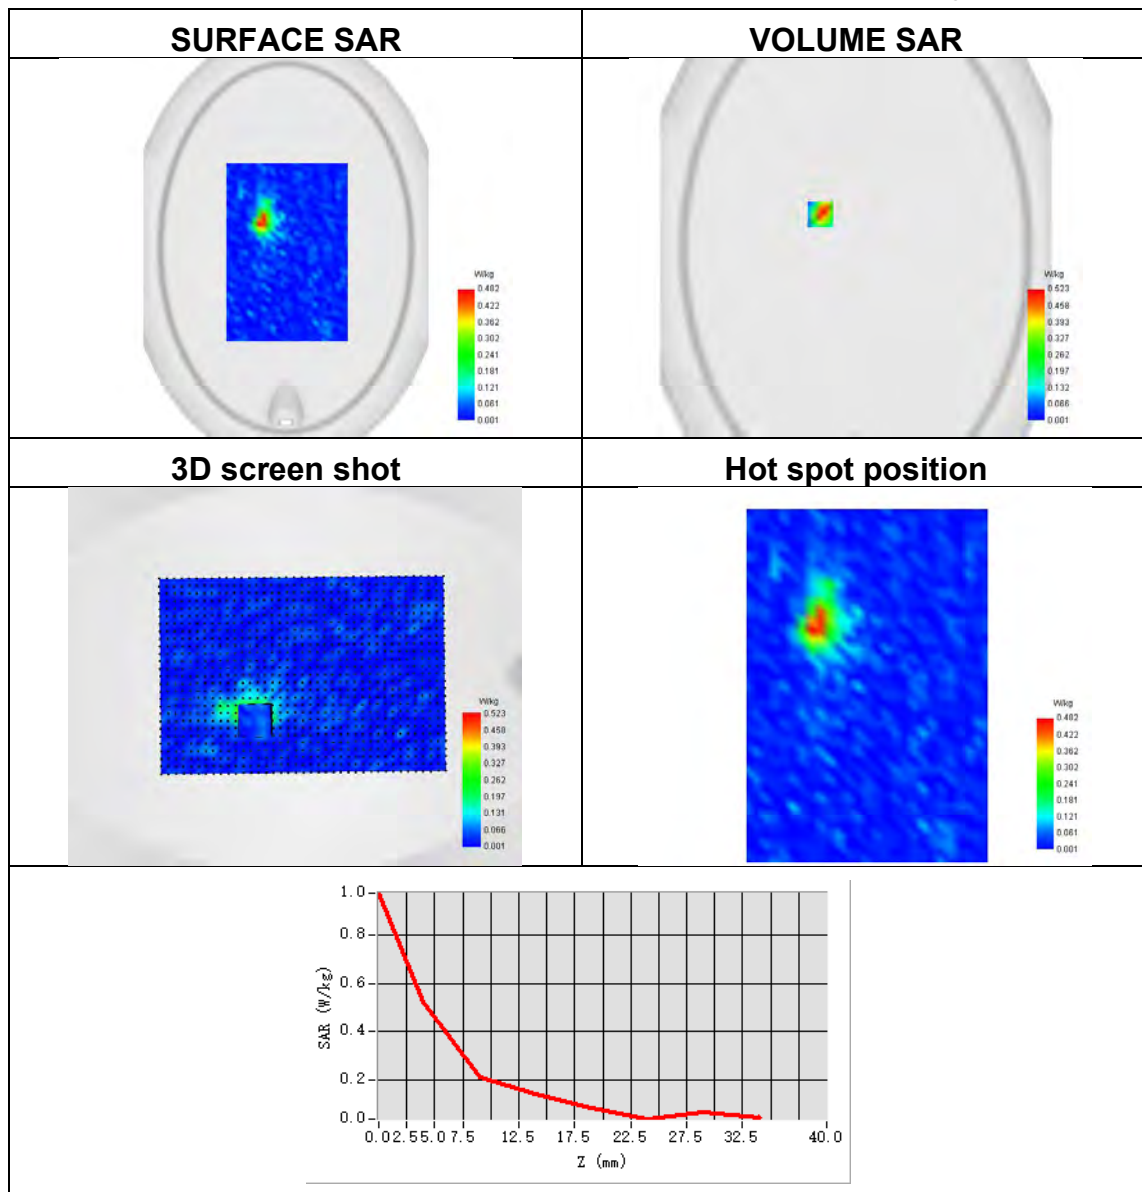




Plot 14:

Test Date	2024-02-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11 a
Frequency	5240
Relative permittivity	36.78
Conductivity (S/m)	4.64
ConvF	1.95
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.243

Maximum location: X=-46.00, Y=25.00 ; SAR Peak: 1.09 W/kg

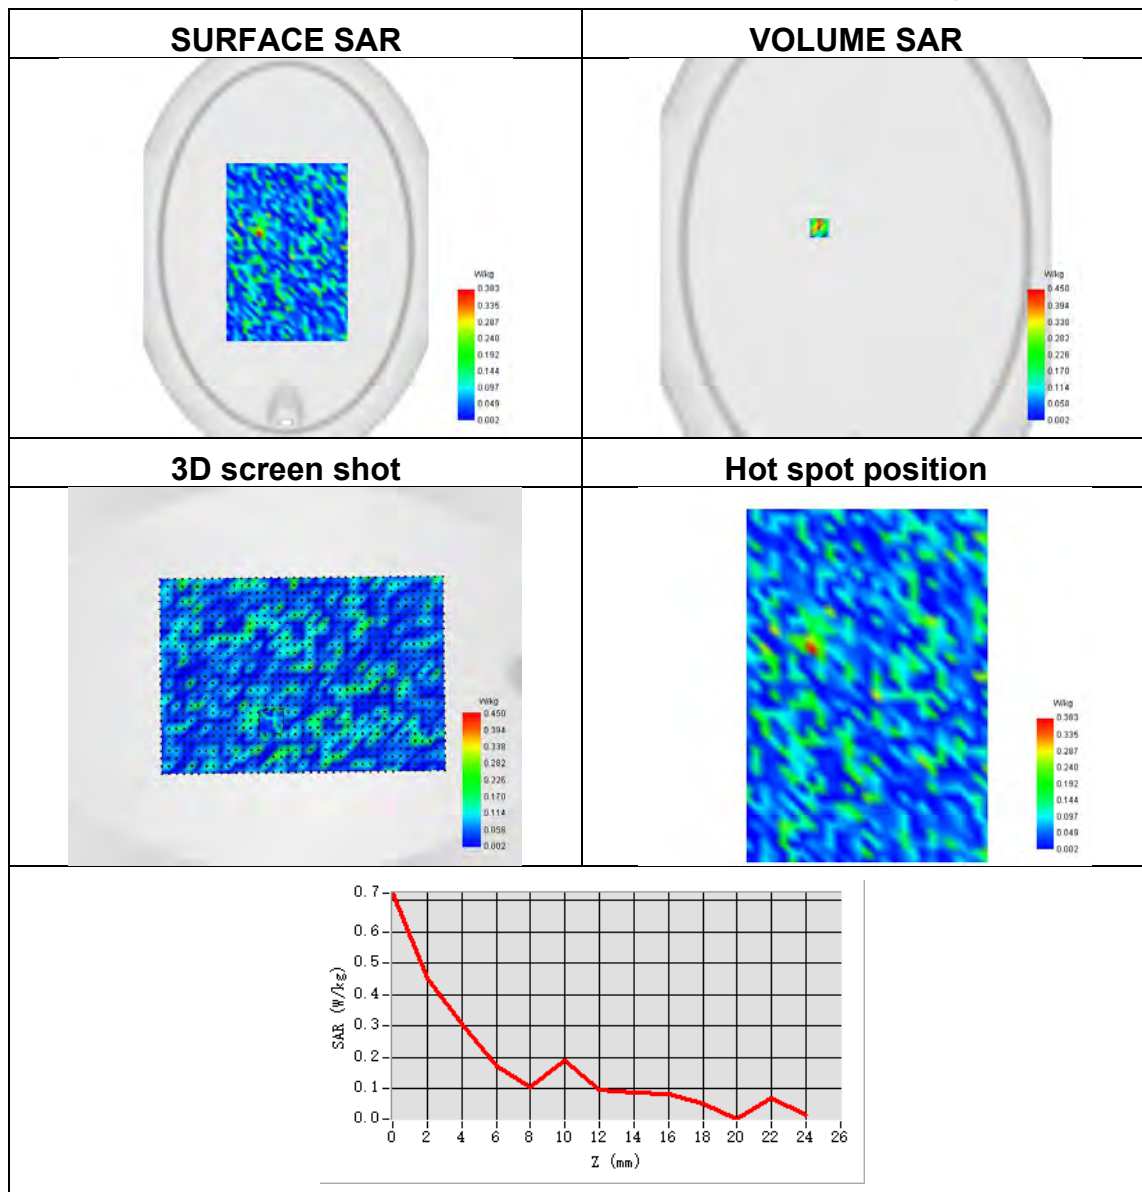




Plot 15:

Test Date	2024-02-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Back Side
Band	U-NII-2
Signal	IEEE 802.11 a
Frequency	5320
Relative permittivity	36.54
Conductivity (S/m)	4.85
ConvF	1.85
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.237

Maximum location: X=-54.00, Y=32.00 ; SAR Peak: 1.09 W/kg

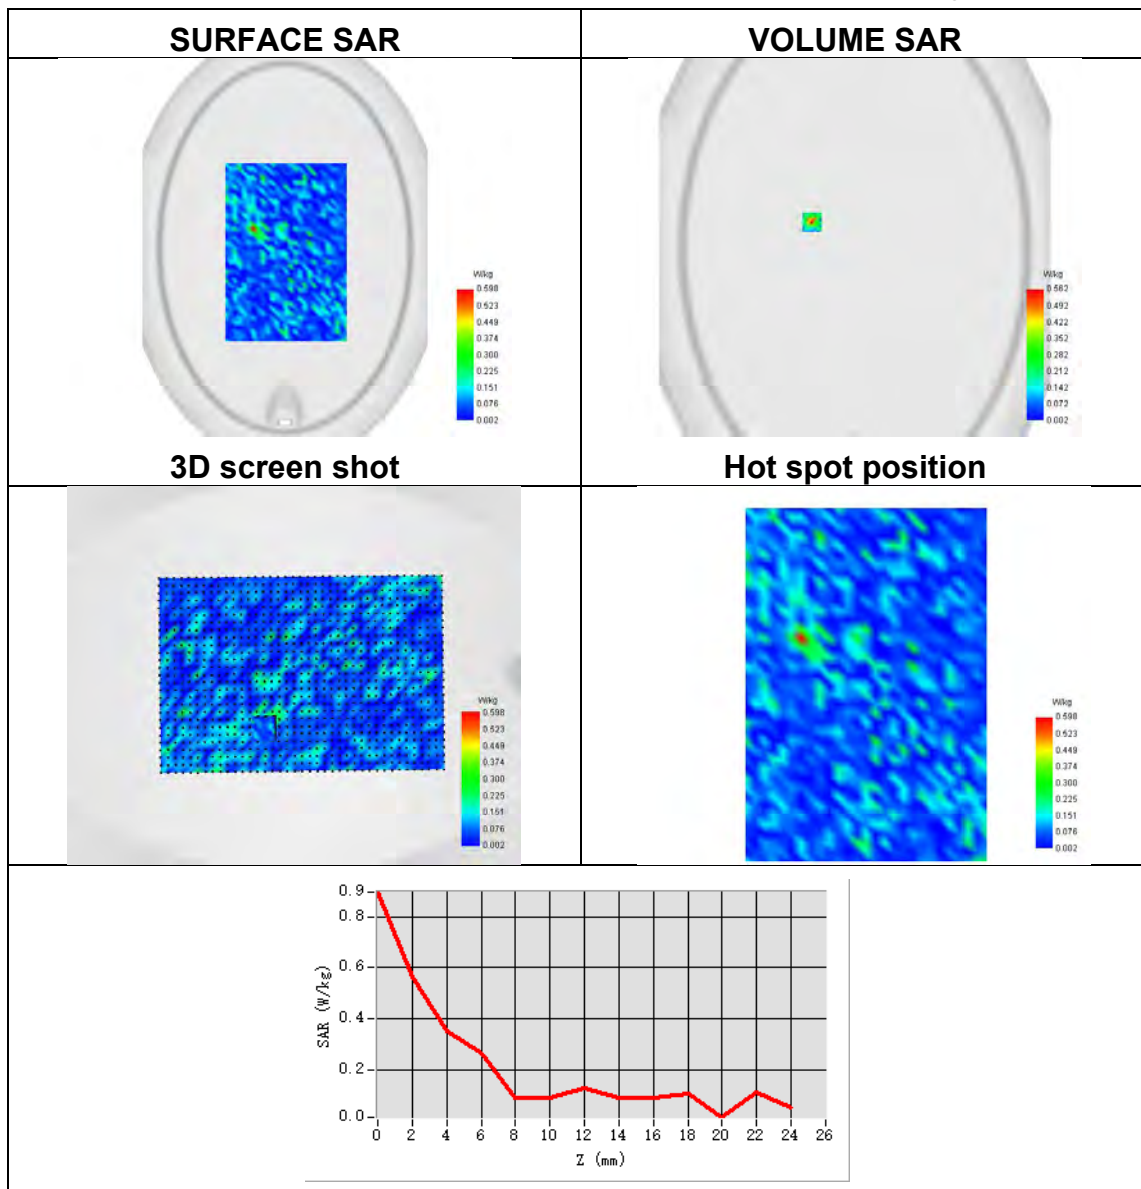




Plot 16:

Test Date	2024-02-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11 a
Frequency	5745
Relative permittivity	35.64
Conductivity (S/m)	5.31
ConvF	1.73
SAR 10g (W/Kg)	0.088
SAR 1g (W/Kg)	0.191

Maximum location: X=58.00, Y=-17.00 ; SAR Peak: 1.32 W/kg

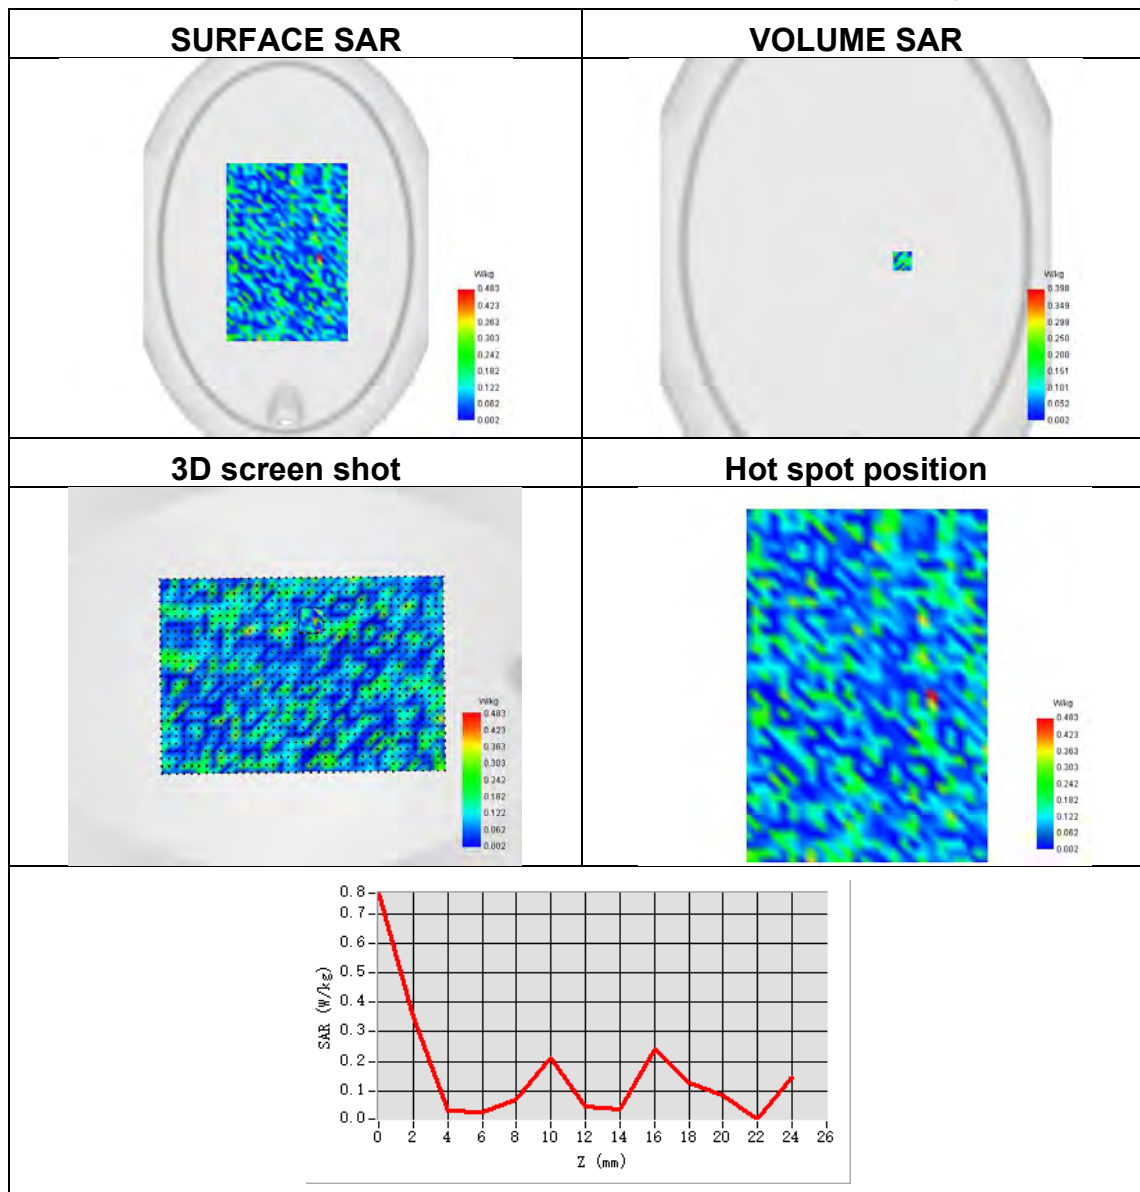



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※