



# SAR TEST REPORT

Product Name: 4G Flip phone

Model Name: Z1L

Family Model: UF1L

FCC ID: O55245123

Issued For : SWAGTEK

10205 NW 19th Street STE101 Miami, FL33172

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,  
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan  
District, Shenzhen, Guangdong, China

Report Number: LGT23L044HA01

Sample Received Date: Dec.21, 2023

Date of Test: Dec. 21, 2023 ~ Jan. 04, 2023

Date of Issue: Jan. 18, 2024

Head: 1.253 W/kg

Max. SAR (1g):

Body: 1.355 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## Table of Contents

<b>1. General Information</b>	<b>5</b>
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
<b>2. Test Standards and Limits</b>	<b>8</b>
<b>3. SAR Measurement System</b>	<b>9</b>
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
<b>4. Tissue Simulating Liquids</b>	<b>12</b>
4.1 Simulating Liquids Parameter Check	12
<b>5. SAR System Validation</b>	<b>14</b>
5.1 Validation System	14
5.2 Validation Result	15
<b>6. SAR Evaluation Procedures</b>	<b>16</b>
<b>7. EUT Antenna Location Sketch</b>	<b>17</b>
7.1 SAR test exclusion consider table	18
<b>8. EUT Test Position</b>	<b>22</b>
8.1 Define Two Imaginary Lines on the Handset	22
8.2 Hotspot mode exposure position condition	23
<b>9. Uncertainty</b>	<b>24</b>
9.1 Measurement Uncertainty	24
<b>10. Conducted Power Measurement</b>	<b>25</b>
10.1 Test Result:	25
<b>11. EUT and Test Setup Photo</b>	<b>41</b>
11.1 EUT Photos	41
11.2 Setup Photos	44
<b>12. SAR Result Summary</b>	<b>50</b>
12.1 Head SAR	50
12.2 Body SAR	53
<b>13. Equipment List</b>	<b>60</b>
<b>Appendix A. System Validation Plots</b>	<b>61</b>
<b>Appendix B. SAR Test Plots</b>	<b>77</b>
<b>Appendix C. Probe Calibration and Dipole Calibration Report</b>	<b>101</b>



**Revision History**

Rev.	Issue Date	Contents
00	Jan. 18, 2024	Initial Issue



## TEST REPORT CERTIFICATION

**Applicant:** SWAGTEK  
**Address:** 10205 NW 19th Street STE101 Miami, FL33172  
**Manufacture:** SWAGTEK  
**Address:** 10205 NW 19th Street STE101 Miami, FL33172  
**Product Name:** 4G Flip phone  
**Trademark:** UNONU, LOGIC, iSWAG  
**Model Name:** Z1L  
**Family Model:** UF1L  
**Sample Status:** Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

*Zane Shan*

\_\_\_\_\_  
Zane Shan  
Engineer

Approved by:

*Vita Li*

\_\_\_\_\_  
Vita Li  
Manager





## 1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

### 1.1 EUT Description

Product Name:	4G Flip phone		
Trademark:	UNONU, LOGIC, iSWAG		
Model Name:	Z1L		
Family Model:	UF1L		
Model Difference:	Only different in model name		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	T11_MB_V2.0		
Software Version	T11_WEL_W245_V01_12142023		
Frequency Range	GSM 850: 824 ~ 849 MHz PCS 1900: 1850 ~ 1910 MHz WCDMA Band II: 1850 ~ 1910 MHz WCDMA Band IV: 1710 ~ 1755 MHz WCDMA Band V: 824 ~ 849 MHz LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 12: 699 ~ 716 MHz LTE Band 13: 777 ~ 787 MHz LTE Band 17: 704 ~ 716 MHz LTE Band 66: 1710 ~ 1780 MHz Bluetooth: 2402 ~ 2480 MHz		
Max. Reported SAR(1g): (Limit: 1.6W/kg) Test distance: Head: 0mm Body: 10mm	Mode	Head (W/ kg)	Body Worn (W/ kg)
	GSM 850	0.316	0.422
	PCS 1900	0.237	0.284
	WCDMA Band II	0.461	0.529
	WCDMA Band IV	0.791	1.179
	WCDMA Band V	0.362	0.249
	LTE Band 2	0.631	0.652
	LTE Band 4	0.886	1.338
	LTE Band 5	0.311	0.383
	LTE Band 12	0.314	0.176
	LTE Band 13	1.253	1.075
	LTE Band 17	0.376	0.148



	LTE Band 66	1.188	1.355
	Bluetooth <sup>Note</sup>	0.210	0.210
1-g Sum SAR		1.463	1.565
Battery	Rated Voltage:3.7V Capacity: 1000mAh		
Description test modes	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested		
Operating Mode:	GSM: GSM Voice; GPRS WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM Bluetooth: GFSK + $\pi$ /4DQPSK+8DPSK		
Antenna Specification	GSM/WCDMA/LTE: FPC Antenna Bluetooth: Monopole Antenna		
Operating Mode	Maximum continuous output		
Hotspot Mode	Not Support		
DTM Mode	Not Support		
Note 1: The BT value was Estimated.			



## 1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

## 1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



## 2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body    Partial-Body    Hands, Wrists, Feet and Ankles

0.4                      8.0                      20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body    Partial-Body    Hands, Wrists, Feet and Ankles

0.08                      1.6                      4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments:**

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments:**

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**





### 3. SAR Measurement System

#### 3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue;

$\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SAR System

MVG SAR System Diagram:

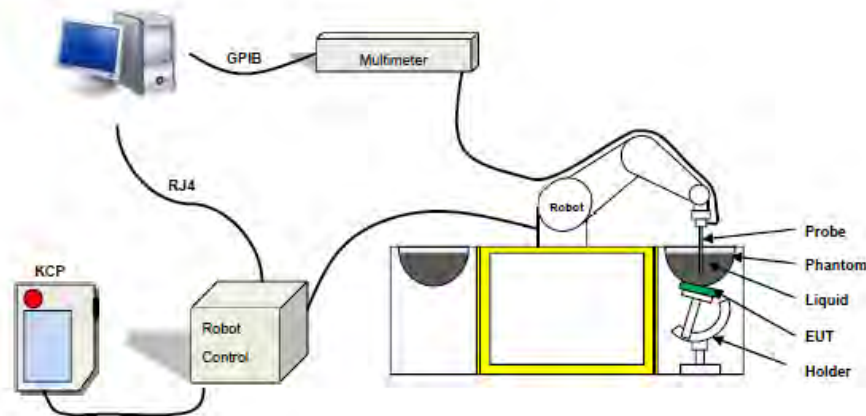

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

### 3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPGO364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



### 3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

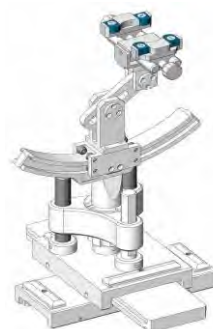


Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

### 3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



## 4. Tissue Simulating Liquids

### 4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max \_ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

#### IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	$\epsilon_r$	$\sigma$ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



### LIQUID MEASUREMENT RESULTS

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2024-01-03	22.7	46	750	22.3	Permittivity	41.90	42.97	2.55	±5
					Conductivity	0.89	0.85	-4.49	±5
2023-12-22	22.0	52	835	21.8	Permittivity	41.50	42.40	2.17	±5
					Conductivity	0.90	0.91	1.11	±5
2023-12-30	23.8	52	835	23.5	Permittivity	41.50	40.99	-1.23	±5
					Conductivity	0.90	0.92	2.22	±5
2023-12-25	20.5	51	1800	20.2	Permittivity	40.00	41.17	2.93	±5
					Conductivity	1.40	1.42	1.43	±5
2023-12-26	22.4	52	1800	22.1	Permittivity	40.00	40.58	1.45	±5
					Conductivity	1.40	1.41	0.71	±5
2024-01-01	21.1	52	1800	20.8	Permittivity	40.00	41.40	3.50	±5
					Conductivity	1.40	1.43	2.14	±5
2023-12-23	20.5	51	1900	20.2	Permittivity	40.00	40.29	0.72	±5
					Conductivity	1.40	1.40	0.00	±5
2023-12-31	22.7	51	1900	22.4	Permittivity	40.00	41.53	3.83	±5
					Conductivity	1.40	1.37	-2.14	±5




## 5. SAR System Validation

### 5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

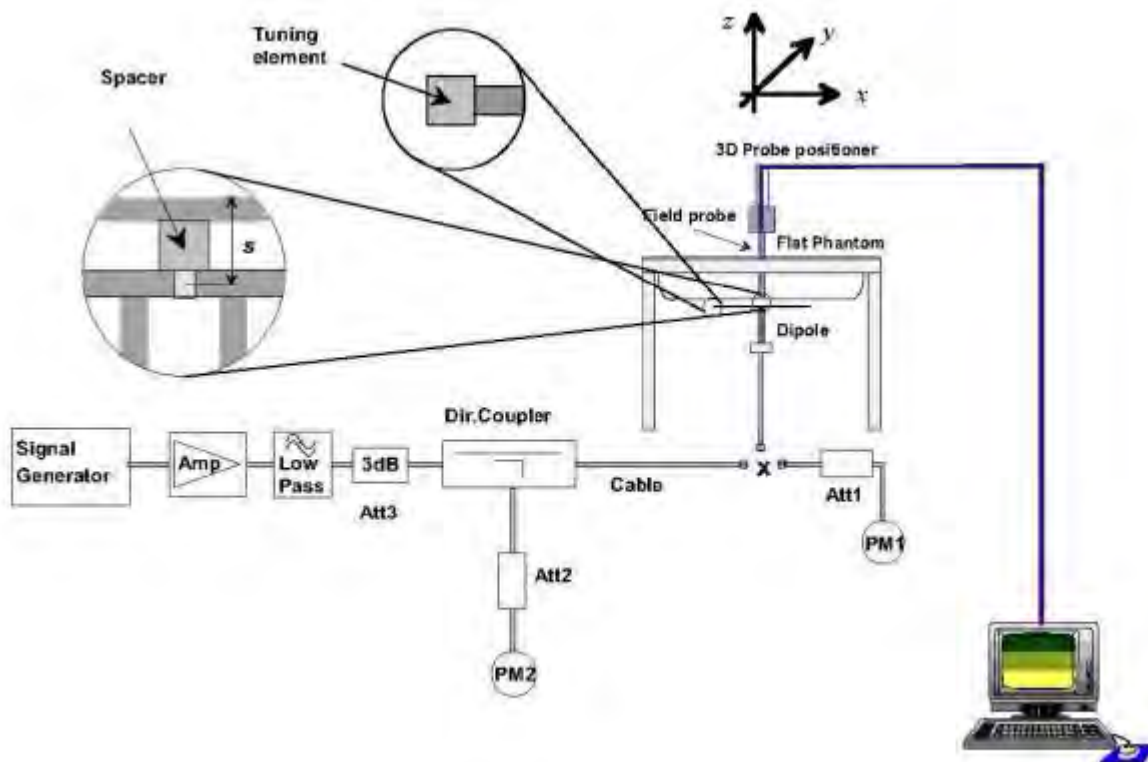



## 5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of  $\pm 10\%$ .

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2024-01-03	750	100	0.817	8.17	8.27	-1.21	10
2023-12-22	835	100	0.958	9.58	9.75	-1.74	10
2023-12-30	835	100	0.946	9.46	9.75	-2.97	10
2023-12-25	1800	100	3.911	39.11	39.06	0.13	10
2023-12-26	1800	100	3.943	39.43	39.06	0.95	10
2024-01-01	1800	100	3.693	36.93	39.06	-5.45	10
2023-12-23	1900	100	4.238	42.38	40.85	3.75	10
2023-12-31	1900	100	3.928	39.28	40.85	-3.84	10

**Note:**

1. The tolerance limit of System validation  $\pm 10\%$ .
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



## 6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### ➤ Area Scan & Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.





## 7. EUT Antenna Location Sketch

It is a 4G FLIP PHONE, support GSM/WCDMA/LTE/ BT mode.



**Bottom side  
(Front view)**

Antenna Separation Distance(mm)						
ANT	Back Side	Front Side	Left Side	Right Side	Top Side	Bottom Side
BT	5	5	5	56	30	25
WWAN	5	5	37	5	5	45

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



### 7.1 SAR test exclusion consider table

The WWAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA II	WCDMA IV	WCDMA V
	Calculated Frequency (MHz)	848.8	1909.8	1852.4	1712.6	846.6
	Maximum Turn-up power (dBm)	33	29.5	22	22.8	22
	Maximum rated power(mW)	1995.26	891.25	158.49	190.55	158.49
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.85	11.02	11.46	16.30
	Testing required?	YES	YES	YES	YES	YES
Front Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.85	11.02	11.46	16.30
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	37	37	37	37	37
	exclusion threshold(mW)	120.48	80.32	81.56	84.82	120.64
	Testing required?	YES	YES	YES	YES	YES
Right Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.85	11.02	11.46	16.30
	Testing required?	YES	YES	YES	YES	YES
Top Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.28	10.85	11.02	11.46	16.30
	Testing required?	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (mm)	45	45	45	45	45
	exclusion threshold(mW)	146.53	97.69	99.19	103.16	146.72
	Testing required?	YES	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 13
	Calculated Frequency (MHz)	1880	1732.5	836.5	707.5	707.5
	Maximum Turn-up power (dBm)	23	23	22.5	22.5	19.5
	Maximum rated power(mW)	199.53	199.53	177.83	177.83	89.13
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.94	11.40	16.40	17.83	17.83
	Testing required?	YES	YES	YES	YES	YES
Front Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.94	11.40	16.40	17.83	17.83
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	37	37	37	37	37
	exclusion threshold(mW)	80.96	84.33	121.36	131.97	131.97
	Testing required?	YES	YES	YES	YES	NO
Right Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.94	11.40	16.40	17.83	17.83
	Testing required?	YES	YES	YES	YES	YES
Top Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.94	11.40	16.40	17.83	17.83
	Testing required?	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (mm)	45	45	45	45	45
	exclusion threshold(mW)	98.46	102.56	147.60	160.50	160.50
	Testing required?	YES	YES	YES	YES	NO



Exposure Position	Wireless Interface	LTE Band 17	LTE Band 66	BT
	Calculated Frequency (MHz)	707.5	1745	2480
	Maximum Turn-up power (dBm)	22.5	22.7	7
	Maximum rated power(mW)	177.83	186.21	5.01
Back Side	Separation distance (mm)	5	5	5
	exclusion threshold(mW)	17.83	11.36	9.53
	Testing required?	YES	YES	NO
Front Side	Separation distance (mm)	5	5	5
	exclusion threshold(mW)	17.83	11.36	9.53
	Testing required?	YES	YES	NO
Left Edge	Separation distance (mm)	37	37	5
	exclusion threshold(mW)	131.97	84.03	9.53
	Testing required?	YES	YES	NO
Right Edge	Separation distance (mm)	5	5	56
	exclusion threshold(mW)	17.83	11.36	106.68
	Testing required?	YES	YES	NO
Top Edge	Separation distance (mm)	5	5	30
	exclusion threshold(mW)	17.83	11.36	57.15
	Testing required?	YES	YES	NO
Bottom Edge	Separation distance (mm)	45	45	25
	exclusion threshold(mW)	160.50	102.20	47.63
	Testing required?	YES	YES	NO

**Note:**

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm,25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance  $\leq 50$ mm are determined by:  

$$\frac{[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance,} ]$$



mm)]\* $\sqrt{f(\text{GHz})} \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR,  $f(\text{GHz})$  is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation.

The result is rounded to one decimal place for comparison

For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare

5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR

test exclusion threshold is determined according to the following

a) [threshold at 50mm in step 1]+(test separation distance -50mm)\*(f (MHz)/150)]mW, at 100 MHz to 1500 MHz

b) [threshold at 50mm in step1]+( test separation distance -50mm) \*10]mW at > 1500MHz and  $\leq$  6GHz




## 8. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


### 8.1 Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

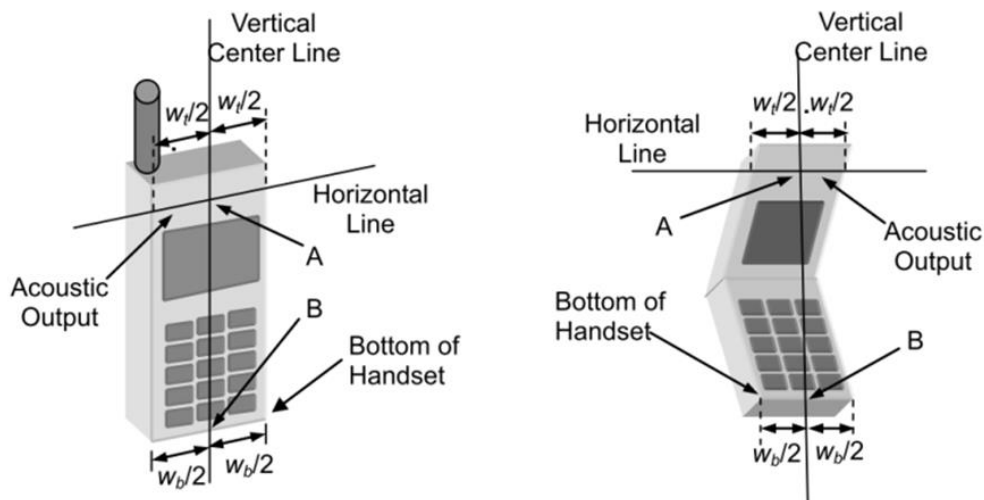

### Cheek Position

- 1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- 2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

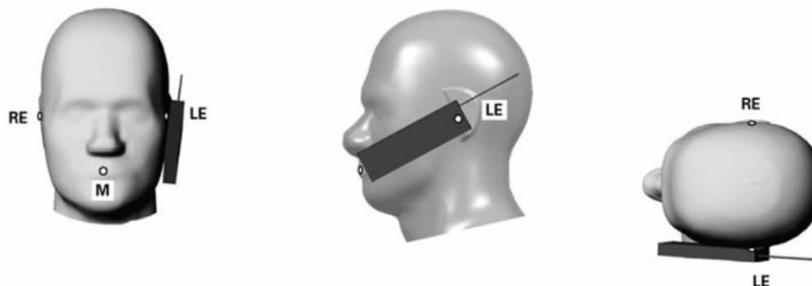



### Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.




### Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.



## 8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

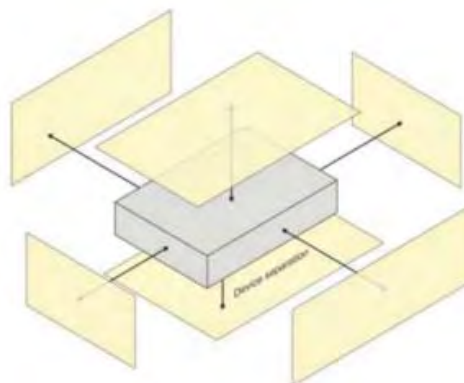



## 9. Uncertainty

### 9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Symbol	Uncertainty Component	Prob. Dist.	Unc. $a(x_i)$	Div. $q_i$	$u(x_i) = a(x_i)/q_i$	$C_i$	$u(y) = C_i * u(x_i)$	$v_i$
<b>Measurement system errors</b>								
CF	Probe calibration	N ( $k = 2$ )	5.8	2	2.90	1	2.90	$\infty$
CF <sub>drift</sub>	Probe calibration drift	R	0.12	$\sqrt{3}$	0.07	1	0.07	$\infty$
LIN	Probe linearity and detection limit	R	1.91	$\sqrt{3}$	1.10	1	1.10	$\infty$
BBS	Broadband signal	R	0.15	$\sqrt{3}$	0.09	1	0.09	$\infty$
ISO	Probe isotropy	R	0.18	$\sqrt{3}$	0.10	1	0.10	$\infty$
DAE	Other probe and data acquisition errors	N	2.7	1	2.70	1	2.70	$\infty$
AMB	RF ambient and noise	N	1.73	1	1.73	1	1.73	$\infty$
$\Delta_{xyz}$	Probe positioning errors	N	0.81	1	0.81	$2/\delta$	0.81	
DAT	Data processing errors	N	2.5	1	2.50	1	2.50	$\infty$
<b>Phantom and device (DUT or validation antenna) errors</b>								
LIQ( $\sigma$ )	Measurement of phantom conductivity( $\sigma$ )	N	4.4	1	4.4	$c\epsilon, c\sigma$	4.40	$\infty$
LIQ( $T_c$ )	Temperature effects (medium)	R	2.9	$\sqrt{3}$	1.67	$c\epsilon, c\sigma$	1.67	$\infty$
EPS	Shell permittivity	R	3.4	$\sqrt{3}$	1.96	See 8.4.2.3	0.49	$\infty$
DIS	Distance between the radiating element of the DUT and the phantom medium	N	0.8	1	0.8	2	1.60	$\infty$
D <sub>xyz</sub>	Repeatability of positioning the DUT or source against the phantom	N	1.5	1	1.5	1	1.50	5
H	Device holder effects	N	3	1	3	1	3.00	
MOD	Effect of operating mode on probe sensitivity	R	3.59	$\sqrt{3}$	2.07	1	2.07	$\infty$
TAS	Time-average SAR	R	1.73	$\sqrt{3}$	1.00	1	1.00	$\infty$
RF <sub>drift</sub>	Variation in SAR due to drift in output of DUT	N	2.89	1	2.89	1	2.89	
VAL	Validation antenna uncertainty (validation measurement only)	N	1.45	1	1.45	1	1.45	
P <sub>in</sub>	Uncertainty in accepted power (validation measurement only)	N	2.5	1	2.5	1	2.50	
<b>Corrections to the SAR result (if applied)</b>								
C( $\epsilon', \sigma$ )	Phantom deviation from target ( $\epsilon', \sigma$ )	N	2.31	1	2.31	1	2.31	
C(R)	SAR scaling	R	1.15	$\sqrt{3}$	0.66	1	0.66	
u( $\Delta$ SAR)	Combined uncertainty						9.53	
U	Expanded uncertainty and effective degrees of freedom					U =	19.06	





## 10. Conducted Power Measurement

### 10.1 Test Result:

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	31.72	32.48	32.75	29.19	29.13	29.31
GPRS (GMSK, 1-Slot)	31.71	32.43	32.71	29.18	29.11	29.32
GPRS (GMSK, 2-Slot)	29.53	30.39	30.72	27.18	26.89	26.89
GPRS (GMSK, 3-Slot)	27.62	28.53	28.87	25.66	25.38	25.41
GPRS (GMSK, 4-Slot)	25.50	26.44	26.88	23.60	23.37	23.43

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.  
 Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link  
 Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link  
 Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	22.69	23.45	23.72	20.16	20.10	20.28
GPRS (GMSK, 1-Slot)	22.68	23.40	23.68	20.15	20.08	20.29
GPRS (GMSK, 2-Slot)	23.51	24.37	24.70	21.16	20.87	20.87
GPRS (GMSK, 3-Slot)	23.36	24.27	24.61	21.40	21.12	21.15
GPRS (GMSK, 4-Slot)	22.49	23.43	23.87	20.59	20.36	20.42

Remark:  
 1. SAR testing was performed on the maximum frame-averaged power mode.  
 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum  
 Burst - averaged power based on time slots. The calculated method is shown as below:  
 Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB  
 Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB  
 Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB  
 Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB



## WCDMA

Band	WCDMA Band 2			WCDMA Band 4			WCDMA Band 5		
Channel	9262	9400	9538	1312	1450	1513	4132	4182	4233
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740	1752.4	826.4	836.4	846.6
RMC 12.2Kbps	21.55	21.43	21.69	21.77	21.87	21.74	20.95	21.72	21.91
HSDPA Subtest-1	21.73	21.10	21.17	22.17	21.56	21.79	21.44	21.86	21.46
HSDPA Subtest-2	21.31	20.87	20.93	21.68	21.32	21.49	21.03	21.59	21.24
HSDPA Subtest-3	20.95	20.57	20.58	21.41	21.10	21.34	20.80	21.37	20.94
HSDPA Subtest-4	20.74	20.41	20.56	21.29	20.94	20.91	20.59	21.18	20.74
HSUPA Subtest-1	21.68	20.83	20.94	22.15	21.57	21.70	21.33	21.60	21.24
HSUPA Subtest-2	21.56	20.98	21.13	22.01	21.70	21.85	21.37	21.89	21.40
HSUPA Subtest-3	21.38	20.84	20.86	21.70	21.47	21.62	20.79	21.60	21.13
HSUPA Subtest-4	21.43	20.99	21.11	21.90	21.61	21.82	21.11	21.88	21.39
HSUPA Subtest-5	21.06	21.00	20.84	21.86	21.59	21.63	21.05	21.66	21.31

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM (db)	MPR (db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



## Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	4.94	3.12
	39	2441	4.37	2.74
	78	2480	5.11	3.24
$\pi/4$ -QPSK(2Mbps)	0	2402	6.10	4.07
	39	2441	5.60	3.63
	78	2480	6.53	4.50
8DPSK(3Mbps)	0	2402	6.40	4.37
	39	2441	6.00	3.98
	78	2480	6.83	4.82



## LTE Conducted Power

### General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.47	22.18	22.35
1.4	1	2		22.40	22.14	22.38
1.4	1	5		22.41	22.12	22.37
1.4	3	0		22.35	22.27	22.33
1.4	3	1		22.40	22.31	22.44
1.4	3	2		22.34	22.21	22.37
1.4	6	0		21.41	21.24	21.51
1.4	1	0	16-QAM	22.37	21.34	21.75
1.4	1	2		22.41	21.31	21.80
1.4	1	5		22.41	21.30	21.74
1.4	3	0		21.56	21.29	21.91
1.4	3	1		21.51	21.28	21.79
1.4	3	2		21.56	21.33	21.75
1.4	6	0		20.45	20.25	20.67
3	1	0	QPSK	22.24	22.17	22.33
3	1	7		22.34	22.15	22.38
3	1	14		22.32	22.11	22.37
3	8	0		21.46	21.15	21.44
3	8	4		21.33	21.24	21.35
3	8	7		21.31	21.30	21.40
3	15	0		21.40	21.28	21.41
3	1	0	16-QAM	22.05	21.42	21.75
3	1	7		22.04	21.32	21.80
3	1	14		22.08	21.42	21.81
3	8	0		20.07	20.36	20.49
3	8	4		20.39	20.38	20.46
3	8	7		20.40	20.39	20.43
3	15	0		20.52	20.27	20.51



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.15	22.21	22.17
5	1	12		22.27	22.25	22.23
5	1	24		22.30	22.30	22.20
5	12	0		21.44	21.27	21.39
5	12	6		21.43	21.35	21.42
5	12	11		21.37	21.33	21.35
5	25	0		21.31	21.23	21.42
5	1	0	16-QAM	21.59	21.04	22.11
5	1	12		21.67	20.94	22.02
5	1	24		21.65	21.11	22.02
5	12	0		20.35	20.17	20.53
5	12	6		20.44	20.15	20.45
5	12	11		20.38	20.18	20.42
5	25	0		20.50	20.39	20.55
10	1	0	QPSK	22.28	22.21	22.34
10	1	24		22.41	22.25	22.37
10	1	49		22.40	22.37	22.35
10	25	0		21.29	21.25	21.39
10	25	12		21.39	21.19	21.37
10	25	24		21.43	21.26	21.51
10	50	0		21.47	21.25	21.32
15	1	0	QPSK	22.33	22.10	22.25
15	1	37		22.35	22.13	22.28
15	1	74		22.27	22.22	22.29
15	36	0		21.34	21.17	21.36
15	36	18		21.41	21.37	21.32
15	36	39		21.38	21.30	21.37
15	75	0		21.35	21.34	21.48
20	1	0	QPSK	22.35	22.28	22.42
20	1	49		22.34	22.34	22.46
20	1	99		22.47	22.58	22.56
20	50	0		21.33	21.18	21.41
20	50	24		21.50	21.37	21.39
20	50	49		21.45	21.41	21.46
20	100	0		21.37	21.30	21.51



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.55	22.68	22.67
1.4	1	2		22.48	22.60	22.74
1.4	1	5		22.51	22.59	22.71
1.4	3	0		22.38	22.62	22.48
1.4	3	1		22.36	22.58	22.54
1.4	3	2		22.36	22.62	22.50
1.4	6	0		21.42	21.61	21.46
1.4	1	0	16-QAM	22.23	22.43	21.99
1.4	1	2		22.25	22.44	21.90
1.4	1	5		22.36	22.47	22.04
1.4	3	0		21.65	21.77	21.86
1.4	3	1		21.60	21.70	21.80
1.4	3	2		21.61	21.80	21.88
1.4	6	0		20.57	20.63	20.62
3	1	0	QPSK	22.31	22.50	22.62
3	1	7		22.33	22.53	22.61
3	1	14		22.39	22.57	22.64
3	8	0		21.39	21.64	21.52
3	8	4		21.51	21.73	21.48
3	8	7		21.40	21.57	21.49
3	15	0		21.30	21.64	21.47
3	1	0	16-QAM	22.20	21.79	21.94
3	1	7		22.27	21.76	22.02
3	1	14		22.23	21.77	21.96
3	8	0		20.44	20.81	20.58
3	8	4		20.41	20.79	20.50
3	8	7		20.46	20.81	20.55
3	15	0		20.58	20.74	20.48



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.28	22.64	22.32
5	1	12		22.25	22.59	22.32
5	1	24		22.33	22.67	22.49
5	12	0		21.48	21.76	21.47
5	12	6		21.36	21.62	21.44
5	12	11		21.36	21.60	21.41
5	25	0		21.40	21.70	21.53
5	1	0	16-QAM	21.65	21.42	21.56
5	1	12		21.66	21.36	21.64
5	1	24		21.66	21.37	21.64
5	12	0		20.38	20.61	20.56
5	12	6		20.41	20.67	20.55
5	12	11		20.41	20.68	20.58
5	25	0		20.56	20.84	20.50
10	1	0	QPSK	22.38	22.61	22.50
10	1	24		22.50	22.58	22.56
10	1	49		22.58	22.61	22.58
10	25	0		21.48	21.68	21.49
10	25	12		21.39	21.71	21.45
10	25	24		21.46	21.65	21.58
10	50	0		21.47	21.65	21.53
15	1	0	QPSK	22.35	22.55	22.57
15	1	37		22.45	22.65	22.48
15	1	74		22.68	22.55	22.58
15	36	0		21.35	21.64	21.48
15	36	18		21.54	21.59	21.41
15	36	39		21.65	21.67	21.45
15	75	0		21.51	21.62	21.50
20	1	0	QPSK	22.59	22.71	22.74
20	1	49		22.49	22.55	22.57
20	1	99		22.34	22.66	22.68
20	50	0		21.50	21.58	21.50
20	50	24		21.51	21.73	21.50
20	50	49		21.73	21.58	21.62
20	100	0		21.46	21.54	21.56





LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.22	21.99	22.17
1.4	1	2		21.24	22.15	22.13
1.4	1	5		21.23	22.09	22.41
1.4	3	0		21.09	22.11	22.29
1.4	3	1		21.16	22.12	22.32
1.4	3	2		21.17	22.14	22.37
1.4	6	0		20.04	21.02	21.39
1.4	1	0		16-QAM	20.97	21.83
1.4	1	2	20.98		21.67	22.32
1.4	1	5	21.10		21.71	22.34
1.4	3	0	20.19		21.05	21.75
1.4	3	1	20.27		21.05	21.60
1.4	3	2	20.28		21.05	21.64
1.4	6	0	19.15		20.00	20.58
3	1	0	QPSK	20.97	21.93	22.21
3	1	7		21.10	22.11	22.23
3	1	14		21.15	22.18	22.27
3	8	0		20.16	21.02	21.35
3	8	4		20.12	20.99	21.32
3	8	7		20.22	21.07	21.34
3	15	0		20.20	21.05	21.36
3	1	0	16-QAM	20.91	21.69	22.13
3	1	7		21.08	21.73	22.20
3	1	14		21.10	21.82	22.22
3	8	0		19.00	20.11	20.79
3	8	4		19.02	20.34	20.70
3	8	7		19.51	20.34	20.42
3	15	0		19.11	20.16	20.73



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.07	21.89	22.39
5	1	12		21.15	22.07	22.26
5	1	24		21.41	22.23	22.35
5	12	0		20.10	21.03	21.40
5	12	6		20.13	21.06	21.33
5	12	11		20.35	21.12	21.39
5	25	0		20.17	21.08	21.39
5	1	0	16-QAM	20.15	20.65	21.31
5	1	12		20.37	20.79	21.26
5	1	24		20.56	20.87	21.37
5	12	0		19.11	19.86	20.37
5	12	6		19.60	20.02	20.75
5	12	11		19.74	20.09	20.71
5	25	0		19.76	20.14	20.68
10	1	0	QPSK	21.08	21.71	22.21
10	1	24		21.37	22.14	22.30
10	1	49		21.90	22.33	22.43
10	25	0		20.36	20.89	21.32
10	25	12		20.33	21.11	21.32
10	25	24		20.73	21.27	21.41
10	50	0		20.42	21.02	21.37



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.42	22.13	22.13
1.4	1	2		22.34	22.27	22.22
1.4	1	5		22.33	22.22	22.25
1.4	3	0		22.31	22.21	22.19
1.4	3	1		22.35	22.23	22.21
1.4	3	2		22.34	22.19	22.20
1.4	6	0		21.26	21.25	21.30
1.4	1	0	16-QAM	22.32	21.84	22.09
1.4	1	2		22.25	21.97	22.21
1.4	1	5		22.39	21.96	22.22
1.4	3	0		21.46	21.25	21.64
1.4	3	1		21.38	21.24	21.70
1.4	3	2		21.42	21.28	21.56
1.4	6	0		20.88	20.05	20.36
3	1	0	QPSK	22.36	22.16	22.16
3	1	7		22.32	22.24	22.13
3	1	14		22.30	22.22	22.15
3	8	0		21.36	21.19	21.22
3	8	4		21.27	21.30	21.21
3	8	7		21.28	21.25	21.28
3	15	0		21.24	21.23	21.20
3	1	0	16-QAM	21.94	21.86	22.04
3	1	7		21.95	21.94	22.07
3	1	14		21.87	21.89	22.09
3	8	0		21.02	20.11	20.57
3	8	4		21.06	20.13	20.58
3	8	7		21.05	20.20	20.03
3	15	0		20.85	20.26	20.93



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.15	22.10	22.23
5	1	12		22.24	22.07	22.19
5	1	24		22.13	22.18	22.23
5	12	0		21.29	21.22	21.23
5	12	6		21.25	21.18	21.25
5	12	11		21.31	21.23	21.21
5	25	0		21.34	21.34	21.29
5	1	0	16-QAM	21.42	20.84	21.29
5	1	12		21.39	21.01	21.23
5	1	24		21.41	20.98	21.07
5	12	0		20.78	20.02	20.25
5	12	6		20.70	20.08	20.70
5	12	11		20.71	20.10	20.68
5	25	0		20.86	20.16	20.70
10	1	0	QPSK	22.23	22.18	22.26
10	1	24		22.15	22.23	22.31
10	1	49		22.31	22.27	22.43
10	25	0		21.22	21.21	21.33
10	25	12		21.19	21.28	21.22
10	25	24		21.21	21.14	21.27
10	50	0		21.20	21.34	21.25



LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	18.95	18.62	18.44
5	1	12		18.58	18.54	18.06
5	1	24		18.46	18.29	18.05
5	12	0		17.85	17.54	17.32
5	12	6		17.68	17.58	17.16
5	12	11		17.56	17.38	17.24
5	25	0		17.67	17.42	17.16
5	1	0		16-QAM	18.14	17.16
5	1	12	17.91		17.09	17.13
5	1	24	17.71		16.86	17.25
5	12	0	17.06		16.62	16.22
5	12	6	16.94		16.34	16.03
5	12	11	16.74		16.24	16.13
5	25	0	17.10		16.60	16.10
10	1	0	QPSK		/	19.00
10	1	24		/	18.55	/
10	1	49		/	18.41	/
10	25	0		/	17.55	/
10	25	12		/	17.49	/
10	25	24		/	17.32	/
10	50	0		/	17.55	/



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.06	22.24	22.29
5	1	12		22.08	22.14	22.35
5	1	24		22.22	22.18	22.32
5	12	0		21.23	21.27	21.31
5	12	6		21.18	21.24	21.40
5	12	11		21.32	21.34	21.38
5	25	0		21.19	21.28	21.41
5	1	0	16-QAM	20.87	21.43	21.62
5	1	12		20.86	21.35	21.60
5	1	24		21.08	21.37	21.59
5	12	0		20.22	20.15	20.28
5	12	6		20.05	20.04	20.79
5	12	11		20.13	20.15	20.78
5	25	0		20.22	20.01	21.08
10	1	0	QPSK	22.19	22.23	22.26
10	1	24		22.24	22.28	22.39
10	1	49		22.30	22.39	22.46
10	25	0		21.23	21.37	21.36
10	25	12		21.36	21.27	21.32
10	25	24		21.37	21.37	21.32
10	50	0		21.33	21.21	21.31



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.38	22.11	22.11
1.4	1	2		22.41	22.14	22.19
1.4	1	5		22.38	22.09	22.09
1.4	3	0		22.32	22.12	22.09
1.4	3	1		22.33	22.11	22.07
1.4	3	2		22.40	22.07	22.02
1.4	6	0		21.37	21.20	21.27
1.4	1	0	16-QAM	22.32	21.93	21.66
1.4	1	2		22.33	21.87	21.66
1.4	1	5		22.38	21.90	21.58
1.4	3	0		21.48	21.68	21.71
1.4	3	1		21.57	21.67	21.68
1.4	3	2		21.55	21.65	21.70
1.4	6	0		20.51	20.20	20.46
3	1	0	QPSK	22.18	22.16	22.21
3	1	7		22.19	22.12	22.16
3	1	14		22.30	22.10	22.17
3	8	0		21.26	21.24	21.24
3	8	4		21.37	21.34	21.25
3	8	7		21.42	21.24	21.15
3	15	0		21.32	21.32	21.18
3	1	0	16-QAM	22.15	21.96	21.67
3	1	7		22.14	21.92	21.65
3	1	14		22.16	21.96	21.64
3	8	0		20.34	20.54	20.31
3	8	4		20.27	20.53	20.32
3	8	7		20.32	20.51	20.25
3	15	0		20.44	20.48	20.36



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.16	22.34	22.24
5	1	12		22.13	22.34	22.16
5	1	24		22.20	22.30	22.16
5	12	0		21.32	21.37	21.29
5	12	6		21.22	21.27	21.34
5	12	11		21.43	21.27	21.20
5	25	0		21.33	21.16	21.33
5	1	0	16-QAM	21.55	21.41	21.31
5	1	12		21.63	21.38	21.25
5	1	24		21.65	21.41	21.29
5	12	0		20.30	20.21	20.35
5	12	6		20.26	20.26	20.29
5	12	11		20.26	20.27	20.28
5	25	0		20.42	20.37	20.22
10	1	0	QPSK	22.31	22.41	22.41
10	1	24		22.43	22.35	22.33
10	1	49		22.45	22.28	22.28
10	25	0		21.40	21.22	21.37
10	25	12		21.34	21.29	21.24
10	25	24		21.38	21.25	21.21
10	50	0		21.49	21.25	21.29
15	1	0	QPSK	22.22	22.42	22.25
15	1	37		22.37	22.30	22.21
15	1	74		22.46	22.29	22.11
15	36	0		21.33	21.40	21.48
15	36	18		21.42	21.33	21.43
15	36	39		21.51	21.23	21.33
15	75	0		21.44	21.30	21.31
20	1	0	QPSK	22.23	22.32	22.34
20	1	49		22.35	22.34	22.37
20	1	99		22.51	22.35	22.47
20	50	0		21.33	21.36	21.35
20	50	24		21.48	21.21	21.29
20	50	49		21.54	21.22	21.37
20	100	0		21.53	21.29	21.30





## 11. EUT and Test Setup Photo

### 11.1 EUT Photos

Front side




Back side






Right Edge

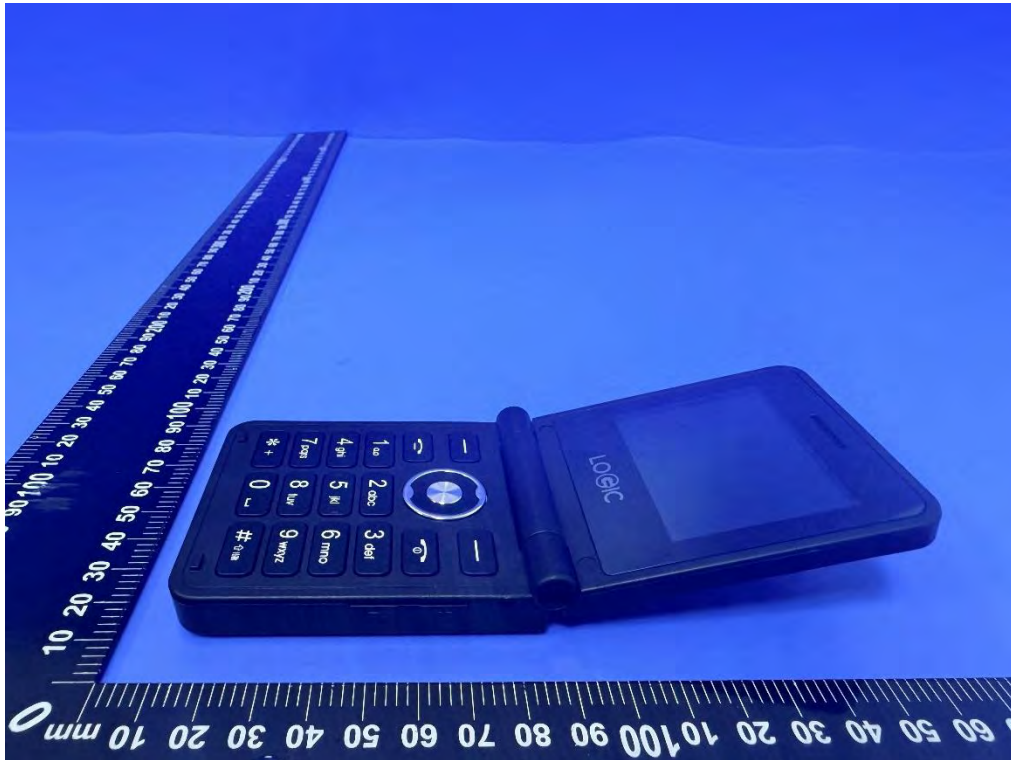


Left Edge

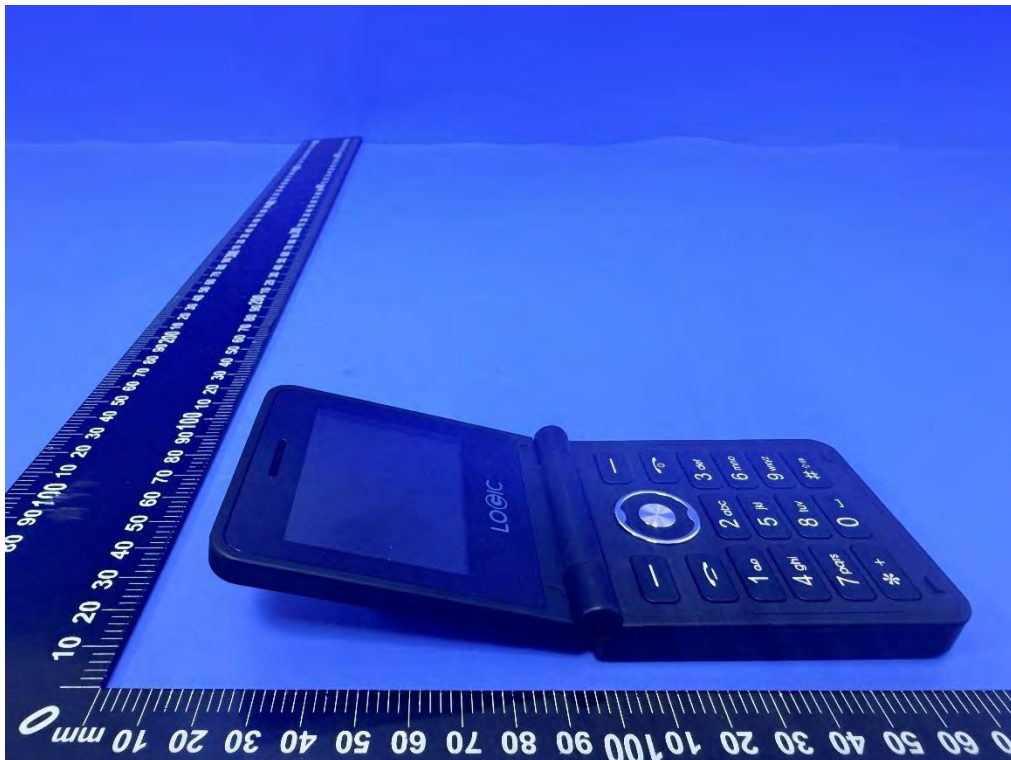



Top Edge

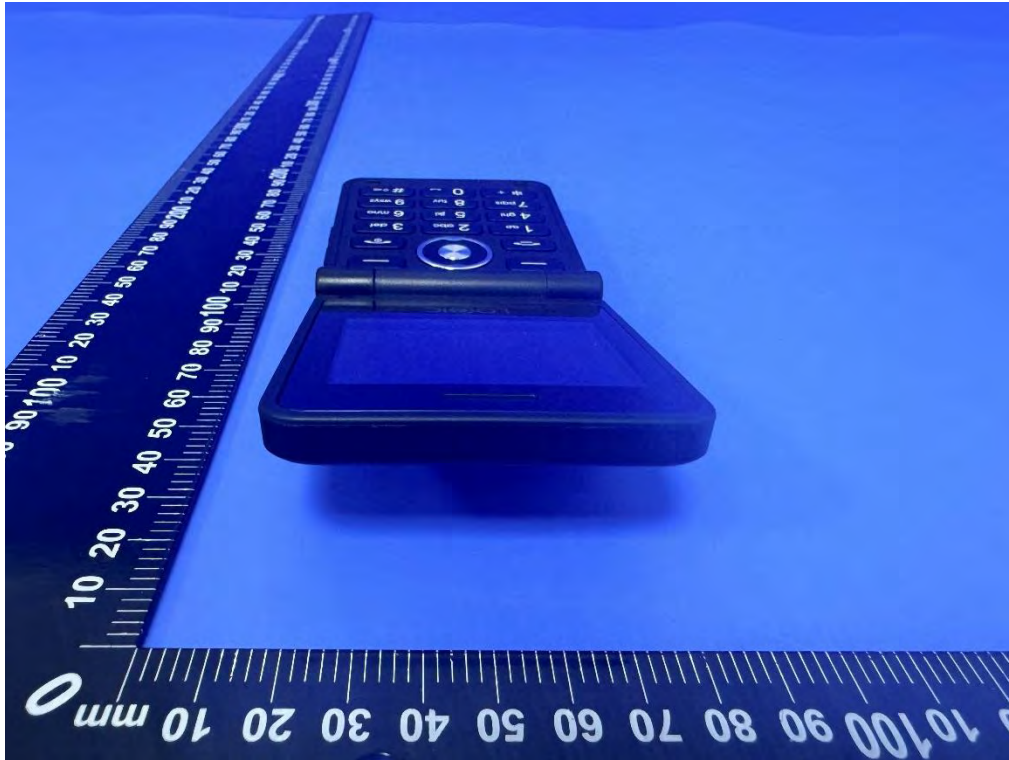


Bottom Edge






## 11.2 Setup Photos

Right Touch

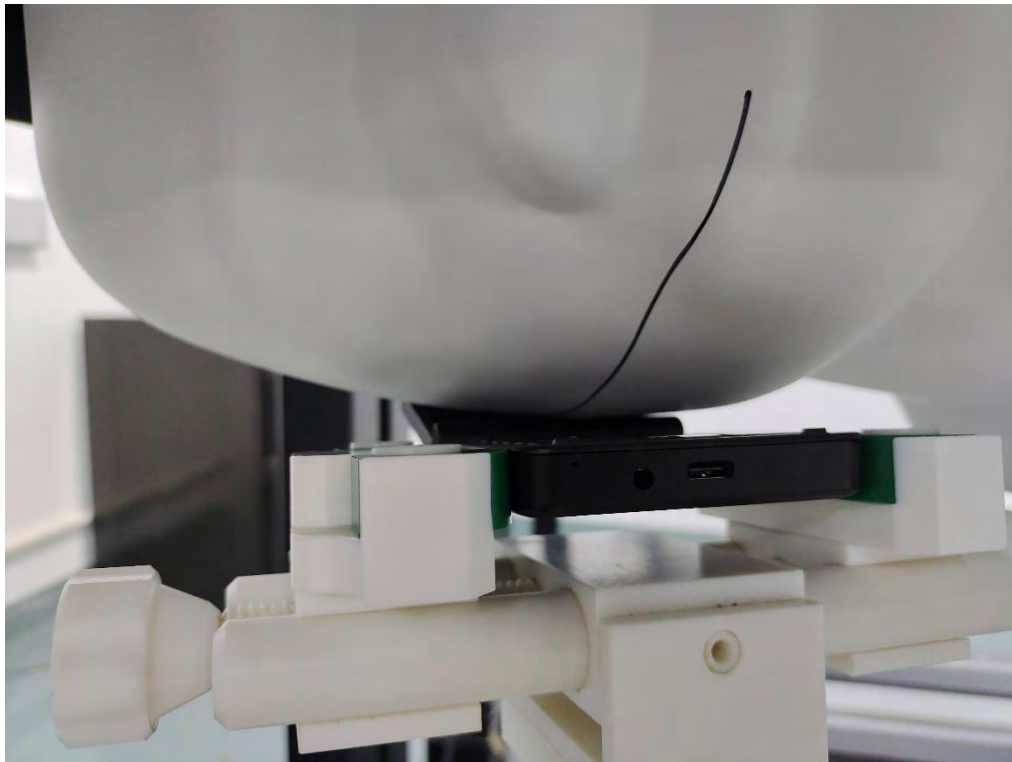


Right Tilt

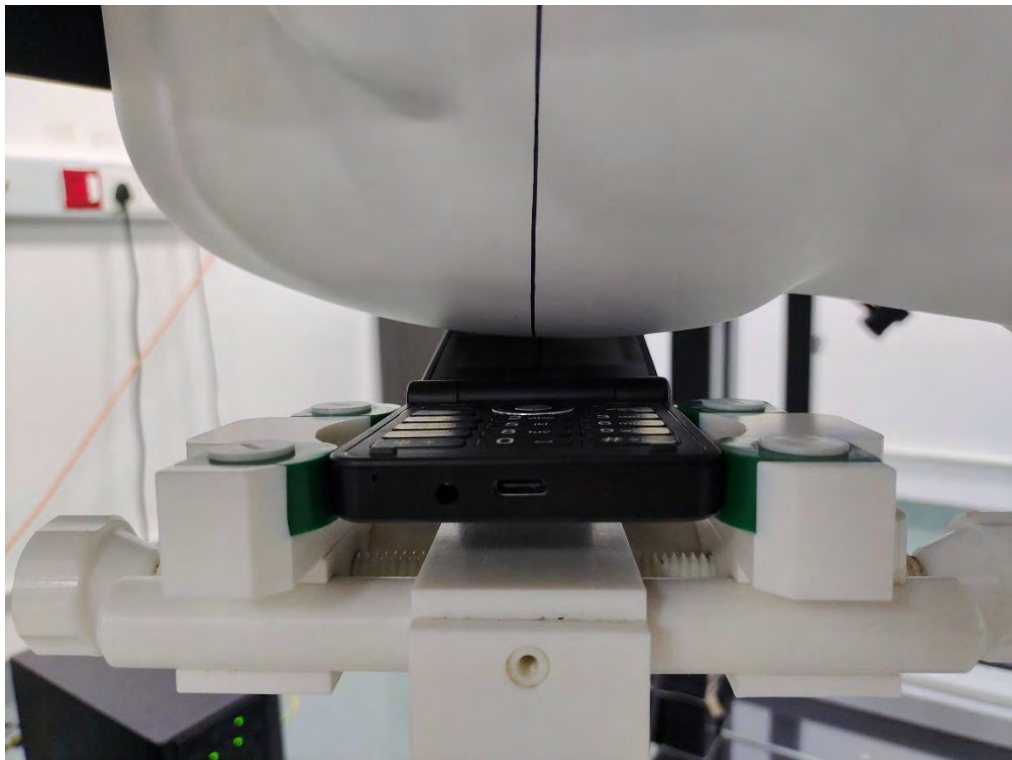




Left Touch

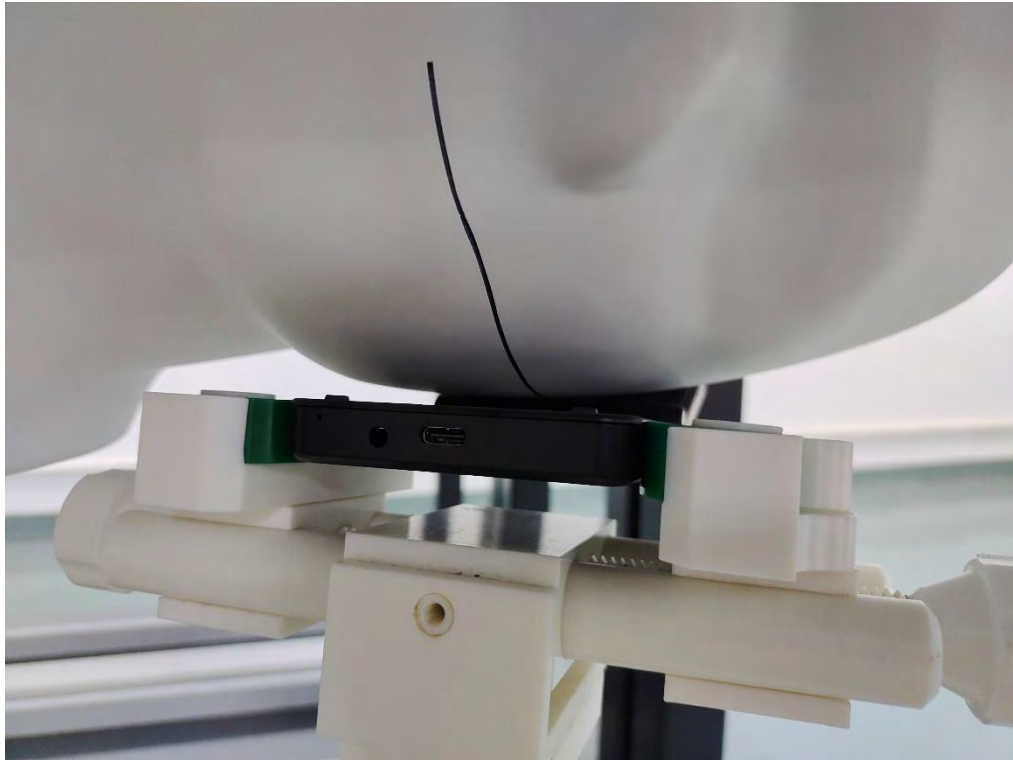


Left Tilt

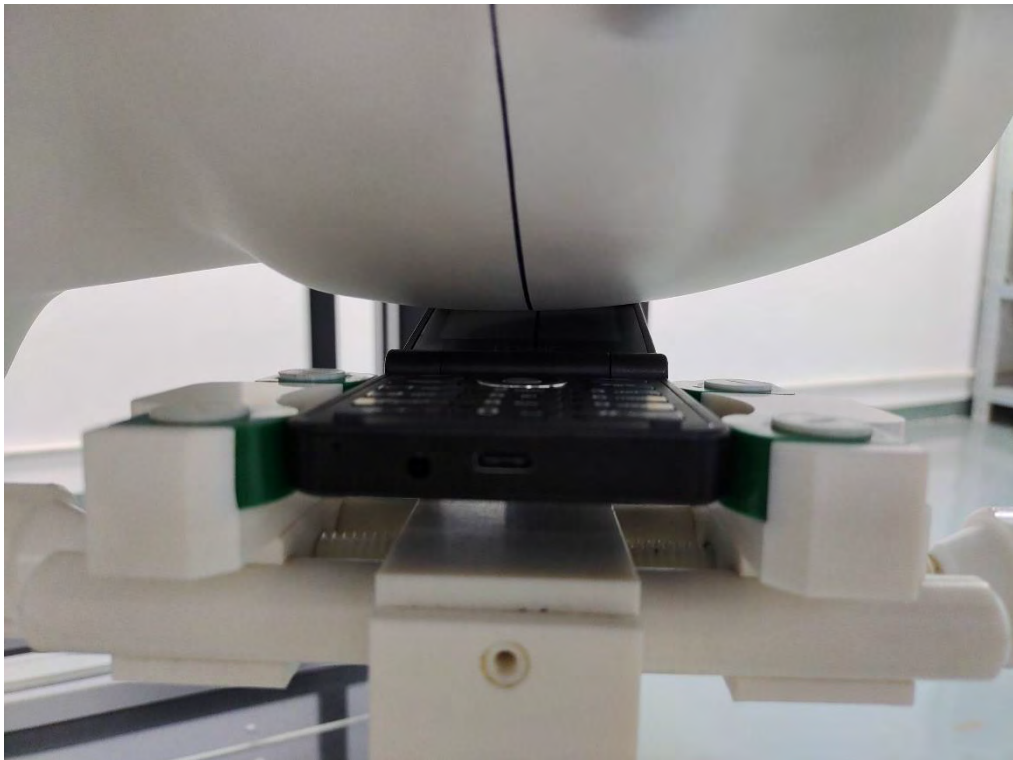




Body Front side (separation distance is 10mm)

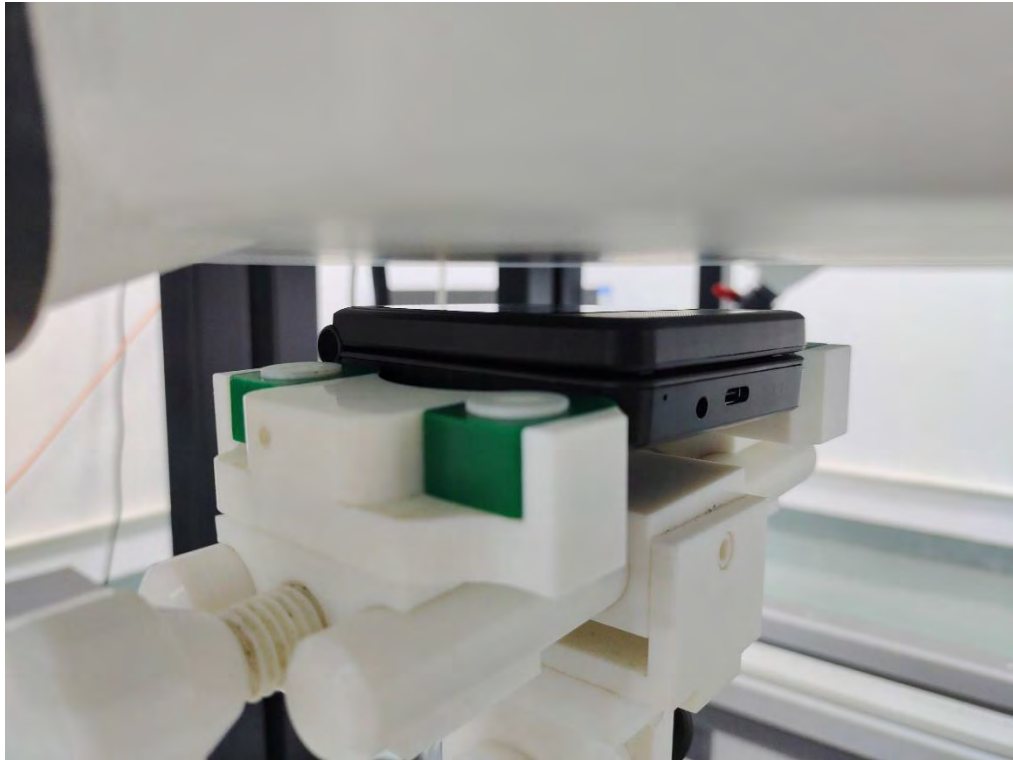


Body Back side (separation distance 10mm)

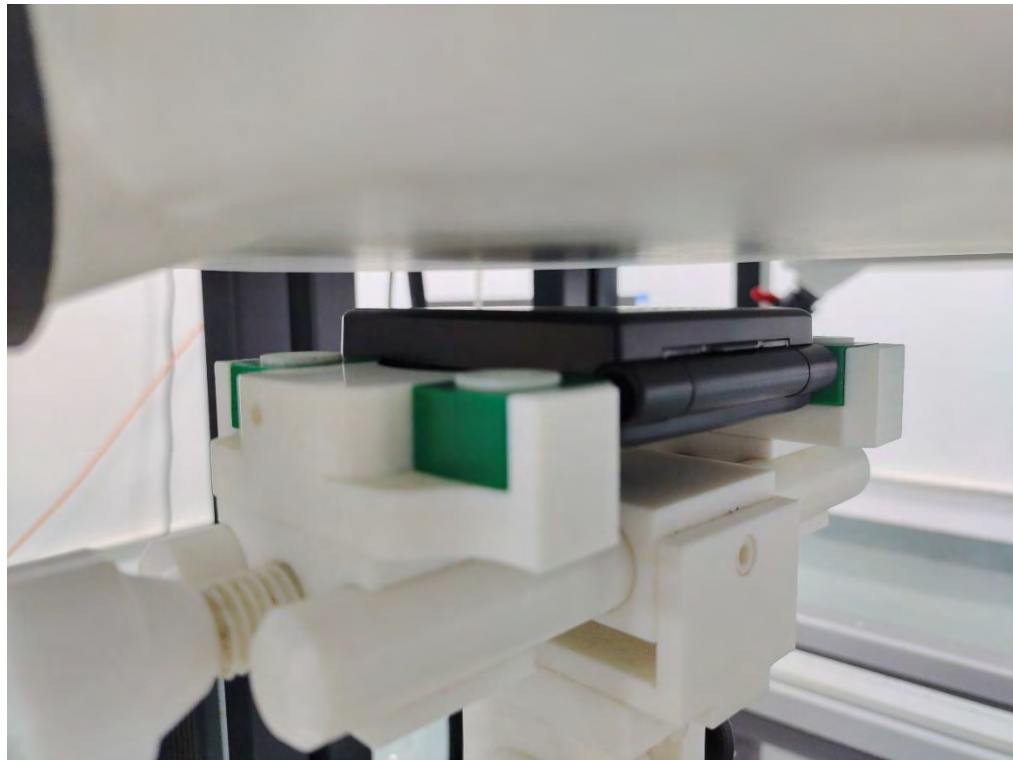




Body Left side (separation distance is 10mm)

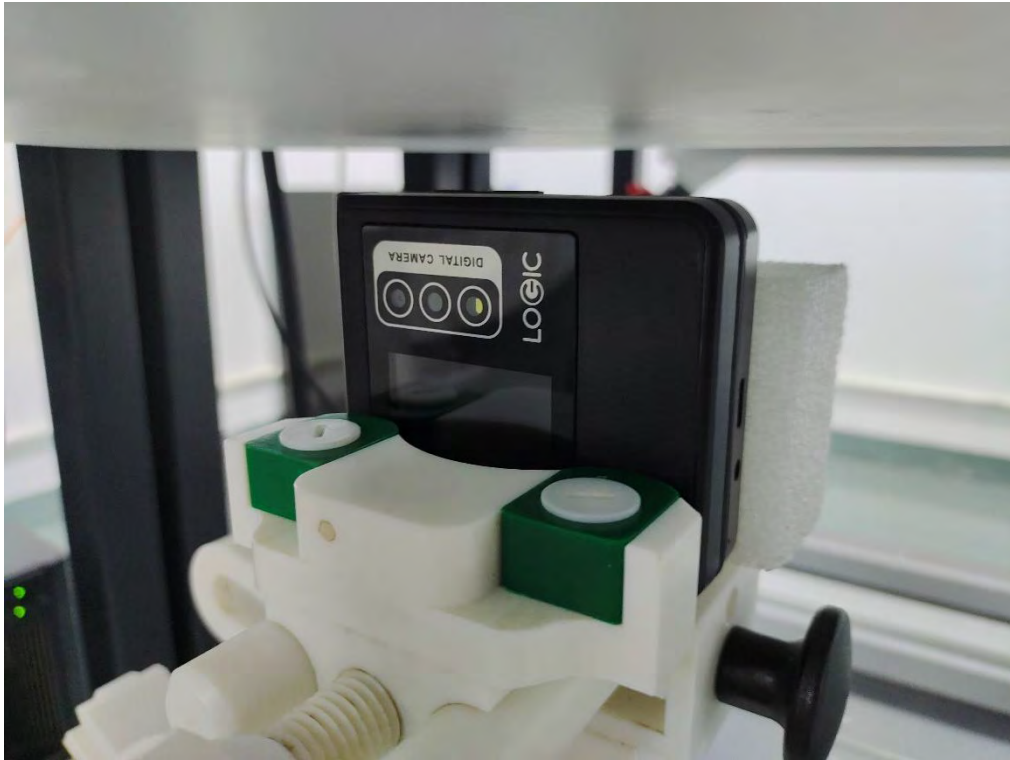


Body Right side (separation distance is 10mm)

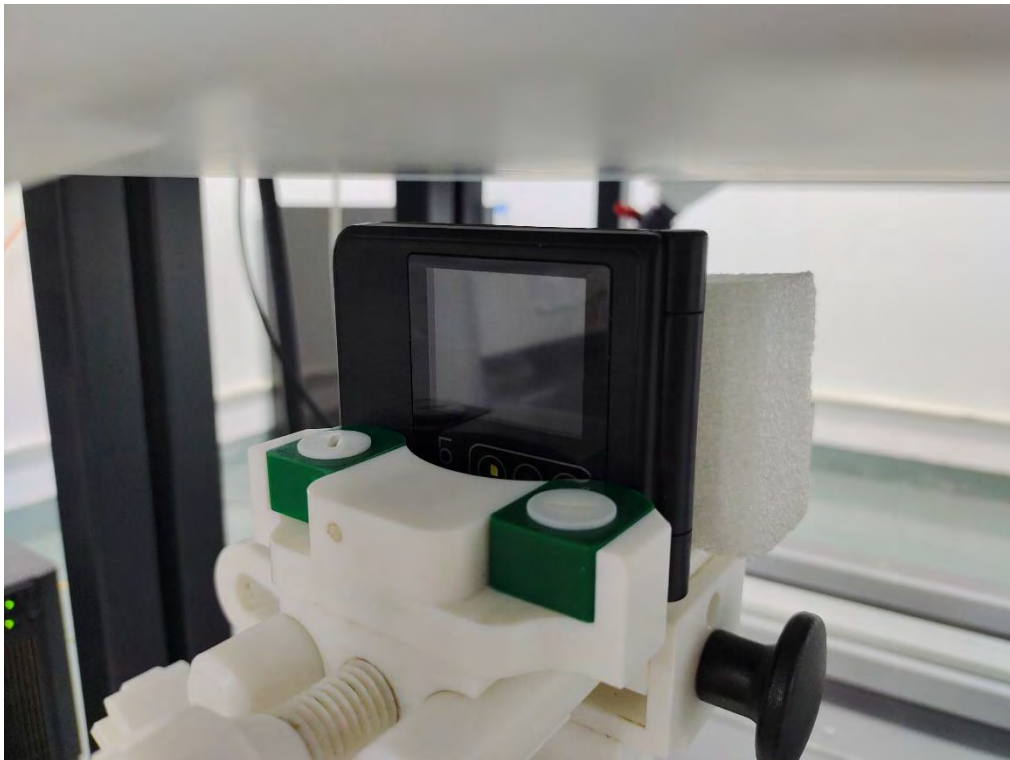




Body Top side (separation distance is 10mm)

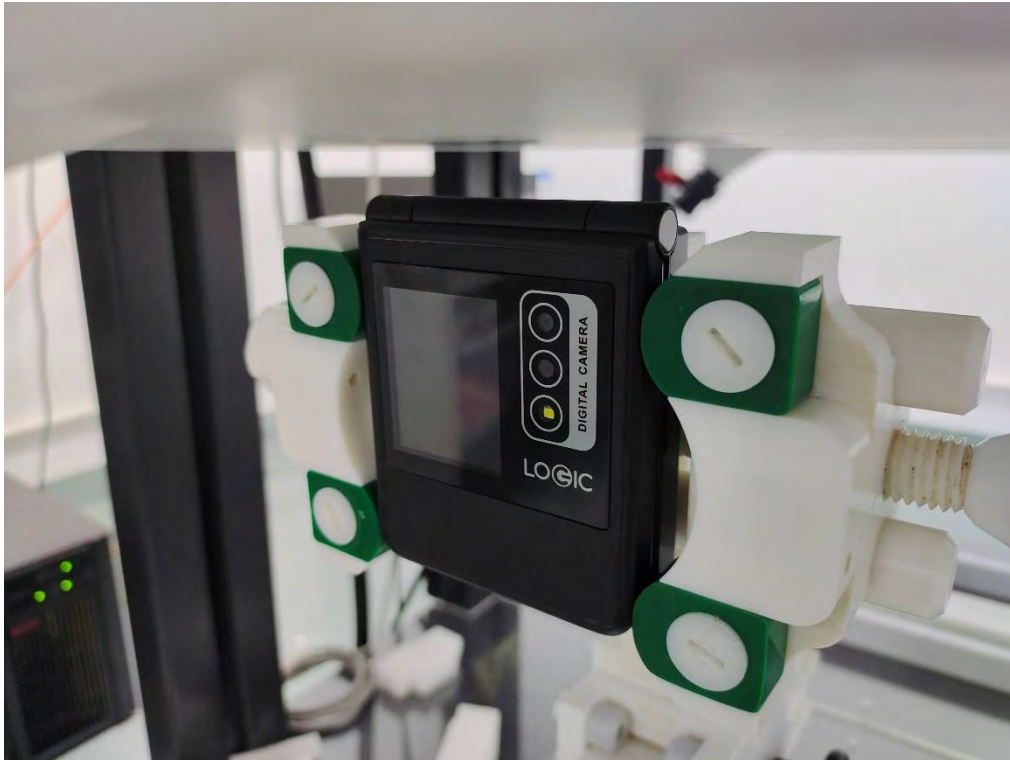


Body Bottom side (separation distance is 10mm)

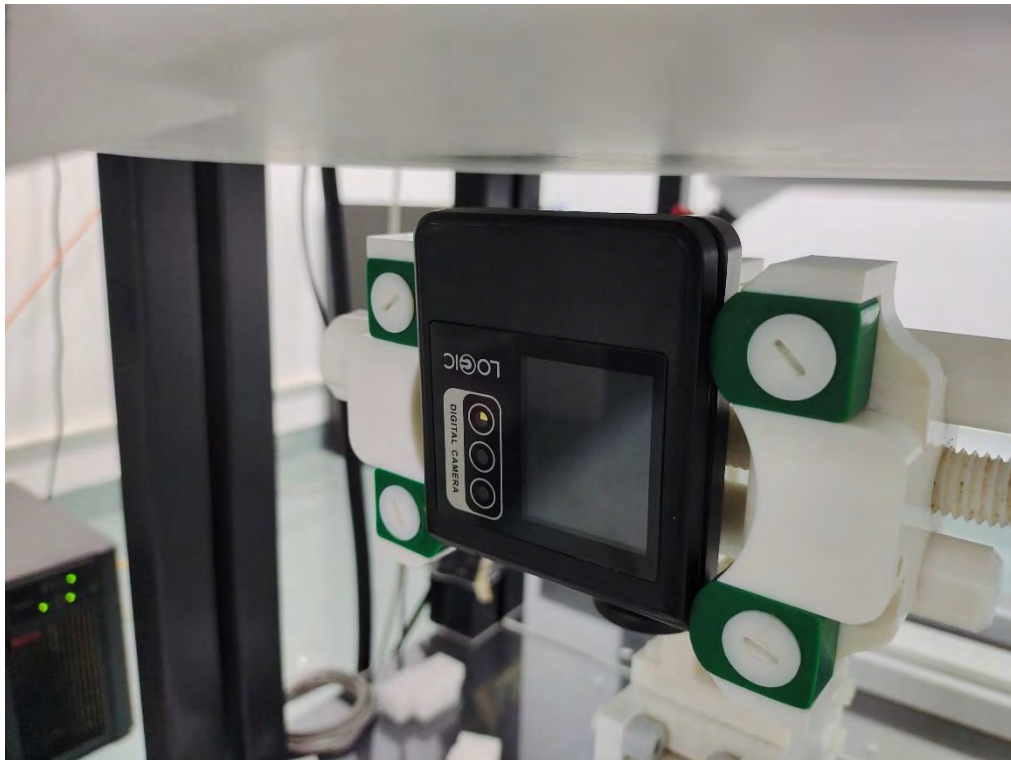






Liquid depth (15 cm)

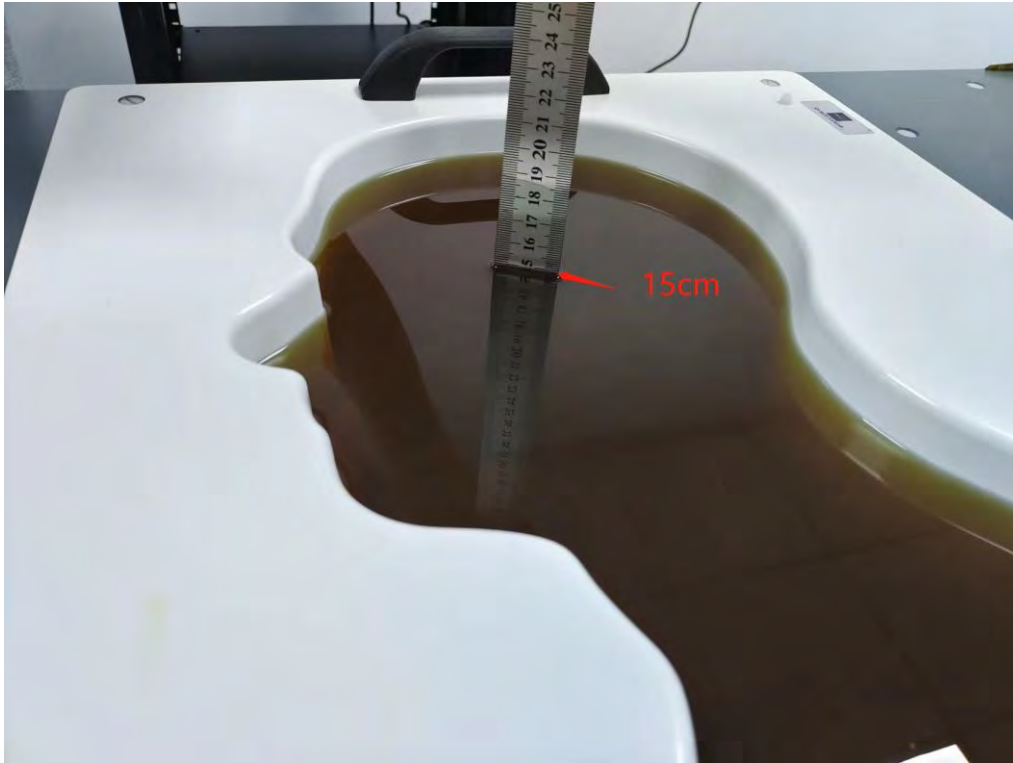

Liquid depth (15 cm)

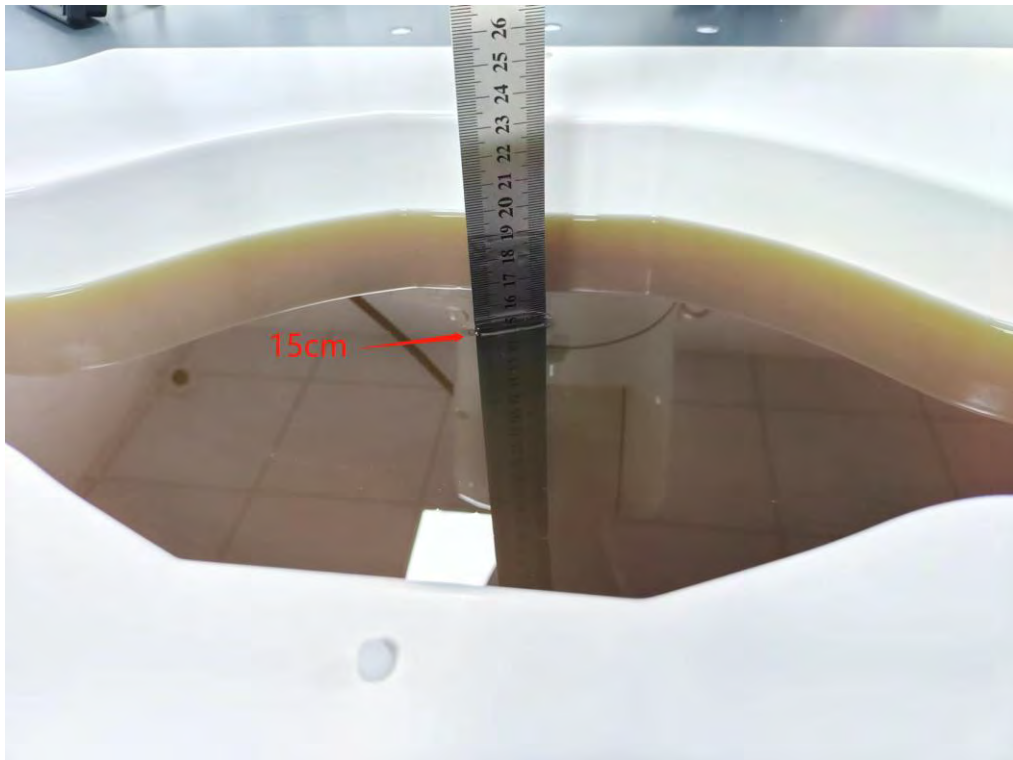



## 12. SAR Result Summary

### 12.1 Head SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
GSM850	GPRS Data-2 Slot	Right Cheek	848.8	0.213	2.92	31.00	30.72	0.227	/
		Right Tilt	848.8	0.119	-3.62	31.00	30.72	0.127	/
		Left Cheek	848.8	0.296	2.06	31.00	30.72	<b>0.316</b>	<b>1</b>
		Left Tilt	848.8	0.146	-2.78	31.00	30.72	0.156	/
PCS 1900	GPRS Data-3 Slot	Right Cheek	1850.2	0.157	-0.66	26.00	25.66	0.170	/
		Right Tilt	1850.2	0.08	-3.45	26.00	25.66	0.087	/
		Left Cheek	1850.2	0.219	1.97	26.00	25.66	<b>0.237</b>	<b>3</b>
		Left Tilt	1850.2	0.104	0.33	26.00	25.66	0.112	/
WCDMA Band II	HSDPA	Right Cheek	1852.4	0.305	1.61	22.00	21.73	0.325	/
		Right Tilt	1852.4	0.156	-3.79	22.00	21.73	0.166	/
		Left Cheek	1852.4	0.433	3.22	22.00	21.73	<b>0.461</b>	<b>5</b>
		Left Tilt	1852.4	0.215	2.85	22.00	21.73	0.229	/
WCDMA Band IV	HSDPA	Right Cheek	1712.6	0.699	3.40	22.50	22.17	0.754	/
		Right Tilt	1712.6	0.35	1.85	22.50	22.17	0.378	/
		Left Cheek	1712.6	0.733	-2.89	22.50	22.17	<b>0.791</b>	<b>7</b>
		Left Tilt	1712.6	0.366	3.17	22.50	22.17	0.395	/
WCDMA Band V	RMC	Right Cheek	846.6	0.210	3.03	22.00	21.91	0.214	/
		Right Tilt	846.6	0.114	3.10	22.00	21.91	0.116	/
		Left Cheek	846.6	0.355	3.27	22.00	21.91	<b>0.362</b>	<b>9</b>
		Left Tilt	846.6	0.171	-3.20	22.00	21.91	0.175	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	99	Right Cheek	1880	0.381	1.98	23	22.58	0.420	/
			50	24	Right Cheek	1860	0.275	-3.63	22	21.50	0.309	/
			1	99	Right Tilt	1880	0.197	-3.54	23	22.58	0.217	/
			50	24	Right Tilt	1860	0.153	-1.59	22	21.50	0.172	/
			1	99	Left Cheek	1880	0.573	-0.60	23	22.58	<b>0.631</b>	<b>11</b>
			50	24	Left Cheek	1860	0.37	-3.19	22	21.50	0.415	/
			1	99	Left Tilt	1880	0.287	0.09	23	22.58	0.316	/
			50	24	Left Tilt	1860	0.191	3.19	22	21.50	0.214	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	1745	0.542	-1.88	22.8	22.74	0.550	/
			50	49	Right Cheek	1720	0.362	2.30	22	21.73	0.385	/
			1	0	Right Tilt	1745	0.278	0.16	22.8	22.74	0.282	/
			50	49	Right Tilt	1720	0.186	2.73	22	21.73	0.198	/
			1	0	Left Cheek	1720	0.718	2.16	22.8	22.59	0.754	/
			1	0	Left Cheek	1732.5	0.789	-1.18	22.8	22.71	0.806	/
			1	0	Left Cheek	1745	0.874	3.15	22.8	22.74	<b>0.886</b>	<b>13</b>
			50	49	Left Cheek	1720	0.499	2.11	22	21.73	0.531	/
			100	0	Left Cheek	1745	0.549	-2.07	22	21.56	0.608	/
			1	0	Left Tilt	1745	0.447	3.58	22.8	22.74	0.453	/
50	49	Left Tilt	1720	0.284	-1.99	22	21.73	0.302	/			
LTE Band 5	10M	QPSK	1	49	Right Cheek	844	0.2	3.50	22.5	22.43	0.203	/
			25	24	Right Cheek	844	0.149	-0.49	21.5	21.41	0.152	/
			1	49	Right Tilt	844	0.116	1.64	22.5	22.43	0.118	/
			25	24	Right Tilt	844	0.091	0.58	21.5	21.41	0.093	/
			1	49	Left Cheek	844	0.306	-2.85	22.5	22.43	<b>0.311</b>	<b>15</b>
			25	24	Left Cheek	844	0.208	-3.77	21.5	21.41	0.212	/
			1	49	Left Tilt	844	0.167	-3.52	22.5	22.43	0.170	/
25	24	Left Tilt	844	0.109	1.48	21.5	21.41	0.111	/			
LTE Band 12	10M	QPSK	1	49	Right Cheek	711	0.22	1.09	22.5	22.43	0.224	/
			25	0	Right Cheek	711	0.148	1.78	21.5	21.33	0.154	/
			1	49	Right Tilt	711	0.112	-0.56	22.5	22.43	0.114	/
			25	0	Right Tilt	711	0.094	-1.30	21.5	21.33	0.098	/
			1	49	Left Cheek	711	0.309	-2.71	22.5	22.43	<b>0.314</b>	<b>17</b>
			25	0	Left Cheek	711	0.213	-2.08	21.5	21.33	0.222	/
			1	49	Left Tilt	711	0.174	1.84	22.5	22.43	0.177	/
			25	0	Left Tilt	711	0.111	0.76	21.5	21.33	0.115	/
LTE Band 13	10M	QPSK	1	0	Right Cheek	782	0.775	2.77	19.5	19.00	0.870	/
			25	0	Right Cheek	782	0.531	-2.24	18	17.55	0.589	/
			1	0	Right Tilt	782	0.4	-2.09	19.5	19.00	0.449	/
			25	0	Right Tilt	782	0.269	0.12	18	17.55	0.298	/
			1	0	Left Cheek	782	1.117	2.64	19.5	19.00	<b>1.253</b>	<b>19</b>
			25	0	Left Cheek	782	0.727	-3.19	18	17.55	0.806	/
			50	0	Left Cheek	782	0.706	-3.27	18	17.55	0.783	/
			1	0	Left Tilt	782	0.577	2.96	19.5	19.00	0.647	/



			25	0	Left Tilt	782	0.376	2.14	18	17.55	0.417	/
LTE Band 17	10M	QPSK	1	49	Right Cheek	711	0.254	-2.34	22.5	22.46	0.256	/
			25	24	Right Cheek	710	0.163	1.99	21.5	21.37	0.168	/
			1	49	Right Tilt	711	0.13	1.09	22.5	22.46	0.131	/
			25	24	Right Tilt	710	0.101	-3.75	21.5	21.37	0.104	/
			1	49	Left Cheek	711	0.373	0.03	22.5	22.46	<b>0.376</b>	<b>21</b>
			25	24	Left Cheek	710	0.251	3.36	21.5	21.37	0.259	/
			1	49	Left Tilt	711	0.206	1.16	22.5	22.46	0.208	/
			25	24	Left Tilt	710	0.128	3.98	21.5	21.37	0.132	/
LTE Band 66	20M	QPSK	1	99	Right Cheek	1720	0.788	-0.10	22.7	22.51	0.823	/
			1	99	Right Cheek	1745	0.618	-3.89	22.7	22.35	0.670	/
			1	99	Right Cheek	1770	0.627	2.89	22.7	22.47	0.661	/
			50	49	Right Cheek	1720	0.543	2.98	22	21.54	0.604	/
			100	0	Right Cheek	1720	0.527	0.61	22	21.53	0.587	/
			1	99	Right Tilt	1720	0.411	-0.80	22.7	22.51	0.429	/
			50	49	Right Tilt	1720	0.267	-1.07	22	21.54	0.297	/
			1	99	Left Cheek	1720	1.137	-2.52	22.7	22.51	<b>1.188</b>	<b>23</b>
			1	99	Left Cheek	1745	0.885	-0.87	22.7	22.35	0.959	/
			1	99	Left Cheek	1770	0.888	-3.96	22.7	22.47	0.936	/
			50	49	Left Cheek	1720	0.686	-0.45	22	21.54	0.763	/
			100	0	Left Cheek	1720	0.644	0.95	22	21.53	0.718	/
			1	99	Left Tilt	1720	0.586	2.91	22.7	22.51	0.612	/
			50	49	Left Tilt	1720	0.343	-1.67	22	21.54	0.381	/

Note:

1. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Scaled SAR(W/kg) = Measured SAR(W/kg) \*Tune-up Scaling Factor
2. Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



## 12.2 Body SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
GSM850	GPRS Data-2 Slot	Front Side	848.8	0.209	0.38	31.00	30.72	0.223	/
		Back Side	848.8	0.396	-0.13	31.00	30.72	<b>0.422</b>	<b>2</b>
		Left Side	848.8	0.132	1.60	31.00	30.72	0.141	/
		Right Side	848.8	0.162	3.10	31.00	30.72	0.173	/
		Top Side	848.8	0.12	2.46	31.00	30.72	0.128	/
		Bottom Side	848.8	0.09	-1.02	31.00	30.72	0.096	/
PCS 1900	GPRS Data-3 Slot	Front Side	1850.2	0.087	-2.78	26.00	25.66	0.094	/
		Back Side	1850.2	0.263	-2.99	26.00	25.66	<b>0.284</b>	<b>4</b>
		Left Side	1850.2	0.105	1.98	26.00	25.66	0.114	/
		Right Side	1850.2	0.085	2.16	26.00	25.66	0.092	/
		Top Side	1850.2	0.114	3.74	26.00	25.66	0.123	/
		Bottom Side	1850.2	0.054	-2.01	26.00	25.66	0.058	/
WCDMA Band II	HSDPA	Front Side	1852.4	0.161	3.87	22.00	21.73	0.171	/
		Back Side	1852.4	0.497	-3.36	22.00	21.73	<b>0.529</b>	<b>6</b>
		Left Side	1852.4	0.2	2.39	22.00	21.73	0.213	/
		Right Side	1852.4	0.157	-2.26	22.00	21.73	0.167	/
		Top Side	1852.4	0.206	-2.08	22.00	21.73	0.219	/
		Bottom Side	1852.4	0.079	-0.32	22.00	21.73	0.084	/
WCDMA Band IV	HSDPA	Front Side	1712.6	0.218	2.39	22.50	22.17	0.235	/
		Back Side	1712.6	1.093	0.85	22.50	22.17	<b>1.179</b>	<b>8</b>
		Back Side	1740	0.775	-2.65	22.50	21.56	0.962	/
		Back Side	1752.4	0.89	2.75	22.50	21.79	1.048	/
		Left Side	1712.6	0.415	3.28	22.50	22.17	0.448	/
		Right Side	1712.6	0.261	-2.74	22.50	22.17	0.282	/
		Top Side	1712.6	0.280	3.09	22.50	22.17	0.302	/
		Bottom Side	1712.6	0.179	-3.59	22.50	22.17	0.193	/
WCDMA Band V	RMC	Front Side	846.6	0.106	0.28	22.00	21.91	0.108	/
		Back Side	846.6	0.244	-2.79	22.00	21.91	<b>0.249</b>	<b>10</b>
		Left Side	846.6	0.092	0.14	22.00	21.91	0.094	/
		Right Side	846.6	0.154	-1.22	22.00	21.91	0.157	/
		Top Side	846.6	0.109	-1.23	22.00	21.91	0.111	/
		Bottom Side	846.6	0.043	-2.60	22.00	21.91	0.044	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	99	Front side	1880	0.193	-1.82	23	22.58	0.213	/
			50	24	Front side	1860	0.126	-1.11	22	21.50	0.141	/
			1	99	Back Side	1880	0.592	0.40	23	22.58	<b>0.652</b>	<b>12</b>
			50	24	Back Side	1860	0.342	-3.56	22	21.50	0.384	/
			1	99	Left Side	1880	0.237	-0.40	23	22.58	0.261	/
			50	24	Left Side	1860	0.148	-3.38	22	21.50	0.166	/
			1	99	Right Side	1880	0.193	2.01	23	22.58	0.213	/
			50	24	Right Side	1860	0.125	-3.25	22	21.50	0.140	/
			1	99	Top Side	1880	0.245	2.23	23	22.58	0.270	/
			50	24	Top Side	1860	0.148	1.06	22	21.50	0.166	/
			1	99	Bottom Side	1880	0.103	-3.32	23	22.58	0.113	/
			50	24	Bottom Side	1860	0.05	-0.92	22	21.50	0.056	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.329	-2.43	22.8	22.74	0.334	/
			50	49	Front side	1720	0.188	0.96	22	21.73	0.200	/
			1	0	Back Side	1720	1.074	-3.97	22.8	22.59	1.127	/
			1	0	Back Side	1732.5	1.188	0.62	22.8	22.71	1.213	/
			1	0	Back Side	1745	1.320	-3.78	22.8	22.74	<b>1.338</b>	<b>14</b>
			50	49	Back Side	1720	0.871	1.58	22	21.73	0.927	/
			50	49	Back Side	1732.5	0.783	-1.57	22	21.58	0.863	/
			50	49	Back Side	1745	0.795	2.58	22	21.62	0.868	/
			100	0	Back Side	1745	0.72	3.28	22	21.56	0.797	/
			1	0	Left Side	1745	0.546	1.07	22.8	22.74	0.554	/
			50	49	Left Side	1720	0.338	2.00	22	21.73	0.360	/
			1	0	Right Side	1745	0.406	2.09	22.8	22.74	0.412	/
			50	49	Right Side	1720	0.229	0.11	22	21.73	0.244	/
			1	0	Top Side	1745	0.536	-3.00	22.8	22.74	0.543	/
			50	49	Top Side	1720	0.329	2.90	22	21.73	0.350	/
			1	0	Bottom Side	1745	0.209	0.42	22.8	22.74	0.212	/
50	49	Bottom Side	1720	0.13	2.76	22	21.73	0.138	/			
LTE Band 5	10M	QPSK	1	49	Front side	844	0.212	3.47	22.5	22.43	0.215	/
			25	24	Front side	844	0.122	2.69	21.5	21.41	0.125	/
			1	49	Back Side	844	0.377	-0.56	22.5	22.43	<b>0.383</b>	<b>16</b>
			25	24	Back Side	844	0.121	2.66	21.5	21.41	0.124	/
			1	49	Left Side	844	0.163	-1.30	22.5	22.43	0.166	/
			25	24	Left Side	844	0.084	-1.26	21.5	21.41	0.086	/
			1	49	Right Side	844	0.151	-3.13	22.5	22.43	0.153	/
			25	24	Right Side	844	0.095	1.06	21.5	21.41	0.097	/
			1	49	Top Side	844	0.151	-2.65	22.5	22.43	0.153	/
			25	24	Top Side	844	0.071	3.75	21.5	21.41	0.072	/
			1	49	Bottom Side	844	0.094	-1.38	22.5	22.43	0.096	/
			25	24	Bottom Side	844	0.061	0.33	21.5	21.41	0.062	/



LTE Band 12	10M	QPSK	1	49	Front side	711	0.109	-2.02	22.5	22.43	0.111	/
			25	0	Front side	711	0.063	0.41	21.5	21.33	0.066	/
			1	49	Back Side	711	0.173	3.04	22.5	22.43	<b>0.176</b>	<b>18</b>
			25	0	Back Side	711	0.049	-3.50	21.5	21.33	0.051	/
			1	49	Left Side	711	0.076	-1.69	22.5	22.43	0.077	/
			25	0	Left Side	711	0.056	-1.41	21.5	21.33	0.058	/
			1	49	Right Side	711	0.086	-2.55	22.5	22.43	0.087	/
			25	0	Right Side	711	0.026	-0.57	21.5	21.33	0.027	/
			1	49	Top Side	711	0.082	0.00	22.5	22.43	0.083	/
			25	0	Top Side	711	0.029	-1.94	21.5	21.33	0.030	/
			1	49	Bottom Side	711	0.048	-2.11	22.5	22.43	0.049	/
			25	0	Bottom Side	711	0.029	3.89	21.5	21.33	0.030	/
LTE Band 13	10M	QPSK	1	0	Front side	782	0.514	-3.52	19.5	19.00	0.577	/
			25	0	Front side	782	0.283	3.19	18	17.55	0.314	/
			1	0	Back Side	782	0.958	0.72	19.5	19.00	<b>1.075</b>	<b>20</b>
			25	0	Back Side	782	0.672	-1.10	18	17.55	0.745	/
			50	0	Back Side	782	0.627	-0.69	18	17.55	0.695	/
			1	0	Left Side	782	0.395	-3.29	19.5	19.00	0.443	/
			25	0	Left Side	782	0.242	3.96	18	17.55	0.268	/
			1	0	Right Side	782	0.402	-2.27	19.5	19.00	0.451	/
			25	0	Right Side	782	0.238	-3.52	18	17.55	0.264	/
			1	0	Top Side	782	0.397	-3.34	19.5	19.00	0.445	/
			25	0	Top Side	782	0.226	0.44	18	17.55	0.251	/
			1	0	Bottom Side	782	0.209	3.54	19.5	19.00	0.235	/
25	0	Bottom Side	782	0.12	-3.81	18	17.55	0.133	/			
LTE Band 17	10M	QPSK	1	49	Front side	711	0.095	1.94	22.5	22.46	0.096	/
			25	24	Front side	710	0.063	-2.16	21.5	21.37	0.065	/
			1	49	Back Side	711	0.147	0.04	22.5	22.46	<b>0.148</b>	<b>22</b>
			25	24	Back Side	710	0.045	-3.96	21.5	21.37	0.046	/
			1	49	Left Side	711	0.075	1.86	22.5	22.46	0.076	/
			25	24	Left Side	710	0.044	3.47	21.5	21.37	0.045	/
			1	49	Right Side	711	0.073	0.57	22.5	22.46	0.074	/
			25	24	Right Side	710	0.034	-2.06	21.5	21.37	0.035	/
			1	49	Top Side	711	0.063	1.98	22.5	22.46	0.064	/
			25	24	Top Side	710	0.034	0.28	21.5	21.37	0.035	/
			1	49	Bottom Side	711	0.045	3.49	22.5	22.46	0.045	/
			25	24	Bottom Side	710	0.006	2.02	21.5	21.37	0.006	/
LTE Band 66	20M	QPSK	1	99	Front side	1720	0.405	-1.05	22.7	22.51	0.423	/
			50	49	Front side	1720	0.221	-0.76	22	21.54	0.246	/
			1	99	Back Side	1720	1.297	2.04	22.7	22.51	<b>1.355</b>	<b>24</b>
			1	99	Back Side	1745	1.016	-2.97	22.7	22.35	1.101	/
			1	99	Back Side	1770	1.055	3.02	22.7	22.47	1.112	/
			50	49	Back Side	1720	0.927	-0.47	22	21.54	1.031	/
			50	49	Back Side	1745	0.737	0.40	22	21.22	0.882	/
			50	49	Back Side	1770	0.753	2.01	22	21.37	0.871	/



			100	0	Back Side	1720	0.92	-3.92	22	21.53	1.025	/
			100	0	Back Side	1745	0.823	1.82	22	21.29	0.969	/
			100	0	Back Side	1770	0.869	2.07	22	21.30	1.021	/
			1	99	Left Side	1720	0.52	1.43	22.7	22.51	0.543	/
			50	49	Left Side	1720	0.31	-2.28	22	21.54	0.345	/
			1	99	Right Side	1720	0.394	-0.42	22.7	22.51	0.412	/
			50	49	Right Side	1720	0.238	-1.63	22	21.54	0.265	/
			1	99	Top Side	1720	0.538	-0.93	22.7	22.51	0.562	/
			50	49	Top Side	1720	0.336	-2.01	22	21.54	0.374	/
			1	99	Bottom Side	1720	0.207	-0.19	22.7	22.51	0.216	/
			50	49	Bottom Side	1720	0.114	2.47	22	21.54	0.127	/

Note:

1. The test separation of all above table is 10mm.
2. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Scaled SAR(W/kg) = Measured SAR(W/kg) \*Tune-up Scaling Factor





### Repeated SAR

Band	Mode	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
WCDMA Band IV	HSDPA	Back Side	1712.6	1.053	2.93	22.50	22.17	1.136	-
		Back Side	1740	0.744	-2.73	22.50	21.56	0.923	-
		Back Side	1752.4	0.849	-1.18	22.50	21.79	0.999	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
LTE Band 4	20M	QPSK	1	0	Left Cheek	1732.5	0.773	-2.94	22.8	22.71	0.789	-
			1	0	Left Cheek	1745	0.869	2.91	22.8	22.74	0.881	-
			1	0	Back Side	1720	1.033	-0.30	22.8	22.59	1.084	-
			1	0	Back Side	1732.5	1.144	-1.53	22.8	22.71	1.167	-
			1	0	Back Side	1745	1.274	1.23	22.8	22.74	1.292	-
			50	49	Back Side	1720	0.836	-1.65	22	21.73	0.889	-
			50	49	Back Side	1732.5	0.781	-0.38	22	21.58	0.861	-
			50	49	Back Side	1745	0.772	-3.89	22	21.62	0.843	-
LTE Band 13	10M	QPSK	1	0	Left Cheek	782	1.091	-3.65	19.5	19.00	1.224	-
			1	0	Back Side	782	0.956	-1.23	19.5	19.00	1.073	-
LTE Band 66	20M	QPSK	1	99	Right Cheek	1720	0.756	3.39	22.7	22.51	0.790	-
			1	99	Left Cheek	1720	1.130	2.78	22.7	22.51	1.180	-
			1	99	Left Cheek	1745	0.861	1.83	22.7	22.35	0.934	-
			1	99	Left Cheek	1770	0.847	2.54	22.7	22.47	0.893	-
			1	99	Back Side	1720	1.276	-0.92	22.7	22.51	1.333	-
			1	99	Back Side	1745	1.010	-2.49	22.7	22.35	1.094	-
			1	99	Back Side	1770	1.004	0.18	22.7	22.47	1.059	-
			50	49	Back Side	1720	0.882	-3.26	22	21.54	0.981	-
			50	49	Back Side	1745	0.703	0.12	22	21.22	0.841	-
			50	49	Back Side	1770	0.751	2.33	22	21.37	0.868	-
			100	0	Back Side	1720	0.912	-3.68	22	21.53	1.016	-
			100	0	Back Side	1745	0.815	3.47	22	21.29	0.960	-
			100	0	Back Side	1770	0.841	-3.16	22	21.30	0.988	-



## Repeated SAR measurement

Band	Mode	Test Position	Freq.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(W/kg)	2nd Repeated SAR 1g	Ratio
WCDMA Band IV	HSDPA	Back Side	1712.6	1.093	1.053	1.038	-	-	-
		Back Side	1740	0.775	0.744	1.042	-	-	-
		Back Side	1752.4	0.89	0.849	1.049	-	-	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured	2nd Repeated SAR 1g	Ratio
LTE Band 4	20M	QPSK	1	0	Left Cheek	1732.5	0.789	0.773	1.021	-	-	-
			1	0	Left Cheek	1745	0.874	0.869	1.006	-	-	-
			1	0	Back Side	1720	1.074	1.033	1.040	-	-	-
			1	0	Back Side	1732.5	1.188	1.144	1.039	-	-	-
			1	0	Back Side	1745	1.320	1.274	1.036	-	-	-
			50	49	Back Side	1720	0.871	0.836	1.042	-	-	-
			50	49	Back Side	1732.5	0.783	0.781	1.002	-	-	-
LTE Band 13	10M	QPSK	1	0	Left Cheek	782	1.117	1.091	1.024	-	-	-
			1	0	Back Side	782	0.958	0.956	1.002	-	-	-
LTE Band 66	20M	QPSK	1	99	Right Cheek	1720	0.788	0.756	1.042	-	-	-
			1	99	Left Cheek	1720	1.137	1.130	1.006	-	-	-
			1	99	Left Cheek	1745	0.885	0.861	1.027	-	-	-
			1	99	Left Cheek	1770	0.888	0.847	1.049	-	-	-
			1	99	Back Side	1720	1.297	1.276	1.016	-	-	-
			1	99	Back Side	1745	1.016	1.010	1.006	-	-	-
			1	99	Back Side	1770	1.055	1.004	1.051	-	-	-
			50	49	Back Side	1720	0.927	0.882	1.051	-	-	-
			50	49	Back Side	1745	0.737	0.703	1.049	-	-	-
			50	49	Back Side	1770	0.753	0.751	1.003	-	-	-
			100	0	Back Side	1720	0.92	0.912	1.009	-	-	-
			100	0	Back Side	1745	0.823	0.815	1.010	-	-	-
100	0	Back Side	1770	0.869	0.841	1.034	-	-	-			

Note:

- Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/Kg$ .
- Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/Kg$ , only one repeated measurement is required.
- Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45W/Kg$ .
- The ratio is the difference in percentage between original and repeated measured SAR.



## Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. GSM + Bluetooth
	2. WCDMA + Bluetooth
	3. LTE + Bluetooth
Body	1. GSM + Bluetooth
	2. WCDMA + Bluetooth
	3. LTE + Bluetooth

### NOTE:

- Bluetooth and WLAN can't simultaneous transmission at the same time.
- For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
  - (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) $\cdot$ [ $\sqrt{f}$  (GHz) /x] W/kg for test separation distances  $\leq$  50 mm;  
Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
  - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR		Maximum Turn-up Power		Antenna to user(mm)	Frequency (GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	7	5.012	5	2.48	0.210
	Body			5	2.48	0.210

Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + Bluetooth	Head	GSM	0.316	0.526
		Bluetooth	0.210	
	Body	GSM	0.422	0.632
		Bluetooth	0.210	
WCDMA + Bluetooth	Head	WCDMA	0.791	1.001
		Bluetooth	0.210	
	Body	WCDMA	1.179	1.389
		Bluetooth	0.210	
LTE + Bluetooth	Head	LTE	1.253	1.463
		Bluetooth	0.210	
	Body	LTE	1.355	1.565
		Bluetooth	0.210	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



### 13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	DIP0G750	SN 06/22 DIP0G750-638	2022.02.11	2025.02.10
835MHz Dipole	MVG	DIP0G835	SN 06/22 DIP0G835-639	2022.02.11	2025.02.10
1800MHz Dipole	MVG	DIP1G800	SN 06/22 DIP1G800-640	2022.02.11	2025.02.10
1900MHz Dipole	MVG	DIP1G900	SN 06/22 DIP1G900-641	2022.02.11	2025.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2023.02.10	2024.02.09
Liquid Calibration Kit	MVG	OCPG 87	SN 06/22 OCPG87	2023.02.10	2024.02.09
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDCP	202303280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2023.03.27	2024.03.26
Multi Meter	Keithley	DMM6500	DMM6500	2023.03.27	2024.03.26
Signal Generator	Keithley	N5182B	MY59100717	2023.04.07	2024.04.06
Wireless Communication Test Set	R&S	CMW500	137737	2023.04.14	2024.04.13
Power Sensor	R&S	Z11	116184	2023.04.13	2024.04.12
Temperature hygrometer	N/A	ST-W2318	N/A	2023.04.24	2024.04.23
Thermograph	N/A	TP101	N/A	2023.04.25	2024.04.24



## Appendix A. System Validation Plots

### System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-01-03

#### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW
Frequency (MHz)	750.000
Relative permittivity	42.97
Conductivity (S/m)	0.85
Probe	SN 04/22 EPGO364
ConvF	1.69
Crest factor:	1:1

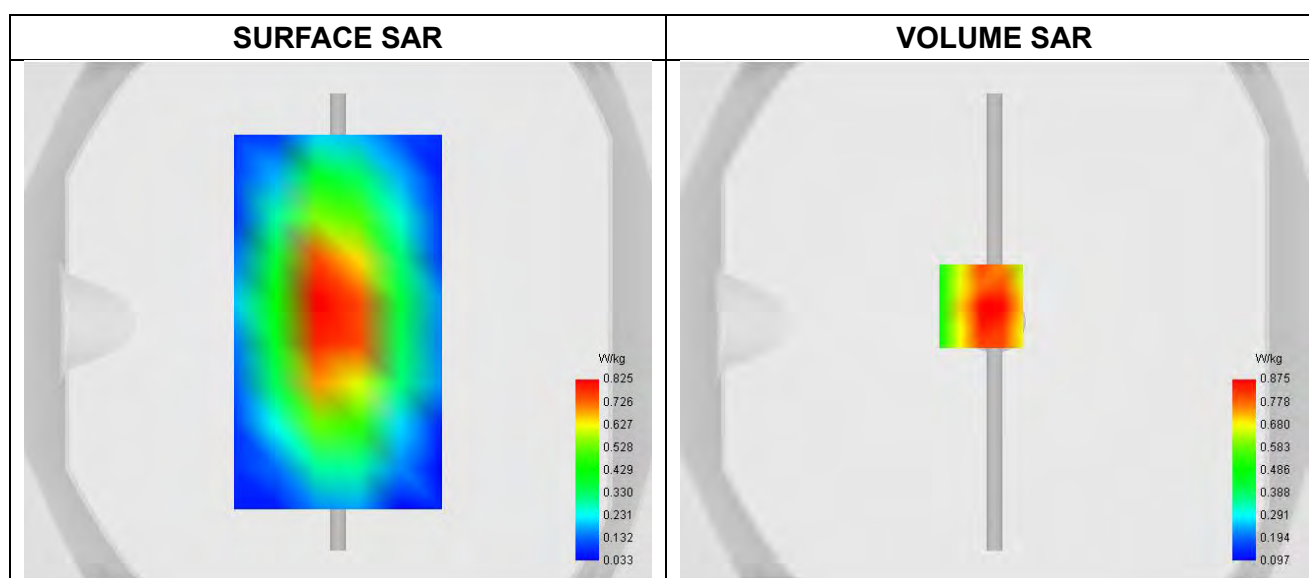


**Maximum location: X=-5.00, Y=6.00 ; SAR Peak: 1.36 W/kg**

SAR 10g (W/Kg)	0.520
SAR 1g (W/Kg)	0.817



## Z Axis Scan

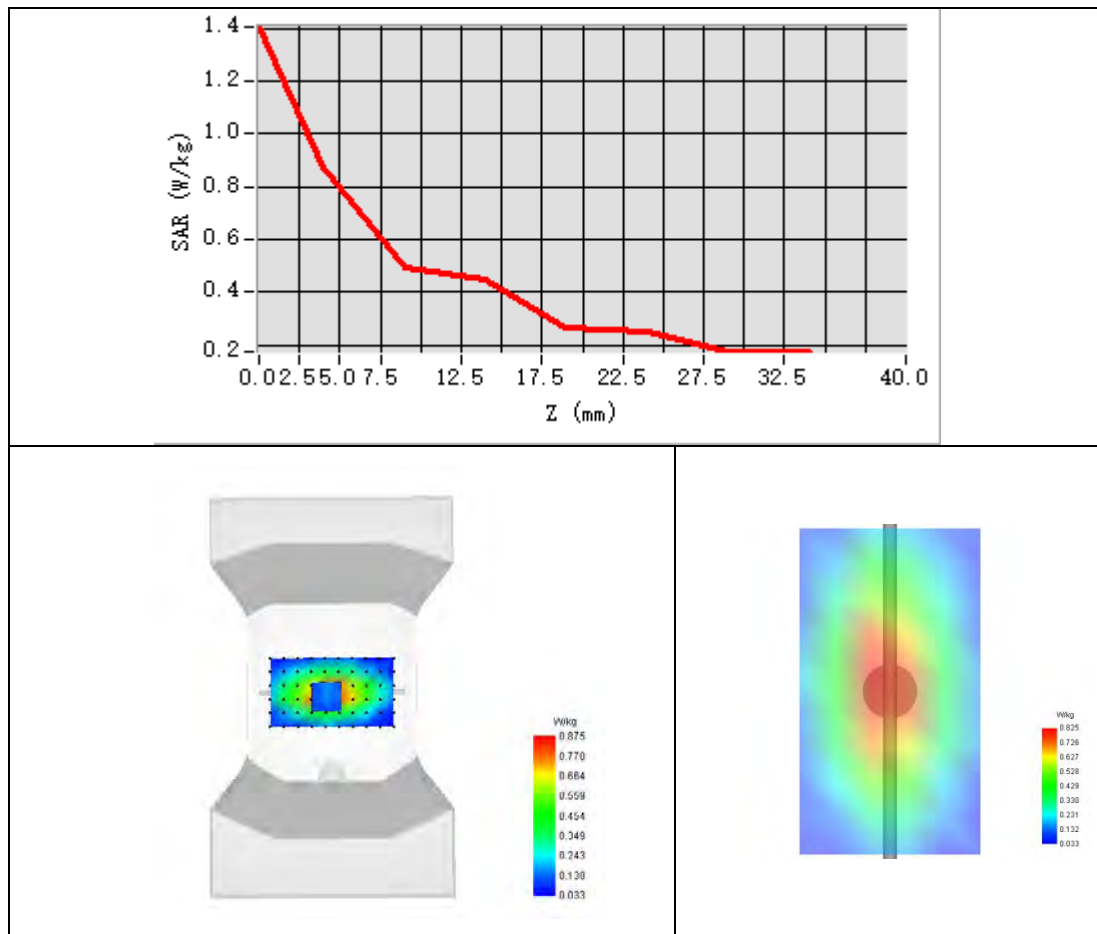



## System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-22

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	42.40
Conductivity (S/m)	0.91
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

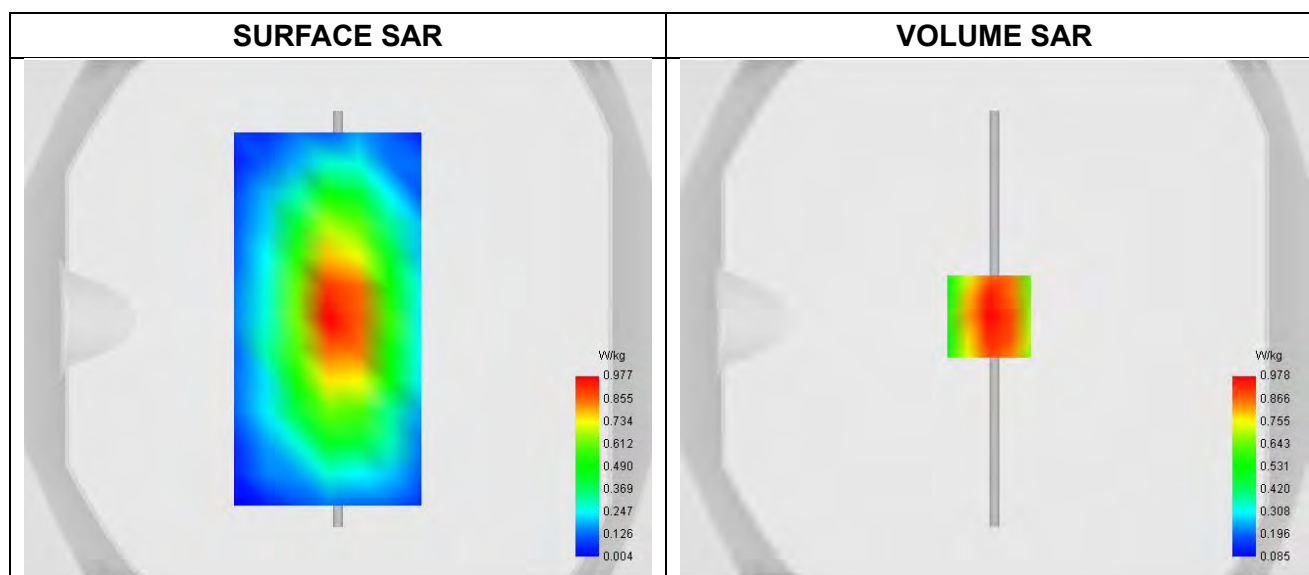


**Maximum location: X=5.00, Y=5.00 ; SAR Peak: 1.61 W/kg**

SAR 10g (W/Kg)	0.617
SAR 1g (W/Kg)	0.958



## Z Axis Scan

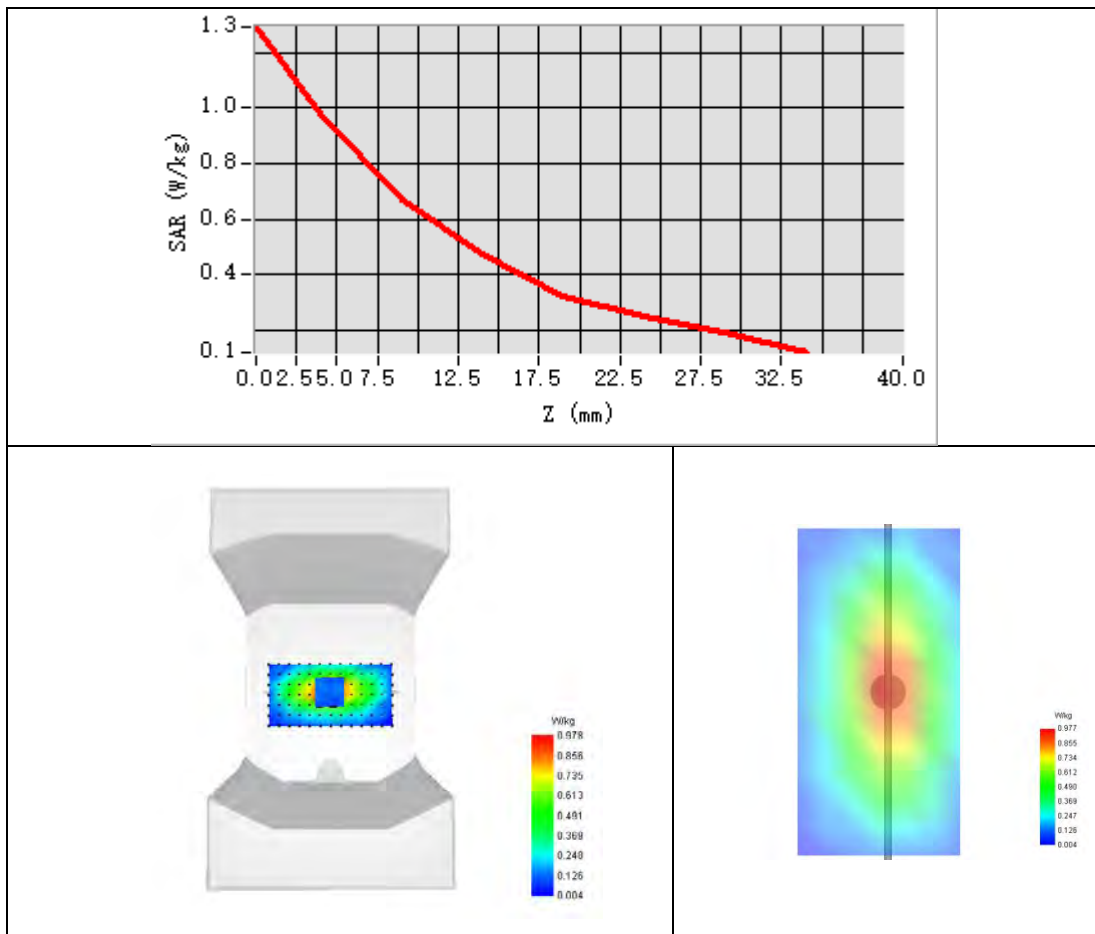





## System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-30

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	40.99
Conductivity (S/m)	0.92
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

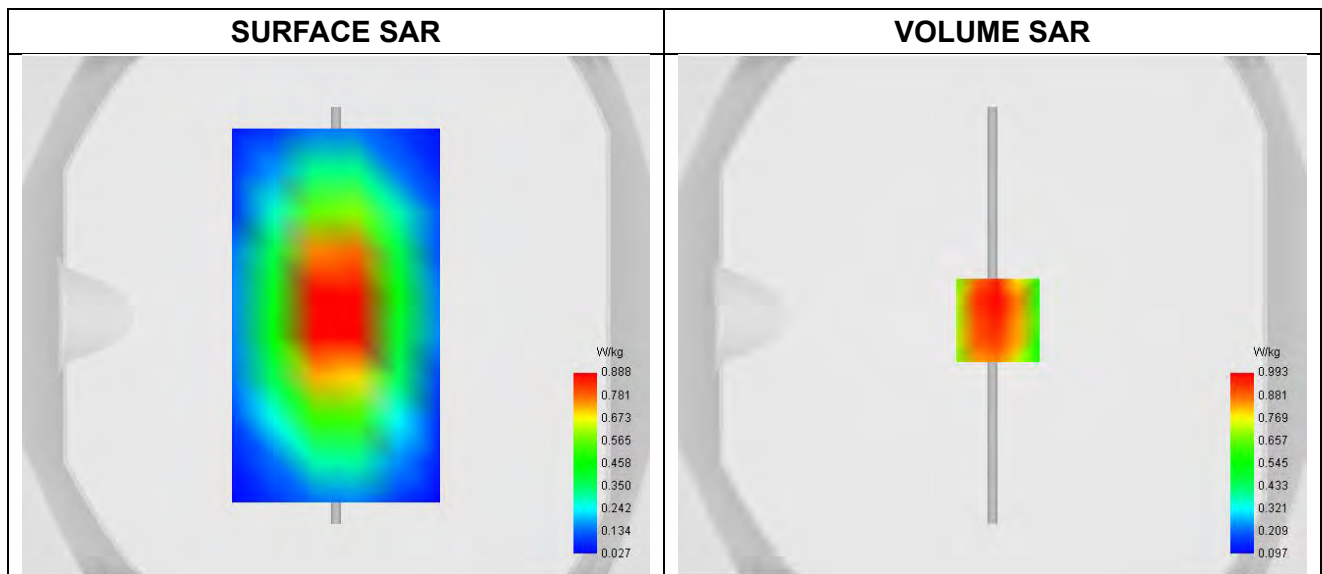


**Maximum location: X=2.00, Y=-2.00 ; SAR Peak: 1.43 W/kg**

SAR 10g (W/Kg)	0.593
SAR 1g (W/Kg)	0.946



## Z Axis Scan

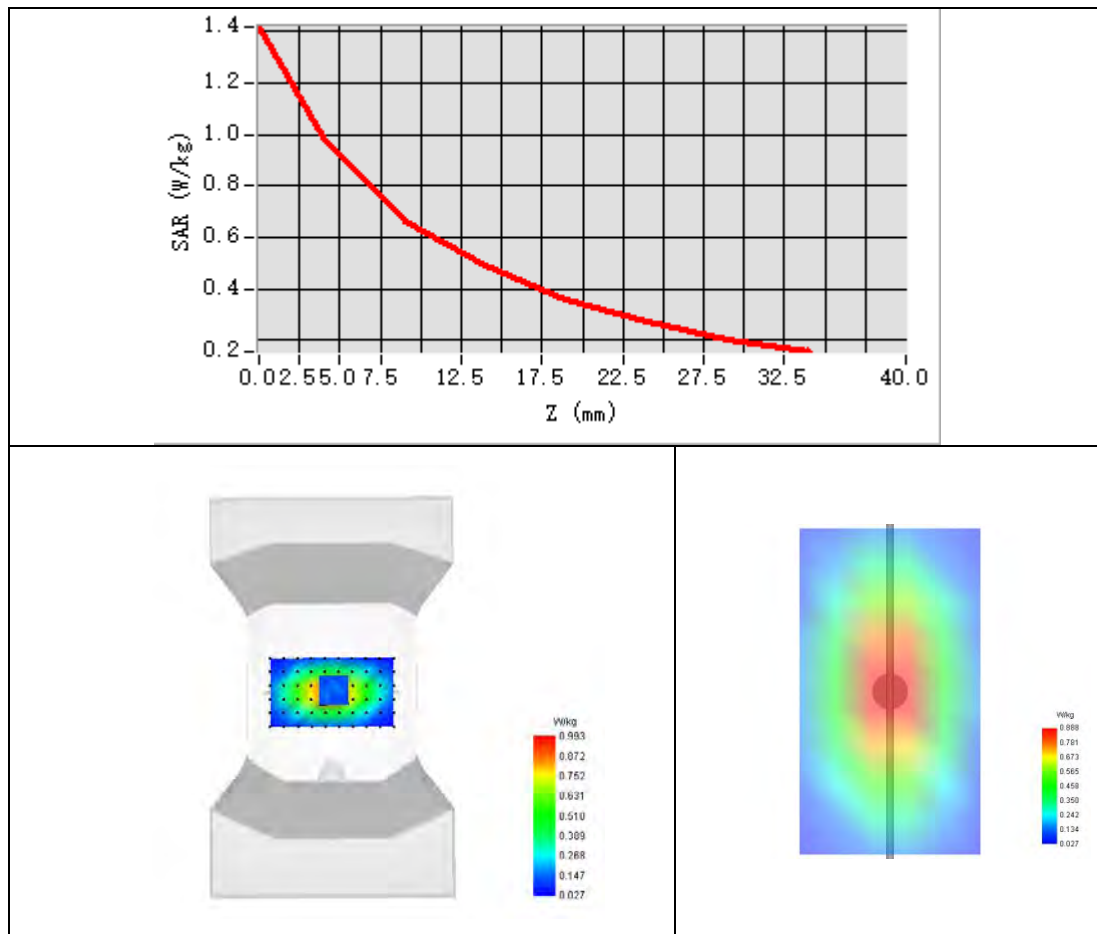



## System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-25

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	41.17
Conductivity (S/m)	1.42
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

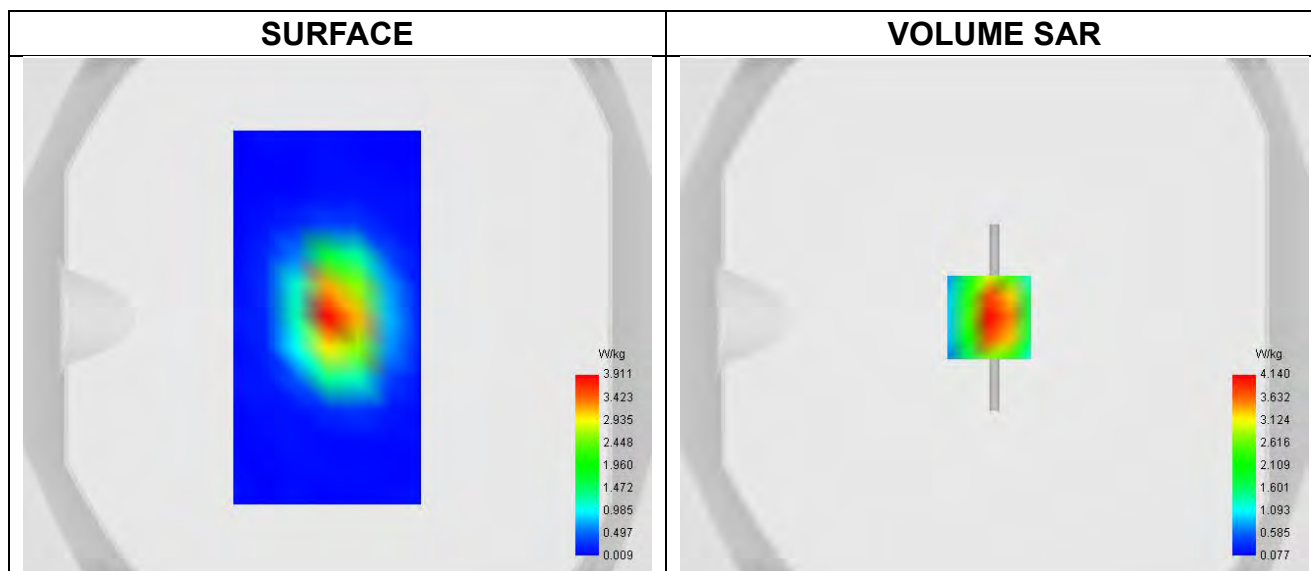


**Maximum location: X=-2.00, Y=1.00 ; SAR Peak: 6.56 W/kg**

SAR 10g (W/Kg)	2.045
SAR 1g (W/Kg)	3.911



### Z Axis Scan

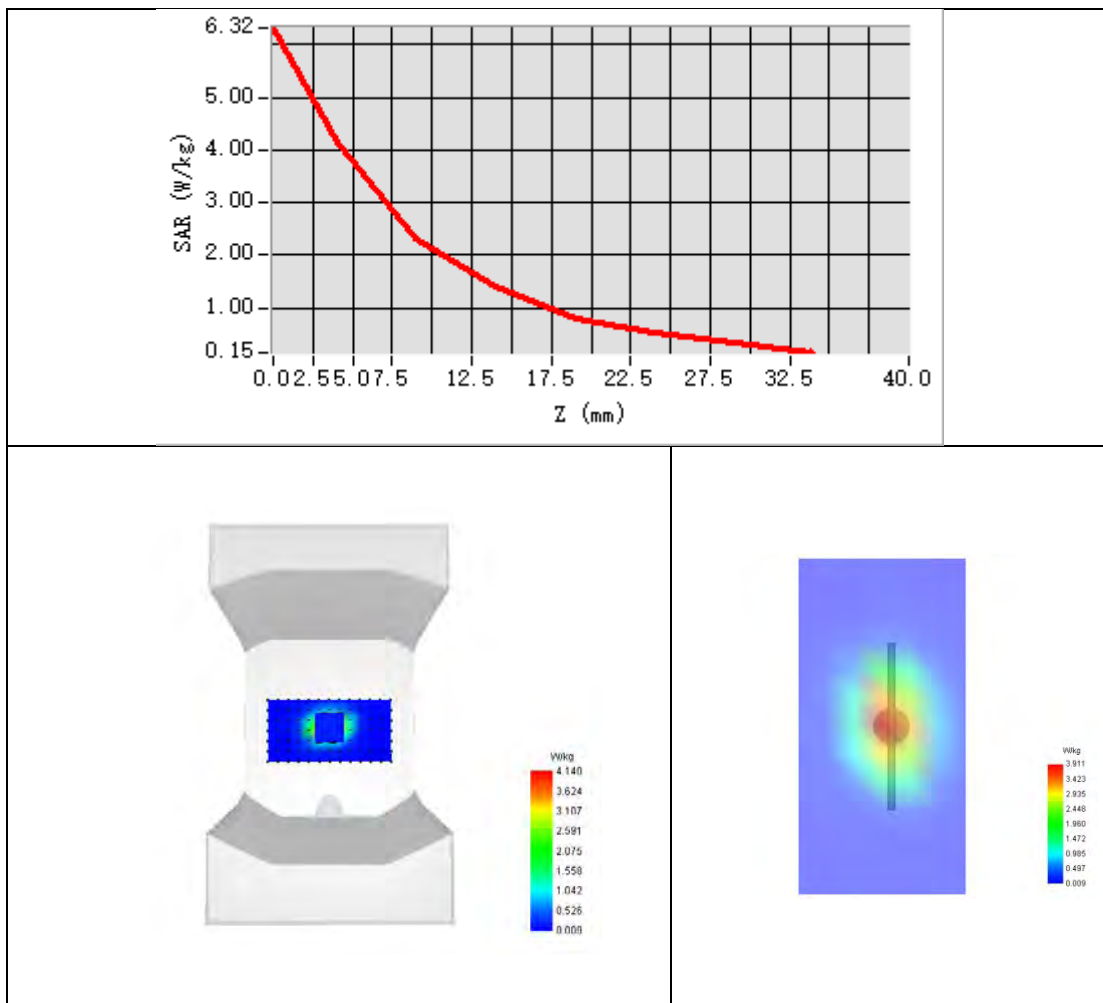



## System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-26

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.58
Conductivity (S/m)	1.41
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

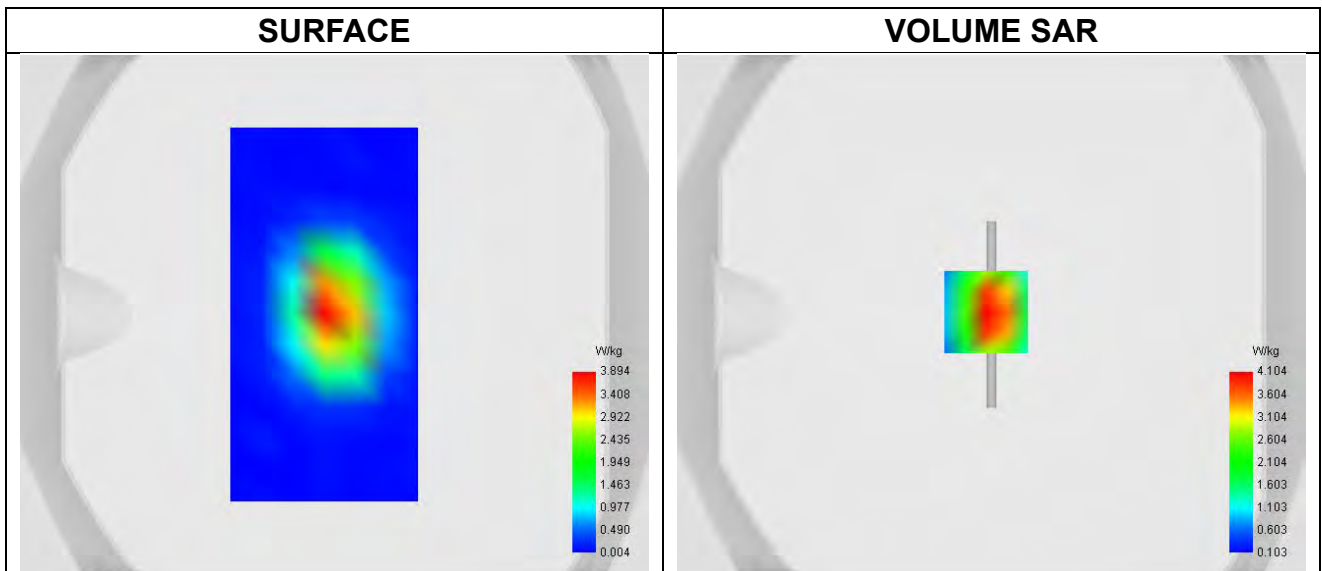


**Maximum location: X=5.00, Y=3.00 ; SAR Peak: 5.93 W/kg**

SAR 10g (W/Kg)	2.087
SAR 1g (W/Kg)	3.943



### Z Axis Scan

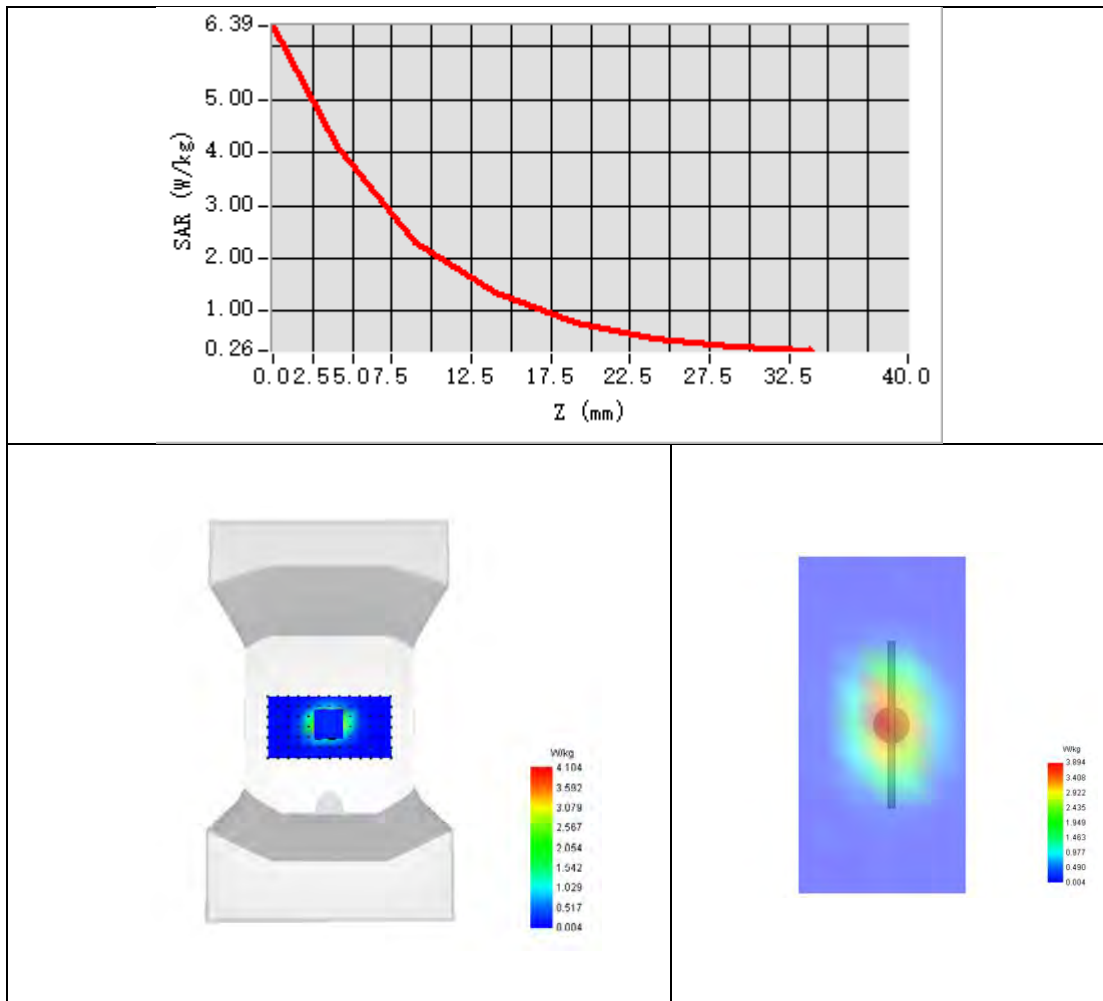



## System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-01-01

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	41.40
Conductivity (S/m)	1.43
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

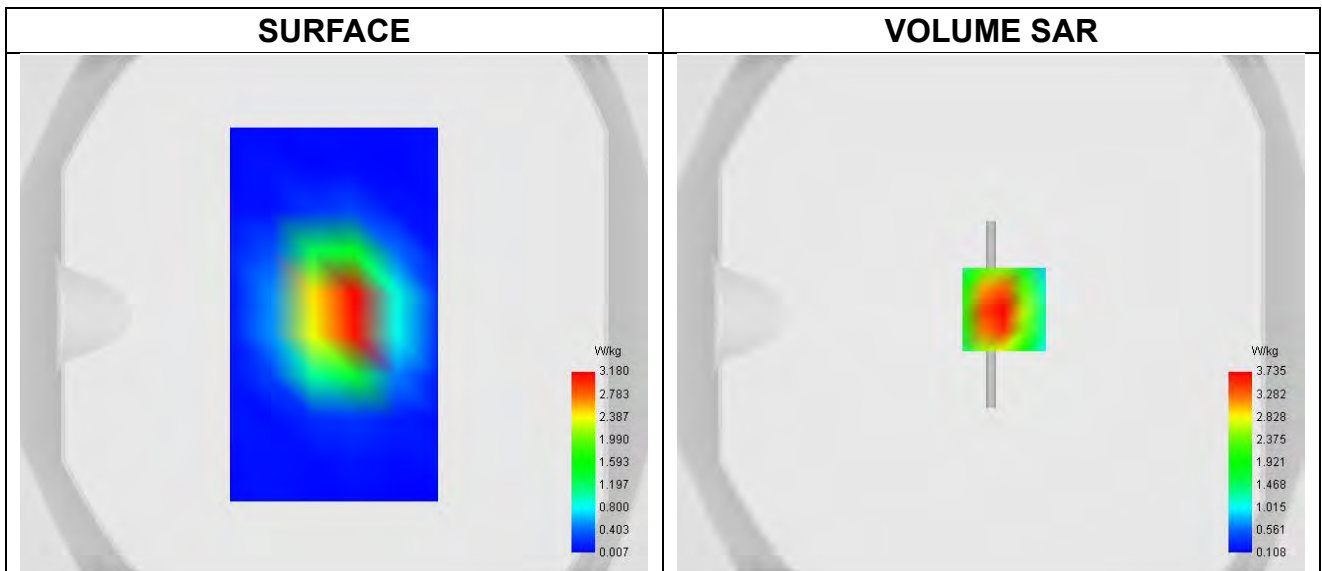


**Maximum location: X=5.00, Y=2.00 ; SAR Peak: 5.52 W/kg**

SAR 10g (W/Kg)	2.066
SAR 1g (W/Kg)	3.693



### Z Axis Scan

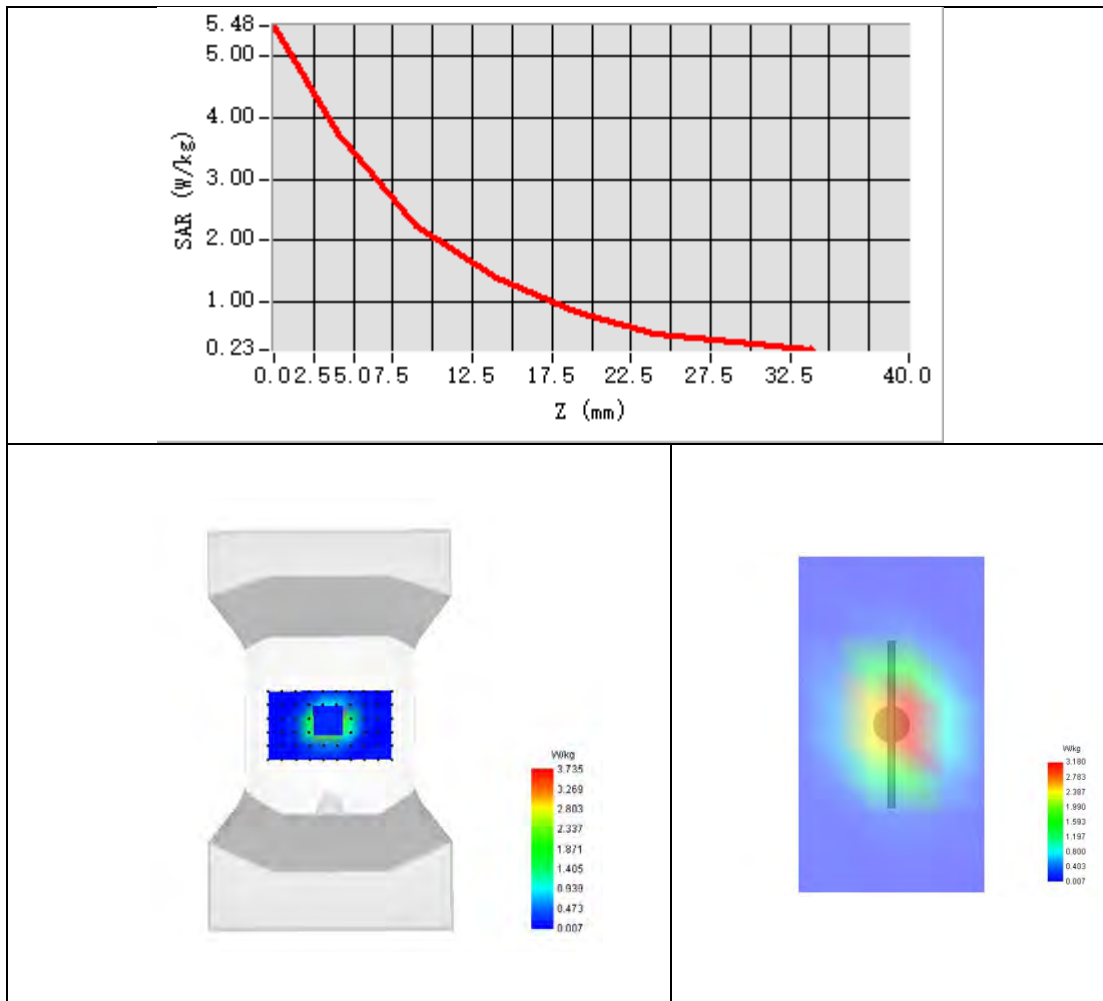





## System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-23

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.29
Conductivity (S/m)	1.40
Probe	SN 04/22 EPGO364
ConvF	2.25
Crest factor:	1:1

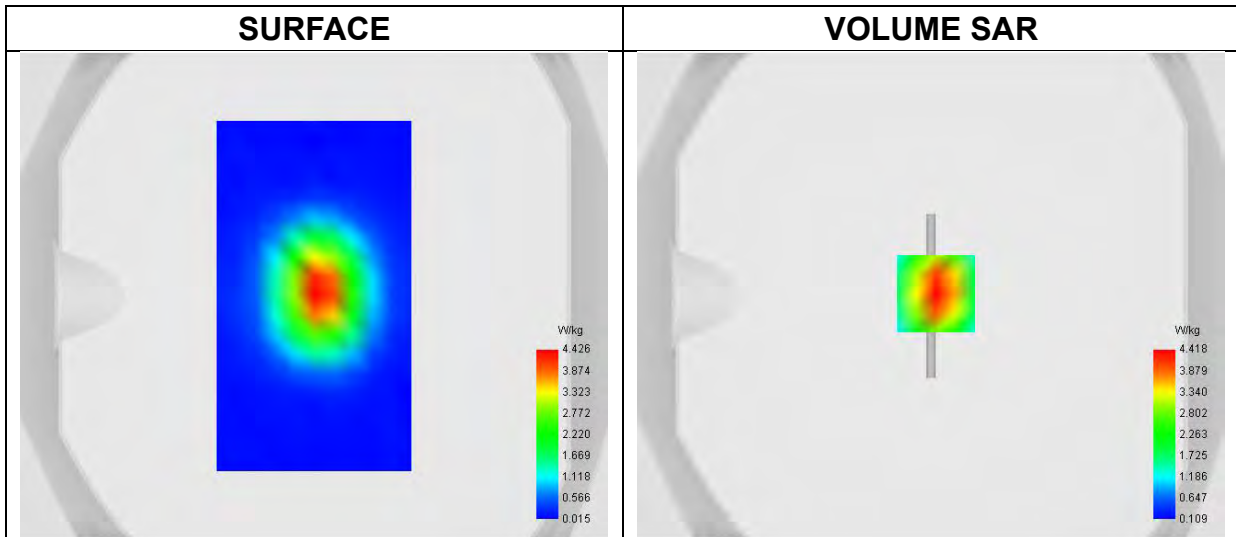


**Maximum location: X=2.00, Y=1.00 ; SAR Peak: 6.76 W/kg**

SAR 10g (W/Kg)	2.244
SAR 1g (W/Kg)	4.238



### Z Axis Scan

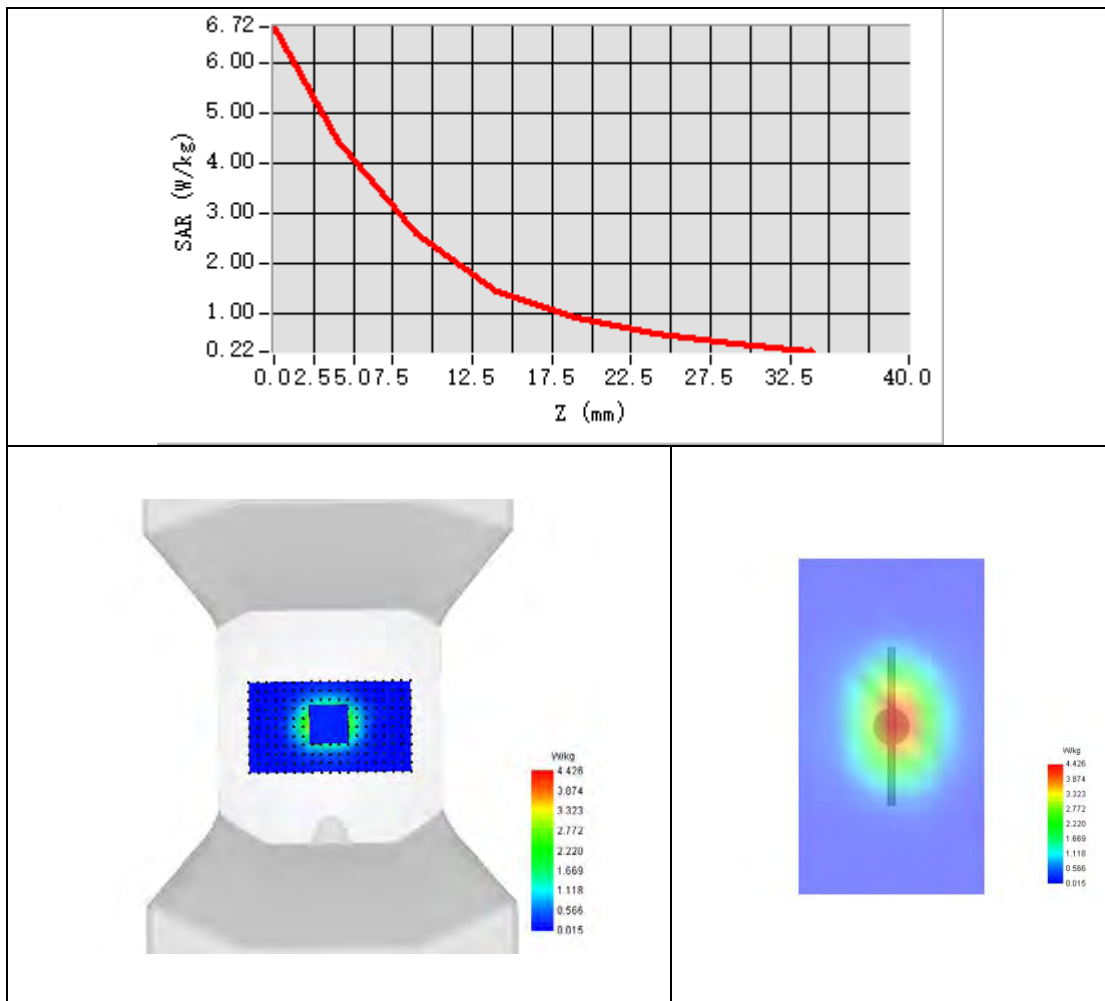



## System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-31

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	41.53
Conductivity (S/m)	1.37
Probe	SN 04/22 EPGO364
ConvF	2.25
Crest factor:	1:1

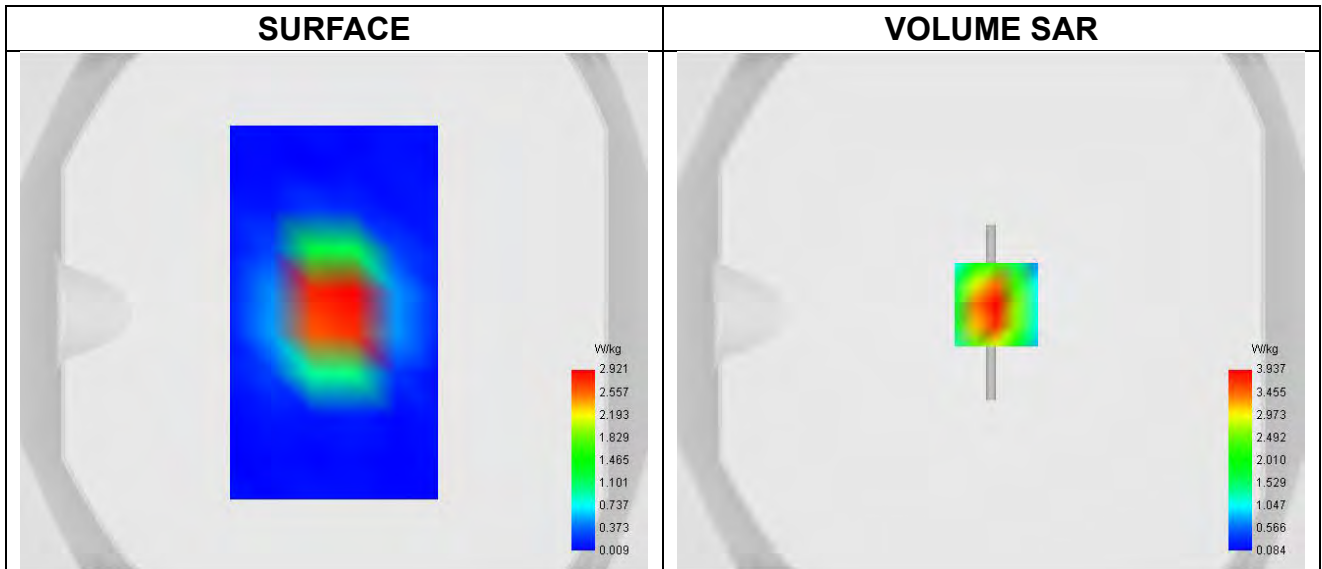


**Maximum location: X=2.00, Y=3.00 ; SAR Peak: 6.33W/kg**

SAR 10g (W/Kg)	2.051
SAR 1g (W/Kg)	3.928



### Z Axis Scan

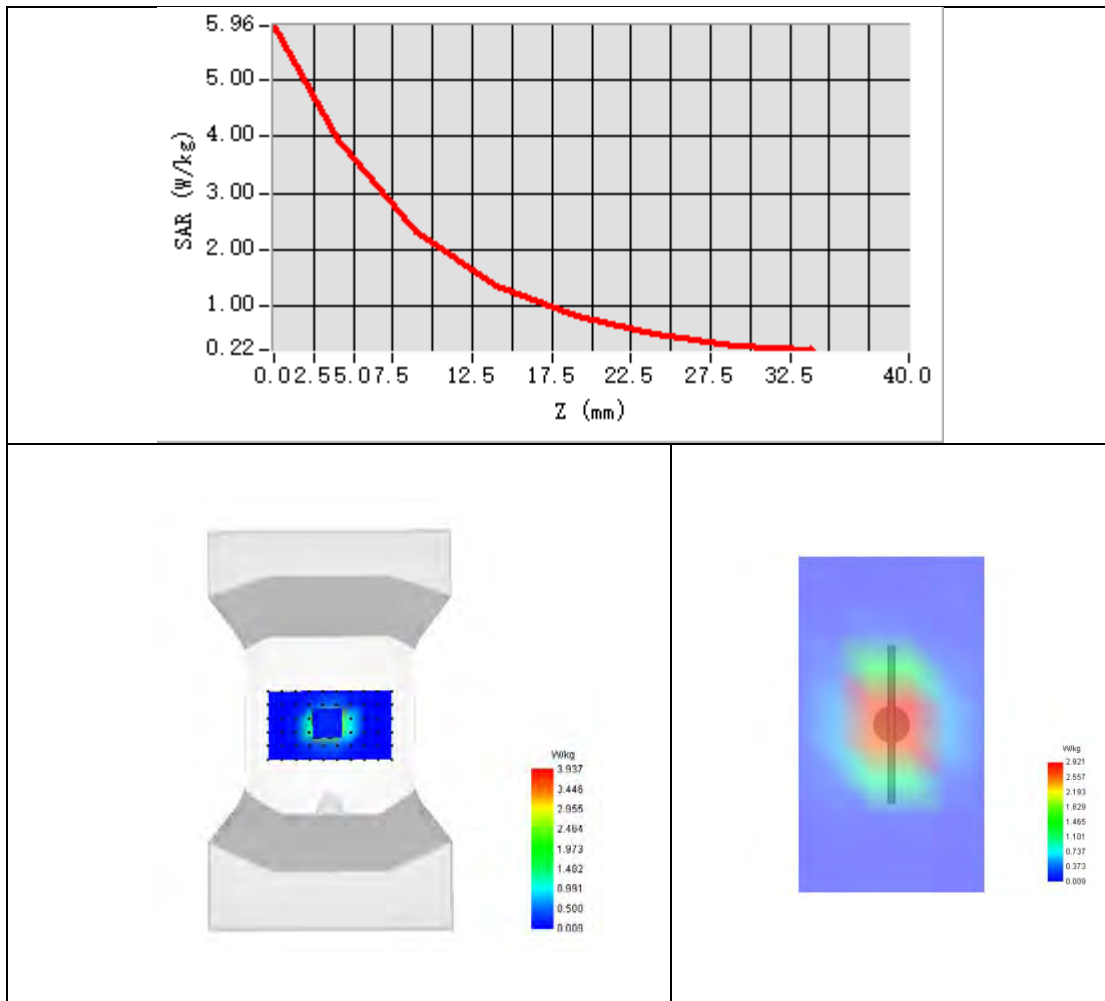




## Appendix B. SAR Test Plots

Plot 1:

Test Date	2023-12-22
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.182
SAR 1g (W/Kg)	0.296
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=-67.00, Y=-29.00 ; SAR Peak: 0.45 W/kg

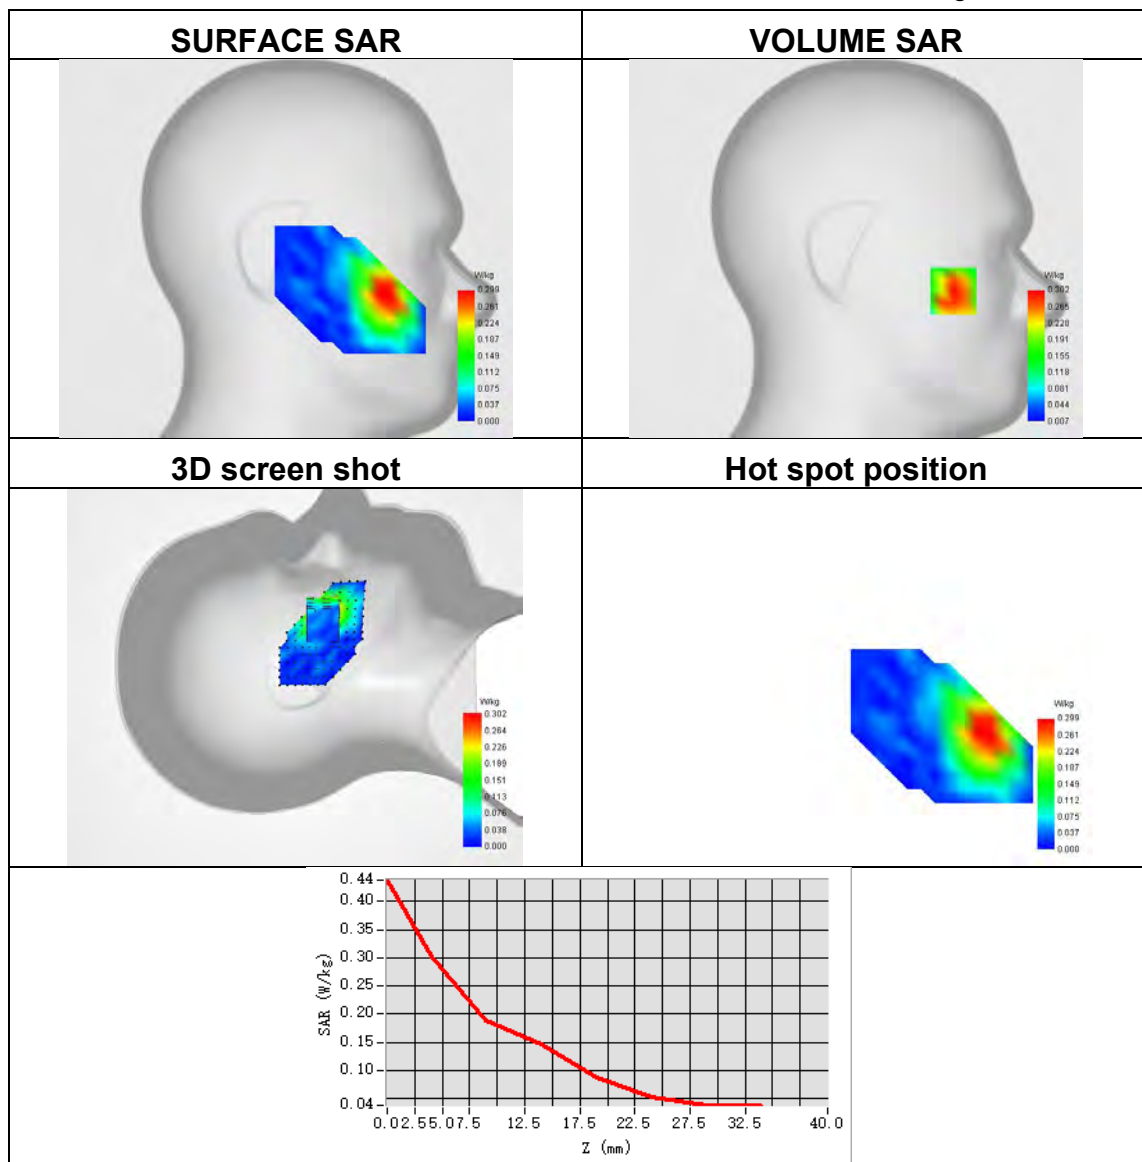




Plot 2:

Test Date	2023-12-22
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.246
SAR 1g (W/Kg)	0.396
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=17.00, Y=-23.00 ; SAR Peak: 0.60 W/kg

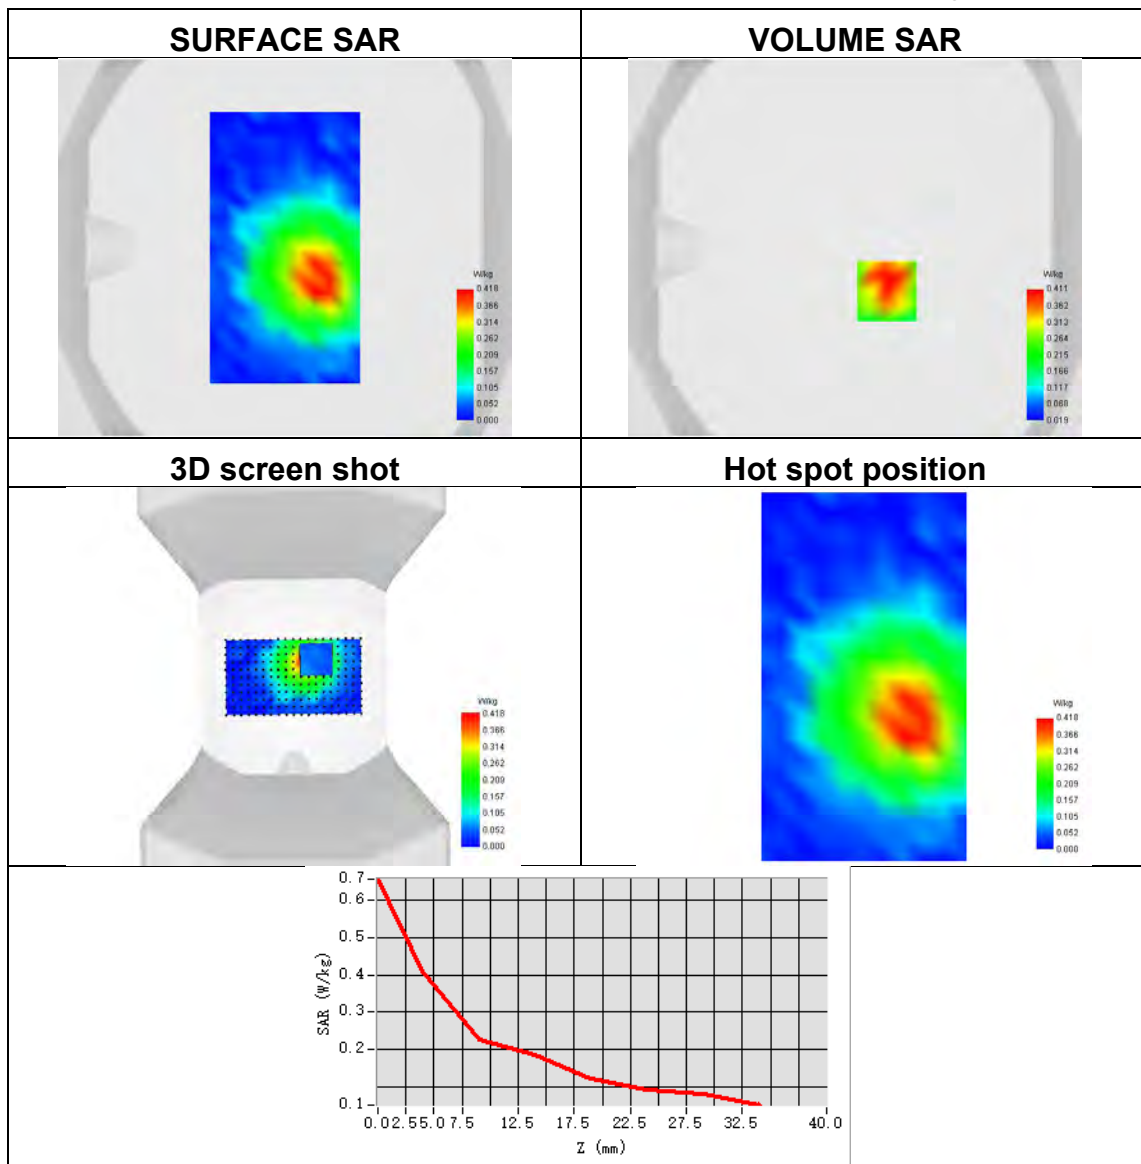




Plot 3:

Test Date	2023-12-31
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.102
SAR 1g (W/Kg)	0.219
ConvF	2.25
Relative permittivity	41.53
Conductivity (S/m)	1.37

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.43 W/kg

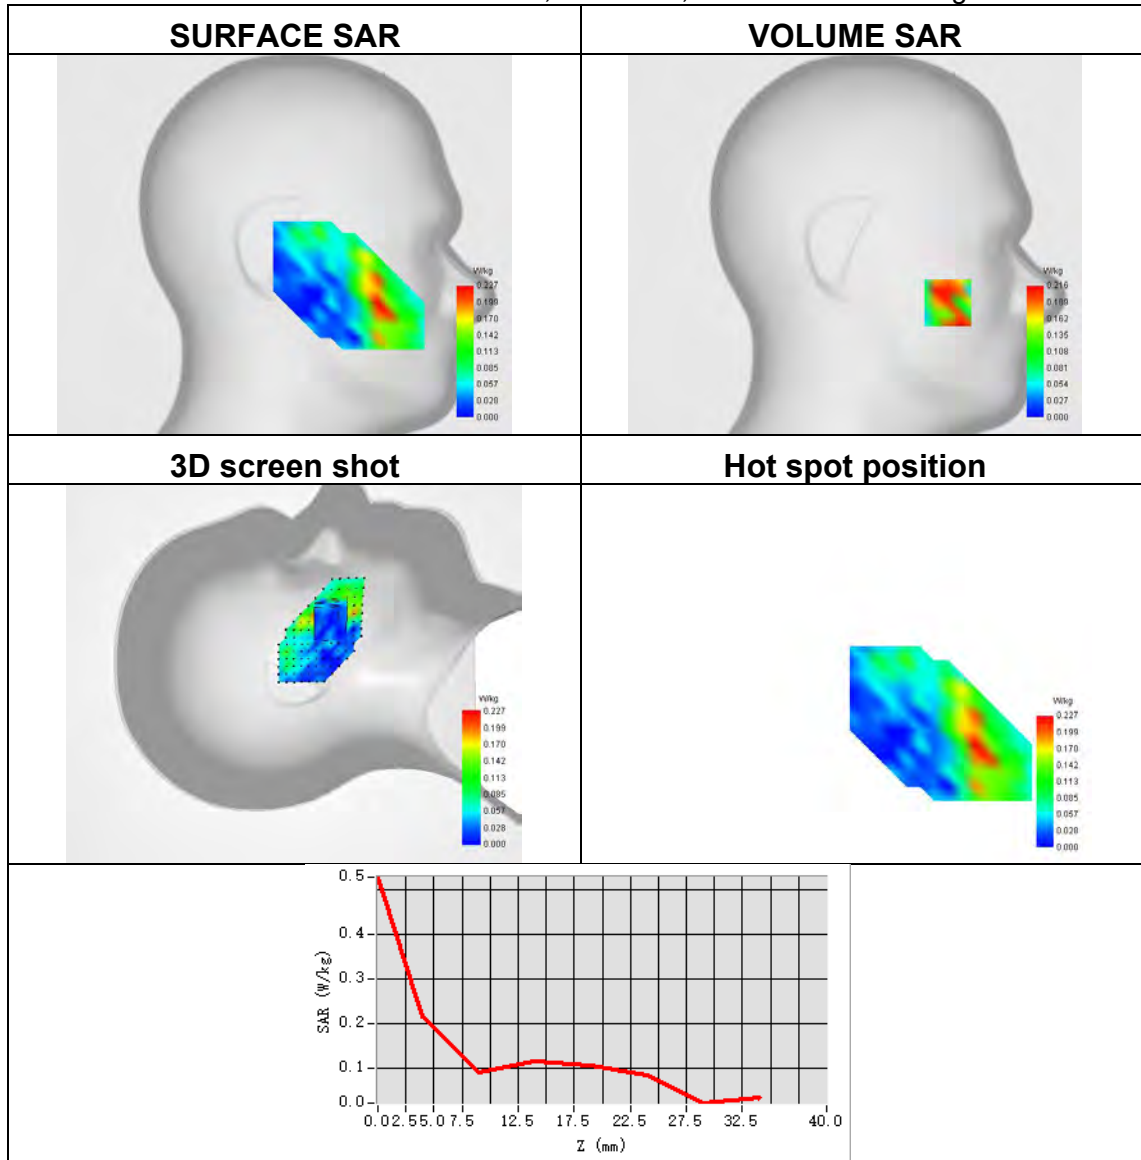




**Plot 4:**

Test Date	2023-12-31
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.263
ConvF	2.25
Relative permittivity	41.53
Conductivity (S/m)	1.37

Maximum location: X=-16.00, Y=8.00 ; SAR Peak: 0.45 W/kg

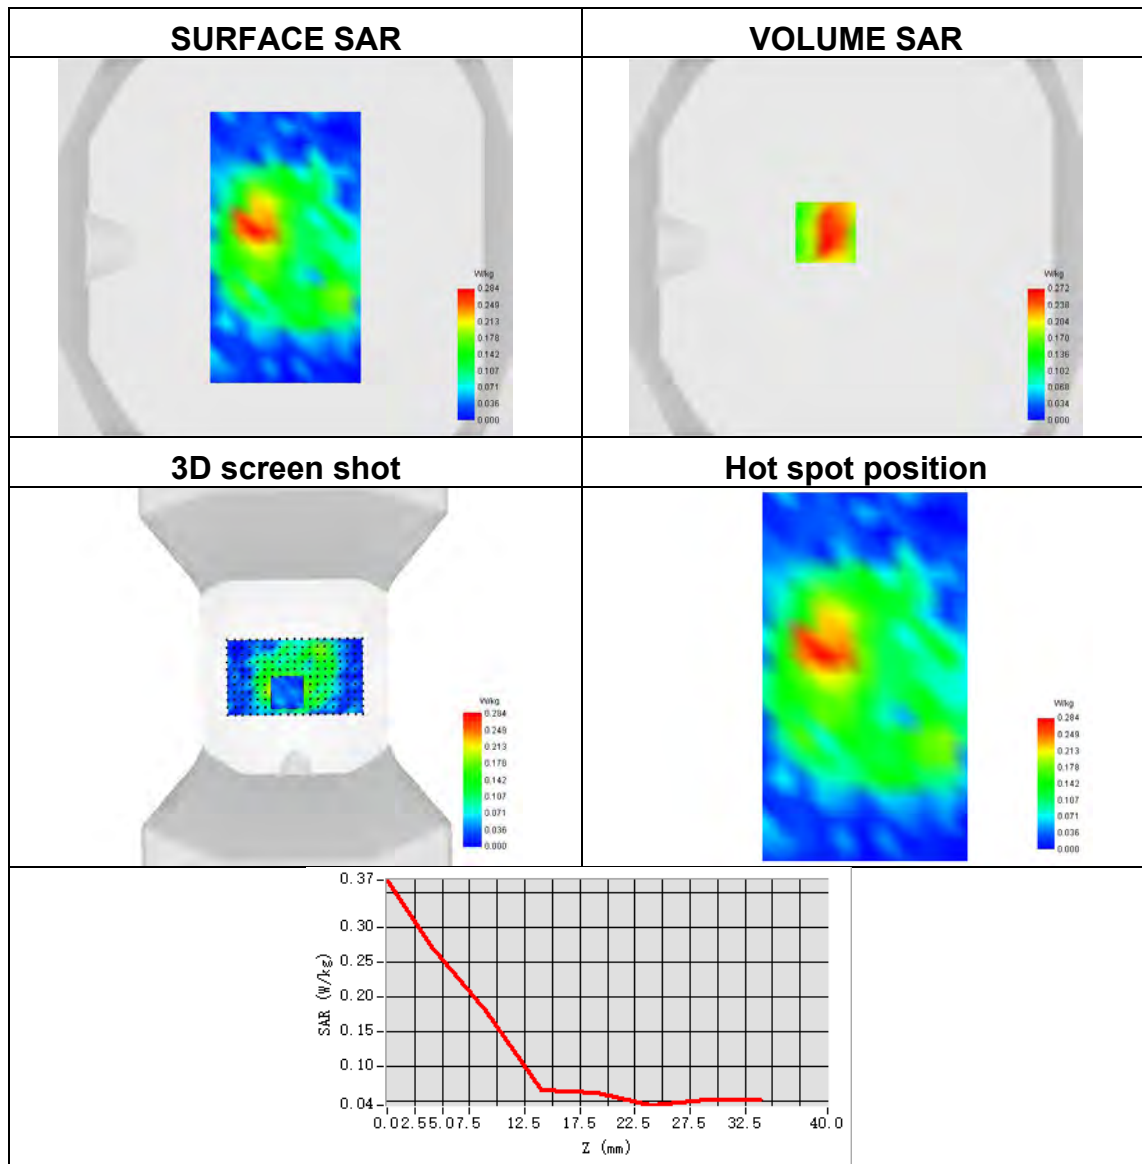






**Plot 5:**

Test Date	2023-12-31
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	HSDPA
Frequency	1852.4
SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.433
ConvF	2.25
Relative permittivity	41.53
Conductivity (S/m)	1.37

Maximum location: X=-64.00, Y=-39.00 ; SAR Peak: 0.67 W/kg

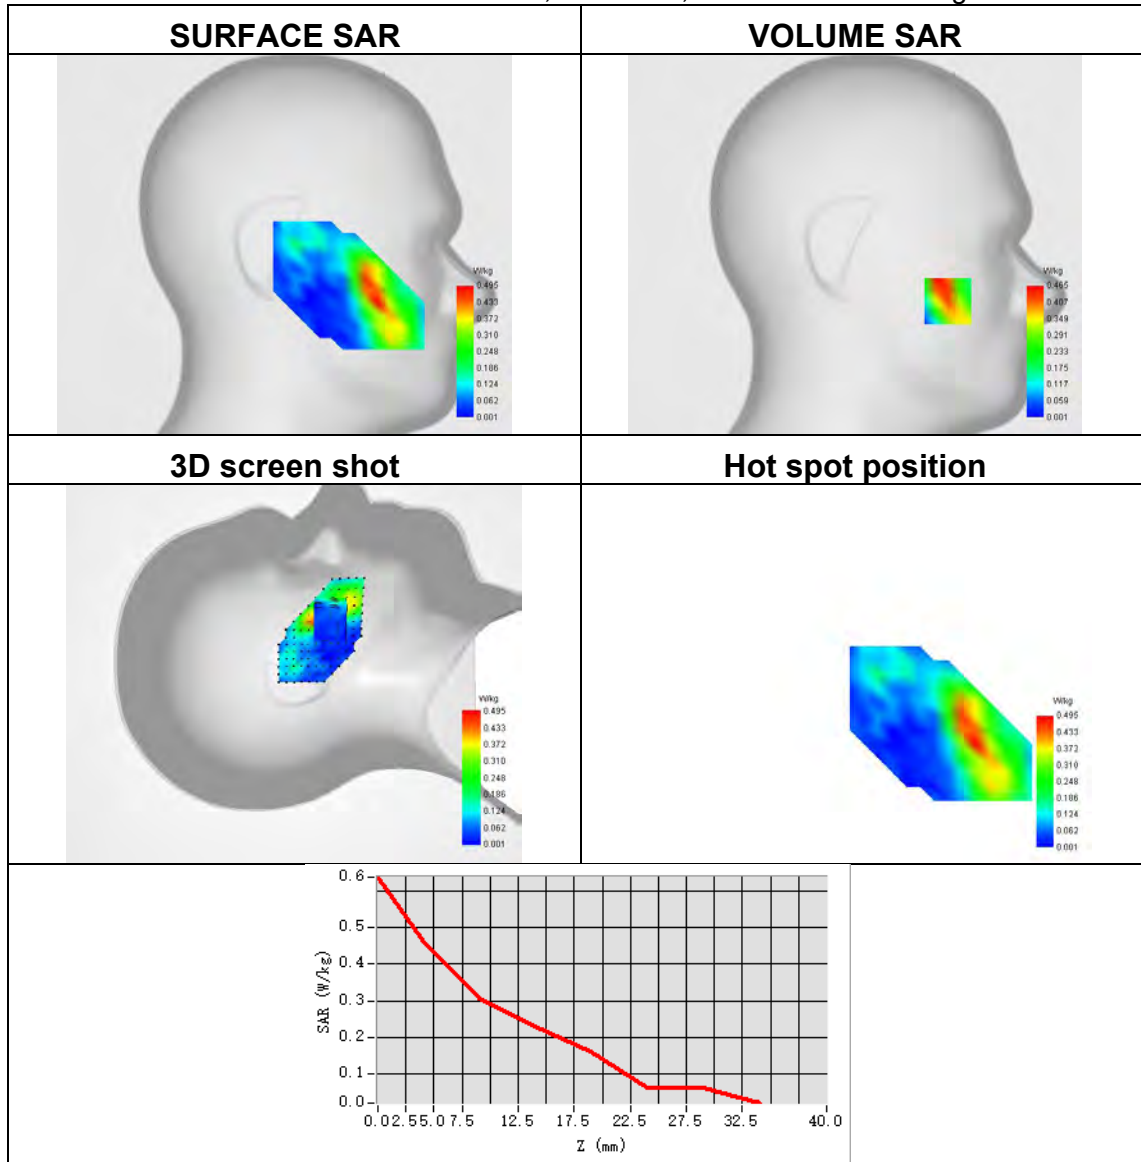




Plot 6:

Test Date	2023-12-31
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 2 (1900)
Signal	HSDPA
Frequency	1852.4
SAR 10g (W/Kg)	0.267
SAR 1g (W/Kg)	0.497
ConvF	2.25
Relative permittivity	41.53
Conductivity (S/m)	1.37

Maximum location: X=-8.00, Y=11.00 ; SAR Peak: 0.91 W/kg

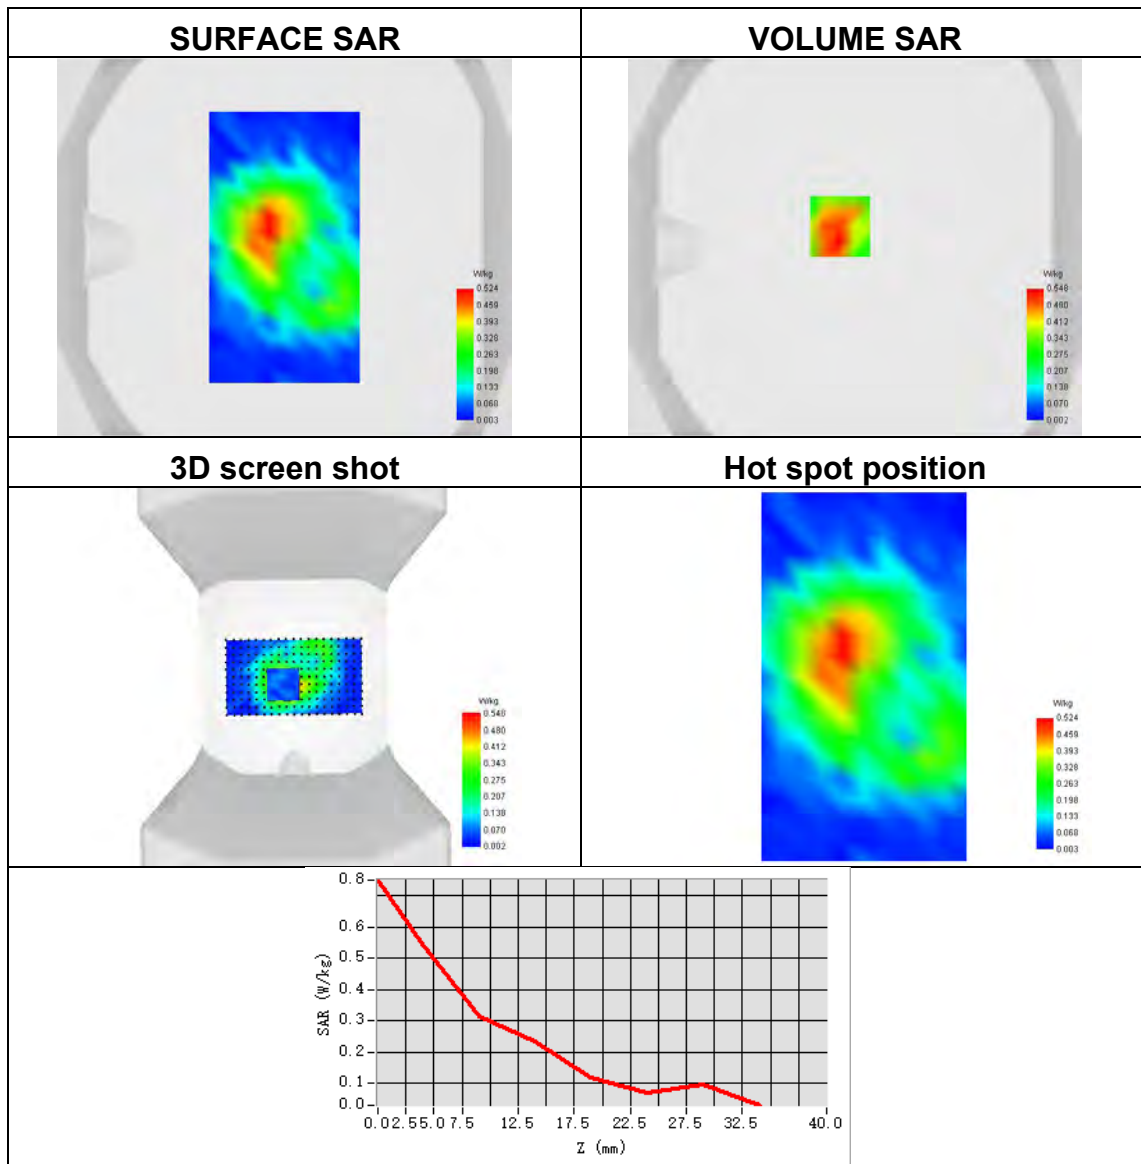




Plot 7:

Test Date	2023-12-25
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Signal	HSDPA
Frequency	1712.6
SAR 10g (W/Kg)	0.436
SAR 1g (W/Kg)	0.733
ConvF	1.95
Relative permittivity	41.17
Conductivity (S/m)	1.42

Maximum location: X=-75.00, Y=-55.00 ; SAR Peak: 1.25 W/kg

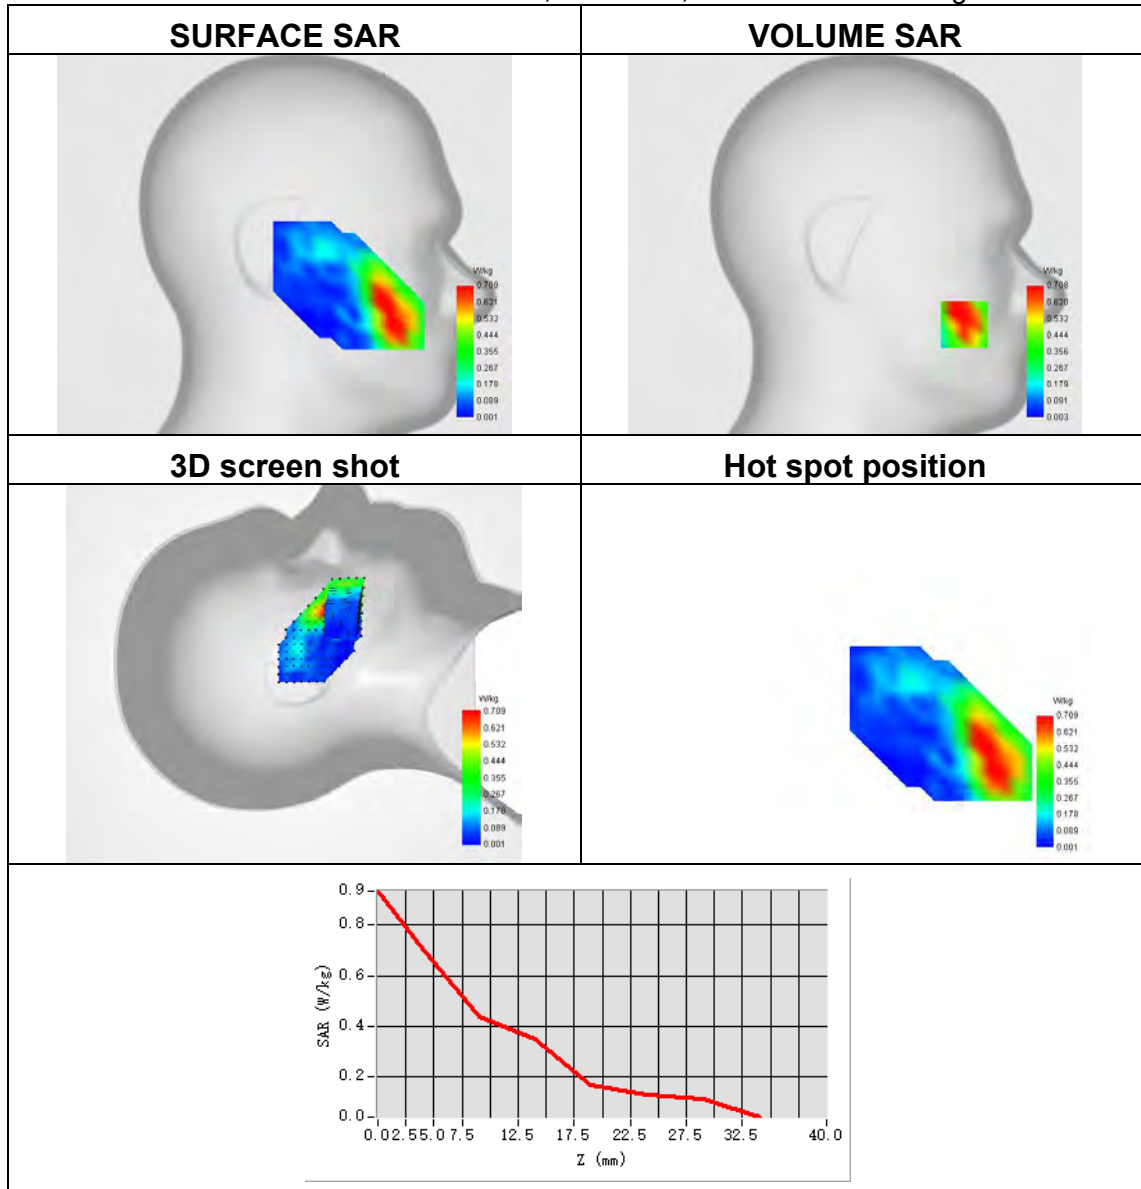




Plot 8:

Test Date	2023-12-25
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	HSDPA
Frequency	1712.6
SAR 10g (W/Kg)	0.651
SAR 1g (W/Kg)	1.093
ConvF	1.95
Relative permittivity	41.17
Conductivity (S/m)	1.42

Maximum location: X=-6.00, Y=0.00 ; SAR Peak: 1.67 W/kg

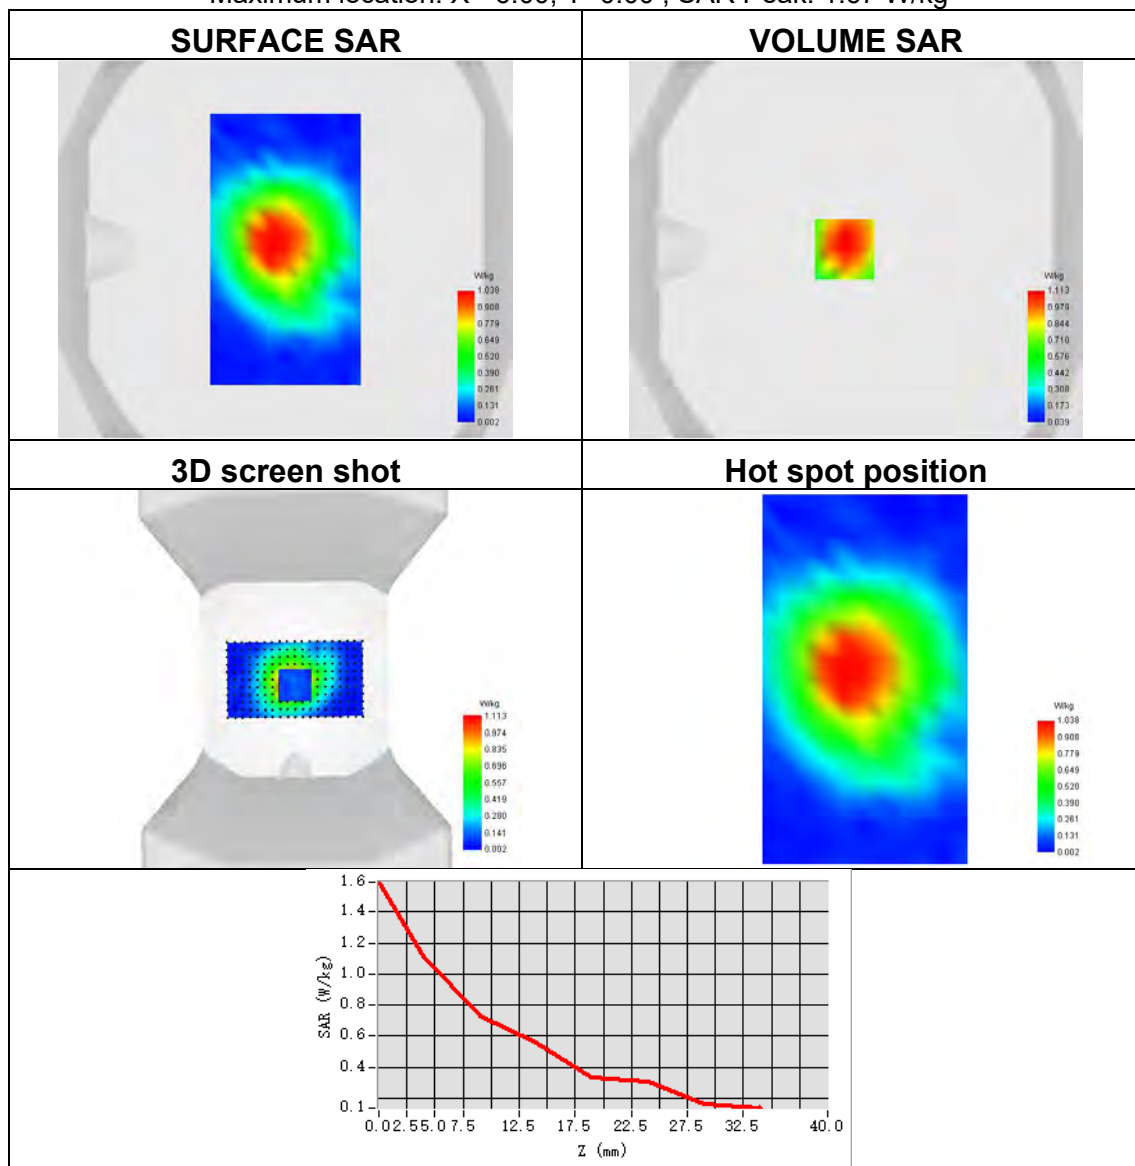




**Plot 9:**

Test Date	2023-12-22
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.214
SAR 1g (W/Kg)	0.355
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=-37.00, Y=-5.00 ; SAR Peak: 0.58 W/kg

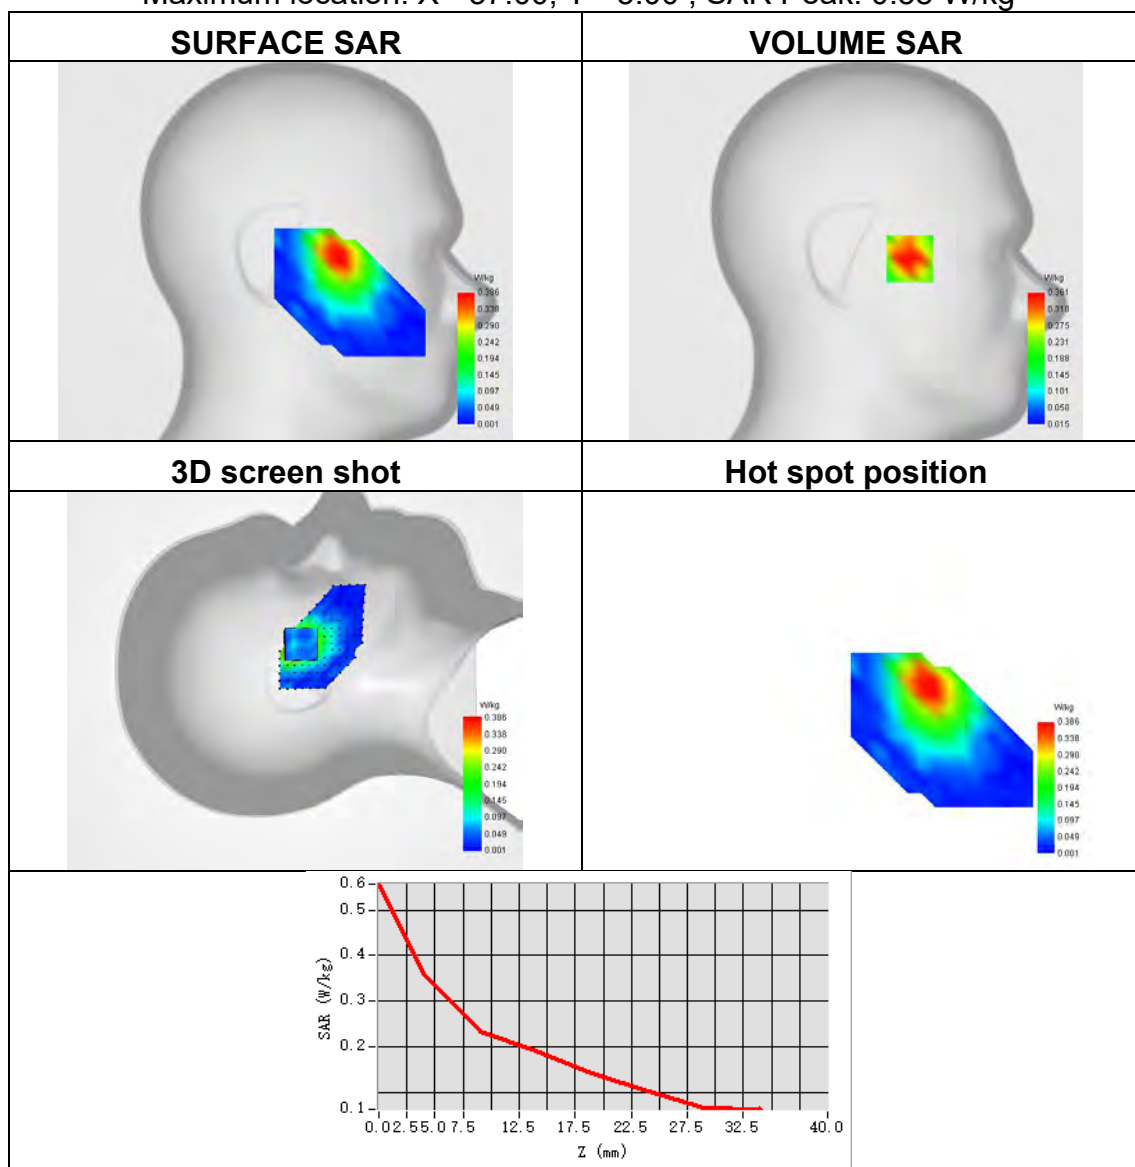




**Plot 10:**

Test Date	2023-12-22
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.244
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=22.00, Y=-15.00 ; SAR Peak: 0.40 W/kg

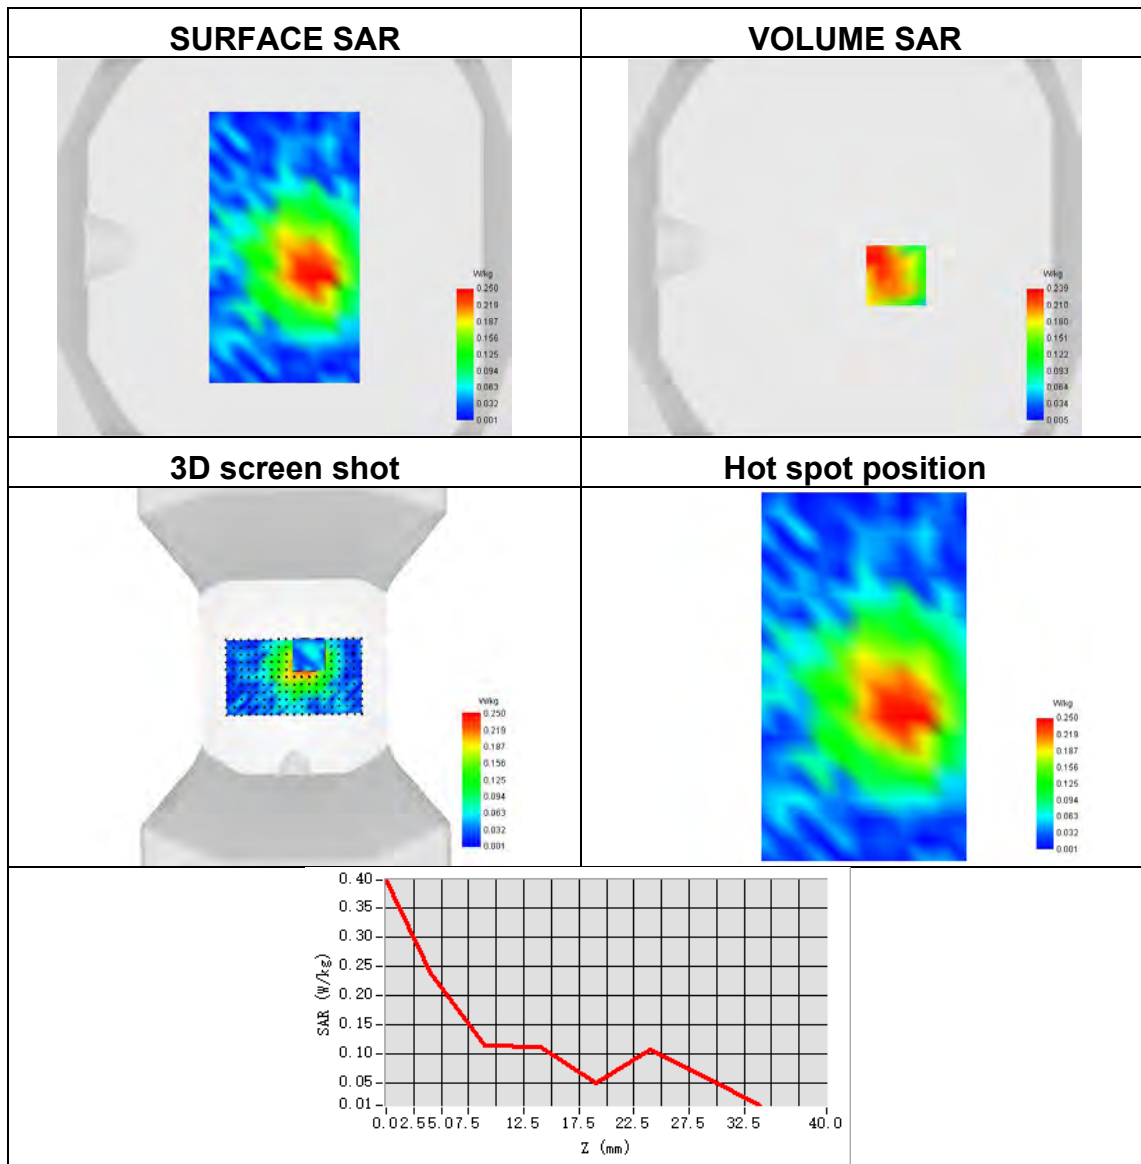




**Plot 11:**

Test Date	2023-12-23
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.280
SAR 1g (W/Kg)	0.573
ConvF	2.25
Relative permittivity	40.29
Conductivity (S/m)	1.40

Maximum location: X=-56.00, Y=-24.00 ; SAR Peak: 1.06 W/kg

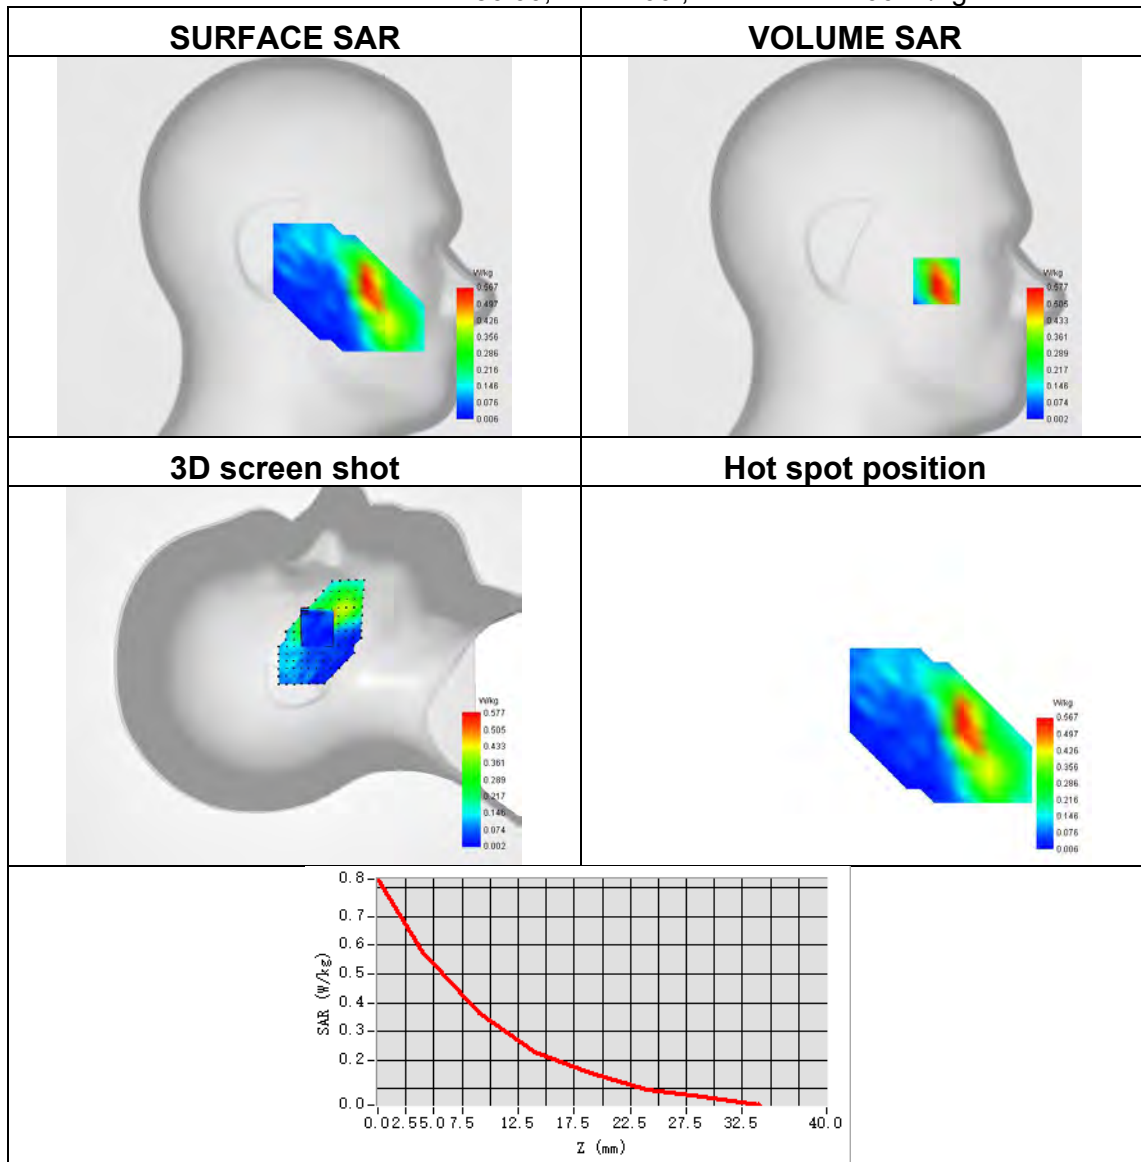




**Plot 12:**

Test Date	2023-12-23
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.359
SAR 1g (W/Kg)	0.592
ConvF	2.25
Relative permittivity	40.29
Conductivity (S/m)	1.40

Maximum location: X=24.00, Y=-14.00 ; SAR Peak: 0.92 W/kg

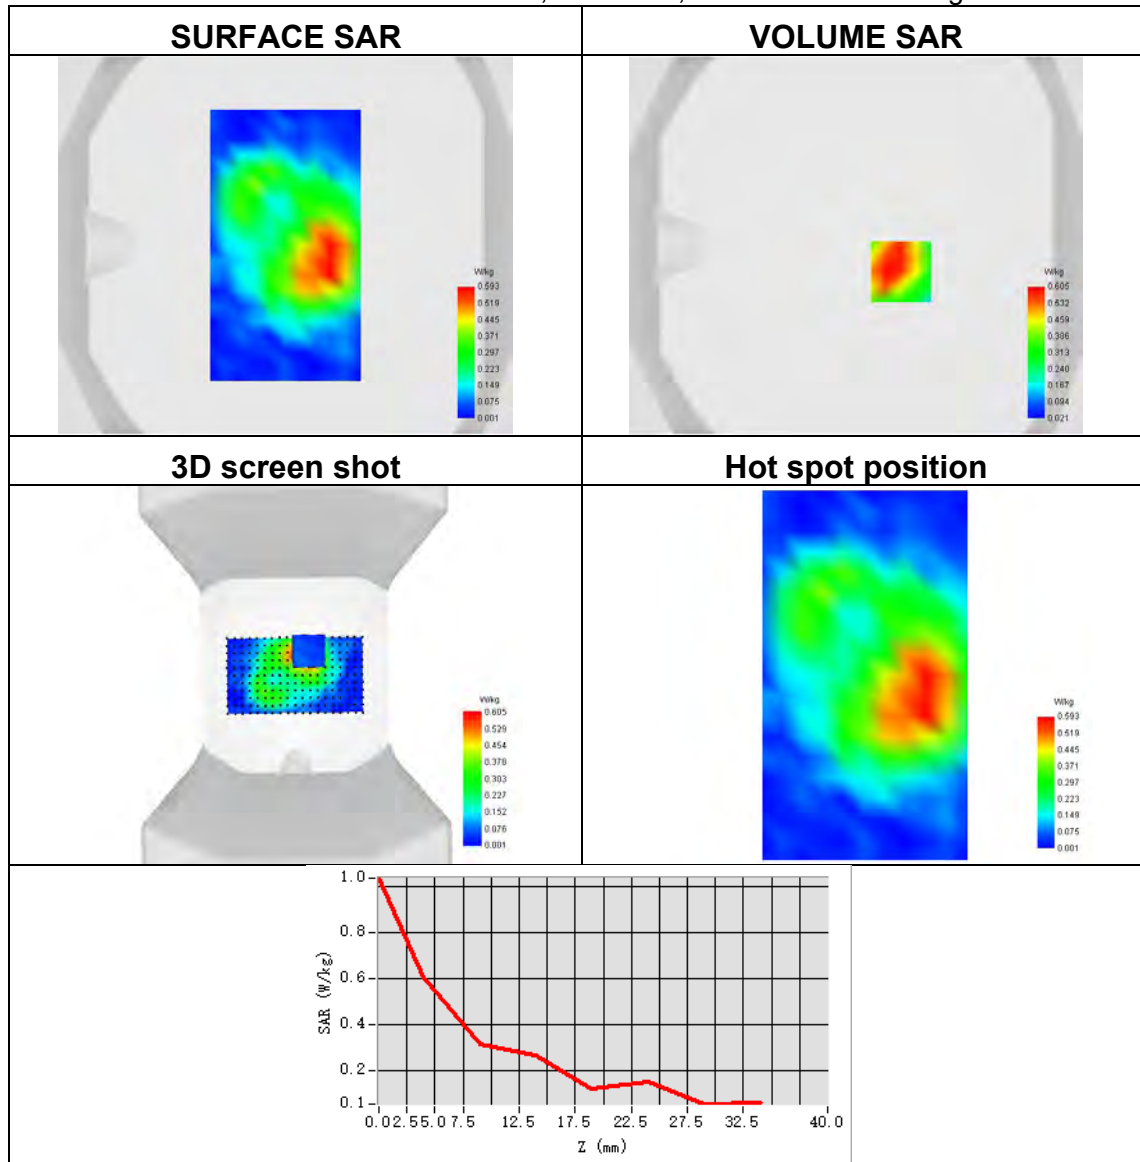






**Plot 13:**

Test Date	2024-01-01
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.517
SAR 1g (W/Kg)	0.874
ConvF	1.95
Relative permittivity	41.40
Conductivity (S/m)	1.43

Maximum location: X=-65.00, Y=-41.00 ; SAR Peak: 1.32 W/kg

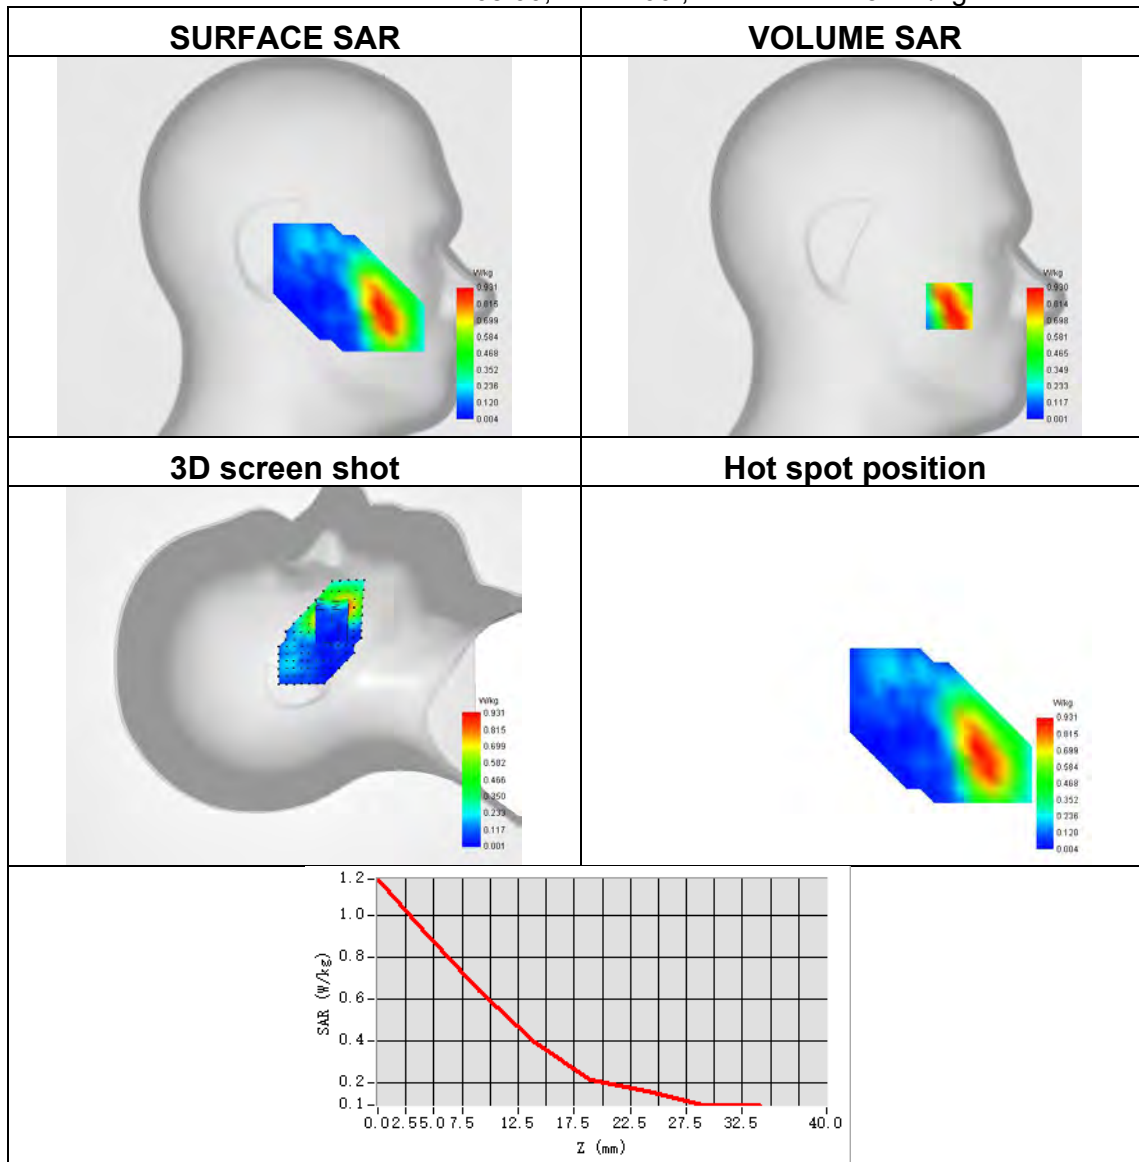




**Plot 14:**

Test Date	2024-01-01
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.837
SAR 1g (W/Kg)	1.320
ConvF	1.95
Relative permittivity	41.40
Conductivity (S/m)	1.43

Maximum location: X=-8.00, Y=2.00 ; SAR Peak: 1.95 W/kg

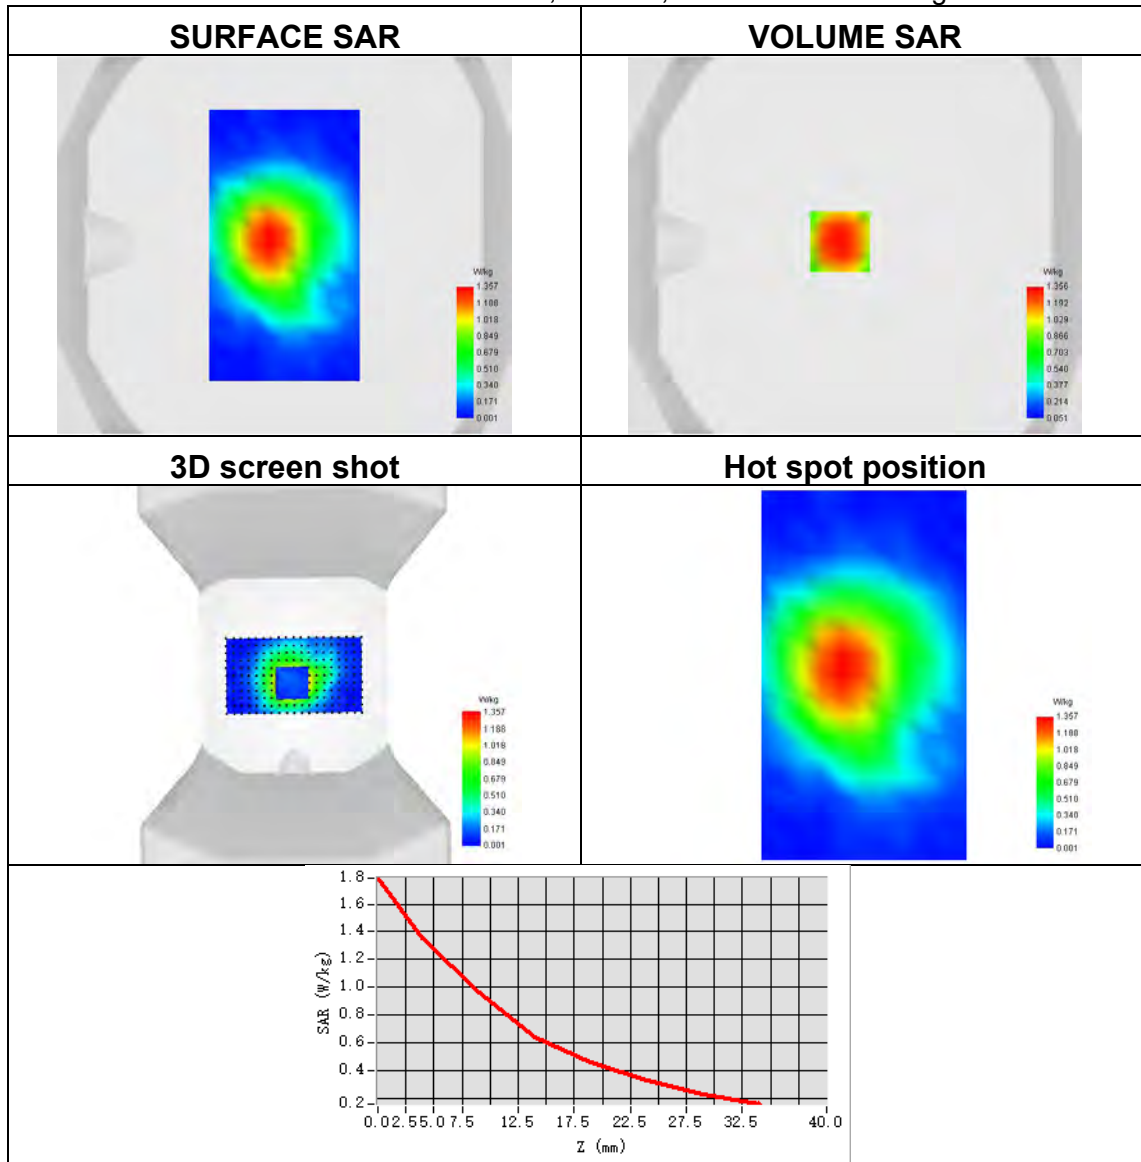




**Plot 15:**

Test Date	2023-12-22
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.178
SAR 1g (W/Kg)	0.306
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=-73.00, Y=-33.00 ; SAR Peak: 0.53 W/kg

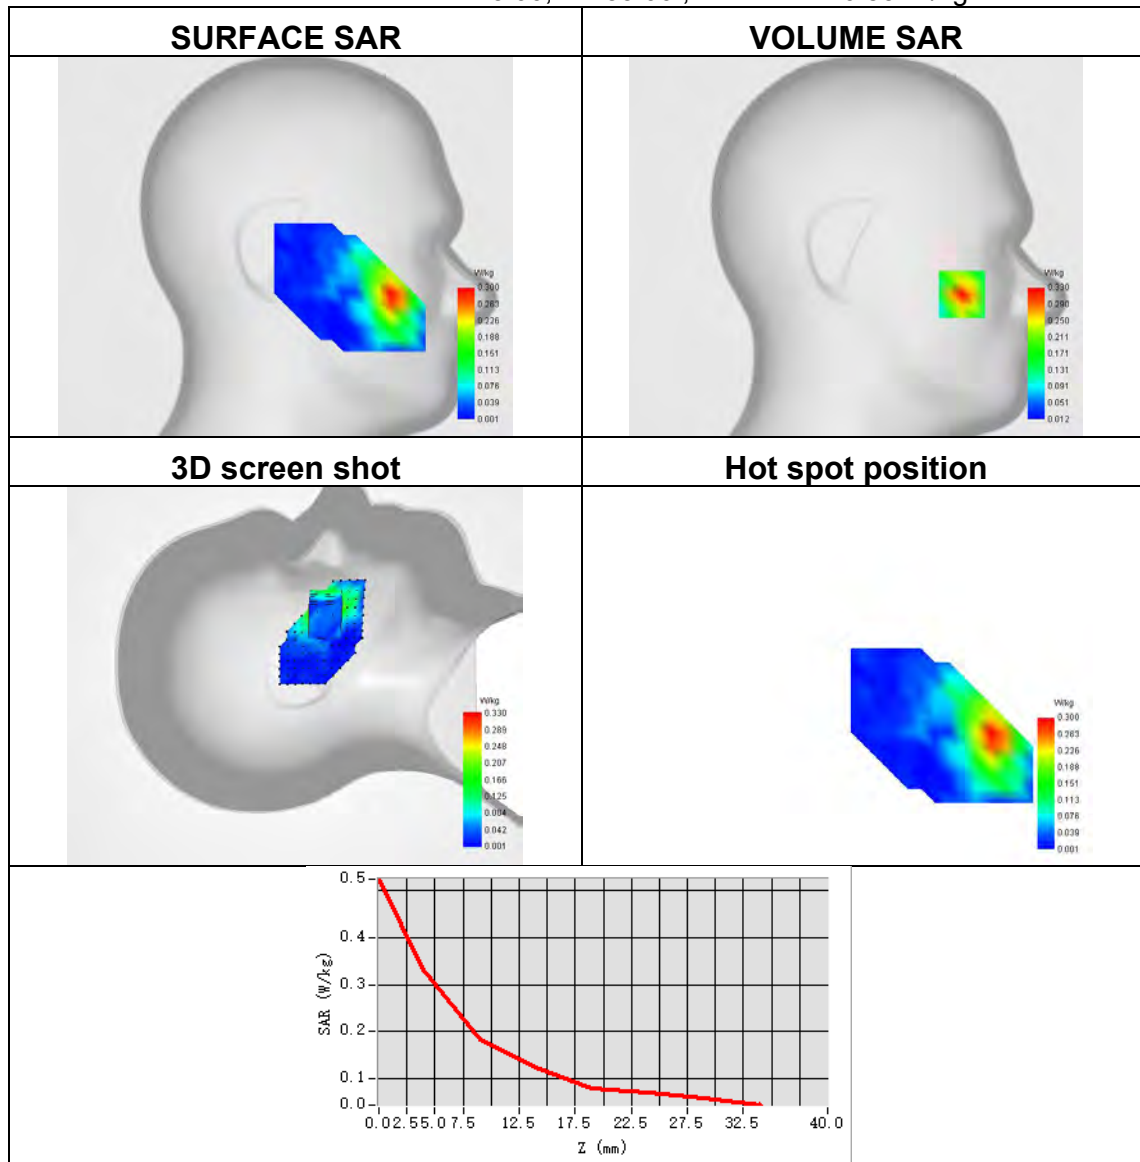




**Plot 16:**

Test Date	2023-12-22
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.229
SAR 1g (W/Kg)	0.377
ConvF	1.72
Relative permittivity	42.40
Conductivity (S/m)	0.91

Maximum location: X=-16.00, Y=-47.00 ; SAR Peak: 0.36 W/kg

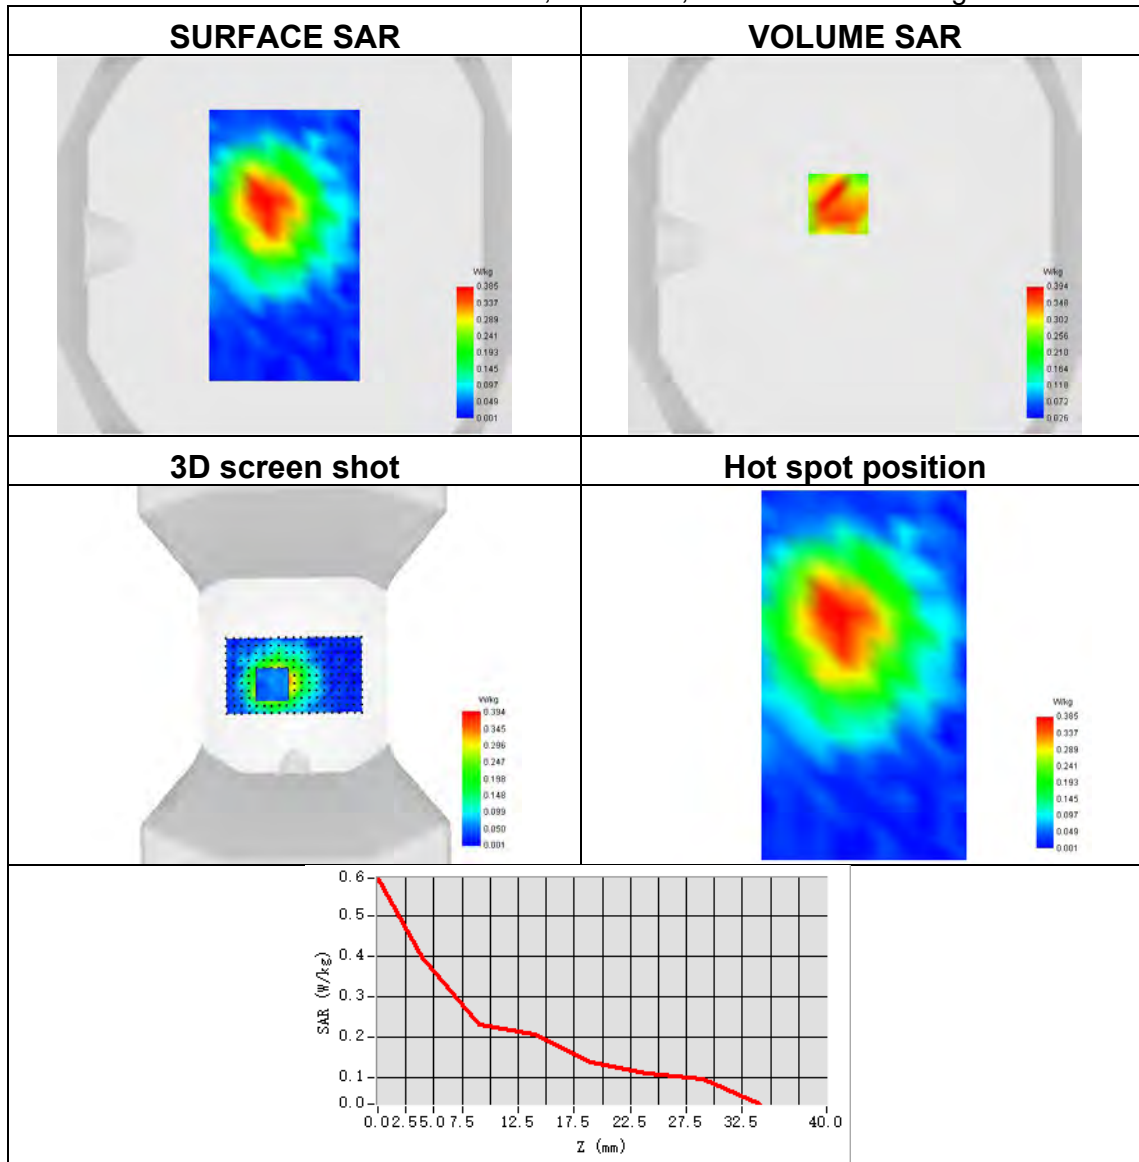




**Plot 17:**

Test Date	2024-01-03
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.309
ConvF	1.72
Relative permittivity	42.97
Conductivity (S/m)	0.85

Maximum location: X=-73.00, Y=-31.00 ; SAR Peak: 0.50 W/kg

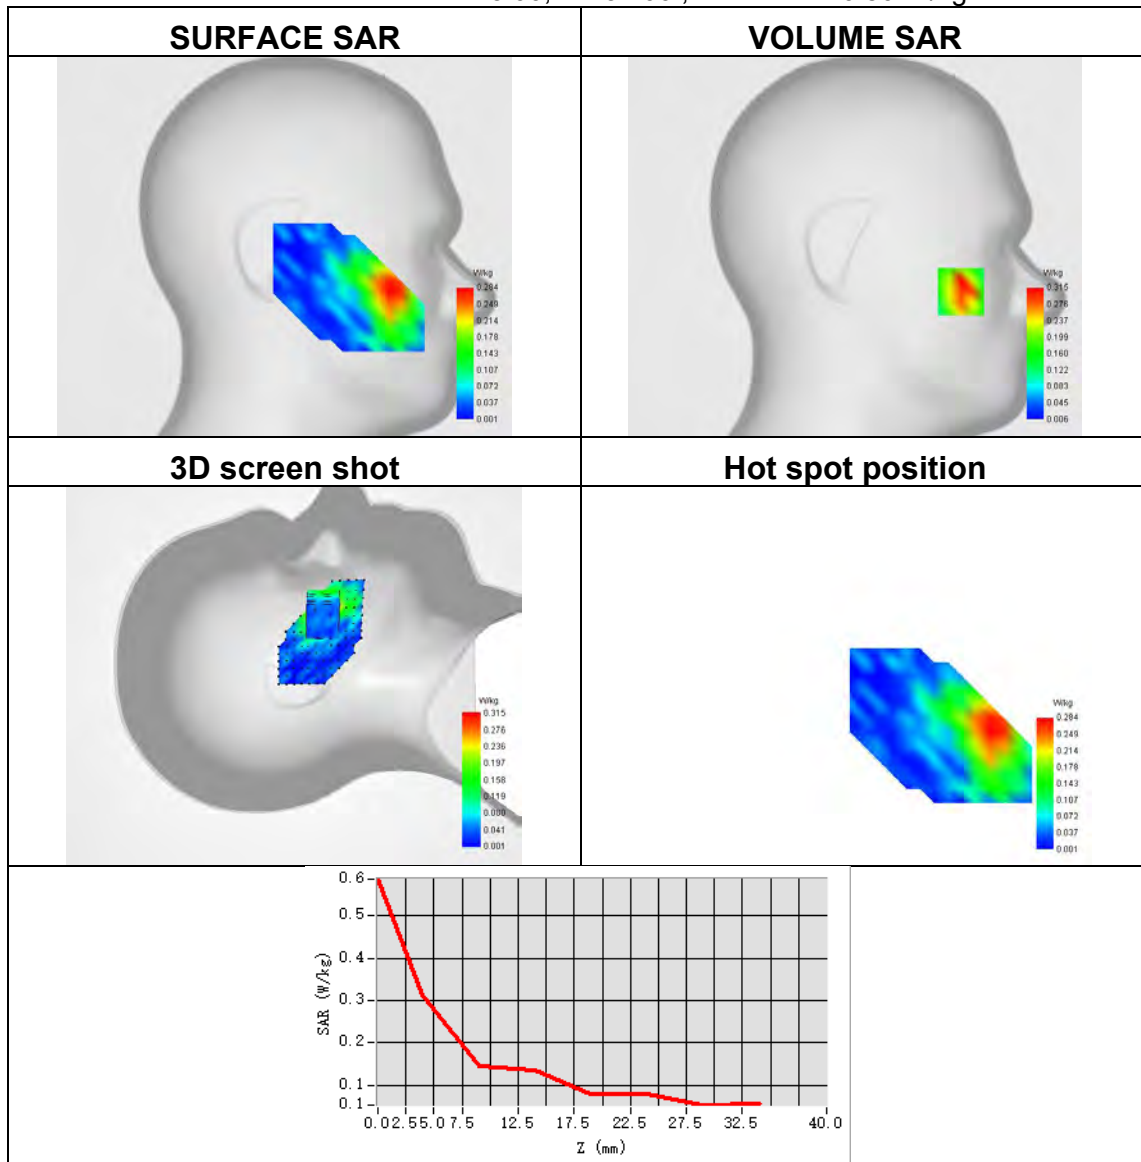




**Plot 18:**

Test Date	2024-01-03
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.173
ConvF	1.72
Relative permittivity	42.97
Conductivity (S/m)	0.85

Maximum location: X=-9.00, Y=15.00 ; SAR Peak: 0.30 W/kg

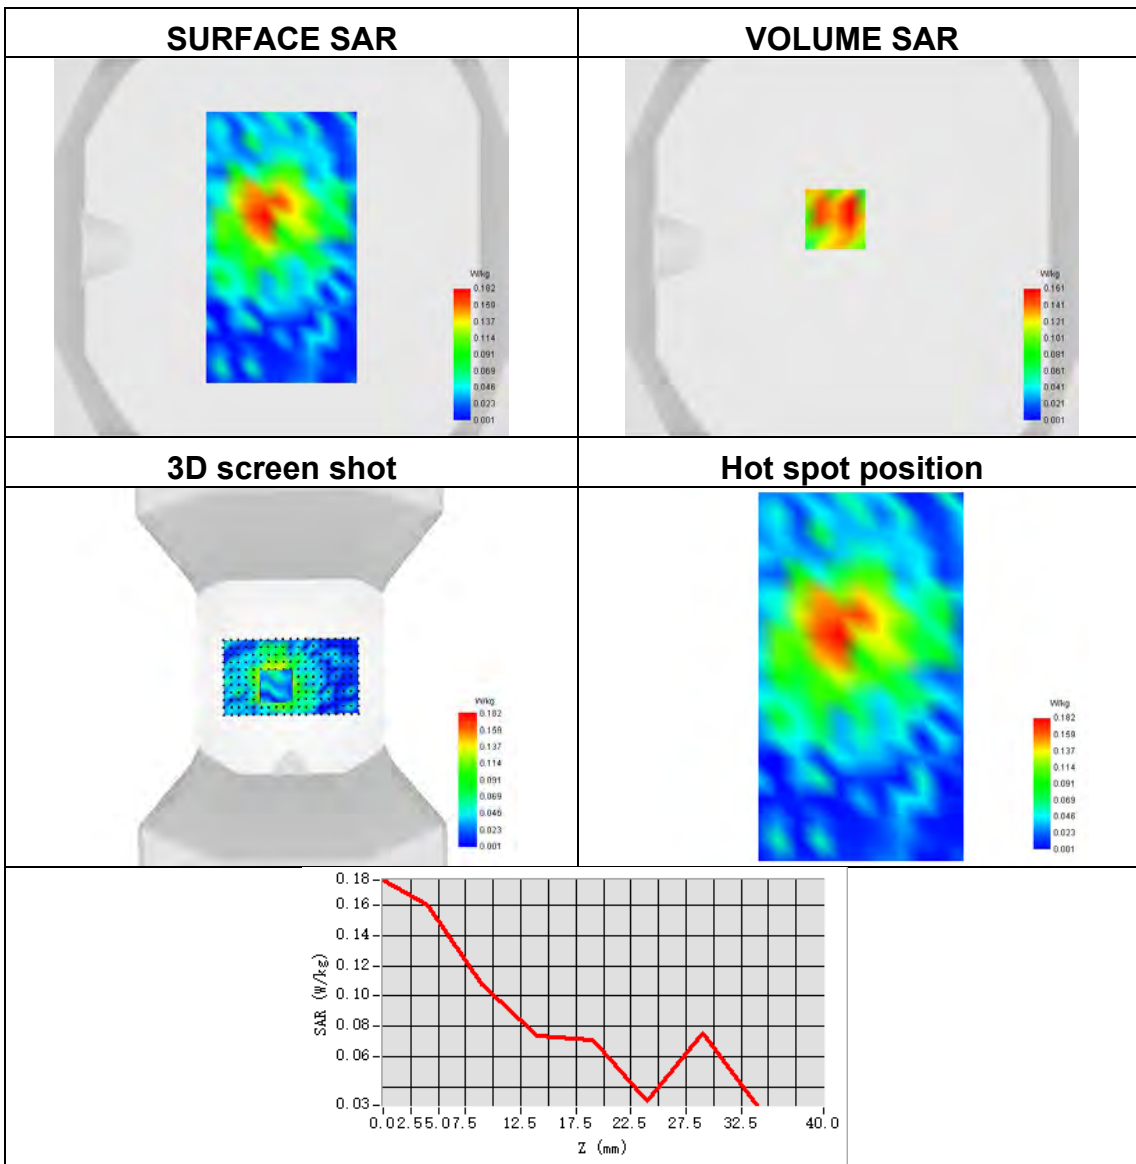




Plot 19:

Test Date	2023-12-30
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.704
SAR 1g (W/Kg)	1.117
ConvF	1.69
Relative permittivity	40.99
Conductivity (S/m)	0.92

Maximum location: X=-73.00, Y=-32.00 ; SAR Peak: 1.66 W/kg

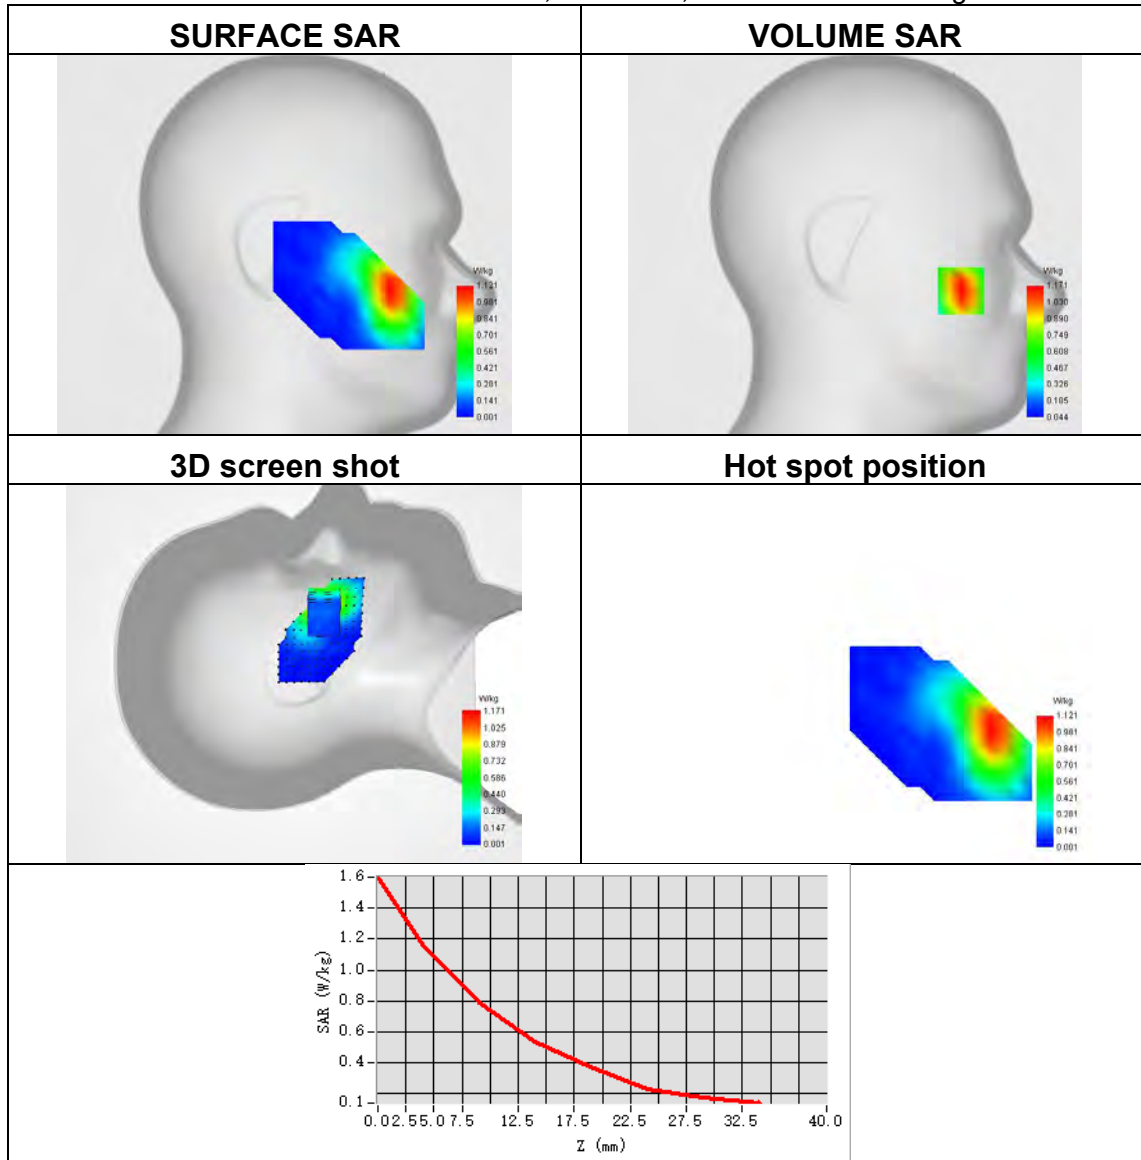




**Plot 20:**

Test Date	2023-12-30
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.630
SAR 1g (W/Kg)	0.958
ConvF	1.69
Relative permittivity	40.99
Conductivity (S/m)	0.92

Maximum location: X=-8.00, Y=17.00 ; SAR Peak: 1.33 W/kg

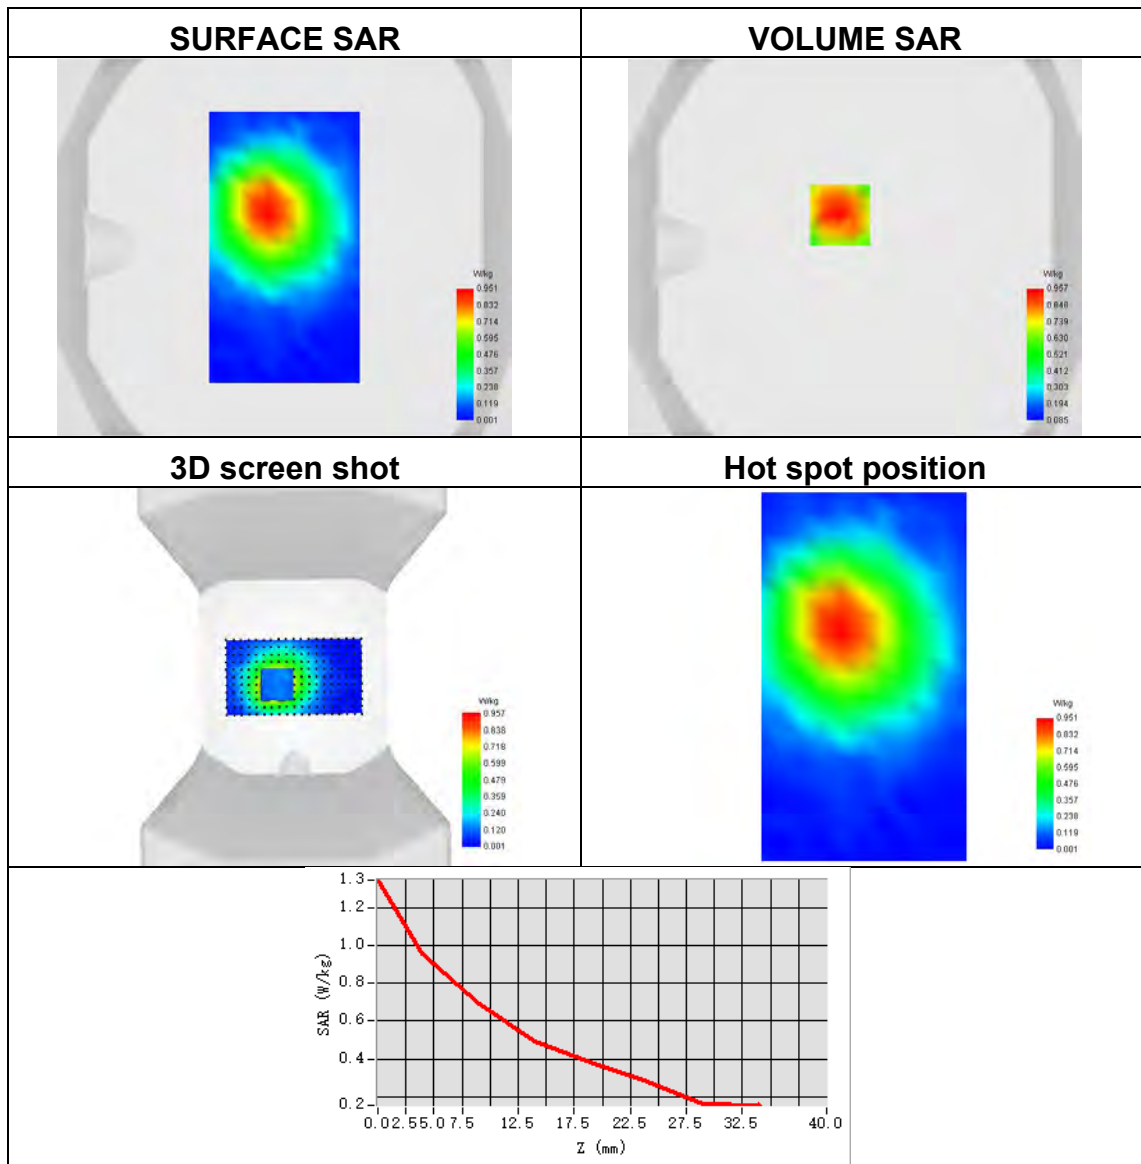






**Plot 21:**

Test Date	2024-01-03
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.218
SAR 1g (W/Kg)	0.373
ConvF	1.72
Relative permittivity	42.97
Conductivity (S/m)	0.85

Maximum location: X=-71.00, Y=-32.00 ; SAR Peak: 0.62 W/kg

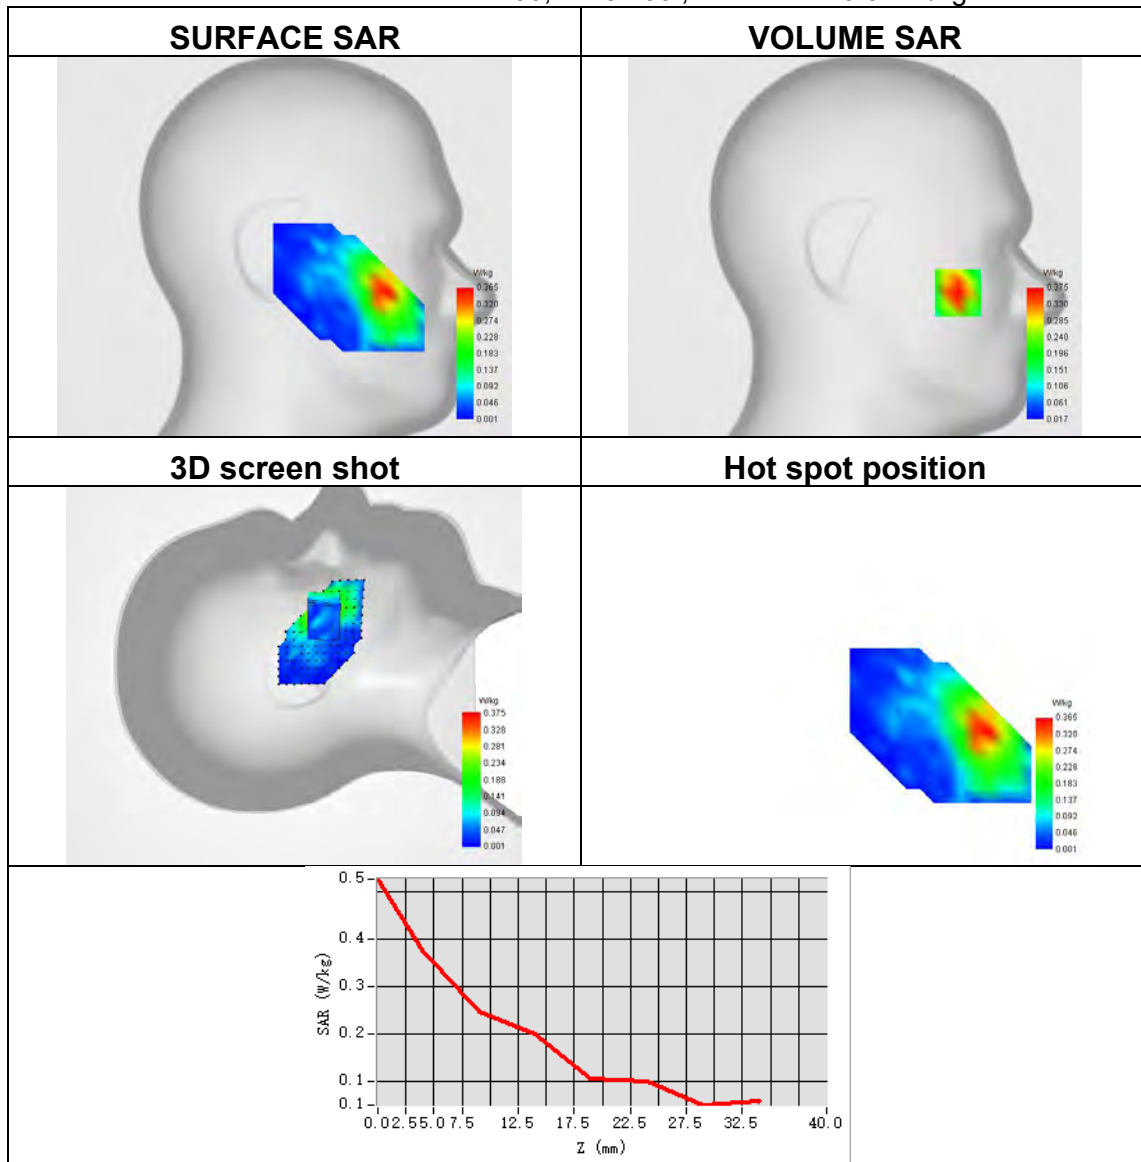




**Plot 22:**

Test Date	2024-01-03
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.081
SAR 1g (W/Kg)	0.147
ConvF	1.72
Relative permittivity	42.97
Conductivity (S/m)	0.85

Maximum location: X=-15.00, Y=31.00 ; SAR Peak: 0.33 W/kg

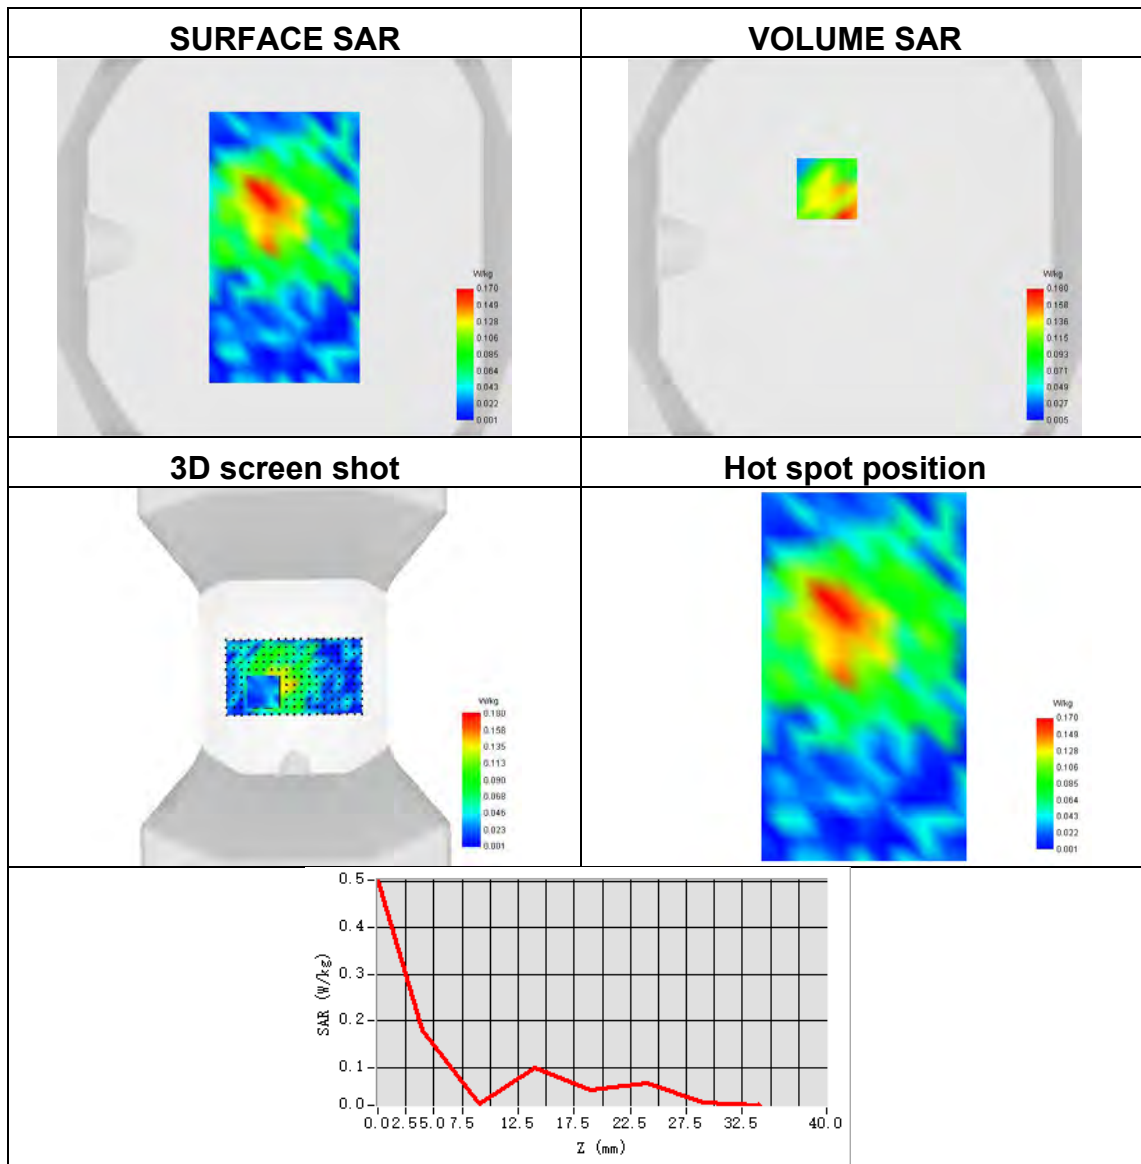




**Plot 23:**

Test Date	2023-12-26
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.713
SAR 1g (W/Kg)	1.137
ConvF	1.95
Relative permittivity	40.58
Conductivity (S/m)	1.41

Maximum location: X=-66.00, Y=-46.00 ; SAR Peak: 1.74 W/kg

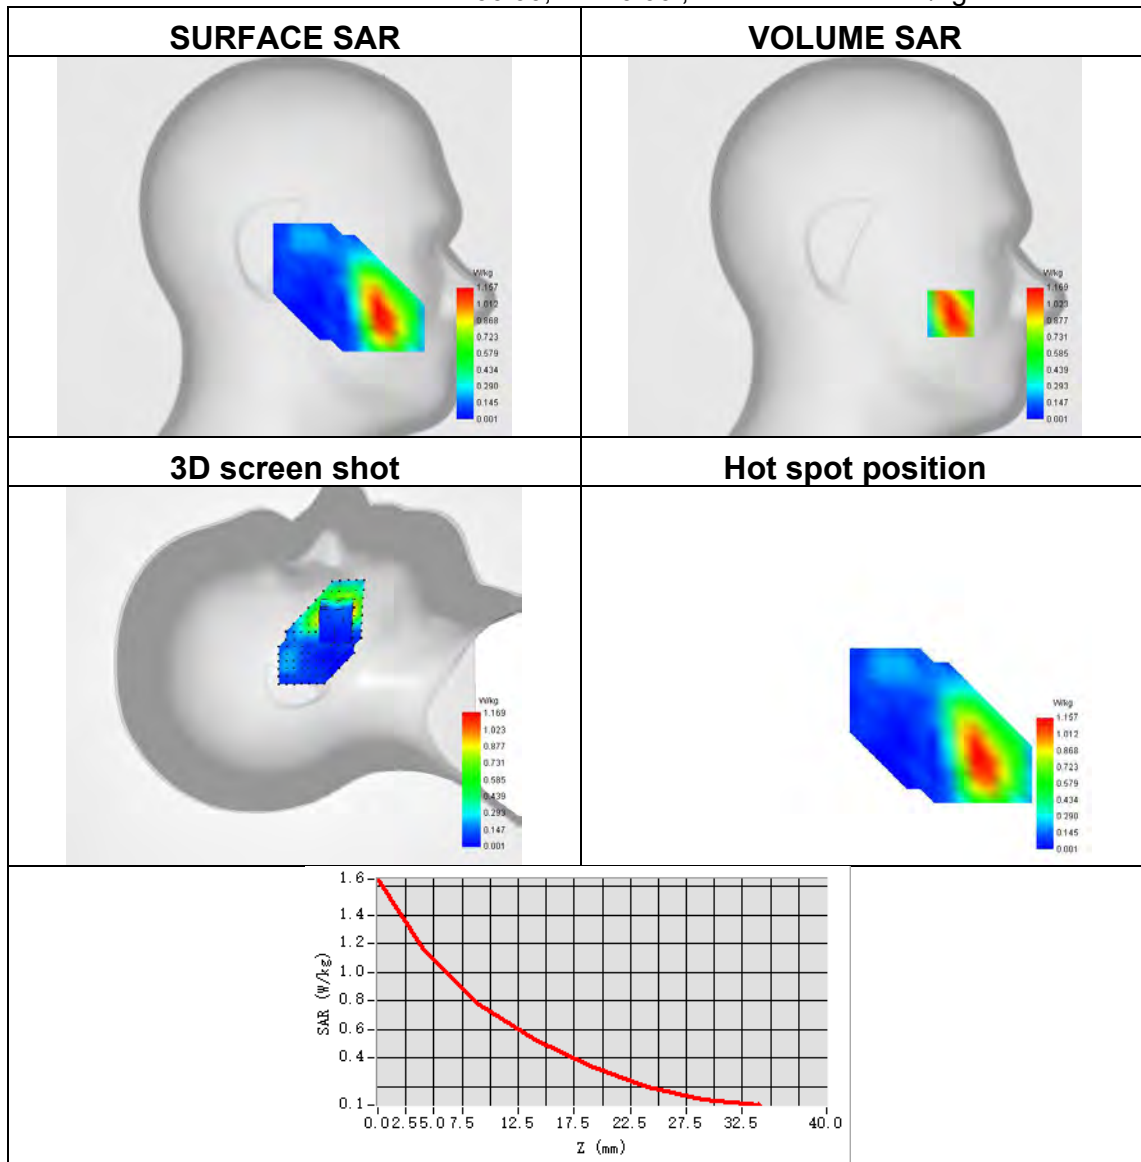




**Plot 24:**

Test Date	2023-12-26
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.818
SAR 1g (W/Kg)	1.297
ConvF	1.95
Relative permittivity	40.58
Conductivity (S/m)	1.41

Maximum location: X=-9.00, Y=3.00 ; SAR Peak: 1.95 W/kg

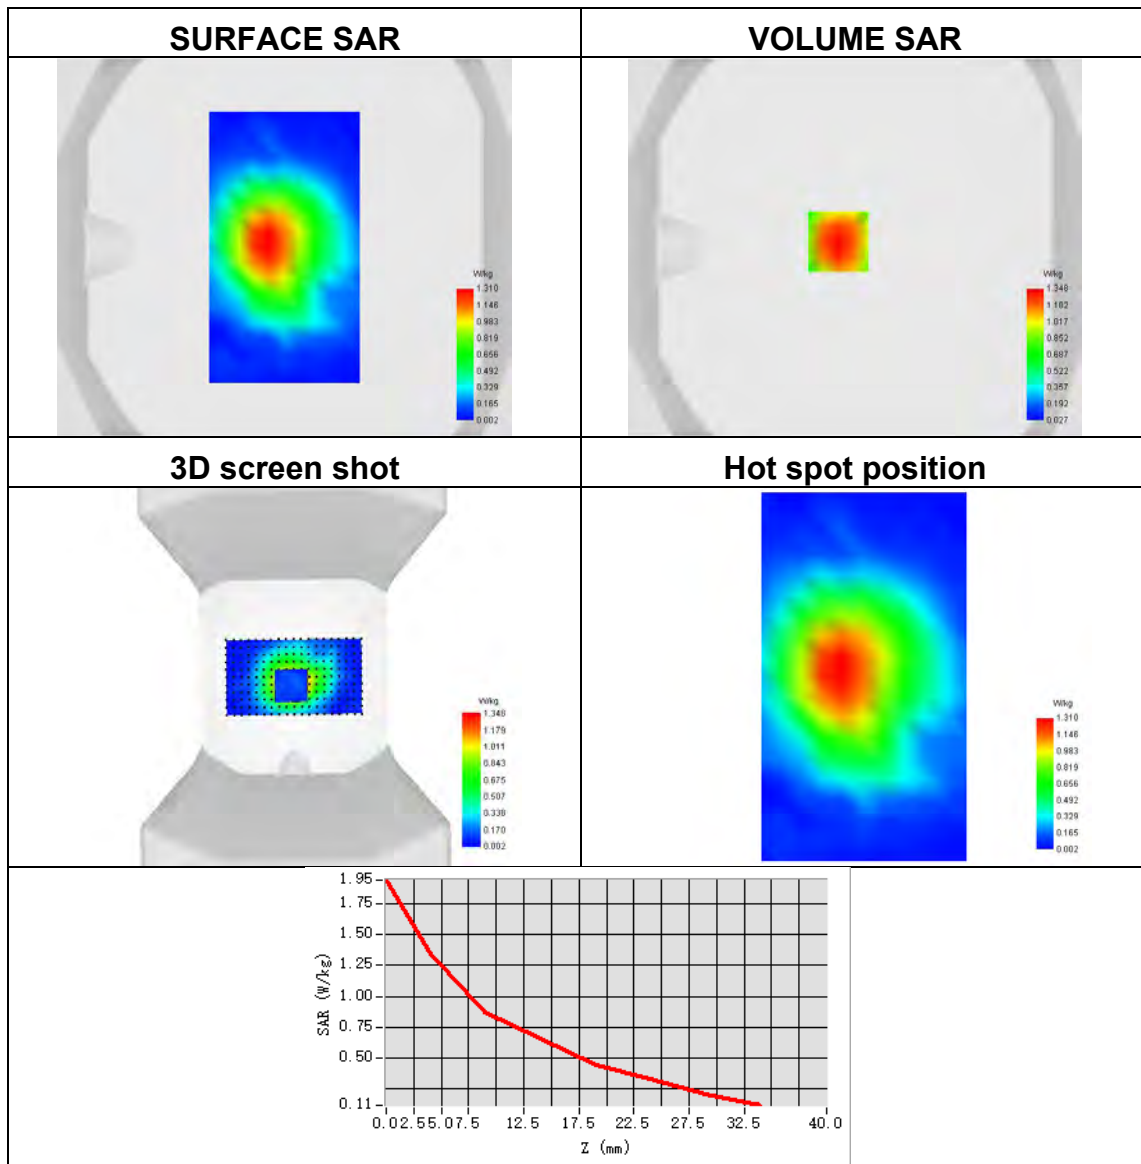



**Appendix C. Probe Calibration and Dipole Calibration Report**  
Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※※