

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Cheek/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.789 mW/g


**Left Cheek/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.899 W/kg

**SAR(1 g) = 0.743 mW/g; SAR(10 g) = 0.563 mW/g**

Maximum value of SAR (measured) = 0.779 mW/g

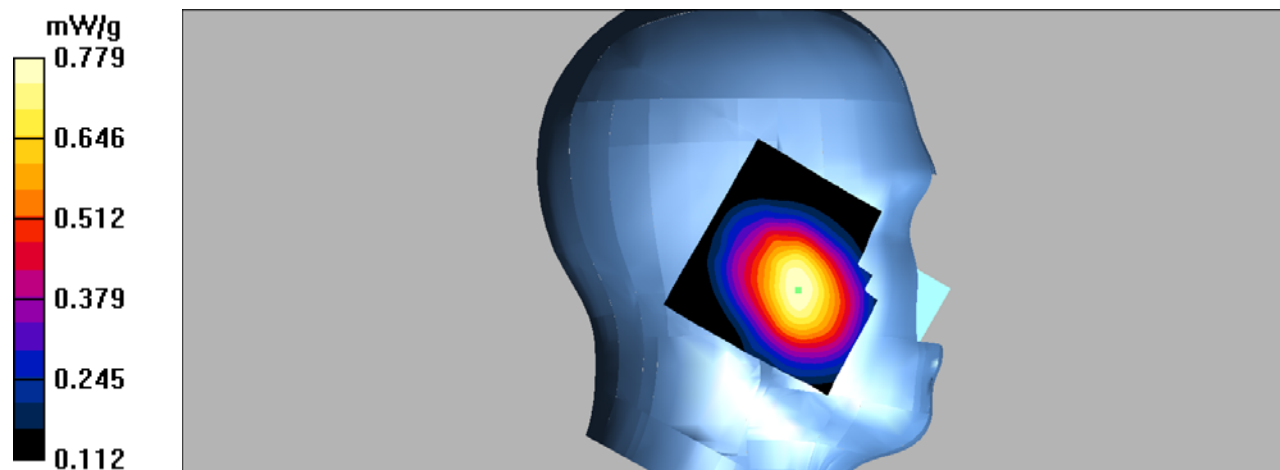

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Tilt/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.472 mW/g


**Left Tilt/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.545 W/kg

**SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.341 mW/g**

Maximum value of SAR (measured) = 0.464 mW/g

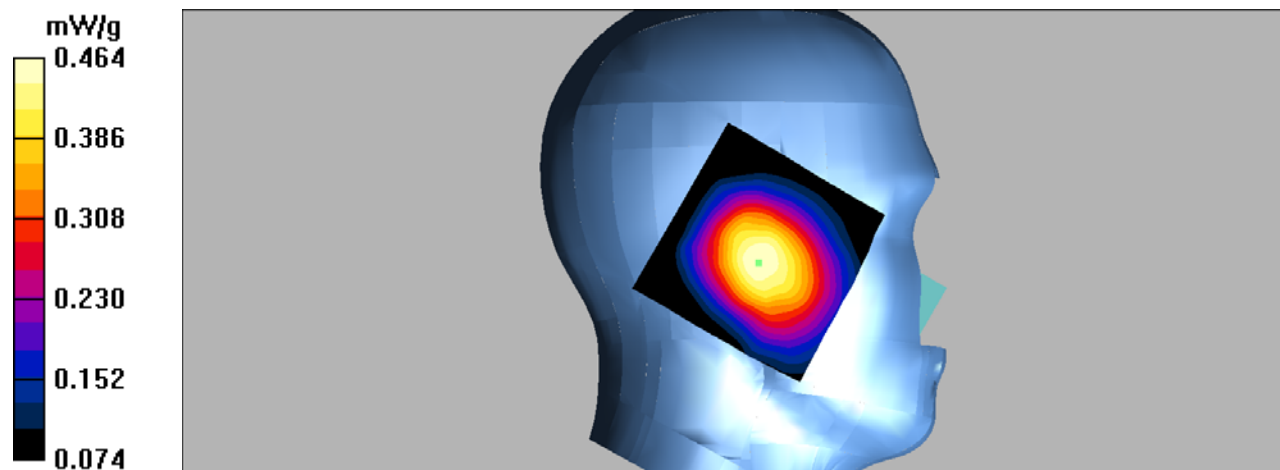

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Cheek/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.811 mW/g


**Right Cheek/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.899 W/kg

**SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.576 mW/g**

Maximum value of SAR (measured) = 0.792 mW/g

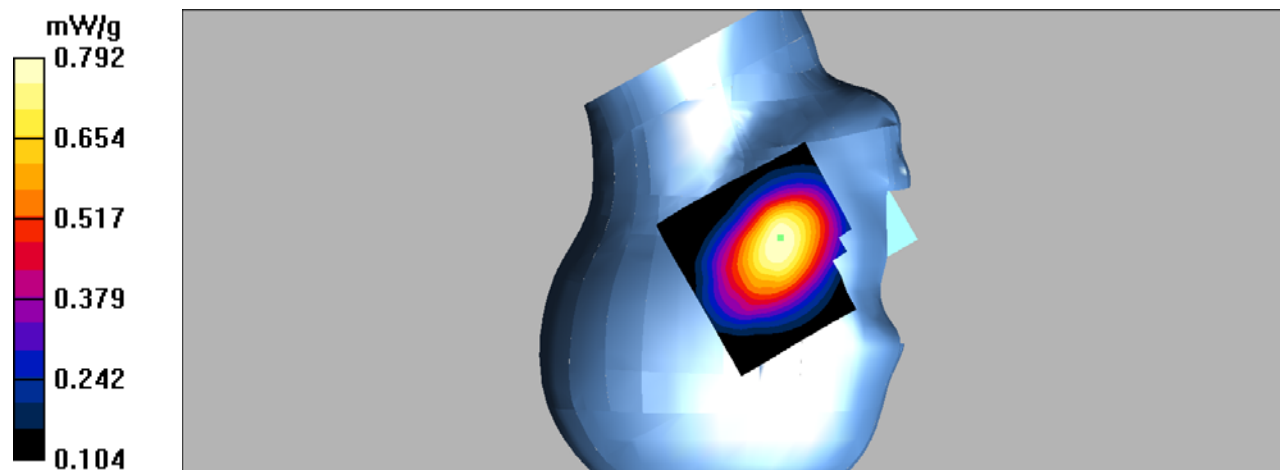

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Tilt/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.432 mW/g


**Right Tilt/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.580 W/kg

**SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.292 mW/g**

Maximum value of SAR (measured) = 0.397 mW/g

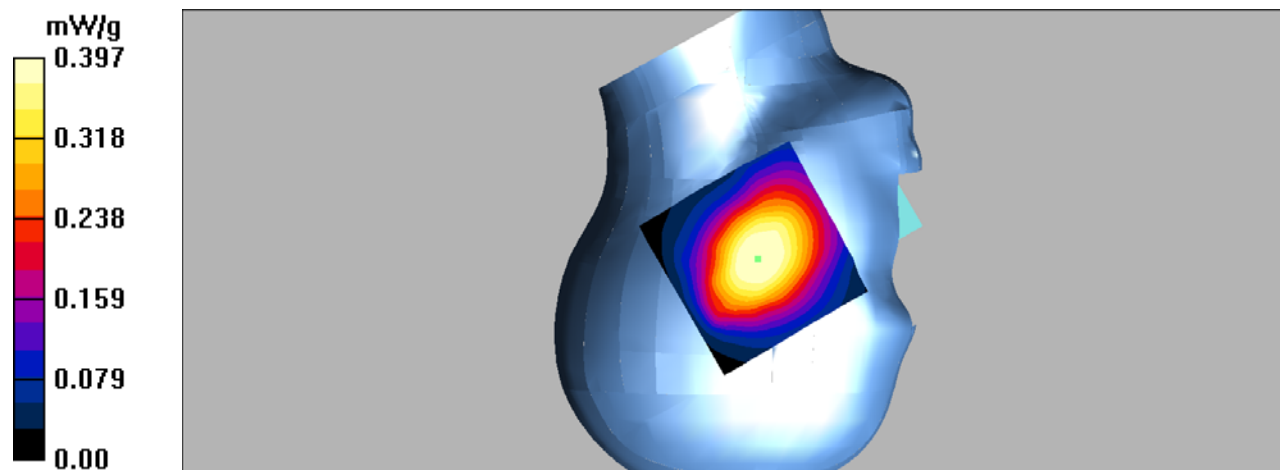

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 54.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Worn Back/GSM 850 Low/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.36 mW/g


**Body Worn Back/GSM 850 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.7 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.976 mW/g**

Maximum value of SAR (measured) = 1.36 mW/g

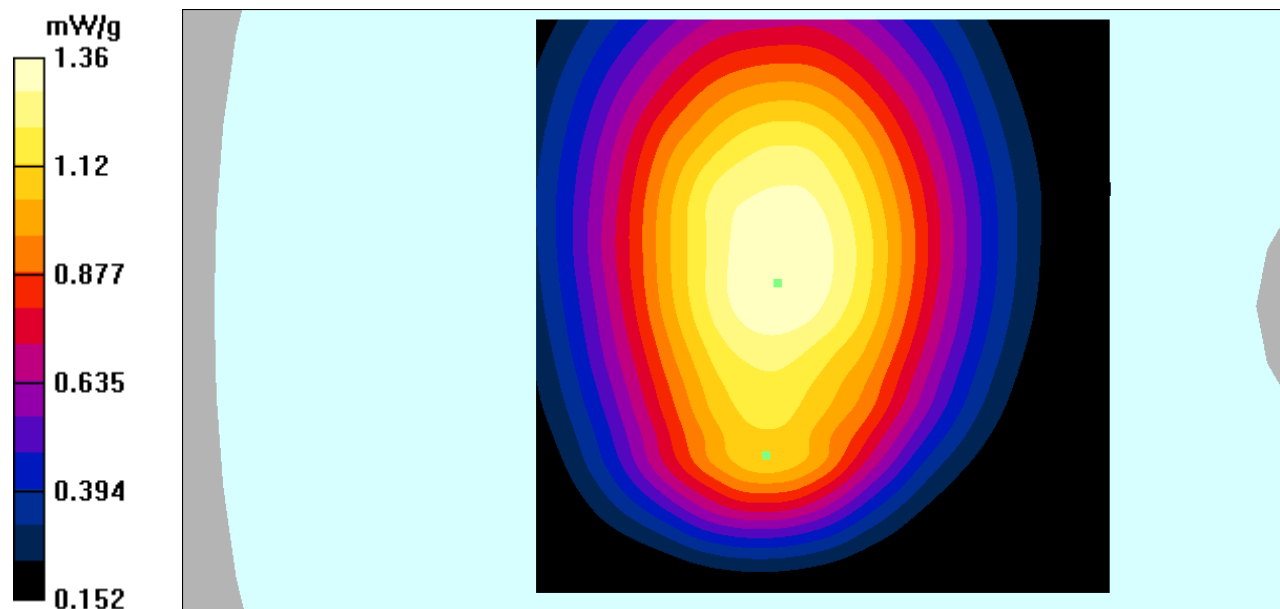

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Worn Back/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.43 mW/g


**Body Worn Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.9 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 1.03 mW/g**

Maximum value of SAR (measured) = 1.43 mW/g

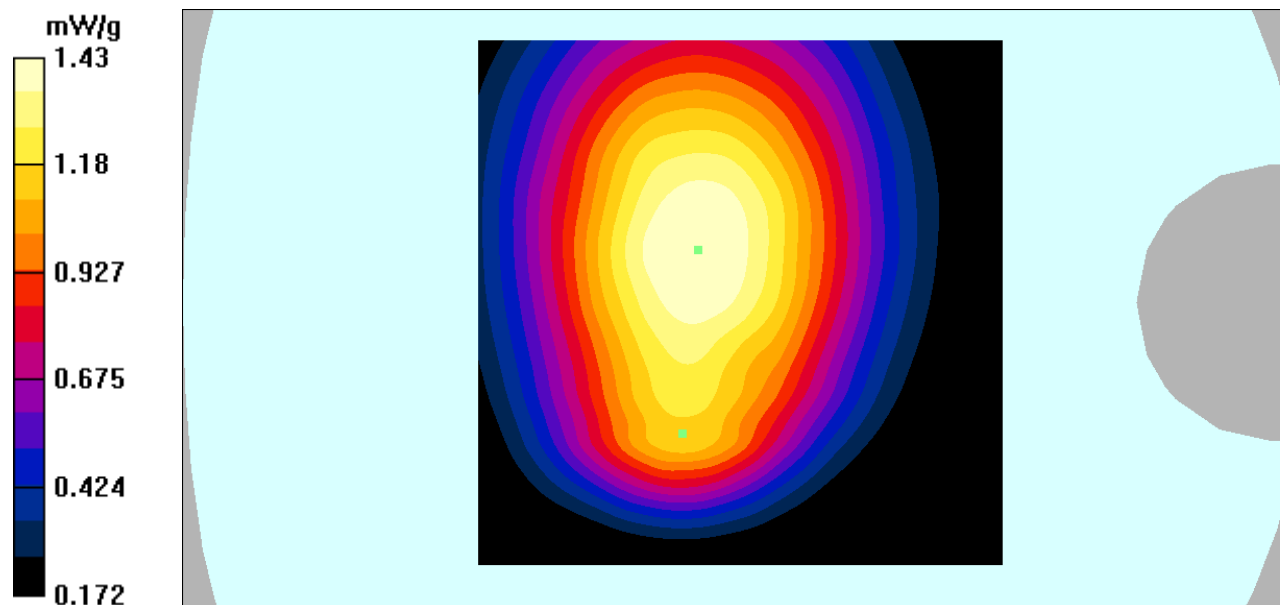

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 55.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Worn Back/GSM 850 High/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.34 mW/g


**Body Worn Back/GSM 850 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.4 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.945 mW/g**

Maximum value of SAR (measured) = 1.30 mW/g

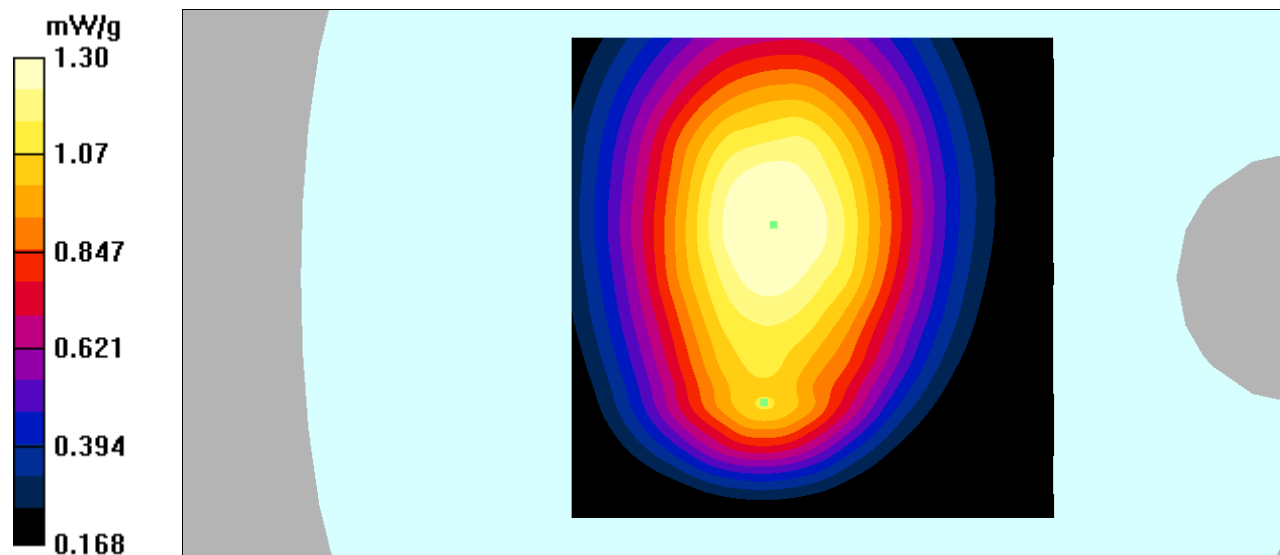

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 824.2 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 54.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/GSM 850 Low/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 1.56 mW/g

**Body Back/GSM 850 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 39.3 V/m; Power Drift = 0.010 dB  
Peak SAR (extrapolated) = 1.93 W/kg  
**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.971 mW/g**  
Maximum value of SAR (measured) = 1.55 mW/g

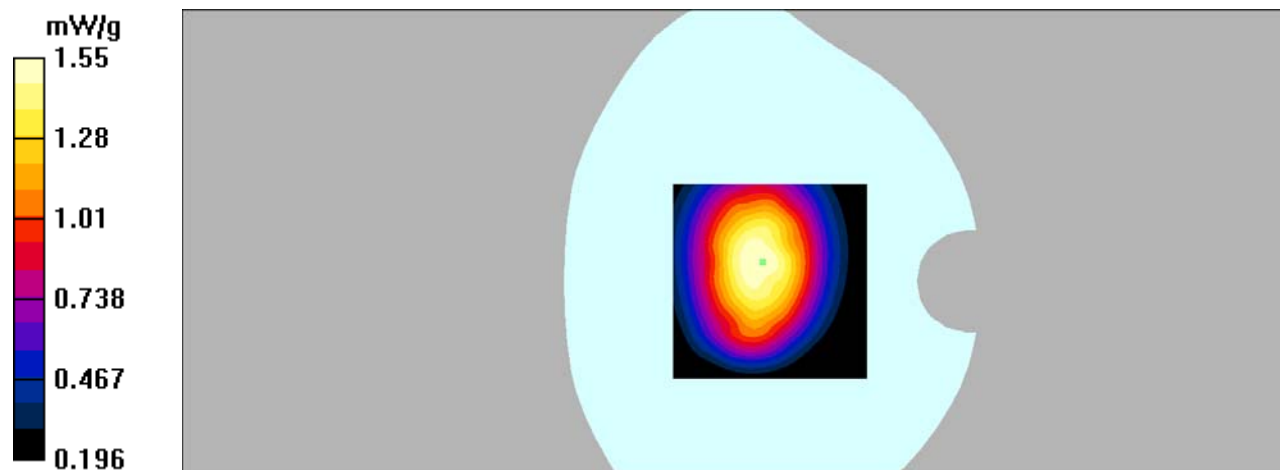



**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/GSM 850 Mid/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 1.57 mW/g

**Body Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 39.5 V/m; Power Drift = 0.041 dB  
Peak SAR (extrapolated) = 1.89 W/kg  
**SAR(1 g) = 1.20 mW/g; SAR(10 g) = 0.924 mW/g**  
Maximum value of SAR (measured) = 1.59 mW/g

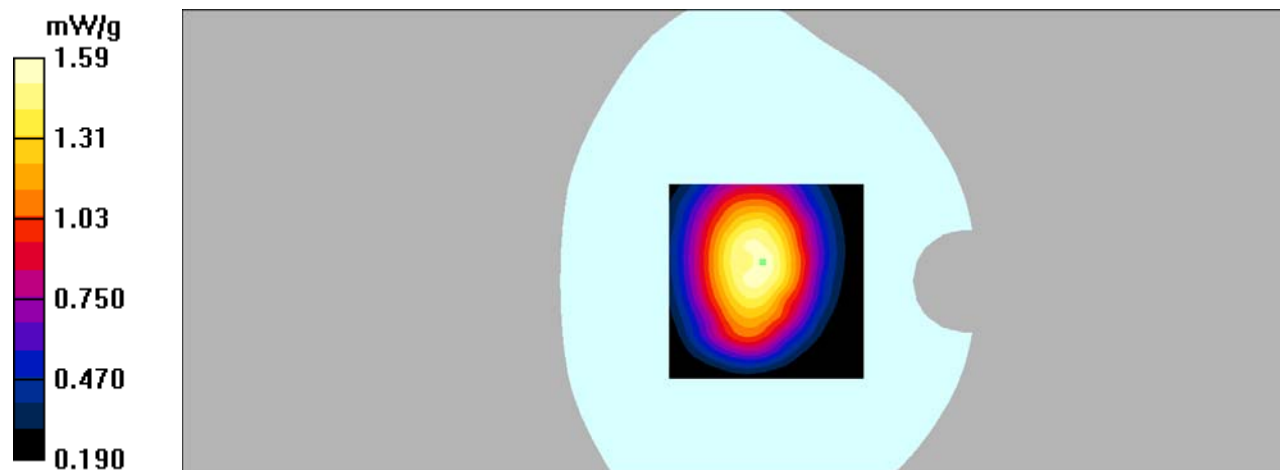

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-4slots; Frequency: 848.8 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 55.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/GSM 850 High/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 1.61 mW/g


**Body Back/GSM 850 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
dz=5mm

Reference Value = 38.6 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.913 mW/g**

Maximum value of SAR (measured) = 1.60 mW/g

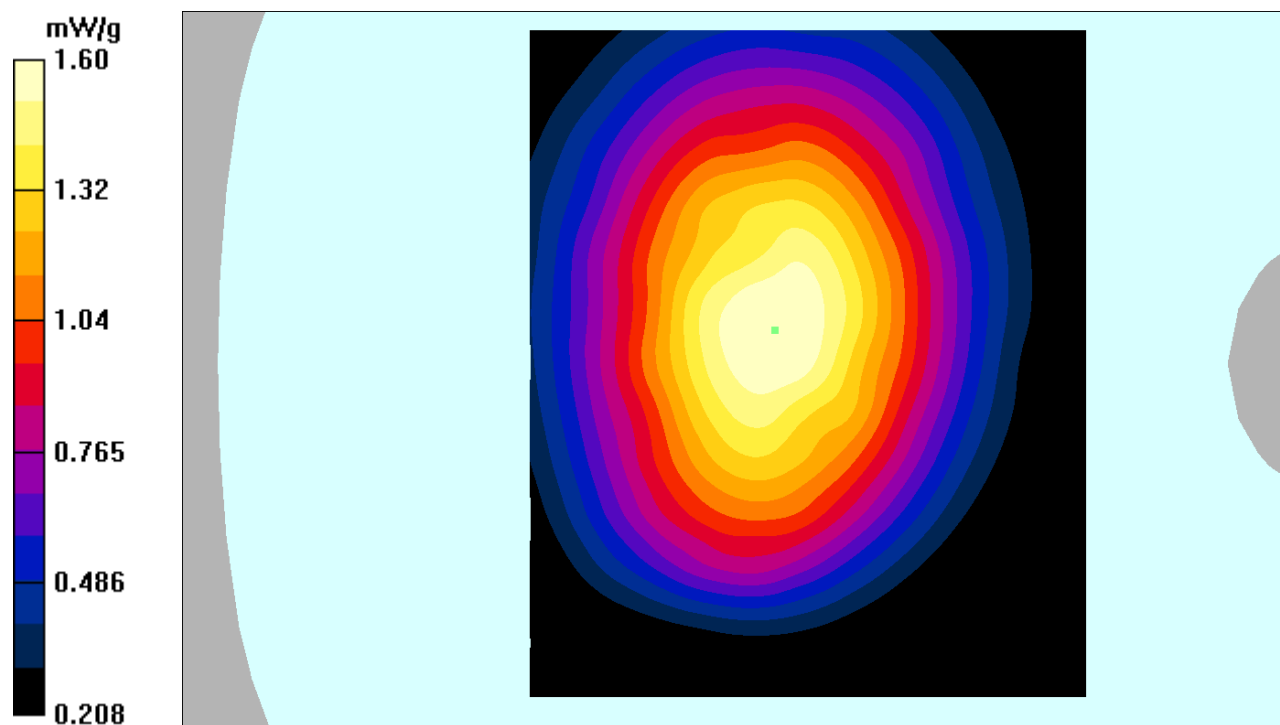

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 54.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/GSM 850 Low/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 1.03 mW/g

**Body Left/GSM 850 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 30.7 V/m; Power Drift = -0.093 dB  
Peak SAR (extrapolated) = 1.24 W/kg  
**SAR(1 g) = 0.945 mW/g; SAR(10 g) = 0.674 mW/g**  
Maximum value of SAR (measured) = 1.03 mW/g

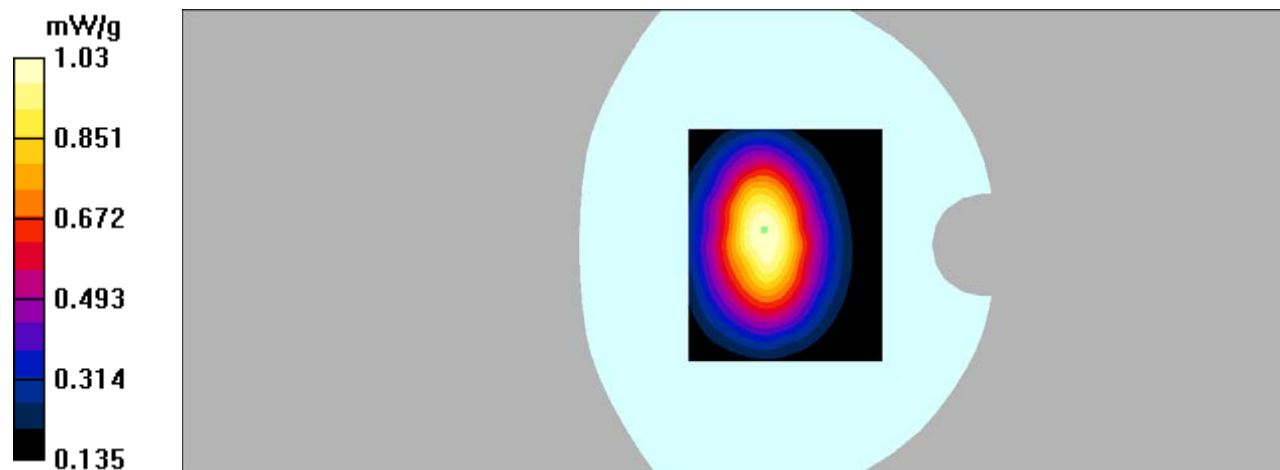

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/GSM 850 Mid/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.950 mW/g

**Body Left/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 30.4 V/m; Power Drift = -0.108 dB  
Peak SAR (extrapolated) = 1.13 W/kg  
**SAR(1 g) = 0.860 mW/g; SAR(10 g) = 0.616 mW/g**  
Maximum value of SAR (measured) = 0.936 mW/g

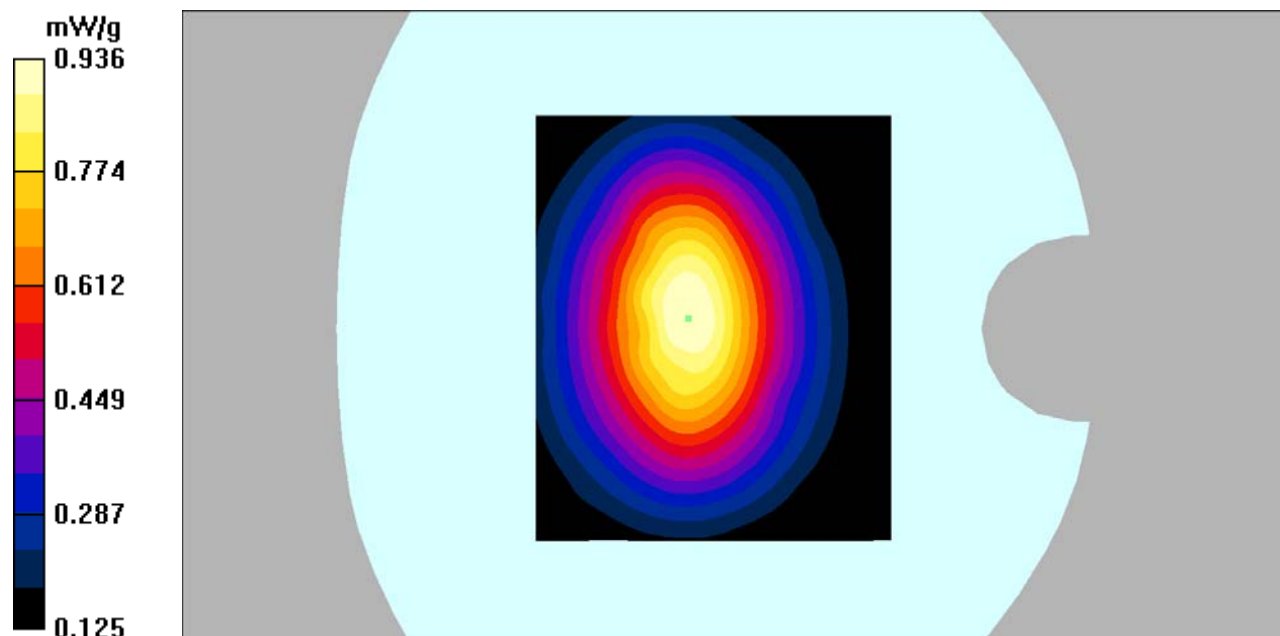

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 848.8 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 55.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/GSM 850 High/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.746 mW/g

**Body Left/GSM 850 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 22.2 V/m; Power Drift = -0.110 dB  
Peak SAR (extrapolated) = 0.970 W/kg  
**SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.497 mW/g**  
Maximum value of SAR (measured) = 0.745 mW/g

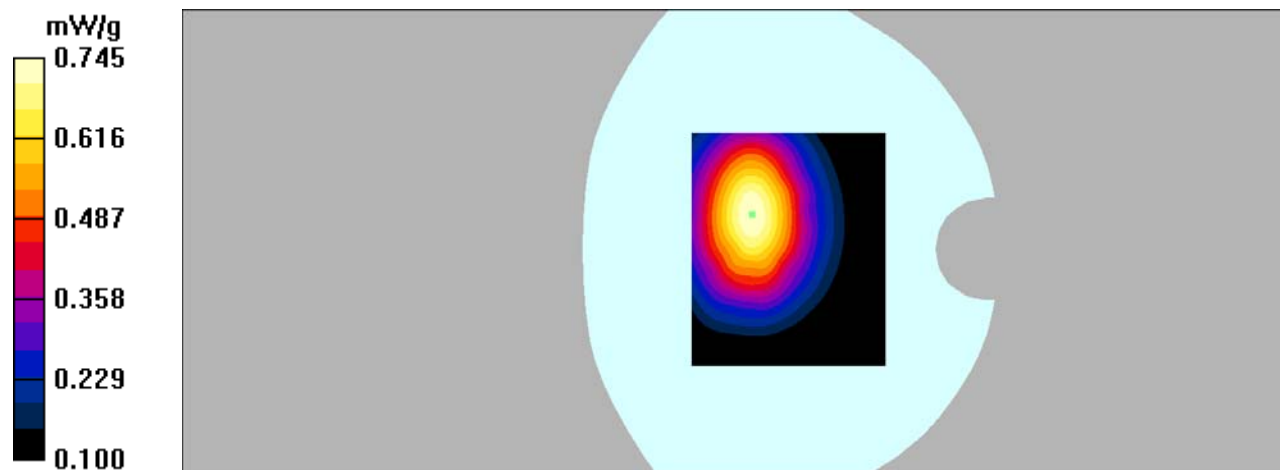

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-4slots; Frequency: 824.2 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 54.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/GSM 850 Low/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.922 mW/g


**Body Right/GSM 850 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
dz=5mm

Reference Value = 30.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.605 mW/g**

Maximum value of SAR (measured) = 0.901 mW/g

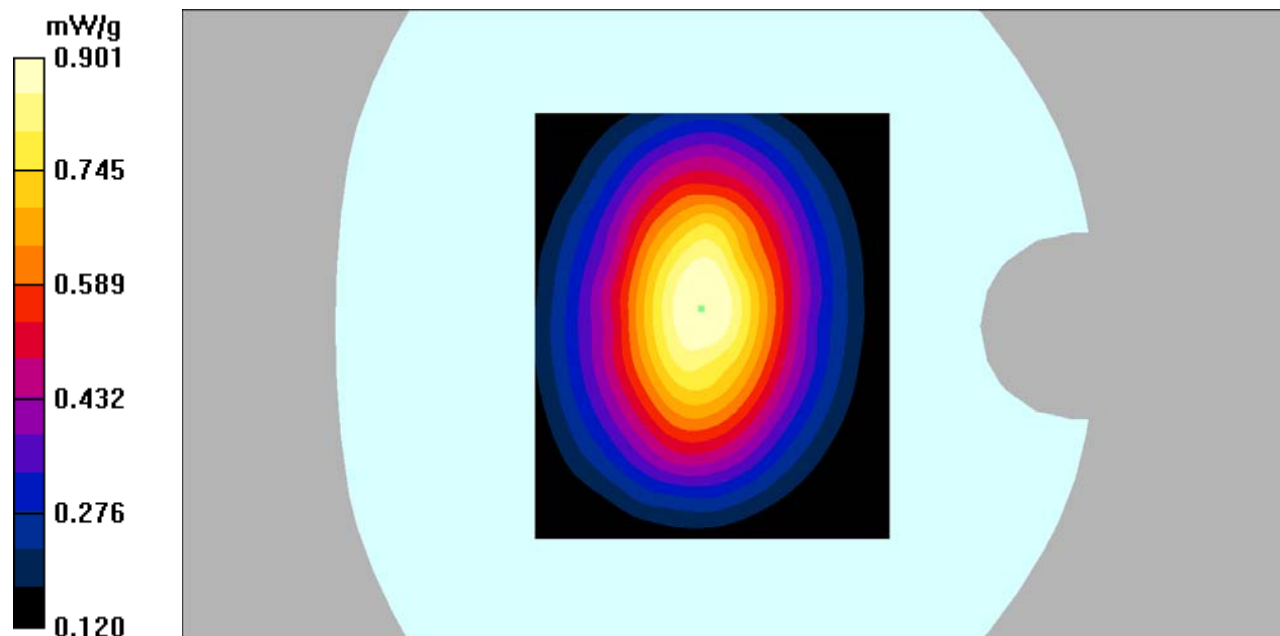

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**


Communication System: GPRS bands-4slots; Frequency: 836.6 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/GSM 850 Mid/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.888 mW/g

**Body Right/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 29.8 V/m; Power Drift = -0.001 dB  
Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.592 mW/g**  
Maximum value of SAR (measured) = 0.889 mW/g

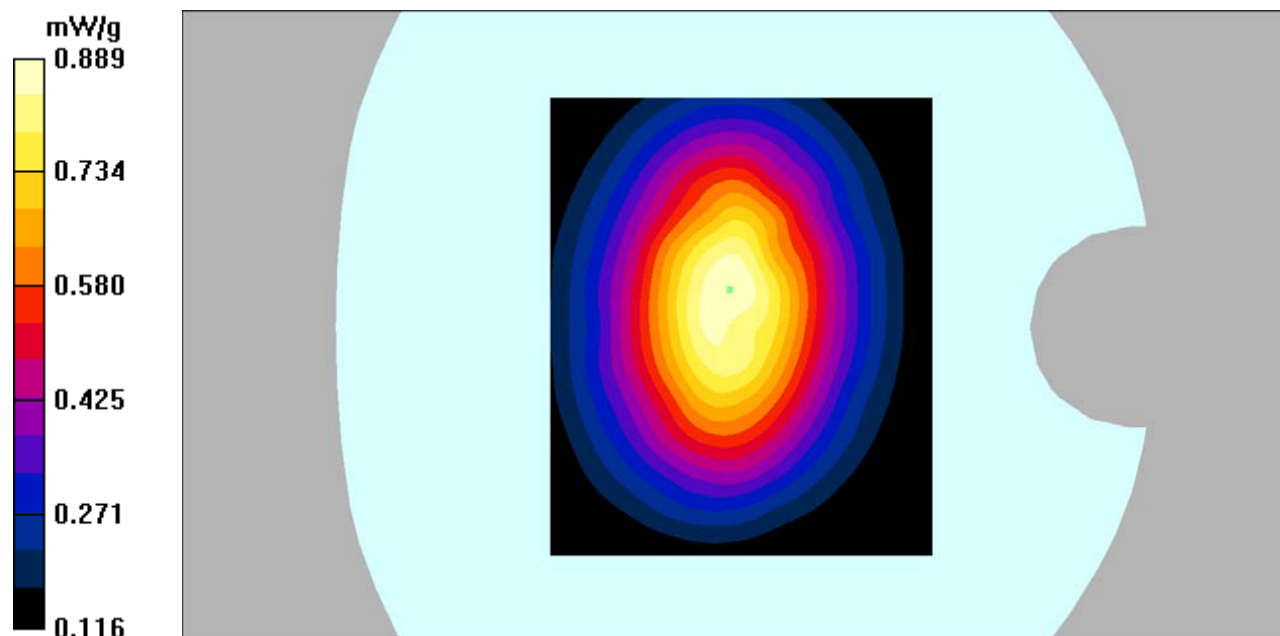

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-4slots; Frequency: 848.8 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 55.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/GSM 850 High/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.932 mW/g


**Body Right/GSM 850 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
dz=5mm

Reference Value = 29.5 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.614 mW/g**

Maximum value of SAR (measured) = 0.922 mW/g

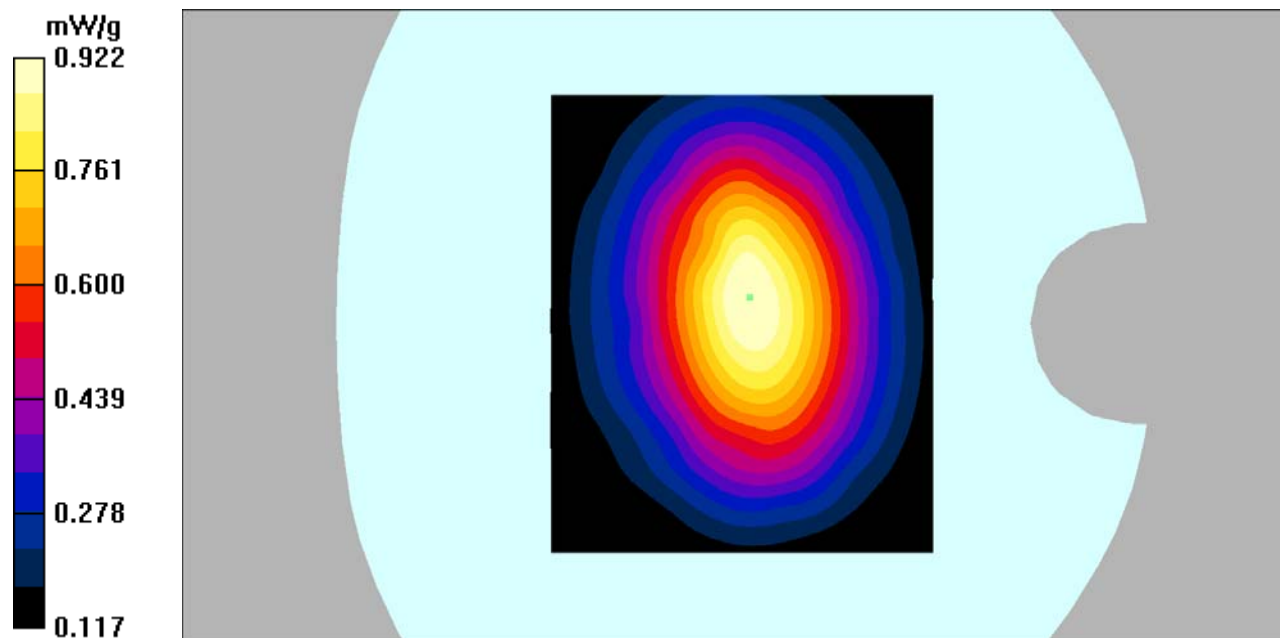



**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-4slots; Frequency: 836.6 MHz;Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Bottom/GSM 850 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.116 mW/g


**Body Bottom/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.062 mW/g**

Maximum value of SAR (measured) = 0.114 mW/g

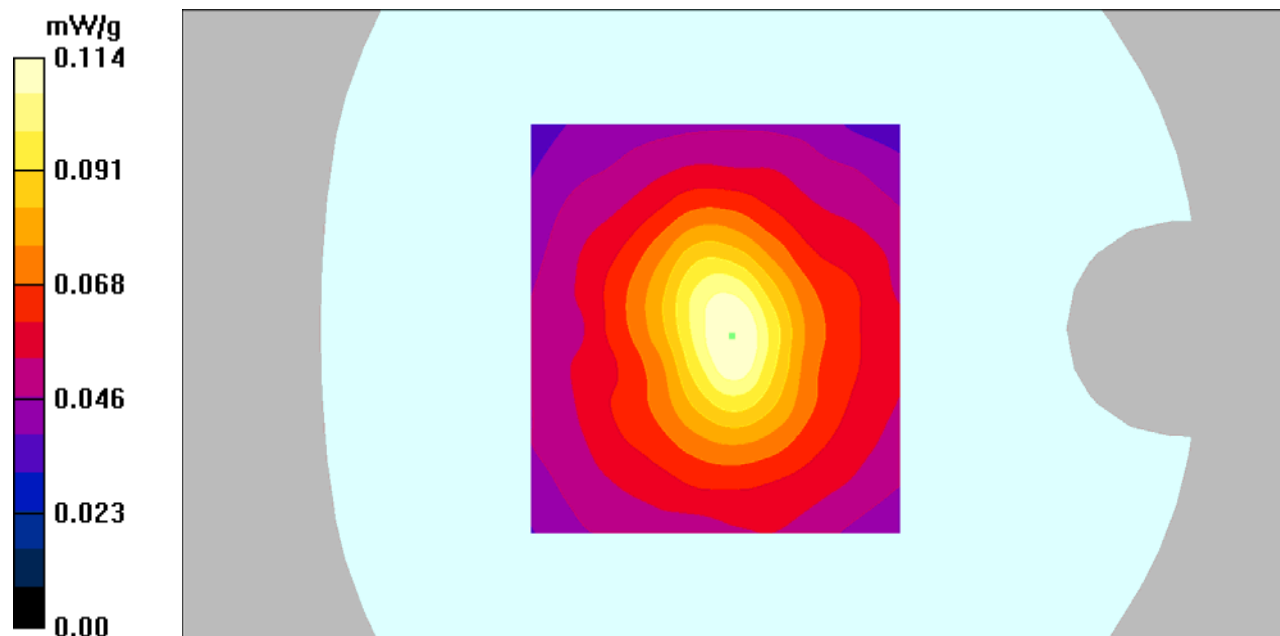

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Cheek/GSM 1900 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.516 mW/g


**Left Cheek/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.83 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.745 W/kg

**SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.512 mW/g

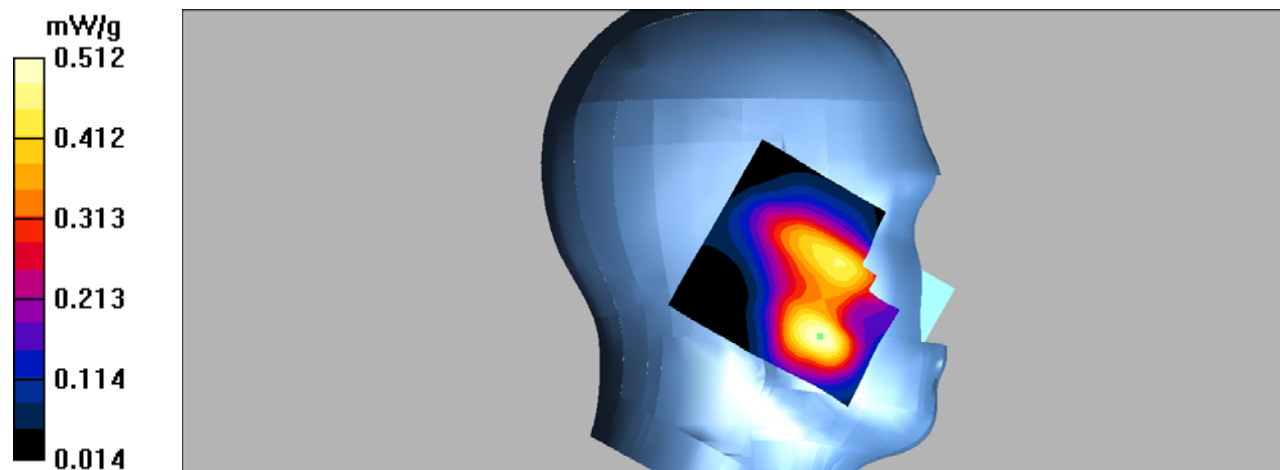

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Tilt/GSM 1900 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.258 mW/g


**Left Tilt/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.138 mW/g**

Maximum value of SAR (measured) = 0.243 mW/g

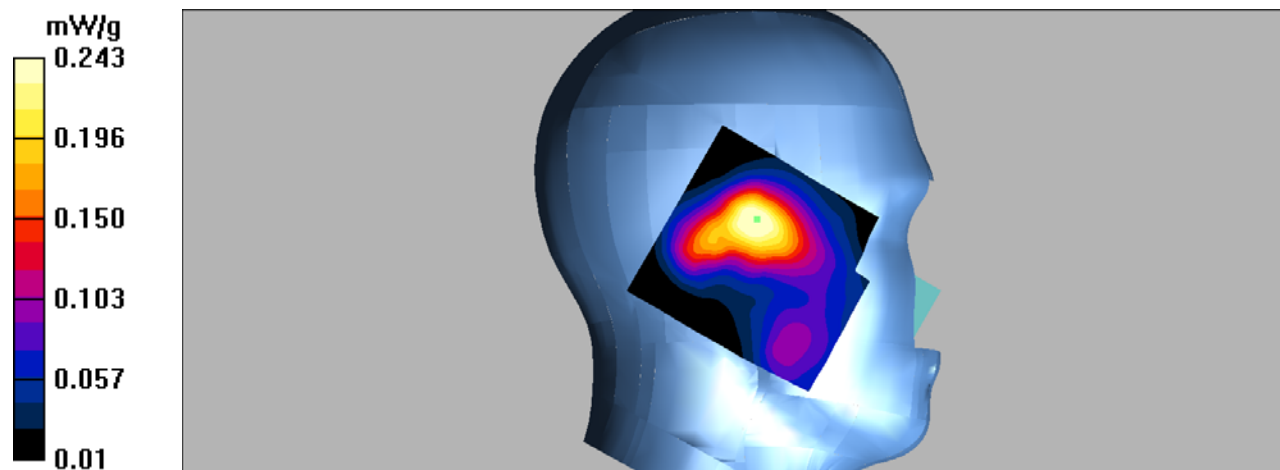

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Cheek/GSM 1900 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.764 mW/g


**Right Cheek/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.15 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.408 mW/g**

Maximum value of SAR (measured) = 0.747 mW/g

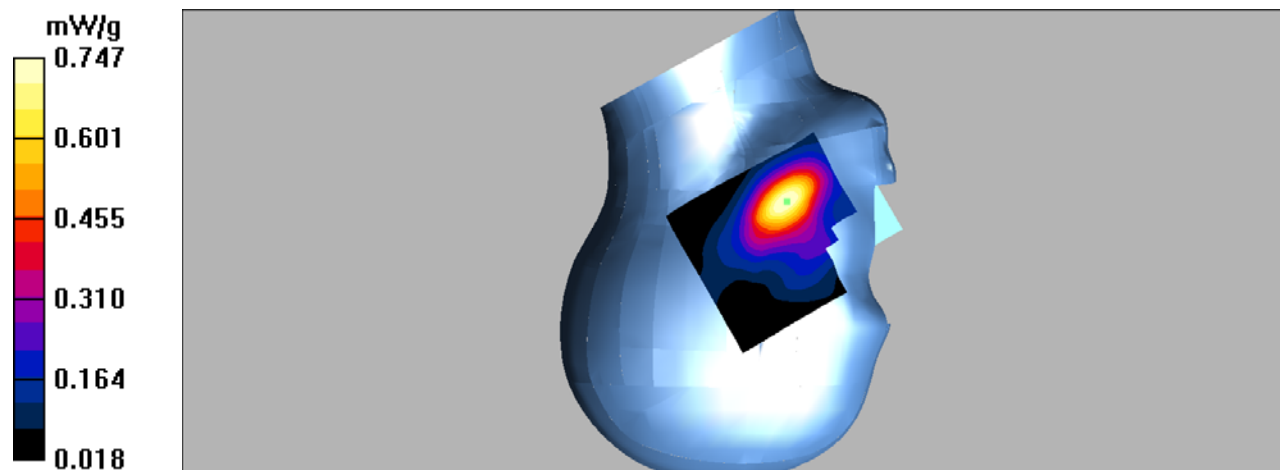

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Tilt/GSM 1900 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.193 mW/g


**Right Tilt/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.105 mW/g**

Maximum value of SAR (measured) = 0.189 mW/g

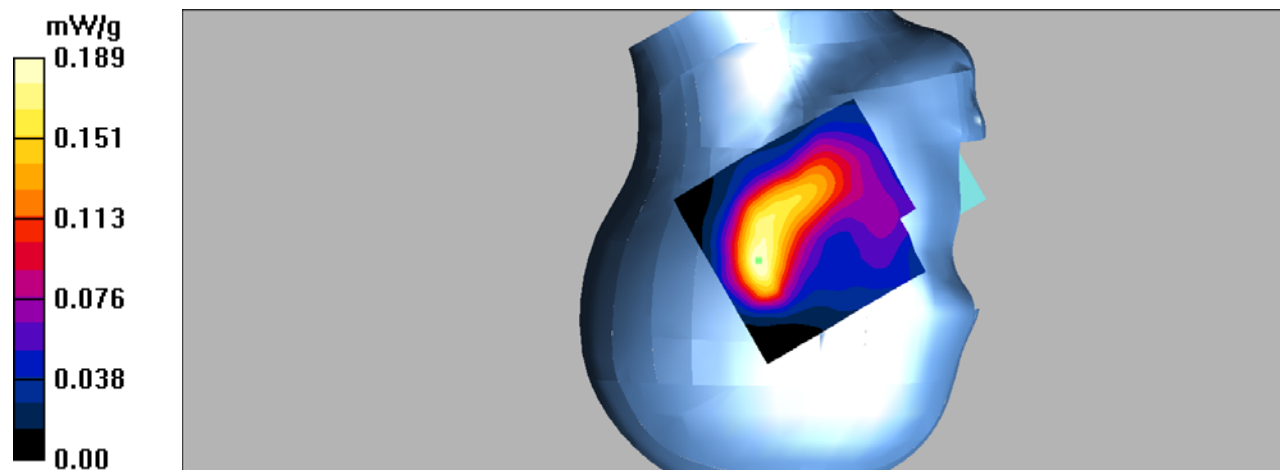

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GSM bands; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Worn Back/GSM 1900 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.774 mW/g


**Body Worn Back/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.376 mW/g**

Maximum value of SAR (measured) = 0.754 mW/g

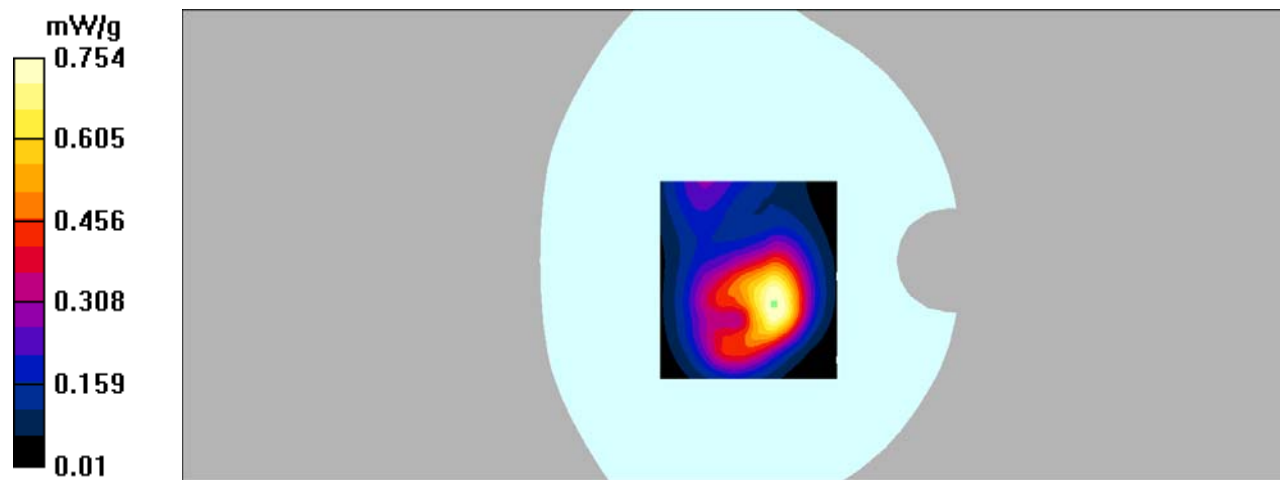

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-3slots; Frequency: 1880.0 MHz;Duty Cycle: 1:2.67

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/GSM 1900 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.776 mW/g


**Body Back/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.397 mW/g**

Maximum value of SAR (measured) = 0.788 mW/g

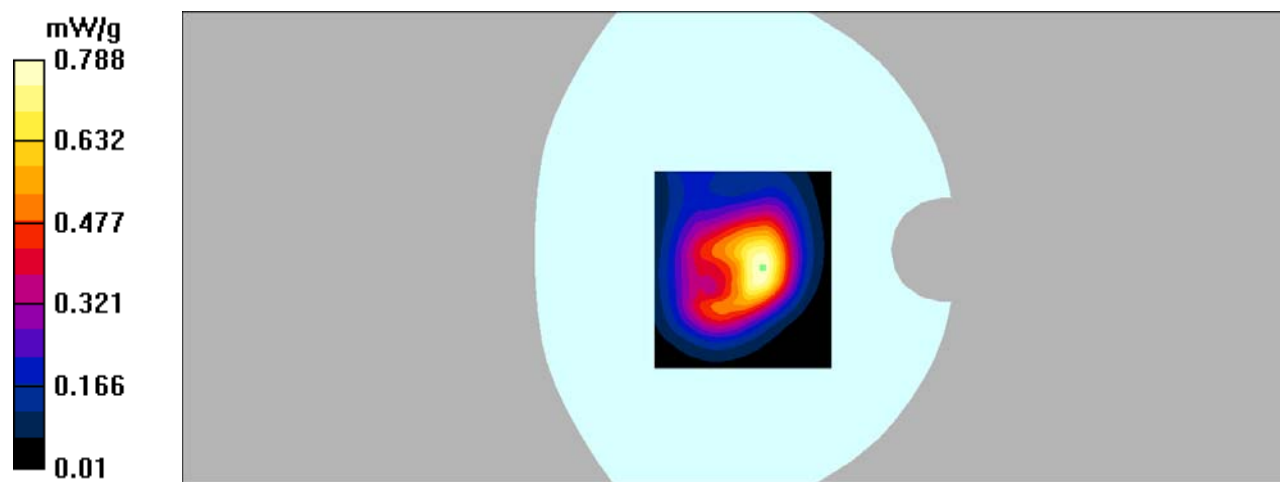

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-3slots; Frequency: 1880.0 MHz;Duty Cycle: 1:2.67

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/GSM 1900 Mid/Area Scan (81x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.176 mW/g


**Body Left/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.85 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.295 W/kg

**SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.090 mW/g**

Maximum value of SAR (measured) = 0.173 mW/g

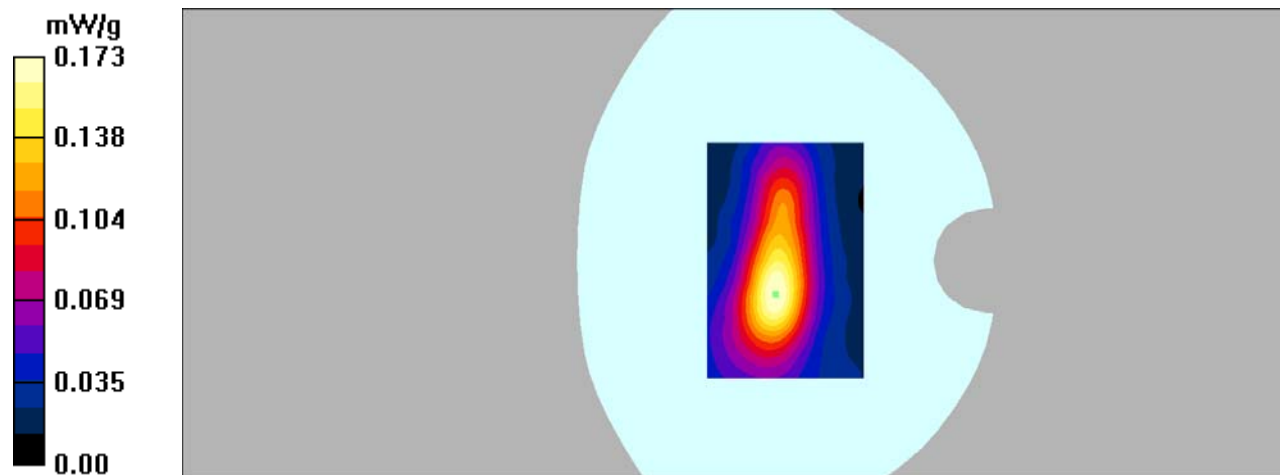



**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-3slots; Frequency: 1880.0 MHz;Duty Cycle: 1:2.67

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/GSM 1900 Mid/Area Scan (81x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.176 mW/g


**Body Right/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.69 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.179 mW/g

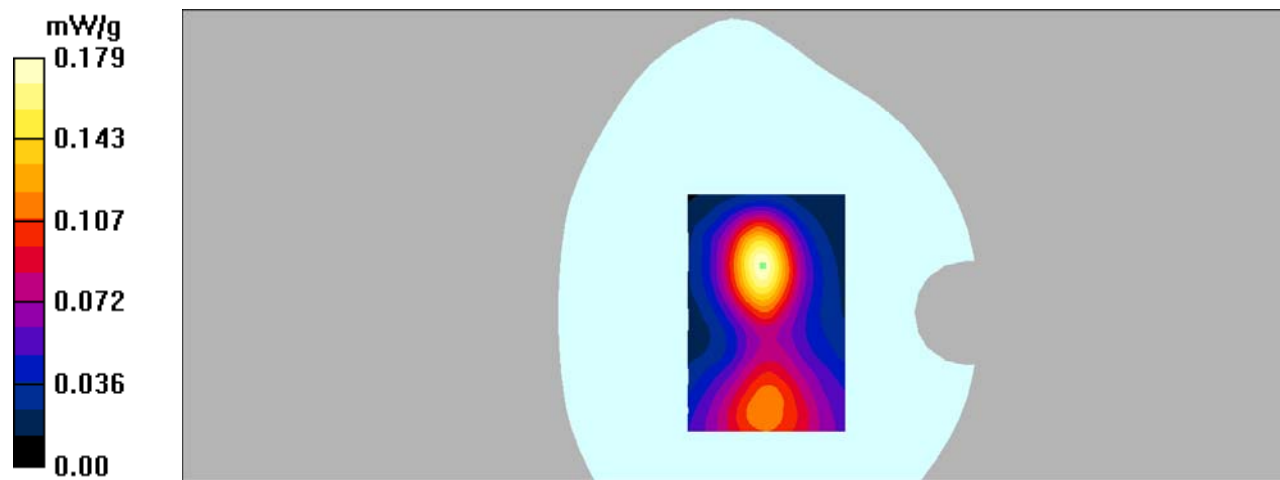

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: GPRS bands-3slots; Frequency: 1880.0 MHz;Duty Cycle: 1:2.67  
Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Bottom/GSM 1900 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.545 mW/g


**Body Bottom/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.871 W/kg

**SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.247 mW/g**

Maximum value of SAR (measured) = 0.517 mW/g

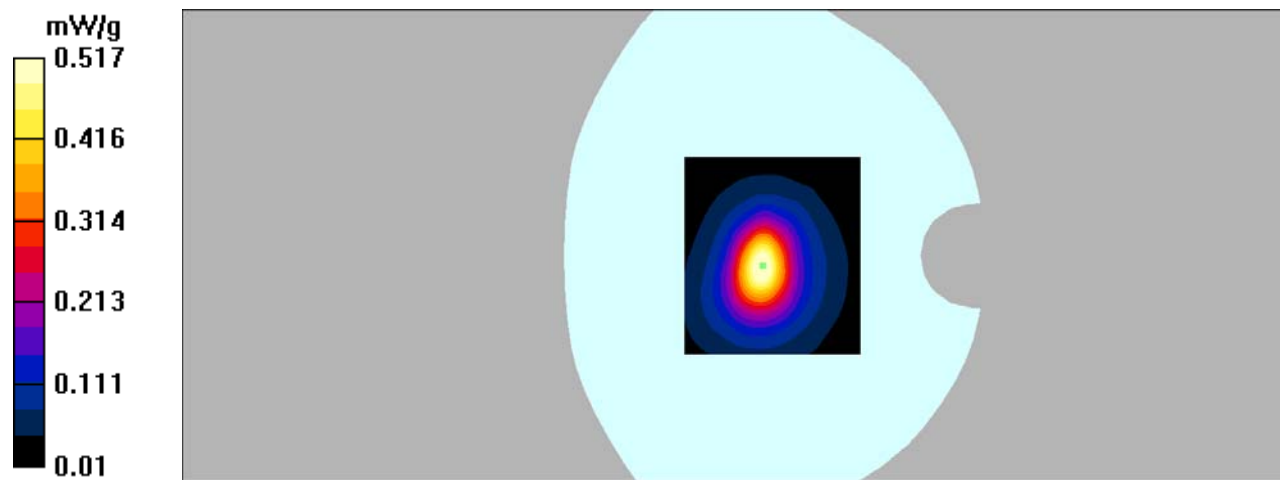

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.90$  mho/m;  $\epsilon_r = 41.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Cheek/WCDMA Band 5 Low/Area Scan (91x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.764 mW/g


**Left Cheek/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.892 W/kg

**SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.548 mW/g**

Maximum value of SAR (measured) = 0.773 mW/g

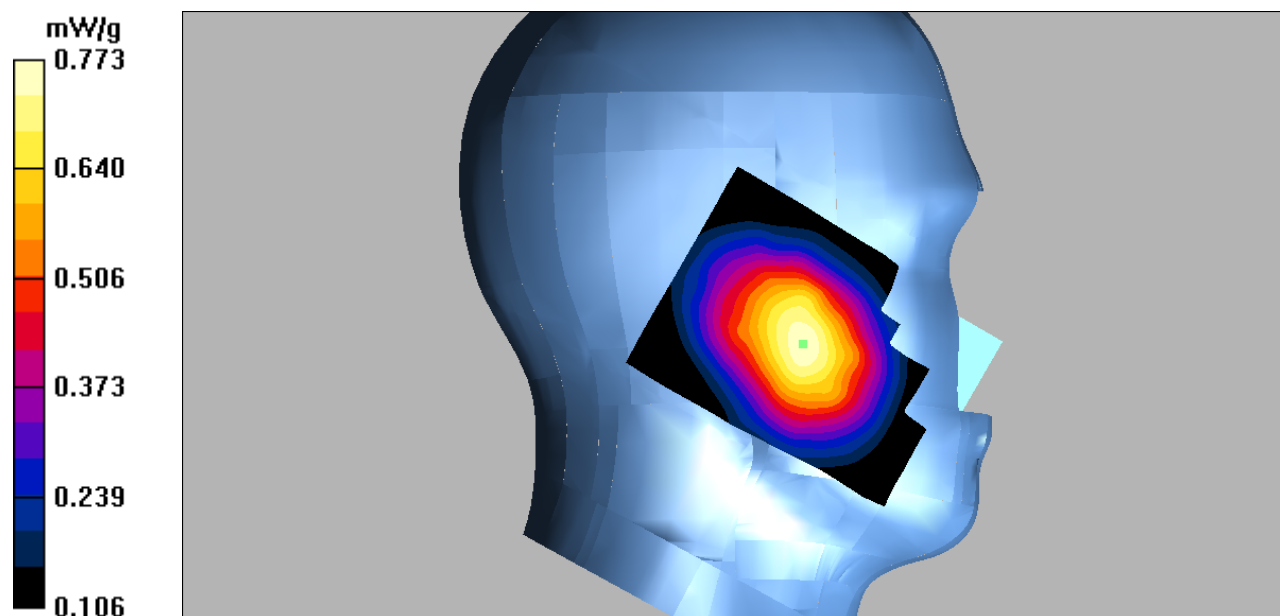

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.90$  mho/m;  $\epsilon_r = 41.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Tilt/WCDMA Band 5 Low/Area Scan (91x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.481 mW/g


**Left Tilt/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.558 W/kg

**SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.319 mW/g**

Maximum value of SAR (measured) = 0.457 mW/g

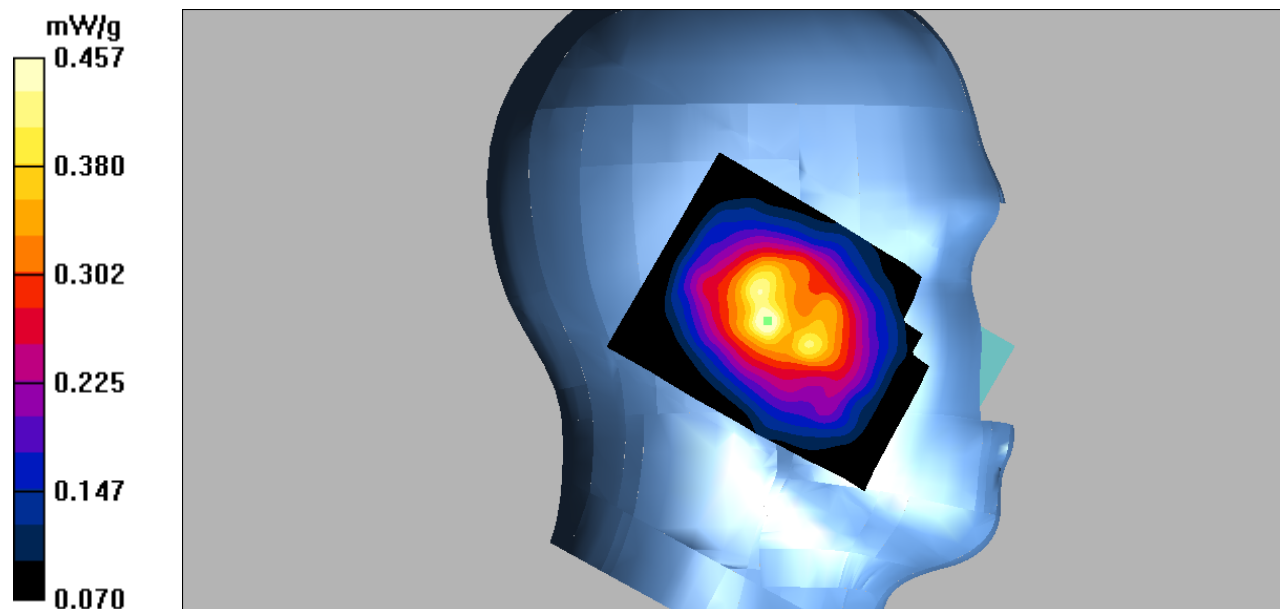

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.90$  mho/m;  $\epsilon_r = 41.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Cheek/WCDMA Band 5 Low/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.642 mW/g


**Right Cheek/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 0.719 W/kg

**SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.478 mW/g**

Maximum value of SAR (measured) = 0.639 mW/g

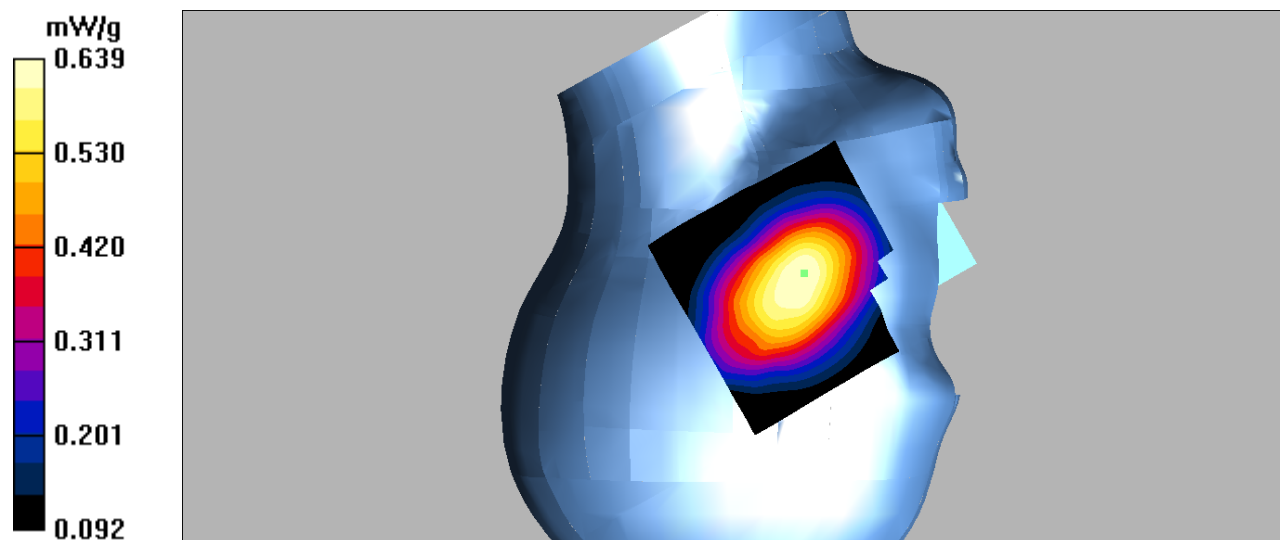

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.90$  mho/m;  $\epsilon_r = 41.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.50, 10.50, 10.50); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Tilt/WCDMA Band 5 Low/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.372 mW/g


**Right Tilt/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.441 W/kg

**SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.272 mW/g**

Maximum value of SAR (measured) = 0.373 mW/g

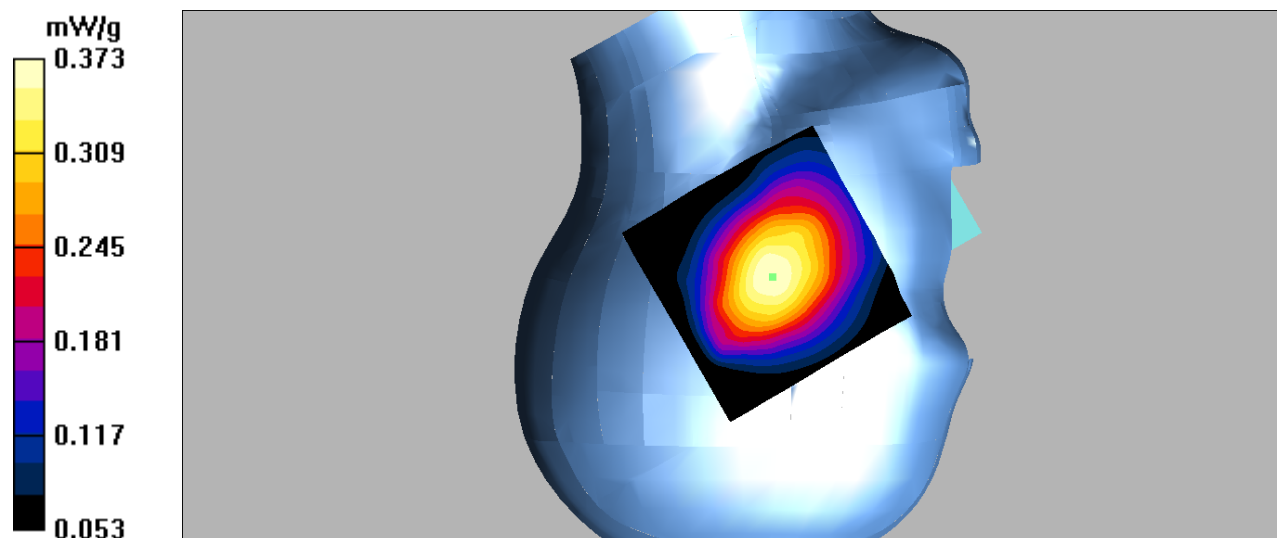

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 54.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/WCDMA Band 5 Low/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.911 mW/g


**Body Back/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.647 mW/g**

Maximum value of SAR (measured) = 0.897 mW/g

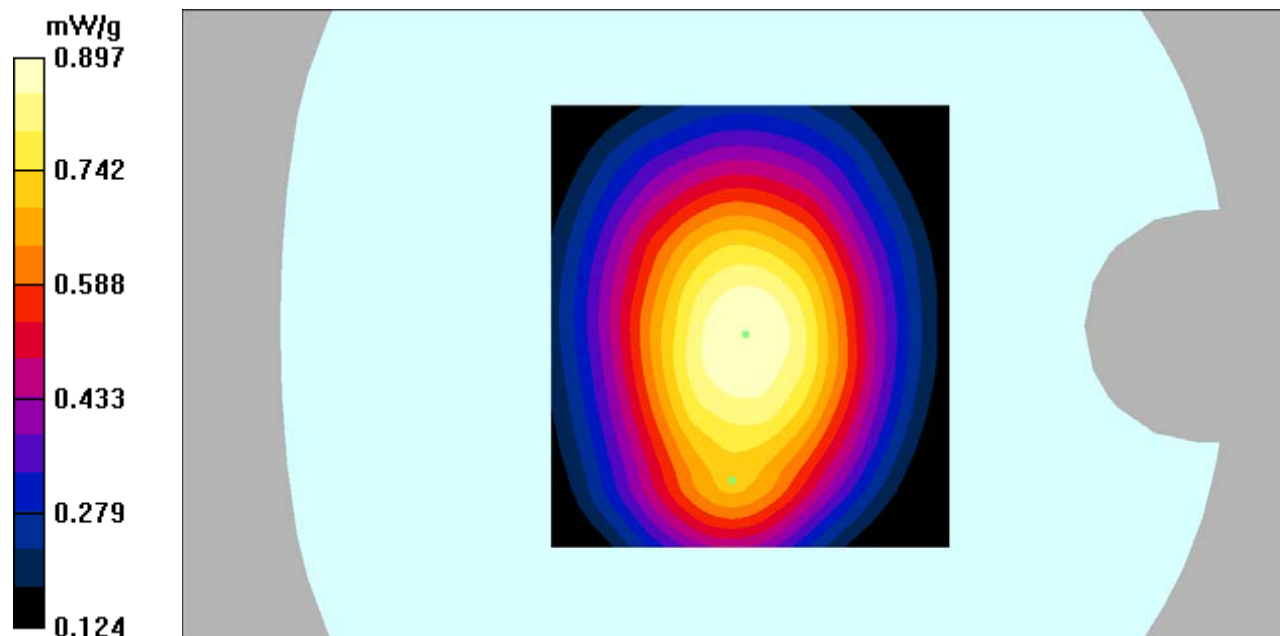

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/WCDMA Band 5 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.31 mW/g


**Body Back/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.1 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.967 mW/g**

Maximum value of SAR (measured) = 1.34 mW/g

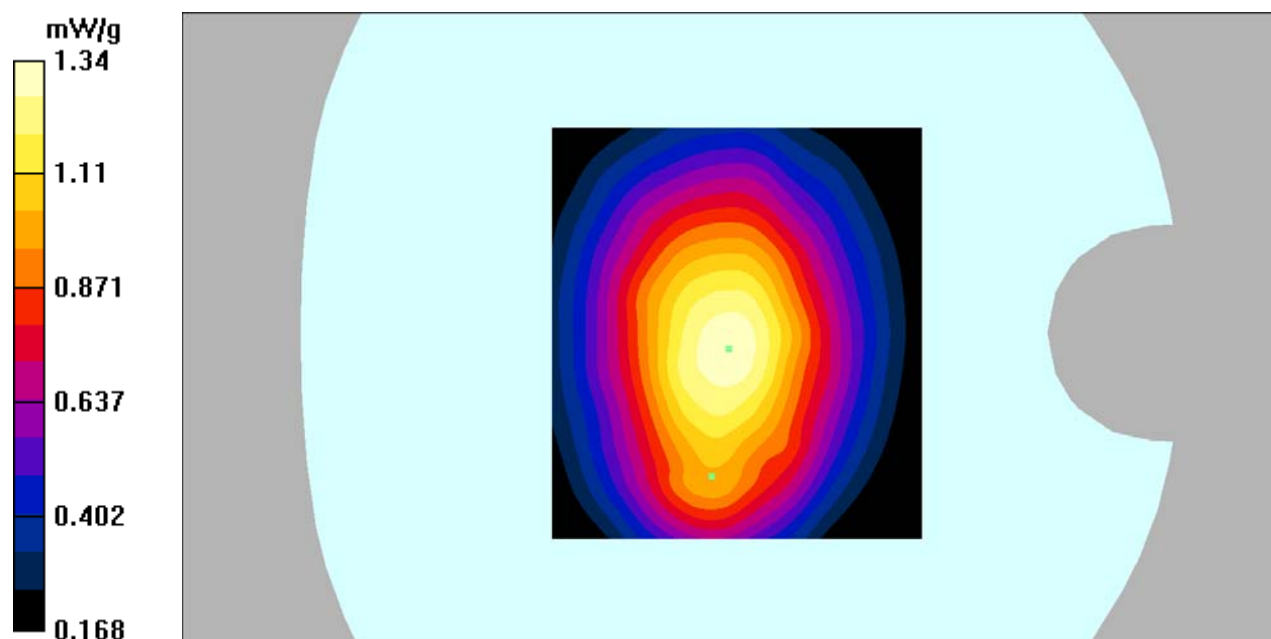



**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/WCDMA Band 5 High/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.10 mW/g


**Body Back/WCDMA Band 5 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.9 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.818 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

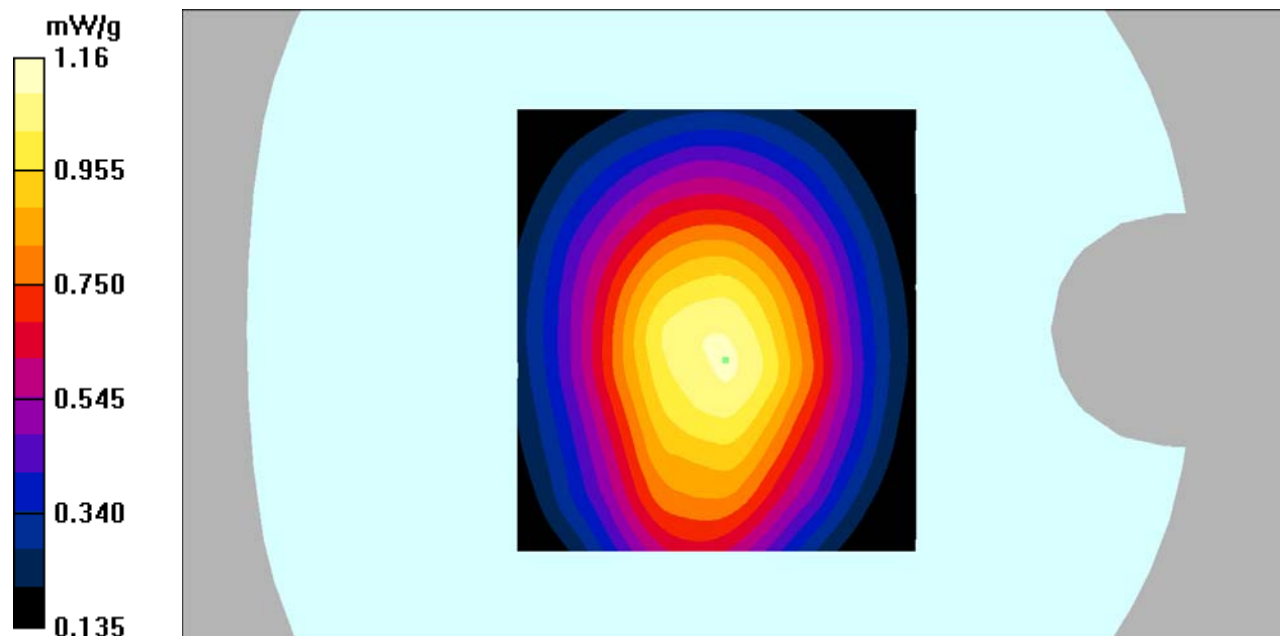

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 54.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/WCDMA Band 5 Low/Area Scan (81x141x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.603 mW/g


**Body Left/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.738 W/kg

**SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.401 mW/g**

Maximum value of SAR (measured) = 0.601 mW/g

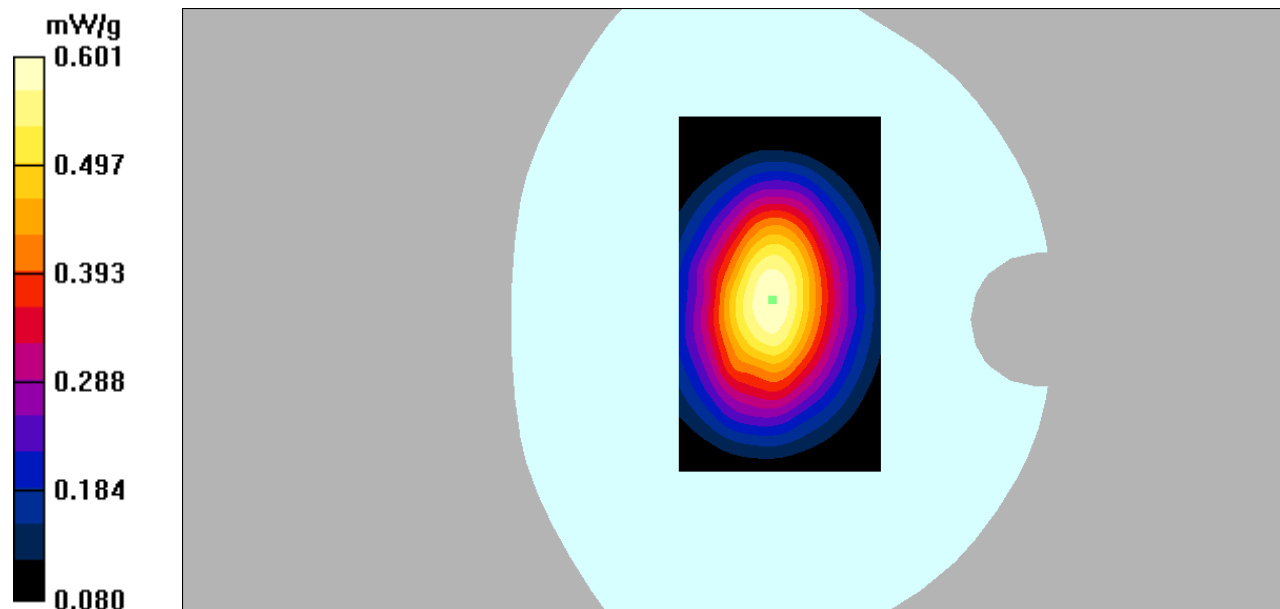

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 54.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/WCDMA Band 5 Low/Area Scan (81x161x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.183 mW/g


**Body Right/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.174 mW/g

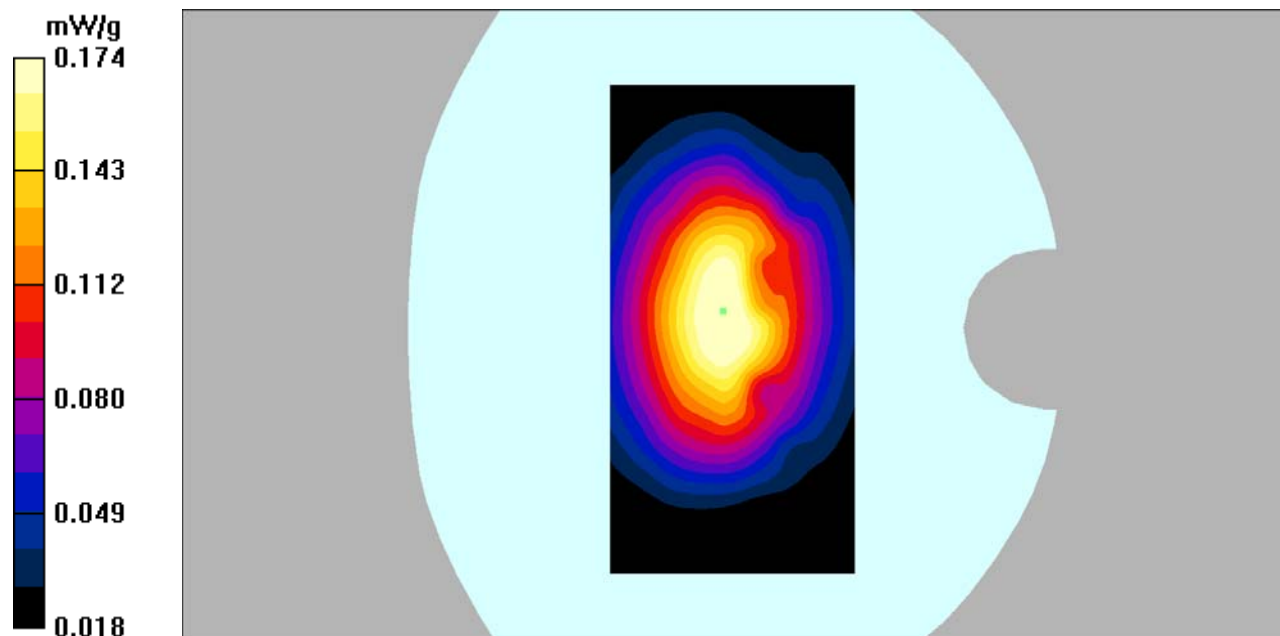

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 54.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Bottom/WCDMA Band 5 Low/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.073 mW/g


**Body Bottom/WCDMA Band 5 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.20 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.040 mW/g**

Maximum value of SAR (measured) = 0.073 mW/g

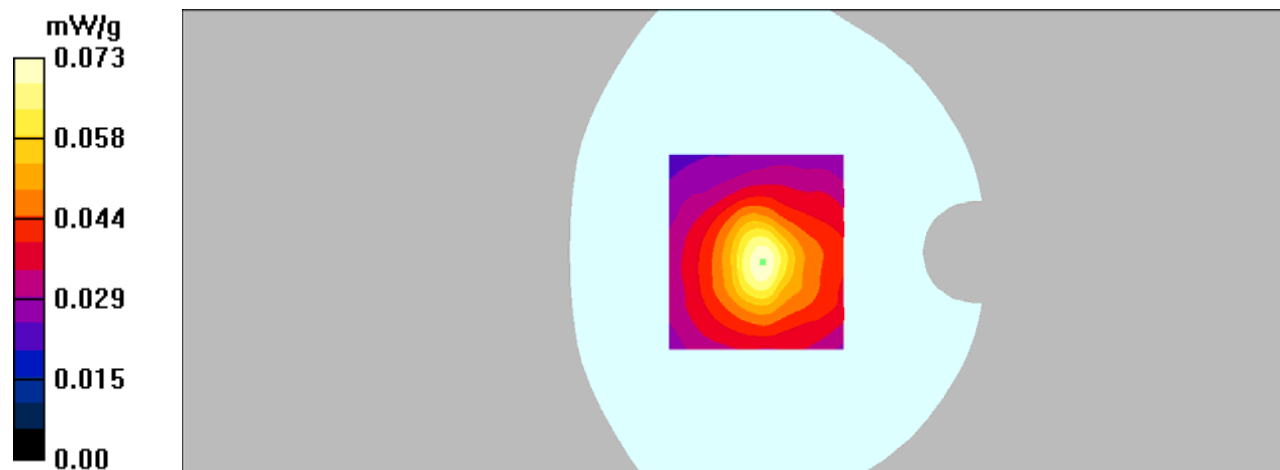

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Cheek/WCDMA Band 2 Mid/Area Scan (91x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.754 mW/g


**Left Cheek/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.50 V/m; Power Drift = 0.076 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.386 mW/g**

Maximum value of SAR (measured) = 0.741 mW/g

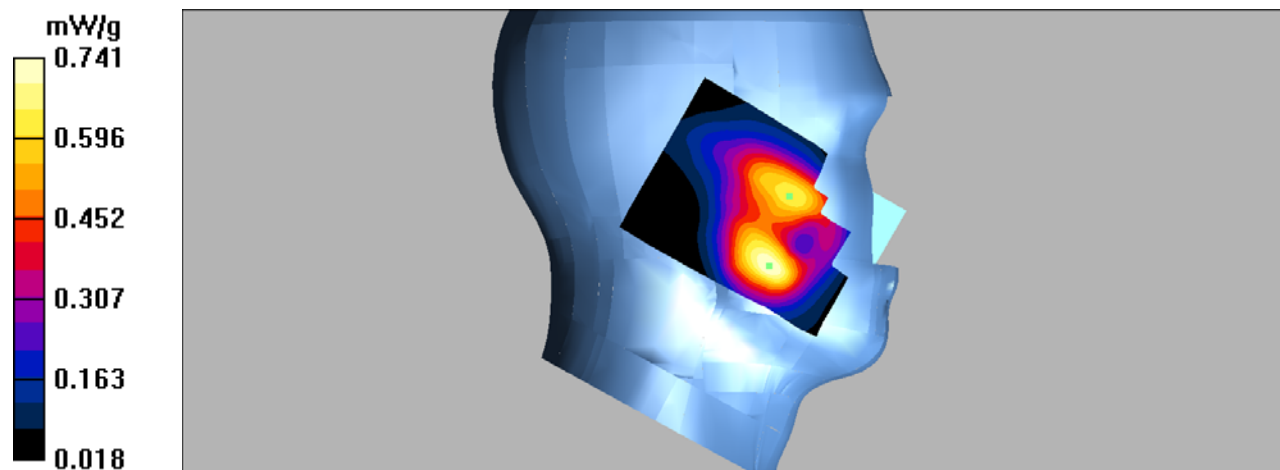

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Left Tilt/WCDMA Band 2 Mid/Area Scan (91x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.315 mW/g


**Left Tilt/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.476 W/kg

**SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.175 mW/g**

Maximum value of SAR (measured) = 0.315 mW/g

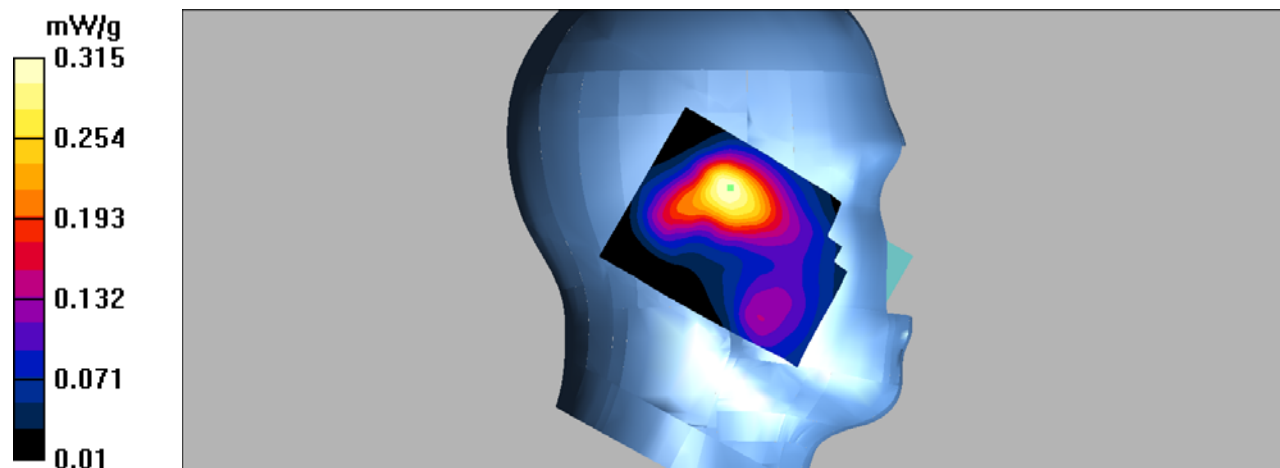

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Cheek/WCDMA Band 2 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.800 mW/g


**Right Cheek/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.91 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.445 mW/g**

Maximum value of SAR (measured) = 0.825 mW/g

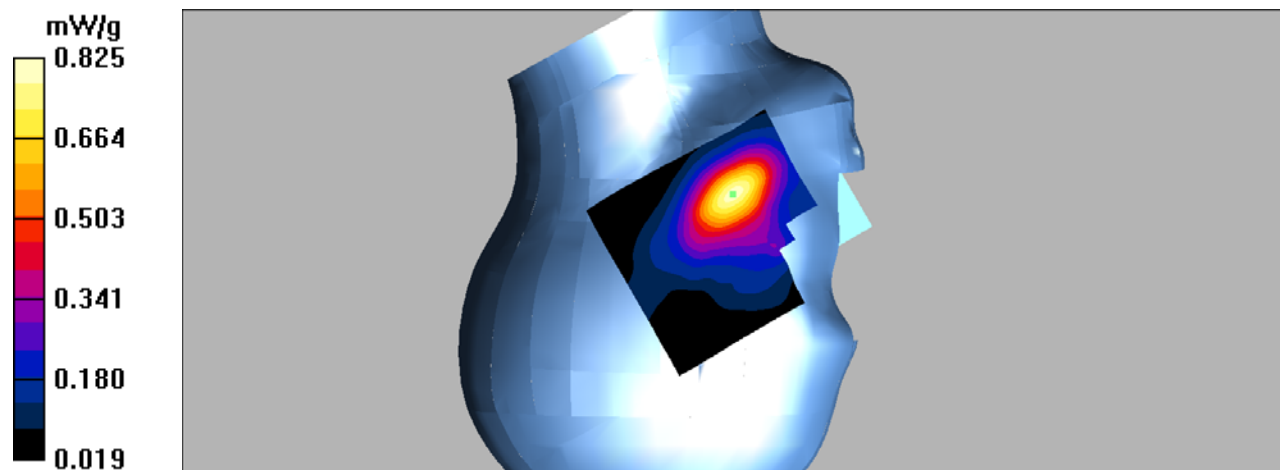

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.71, 8.71, 8.71); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Right Tilt/WCDMA Band 2 Mid/Area Scan (101x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.177 mW/g


**Right Tilt/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.340 W/kg

**SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.095 mW/g**

Maximum value of SAR (measured) = 0.181 mW/g

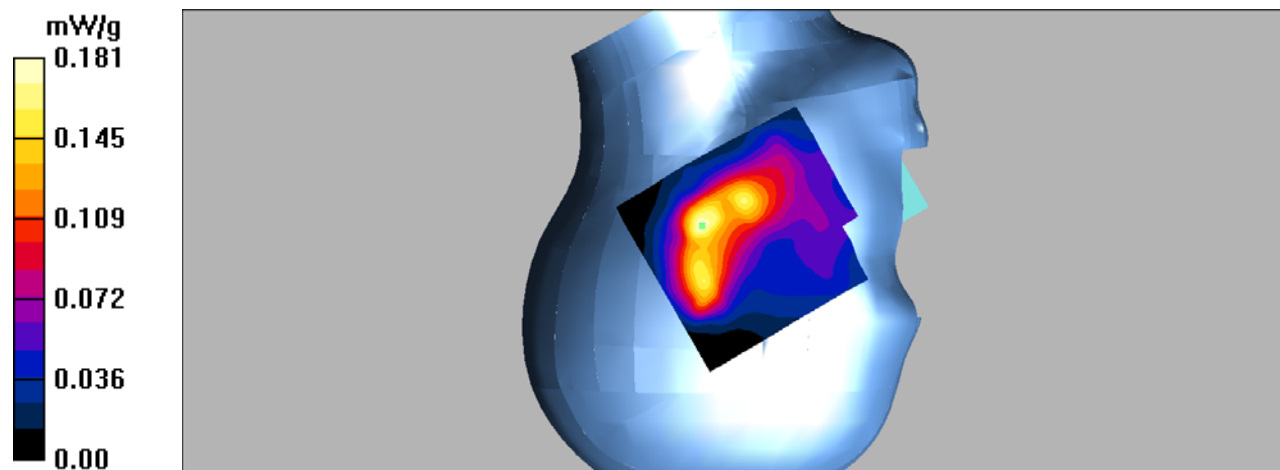



**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Back/WCDMA Band 2 Mid/Area Scan (101x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.893 mW/g


**Body Back/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.747 mW/g; SAR(10 g) = 0.438 mW/g**

Maximum value of SAR (measured) = 0.861 mW/g

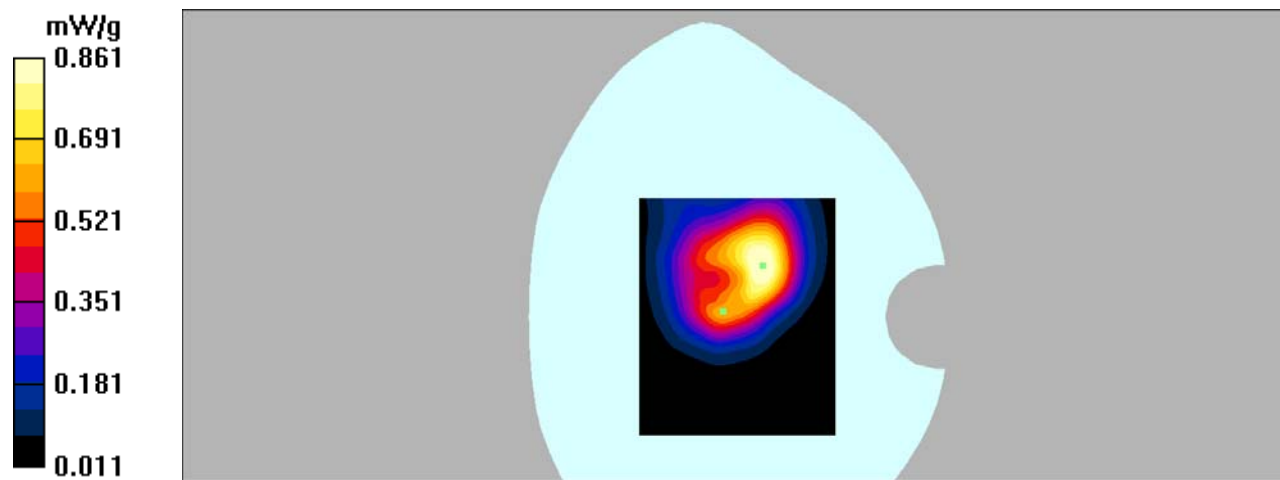

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Left/WCDMA Band 2 Mid/Area Scan (81x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.173 mW/g


**Body Left/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.73 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.088 mW/g**

Maximum value of SAR (measured) = 0.171 mW/g

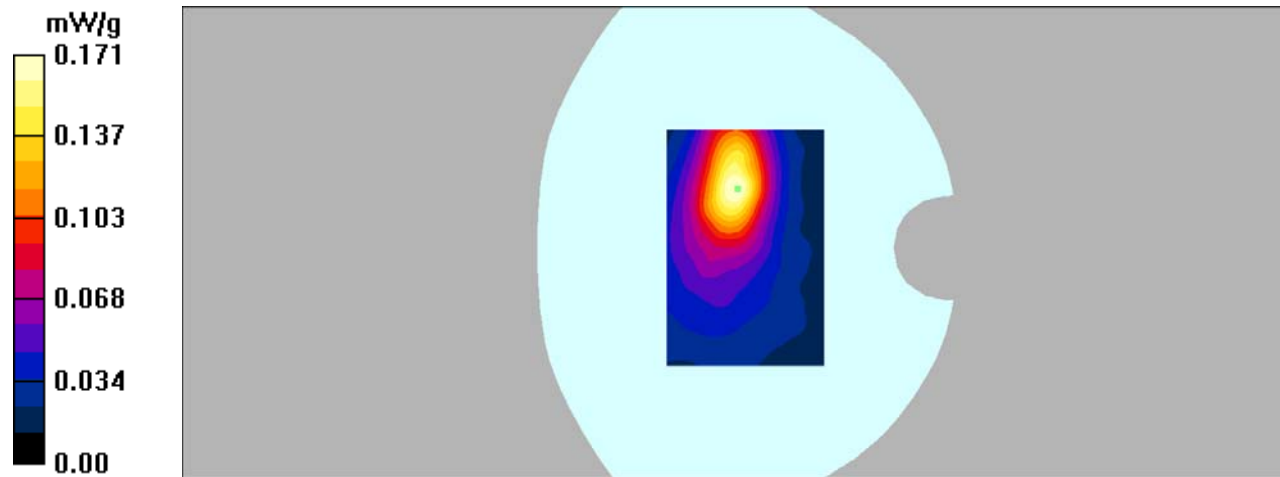

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Right/WCDMA Band 2 Mid/Area Scan (81x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.183 mW/g


**Body Right/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.175 mW/g

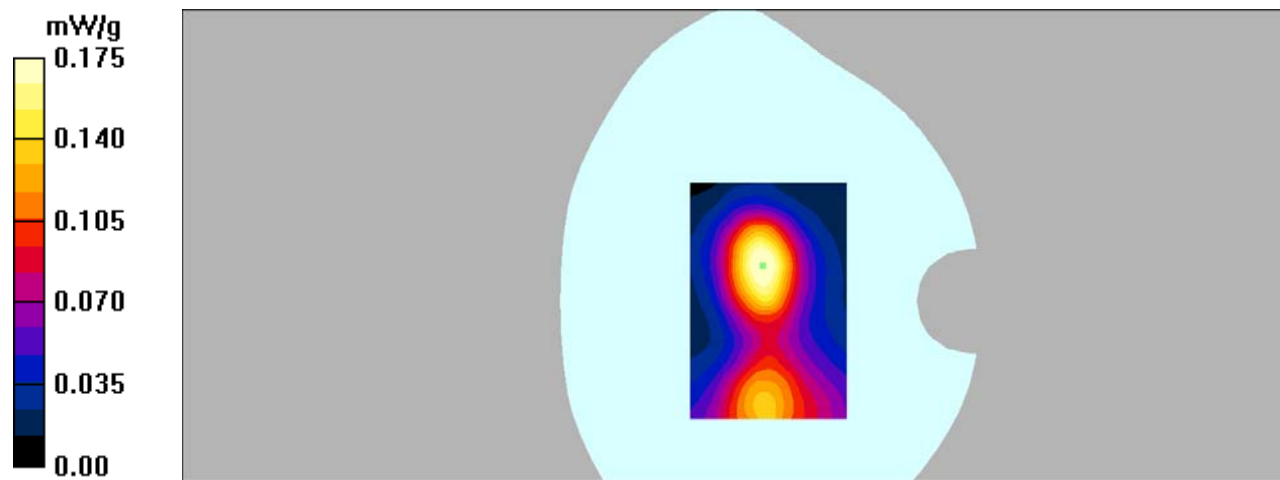

**DUT: 3G MOBILE PHONE; Type: LOGIC X4M LITE;**

Communication System: 3G Bands; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE – SN772; Calibrated: 25/10/2016

- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Body Bottom/WCDMA Band 2 Mid/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.503 mW/g

**Body Bottom/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.805 W/kg

**SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.474 mW/g

