

FCC REPORT (WIFI)

Applicant: SWAGTEK

Address of Applicant: 10205 NW 19th St. Suite 101, Miami, FL, 33172

Equipment Under Test (EUT)

Product Name: 5.7 inch 4G Smart Phone

Model No.: L57, UN57, OMEGA

Trade mark: LOGIC, iSWAG, UNONU

FCC ID: O55572220

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 08 Jun., 2020

Date of Test: 09 Jun., to 28 Jun., 2020

Date of report issued: 08 Jul., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	28 Jun., 2020	Original
01	06 Jul., 2020	Update FCC ID
02	08 Jul., 2020	1. Added duty cycle data on page 12/13.

Tested by:

Janet Wei

Date: 08 Jul., 2020

Test Engineer

Reviewed by:

Winner Zhang

Date: 08 Jul., 2020

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION	7
5.9 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSION	9
6.3 CONDUCTED OUTPUT POWER	12
6.4 OCCUPY BANDWIDTH	16
6.5 POWER SPECTRAL DENSITY	21
6.6 BAND EDGE	24
6.6.1 Conducted Emission Method.....	24
6.6.2 Radiated Emission Method.....	27
6.7 SPURIOUS EMISSION.....	44
6.7.1 Conducted Emission Method.....	44
6.7.2 Radiated Emission Method.....	47
7 TEST SETUP PHOTO	55
8 EUT CONSTRUCTIONAL DETAILS	56

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. N/A: Not Applicable.
3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).

Test Method:	ANSI C63.4-2014 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
---------------------	-----------------------------------------------------------------------------------

5 General Information

5.1 Client Information

Applicant:	SWAGTEK
Address:	10205 NW 19th St. Suite 101, Miami, FL, 33172
Manufacturer/ Factory:	SWAGTEK
Address:	10205 NW 19th St. Suite 101, Miami, FL, 33172

5.2 General Description of E.U.T.

Product Name:	5.7 inch 4G Smart Phone
Model No.:	L57, UN57, OMEGA
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	-1.2dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V-2350mAh
AC adapter:	Input:100-240V AC,50/60Hz 0.2A Output:5.0V DC 1A
Remark:	L57, UN57, OMEGA were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

- For 802.11n-HT40 mode, the channel number is from 3 to 9;
- Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
<p>Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> <p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170		06-19-2020	06-20-2021
EMI Test Software	AUDIX	E3		Version: 6.110919b	
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200		Version: 2.0.0.0	

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3		Version: 6.110919b	

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part 15 C Section 15.203 /247(b)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
E.U.T Antenna:	
<p>The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is -1.2 dBi.</p>	
	

6.2 Conducted Emission

Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement. 		
Test setup:	<p>Reference Plane</p> <p>LISN LISN</p> <p>↓ 40cm 80cm →</p> <p>AUX Equipment ————— E.U.T</p> <p>Test table/Insulation plane</p> <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	5.7 inch 4G Smart Phone	Product model:	L57
Test by:	Janet	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

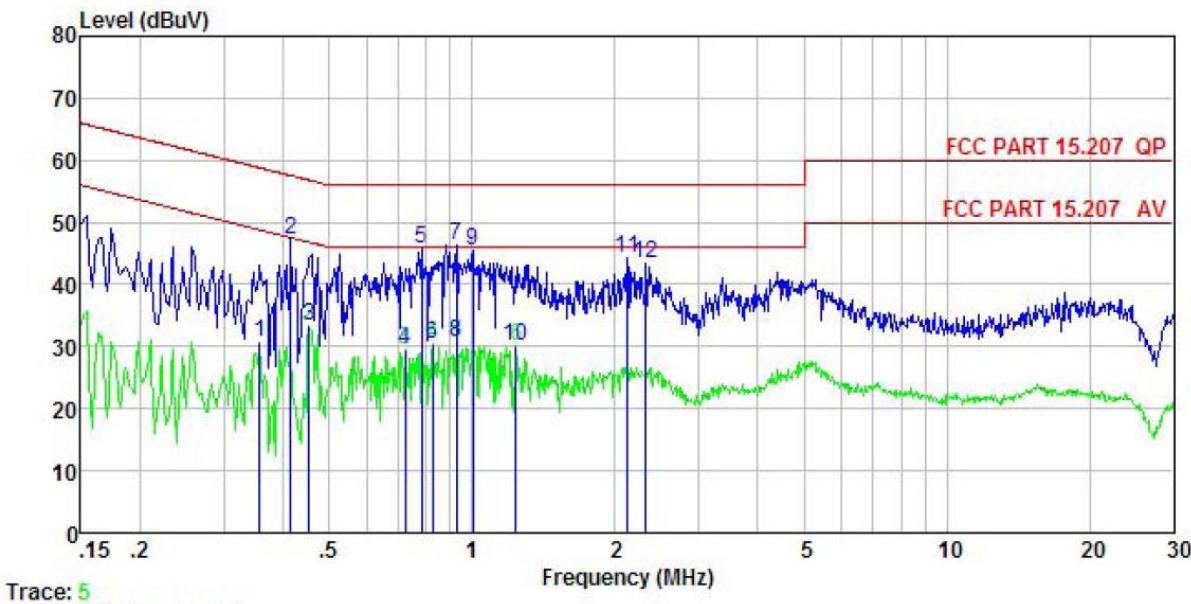


Freq	Read	LISN	Cable	Limit Line	Over Limit	Remark
	Level	Factor	Cable Loss			
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.358	20.27	-0.51	10.73	30.65	48.78 -18.13 Average
2	0.415	36.60	-0.47	10.73	47.17	57.55 -10.38 QP
3	0.454	23.12	-0.45	10.74	33.40	46.80 -13.40 Average
4	0.724	19.62	-0.54	10.78	29.54	46.00 -16.46 Average
5	0.783	35.68	-0.56	10.81	45.80	56.00 -10.20 QP
6	0.826	20.14	-0.57	10.82	30.38	46.00 -15.62 Average
7	0.928	35.75	-0.60	10.85	46.28	56.00 -9.72 QP
8	0.928	20.12	-0.60	10.85	30.65	46.00 -15.35 Average
9	1.005	34.67	-0.62	10.87	45.38	56.00 -10.62 QP
10	1.236	19.67	-0.59	10.90	30.20	46.00 -15.80 Average
11	2.121	33.99	-0.50	10.95	44.14	56.00 -11.86 QP
12	2.321	33.14	-0.48	10.94	43.32	56.00 -12.68 QP

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	5.7 inch 4G Smart Phone	Product model:	L57
Test by:	Janet	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

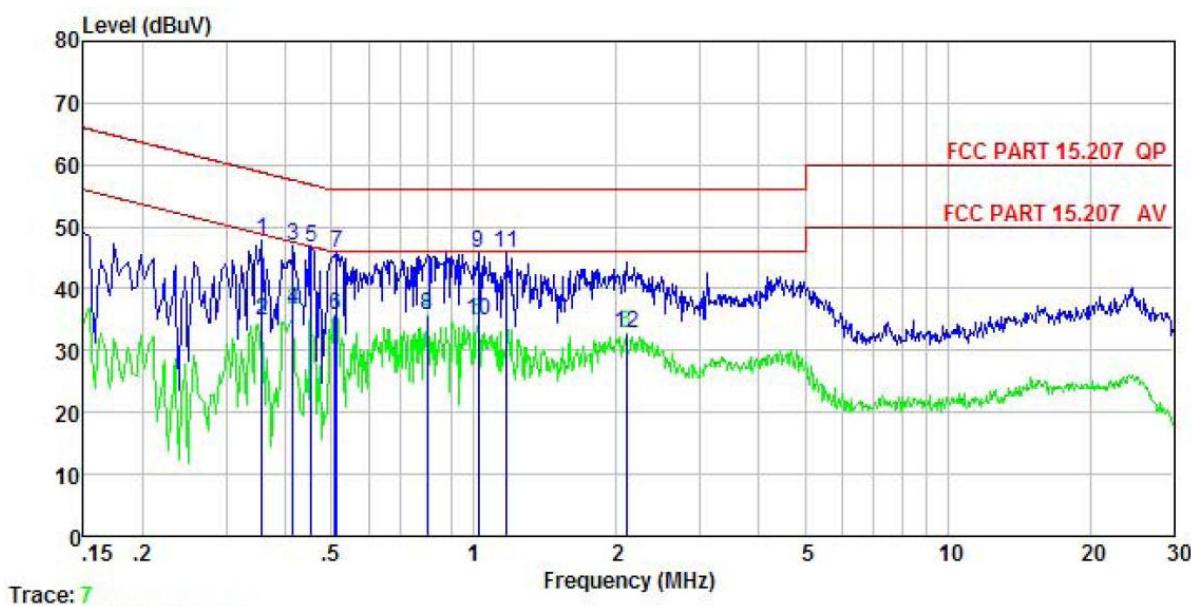


Freq MHz	Read Level dBuV	LISN Factor dB	Cable Loss dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.358	37.77	-0.65	10.73	47.82	58.78	-10.96 QP
2	0.358	24.64	-0.65	10.73	34.69	48.78	-14.09 Average
3	0.415	36.89	-0.63	10.73	46.94	57.55	-10.61 QP
4	0.415	26.51	-0.63	10.73	36.56	47.55	-10.99 Average
5	0.454	36.64	-0.64	10.74	46.73	56.80	-10.07 QP
6	0.510	25.70	-0.65	10.76	35.84	46.00	-10.16 Average
7	0.513	35.62	-0.65	10.76	45.76	56.00	-10.24 QP
8	0.796	25.52	-0.65	10.81	35.73	46.00	-10.27 Average
9	1.021	35.52	-0.68	10.87	45.79	56.00	-10.21 QP
10	1.021	24.51	-0.68	10.87	34.78	46.00	-11.22 Average
11	1.172	35.54	-0.69	10.89	45.84	56.00	-10.16 QP
12	2.099	22.28	-0.70	10.96	32.73	46.00	-13.27 Average

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

6.3 Conducted Output Power

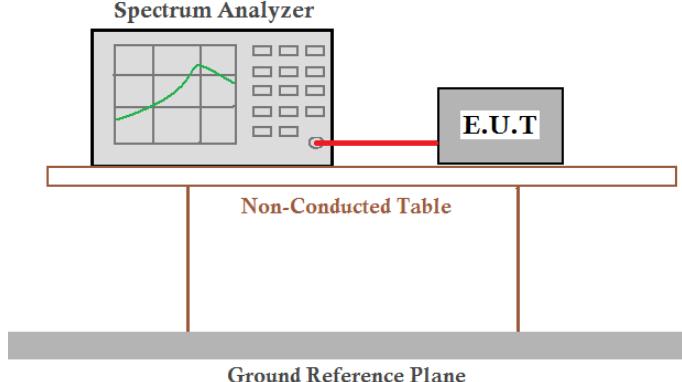Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup for conducted output power. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:


Test CH	Maximum Conducted Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	16.55	13.58	13.67	11.61	30.00	Pass
Middle	16.12	15.40	15.34	15.33		
Highest	16.81	14.00	13.98	11.86		

duty cycle				
Test CH\mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Middle	100%	100%	100%	100%

Test plot as follows:



Duty cycle:

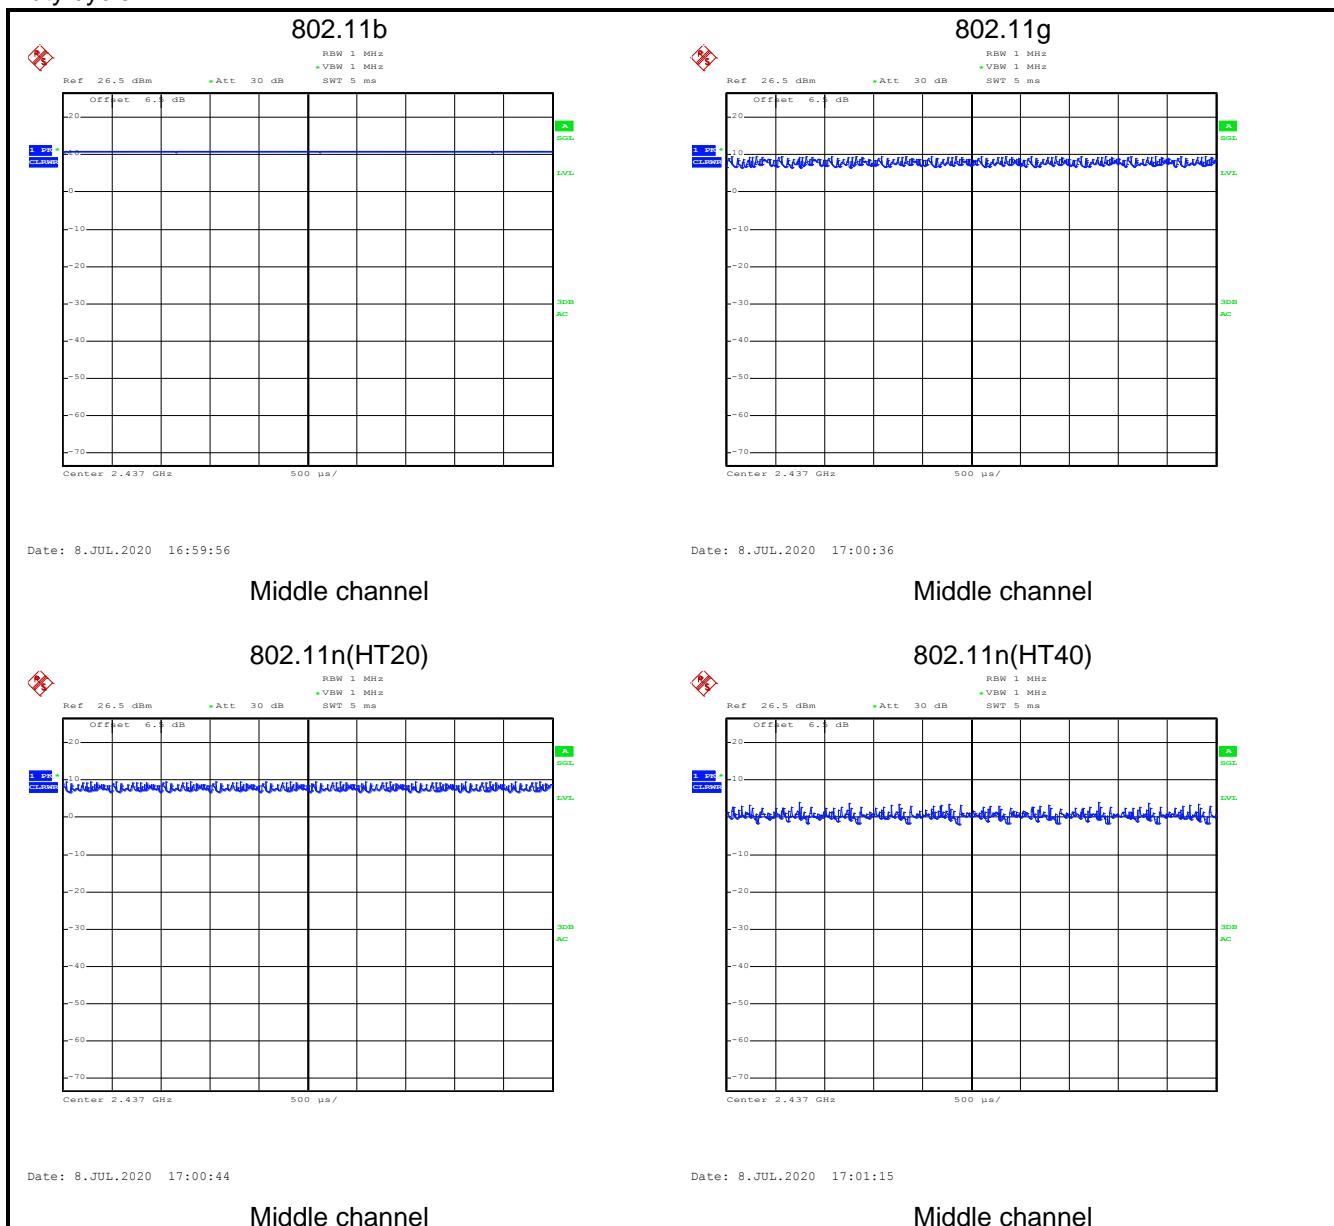

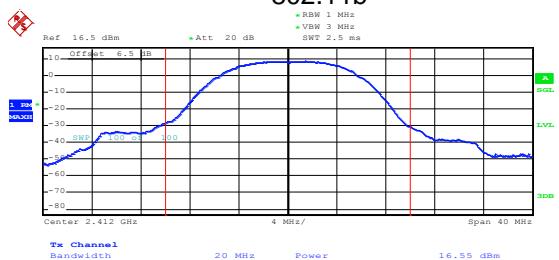Power:**802.11b****802.11g**



Date: 11.JUN.2020 16:45:09

Date: 11.JUN.2020 16:46:24

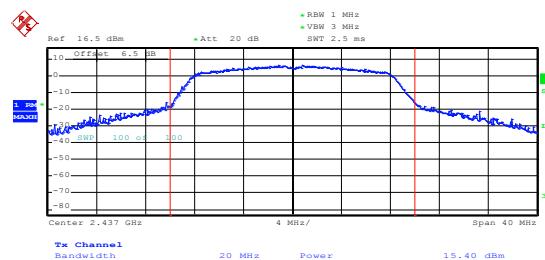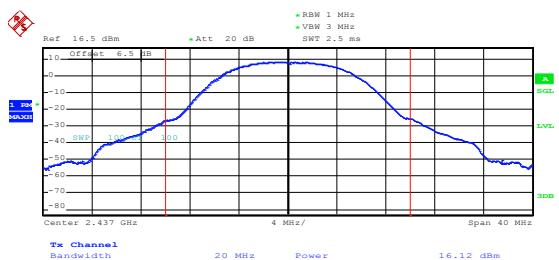Lowest channel**Lowest channel**

Date: 11.JUN.2020 16:45:31


Date: 11.JUN.2020 16:46:11

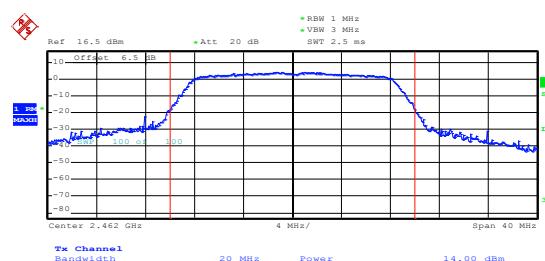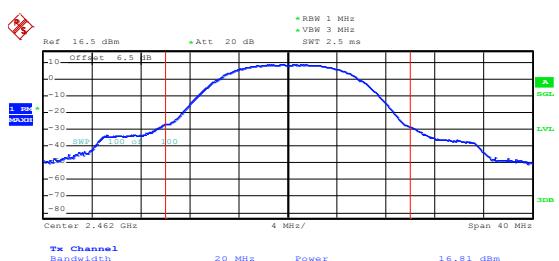Middle channel**Middle channel**


Date: 11.JUN.2020 16:45:43

Date: 11.JUN.2020 16:45:58

Highest channel**Highest channel**

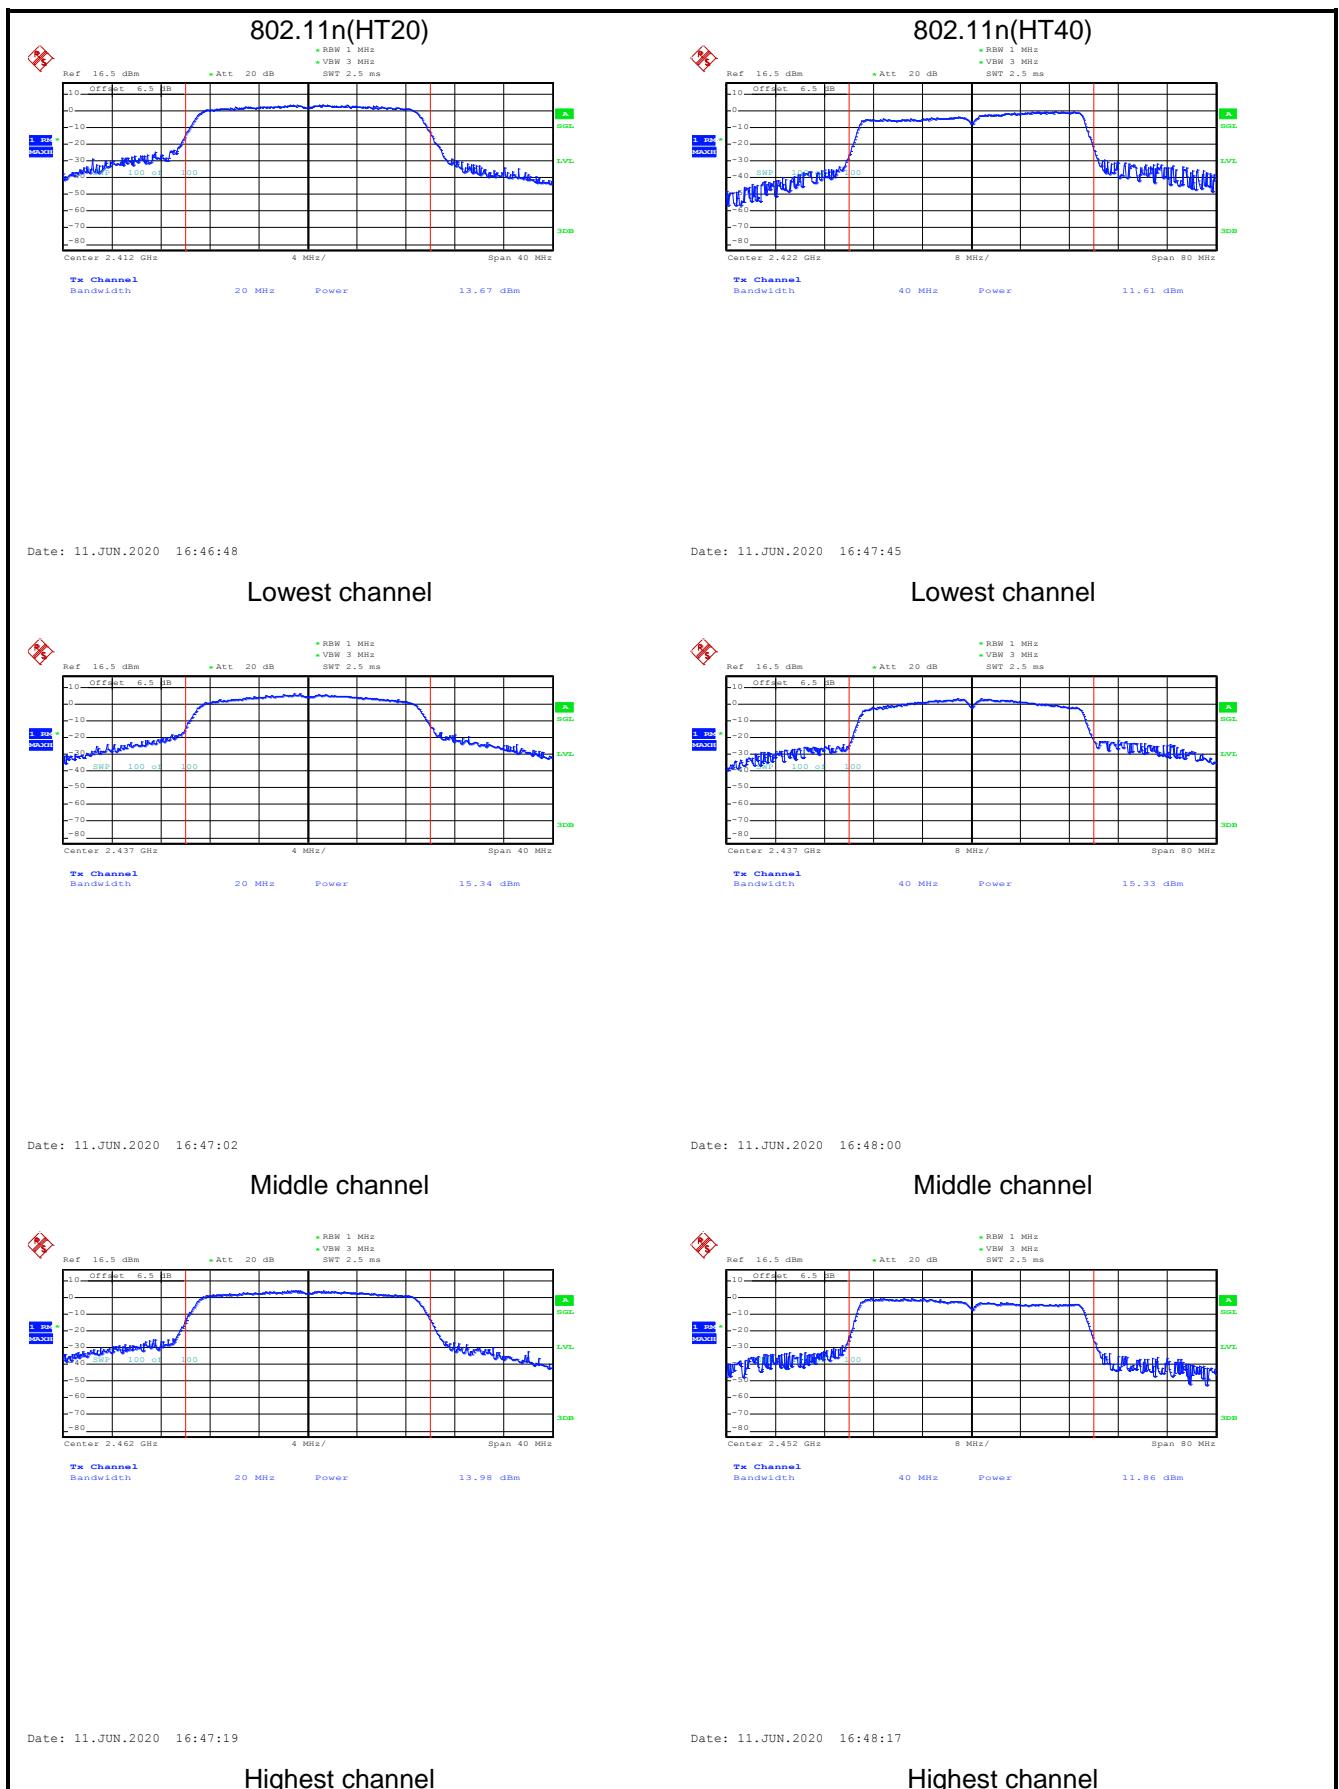


6.4 Occupy Bandwidth

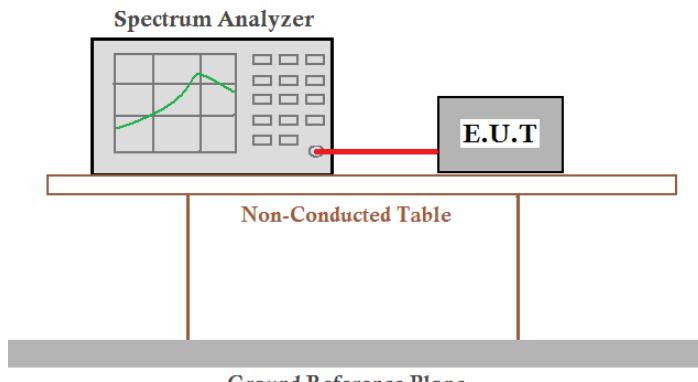
Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.76	16.32	17.44	36.16	>500	Pass
Middle	9.36	15.28	15.36	35.52		
Highest	10.24	16.00	17.28	36.48		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	12.56	16.96	17.84	36.96	N/A	N/A
Middle	12.48	16.88	17.76	36.16		
Highest	12.64	16.88	17.84	37.12		

Test plot as follows:

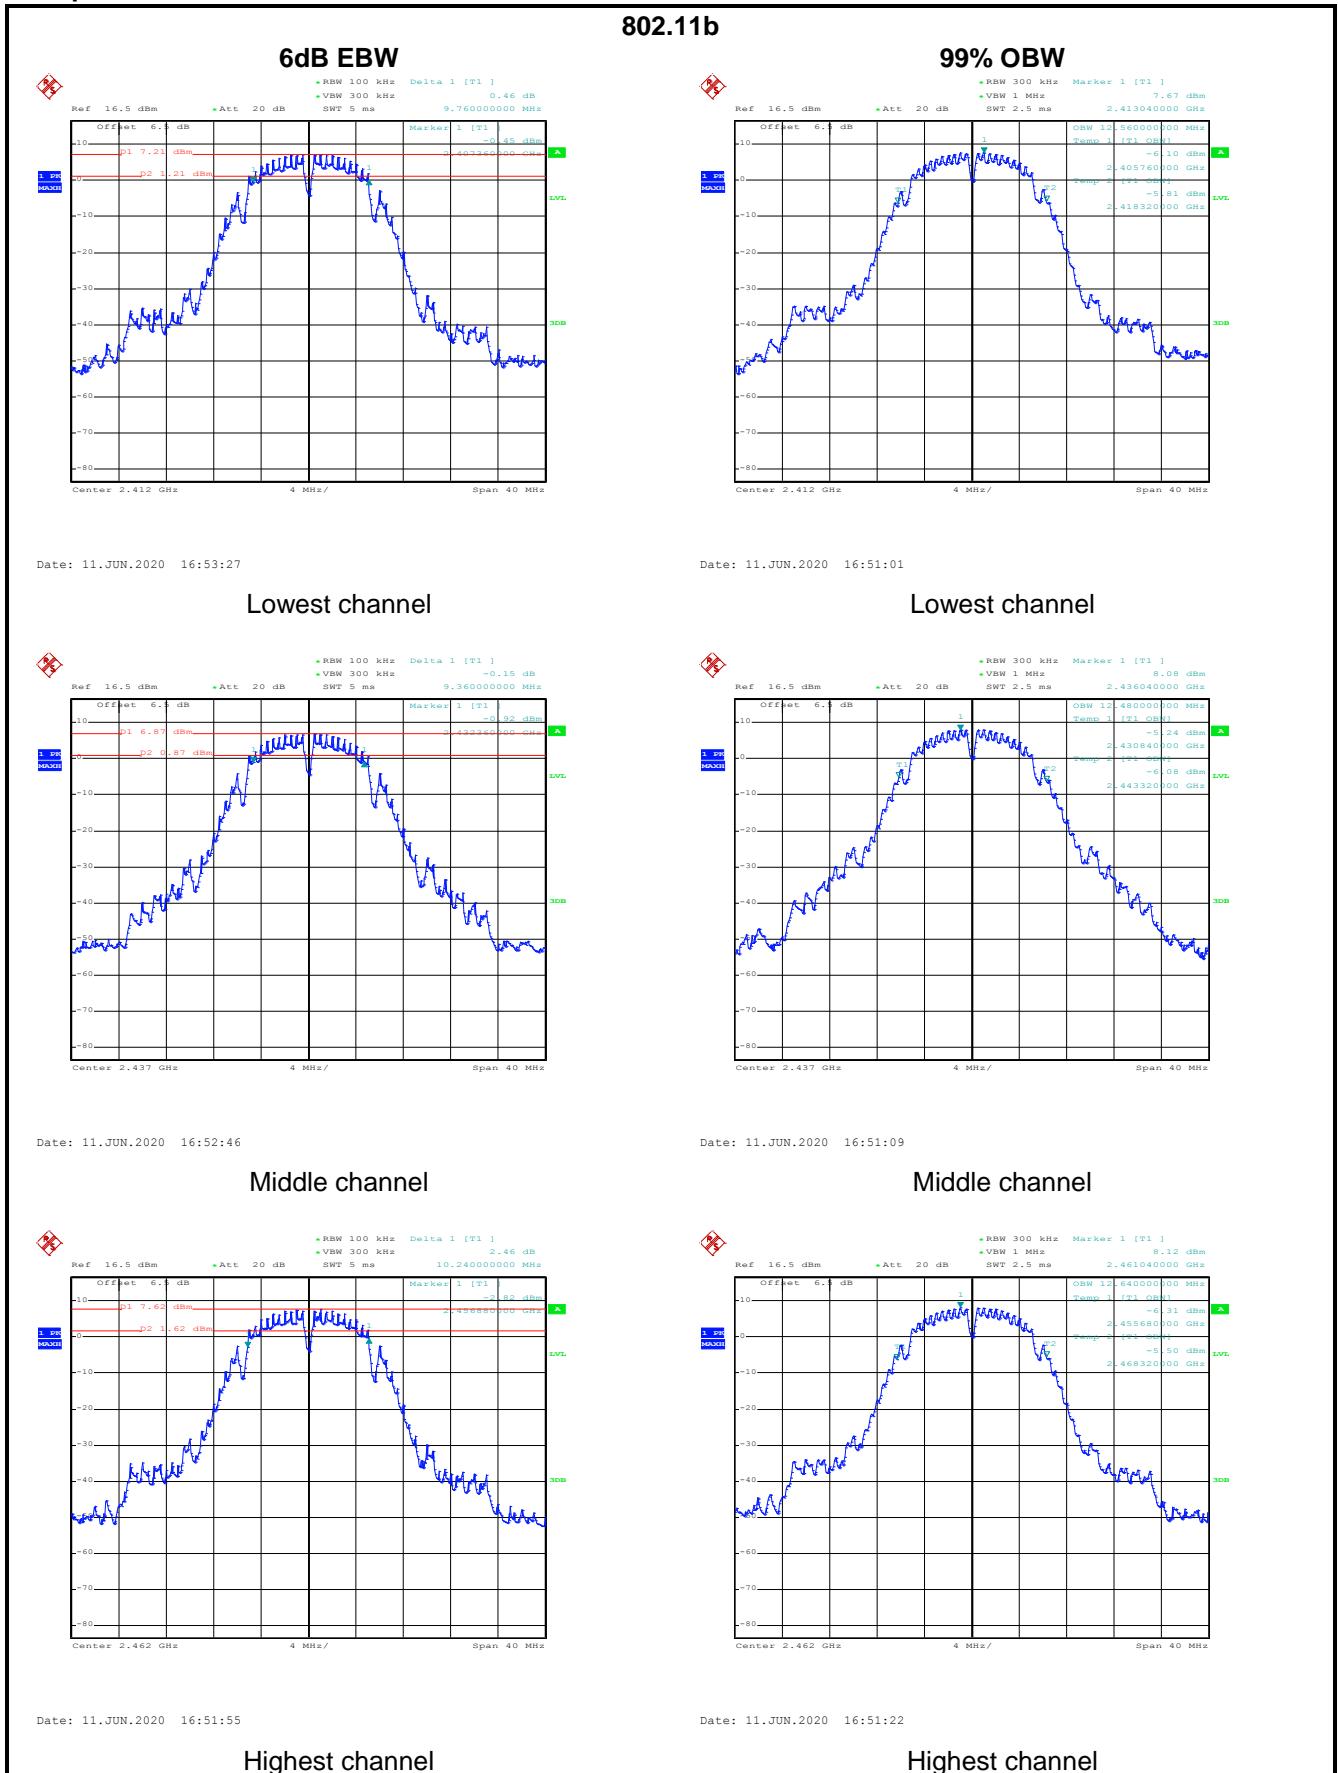


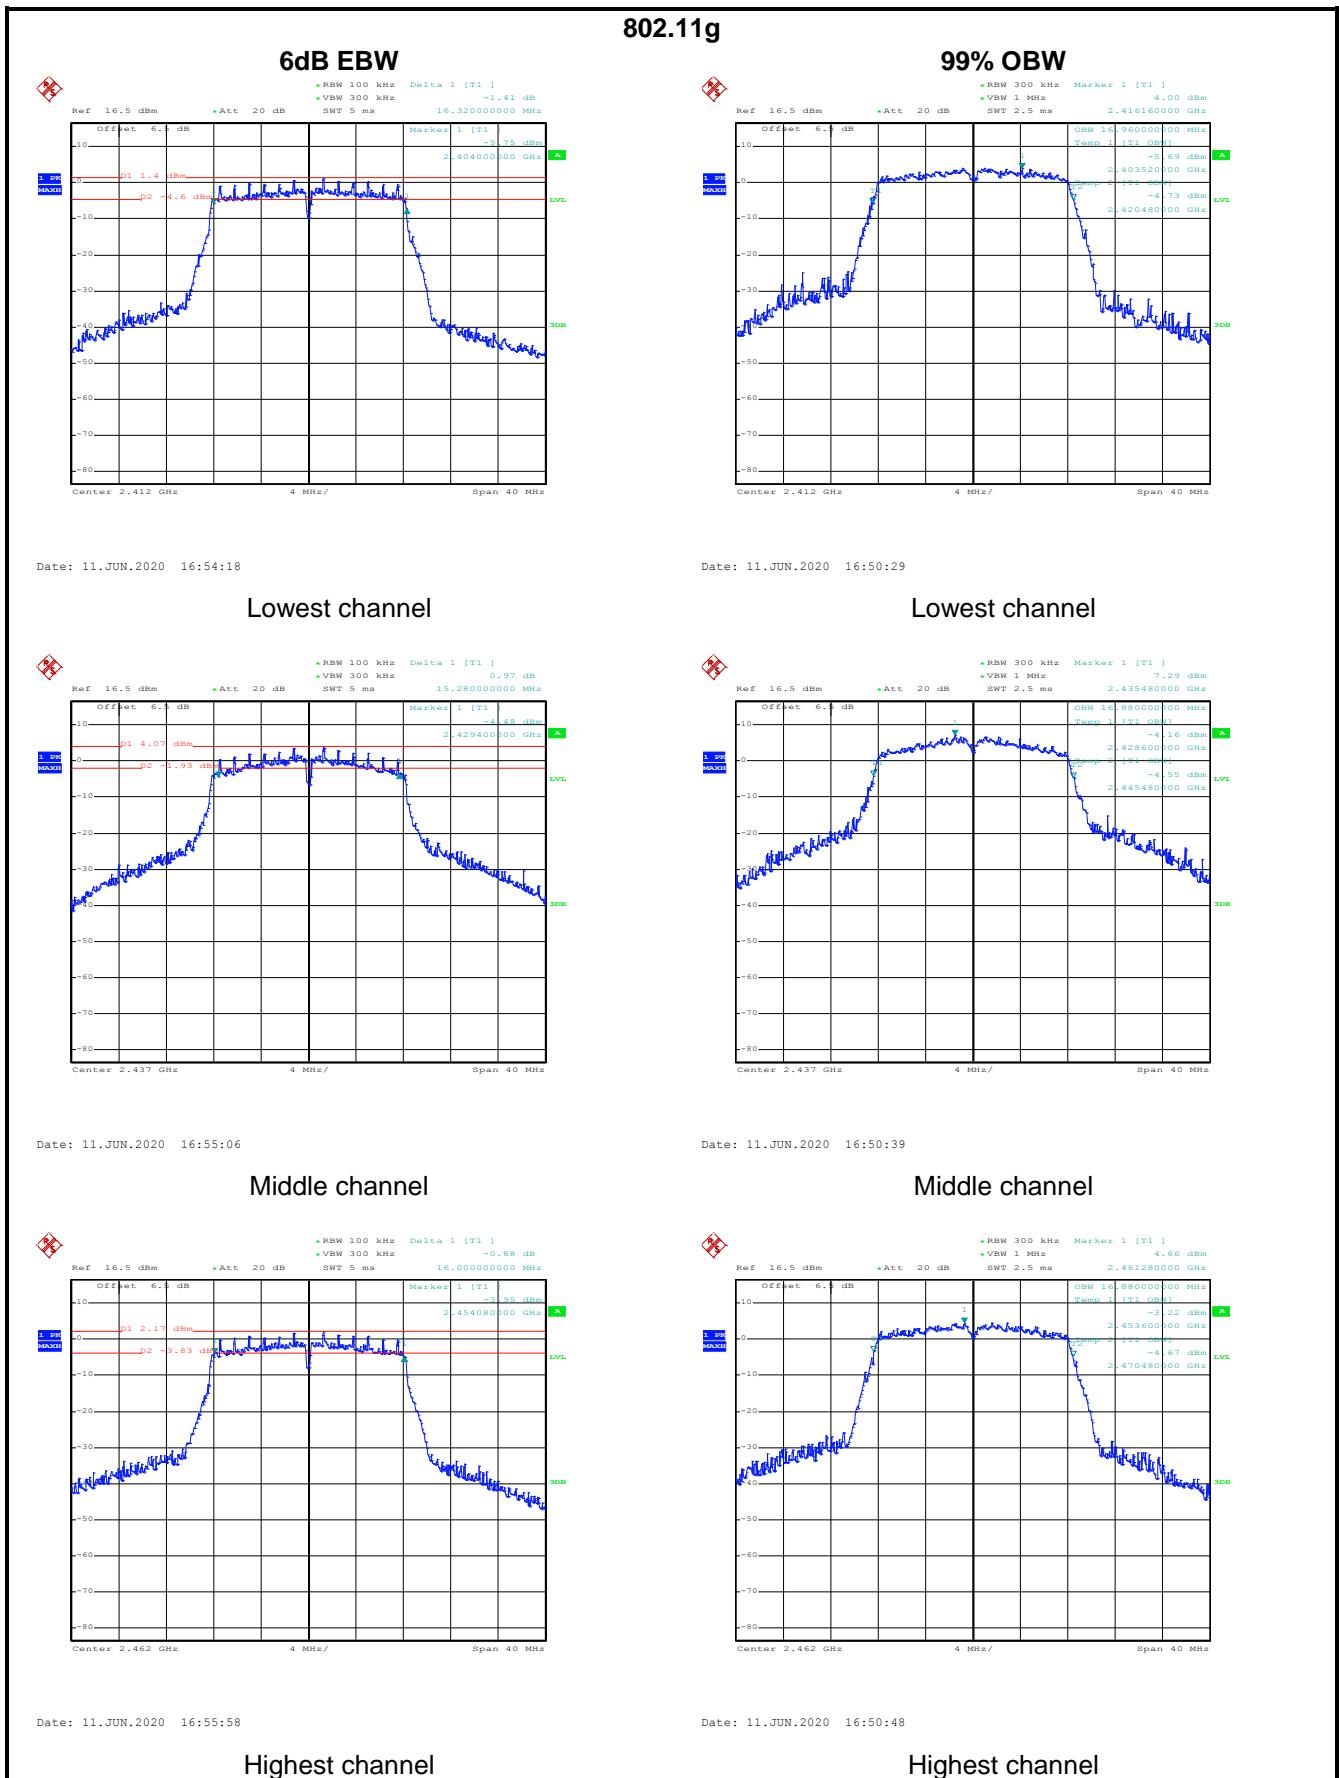

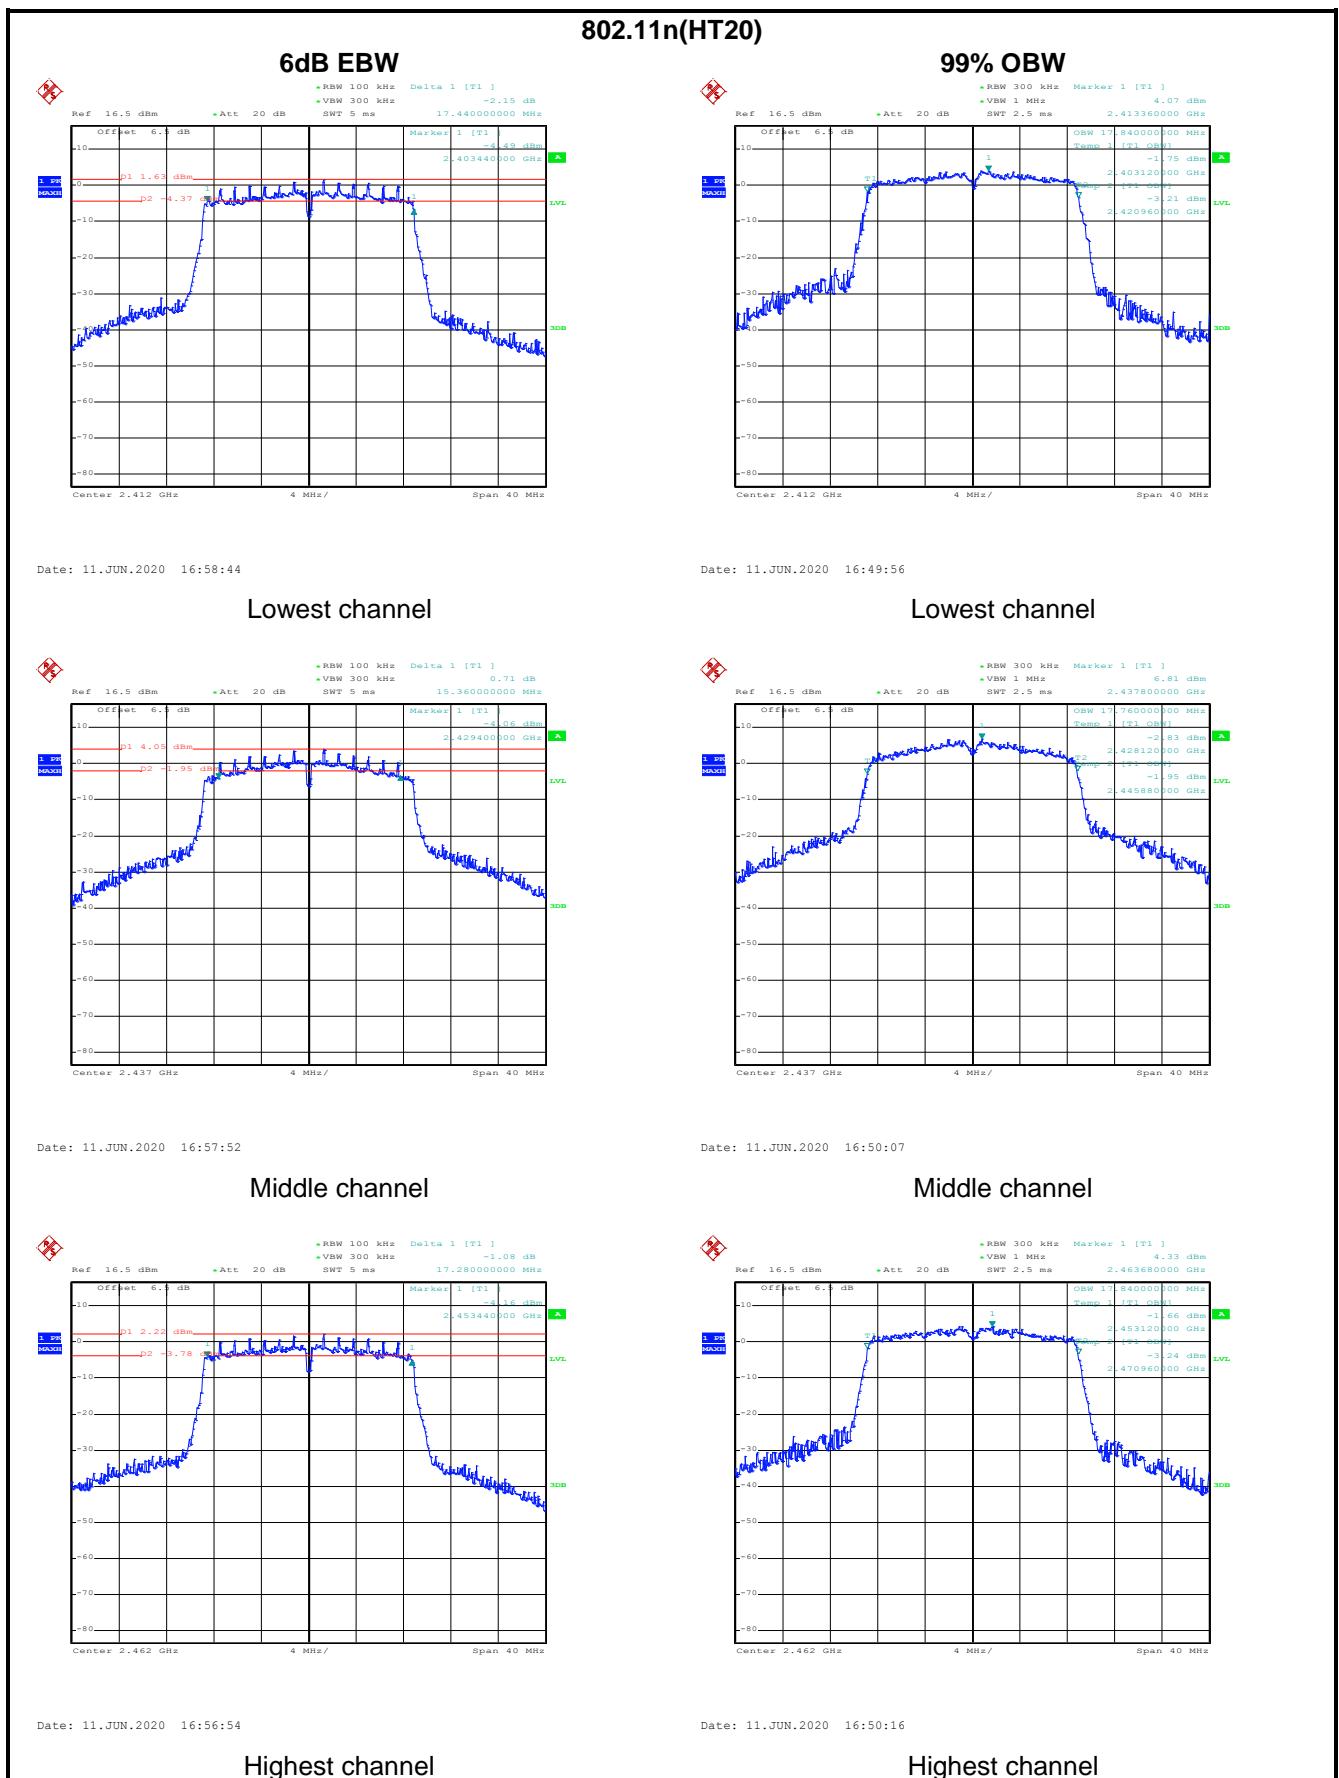

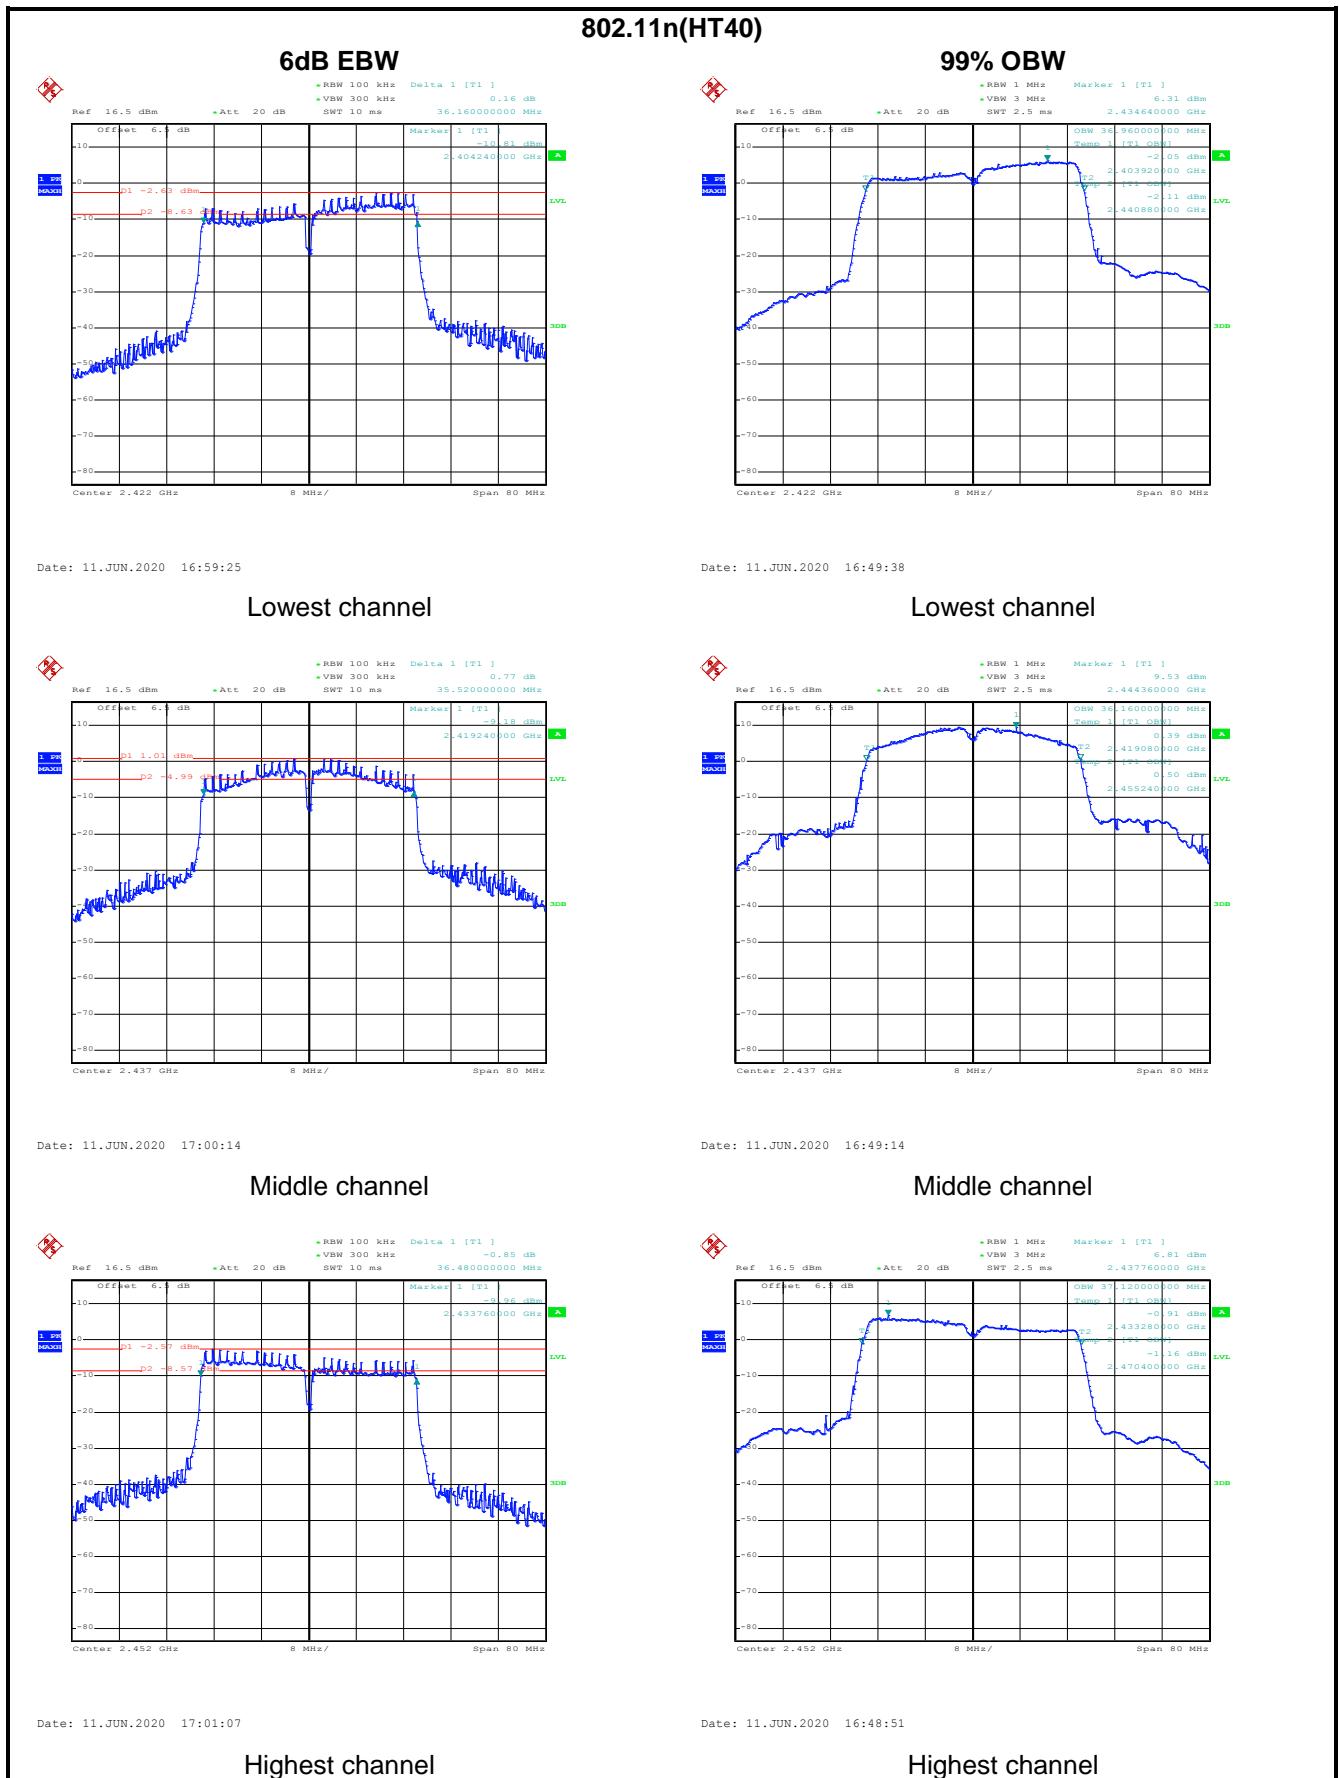


6.5 Power Spectral Density

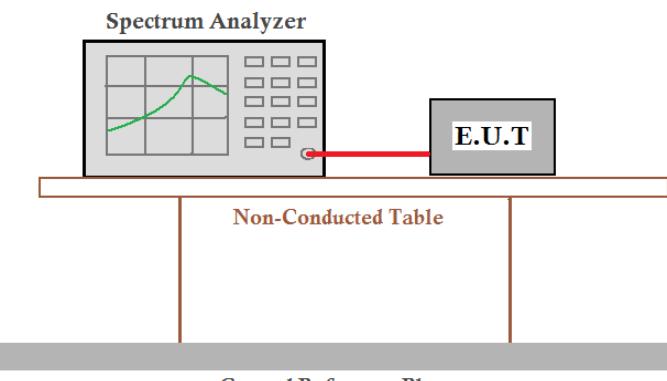
Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-7.94	-12.85	-14.15	-16.41	8.00	Pass
Middle	-7.97	-9.53	-10.55	-13.94		
Highest	-7.91	-12.62	-13.15	-17.79		


Test plot as follows:

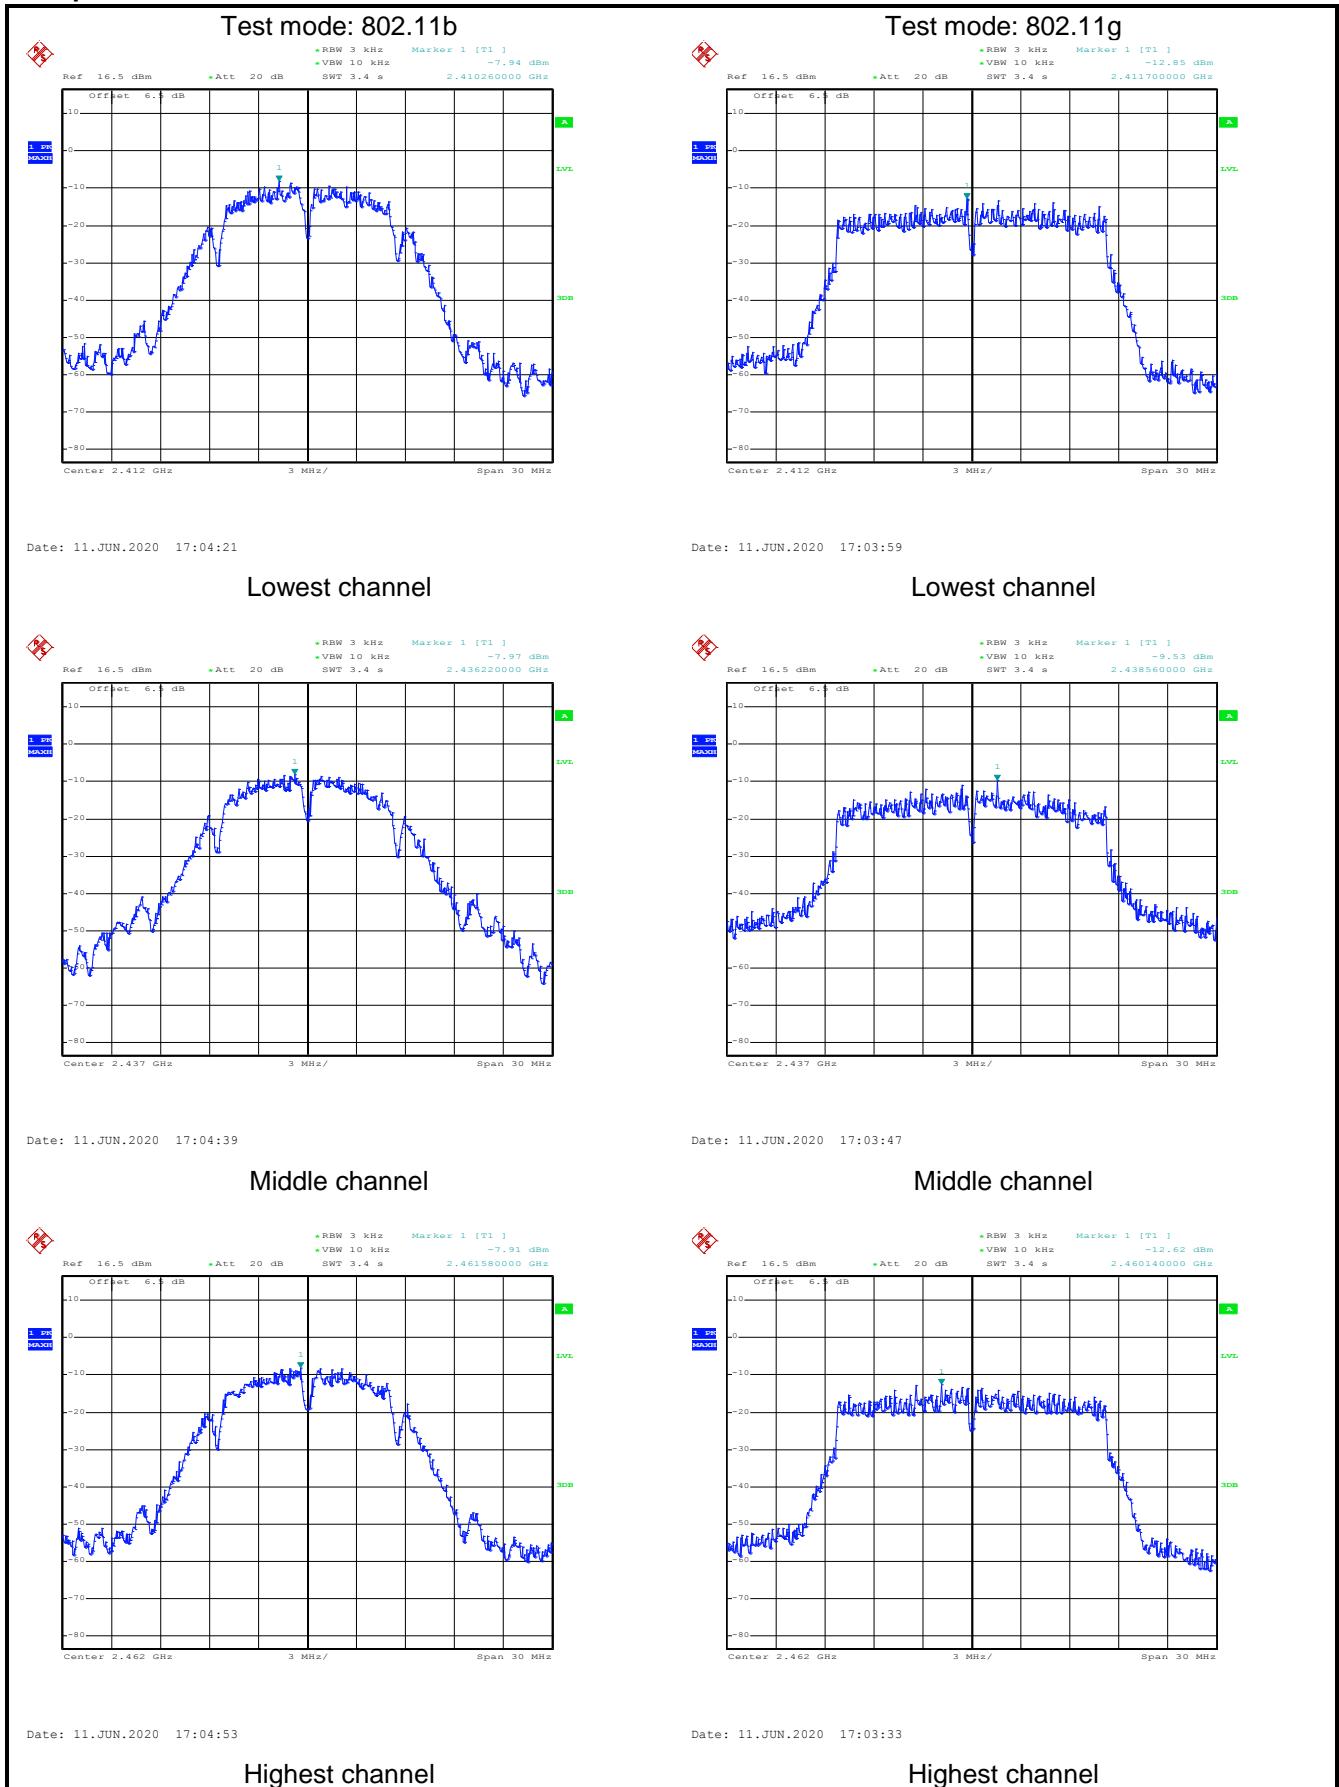

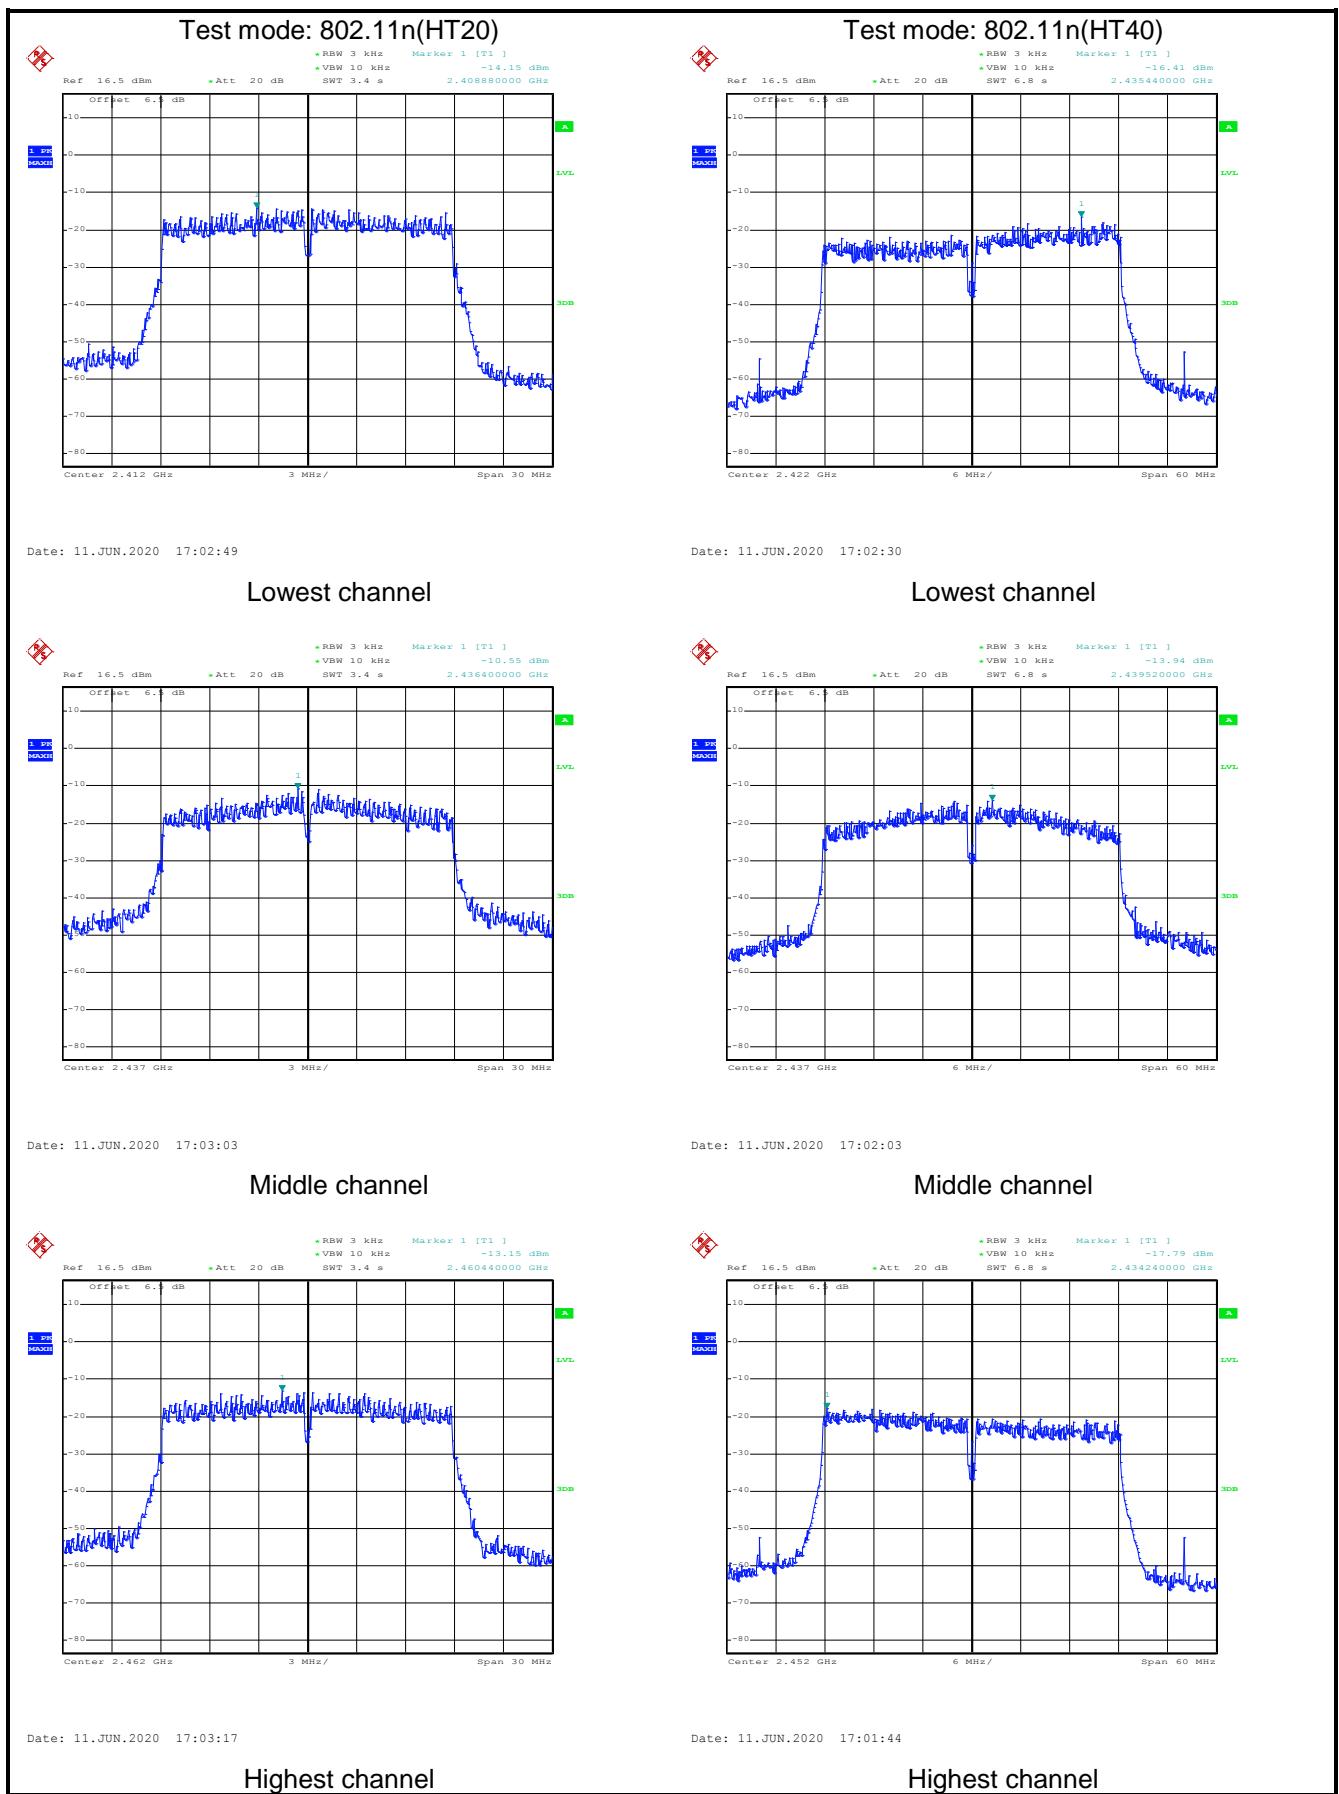



6.6 Band Edge

6.6.1 Conducted Emission Method

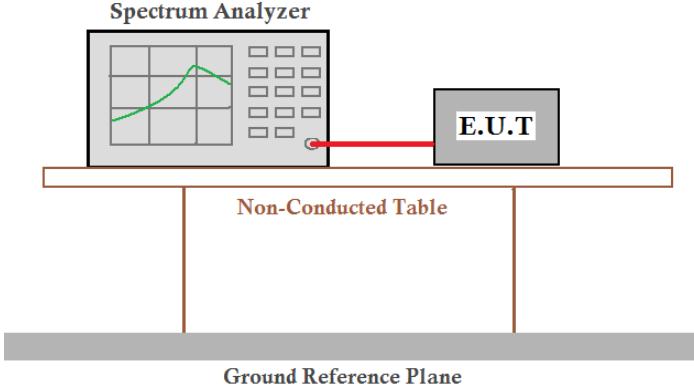Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

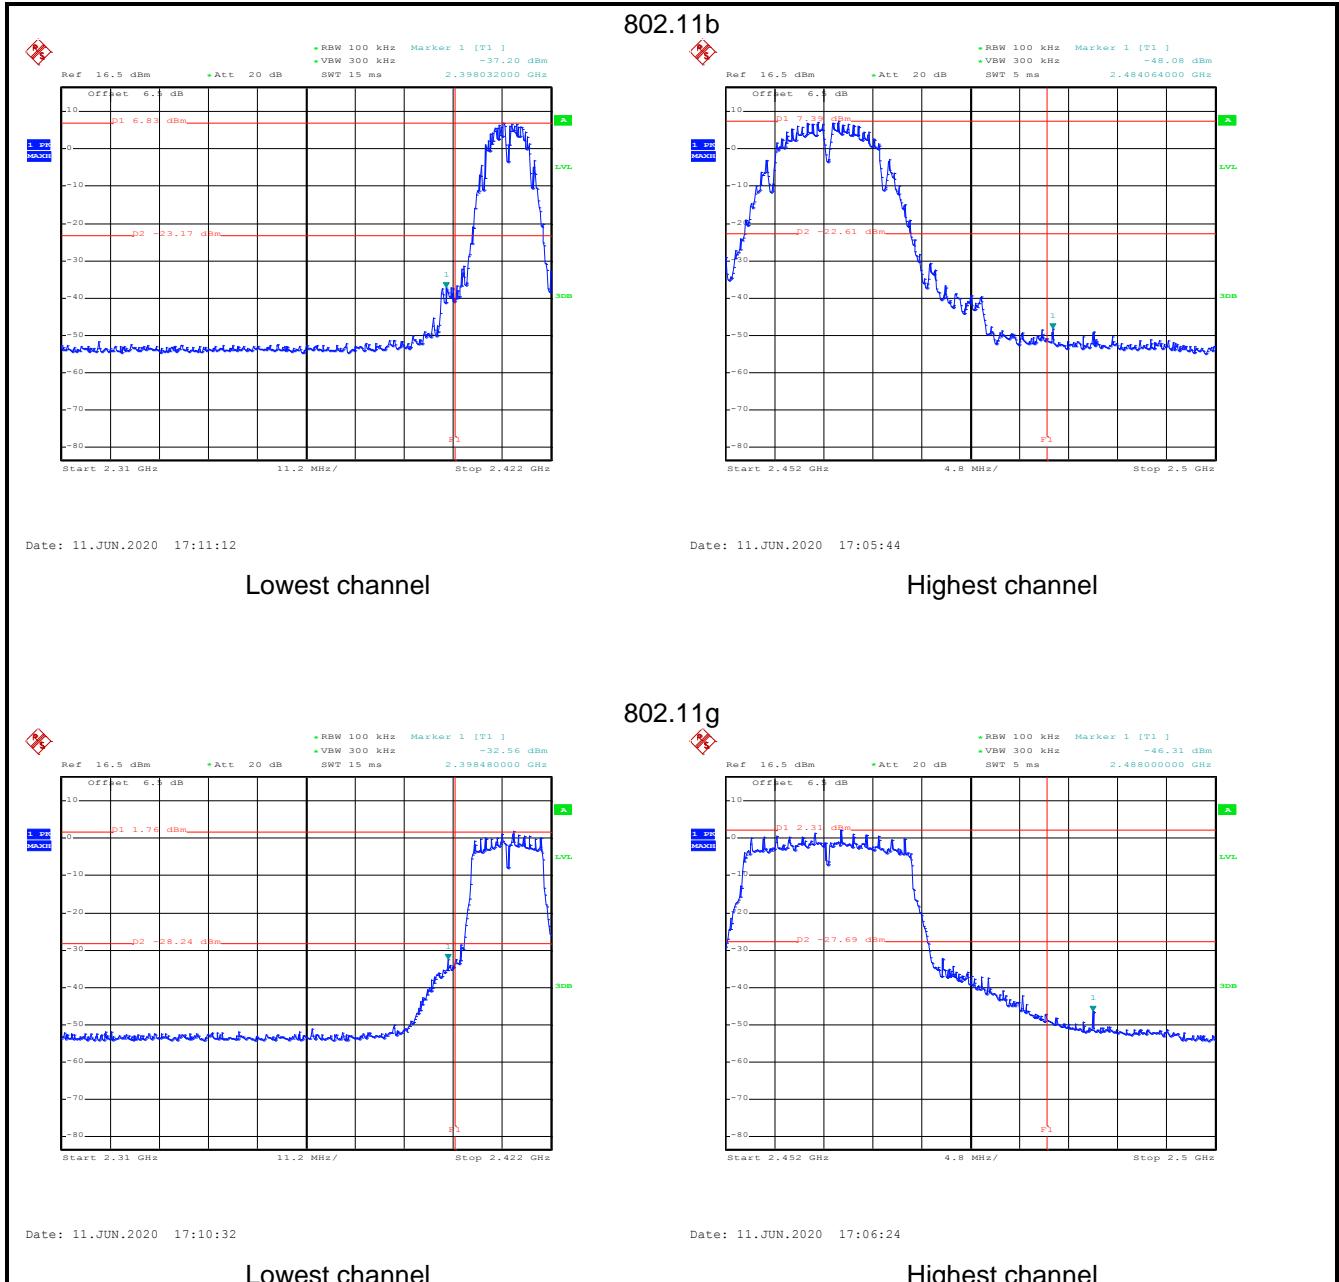

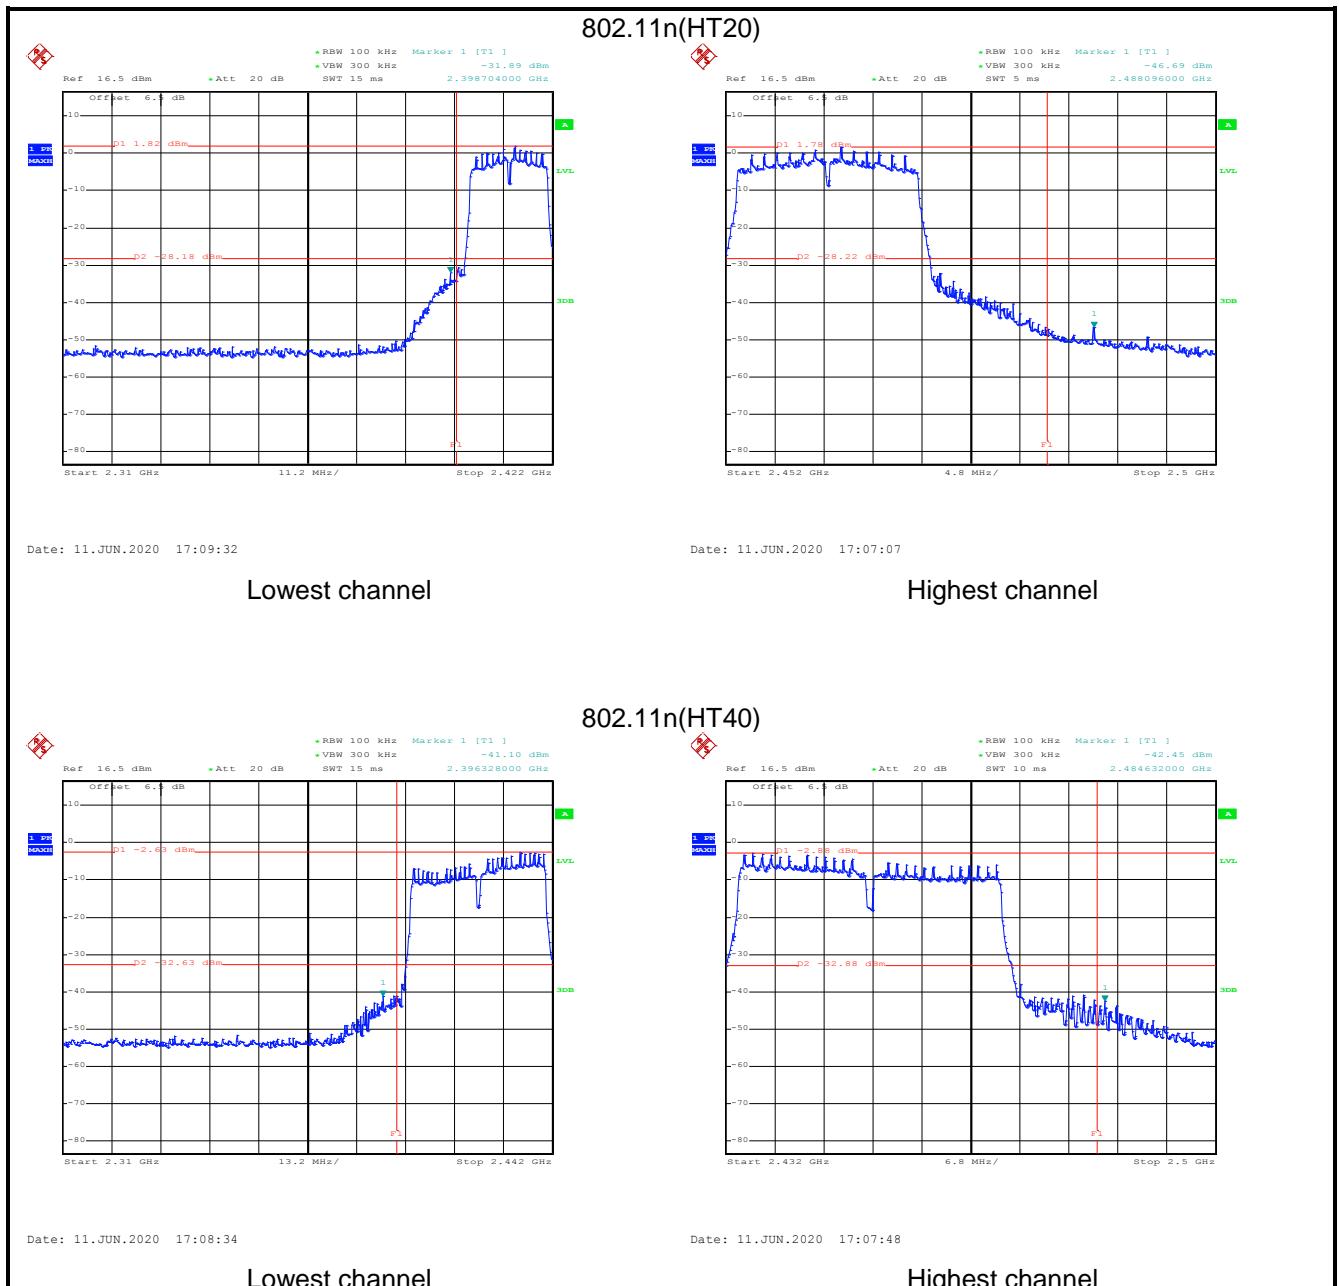


6.6.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205										
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz										
Test Distance:	3m										
Receiver setup:	Frequency	Detector	RBW	VBW	Remark						
	Above 1GHz	Peak	1MHz	3MHz	Peak Value						
Limit:	Frequency	Limit (dBuV/m @3m)		Remark							
	Above 1GHz	54.00		Average Value							
Test Procedure:		<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 									
Test setup:											
Test Instruments:	Refer to section 5.9 for details										
Test mode:	Refer to section 5.3 for details										
Test results:	Passed										

802.11b mode:

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

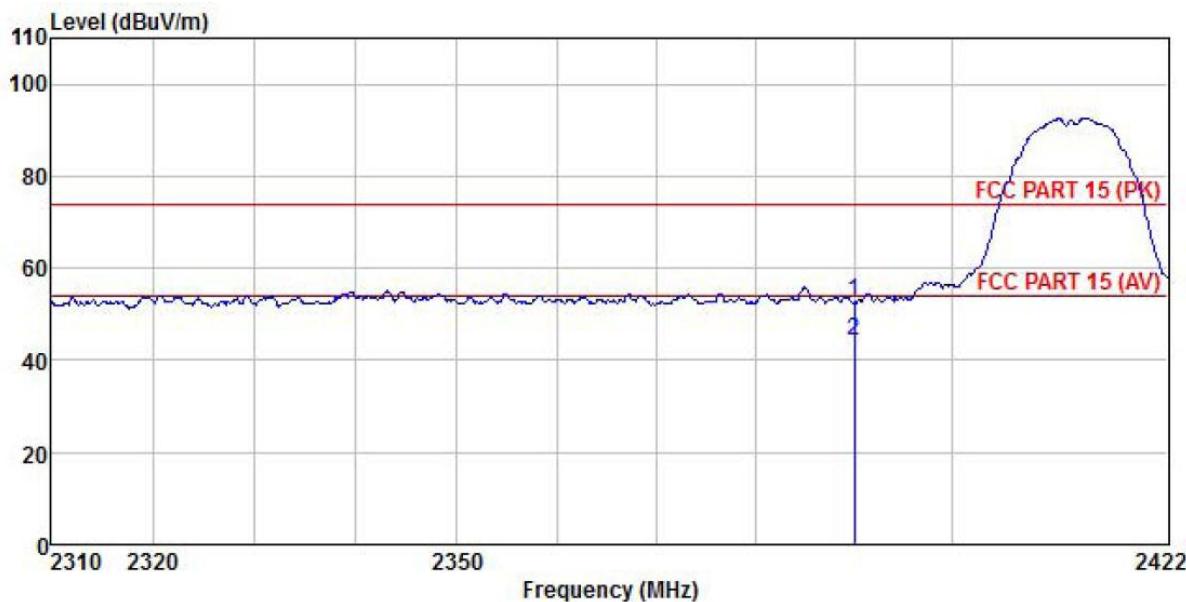


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss	Factor	Factor	Line	Line	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.59	27.03	4.28	1.68	0.00	52.58	74.00	-21.42 Peak
2	2390.000	11.34	27.03	4.28	1.68	0.00	44.33	54.00	-9.67 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

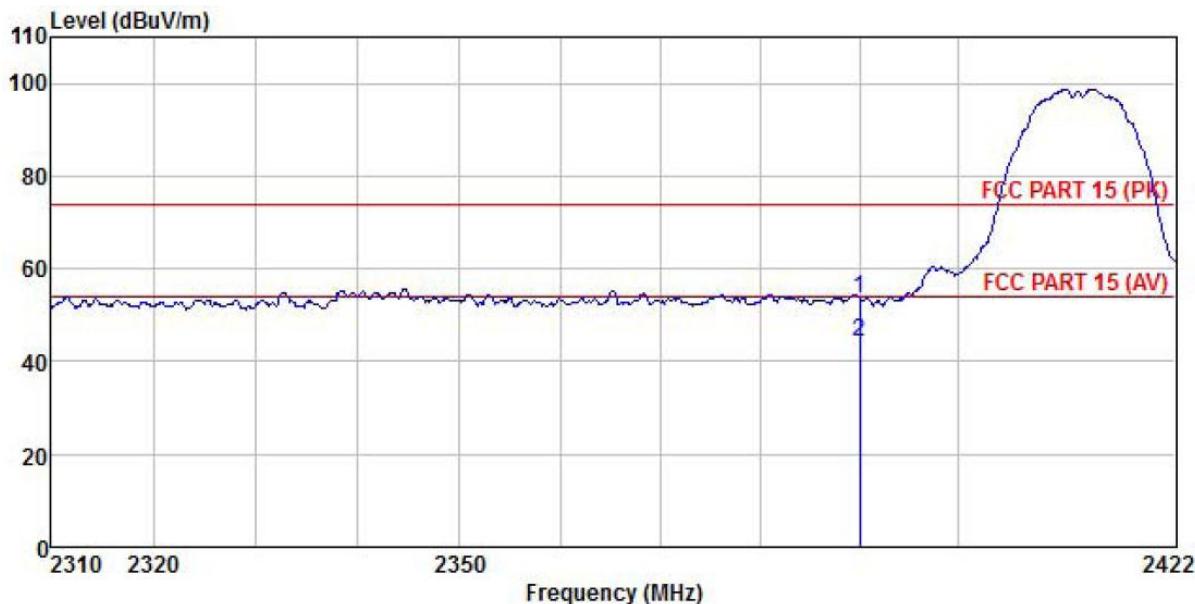


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preampl Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	20.44	27.03	4.28	1.68	0.00	53.43	74.00	-20.57	Peak
2 2390.000	11.20	27.03	4.28	1.68	0.00	44.19	54.00	-9.81	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

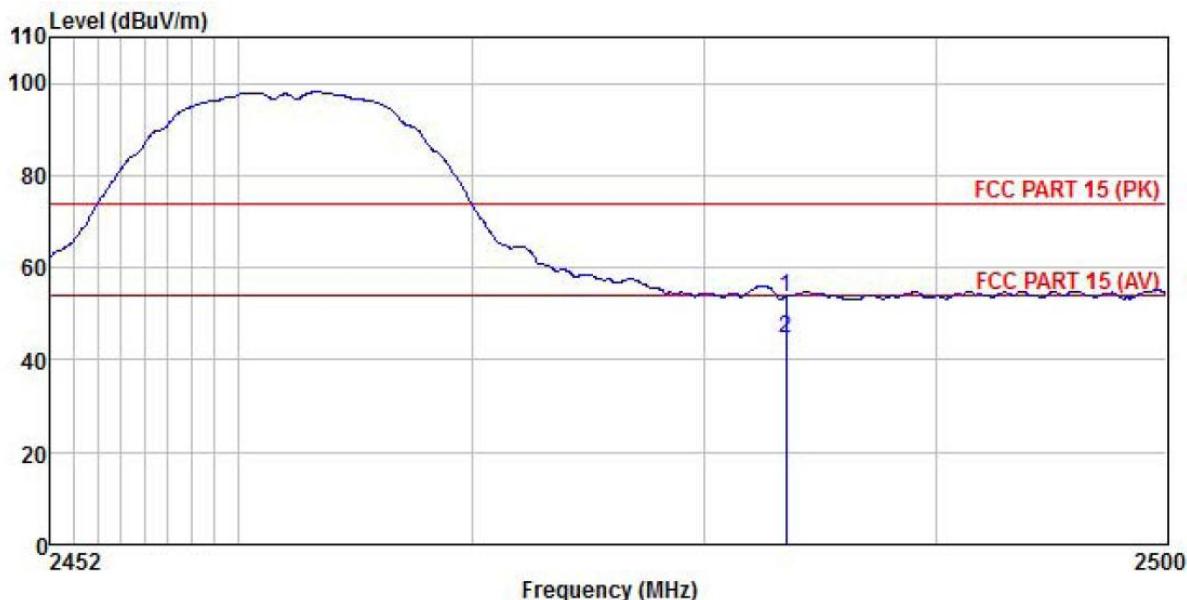


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preampl Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	20.40	27.27	4.38	1.70	0.00	53.75	74.00	-20.25	Peak
2 2483.500	11.17	27.27	4.38	1.70	0.00	44.52	54.00	-9.48	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

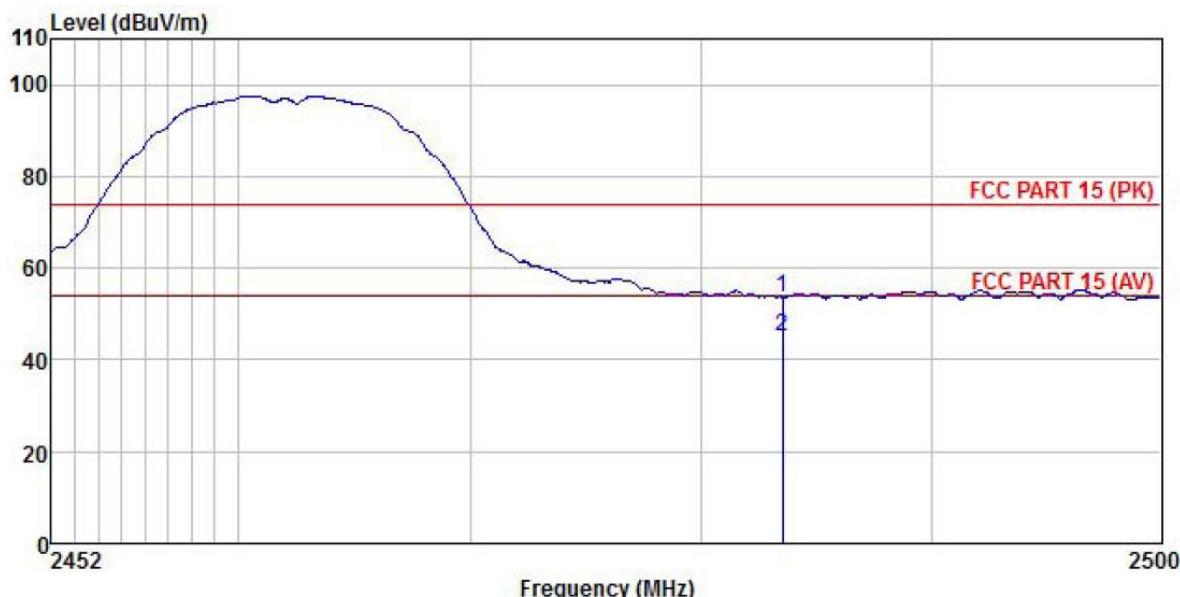


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamp Factor dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1 2483.500	20.32	27.27	4.38	1.70	0.00	53.67	74.00	-20.33	Peak
2 2483.500	11.88	27.27	4.38	1.70	0.00	45.23	54.00	-8.77	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

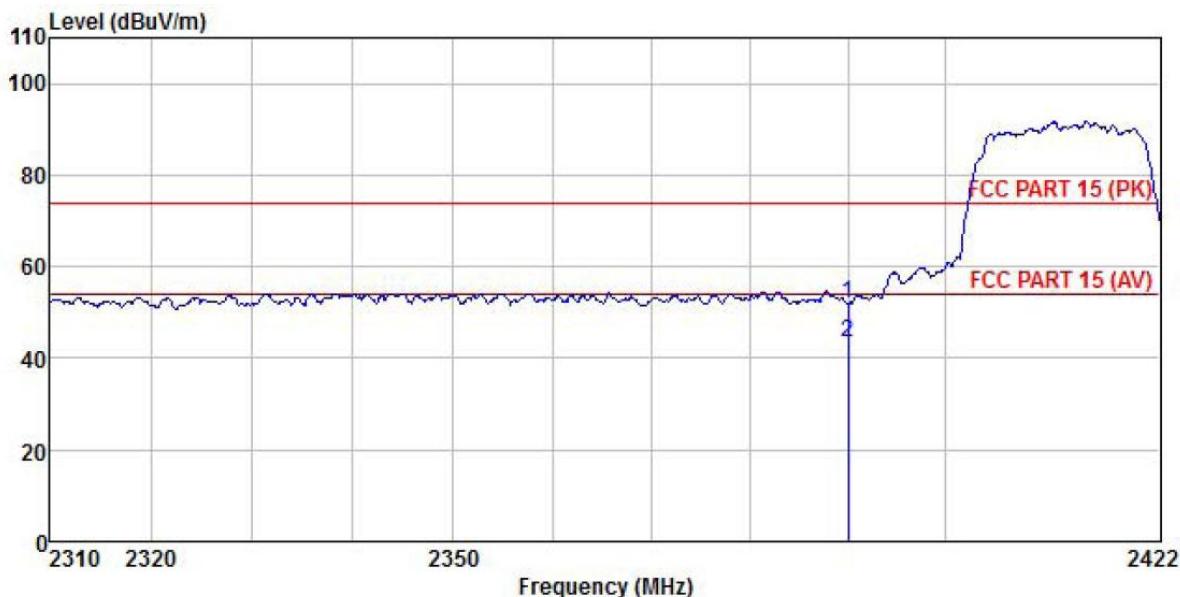


Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	18.97	27.03	4.28	1.68	0.00	51.96	74.00	-22.04 Peak
2	2390.000	10.44	27.03	4.28	1.68	0.00	43.43	54.00	-10.57 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

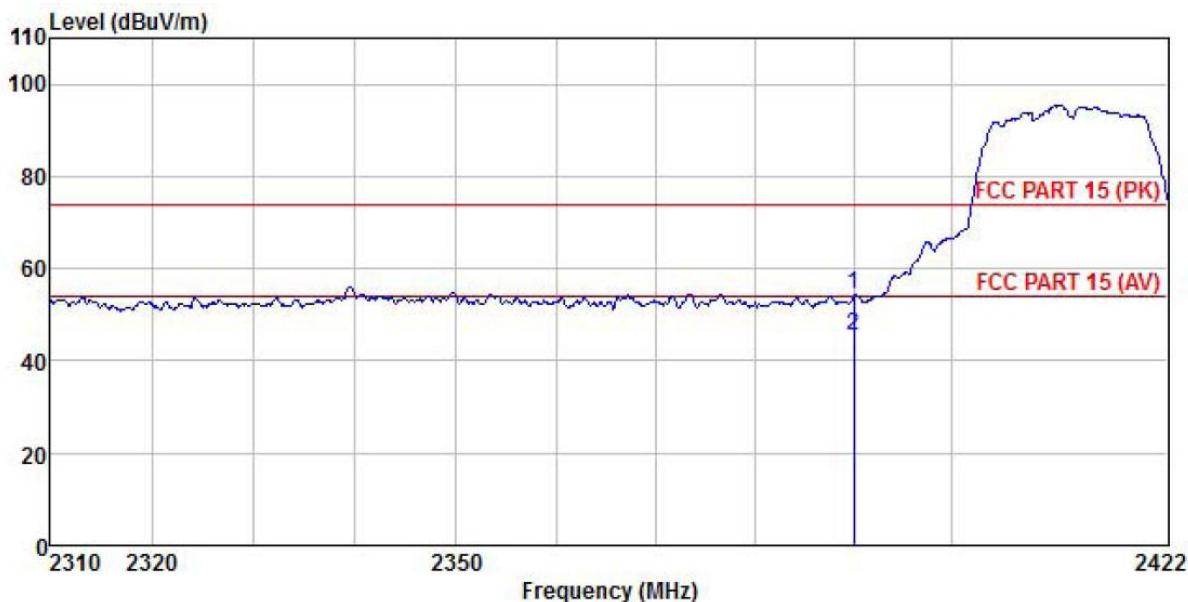


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	21.29	27.03	4.28	1.68	0.00	54.28	74.00	-19.72	Peak
2 2390.000	12.44	27.03	4.28	1.68	0.00	45.43	54.00	-8.57	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

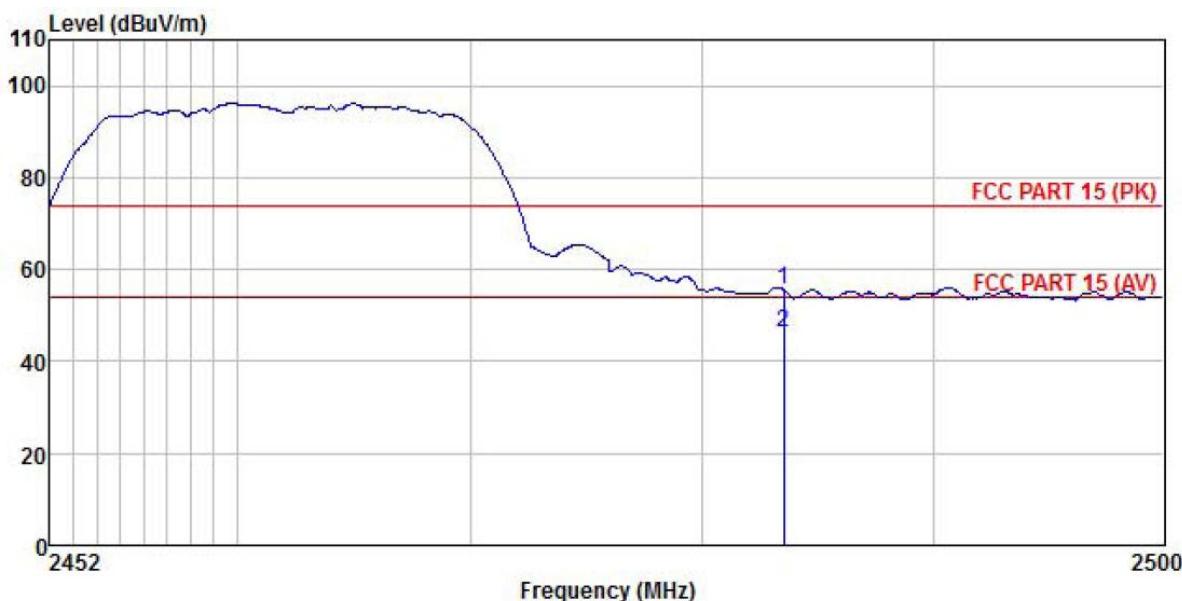


Freq	ReadAntenna Level	Cable Factor	Aux Loss	Preampl Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.28	27.27	4.38	1.70	0.00	55.63	74.00 -18.37 Peak
2	2483.500	13.03	27.27	4.38	1.70	0.00	46.38	54.00 -7.62 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

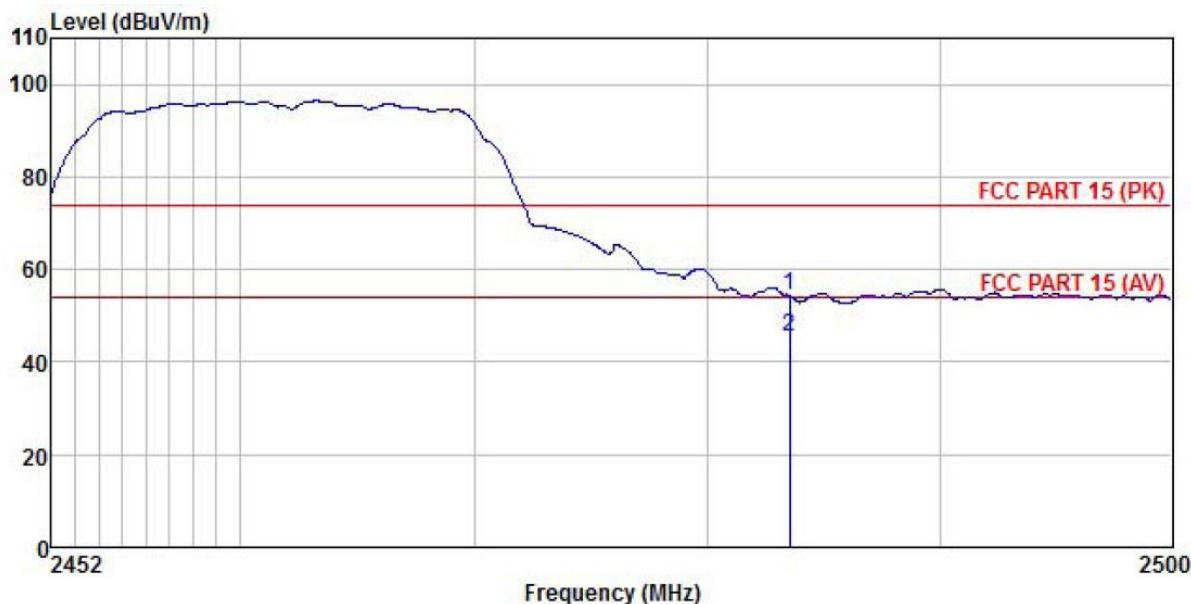


Freq	Read Level MHz	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	2483.500	21.02	27.27	4.38	1.70	0.00	54.37	74.00	-19.63	Peak
2	2483.500	12.30	27.27	4.38	1.70	0.00	45.65	54.00	-8.35	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

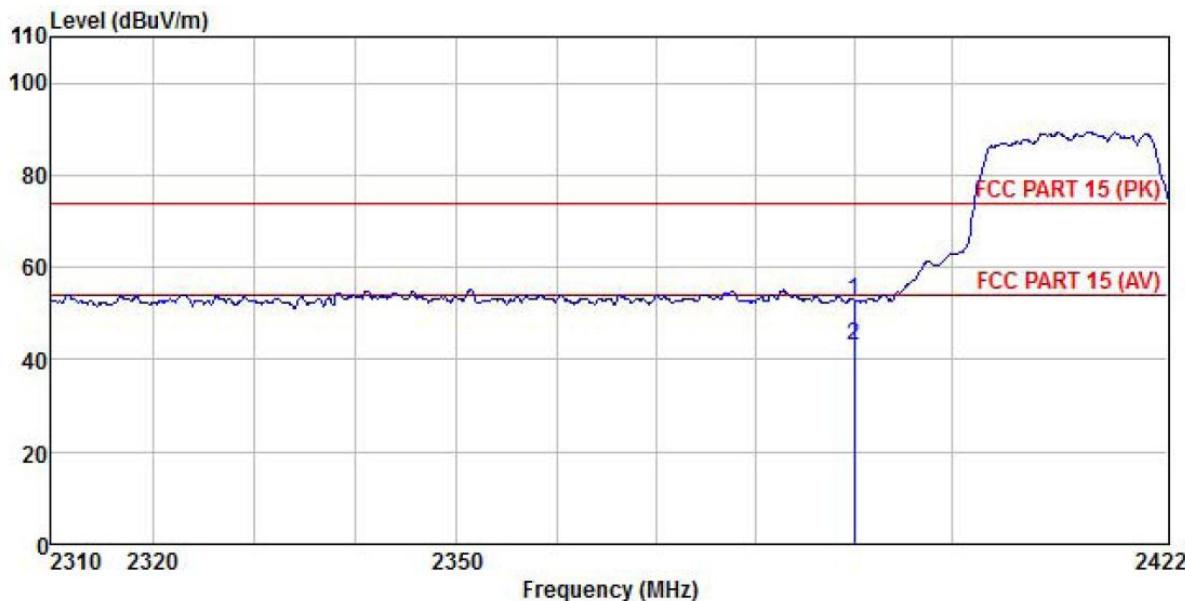


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark
MHz	Level	Factor	Loss	Factor	Factor	Level	Line	
	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.58	27.03	4.28	1.68	0.00	52.57	74.00 -21.43 Peak
2	2390.000	10.14	27.03	4.28	1.68	0.00	43.13	54.00 -10.87 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

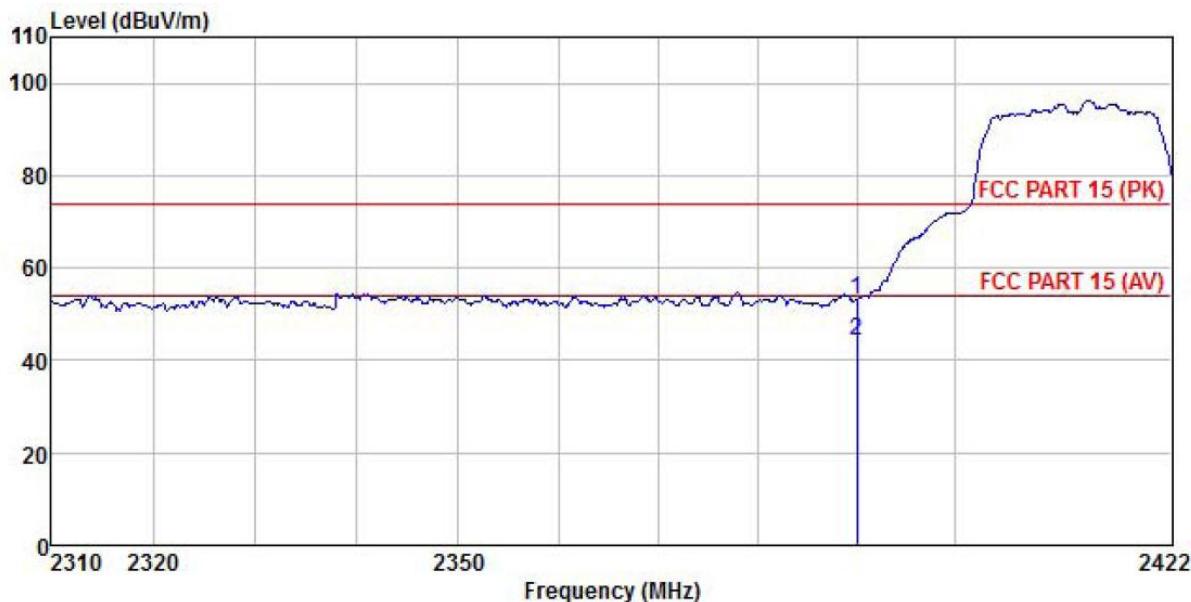


Freq	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Remark
MHz	Level	Factor	Loss	Factor	Factor	Level	Line	Limit
	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.29	27.03	4.28	1.68	0.00	53.28	74.00 -20.72 Peak
2	2390.000	11.32	27.03	4.28	1.68	0.00	44.31	54.00 -9.69 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

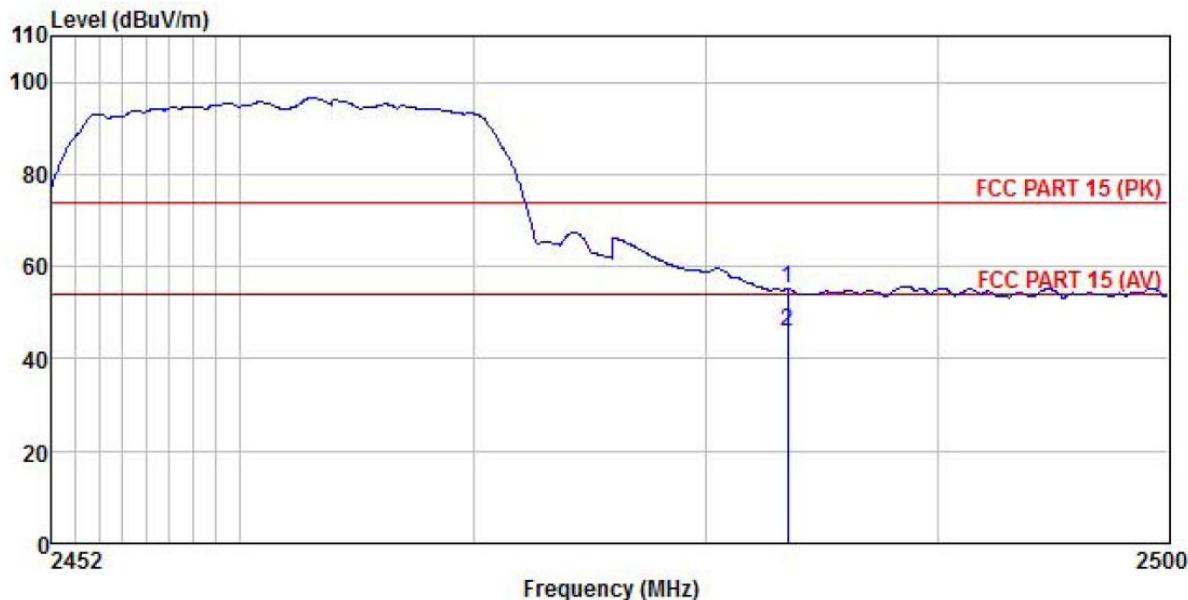


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	21.83	27.27	4.38	1.70	0.00	55.18	74.00	-18.82	Peak
2 2483.500	12.60	27.27	4.38	1.70	0.00	45.95	54.00	-8.05	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

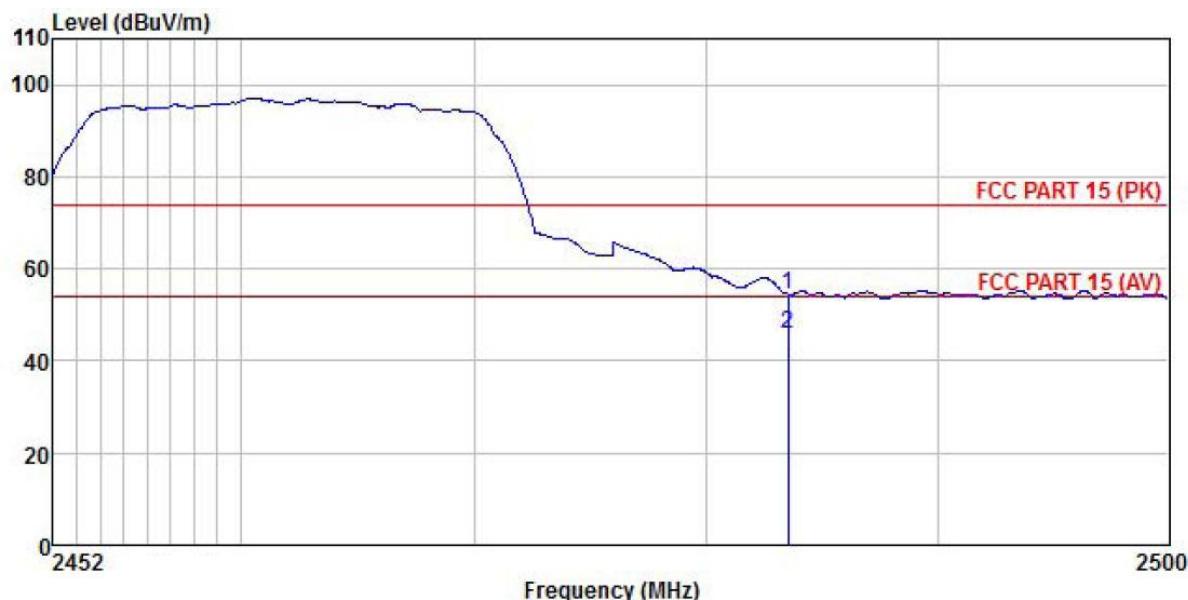


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preampl Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.15	27.27	4.38	1.70	0.00	54.50	74.00	-19.50 Peak
2	2483.500	12.60	27.27	4.38	1.70	0.00	45.95	54.00	-8.05 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

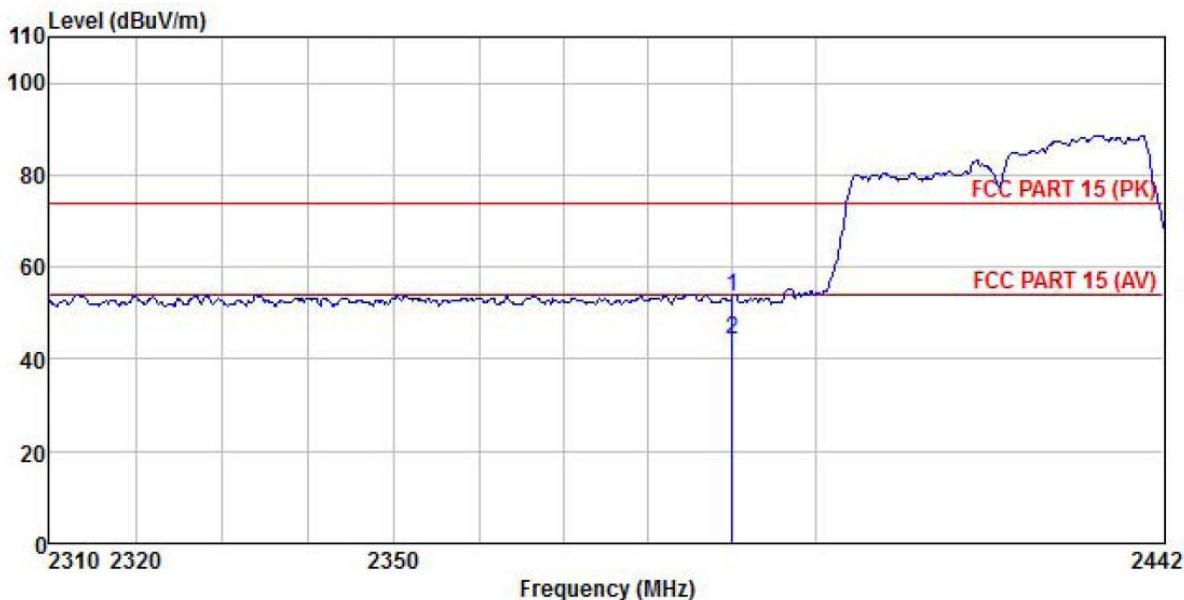


Freq	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Remark	
	Freq	Level	Factor	Loss	Factor	Factor	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.46	27.03	4.28	1.68	0.00	53.45	74.00	-20.55 Peak
2	2390.000	11.05	27.03	4.28	1.68	0.00	44.04	54.00	-9.96 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

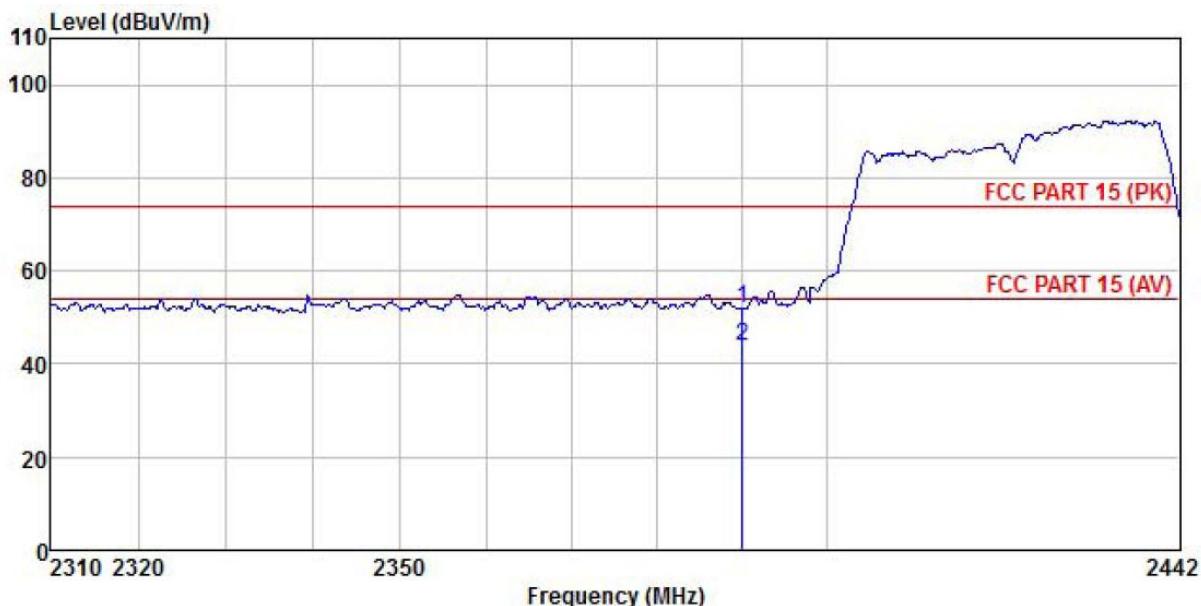


Freq MHz	Read	Antenna	Cable	Aux	Preamplifier	Limit Line	Over Limit	Remark	
	Freq	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB				
1	2390.000	18.88	27.03	4.28	1.68	0.00	51.87	74.00	-22.13 Peak
2	2390.000	10.67	27.03	4.28	1.68	0.00	43.66	54.00	-10.34 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

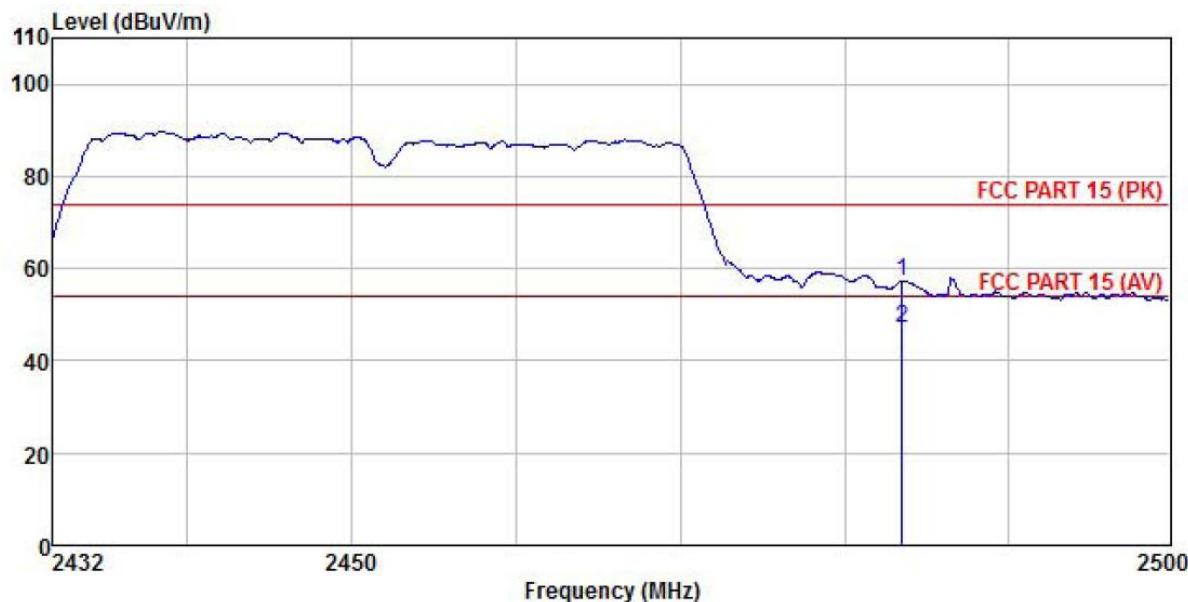


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamplifier Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Line dB	Remark
1 2483.500	23.95	27.27	4.38	1.70	0.00	57.30	74.00	-16.70	Peak
2 2483.500	13.67	27.27	4.38	1.70	0.00	47.02	54.00	-6.98	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

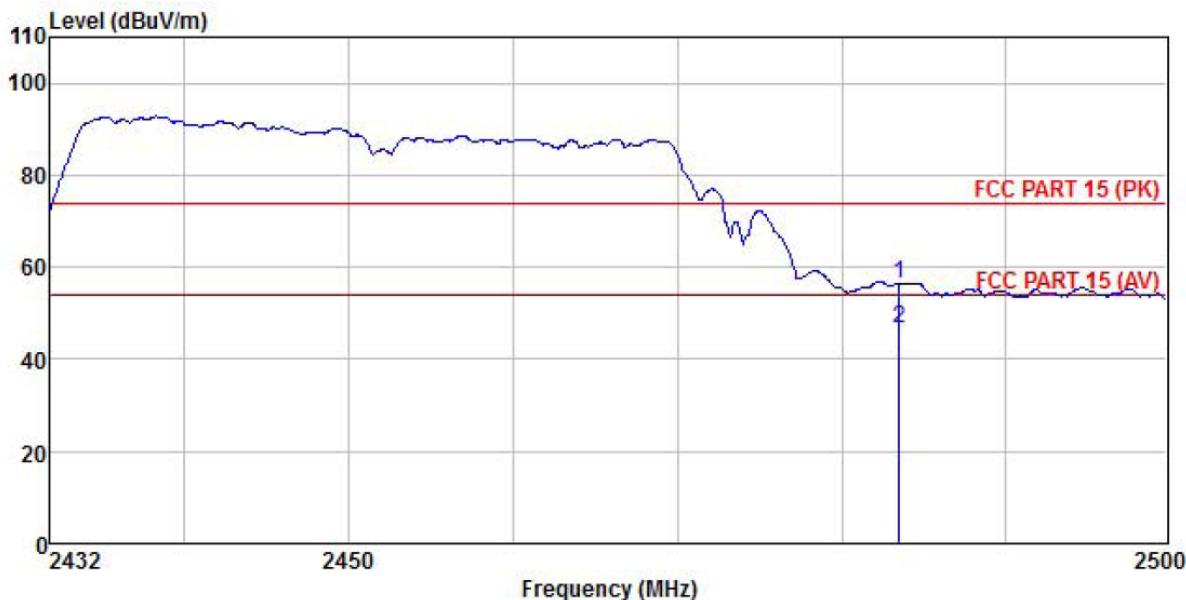


Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.01	27.27	4.38	1.70	0.00	56.36	74.00	-17.64 Peak
2	2483.500	13.18	27.27	4.38	1.70	0.00	46.53	54.00	-7.47 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.7 Spurious Emission


6.7.1 Conducted Emission Method

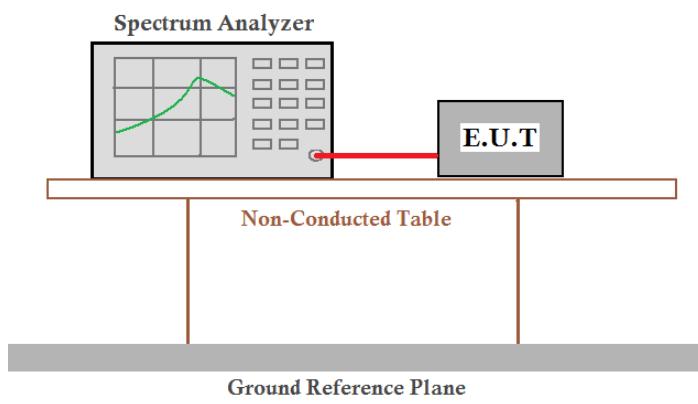Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:


Test mode: 802.11b

Lowest channel

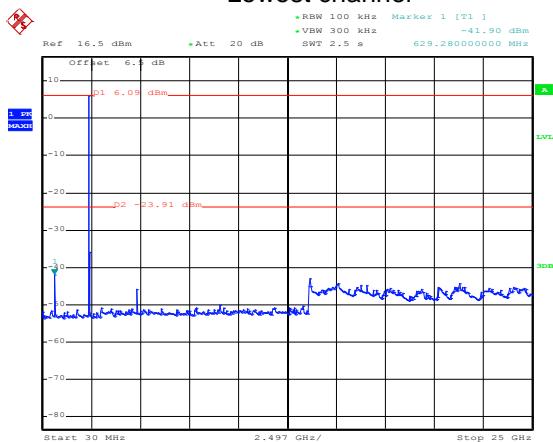


Test mode: 802.11g


Lowest channel

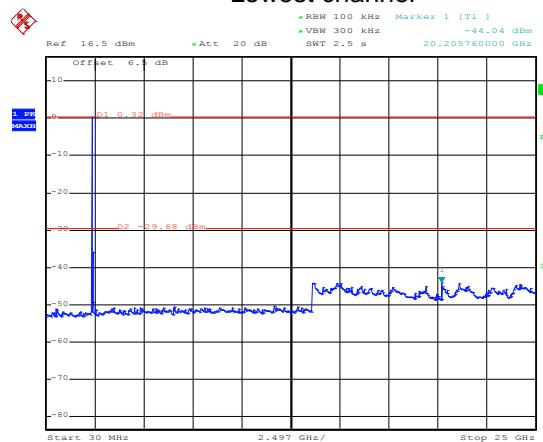


Middle channel

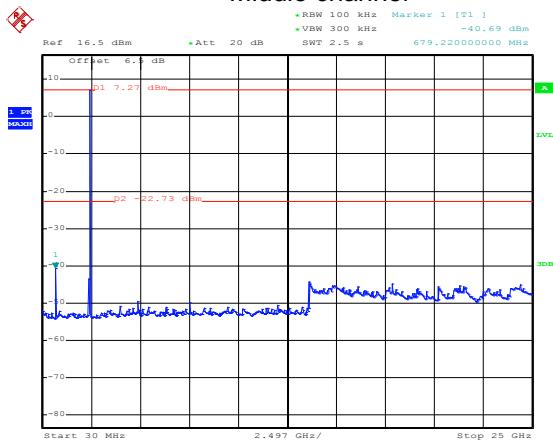


Middle channel

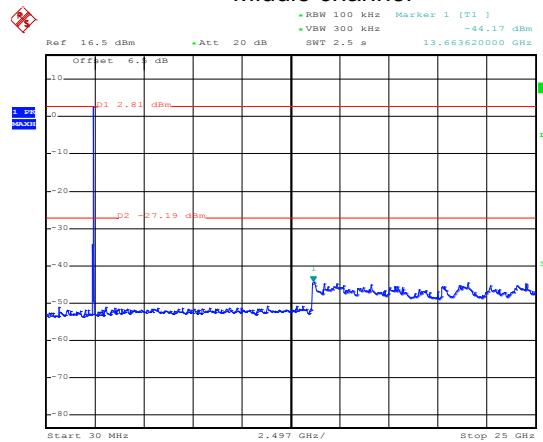


Highest channel

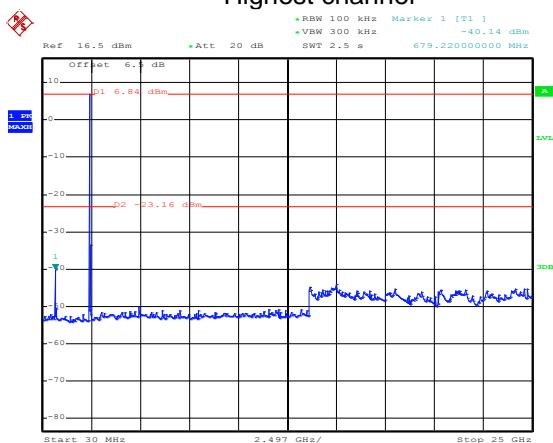


Highest channel

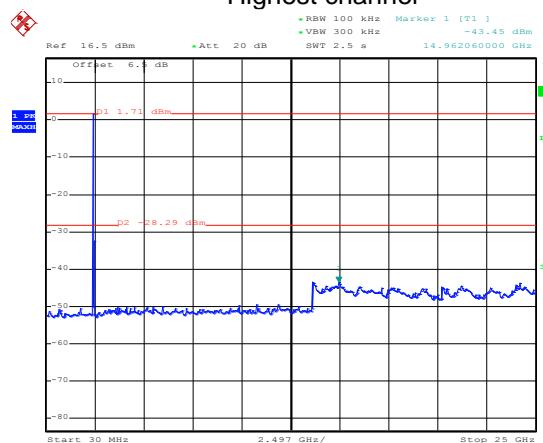


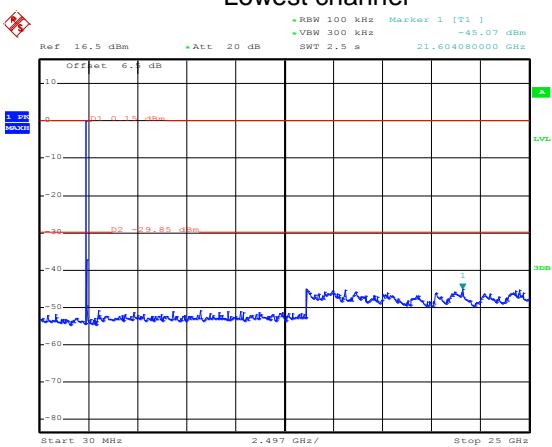Test mode: 802.11n(HT20)**Lowest channel**


Date: 11.JUN.2020 17:36:01

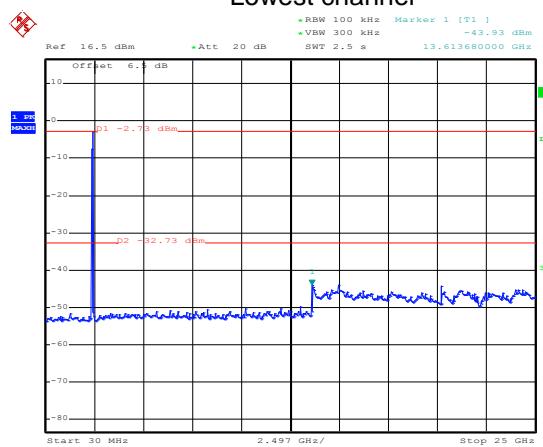Test mode: 802.11n(HT40)**Lowest channel**


Date: 11.JUN.2020 17:44:26

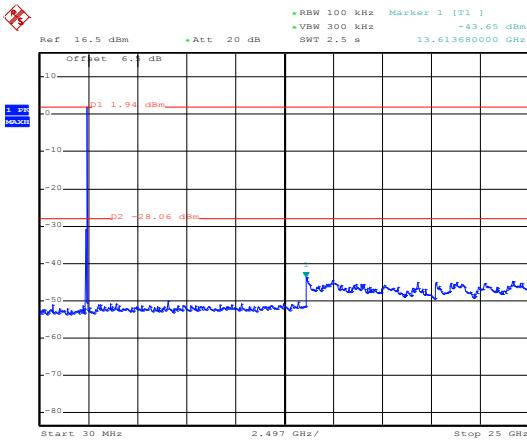Middle channel


Date: 11.JUN.2020 17:38:03

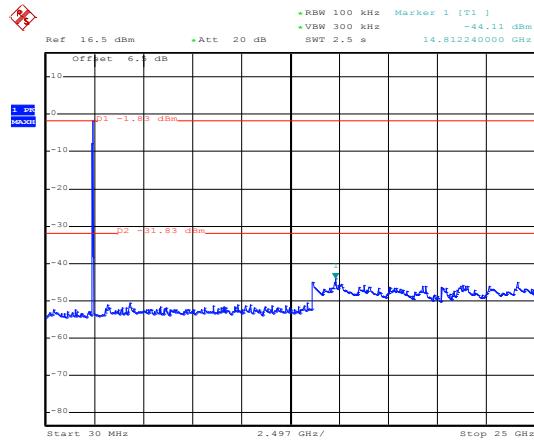Middle channel

Date: 11.JUN.2020 17:42:48

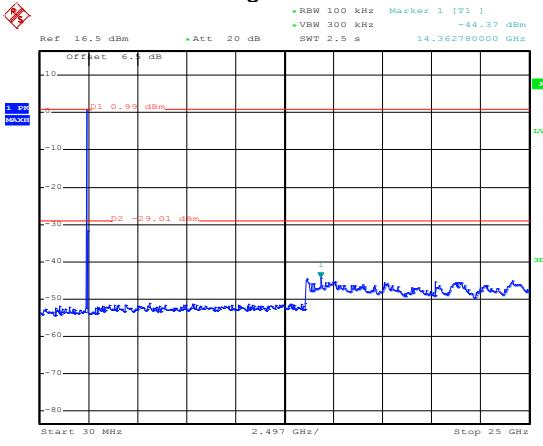Highest channel


Date: 11.JUN.2020 17:38:55

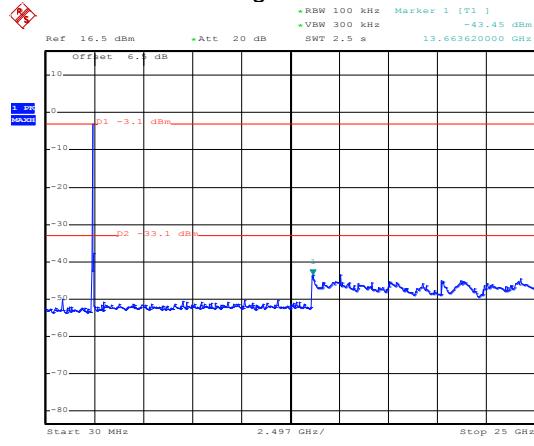Highest channel

Date: 11.JUN.2020 17:41:03

6.7.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205								
Test Frequency Range:	9kHz to 25GHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit:	RMS	1MHz	3MHz	3MHz	Average Value				
	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>								

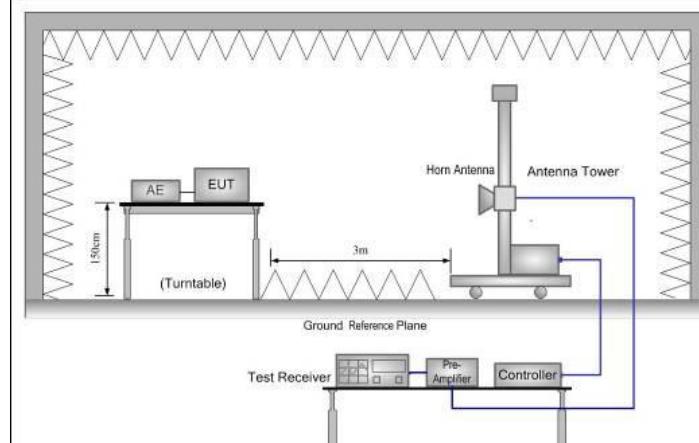


Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ol style="list-style-type: none">1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):**Below 1GHz:**

Product Name:	5.7 inch 4G Smart Phone			Product Model:	L57																																																																																		
Test By:	Janet			Test mode:	Wi-Fi Tx mode																																																																																		
Test Frequency:	30 MHz ~ 1 GHz			Polarization:	Vertical																																																																																		
Test Voltage:	AC 120/60Hz			Environment:	Temp: 24°C Huni: 57%																																																																																		
<p>The graph plots Level (dBuV/m) on the Y-axis (0 to 80) against Frequency (MHz) on the X-axis (30 to 1000). A red step-like line represents the FCC Part 15.247 limit, which is flat at 40 dB from 30 MHz to 80 MHz, then rises to 46 dB at 200 MHz and stays constant up to 1000 MHz. Six vertical blue lines mark specific harmonic frequencies: 1 (~33.445 MHz), 2 (~77.865 MHz), 3 (~185.788 MHz), 4 (~281.008 MHz), 5 (~311.087 MHz), and 6 (~625.078 MHz). The measured emission levels (blue line) generally stay below the 40 dB limit, except for a peak near 100 MHz and some spikes above 200 MHz.</p>																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Aux Factor</th> <th>Preamplifier Factor</th> <th>Limit Level</th> <th>Line Limit</th> <th>Over Limit</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td></td> </tr> <tr> <td>1</td> <td>33.445</td> <td>53.95</td> <td>12.36</td> <td>0.36</td> <td>0.00</td> <td>29.96</td> <td>36.71</td> <td>40.00</td> <td>-3.29 QP</td> </tr> <tr> <td>2</td> <td>77.865</td> <td>45.13</td> <td>12.25</td> <td>0.47</td> <td>0.00</td> <td>29.66</td> <td>28.19</td> <td>40.00</td> <td>-11.81 QP</td> </tr> <tr> <td>3</td> <td>185.788</td> <td>37.10</td> <td>17.23</td> <td>0.69</td> <td>0.00</td> <td>28.93</td> <td>26.09</td> <td>43.50</td> <td>-17.41 QP</td> </tr> <tr> <td>4</td> <td>281.008</td> <td>36.62</td> <td>18.63</td> <td>0.84</td> <td>0.00</td> <td>28.48</td> <td>27.61</td> <td>46.00</td> <td>-18.39 QP</td> </tr> <tr> <td>5</td> <td>311.087</td> <td>38.32</td> <td>18.72</td> <td>0.88</td> <td>0.00</td> <td>28.48</td> <td>29.44</td> <td>46.00</td> <td>-16.56 QP</td> </tr> <tr> <td>6</td> <td>625.078</td> <td>37.47</td> <td>20.00</td> <td>1.24</td> <td>0.00</td> <td>28.86</td> <td>29.85</td> <td>46.00</td> <td>-16.15 QP</td> </tr> </tbody> </table>								Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB		1	33.445	53.95	12.36	0.36	0.00	29.96	36.71	40.00	-3.29 QP	2	77.865	45.13	12.25	0.47	0.00	29.66	28.19	40.00	-11.81 QP	3	185.788	37.10	17.23	0.69	0.00	28.93	26.09	43.50	-17.41 QP	4	281.008	36.62	18.63	0.84	0.00	28.48	27.61	46.00	-18.39 QP	5	311.087	38.32	18.72	0.88	0.00	28.48	29.44	46.00	-16.56 QP	6	625.078	37.47	20.00	1.24	0.00	28.86	29.85	46.00	-16.15 QP
Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark																																																																														
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB																																																																															
1	33.445	53.95	12.36	0.36	0.00	29.96	36.71	40.00	-3.29 QP																																																																														
2	77.865	45.13	12.25	0.47	0.00	29.66	28.19	40.00	-11.81 QP																																																																														
3	185.788	37.10	17.23	0.69	0.00	28.93	26.09	43.50	-17.41 QP																																																																														
4	281.008	36.62	18.63	0.84	0.00	28.48	27.61	46.00	-18.39 QP																																																																														
5	311.087	38.32	18.72	0.88	0.00	28.48	29.44	46.00	-16.56 QP																																																																														
6	625.078	37.47	20.00	1.24	0.00	28.86	29.85	46.00	-16.15 QP																																																																														
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. The emission levels of other frequencies are lower than the limit 20dB and not show in test report. 																																																																																							

Product Name:	5.7 inch 4G Smart Phone	Product Model:	L57
Test By:	Janet	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

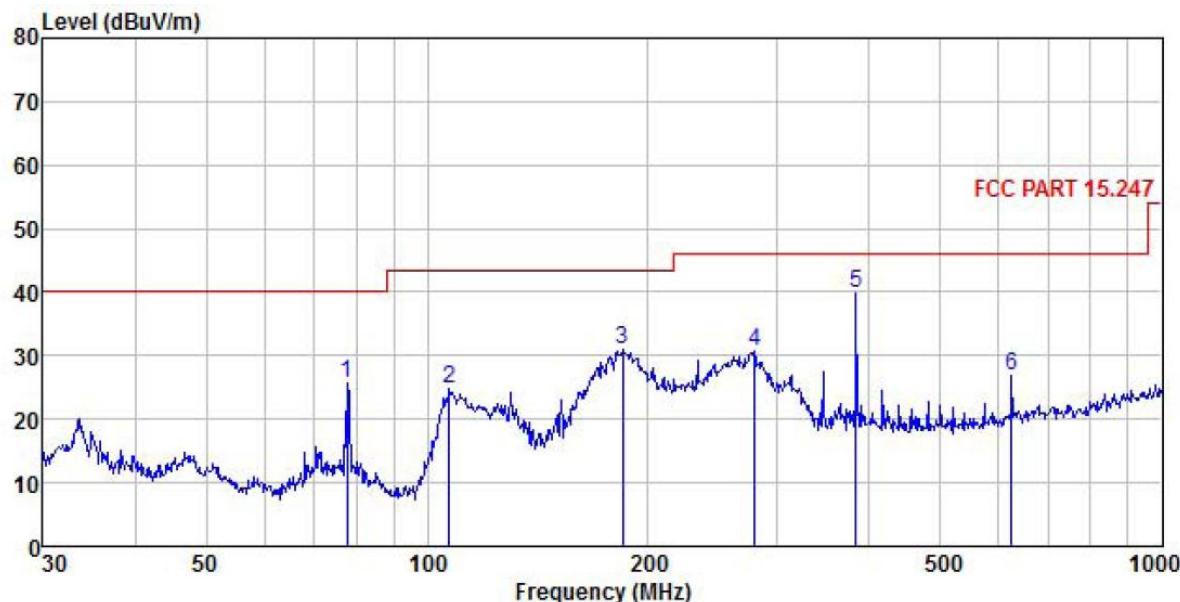

Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamplifier Factor dB	Limit Level dBuV/m	Line Limit dBuV/m	Over Limit dB	Remark
1 77.865	42.51	12.25	0.47	0.00	29.66	25.57	40.00	-14.43	QP
2 107.134	43.87	9.73	0.54	0.00	29.48	24.66	43.50	-18.84	QP
3 184.490	42.18	17.16	0.69	0.00	28.94	31.09	43.50	-12.41	QP
4 279.044	39.69	18.62	0.84	0.00	28.49	30.66	46.00	-15.34	QP
5 383.932	48.47	19.01	0.97	0.00	28.71	39.74	46.00	-6.26	QP
6 625.078	34.57	20.00	1.24	0.00	28.86	26.95	46.00	-19.05	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.82	30.81	6.81	2.46	41.82	47.08	74.00	-26.92	Vertical
4824.00	49.56	30.81	6.81	2.46	41.82	47.82	74.00	-26.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	42.21	30.81	6.81	2.46	41.82	40.47	54.00	-13.53	Vertical
4824.00	43.49	30.81	6.81	2.46	41.82	41.75	54.00	-12.25	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.22	30.93	6.85	2.47	41.84	47.63	74.00	-26.37	Vertical
4874.00	49.07	30.93	6.85	2.47	41.84	47.48	74.00	-26.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	41.89	30.93	6.85	2.47	41.84	40.30	54.00	-13.70	Vertical
4874.00	43.75	30.93	6.85	2.47	41.84	42.16	54.00	-11.84	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.73	31.05	6.89	2.48	41.86	47.29	74.00	-26.71	Vertical
4924.00	49.48	31.05	6.89	2.48	41.86	48.04	74.00	-25.96	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	42.24	31.05	6.89	2.48	41.86	40.80	54.00	-13.20	Vertical
4924.00	43.17	31.05	6.89	2.48	41.86	41.73	54.00	-12.27	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.89	30.81	6.81	2.46	41.82	47.15	74.00	-26.85	Vertical
4824.00	49.25	30.81	6.81	2.46	41.82	47.51	74.00	-26.49	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	41.99	30.81	6.81	2.46	41.82	40.25	54.00	-13.75	Vertical
4824.00	43.72	30.81	6.81	2.46	41.82	41.98	54.00	-12.02	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.00	30.93	6.85	2.47	41.84	47.41	74.00	-26.59	Vertical
4874.00	49.16	30.93	6.85	2.47	41.84	47.57	74.00	-26.43	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	42.18	30.93	6.85	2.47	41.84	40.59	54.00	-13.41	Vertical
4874.00	43.45	30.93	6.85	2.47	41.84	41.86	54.00	-12.14	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.76	31.05	6.89	2.48	41.86	47.32	74.00	-26.68	Vertical
4924.00	49.05	31.05	6.89	2.48	41.86	47.61	74.00	-26.39	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	42.08	31.05	6.89	2.48	41.86	40.64	54.00	-13.36	Vertical
4924.00	42.96	31.05	6.89	2.48	41.86	41.52	54.00	-12.48	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.93	30.81	6.81	2.46	41.82	47.19	74.00	-26.81	Vertical
4824.00	49.58	30.81	6.81	2.46	41.82	47.84	74.00	-26.16	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	42.09	30.81	6.81	2.46	41.82	40.35	54.00	-13.65	Vertical
4824.00	43.23	30.81	6.81	2.46	41.82	41.49	54.00	-12.51	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.16	30.93	6.85	2.47	41.84	47.57	74.00	-26.43	Vertical
4874.00	49.17	30.93	6.85	2.47	41.84	47.58	74.00	-26.42	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	41.98	30.93	6.85	2.47	41.84	40.39	54.00	-13.61	Vertical
4874.00	43.21	30.93	6.85	2.47	41.84	41.62	54.00	-12.38	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.65	31.05	6.89	2.48	41.86	47.21	74.00	-26.79	Vertical
4924.00	50.06	31.05	6.89	2.48	41.86	48.62	74.00	-25.38	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	41.78	31.05	6.89	2.48	41.86	40.34	54.00	-13.66	Vertical
4924.00	43.48	31.05	6.89	2.48	41.86	42.04	54.00	-11.96	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	48.71	30.87	6.83	2.46	41.83	47.04	74.00	-26.96	Vertical
4844.00	49.45	30.87	6.83	2.46	41.83	47.78	74.00	-26.22	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	42.26	30.87	6.83	2.46	41.83	40.59	54.00	-13.41	Vertical
4844.00	43.58	30.87	6.83	2.46	41.83	41.91	54.00	-12.09	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.89	30.93	6.85	2.47	41.84	47.30	74.00	-26.70	Vertical
4874.00	49.44	30.93	6.85	2.47	41.84	47.85	74.00	-26.15	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	42.17	30.93	6.85	2.47	41.84	40.58	54.00	-13.42	Vertical
4874.00	43.87	30.93	6.85	2.47	41.84	42.28	54.00	-11.72	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	48.50	30.99	6.87	2.48	41.85	46.99	74.00	-27.01	Vertical
4904.00	49.49	30.99	6.87	2.48	41.85	47.98	74.00	-26.02	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	41.98	30.99	6.87	2.48	41.85	40.47	54.00	-13.53	Vertical
4904.00	43.39	30.99	6.87	2.48	41.85	41.88	54.00	-12.12	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.