

OTA TEST REPORT



Applicant Shenzhen General Test System Co., Ltd

Product_{RayZone1800}

Issue DateSeptember 6,2022

Shenzhen Fu Bang Wireless Technology Co., Ltd.tested the above equipment in accordance with the requirements in **ANTI/IEEE Std 149-2008**. The test results show that the equipment tested is capable of demonstrating compliance with the Requirements as documented in this report.

Prepared by: Lunkang Yan

Approved by: Zhanghong Lai

Shenzhen Fu Bang Wireless Technology Co., Ltd.

Room 302, lianjian Industry Part, Huarong road, Longhua District, Shenzhen, P.R. China



1. Test Laboratory

1.1 Notes of the Test report

This report shall not be reproduced in full or partial. The results documented in this report applyonly to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of applicable standards stated above.

1.2 Test facility

GTS1800 Microwave Anechoic Chamber: testing frequency ranges from 600 MHz to 6 GHz.

1.3 Testing Location

Company: Shenzhen Fu Bang Wireless Technology Co., Ltd

Address: Room 302, lianjian Industry Part, Huarong road, Longhua District,

Shenzhen, P.R. China

Contact: lunkang Yan

Telephone: 13760182610

E-mail: 646363118@qq.com

1.4 Laboratory Environment

Temperature	Min.= 19°C, Max.=25°C	
Relative humidity	Min.=40%, Max.=72%	
Shield effect	0.6-7GHz	>100dB
Ground resistance	<0.5Ω	



2. General Description of Equipment under Test

2.1 Applicant and Manufacturer information

Applicant Name	Shenzhen General Test System Co., Ltd		
Applicant address	Building C-A7 Suite 805,2190 Liuxian Avenue,Nanshan District,Shenzhen,P.R. China		
Manufacturer Name	Shenzhen General Test System Co., Ltd		
Manufacturer address	Building C-A7 Suite 805,2190 Liuxian Avenue, Nanshan District, Shenzhen,P.R. China		

2.2 General information

EUT Description			
Product Name	RayZone1800		
Model	GTS-ANT D-H		
HW Version	RayZone1800 V1.0		
SW Version	MaxSign 100		
Antenna Type	PCB Antenna		
Antenna Manufacturer	Shenzhen General Test System Co., Ltd		
Test Frequency	2400-2500MHz		

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Method: ANSI/IEEE Std 149-2008

3. Test Conditions

3.1 Test Configuration

The method is used to measure the antenna 3D GAIN of EUT in OTA qualified anechoic chamber. Equipment Under Test(EUT) geometry centre vertical projection at the centre of platform, the distance from EUT to measurement antenna is 1m.

3.2Test Measurement

Spherical coordinate system







Figure 1 Test coordinate system

Note: Theta is from 0-180degree.Phi is from EUT and record the Date, the step of rotation is 15 degree.

Test Setup

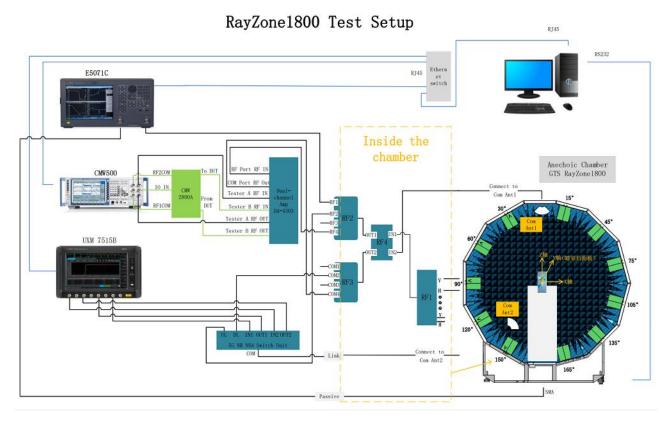

4. Test Results


Gain and Efficiency

Model	Test	Frequency	Efficiency	Gain	Frequency		Gain	Note
	State	(MHz)	(%)	(dBi)	(MHz)	(%)	(dBi)	
		1550	32.0	-0.73				
		1560	33.2	-0.69				
		1570	34.0	-0. 59				
		1580	33.2	-0.45				
		1590	35.98	-0.66				
		1600	34.67	-0.70				
								-
		2400	38.6	0.66				
		2410	39.0	0.75				
		2420	40.3	1.02				
		2430	41.6	0.97				
		2440	42.1	1.22				
		2450	43.3	1.13				
	Free	2460	42.7	2.62				
	Space	2470	42.5	1.21				
	_	2480	42.6	1.01				
		2490	42.5	0.87				
		2500	42.8	0.65				1
								-
		Note: WIFI an	nd BT share an	antenna	1			


Equipment List 5.

Type of Equipment	Manufacture	Model Number
Network Analyzer	Key sight	E5071C
Switch control System	GTS	RayZone1800
Software	GTS	MaxSign 100Patten
		Measurement software



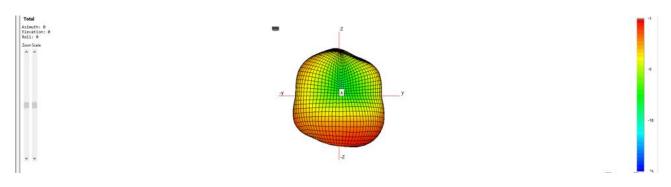


1575MHz

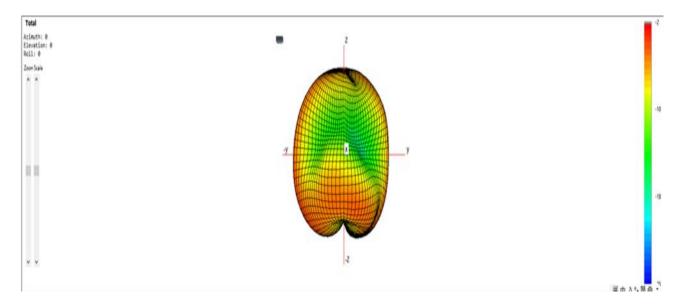

2400MHz

ANNEX B: The EUT Appearance and Test Configuration


B.1 EUT Appearance







B.2 Test Configuration







Shenzhen Fu Bang Wireless Technology Co., Ltd.This report shall not be reproduced except in full, without the written approval of Shenzhen FuBang Wireless Technology Co., Ltd. Page8