

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: O55ML3722

Product: 4G MIFI
Trade Mark: LOGIC, iSWAG, UNONU
Model Number: ML8
Family Model: ATOM 2, M8N
Report No.: STR220926002003E
Issue Date: Oct 19, 2022

Prepared for

SWAGTEK

10205 NW 19th Street STE101Miami, FL 33172

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>


TEST RESULT CERTIFICATION	
Applicant's name	SWAGTEK
Address	10205 NW 19th Street STE101Miami, FL 33172
Manufacturer's Name	SWAGTEK
Address	10205 NW 19th Street STE101Miami, FL 33172
Product name	4G MIFI
Model and/or type reference ...:	ML8
Family Model	ATOM 2, M8N
Test Sample number.....	T220926002R002
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure.....	ANSI C63.26:2015 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test	
Date (s) of performance of tests	Sep 26, 2022 ~ Oct 19, 2022
Date of Issue	Oct 19, 2022
Test Result	Pass

Testing Engineer :



(Mukzi Lee)

Authorized Signatory :



(Alex Li)

TABLE OF CONTENTS

1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	7
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3.TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEDGE AND EMISSION MASK.....	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	23
8.4 LTE BAND 5.....	26
8.5 LTE BAND 7.....	28
8.6 LTE BAND 17	30

9. SPURIOUS RADIATION EMISSION32

9.1 LTE BAND 2..... 34

9.2 LTE BAND 4..... 36

9.3 LTE BAND 5..... 38

9.4 LTE BAND 7..... 40

9.5 LTE BAND 17 42

10. FREQUENCY STABILITY44

10.1 LTE BAND 2 45

10.2 LTE BAND 4 47

10.3 LTE BAND 5 49

10.4 LTE BAND 7 51

10.5 LTE BAND 17 53

11. PEAK-TO-AVERAGE RATIO.....55

11.1 Description of the PAR Measurement..... 55

11.2 Measuring Instruments..... 55

11.3 Test Procedures..... 55

11.4 Test Setup..... 55

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	4G MIFI
Trade Mark	LOGIC, iSWAG, UNONU
Model Name	ML8
Family Model	ATOM 2, M8N
Model Difference	All the model are the same circuit and RF module,except the model names.
FCC ID:	O55ML3722
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2, 4, 5, 7 , 17
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz;
Type of Modulation:	QPSK/16QAM
Power Class	Class 3
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 2.17 dBi, Band 4:-0.34 dBi, Band 5: -1.93 dBi, Band 7: -0.64 dBi, Band 17: -3.59 dBi
Adapter	N/A
Battery	DC 3.8V, 2500mAh, 9.5Wh
Power supply	DC 3.8V from battery or DC 5V from USB Port
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.8V) (Note 1)
HW Version	V03
SW Version	LOGIC_ML8_GENERIC_V1.0_08092022
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: O55ML3722** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
2	Conducted Emission Test	± 1.38 dB
3	RF power, conducted	± 0.16 dB
4	Spurious emissions, conducted	± 0.21 dB
5	All emissions, radiated(<1G)	± 4.68 dB
6	All emissions, radiated(>1G)	± 4.89 dB
7	Temperature	± 0.5 °C
8	Humidity	± 2 %
9	Frequency error, conducted	± 0.19 ppm

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 17

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(m), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	

2.1053 22.917(a) 24.238(a) 27.53(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	4G MIFI	ML8	FCC ID: O55ML3722	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

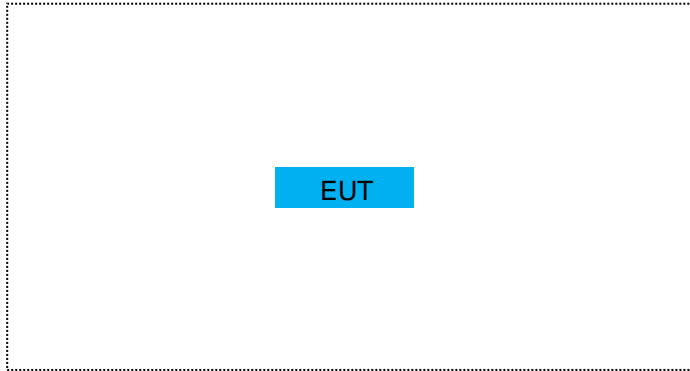


For Conducted Output Power

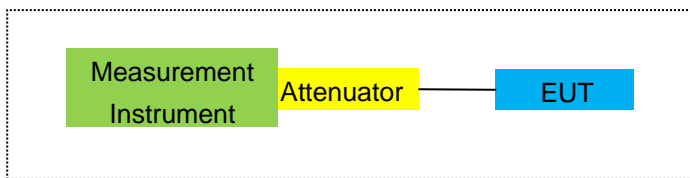

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

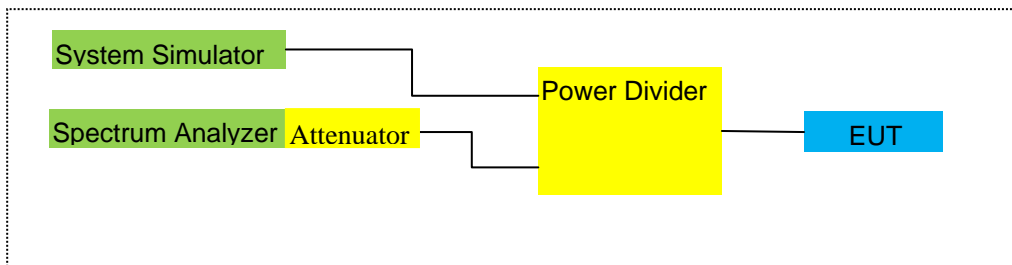

For Frequency Stability

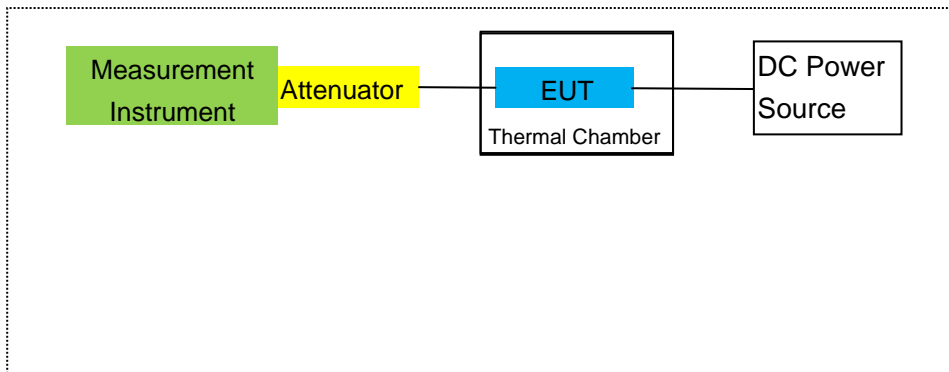

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022.06.16	2023.06.17	1 year
2	Test Receiver	R&S	ESPI	101318	2022.04.06	2023.04.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31	2023.03.30	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2021.11.07	2022.11.06	1 year
7	Amplifier	EM	EM-30180	060538	2022.06.17	2023.06.16	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2022.04.06	2023.04.05	1 year
9	Power Meter	R&S	NRVS	100696	2022.06.17	2023.06.16	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2022.04.06	2023.04.05	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2022.04.06	2023.04.05	1 year
15	LISN	R&S	ENV216	101313	2022.04.06	2023.04.05	1 year
16	LISN	EMCO	3816/2	00042990	2022.04.06	2023.04.05	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2022.04.06	2023.04.05	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2022.04.06	2023.04.05	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2022.04.01	2023.03.31	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2022.04.01	2023.03.31	1 year
24	test receiver	R&S	ESCI	a0304218	2022.04.06	2023.04.05	1 year
25	Communication Tester	R&S	CMU200	A0304247	2022.06.16	2023.06.15	1 year

26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2022.04.06	2023.04.05	1 year
27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2022.06.16	2023.06.15	1 year
29	Communication Tester	R&S	CMW500	148500	2022.06.16	2023.06.15	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

LTE Band 2/4/5/7/17

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

LTE Band 2/4/5/7/17

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display line

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

LTE Band 2/4/5/7/17

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported (LTE Band 2/4/7: above 10GHz).

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

LTE Band 2/4/5/7/17

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result					Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP		
							Average (mW)		
1.4MHz Band QPSK	1/#Mid	1850.7	-3.46	3.76	28.24	21.02	126.474	Horizontal	Pass
		1880	-3.16	3.91	28.22	21.15	130.317	Horizontal	Pass
		1909.3	-3.18	3.93	28.20	21.09	128.529	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-3.45	3.77	28.23	21.01	126.183	Horizontal	Pass
		1880	-3.17	3.91	28.24	21.16	130.617	Horizontal	Pass
		1908.5	-3.25	3.94	28.25	21.06	127.644	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-3.52	3.77	28.31	21.02	126.474	Horizontal	Pass
		1880	-3.15	3.91	28.22	21.16	130.617	Horizontal	Pass
		1907.5	-3.18	3.94	28.20	21.08	128.233	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-3.41	3.79	28.33	21.13	129.718	Horizontal	Pass
		1880	-3.19	3.95	28.22	21.08	128.233	Horizontal	Pass
		1905	-3.12	3.97	28.19	21.10	128.825	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-3.53	3.79	28.34	21.02	126.474	Horizontal	Pass
		1880	-3.20	3.95	28.22	21.07	127.938	Horizontal	Pass
		1902.5	-3.19	3.97	28.18	21.02	126.474	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-3.38	3.81	28.35	21.16	130.617	Horizontal	Pass
		1880	-3.14	3.96	28.22	21.12	129.420	Horizontal	Pass
		1900	-3.12	4.00	28.16	21.04	127.057	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-3.40	3.76	28.24	21.08	128.233	Vertical	Pass
		1880	-3.20	3.91	28.22	21.11	129.122	Vertical	Pass
		1909.3	-3.18	3.93	28.20	21.09	128.529	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-3.39	3.77	28.23	21.07	127.938	Vertical	Pass
		1880	-3.23	3.91	28.24	21.10	128.825	Vertical	Pass
		1908.5	-3.14	3.94	28.25	21.17	130.918	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-3.51	3.77	28.31	21.03	126.765	Vertical	Pass
		1880	-3.31	3.91	28.22	21.00	125.893	Vertical	Pass
		1907.5	-3.23	3.94	28.20	21.03	126.765	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-3.44	3.79	28.33	21.10	128.825	Vertical	Pass
		1880	-3.12	3.95	28.22	21.15	130.317	Vertical	Pass
		1905	-3.15	3.97	28.19	21.07	127.938	Vertical	Pass

15.0MHz	1/#Mid	1857.5	-3.49	3.79	28.34	21.06	127.644	Vertical	Pass
Band		1880	-3.19	3.95	28.22	21.08	128.233	Vertical	Pass
QPSK		1902.5	-3.06	3.97	28.18	21.15	130.317	Vertical	Pass
20.0MHz	1/#Mid	1860	-3.33	3.81	28.35	21.21	132.130	Vertical	Pass
Band		1880	-3.09	3.96	28.22	21.17	130.918	Vertical	Pass
QPSK		1900	-2.98	4.00	28.16	21.18	131.220	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2										
Mode	RB/RB SIZE	Frequency	Result						Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP	ERP		
							Average			
							(mW)			
1.4MHz Band 16 QAM	1/#Mid	1850.7	-3.62	3.76	28.24	20.86	121.899	Horizontal	Pass	
		1880	-3.43	3.91	28.22	20.88	122.462	Horizontal	Pass	
		1909.3	-3.42	3.93	28.20	20.85	121.619	Horizontal	Pass	
3.0MHz Band 16 QAM	1/#Mid	1851.5	-3.61	3.77	28.23	20.85	121.619	Horizontal	Pass	
		1880	-3.42	3.91	28.24	20.91	123.310	Horizontal	Pass	
		1908.5	-3.44	3.94	28.25	20.87	122.180	Horizontal	Pass	
5.0MHz Band 16 QAM	1/#Mid	1852.5	-3.61	3.77	28.31	20.93	123.880	Horizontal	Pass	
		1880	-3.45	3.91	28.22	20.86	121.899	Horizontal	Pass	
		1907.5	-3.30	3.94	28.20	20.96	124.738	Horizontal	Pass	
10.0MHz Band 16 QAM	1/#Mid	1855	-3.67	3.79	28.33	20.87	122.180	Horizontal	Pass	
		1880	-3.39	3.95	28.22	20.88	122.462	Horizontal	Pass	
		1905	-3.39	3.97	28.19	20.83	121.060	Horizontal	Pass	
15.0MHz Band 16 QAM	1/#Mid	1857.5	-3.68	3.79	28.34	20.87	122.180	Horizontal	Pass	
		1880	-3.43	3.95	28.22	20.84	121.339	Horizontal	Pass	
		1902.5	-3.29	3.97	28.18	20.92	123.595	Horizontal	Pass	
20.0MHz Band 16 QAM	1/#Mid	1860	-3.73	3.81	28.35	20.81	120.504	Horizontal	Pass	
		1880	-3.35	3.96	28.22	20.91	123.310	Horizontal	Pass	
		1900	-3.26	4.00	28.16	20.90	123.027	Horizontal	Pass	
1.4MHz Band 16	1/#Mid	1850.7	-3.66	3.76	28.24	20.82	120.781	Vertical	Pass	
		1880	-3.47	3.91	28.22	20.84	121.339	Vertical	Pass	

QAM		1909.3	-3.35	3.93	28.20	20.92	123.595	Vertical	Pass
3.0MHz	1/#Mid	1851.5	-3.52	3.77	28.23	20.94	124.165	Vertical	Pass
Band 16		1880	-3.38	3.91	28.24	20.95	124.451	Vertical	Pass
QAM		1908.5	-3.44	3.94	28.25	20.87	122.180	Vertical	Pass
5.0MHz	1/#Mid	1852.5	-3.62	3.77	28.31	20.92	123.595	Vertical	Pass
Band 16		1880	-3.46	3.91	28.22	20.85	121.619	Vertical	Pass
QAM		1907.5	-3.45	3.94	28.20	20.81	120.504	Vertical	Pass
10.0MHz	1/#Mid	1855	-3.63	3.79	28.33	20.91	123.310	Vertical	Pass
Band 16		1880	-3.43	3.95	28.22	20.84	121.339	Vertical	Pass
QAM		1905	-3.25	3.97	28.19	20.97	125.026	Vertical	Pass
15.0MHz	1/#Mid	1857.5	-3.63	3.79	28.34	20.92	123.595	Vertical	Pass
Band 16		1880	-3.37	3.95	28.22	20.90	123.027	Vertical	Pass
QAM		1902.5	-3.36	3.97	28.18	20.85	121.619	Vertical	Pass
20.0MHz	1/#Mid	1860	-3.55	3.81	28.35	20.99	125.603	Vertical	Pass
Band 16		1880	-3.26	3.96	28.22	21.00	125.893	Vertical	Pass
QAM		1900	-3.15	4.00	28.16	21.01	126.183	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result					Polarization Of Max. ERP	Conclusion
			SG Level	Cable Loss	Factor	Max. EIRP	Max. EIRP		
			(dBm)	(dBm)	(dB)	Average	Average		
						(dBm)	(mW)		
1.4MHz Band QPSK	1/#Mid	1710.7	-4.07	3.12	27.58	20.39	109.396	Horizontal	Pass
		1732.5	-4.03	3.27	27.61	20.31	107.399	Horizontal	Pass
		1754.3	-3.93	3.29	27.63	20.41	109.901	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-4.13	3.13	27.61	20.35	108.393	Horizontal	Pass
		1732.5	-3.94	3.27	27.61	20.40	109.648	Horizontal	Pass
		1753.5	-3.88	3.30	27.62	20.44	110.662	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-4.15	3.13	27.63	20.35	108.393	Horizontal	Pass
		1732.5	-4.00	3.27	27.61	20.34	108.143	Horizontal	Pass
		1752.5	-4.01	3.30	27.60	20.29	106.905	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-4.05	3.15	27.64	20.44	110.662	Horizontal	Pass
		1732.5	-3.93	3.31	27.61	20.37	108.893	Horizontal	Pass
		1750	-3.89	3.33	27.59	20.37	108.893	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-4.09	3.15	27.65	20.41	109.901	Horizontal	Pass
		1732.5	-3.98	3.31	27.61	20.32	107.647	Horizontal	Pass
		1747.5	-3.88	3.33	27.57	20.36	108.643	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-4.19	3.17	27.66	20.30	107.152	Horizontal	Pass
		1732.5	-3.99	3.32	27.61	20.30	107.152	Horizontal	Pass
		1745	-3.83	3.36	27.56	20.37	108.893	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-4.14	3.12	27.58	20.32	107.647	Vertical	Pass
		1732.5	-3.93	3.27	27.61	20.41	109.901	Vertical	Pass
		1754.3	-3.97	3.29	27.63	20.37	108.893	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-4.08	3.13	27.61	20.40	109.648	Vertical	Pass
		1732.5	-3.96	3.27	27.61	20.38	109.144	Vertical	Pass
		1753.5	-3.98	3.30	27.62	20.34	108.143	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-4.05	3.13	27.63	20.45	110.917	Vertical	Pass
		1732.5	-3.93	3.27	27.61	20.41	109.901	Vertical	Pass
		1752.5	-4.01	3.30	27.60	20.29	106.905	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1715	-4.11	3.15	27.64	20.38	109.144	Vertical	Pass
		1732.5	-3.96	3.31	27.61	20.34	108.143	Vertical	Pass
		1750	-3.81	3.33	27.59	20.45	110.917	Vertical	Pass

15.0MHz	1/#Mid	1717.5	-4.14	3.15	27.65	20.36	108.643	Vertical	Pass
Band		1732.5	-3.89	3.31	27.61	20.41	109.901	Vertical	Pass
QPSK		1747.5	-3.89	3.33	27.57	20.35	108.393	Vertical	Pass
20.0MHz	1/#Mid	1720	-4.02	3.17	27.66	20.47	111.429	Vertical	Pass
Band		1732.5	-3.79	3.32	27.61	20.50	112.202	Vertical	Pass
QPSK		1745	-3.70	3.36	27.56	20.50	112.202	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
						Average	Average		
						(dBm)	(mW)		
1.4MHz	1/#Mid	1710.7	-5.24	3.12	27.58	19.22	83.560	Horizontal	Pass
Band 16		1732.5	-5.12	3.27	27.61	19.22	83.560	Horizontal	Pass
QAM		1754.3	-5.17	3.29	27.63	19.17	82.604	Horizontal	Pass
3.0MHz	1/#Mid	1711.5	-5.30	3.13	27.61	19.18	82.794	Horizontal	Pass
Band 16		1732.5	-5.22	3.27	27.61	19.12	81.658	Horizontal	Pass
QAM		1753.5	-5.11	3.30	27.62	19.21	83.368	Horizontal	Pass
5.0MHz	1/#Mid	1712.5	-5.36	3.13	27.63	19.14	82.035	Horizontal	Pass
Band 16		1732.5	-5.19	3.27	27.61	19.15	82.224	Horizontal	Pass
QAM		1752.5	-5.10	3.30	27.60	19.20	83.176	Horizontal	Pass
10.0MHz	1/#Mid	1715	-5.35	3.15	27.64	19.14	82.035	Horizontal	Pass
Band 16		1732.5	-5.05	3.31	27.61	19.25	84.140	Horizontal	Pass
QAM		1750	-5.10	3.33	27.59	19.16	82.414	Horizontal	Pass
15.0MHz	1/#Mid	1717.5	-5.39	3.15	27.65	19.11	81.470	Horizontal	Pass
Band 16		1732.5	-5.19	3.31	27.61	19.11	81.470	Horizontal	Pass
QAM		1747.5	-5.04	3.33	27.57	19.20	83.176	Horizontal	Pass
20.0MHz	1/#Mid	1720	-5.28	3.17	27.66	19.21	83.368	Horizontal	Pass
Band 16		1732.5	-5.19	3.32	27.61	19.10	81.283	Horizontal	Pass
QAM		1745	-5.00	3.36	27.56	19.20	83.176	Horizontal	Pass
1.4MHz	1/#Mid	1710.7	-5.25	3.12	27.58	19.21	83.368	Vertical	Pass
Band 16		1732.5	-5.12	3.27	27.61	19.22	83.560	Vertical	Pass

QAM		1754.3	-5.21	3.29	27.63	19.13	81.846	Vertical	Pass
3.0MHz	1/#Mid	1711.5	-5.27	3.13	27.61	19.21	83.368	Vertical	Pass
Band 16		1732.5	-5.11	3.27	27.61	19.23	83.753	Vertical	Pass
QAM		1753.5	-5.08	3.30	27.62	19.24	83.946	Vertical	Pass
5.0MHz	1/#Mid	1712.5	-5.33	3.13	27.63	19.17	82.604	Vertical	Pass
Band 16		1732.5	-5.20	3.27	27.61	19.14	82.035	Vertical	Pass
QAM		1752.5	-5.16	3.30	27.60	19.14	82.035	Vertical	Pass
10.0MHz	1/#Mid	1715	-5.35	3.15	27.64	19.14	82.035	Vertical	Pass
Band 16		1732.5	-5.06	3.31	27.61	19.24	83.946	Vertical	Pass
QAM		1750	-5.12	3.33	27.59	19.14	82.035	Vertical	Pass
15.0MHz	1/#Mid	1717.5	-5.32	3.15	27.65	19.18	82.794	Vertical	Pass
Band 16		1732.5	-5.08	3.31	27.61	19.22	83.560	Vertical	Pass
QAM		1747.5	-5.07	3.33	27.57	19.17	82.604	Vertical	Pass
20.0MHz	1/#Mid	1720	-5.21	3.17	27.66	19.28	84.723	Vertical	Pass
Band 16		1732.5	-5.01	3.32	27.61	19.28	84.723	Vertical	Pass
QAM		1745	-4.93	3.36	27.56	19.27	84.528	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5											
Mode	RB/RB SIZE	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level	Cable Loss (dBm)	Factor (dB)	Correction (dB)	Max. EIRP	Max. EIRP			
			(dBm)				Average	Average			
							(dBm)	(mW)			
1.4MHz Band QPSK	3/#Mid	824.7	3.06	2.01	19.68	2.15	18.58	72.111	Horizontal	Pass	
		836.5	2.97	2.01	19.77	2.15	18.58	72.111	Horizontal	Pass	
		848.3	3.01	2.02	19.82	2.15	18.66	73.451	Horizontal	Pass	
3.0MHz Band QPSK	1/#Mid	825.5	3.08	2.01	19.70	2.15	18.62	72.778	Horizontal	Pass	
		836.5	3.01	2.01	19.77	2.15	18.62	72.778	Horizontal	Pass	
		847.5	3.03	2.02	19.81	2.15	18.67	73.621	Horizontal	Pass	
5.0MHz Band QPSK	1/#Mid	826.5	3.07	2.01	19.71	2.15	18.62	72.778	Horizontal	Pass	
		836.5	3.06	2.01	19.77	2.15	18.67	73.621	Horizontal	Pass	
		846.5	3.01	2.02	19.79	2.15	18.63	72.946	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	829	2.91	2.01	19.73	2.15	18.48	70.469	Horizontal	Pass	
		836.5	3.02	2.01	19.77	2.15	18.63	72.946	Horizontal	Pass	
		844	3.01	2.02	19.78	2.15	18.62	72.778	Horizontal	Pass	
1.4MHz Band QPSK	1/#Mid	824.7	3.14	2.01	19.68	2.15	18.66	73.451	Vertical	Pass	
		836.5	3.05	2.01	19.77	2.15	18.66	73.451	Vertical	Pass	
		848.3	2.97	2.02	19.82	2.15	18.62	72.778	Vertical	Pass	
3.0MHz Band QPSK	1/#Mid	825.5	3.05	2.01	19.70	2.15	18.59	72.277	Vertical	Pass	
		836.5	2.99	2.01	19.77	2.15	18.60	72.444	Vertical	Pass	
		847.5	3.02	2.02	19.81	2.15	18.66	73.451	Vertical	Pass	
5.0MHz Band QPSK	1/#Mid	826.5	2.96	2.01	19.71	2.15	18.51	70.958	Vertical	Pass	
		836.5	2.97	2.01	19.77	2.15	18.58	72.111	Vertical	Pass	
		846.5	3.03	2.02	19.79	2.15	18.65	73.282	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	829	3.11	2.01	19.73	2.15	18.68	73.790	Vertical	Pass	
		836.5	3.07	2.01	19.77	2.15	18.68	73.790	Vertical	Pass	
		844	3.09	2.02	19.78	2.15	18.70	74.131	Vertical	Pass	

Radiated Power (ERP) for Band 5											
Mode	RB/RB SIZE	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level	Cable Loss (dBm)	Factor (dB)	Correction (dB)	Max. EIRP	Max. EIRP			
			(dBm)				Average	Average			
							(dBm)	(mW)			
1.4MHz Band 16 QAM	3/#Mid	824.7	2.93	2.01	19.68	2.15	18.45	69.984	Horizontal	Pass	
		836.5	2.90	2.01	19.77	2.15	18.51	70.958	Horizontal	Pass	
		848.3	2.86	2.02	19.82	2.15	18.51	70.958	Horizontal	Pass	
3.0MHz Band 16 QAM	1/#Mid	825.5	2.89	2.01	19.70	2.15	18.43	69.663	Horizontal	Pass	
		836.5	2.86	2.01	19.77	2.15	18.47	70.307	Horizontal	Pass	
		847.5	2.91	2.02	19.81	2.15	18.55	71.614	Horizontal	Pass	
5.0MHz Band 16 QAM	1/#Mid	826.5	2.99	2.01	19.71	2.15	18.54	71.450	Horizontal	Pass	
		836.5	2.92	2.01	19.77	2.15	18.53	71.285	Horizontal	Pass	
		846.5	2.91	2.02	19.79	2.15	18.53	71.285	Horizontal	Pass	
10.0MHz Band 16 QAM	1/#Mid	829	2.90	2.01	19.73	2.15	18.47	70.307	Horizontal	Pass	
		836.5	2.95	2.01	19.77	2.15	18.56	71.779	Horizontal	Pass	
		844	2.93	2.02	19.78	2.15	18.54	71.450	Horizontal	Pass	
1.4MHz Band 16 QAM	1/#Mid	824.7	2.95	2.01	19.68	2.15	18.47	70.307	Vertical	Pass	
		836.5	2.90	2.01	19.77	2.15	18.51	70.958	Vertical	Pass	
		848.3	2.86	2.02	19.82	2.15	18.51	70.958	Vertical	Pass	
3.0MHz Band 16 QAM	1/#Mid	825.5	2.88	2.01	19.70	2.15	18.42	69.502	Vertical	Pass	
		836.5	2.85	2.01	19.77	2.15	18.46	70.146	Vertical	Pass	
		847.5	2.78	2.02	19.81	2.15	18.42	69.502	Vertical	Pass	
5.0MHz Band 16 QAM	1/#Mid	826.5	2.96	2.01	19.71	2.15	18.51	70.958	Vertical	Pass	
		836.5	2.79	2.01	19.77	2.15	18.40	69.183	Vertical	Pass	
		846.5	2.94	2.02	19.79	2.15	18.56	71.779	Vertical	Pass	
10.0MHz Band 16 QAM	1/#Mid	829	3.05	2.01	19.73	2.15	18.62	72.778	Vertical	Pass	
		836.5	3.01	2.01	19.77	2.15	18.62	72.778	Vertical	Pass	
		844	3.00	2.02	19.78	2.15	18.61	72.611	Vertical	Pass	

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7										
Mode	RB/RB SIZE	Frequency	Result						Polarization Of Max. ERP	Conclusion
			SG Level	Cable Loss	Factor (dB)	Max. EIRP	Max. EIRP			
			(dBm)			Average	Average			
				(dBm)	(mW)					
5.0MHz Band QPSK	1/#Mid	2502.5	-3.25	4.54	27.75	19.96	99.083	Horizontal	Pass	
		2535	-3.15	4.69	27.72	19.88	97.275	Horizontal	Pass	
		2567.5	-3.09	4.71	27.71	19.91	97.949	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	2505	-3.30	4.55	27.76	19.91	97.949	Horizontal	Pass	
		2535	-3.17	4.69	27.72	19.86	96.828	Horizontal	Pass	
		2565	-3.09	4.72	27.70	19.89	97.499	Horizontal	Pass	
15.0MHz Band QPSK	1/#Mid	2507.5	-3.39	4.55	27.77	19.83	96.161	Horizontal	Pass	
		2535	-3.14	4.69	27.72	19.89	97.499	Horizontal	Pass	
		2562.5	-3.04	4.72	27.69	19.93	98.401	Horizontal	Pass	
20.0MHz Band QPSK	1/#Mid	2510	-3.25	4.57	27.78	19.96	99.083	Horizontal	Pass	
		2535	-3.16	4.73	27.72	19.83	96.161	Horizontal	Pass	
		2560	-3.01	4.75	27.68	19.92	98.175	Horizontal	Pass	
5.0MHz Band QPSK	1/#Mid	2502.5	-3.37	4.54	27.75	19.84	96.383	Vertical	Pass	
		2535	-3.20	4.69	27.72	19.83	96.161	Vertical	Pass	
		2567.5	-3.07	4.71	27.71	19.93	98.401	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	2505	-3.38	4.55	27.76	19.83	96.161	Vertical	Pass	
		2535	-3.10	4.69	27.72	19.93	98.401	Vertical	Pass	
		2565	-3.14	4.72	27.70	19.84	96.383	Vertical	Pass	
15.0MHz Band QPSK	1/#Mid	2507.5	-3.33	4.55	27.77	19.89	97.499	Vertical	Pass	
		2535	-3.11	4.69	27.72	19.92	98.175	Vertical	Pass	
		2562.5	-3.09	4.72	27.69	19.88	97.275	Vertical	Pass	
20.0MHz Band QPSK	1/#Mid	2510	-3.23	4.57	27.78	19.98	99.541	Vertical	Pass	
		2535	-3.00	4.73	27.72	19.99	99.770	Vertical	Pass	
		2560	-2.92	4.75	27.68	20.01	100.231	Vertical	Pass	

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss (dBm)	Antenna Factor (dB)	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)			Average	Average		
						(dBm)	(mW)		
5.0MHz Band 16 QAM	1/#Mid	2502.5	-3.27	4.54	27.75	19.94	98.628	Horizontal	Pass
		2535	-3.13	4.69	27.72	19.90	97.724	Horizontal	Pass
		2567.5	-3.06	4.71	27.71	19.94	98.628	Horizontal	Pass
10.0MHz z Band 16 QAM	1/#Mid	2505	-3.35	4.55	27.76	19.86	96.828	Horizontal	Pass
		2535	-3.08	4.69	27.72	19.95	98.855	Horizontal	Pass
		2565	-3.11	4.72	27.70	19.87	97.051	Horizontal	Pass
15.0MHz z Band 16 QAM	1/#Mid	2507.5	-3.37	4.55	27.77	19.85	96.605	Horizontal	Pass
		2535	-3.14	4.69	27.72	19.89	97.499	Horizontal	Pass
		2562.5	-3.15	4.72	27.69	19.82	95.940	Horizontal	Pass
20.0MHz z Band 16 QAM	1/#Mid	2510	-3.35	4.57	27.78	19.86	96.828	Horizontal	Pass
		2535	-3.15	4.73	27.72	19.84	96.383	Horizontal	Pass
		2560	-2.97	4.75	27.68	19.96	99.083	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-3.37	4.54	27.75	19.84	96.383	Vertical	Pass
		2535	-3.08	4.69	27.72	19.95	98.855	Vertical	Pass
		2567.5	-3.13	4.71	27.71	19.87	97.051	Vertical	Pass
10.0MHz z Band 16 QAM	1/#Mid	2505	-3.30	4.55	27.76	19.91	97.949	Vertical	Pass
		2535	-3.16	4.69	27.72	19.87	97.051	Vertical	Pass
		2565	-3.05	4.72	27.70	19.93	98.401	Vertical	Pass
15.0MHz z Band 16 QAM	1/#Mid	2507.5	-3.39	4.55	27.77	19.83	96.161	Vertical	Pass
		2535	-3.16	4.69	27.72	19.87	97.051	Vertical	Pass
		2562.5	-3.16	4.72	27.69	19.81	95.719	Vertical	Pass
20.0MHz z Band 16 QAM	1/#Mid	2510	-3.20	4.57	27.78	20.01	100.231	Vertical	Pass
		2535	-3.02	4.73	27.72	19.97	99.312	Vertical	Pass
		2560	-2.97	4.75	27.68	19.96	99.083	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17											
Mode	RB/RB SIZE	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)			
5.0MHz Band QPSK	1/#Mid	706.5	1.80	1.91	19.23	2.15	16.97	49.774	Vertical	Pass	
		710	1.80	1.91	19.26	2.15	17.00	50.119	Vertical	Pass	
		713.5	1.64	1.92	19.33	2.15	16.90	48.978	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	709	1.80	1.91	19.25	2.15	16.99	50.003	Vertical	Pass	
		710	1.70	1.91	19.26	2.15	16.90	48.978	Vertical	Pass	
		711	1.69	1.92	19.32	2.15	16.94	49.431	Vertical	Pass	
5.0MHz Band QPSK	1/#Mid	706.5	1.73	1.91	19.23	2.15	16.90	48.978	Horizontal	Pass	
		710	1.79	1.91	19.26	2.15	16.99	50.003	Horizontal	Pass	
		713.5	1.70	1.92	19.33	2.15	16.96	49.659	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	709	1.87	1.91	19.25	2.15	17.06	50.816	Horizontal	Pass	
		710	1.84	1.91	19.26	2.15	17.04	50.582	Horizontal	Pass	
		711	1.79	1.92	19.32	2.15	17.04	50.582	Horizontal	Pass	

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Factor (dB)	Correction	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)				Average	Average		
							(dBm)	(mW)		
5.0MHz Band 16 QAM	1/#Mid	706.5	0.65	1.91	19.23	2.15	15.82	38.194	Vertical	Pass
		710	0.65	1.91	19.26	2.15	15.85	38.459	Vertical	Pass
		713.5	0.55	1.92	19.33	2.15	15.81	38.107	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	709	0.68	1.91	19.25	2.15	15.87	38.637	Vertical	Pass
		710	0.60	1.91	19.26	2.15	15.80	38.019	Vertical	Pass
		711	0.52	1.92	19.32	2.15	15.77	37.757	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	706.5	0.72	1.91	19.23	2.15	15.89	38.815	Horizontal	Pass
		710	0.61	1.91	19.26	2.15	15.81	38.107	Horizontal	Pass
		713.5	0.54	1.92	19.33	2.15	15.80	38.019	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	709	0.75	1.91	19.25	2.15	15.94	39.264	Horizontal	Pass
		710	0.73	1.91	19.26	2.15	15.93	39.174	Horizontal	Pass
		711	0.69	1.92	19.32	2.15	15.94	39.264	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10} (p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 2/4/5/7/17

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-44.41	4.04	33.51	-14.94	-13	-1.94	Horizontal
3701.4	-46.04	4.04	33.51	-16.57	-13	-3.57	Vertical
5552.1	-51.98	5.24	35.84	-21.38	-13	-8.38	Vertical
5552.1	-51.10	5.24	35.84	-20.50	-13	-7.50	Horizontal
185.1	-34.04	1.43	16.02	-19.45	-13	-6.45	Vertical
416.6	-34.21	1.30	17.99	-17.52	-13	-4.52	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-49.51	4.04	33.56	-19.99	-13	-6.99	Horizontal
3760.0	-48.17	4.04	33.56	-18.65	-13	-5.65	Vertical
5640.0	-51.62	5.24	35.91	-20.95	-13	-7.95	Vertical
5640.0	-52.69	5.24	35.91	-22.02	-13	-9.02	Horizontal
182.8	-42.47	1.62	16.97	-27.12	-13	-14.12	Vertical
404.6	-41.87	1.74	15.98	-27.64	-13	-14.64	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-50.01	4.04	34.00	-20.05	-13	-7.05	Horizontal
3818.6	-45.26	4.04	34.00	-15.30	-13	-2.30	Vertical
5727.9	-52.73	5.24	36.04	-21.93	-13	-8.93	Vertical
5727.9	-49.54	5.24	36.04	-18.74	-13	-5.74	Horizontal
197.7	-35.66	1.42	17.29	-19.79	-13	-6.79	Vertical
355.4	-39.35	1.50	17.90	-22.94	-13	-9.94	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-50.66	4.07	33.54	-21.19	-13	-8.19	Horizontal
3720.0	-44.34	4.07	33.54	-14.87	-13	-1.87	Vertical
5580.0	-53.78	5.28	35.86	-23.20	-13	-10.20	Vertical
5580.0	-51.84	5.28	35.86	-21.26	-13	-8.26	Horizontal
200.4	-36.85	1.58	16.89	-21.53	-13	-8.53	Vertical
355.4	-37.96	1.76	17.26	-22.46	-13	-9.46	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-48.73	4.04	33.56	-19.21	-13	-6.21	Horizontal
3760.0	-44.05	4.04	33.56	-14.53	-13	-1.53	Vertical
5640.0	-47.73	5.24	35.91	-17.06	-13	-4.06	Vertical
5640.0	-49.44	5.24	35.91	-18.77	-13	-5.77	Horizontal
184.0	-37.62	1.46	16.27	-22.81	-13	-9.81	Vertical
308.9	-42.39	1.59	15.15	-28.83	-13	-15.83	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-50.20	4.04	34.00	-20.24	-13	-7.24	Horizontal
3800.0	-45.73	4.04	34.00	-15.77	-13	-2.77	Vertical
5700.0	-50.95	5.24	36.04	-20.15	-13	-7.15	Vertical
5700.0	-50.26	5.24	36.04	-19.46	-13	-6.46	Horizontal
188.5	-35.78	1.36	17.39	-19.74	-13	-6.74	Vertical
404.1	-40.33	1.66	15.39	-26.60	-13	-13.60	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-52.87	4.02	29.80	-27.09	-13	-14.09	Horizontal
3421.4	-53.27	4.02	29.80	-27.49	-13	-14.49	Vertical
5132.1	-53.05	5.24	35.84	-22.45	-13	-9.45	Vertical
5132.1	-53.75	5.24	35.84	-23.15	-13	-10.15	Horizontal
206.8	-41.65	1.68	16.04	-27.29	-13	-14.29	Vertical
449.8	-37.13	1.78	17.74	-21.17	-13	-8.17	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.41	4.03	30.00	-22.44	-13	-9.44	Horizontal
3465.0	-44.83	4.03	30.00	-18.86	-13	-5.86	Vertical
5197.5	-52.94	5.25	35.86	-22.33	-13	-9.33	Vertical
5197.5	-52.86	5.25	35.86	-22.25	-13	-9.25	Horizontal
198.3	-43.25	1.72	17.69	-27.28	-13	-14.28	Vertical
305.8	-44.48	1.62	16.02	-30.07	-13	-17.07	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-50.76	4.05	30.01	-24.80	-13	-11.80	Horizontal
3508.6	-53.32	4.05	30.01	-27.36	-13	-14.36	Vertical
5262.9	-52.94	5.26	35.86	-22.34	-13	-9.34	Vertical
5262.9	-53.54	5.26	35.86	-22.94	-13	-9.94	Horizontal
196.5	-40.50	1.80	16.69	-25.61	-13	-12.61	Vertical
324.1	-35.38	1.75	16.66	-20.48	-13	-7.48	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-53.71	4.02	29.80	-27.93	-13	-14.93	Horizontal
3440.0	-46.60	4.02	29.80	-20.82	-13	-7.82	Vertical
5160.0	-48.29	5.24	35.84	-17.69	-13	-4.69	Vertical
5160.0	-52.28	5.24	35.84	-21.68	-13	-8.68	Horizontal
198.0	-38.98	1.57	17.26	-23.29	-13	-10.29	Vertical
358.9	-40.07	1.78	16.35	-25.50	-13	-12.50	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-46.93	4.03	30.00	-20.96	-13	-7.96	Horizontal
3465.0	-52.27	4.03	30.00	-26.30	-13	-13.30	Vertical
5197.5	-46.72	5.25	35.86	-16.11	-13	-3.11	Vertical
5197.5	-52.79	5.25	35.86	-22.18	-13	-9.18	Horizontal
195.2	-42.60	1.44	17.95	-26.09	-13	-13.09	Vertical
268.9	-39.48	1.65	16.09	-25.04	-13	-12.04	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-44.97	4.05	27.68	-21.34	-13	-8.34	Horizontal
3490.0	-48.54	4.05	27.68	-24.91	-13	-11.91	Vertical
5235.0	-50.61	5.26	35.86	-20.01	-13	-7.01	Vertical
5235.0	-51.97	5.26	35.86	-21.37	-13	-8.37	Horizontal
202.2	-42.62	1.61	16.85	-27.38	-13	-14.38	Vertical
290.4	-37.74	1.61	15.19	-24.16	-13	-11.16	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-47.08	2.78	27.50	-22.36	-13	-9.36	Horizontal
1649.4	-52.50	2.78	27.50	-27.78	-13	-14.78	Vertical
2474.1	-52.39	2.90	27.80	-27.49	-13	-14.49	Vertical
2474.1	-51.36	2.90	27.80	-26.46	-13	-13.46	Horizontal
205.9	-37.08	1.76	17.59	-21.25	-13	-8.25	Vertical
396.8	-42.09	1.63	15.87	-27.85	-13	-14.85	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-50.90	2.80	27.48	-26.22	-13	-13.22	Horizontal
1673.0	-45.92	2.80	27.48	-21.24	-13	-8.24	Vertical
2509.5	-53.93	2.91	27.70	-29.14	-13	-16.14	Vertical
2509.5	-51.68	2.91	27.70	-26.89	-13	-13.89	Horizontal
195.7	-44.89	1.61	15.68	-30.82	-13	-17.82	Vertical
410.8	-44.74	1.59	17.52	-28.82	-13	-15.82	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-47.11	2.82	27.43	-22.50	-13	-9.50	Horizontal
1696.6	-46.91	2.82	27.43	-22.30	-13	-9.30	Vertical
2544.9	-44.95	2.92	27.74	-20.13	-13	-7.13	Vertical
2544.9	-52.44	2.92	27.74	-27.62	-13	-14.62	Horizontal
204.6	-38.47	1.69	16.67	-23.48	-13	-10.48	Vertical
234.2	-40.60	1.70	17.18	-25.12	-13	-12.12	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-45.83	2.78	27.50	-21.11	-13	-8.11	Horizontal
1658.0	-53.63	2.78	27.50	-28.91	-13	-15.91	Vertical
2487.0	-48.58	2.90	27.80	-23.68	-13	-10.68	Vertical
2487.0	-49.14	2.90	27.80	-24.24	-13	-11.24	Horizontal
178.1	-39.25	1.71	15.57	-25.39	-13	-12.39	Vertical
398.6	-41.56	1.34	16.40	-26.50	-13	-13.50	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-49.60	2.80	27.48	-24.92	-13	-11.92	Horizontal
1673.0	-50.87	2.80	27.48	-26.19	-13	-13.19	Vertical
2509.5	-51.99	2.91	27.70	-27.20	-13	-14.20	Vertical
2509.5	-53.07	2.91	27.70	-28.28	-13	-15.28	Horizontal
176.2	-34.81	1.44	17.04	-19.21	-13	-6.21	Vertical
234.7	-41.10	1.76	17.62	-25.24	-13	-12.24	Horizontal
Test Results for High Channel 844MHz							
1688.0	-47.31	2.82	27.43	-22.70	-13	-9.70	Horizontal
1688.0	-51.94	2.82	27.43	-27.33	-13	-14.33	Vertical
2532.0	-44.08	2.92	27.74	-19.26	-13	-6.26	Vertical
2532.0	-50.48	2.92	27.74	-25.66	-13	-12.66	Horizontal
203.2	-36.68	1.74	17.70	-20.72	-13	-7.72	Vertical
439.3	-36.98	1.41	17.46	-20.92	-13	-7.92	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-60.73	5.23	35.81	-30.15	-25	-5.15	Horizontal
5005.0	-59.89	5.23	35.81	-29.31	-25	-4.31	Vertical
7507.5	-61.78	5.67	36.85	-30.60	-25	-5.60	Vertical
7507.5	-61.09	5.67	36.85	-29.91	-25	-4.91	Horizontal
201.9	-49.53	1.73	17.97	-33.29	-25	-8.29	Vertical
240.3	-54.76	1.38	15.11	-41.03	-25	-16.03	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.79	5.23	35.82	-32.20	-25	-7.20	Horizontal
5070.0	-60.18	5.23	35.82	-29.59	-25	-4.59	Vertical
7605.0	-60.09	5.67	36.85	-28.91	-25	-3.91	Vertical
7605.0	-59.07	5.67	36.85	-27.89	-25	-2.89	Horizontal
185.3	-47.08	1.77	16.17	-32.67	-25	-7.67	Vertical
439.6	-44.80	1.63	15.21	-31.22	-25	-6.22	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-60.55	5.24	35.83	-29.96	-25	-4.96	Horizontal
5135.0	-62.26	5.24	35.83	-31.67	-25	-6.67	Vertical
7702.5	-63.07	5.68	36.87	-31.88	-25	-6.88	Vertical
7702.5	-61.74	5.68	36.87	-30.55	-25	-5.55	Horizontal
191.7	-47.21	1.58	17.56	-31.23	-25	-6.23	Vertical
342.4	-53.03	1.45	16.58	-37.90	-25	-12.90	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-62.50	5.23	35.82	-31.91	-25	-6.91	Horizontal
5020.0	-59.81	5.23	35.82	-29.22	-25	-4.22	Vertical
7530.0	-62.65	5.67	36.86	-31.46	-25	-6.46	Vertical
7530.0	-62.22	5.67	36.86	-31.03	-25	-6.03	Horizontal
187.1	-54.57	1.63	15.76	-40.44	-25	-15.44	Vertical
244.5	-45.53	1.71	15.44	-31.80	-25	-6.80	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.22	5.23	35.82	-31.63	-25	-6.63	Horizontal
5070.0	-63.41	5.23	35.82	-32.82	-25	-7.82	Vertical
7605.0	-64.96	5.67	36.85	-33.78	-25	-8.78	Vertical
7605.0	-64.89	5.67	36.85	-33.71	-25	-8.71	Horizontal
199.0	-48.12	1.79	16.84	-33.06	-25	-8.06	Vertical
272.1	-51.35	1.71	17.64	-35.42	-25	-10.42	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-62.31	5.24	35.83	-31.72	-25	-6.72	Horizontal
5120.0	-60.55	5.24	35.83	-29.96	-25	-4.96	Vertical
7680.0	-63.86	5.70	36.88	-32.68	-25	-7.68	Vertical
7680.0	-60.93	5.70	36.88	-29.75	-25	-4.75	Horizontal
207.1	-49.60	1.79	16.84	-34.54	-25	-9.54	Vertical
310.7	-49.79	1.71	17.64	-33.86	-25	-8.86	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-48.25	2.61	27.28	-23.58	-13	-10.58	Horizontal
1413.0	-52.59	2.61	27.28	-27.92	-13	-14.92	Vertical
2119.5	-48.05	2.87	27.59	-23.33	-13	-10.33	Vertical
2119.5	-52.98	2.87	27.59	-28.26	-13	-15.26	Horizontal
194.5	-42.98	1.71	16.15	-28.54	-13	-15.54	Vertical
275.6	-44.32	1.41	17.32	-28.41	-13	-15.41	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-45.41	2.62	27.30	-20.73	-13	-7.73	Horizontal
1420.0	-47.43	2.62	27.30	-22.75	-13	-9.75	Vertical
2130.0	-49.07	2.87	27.62	-24.32	-13	-11.32	Vertical
2130.0	-53.15	2.87	27.62	-28.40	-13	-15.40	Horizontal
194.9	-34.86	1.42	15.25	-21.04	-13	-8.04	Vertical
307.5	-37.65	1.36	17.19	-21.82	-13	-8.82	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-50.91	2.66	27.28	-26.29	-13	-13.29	Horizontal
1427.0	-46.52	2.66	27.28	-21.90	-13	-8.90	Vertical
2140.5	-46.86	2.88	27.60	-22.14	-13	-9.14	Vertical
2140.5	-51.22	2.88	27.60	-26.50	-13	-13.50	Horizontal
208.2	-36.50	1.32	17.29	-20.53	-13	-7.53	Vertical
266.9	-40.85	1.72	16.89	-25.68	-13	-12.68	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-53.99	2.62	27.30	-29.31	-13	-16.31	Horizontal
1418.0	-53.27	2.62	27.30	-28.59	-13	-15.59	Vertical
2127.0	-51.04	2.87	27.62	-26.29	-13	-13.29	Vertical
2127.0	-53.37	2.87	27.62	-28.62	-13	-15.62	Horizontal
180.5	-39.18	1.35	16.91	-23.62	-13	-10.62	Vertical
467.4	-43.80	1.62	16.31	-29.11	-13	-16.11	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-53.69	2.62	27.30	-29.01	-13	-16.01	Horizontal
1420.0	-47.29	2.62	27.30	-22.61	-13	-9.61	Vertical
2130.0	-51.62	2.87	27.62	-26.87	-13	-13.87	Vertical
2130.0	-50.04	2.87	27.62	-25.29	-13	-12.29	Horizontal
185.5	-38.35	1.51	17.14	-22.72	-13	-9.72	Vertical
332.3	-39.13	1.77	16.88	-24.02	-13	-11.02	Horizontal
Test Results for High Channel 711MHz							
1422.0	-44.73	2.62	27.30	-20.05	-13	-7.05	Horizontal
1422.0	-47.28	2.62	27.30	-22.60	-13	-9.60	Vertical
2133.0	-49.00	2.87	27.62	-24.25	-13	-11.25	Vertical
2133.0	-52.20	2.87	27.62	-27.45	-13	-14.45	Horizontal
190.5	-42.51	1.78	15.95	-28.34	-13	-15.34	Vertical
240.2	-44.95	1.34	17.95	-28.35	-13	-15.35	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74
 . Margin = Spurious Emission Level - Limit
 . Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = low voltage, DC 3.4V, Normal, DC 3.8V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2/4/5/7/17

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	12.5	0.006623	2.5
3.8	1880	13.4	0.007121	2.5
4.2	1880	13.7	0.007289	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	13.0	0.006935	2.5
Extreme (50C)	1880	11.6	0.006185	2.5
Extreme (40C)	1880	14.1	0.007509	2.5
Extreme (30C)	1880	14.0	0.007437	2.5
Extreme (10C)	1880	13.6	0.007227	2.5
Extreme (0C)	1880	12.1	0.006444	2.5
Extreme (-10C)	1880	12.7	0.006778	2.5
Extreme (-20C)	1880	14.2	0.007569	2.5
Extreme (-30C)	1880	14.2	0.007576	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	10.1	0.005394	2.5
3.8	1880	8.9	0.004744	2.5
4.2	1880	8.0	0.004278	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	10.0	0.005299	2.5
Extreme (50C)	1880	8.7	0.004606	2.5
Extreme (40C)	1880	8.0	0.004233495	2.5
Extreme (30C)	1880	9.3	0.004937093	2.5
Extreme (10C)	1880	9.2	0.004911467	2.5
Extreme (0C)	1880	7.7	0.004069904	2.5
Extreme (-10C)	1880	9.2	0.004887584	2.5
Extreme (-20C)	1880	8.6	0.00457539	2.5
Extreme (-30C)	1880	7.8	0.004139406	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	8.9	0.005141	2.5
3.8	1732.5	8.9	0.005146	2.5
4.2	1732.5	8.4	0.004861	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	8.7	0.005008	2.5
Extreme (50C)	1732.5	9.1	0.005276	2.5
Extreme (40C)	1732.5	7.3	0.004216	2.5
Extreme (30C)	1732.5	6.2	0.003590	2.5
Extreme (10C)	1732.5	7.1	0.004108	2.5
Extreme (0C)	1732.5	9.3	0.005358	2.5
Extreme (-10C)	1732.5	8.3	0.004769	2.5
Extreme (-20C)	1732.5	7.2	0.004154	2.5
Extreme (-30C)	1732.5	8.7	0.005019	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	9.6	0.005538	2.5
3.8	1732.5	8.7	0.005040	2.5
4.2	1732.5	7.8	0.004475	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	9.3	0.005391	2.5
Extreme (50C)	1732.5	9.1	0.005273	2.5
Extreme (40C)	1732.5	8.0	0.004637	2.5
Extreme (30C)	1732.5	8.6	0.004937	2.5
Extreme (10C)	1732.5	8.6	0.004963	2.5
Extreme (0C)	1732.5	7.9	0.004577	2.5
Extreme (-10C)	1732.5	8.6	0.004950	2.5
Extreme (-20C)	1732.5	8.6	0.004972	2.5
Extreme (-30C)	1732.5	8.4	0.004866	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	5.7	0.006871	2.5
3.8	836.5	7.0	0.008411	2.5
4.2	836.5	4.5	0.005371	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.1	0.007252	2.5
Extreme (50C)	836.5	6.4	0.007598	2.5
Extreme (40C)	836.5	6.1	0.007254	2.5
Extreme (30C)	836.5	6.7	0.008019	2.5
Extreme (10C)	836.5	5.3	0.006279	2.5
Extreme (0C)	836.5	5.2	0.006191	2.5
Extreme (-10C)	836.5	5.4	0.006445	2.5
Extreme (-20C)	836.5	6.1	0.007241	2.5
Extreme (-30C)	836.5	5.8	0.006937	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	5.5	0.006599	2.5
3.8	836.5	6.4	0.007609	2.5
4.2	836.5	5.3	0.006302	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.4	0.007612	2.5
Extreme (50C)	836.5	6.0	0.007213	2.5
Extreme (40C)	836.5	6.2	0.007425	2.5
Extreme (30C)	836.5	6.0	0.007183	2.5
Extreme (10C)	836.5	5.1	0.006126	2.5
Extreme (0C)	836.5	4.9	0.005904	2.5
Extreme (-10C)	836.5	6.1	0.007233	2.5
Extreme (-20C)	836.5	5.7	0.006867	2.5
Extreme (-30C)	836.5	6.8	0.008100	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	10.4	0.004107	2.5
3.8	2535	8.8	0.003477	2.5
4.2	2535	8.7	0.003419	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	9.7	0.003827	2.5
Extreme (50C)	2535	8.4	0.003324	2.5
Extreme (40C)	2535	8.4	0.003311	2.5
Extreme (30C)	2535	8.8	0.003471	2.5
Extreme (10C)	2535	7.9	0.003098	2.5
Extreme (0C)	2535	8.8	0.003469	2.5
Extreme (-10C)	2535	9.6	0.003800	2.5
Extreme (-20C)	2535	9.1	0.003597	2.5
Extreme (-30C)	2535	8.6	0.003396	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	6.9	0.002722	2.5
3.8	2535	6.9	0.002711	2.5
4.2	2535	6.0	0.002378	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	6.0	0.002384	2.5
Extreme (40C)	2535	5.0	0.001968	2.5
Extreme (30C)	2535	6.4	0.002517	2.5
Extreme (10C)	2535	5.9	0.002343	2.5
Extreme (0C)	2535	4.7	0.001838	2.5
Extreme (-10C)	2535	5.1	0.002022	2.5
Extreme (-20C)	2535	5.9	0.002338	2.5
Extreme (-30C)	2535	5.7	0.002238	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 17

Band 17 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	9.6	0.013572	2.5
3.8	710.0	9.1	0.012776	2.5
4.2	710.0	8.6	0.012107	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	9.4	0.013290	2.5
Extreme (50C)	710.0	9.1	0.012778	2.5
Extreme (40C)	710.0	7.9	0.011176	2.5
Extreme (30C)	710.0	8.5	0.012042	2.5
Extreme (10C)	710.0	8.7	0.012316	2.5
Extreme (0C)	710.0	8.1	0.011407	2.5
Extreme (-10C)	710.0	9.0	0.012732	2.5
Extreme (-20C)	710.0	8.6	0.012109	2.5
Extreme (-30C)	710.0	7.8	0.011041	2.5

Band 17 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	10.5	0.014724	2.5
3.8	710.0	8.5	0.011947	2.5
4.2	710.0	8.5	0.011972	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	9.6	0.013588	2.5
Extreme (50C)	710.0	9.3	0.013066	2.5
Extreme (40C)	710.0	8.9	0.012485	2.5
Extreme (30C)	710.0	9.1	0.012800	2.5
Extreme (10C)	710.0	8.0	0.011305	2.5
Extreme (0C)	710.0	8.1	0.011377	2.5
Extreme (-10C)	710.0	9.2	0.012930	2.5
Extreme (-20C)	710.0	9.0	0.012639	2.5
Extreme (-30C)	710.0	8.6	0.012052	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

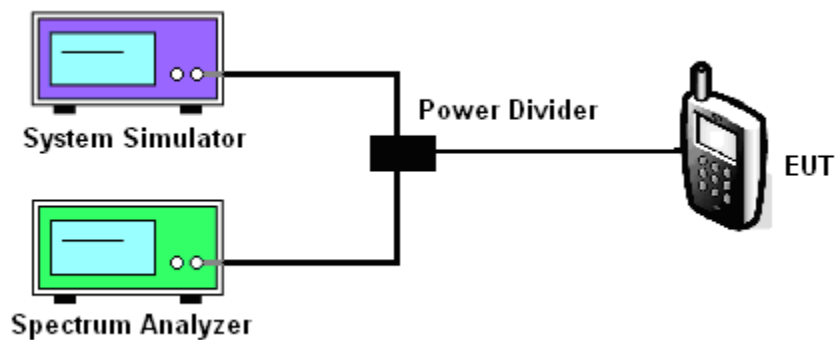

MODES TESTED

LTE Band 2/4/5/7/17

Test data reference attachment.

----END OF REPORT----