



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Tablet PC IdeaTab A2207A-F
BRAND NAME : lenovo
MODEL NAME : 60023; 4357
FCC ID : O57A2207AF
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 26, 2012 and completely tested on Nov. 15, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Testing Site..... 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 RF Output Power 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 RF Utility 9

3 TEST RESULT 10

 3.1 Number of Channel Measurement 10

 3.2 Hopping Channel Separation Measurement 12

 3.3 Dwell Time Measurement..... 19

 3.4 20dB and 99% Bandwidth Measurement 21

 3.5 Peak Output Power Measurement 34

 3.6 Conducted Band Edges Measurement 37

 3.7 Conducted Spurious Emission Measurement 44

 3.8 Radiated Band Edges and Spurious Emission Measurement 48

 3.9 AC Conducted Emission Measurement..... 57

 3.10 Antenna Requirements..... 63

4 LIST OF MEASURING EQUIPMENT..... 64

5 UNCERTAINTY OF EVALUATION..... 65

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O2604A	Rev. 01	Initial issue of report	Nov. 30, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.14 dB at 945.440 MHz
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.49 dB at 0.400 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

1.2 Manufacturer

Lenovo (Singapore) Pte Ltd.

151, Lorong Chuan, #02-01, New Tech Park, 556741, Singapore

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC IdeaTab A2207A-F
Brand Name	lenovo
Model Name	60023; 4357
FCC ID	O57A2207AF
EUT supports Radios application	WLAN 11bgn/Bluetooth 2.1 EDR/Bluetooth 3.0 EDR/ Bluetooth 4.0 - LE
HW Version	Lepad A2207A-F
SW Version	A2207_user_130120
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 4.17 dBm (0.0026 W) Bluetooth EDR (2Mbps) : 3.60 dBm (0.0023 W) Bluetooth EDR (3Mbps) : 3.84 dBm (0.0024 W)
99% Occupied Bandwidth	Bluetooth (1Mbps) : 0.888MHz Bluetooth EDR (2Mbps) : 1.170MHz Bluetooth EDR (3Mbps) : 1.158MHz
Antenna Type	PIFA Antenna type with gain 5.30 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK Bluetooth 3.0 EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT	FCC DoC	N/A	Unshielded, 1.8m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	3.93 dBm	3.11 dBm	3.45 dBm
Ch39	2441MHz	3.14 dBm	2.45 dBm	2.81 dBm
Ch78	2480MHz	4.17 dBm	3.60 dBm	3.84 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (Y plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Pretest	Pretest
AC Conducted Emission	Mode 1 :WLAN Link + Bluetooth Link + Adapter		
Remark: For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

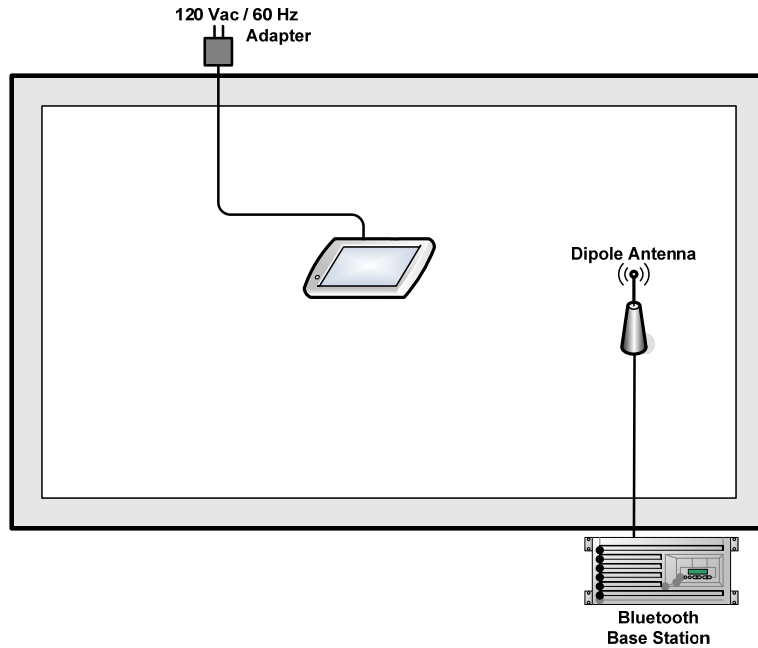

<AC Conducted Emission Mode>

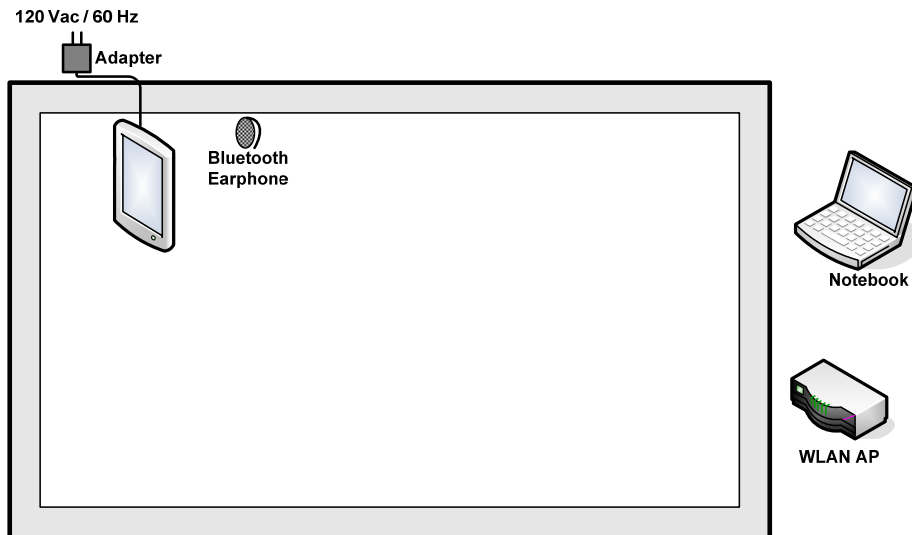

2.4 RF Utility

For Bluetooth function, the RF utility, "Enter Engineer" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.

3.1.4 Test Setup

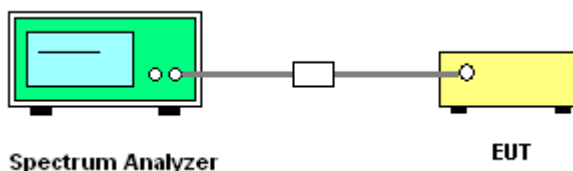


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	1Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

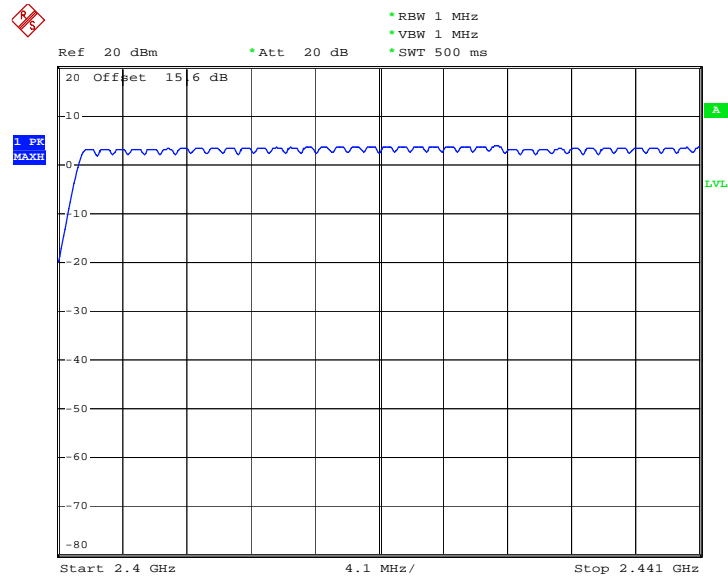

Date: 3.NOV.2012 15:25:07

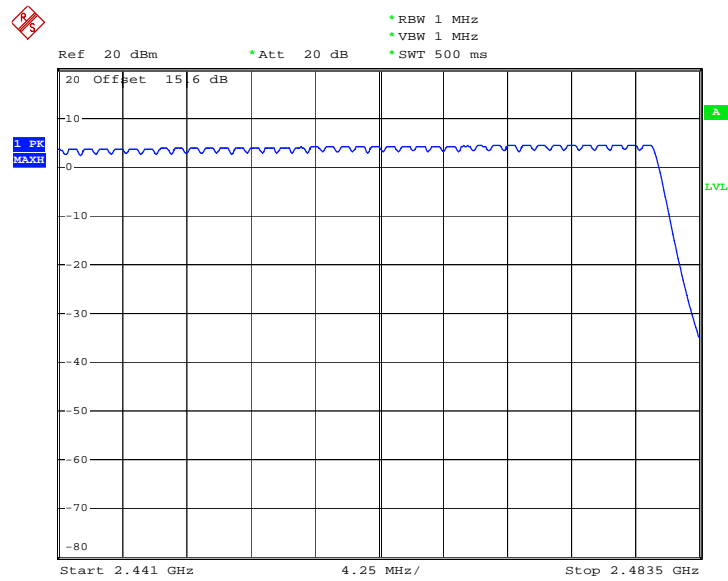

Date: 3.NOV.2012 15:30:02

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; RBW \geq 1% of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.

3.2.4 Test Setup

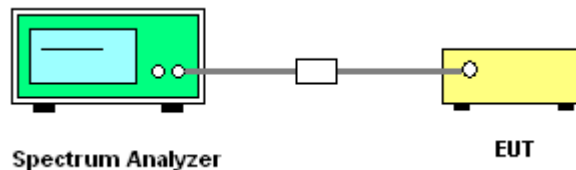




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6480	Pass
39	2441	1.008	0.6453	Pass
78	2480	1.002	0.6293	Pass


Channel Separation Plot on Channel 00 - 01

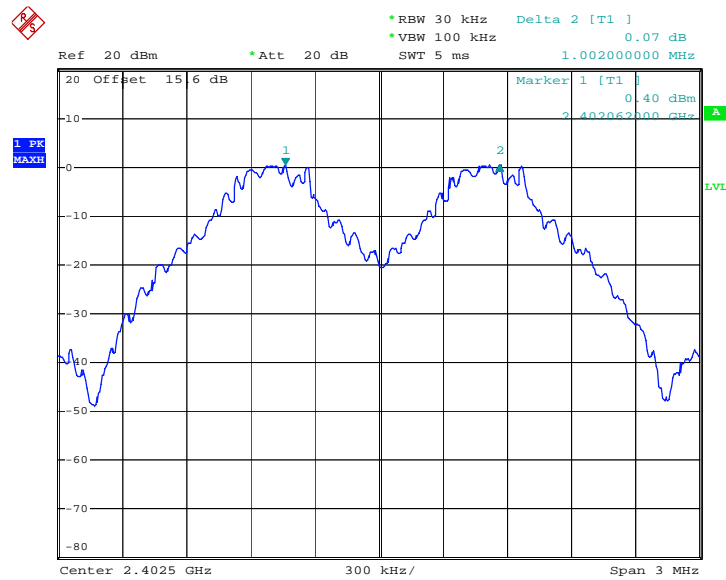

Date: 3.NOV.2012 14:48:29




Channel Separation Plot on Channel 39 - 40

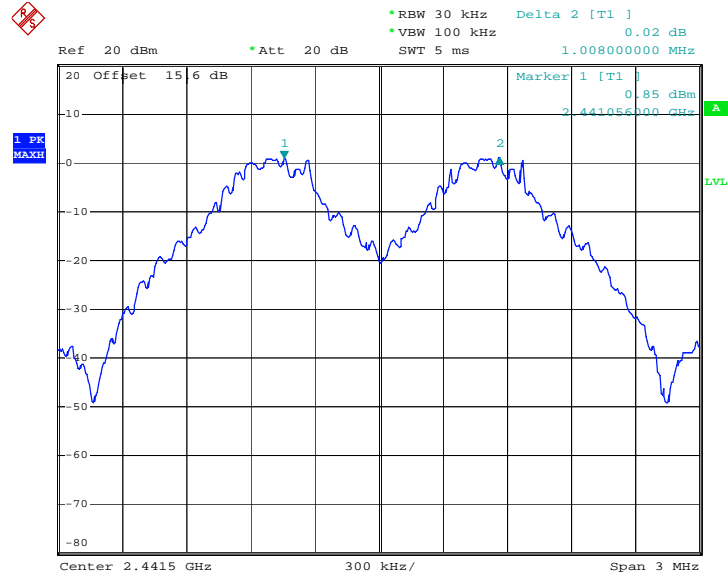

Date: 3.NOV.2012 14:49:28

Channel Separation Plot on Channel 77 - 78

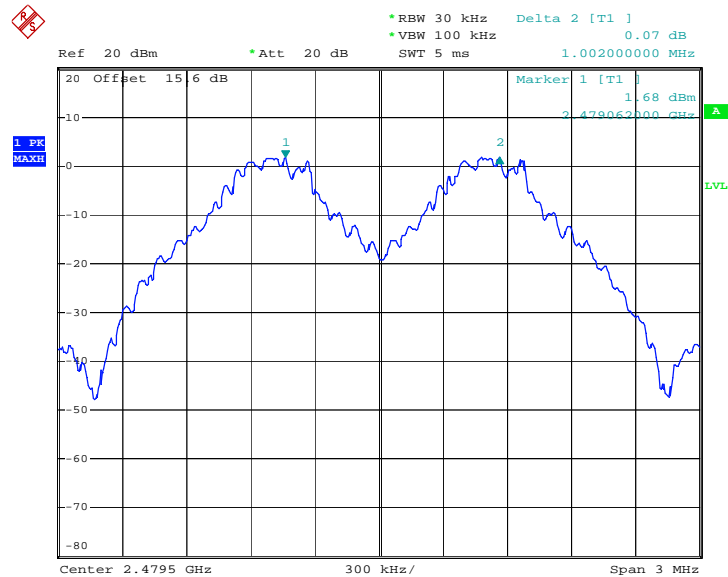


Date: 3.NOV.2012 14:50:28



Test Mode :	2Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8560	Pass
39	2441	1.002	0.8560	Pass
78	2480	1.002	0.8520	Pass


Channel Separation Plot on Channel 00 - 01

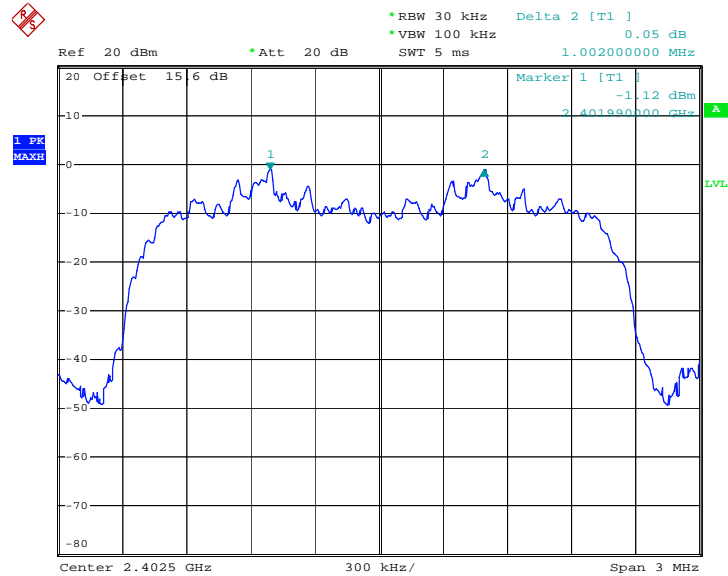

Date: 3.NOV.2012 14:51:42




Channel Separation Plot on Channel 39 - 40

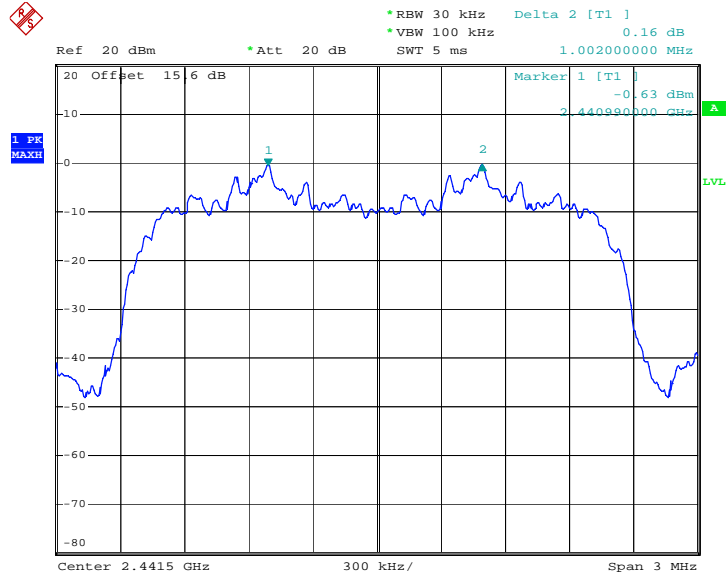

Date: 3.NOV.2012 14:52:25

Channel Separation Plot on Channel 77 - 78

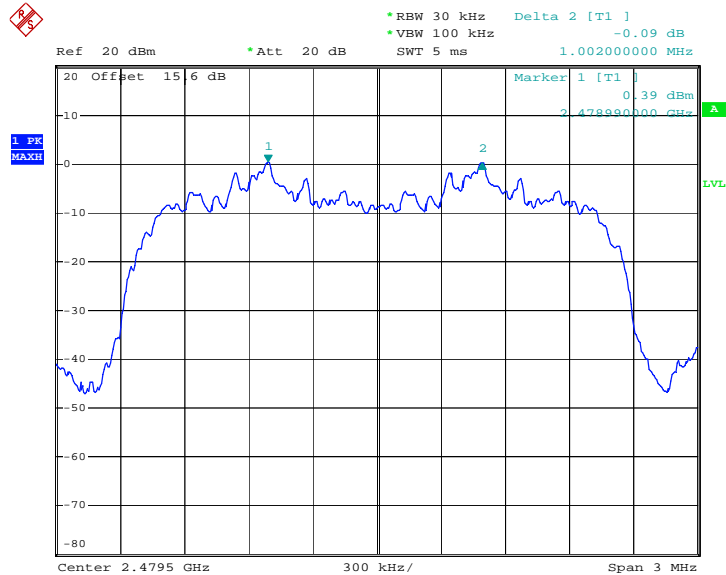


Date: 3.NOV.2012 14:53:06



Test Mode :	3Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8240	Pass
39	2441	1.002	0.8240	Pass
78	2480	1.002	0.8240	Pass


Channel Separation Plot on Channel 00 - 01

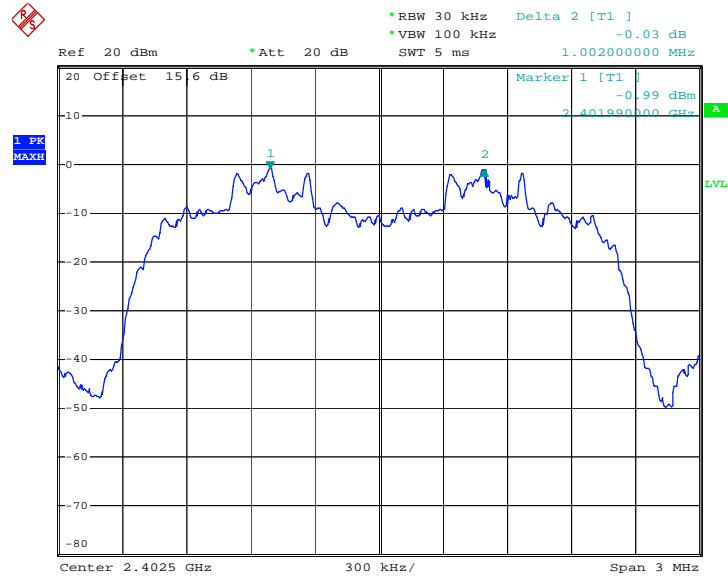

Date: 3.NOV.2012 14:57:14




Channel Separation Plot on Channel 39 - 40

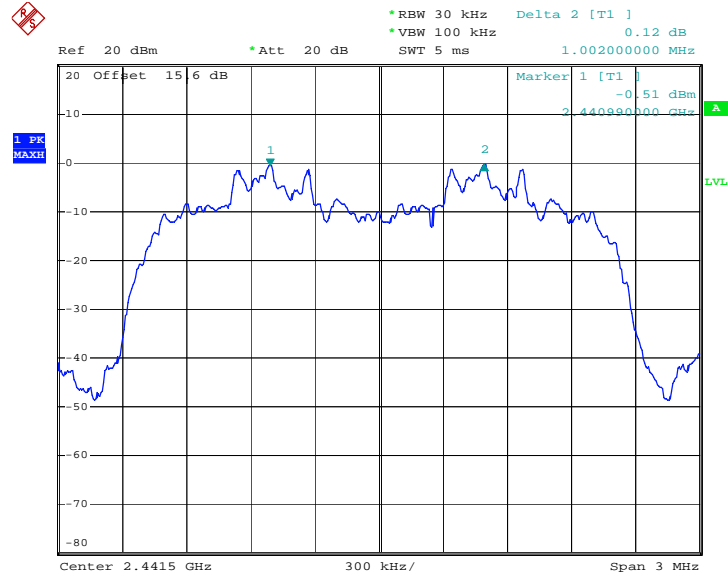

Date: 3.NOV.2012 15:00:45

Channel Separation Plot on Channel 77 - 78

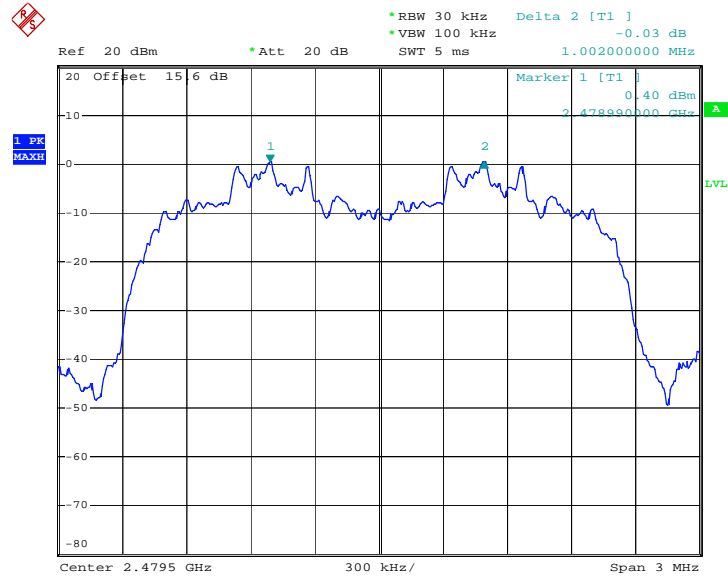

Date: 3.NOV.2012 15:01:52

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output connector was connected to the spectrum analyzer through a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.

3.3.4 Test Setup

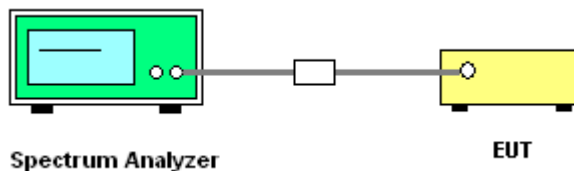

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	2.90	2934.00	0.27	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. T: Package Transfer Time(us)

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

3.4.4 Test Setup

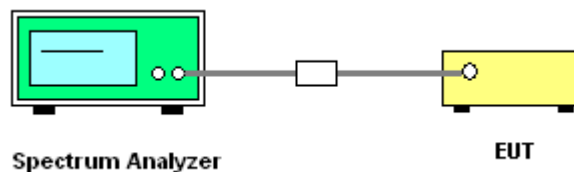


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.972
39	2441	0.968
78	2480	0.944


20 dB Bandwidth Plot on Channel 00

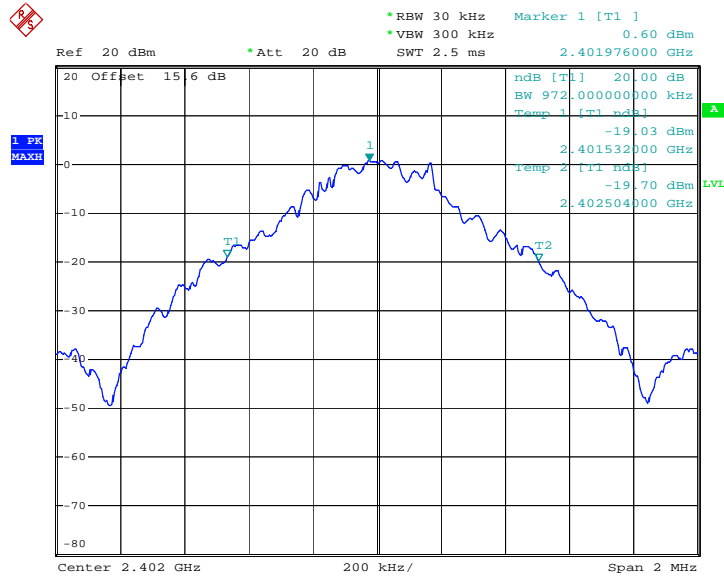

Date: 3.NOV.2012 15:04:19




20 dB Bandwidth Plot on Channel 39

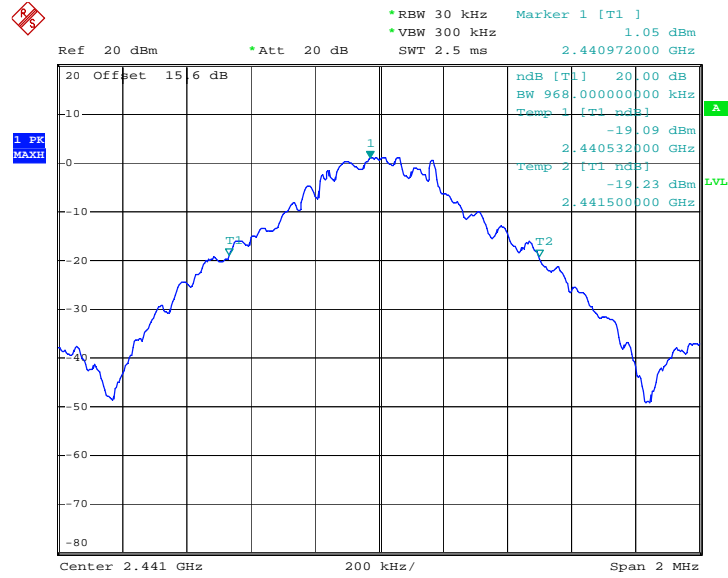

Date: 3.NOV.2012 15:04:26

20 dB Bandwidth Plot on Channel 78

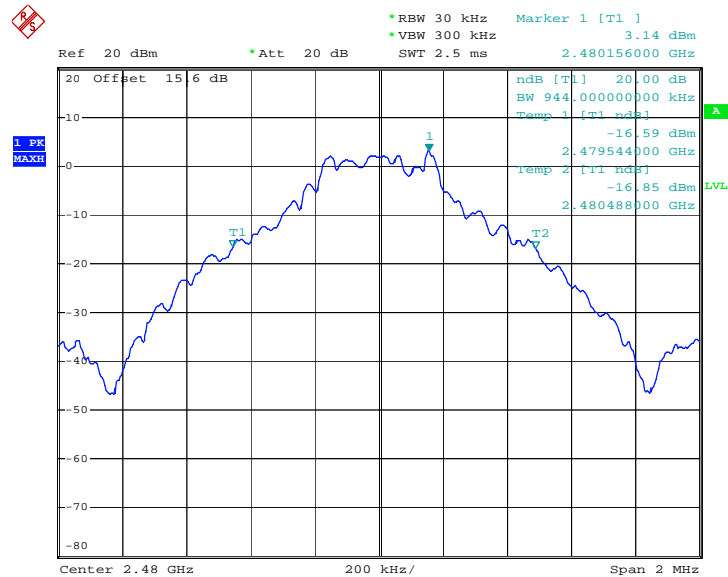


Date: 3.NOV.2012 15:04:43



Test Mode :	2Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.284
39	2441	1.284
78	2480	1.278


20 dB Bandwidth Plot on Channel 00

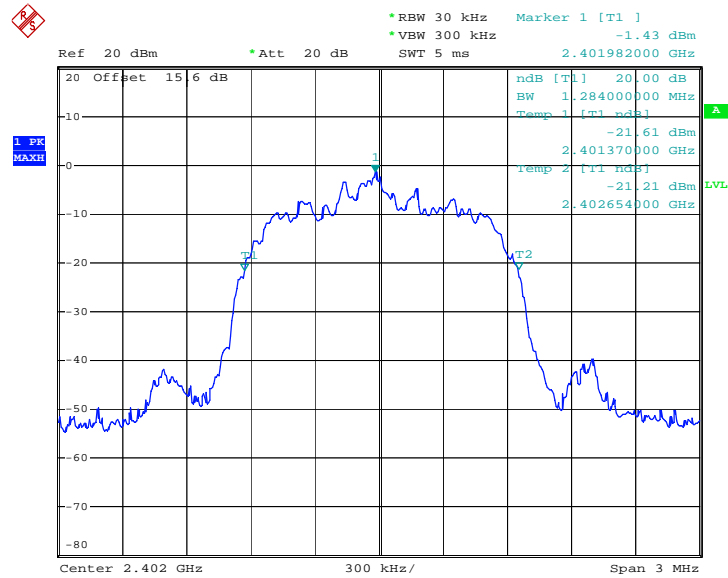

Date: 3.NOV.2012 15:04:54




20 dB Bandwidth Plot on Channel 39

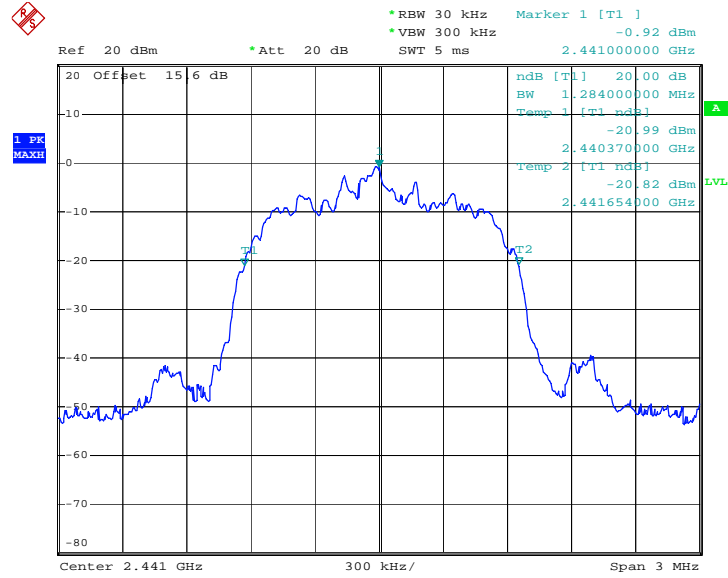

Date: 3.NOV.2012 15:05:06

20 dB Bandwidth Plot on Channel 78

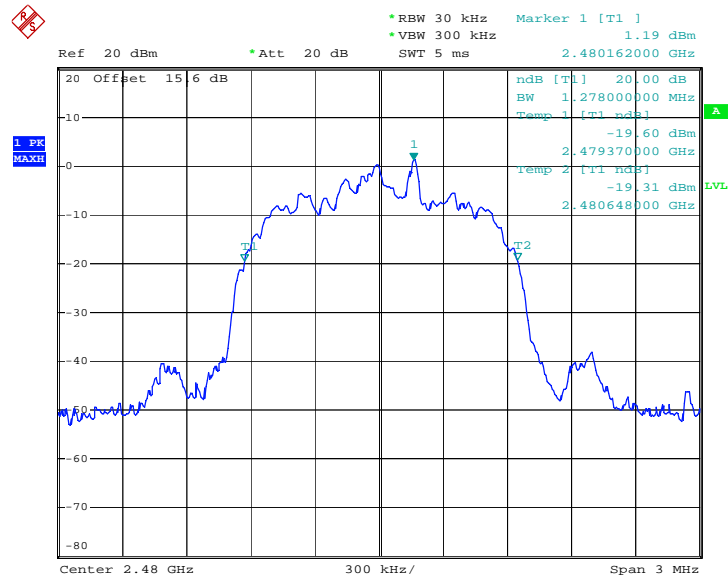


Date: 3.NOV.2012 15:05:18



Test Mode :	3Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.236
39	2441	1.236
78	2480	1.236


20 dB Bandwidth Plot on Channel 00

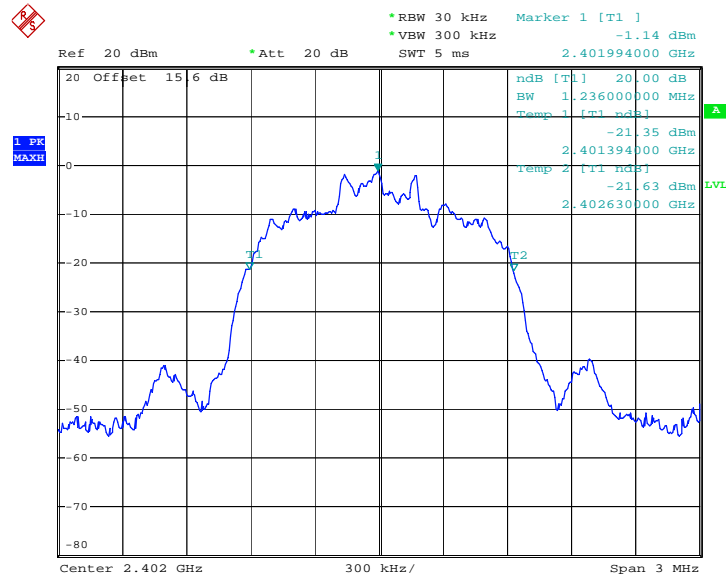

Date: 3.NOV.2012 15:05:29




20 dB Bandwidth Plot on Channel 39

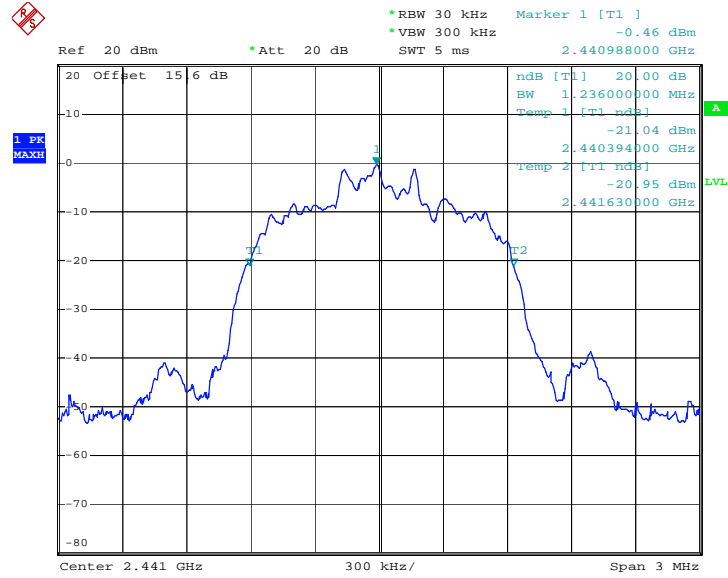

Date: 3.NOV.2012 15:05:48

20 dB Bandwidth Plot on Channel 78

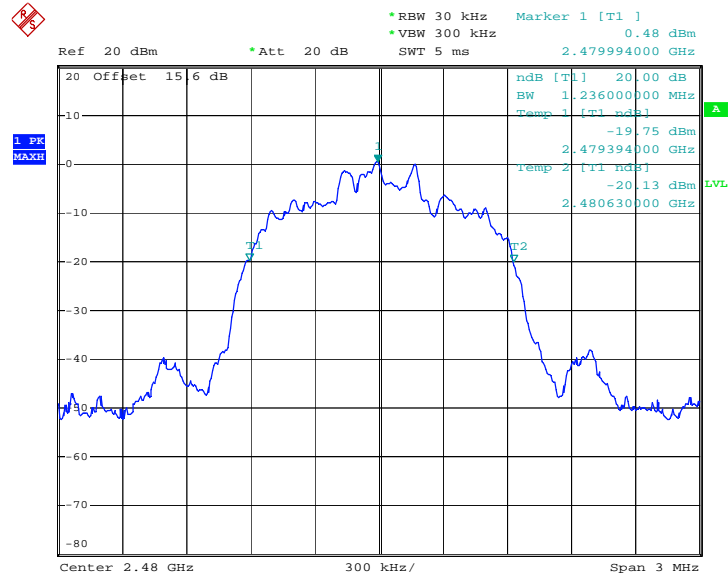

Date: 3.NOV.2012 15:06:06




3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.858
39	2441	0.888
78	2480	0.852


99% Bandwidth Plot on Channel 00

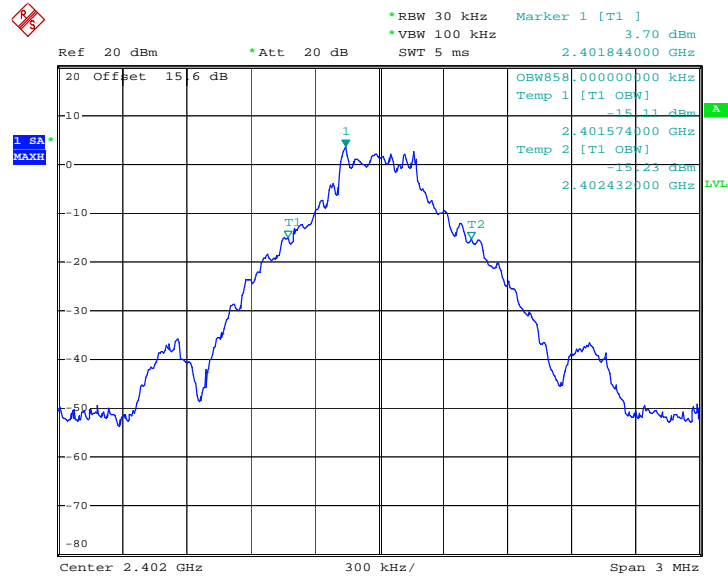

Date: 15.NOV.2012 20:23:38




99% Occupied Bandwidth Plot on Channel 39

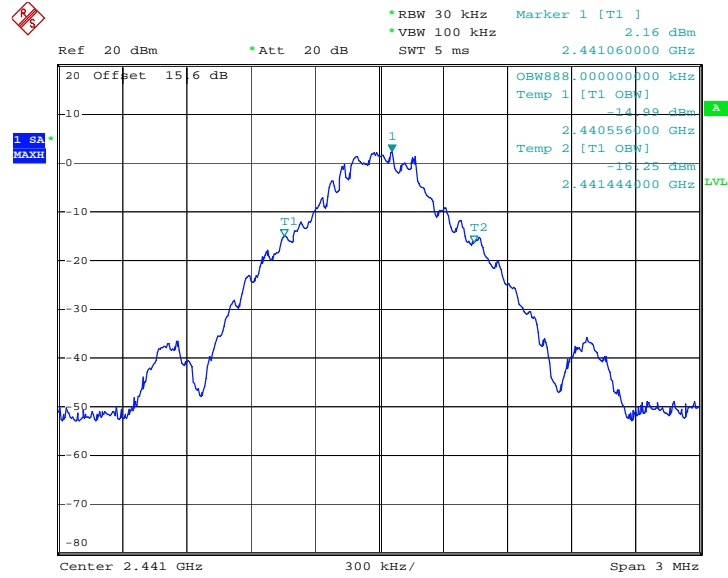

Date: 15.NOV.2012 20:02:51

99% Occupied Bandwidth Plot on Channel 78

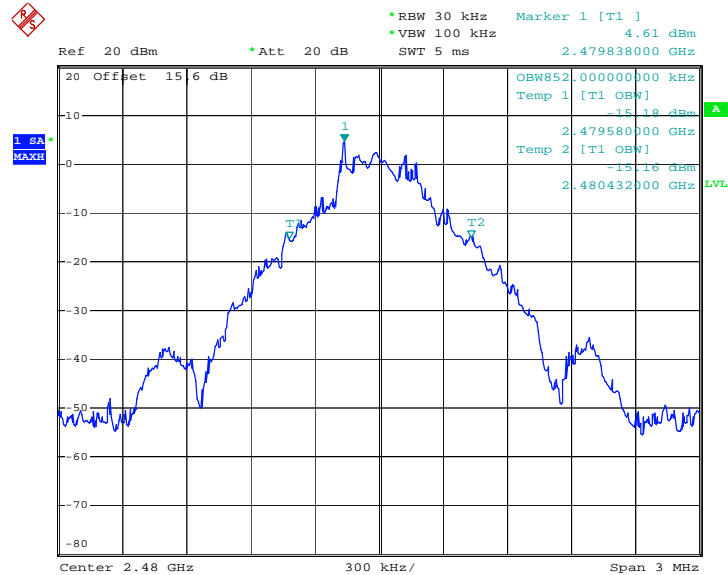


Date: 15.NOV.2012 20:07:52



Test Mode :	2Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.170
39	2441	1.164
78	2480	1.170


99% Bandwidth Plot on Channel 00

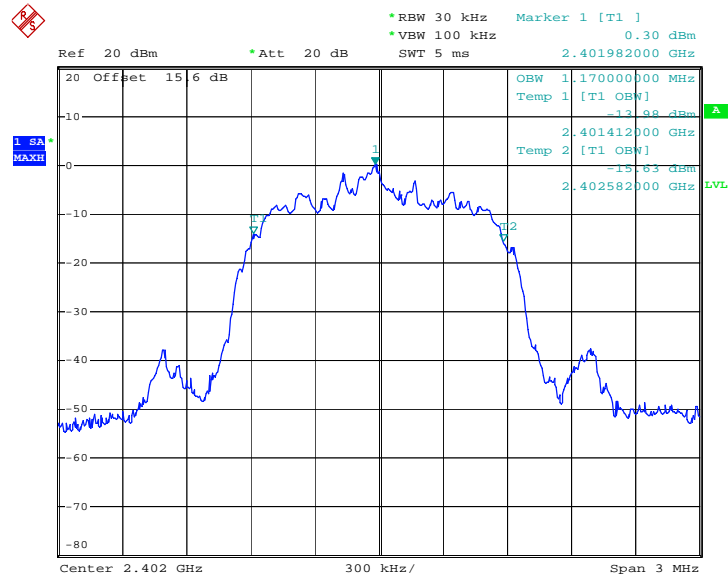

Date: 15.NOV.2012 20:08:46




99% Occupied Bandwidth Plot on Channel 39

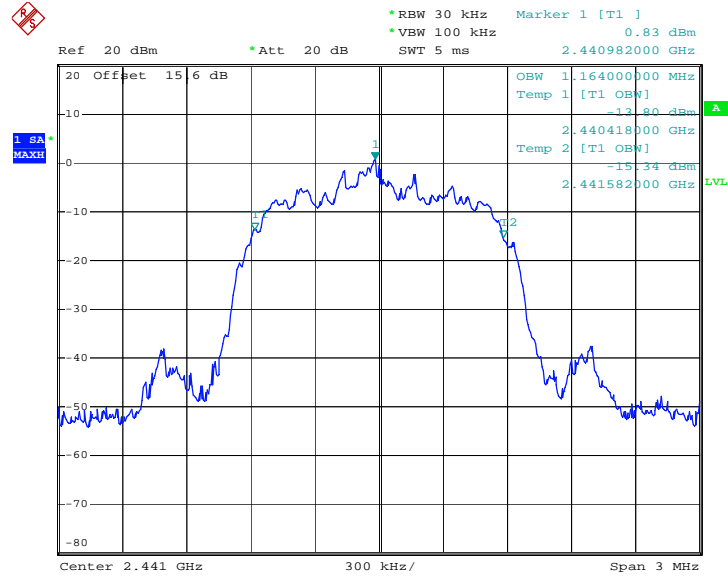

Date: 15.NOV.2012 20:09:08

99% Occupied Bandwidth Plot on Channel 78

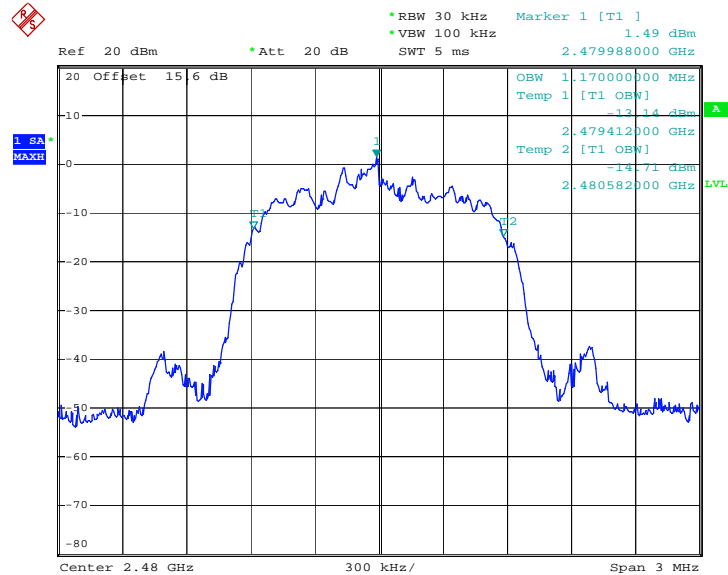


Date: 15.NOV.2012 20:09:28



Test Mode :	3Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.140
39	2441	1.140
78	2480	1.158


99% Bandwidth Plot on Channel 00

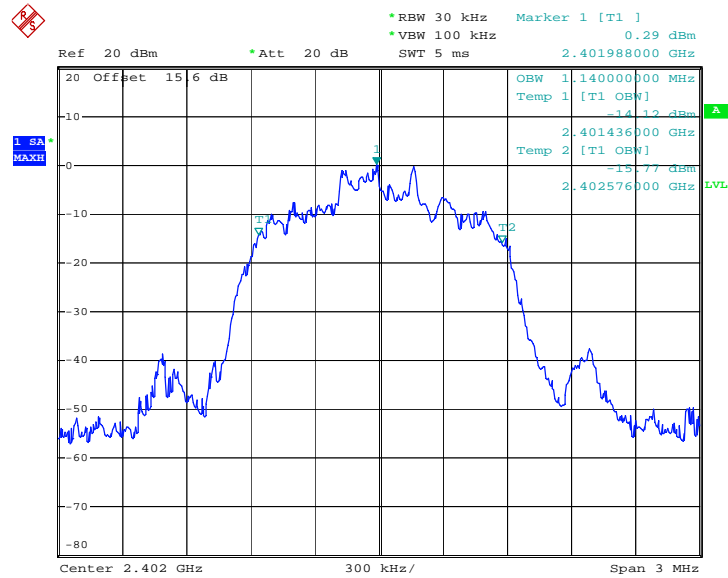

Date: 15.NOV.2012 20:10:15




99% Occupied Bandwidth Plot on Channel 39

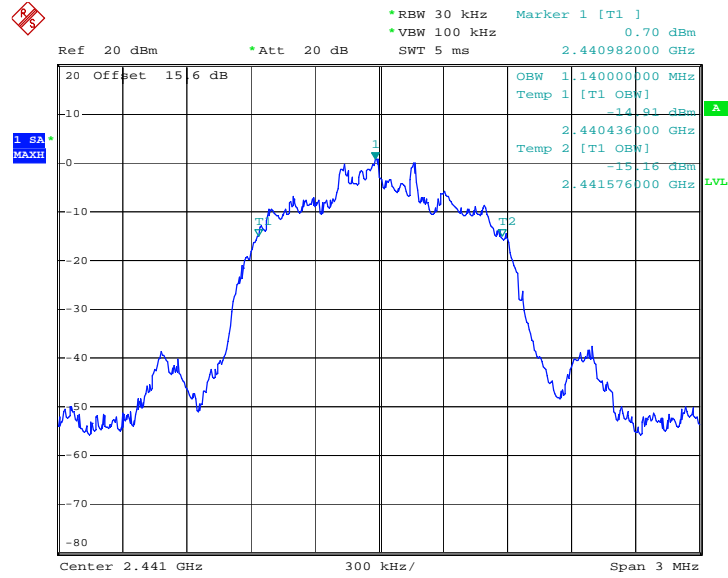

Date: 15.NOV.2012 20:10:43

99% Occupied Bandwidth Plot on Channel 78

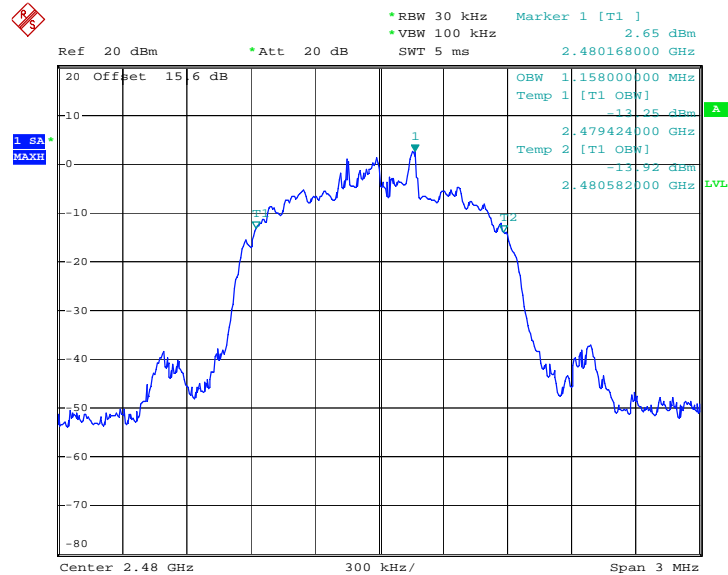

Date: 15.NOV.2012 20:12:19

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.5.4 Test Setup

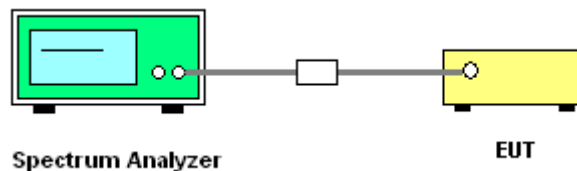




3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	3.93	30.00	Pass
39	2441	3.14	30.00	Pass
78	2480	4.17	30.00	Pass


Peak Output Power Plot on Channel 00

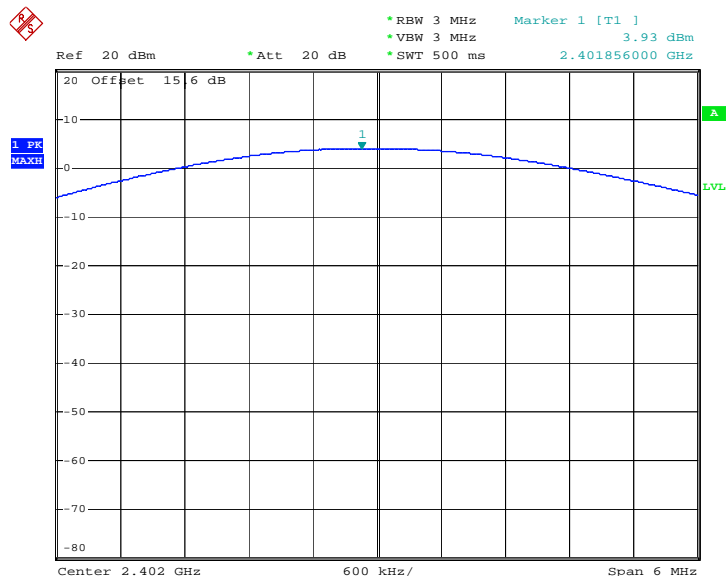

Date: 2.NOV.2012 22:34:27




Peak Output Power Plot on Channel 39

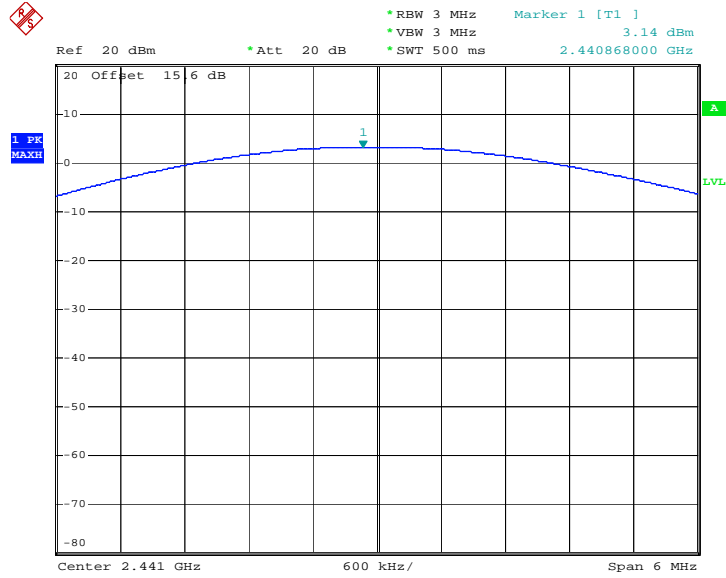

Date: 2.NOV.2012 22:35:43

Peak Output Power Plot on Channel 78

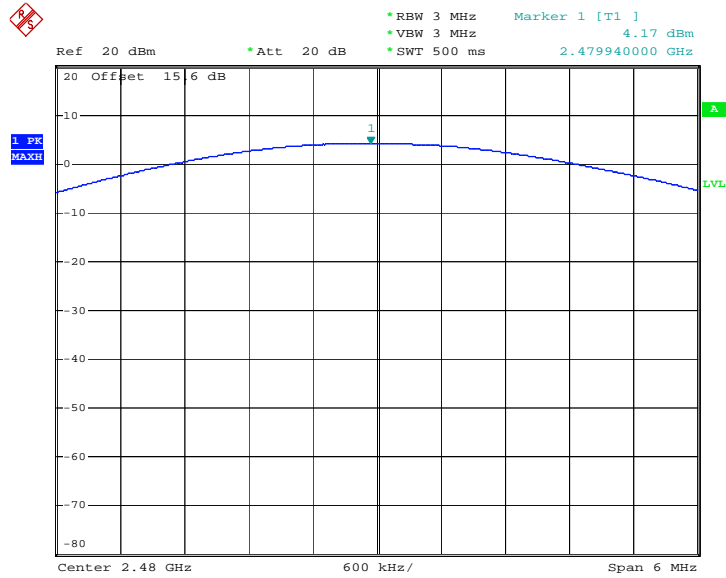

Date: 2.NOV.2012 22:36:58

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Record the results in the test report.

3.6.4 Test Setup

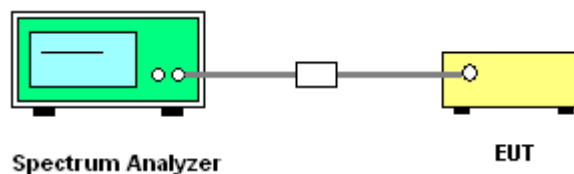




1.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Low Band Edge Plot on Channel 00

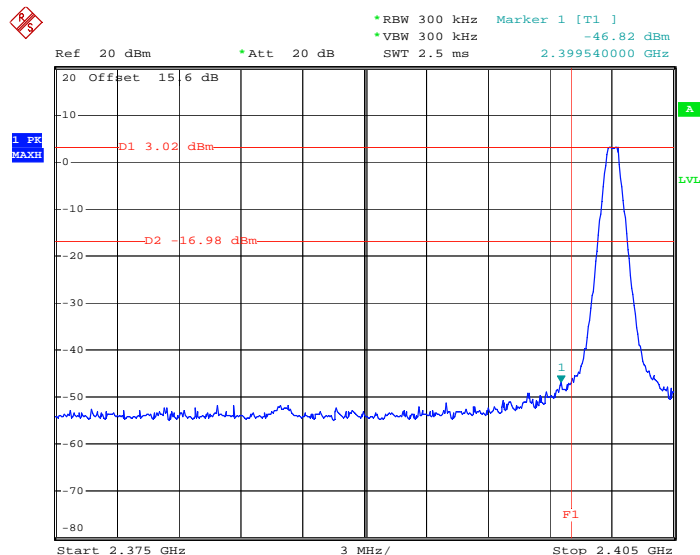

Date: 3.NOV.2012 15:07:00

High Band Edge Plot on Channel 78

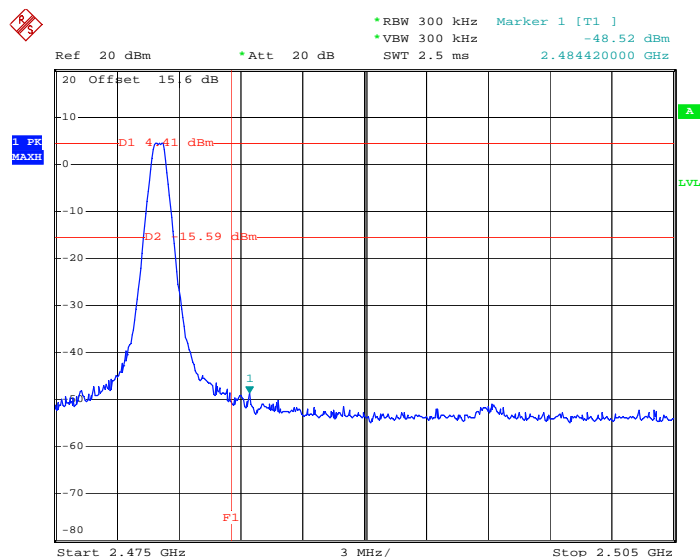


Date: 3.NOV.2012 15:08:03




Test Mode :	2Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Low Band Edge Plot on Channel 00

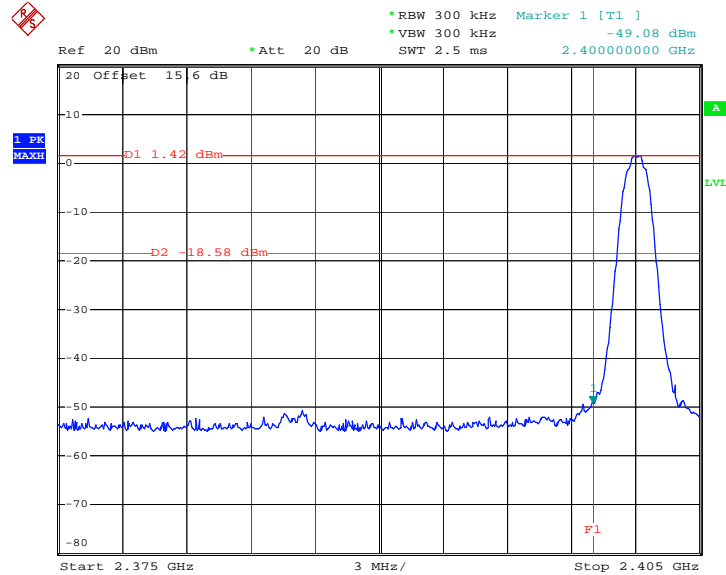

Date: 3.NOV.2012 15:08:55

High Band Edge Plot on Channel 78

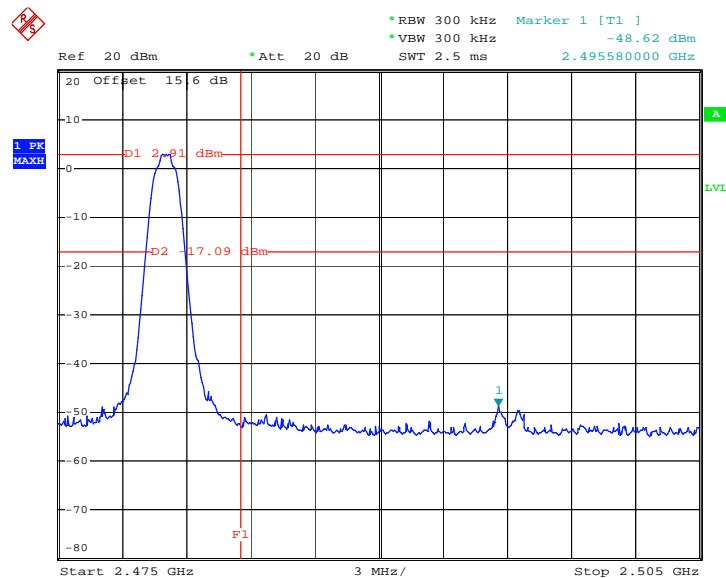


Date: 3.NOV.2012 15:09:58




Test Mode :	3Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Low Band Edge Plot on Channel 00

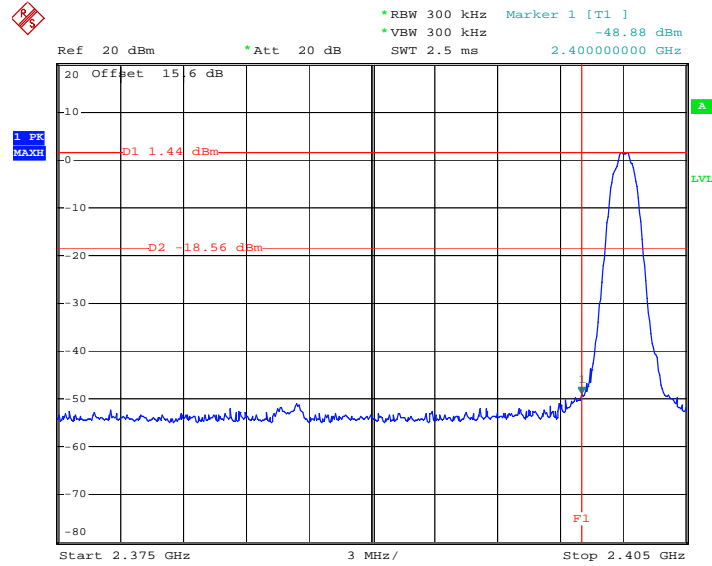

Date: 3.NOV.2012 15:10:50

High Band Edge Plot on Channel 78

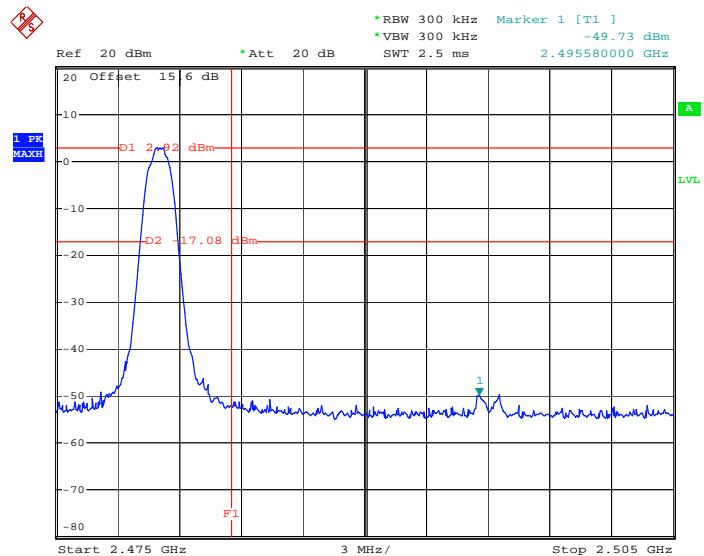


Date: 3.NOV.2012 15:11:52



1.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Hopping Mode Low Band Edge Plot

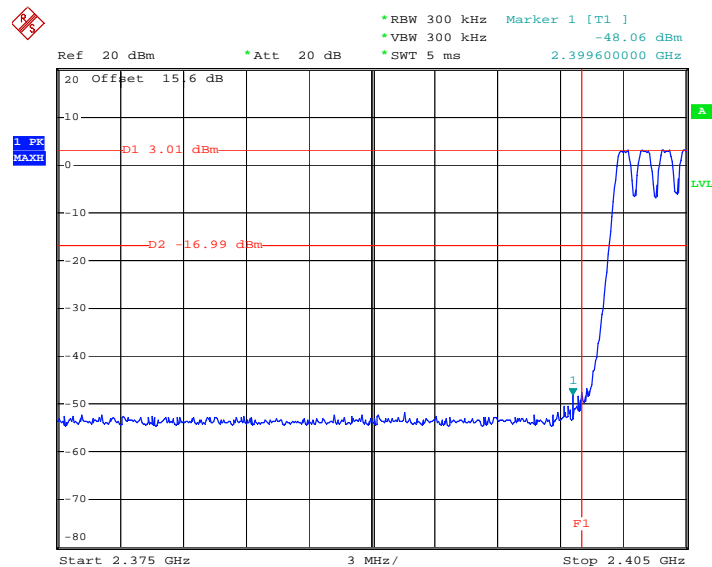

Date: 3.NOV.2012 15:40:07

Hopping Mode High Band Edge Plot

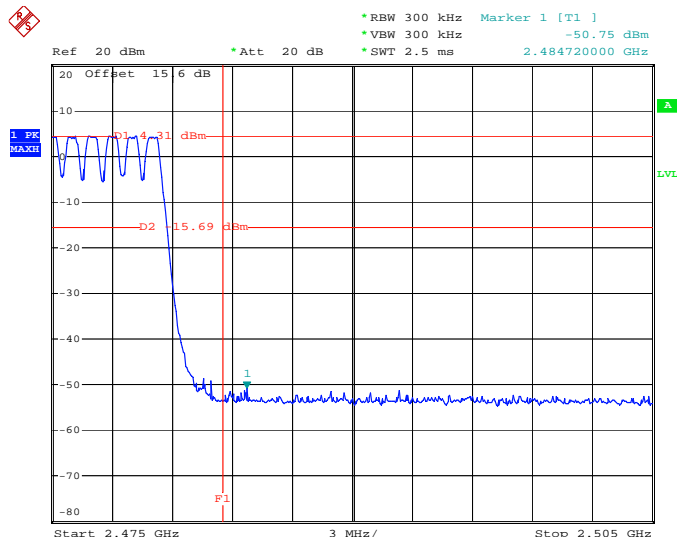


Date: 3.NOV.2012 15:42:37




Test Mode :	2Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Hopping Mode Low Band Edge Plot

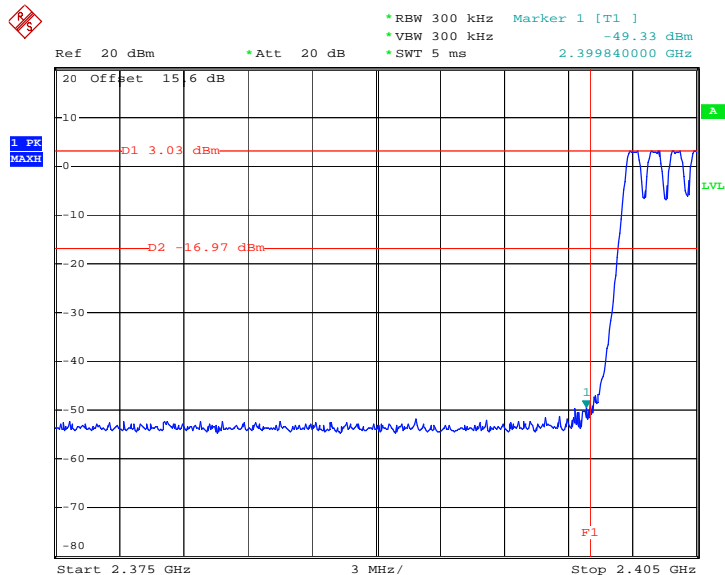

Date: 3.NOV.2012 15:44:24

Hopping Mode High Band Edge Plot

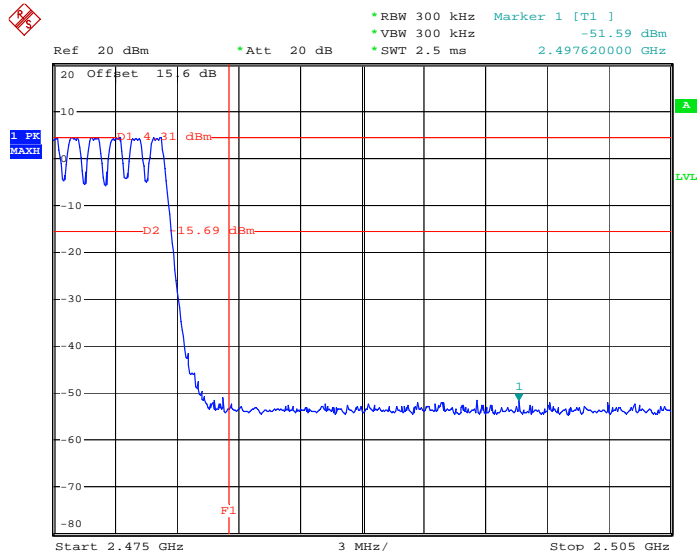


Date: 3.NOV.2012 15:46:22




Test Mode :	3Mbps	Temperature :	21~22°C
Test Channel :	00 and 78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Hopping Mode Low Band Edge Plot

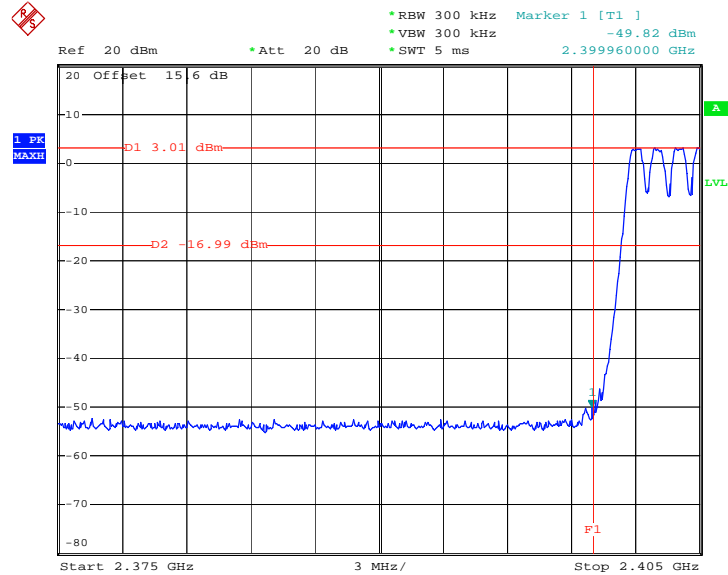

Date: 3.NOV.2012 15:49:13

Hopping Mode High Band Edge Plot

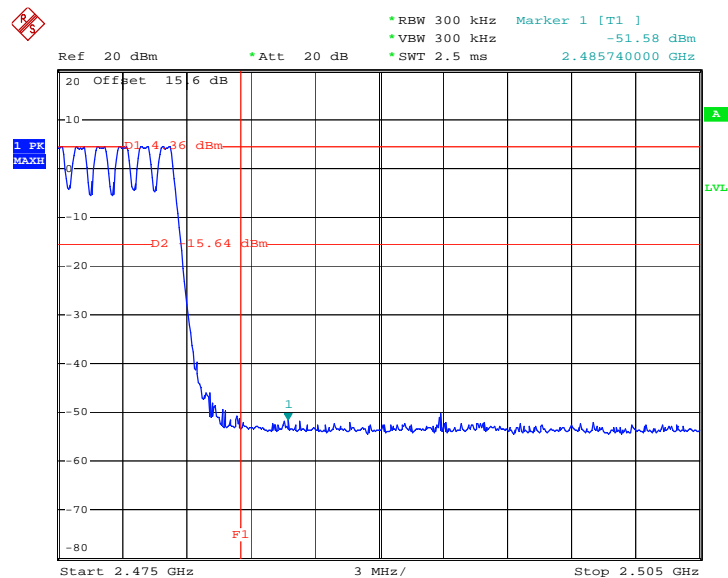

Date: 3.NOV.2012 15:51:44

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The transmitter output was connected to the spectrum analyzer via a low lose cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Record the results in the test report.


3.7.4 Test Setup

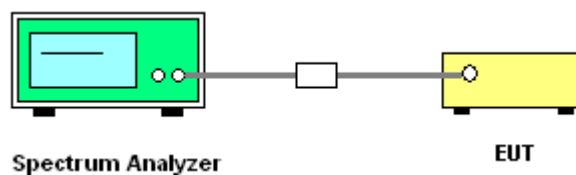

3.7.5 Test Result


Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

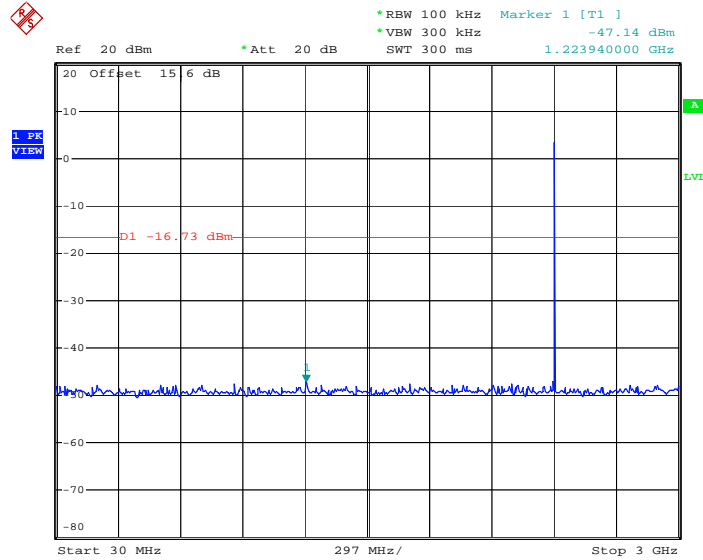

Date: 3.NOV.2012 15:18:12

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

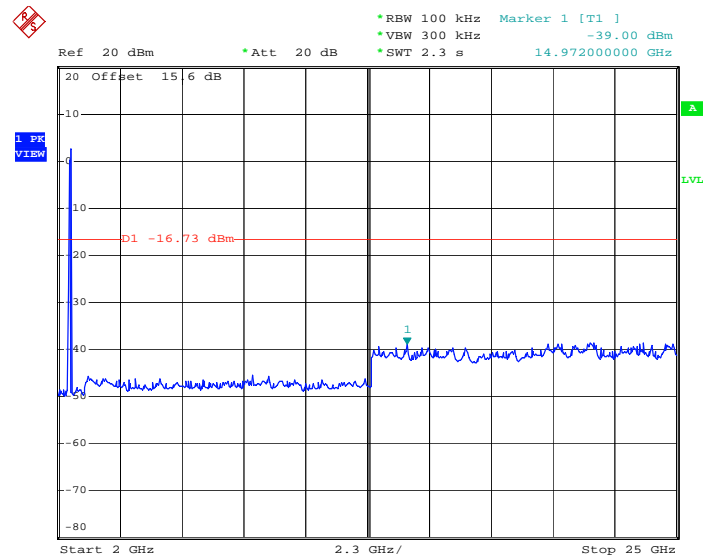


Date: 3.NOV.2012 15:33:46




Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

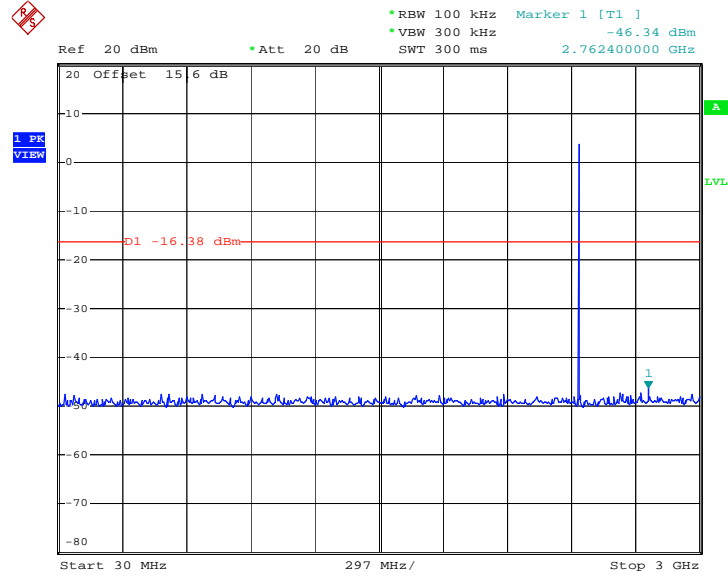

Date: 3.NOV.2012 15:19:16

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

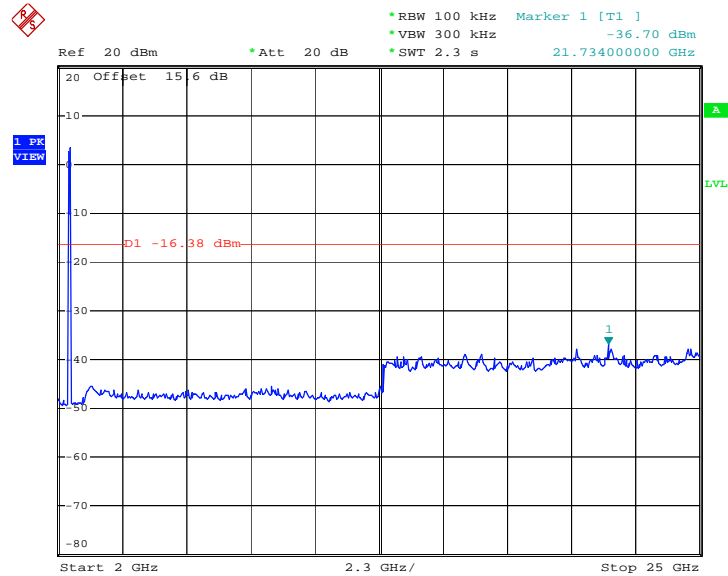


Date: 3.NOV.2012 15:35:05




Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

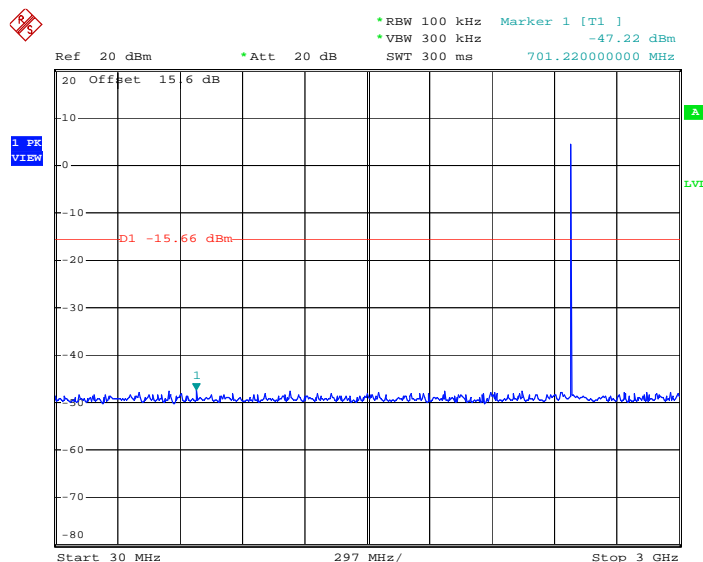

Date: 3.NOV.2012 15:20:20

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

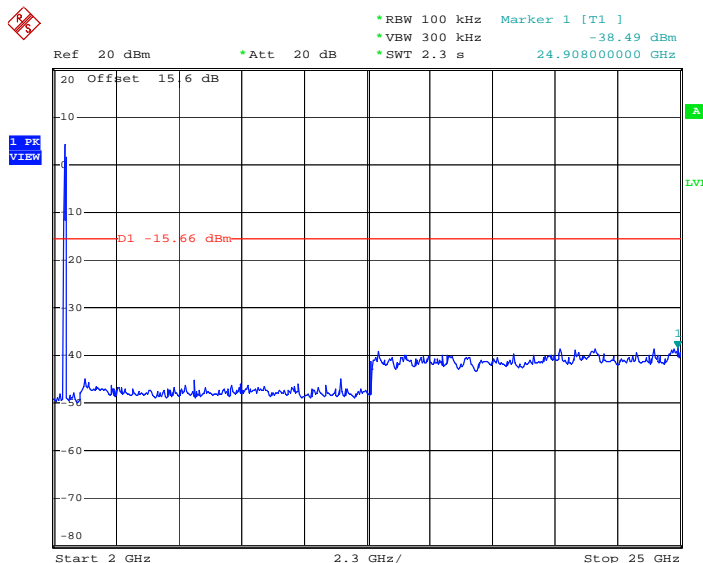

Date: 3.NOV.2012 15:36:35

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.



3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.5dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.


For example: Average level = $45.61\text{dBuV/m} - 24.5 \text{ (dB)} = 21.11\text{dBuV/m}$.

3.8.4 Test Setup


For radiated emissions below 30MHz

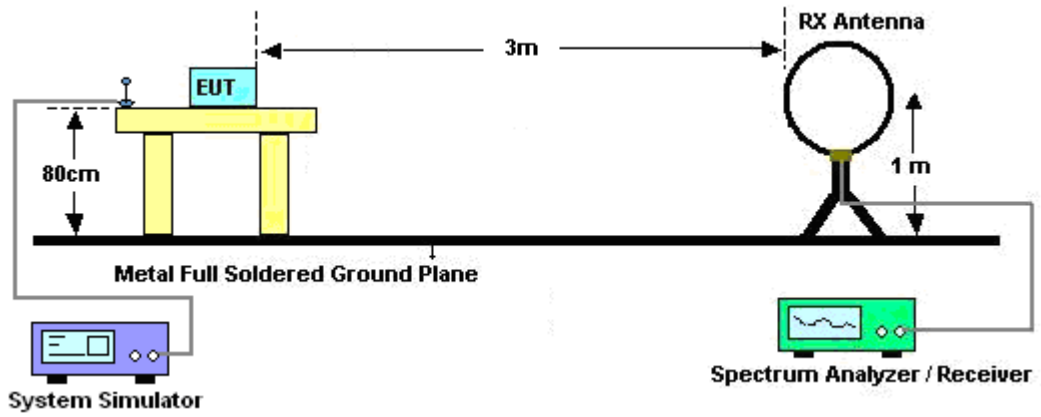

For radiated emissions from 30MHz to 1GHz

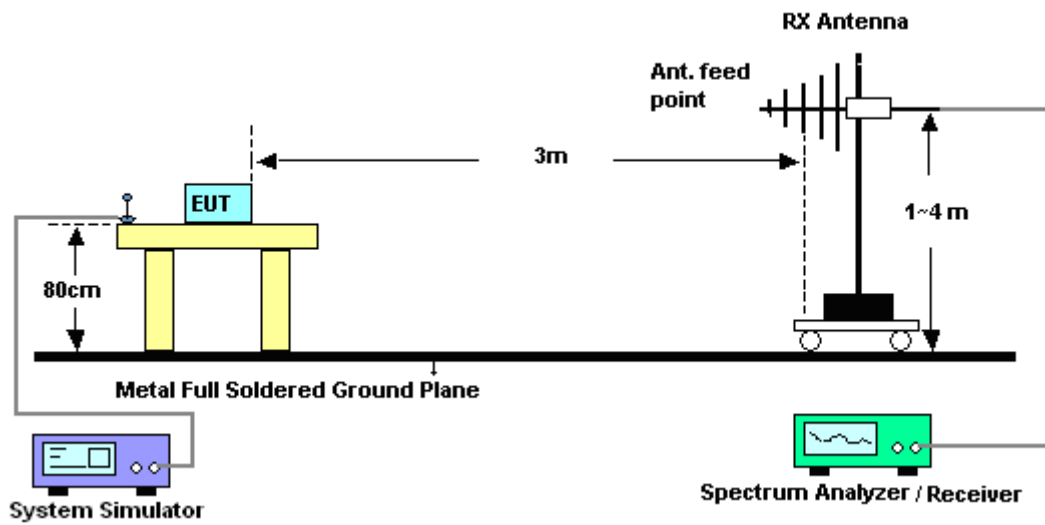

For radiated emissions above 1GHz

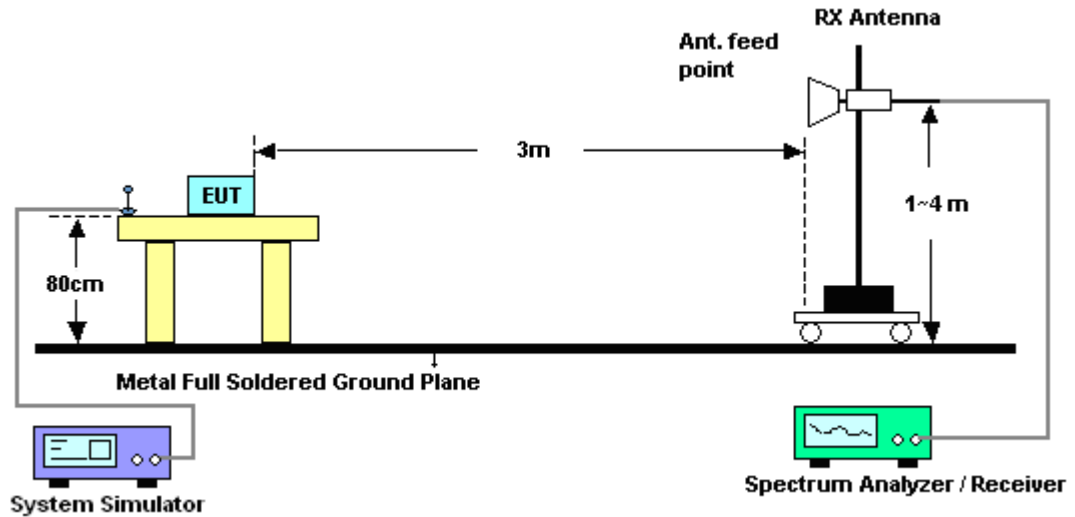


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

DH5 on time/100ms (One Pulse) Plot on Channel 39

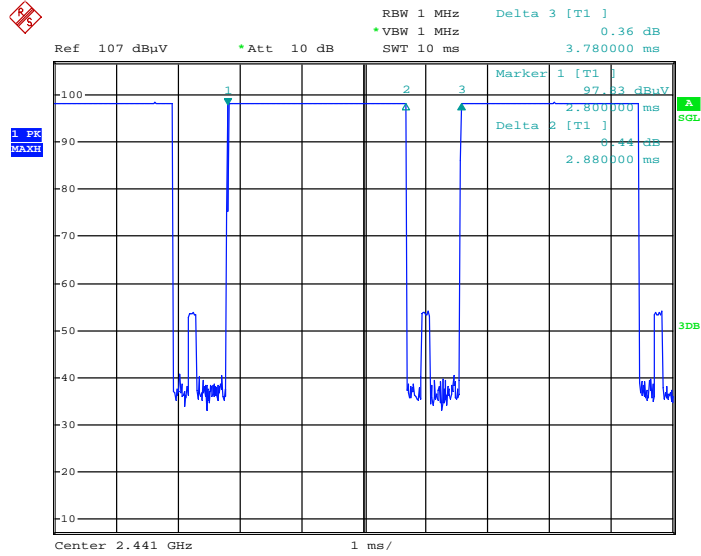

Date: 8.NOV.2012 13:59:46

DH5 on time/100ms (Count Pulses) Plot on Channel 39

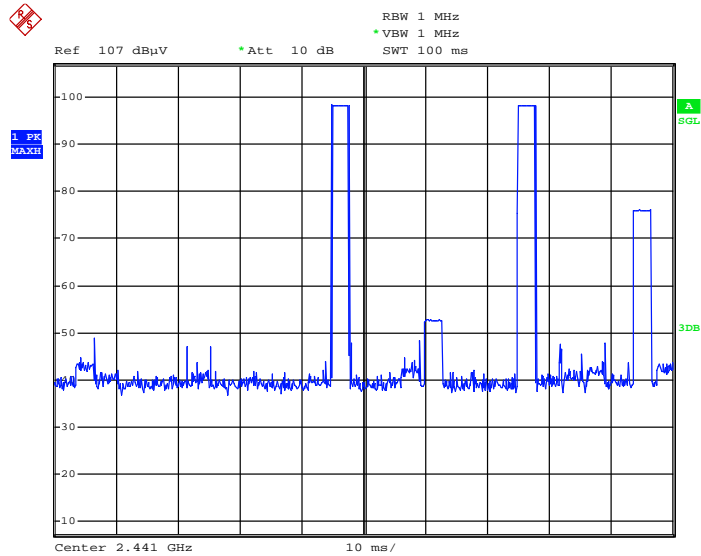

Date: 8.NOV.2012 14:01:43

Note:

1. Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle and is reported.



3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Steven Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2384.34	48.76	-25.24	74	45.35	32.83	2.09	31.51	100	0	Peak
2384.34	23.97	-30.03	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2377.5	47.63	-26.37	74	44.22	32.83	2.09	31.51	100	320	Peak
2377.5	22.84	-31.16	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 47.63dBuV/m -24.79 (dB) = 22.84dBuV/m.

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~44%
		Test Engineer :	Steven Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	59.01	-14.99	74	55.35	33.01	2.16	31.51	100	20	Peak
2483.5	34.22	-19.78	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	62.63	-11.37	74	58.97	33.01	2.16	31.51	100	200	Peak
2483.5	37.84	-16.16	54	-	-	-	-	-	-	Average



3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.637	19.9	-20.1	40	38.95	14.19	0.38	33.62	-	-	Peak
155.91	17.2	-26.3	43.5	40.28	9.76	0.74	33.58	-	-	Peak
281.008	21.13	-24.87	46	40.88	12.68	0.97	33.4	-	-	Peak
407.515	26.44	-19.56	46	42.55	16.03	1.16	33.3	-	-	Peak
449.556	27.58	-18.42	46	43.29	16.3	1.2	33.21	-	-	Peak
945.44	37	-9	46	46.98	20.71	1.75	32.44	100	321	Peak
2402	96.14	-	-	92.68	32.86	2.11	31.51	200	0	Peak
2402	71.35	-	-	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 96.14dBuV/m -24.79 (dB) = 71.35dBuV/m.

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.211	21.8	-18.2	40	39	16.04	0.35	33.59	-	-	Peak
47.826	19.84	-20.16	40	44.51	8.5	0.43	33.6	-	-	Peak
88.964	19.24	-24.26	43.5	43.7	8.61	0.55	33.62	-	-	Peak
129.015	20.86	-22.64	43.5	42.07	11.71	0.67	33.59	-	-	Peak
452.72	23.93	-22.07	46	39.58	16.34	1.21	33.2	-	-	Peak
945.44	38.76	-7.24	46	48.74	20.71	1.75	32.44	102	134	Peak
2402	98.67	-	-	95.21	32.86	2.11	31.51	110	210	Peak
2402	73.88	-	-	-	-	-	-	-	-	Average



Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.962	18.94	-21.06	40	34.89	17.29	0.34	33.58	-	-	Peak
44.12	17.18	-22.82	40	40.79	9.6	0.41	33.62	-	-	Peak
159.225	16.59	-26.91	43.5	39.79	9.64	0.74	33.58	-	-	Peak
277.094	21.28	-24.72	46	41.14	12.58	0.96	33.4	-	-	Peak
382.588	26.16	-19.84	46	42.83	15.53	1.13	33.33	-	-	Peak
945.44	38.44	-7.56	46	48.42	20.71	1.75	32.44	100	215	Peak
2441	99.7	-	-	96.12	32.95	2.14	31.51	200	0	Peak
2441	74.91	-	-	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.289	25.9	-14.1	40	41.85	17.29	0.34	33.58	-	-	Peak
44.275	23.26	-16.74	40	46.87	9.6	0.41	33.62	-	-	Peak
54.071	24.78	-15.22	40	51.41	6.49	0.46	33.58	-	-	Peak
85.898	28.2	-11.8	40	53.37	7.89	0.55	33.61	-	-	Peak
449.556	23.96	-22.04	46	39.67	16.3	1.2	33.21	-	-	Peak
945.44	38.86	-7.14	46	48.84	20.71	1.75	32.44	124	243	Peak
2441	101.8	-	-	98.22	32.95	2.14	31.51	100	150	Peak
2441	77.01	-	-	-	-	-	-	-	-	Average



Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.52	19.04	-20.96	40	36.24	16.04	0.35	33.59	-	-	Peak
44.12	17.28	-22.72	40	40.89	9.6	0.41	33.62	-	-	Peak
129.015	17.53	-25.97	43.5	38.74	11.71	0.67	33.59	-	-	Peak
282.985	21.1	-24.9	46	40.8	12.72	0.97	33.39	-	-	Peak
449.556	27.14	-18.86	46	42.85	16.3	1.2	33.21	-	-	Peak
945.44	38.17	-7.83	46	48.15	20.71	1.75	32.44	124	54	Peak
2480	101.66	-	-	98	33.01	2.16	31.51	100	20	Peak
2480	76.87	-	-	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	43~44%
Test Engineer :	Steven Hao	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.445	21.39	-18.61	40	39.07	15.56	0.36	33.6	-	-	Peak
47.826	19.92	-20.08	40	44.59	8.5	0.43	33.6	-	-	Peak
88.964	20.05	-23.45	43.5	44.51	8.61	0.55	33.62	-	-	Peak
129.015	20.84	-22.66	43.5	42.05	11.71	0.67	33.59	-	-	Peak
452.72	22.19	-23.81	46	37.84	16.34	1.21	33.2	-	-	Peak
945.44	38.3	-7.7	46	48.28	20.71	1.75	32.44	100	0	Peak
2480	103.18	-	-	99.52	33.01	2.16	31.51	100	200	Peak
2480	78.39	-	-	-	-	-	-	-	-	Average

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures

1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.9.4 Test Setup

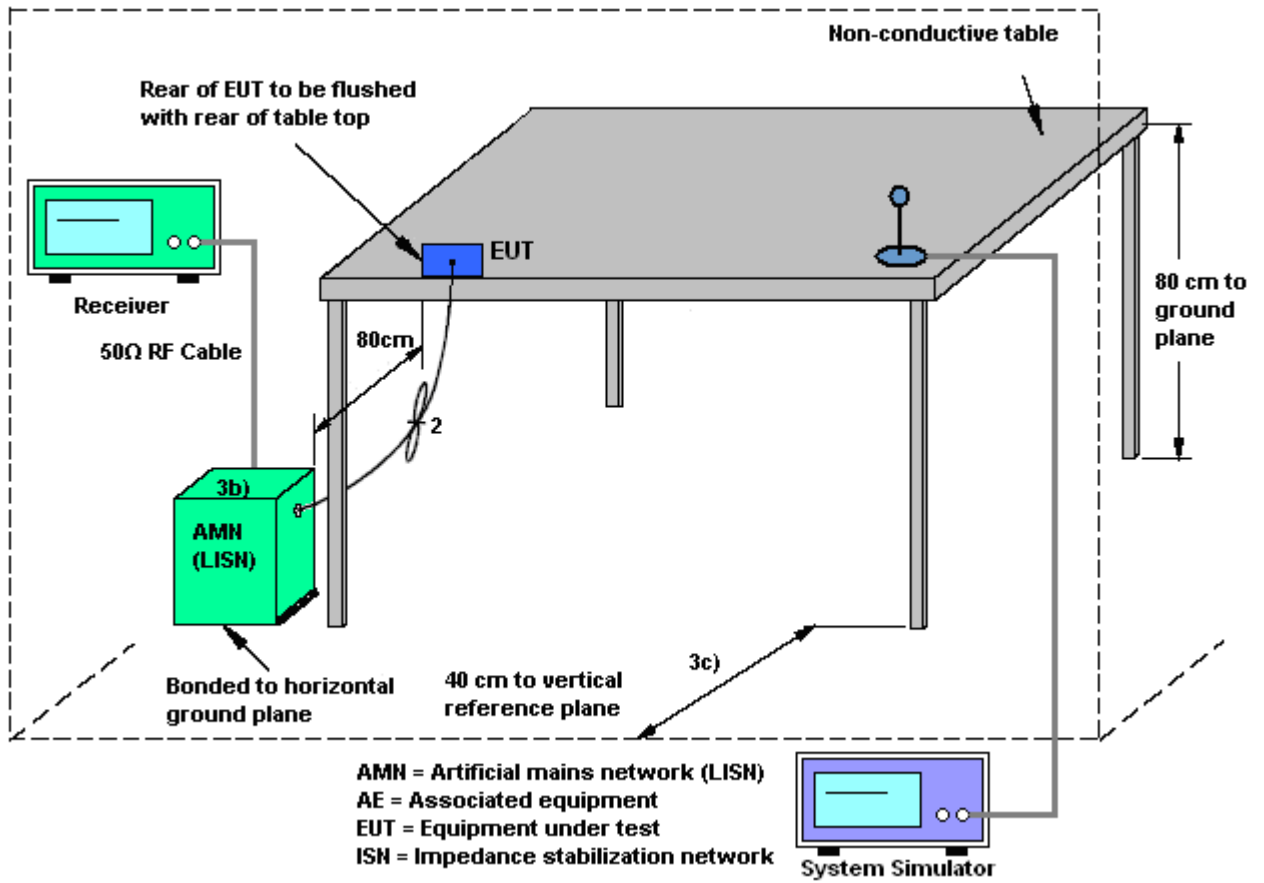



3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + Bluetooth Link + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

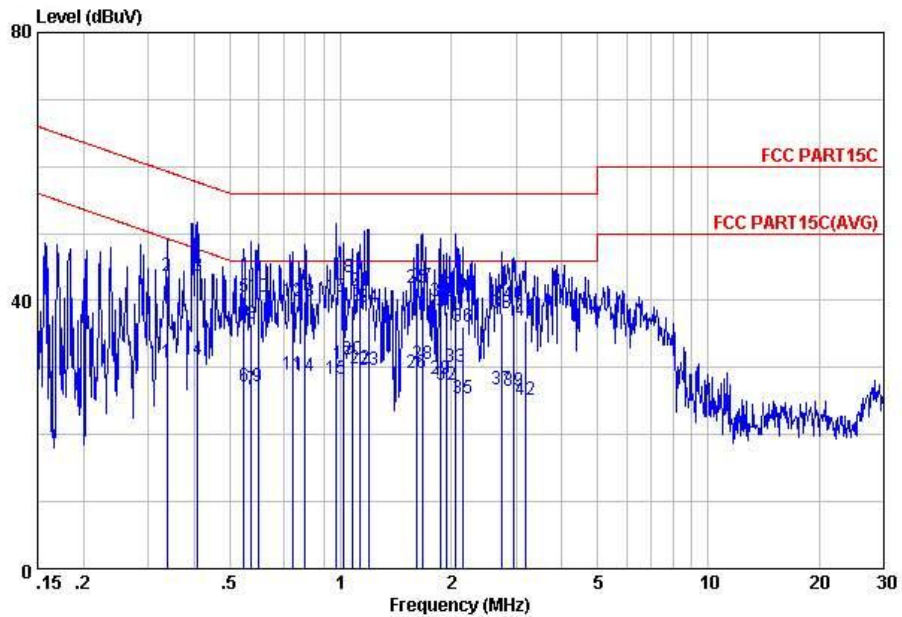

Site : C001-KS
 Condition: FCC CLASS-B LISN-111230 LINE
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.34	30.67	-18.60	49.27	20.50	-0.08	10.25	Average
2	0.34	43.77	-15.50	59.27	33.60	-0.08	10.25	QP
3	0.41	43.77	-13.91	57.68	33.60	-0.08	10.25	QP
4	0.41	31.27	-16.41	47.68	21.10	-0.08	10.25	Average
5	0.55	40.57	-15.43	56.00	30.39	-0.08	10.26	QP
6	0.55	27.27	-18.73	46.00	17.09	-0.08	10.26	Average
7	0.57	26.68	-19.32	46.00	16.50	-0.08	10.26	Average
8	0.57	36.48	-19.52	56.00	26.30	-0.08	10.26	QP
9	0.60	27.18	-18.82	46.00	17.01	-0.09	10.26	Average
10	0.60	40.48	-15.52	56.00	30.31	-0.09	10.26	QP
11	0.74	28.88	-17.12	46.00	18.70	-0.09	10.27	Average
12	0.74	39.88	-16.12	56.00	29.70	-0.09	10.27	QP
13	0.80	39.98	-16.02	56.00	29.79	-0.09	10.28	QP
14	0.80	28.68	-17.32	46.00	18.49	-0.09	10.28	Average
15	0.97	28.28	-17.72	46.00	18.10	-0.10	10.28	Average
16	0.97	40.48	-15.52	56.00	30.30	-0.10	10.28	QP
17	1.02	30.48	-15.52	46.00	20.30	-0.10	10.28	Average
18	1.02	43.38	-12.62	56.00	33.20	-0.10	10.28	QP
19	1.08	39.18	-16.82	56.00	29.00	-0.10	10.28	QP
20	1.08	31.18	-14.82	46.00	21.00	-0.10	10.28	Average
21	1.13	41.48	-14.52	56.00	31.30	-0.10	10.28	QP
22	1.13	29.78	-16.22	46.00	19.60	-0.10	10.28	Average
23	1.19	29.58	-16.42	46.00	19.40	-0.10	10.28	Average
24	1.19	38.98	-17.02	56.00	28.80	-0.10	10.28	QP
25	1.61	41.89	-14.11	56.00	31.70	-0.11	10.30	QP
26	1.61	29.19	-16.81	46.00	19.00	-0.11	10.30	Average
27	1.67	42.19	-13.81	56.00	32.00	-0.11	10.30	QP




Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + Bluetooth Link + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
28	1.67	30.49	-15.51	46.00	20.30	-0.11	10.30	Average
29	1.87	28.39	-17.61	46.00	18.20	-0.11	10.30	Average
30	1.87	39.79	-16.21	56.00	29.60	-0.11	10.30	QP
31	1.94	38.29	-17.71	56.00	28.10	-0.11	10.30	QP
32	1.94	27.49	-18.51	46.00	17.30	-0.11	10.30	Average
33	2.04	29.99	-16.01	46.00	19.80	-0.11	10.30	Average
34	2.04	40.79	-15.21	56.00	30.60	-0.11	10.30	QP
35	2.14	25.49	-20.51	46.00	15.30	-0.11	10.30	Average
36	2.14	36.19	-19.81	56.00	26.00	-0.11	10.30	QP
37	2.75	26.80	-19.20	46.00	16.61	-0.12	10.31	Average
38	2.75	38.20	-17.80	56.00	28.01	-0.12	10.31	QP
39	2.95	26.50	-19.50	46.00	16.30	-0.12	10.32	Average
40	2.95	39.40	-16.60	56.00	29.20	-0.12	10.32	QP
41	3.17	37.10	-18.90	56.00	26.90	-0.12	10.32	QP
42	3.17	25.10	-20.90	46.00	14.90	-0.12	10.32	Average



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN Link + Bluetooth Link + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

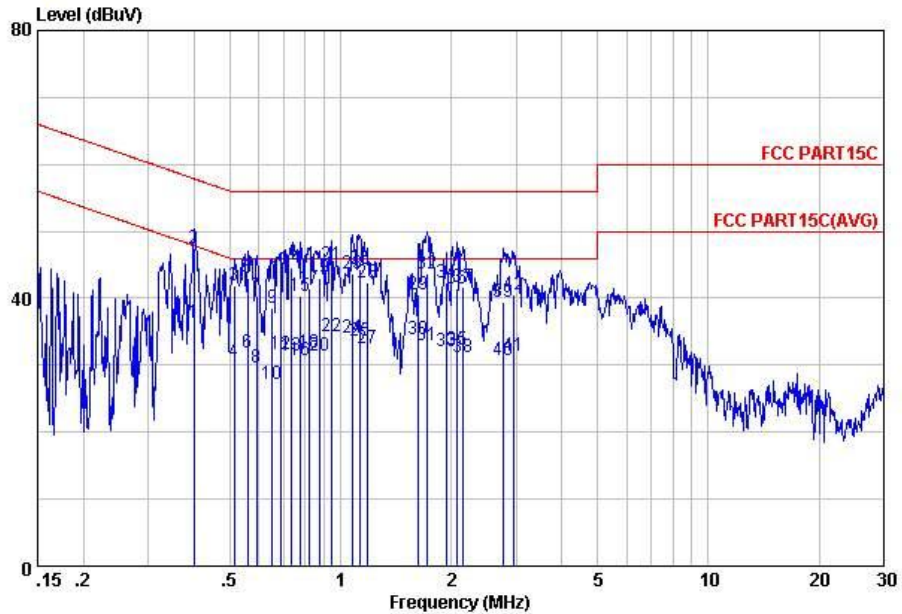

Site : C001-KS
 Condition: FCC CLASS-B LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.40	36.27	-11.59	47.86	26.10	-0.08	10.25	Average
2	0.40	47.37	-10.49	57.86	37.20	-0.08	10.25	QP
3	0.51	41.98	-14.02	56.00	31.80	-0.08	10.26	QP
4	0.51	30.48	-15.52	46.00	20.30	-0.08	10.26	Average
5	0.56	42.98	-13.02	56.00	32.80	-0.08	10.26	QP
6	0.56	31.78	-14.22	46.00	21.60	-0.08	10.26	Average
7	0.59	40.38	-15.62	56.00	30.20	-0.08	10.26	QP
8	0.59	29.68	-16.32	46.00	19.50	-0.08	10.26	Average
9	0.65	38.49	-17.51	56.00	28.30	-0.08	10.27	QP
10	0.65	27.19	-18.81	46.00	17.00	-0.08	10.27	Average
11	0.69	43.09	-12.91	56.00	32.90	-0.08	10.27	QP
12	0.69	31.59	-14.41	46.00	21.40	-0.08	10.27	Average
13	0.73	31.49	-14.51	46.00	21.30	-0.08	10.27	Average
14	0.73	44.59	-11.41	56.00	34.40	-0.08	10.27	QP
15	0.78	40.39	-15.61	56.00	30.20	-0.08	10.27	QP
16	0.78	30.79	-15.21	46.00	20.60	-0.08	10.27	Average
17	0.82	41.39	-14.61	56.00	31.19	-0.08	10.28	QP
18	0.82	31.79	-14.21	46.00	21.59	-0.08	10.28	Average
19	0.88	43.09	-12.91	56.00	32.90	-0.09	10.28	QP
20	0.88	31.39	-14.61	46.00	21.20	-0.09	10.28	Average
21	0.95	45.09	-10.91	56.00	34.90	-0.09	10.28	QP
22	0.95	34.29	-11.71	46.00	24.10	-0.09	10.28	Average
23	1.08	43.59	-12.41	56.00	33.40	-0.09	10.28	QP
24	1.08	34.09	-11.91	46.00	23.90	-0.09	10.28	Average
25	1.13	33.59	-12.41	46.00	23.40	-0.09	10.28	Average
26	1.13	44.29	-11.71	56.00	34.10	-0.09	10.28	QP
27	1.18	32.59	-13.41	46.00	22.40	-0.09	10.28	Average



Test Mode :	Mode 1	Temperature :	19~20°C																																																																																																																																																										
Test Engineer :	Tom Wang	Relative Humidity :	39~40%																																																																																																																																																										
Test Voltage :	120Vac / 60Hz	Phase :	Neutral																																																																																																																																																										
Function Type :	WLAN Link + Bluetooth Link + Adapter																																																																																																																																																												
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>28</td><td>1.18</td><td>42.39</td><td>-13.61</td><td>56.00</td><td>32.20</td><td>-0.09</td><td>10.28</td><td>QP</td></tr> <tr><td>29</td><td>1.63</td><td>40.49</td><td>-15.51</td><td>56.00</td><td>30.30</td><td>-0.11</td><td>10.30</td><td>QP</td></tr> <tr><td>30</td><td>1.63</td><td>33.89</td><td>-12.11</td><td>46.00</td><td>23.70</td><td>-0.11</td><td>10.30</td><td>Average</td></tr> <tr><td>31</td><td>1.73</td><td>32.89</td><td>-13.11</td><td>46.00</td><td>22.70</td><td>-0.11</td><td>10.30</td><td>Average</td></tr> <tr><td>32</td><td>1.73</td><td>43.59</td><td>-12.41</td><td>56.00</td><td>33.40</td><td>-0.11</td><td>10.30</td><td>QP</td></tr> <tr><td>33</td><td>1.94</td><td>32.09</td><td>-13.91</td><td>46.00</td><td>21.90</td><td>-0.11</td><td>10.30</td><td>Average</td></tr> <tr><td>34</td><td>1.94</td><td>42.39</td><td>-13.61</td><td>56.00</td><td>32.20</td><td>-0.11</td><td>10.30</td><td>QP</td></tr> <tr><td>35</td><td>2.08</td><td>32.39</td><td>-13.61</td><td>46.00</td><td>22.20</td><td>-0.11</td><td>10.30</td><td>Average</td></tr> <tr><td>36</td><td>2.08</td><td>41.49</td><td>-14.51</td><td>56.00</td><td>31.30</td><td>-0.11</td><td>10.30</td><td>QP</td></tr> <tr><td>37</td><td>2.16</td><td>41.59</td><td>-14.41</td><td>56.00</td><td>31.40</td><td>-0.11</td><td>10.30</td><td>QP</td></tr> <tr><td>38</td><td>2.16</td><td>31.09</td><td>-14.91</td><td>46.00</td><td>20.90</td><td>-0.11</td><td>10.30</td><td>Average</td></tr> <tr><td>39</td><td>2.78</td><td>39.40</td><td>-16.60</td><td>56.00</td><td>29.21</td><td>-0.12</td><td>10.31</td><td>QP</td></tr> <tr><td>40</td><td>2.78</td><td>30.80</td><td>-15.20</td><td>46.00</td><td>20.61</td><td>-0.12</td><td>10.31</td><td>Average</td></tr> <tr><td>41</td><td>2.96</td><td>31.50</td><td>-14.50</td><td>46.00</td><td>21.30</td><td>-0.12</td><td>10.32</td><td>Average</td></tr> <tr><td>42</td><td>2.96</td><td>40.50</td><td>-15.50</td><td>56.00</td><td>30.30</td><td>-0.12</td><td>10.32</td><td>QP</td></tr> </tbody> </table>		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		28	1.18	42.39	-13.61	56.00	32.20	-0.09	10.28	QP	29	1.63	40.49	-15.51	56.00	30.30	-0.11	10.30	QP	30	1.63	33.89	-12.11	46.00	23.70	-0.11	10.30	Average	31	1.73	32.89	-13.11	46.00	22.70	-0.11	10.30	Average	32	1.73	43.59	-12.41	56.00	33.40	-0.11	10.30	QP	33	1.94	32.09	-13.91	46.00	21.90	-0.11	10.30	Average	34	1.94	42.39	-13.61	56.00	32.20	-0.11	10.30	QP	35	2.08	32.39	-13.61	46.00	22.20	-0.11	10.30	Average	36	2.08	41.49	-14.51	56.00	31.30	-0.11	10.30	QP	37	2.16	41.59	-14.41	56.00	31.40	-0.11	10.30	QP	38	2.16	31.09	-14.91	46.00	20.90	-0.11	10.30	Average	39	2.78	39.40	-16.60	56.00	29.21	-0.12	10.31	QP	40	2.78	30.80	-15.20	46.00	20.61	-0.12	10.31	Average	41	2.96	31.50	-14.50	46.00	21.30	-0.12	10.32	Average	42	2.96	40.50	-15.50	56.00	30.30	-0.12	10.32	QP			
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																																																					
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																																																						
28	1.18	42.39	-13.61	56.00	32.20	-0.09	10.28	QP																																																																																																																																																					
29	1.63	40.49	-15.51	56.00	30.30	-0.11	10.30	QP																																																																																																																																																					
30	1.63	33.89	-12.11	46.00	23.70	-0.11	10.30	Average																																																																																																																																																					
31	1.73	32.89	-13.11	46.00	22.70	-0.11	10.30	Average																																																																																																																																																					
32	1.73	43.59	-12.41	56.00	33.40	-0.11	10.30	QP																																																																																																																																																					
33	1.94	32.09	-13.91	46.00	21.90	-0.11	10.30	Average																																																																																																																																																					
34	1.94	42.39	-13.61	56.00	32.20	-0.11	10.30	QP																																																																																																																																																					
35	2.08	32.39	-13.61	46.00	22.20	-0.11	10.30	Average																																																																																																																																																					
36	2.08	41.49	-14.51	56.00	31.30	-0.11	10.30	QP																																																																																																																																																					
37	2.16	41.59	-14.41	56.00	31.40	-0.11	10.30	QP																																																																																																																																																					
38	2.16	31.09	-14.91	46.00	20.90	-0.11	10.30	Average																																																																																																																																																					
39	2.78	39.40	-16.60	56.00	29.21	-0.12	10.31	QP																																																																																																																																																					
40	2.78	30.80	-15.20	46.00	20.61	-0.12	10.31	Average																																																																																																																																																					
41	2.96	31.50	-14.50	46.00	21.30	-0.12	10.32	Average																																																																																																																																																					
42	2.96	40.50	-15.50	56.00	30.30	-0.12	10.32	QP																																																																																																																																																					



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 02, 2012~ Nov. 15, 2012	Dec. 29, 2012	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Nov. 02, 2012~ Nov. 15, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-9605 02	N/A	Dec. 30, 2011	Nov. 02, 2012~ Nov. 15, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Nov. 02, 2012~ Nov. 15, 2012	Aug. 16, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Nov. 02, 2012~ Nov. 14, 2012	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 02, 2012~ Nov. 14, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Nov. 02, 2012~ Nov. 14, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Nov. 02, 2012~ Nov. 14, 2012	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Nov. 02, 2012~ Nov. 14, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Nov. 02, 2012~ Nov. 14, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Dec. 30, 2011	Nov. 02, 2012~ Nov. 14, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 06, 2012	Nov. 02, 2012~ Nov. 14, 2012	Nov. 05, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Oct. 10, 2012	Nov. 02, 2012~ Nov. 14, 2012	Oct. 09, 2013	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Nov. 02, 2012~ Nov. 14, 2012	Aug. 16, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Nov. 05, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Nov. 05, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Nov. 05, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	N/A	Nov. 16, 2011	Nov. 05, 2012	Nov. 15, 2012	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2O2604 as below.