

Variant FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Tablet PC IdeaTab A3000-H
BRAND NAME : lenovo
MODEL NAME : 60030, Z0A3
FCC ID : O57A3000H
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

This is a variant report which is only valid together with the original test report. The product was received on May 11, 2013 and completely tested on May 24, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Testing Site.....	7
1.6 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power.....	9
2.3 Test Mode.....	10
2.4 Connection Diagram of Test System.....	11
2.5 Support Unit used in test configuration and system	11
2.6 RF Utility	11
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 Output Power Measurement.....	13
3.2 Radiated Band Edges and Spurious Emission Measurement	16
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR322704-04C	Rev. 01	This is a variant report for 60030, Z0A3. The product equality declaration could be referred to Appendix C. All the test cases were performed on original report which can be referred to Sporton Report Number FR322704. Based on the original test report, only the Conducted Power and the worst case of Radiated Spurious Emissions were verified for the differences.	Jun. 13, 2013



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(b)	A8.4	Power Output Measurement	≤ 30dBm	Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	Under limit 3.4 dB at 2489.650 MHz
			Radiated Spurious Emission			



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.
No.68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

1.2 Manufacturer

Lenovo PC HK Limited
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC IdeaTab A3000-H
Brand Name	lenovo
Model Name	60030, Z0A3
FCC ID	O57A3000H
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/ HSPA+/DC-HSDPA/ WLAN 11bgn / Bluetooth / Bluetooth v4.0-LE
HW Version	LepadA3000-H
SW Version	A3000_130125
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 17.15 dBm (0.0519 W) 802.11g : 19.02 dBm (0.0798 W) 802.11n HT20 : 20.30 dBm (0.1072 W)
Antenna Type	Fixed Internal Antenna with gain 3.10 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH01-KS	149928/4086E-1

The test site complies with ANSI C63.4 2003 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.98	16.90	16.88	16.95
CH 06	2437 MHz	17.15	17.08	17.12	17.09
CH 11	2462 MHz	17.08	17.06	17.03	16.99

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	18.78	18.75	18.68	18.48	18.58	18.67	18.65	18.82
CH 06	2437 MHz	18.76	18.75	18.79	18.85	18.72	18.60	18.61	19.02
CH 11	2462 MHz	18.26	18.56	18.66	18.48	18.52	18.39	18.45	18.69

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	20.25	20.29	20.16	20.08	20.10	20.05	19.98	19.86
CH 06	2437 MHz	20.30	20.22	20.18	20.10	20.08	19.98	19.96	20.07
CH 11	2462 MHz	20.19	20.06	19.98	19.95	19.88	19.87	19.75	19.60




2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	54 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	11
		802.11g	54Mbps	11
		802.11n HT20	6.5 Mbps	11
	Radiated Spurious Emission	802.11b	1 Mbps	11
		802.11g	54Mbps	11
		802.11n HT20	6.5 Mbps	11

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

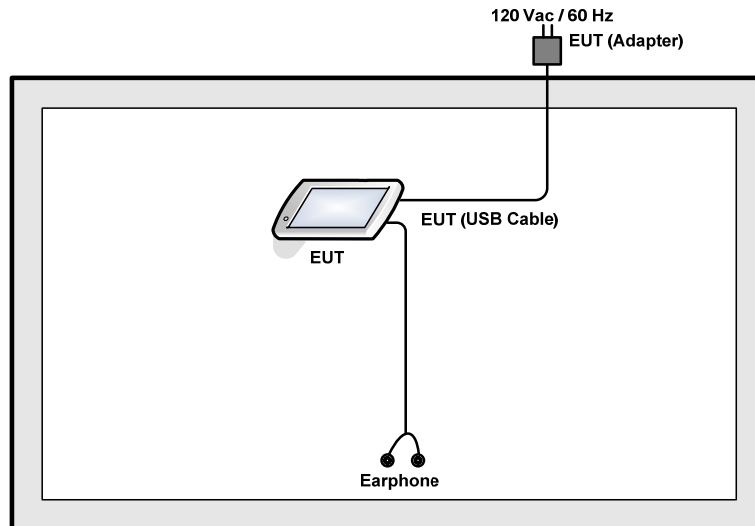

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.6 RF Utility

For WLAN function, key in “* # * # 3646633 # * # *” on the EUT directly. Then, the EUT will get into the engineering modes to contact with WLAN AP for continuous transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

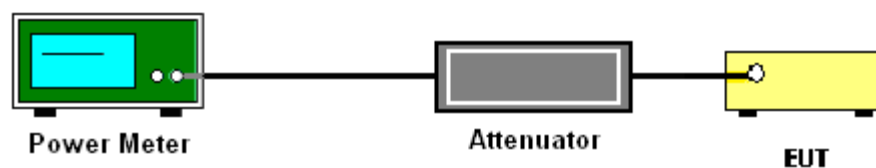



3.1.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	17.38	30	Pass
06	2437	17.76	30	Pass
11	2462	17.55	30	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.81	30	Pass
06	2437	19.92	30	Pass
11	2462	19.89	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	41~42%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.05	30	Pass
06	2437	21.33	30	Pass
11	2462	21.57	30	Pass



3.1.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	94.38%	Duty Factor:	0.25dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	14.15
06	2437	14.38
11	2462	14.04

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	92.05%	Duty Factor:	0.36dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	10.15
06	2437	10.48
11	2462	10.14

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	91.50%	Duty Factor:	0.39dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	10.42
06	2437	10.54
11	2462	10.52



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.



3.2.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
 For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
802.11b	98.59	-	-	10Hz
802.11g	61.54	0.176	5.682	10KHz
2.4G 802.11n HT20	91.50	1.292	0.774	1KHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.2.4 Test Setup


For radiated emissions below 30MHz

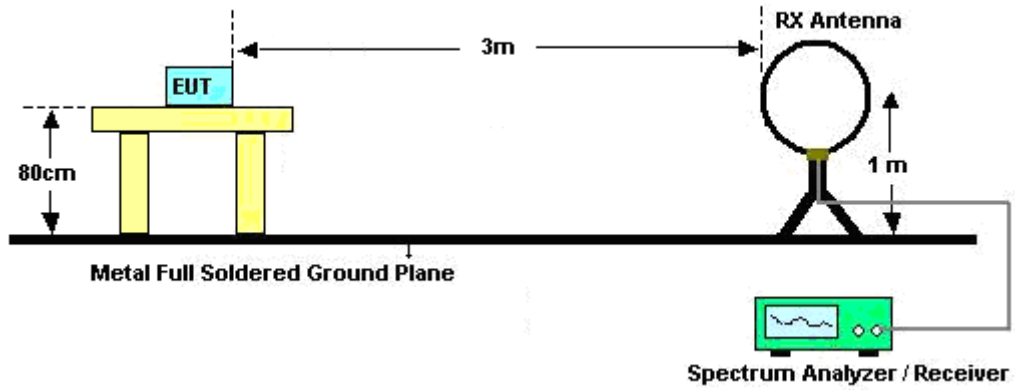

For radiated emissions from 30MHz to 1GHz

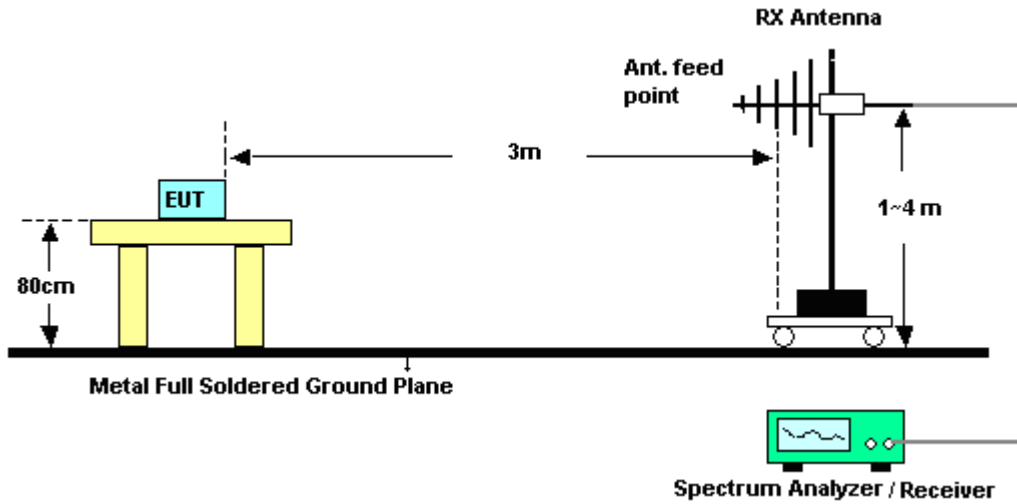

For radiated emissions above 1GHz

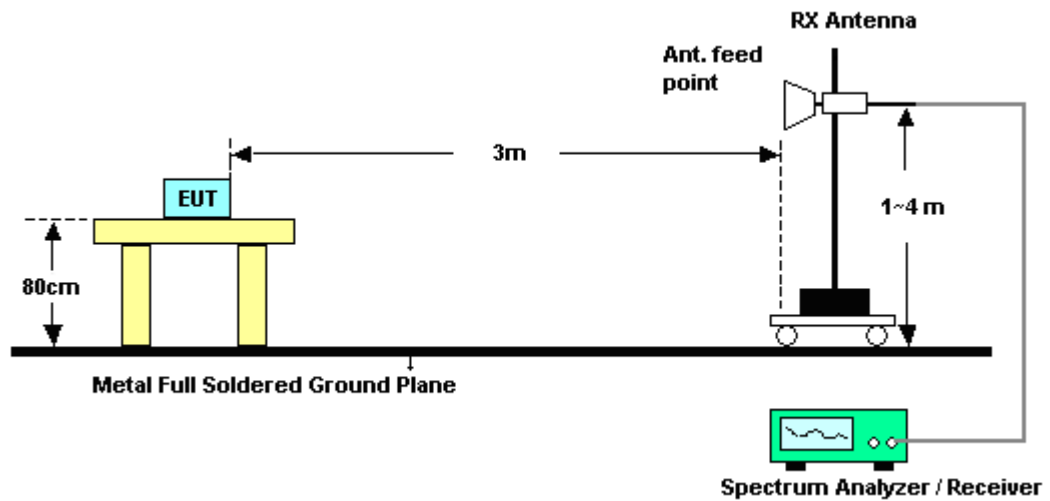

3.2.5 Test Results of Radiated Spurious Emission (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.2.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.71	57.74	-16.26	74	53.28	33.01	2.96	31.51	119	126	Peak
2483.5	48.79	-5.21	54	44.33	33.01	2.96	31.51	119	126	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.8	55.87	-18.13	74	51.41	33.01	2.96	31.51	100	92	Peak
2483.5	47	-7	54	42.54	33.01	2.96	31.51	100	92	Average

Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	59.16	-14.84	74	54.7	33.01	2.96	31.51	100	171	Peak
2483.5	45.35	-8.65	54	40.89	33.01	2.96	31.51	100	171	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.62	58.36	-15.64	74	53.9	33.01	2.96	31.51	100	114	Peak
2483.5	42.53	-11.47	54	38.07	33.01	2.96	31.51	100	114	Average



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2489.65	70.6	-3.4	74	66.1	33.05	2.96	31.51	100	174	Peak
2483.5	47.16	-6.84	54	42.7	33.01	2.96	31.51	100	174	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.13	66.43	-7.57	74	61.97	33.01	2.96	31.51	100	113	Peak
2483.5	44.56	-9.44	54	40.1	33.01	2.96	31.51	100	113	Average



3.2.7 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Note: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.98	-	-	104.57	32.98	2.94	31.51	121	124	Peak
2462	103.41	-	-	99	32.98	2.94	31.51	121	124	Average
4924	48.63	-25.37	74	40.67	35.19	4.28	31.51	110	101	Peak
7386	50.22	-23.78	74	39.4	36.24	5.51	30.93	100	245	Peak

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.52	-	-	103.11	32.98	2.94	31.51	124	95	Peak
2462	102.07	-	-	97.66	32.98	2.94	31.51	124	95	Average
4924	48.35	-25.65	74	40.39	35.19	4.28	31.51	124	97	Peak
7386	50.27	-23.73	74	39.45	36.24	5.51	30.93	100	231	Peak



Test Mode :	802.11g	Temperature :	
Test Channel :	11	Relative Humidity :	
Test Engineer :	Stone Gu	Polarization :	23~24°C
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.48	-	-	103.07	32.98	2.94	31.51	135	237	Peak
2462	96.72	-	-	92.31	32.98	2.94	31.51	135	237	Average
4924	48.36	-25.64	74	40.4	35.19	4.28	31.51	100	125	Peak
7386	50.89	-23.11	74	39.07	36.24	5.51	30.93	110	124	Peak

Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.74	-	-	103.33	32.98	2.94	31.51	100	274	Peak
2462	97.08	-	-	92.67	32.98	2.94	31.51	100	274	Average
4924	49.4	-24.6	74	41.44	35.19	4.28	31.51	100	167	Peak
7386	50.79	-23.21	74	39.97	36.24	5.51	30.93	100	129	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
101.78	20.16	-23.34	43.5	42.45	10.74	0.58	33.61	-	-	Peak
165.8	30.3	-13.2	43.5	53.76	9.36	0.75	33.57	150	264	Peak
250.19	29.44	-16.56	46	49.96	12	0.92	33.44	-	-	Peak
309.36	30.68	-15.32	46	49.82	13.22	1.01	33.37	-	-	Peak
356.89	31.41	-14.59	46	49.02	14.65	1.1	33.36	-	-	Peak
663.41	22.81	-23.19	46	35.28	18.99	1.47	32.93	-	-	Peak
2462	105.81	-	-	101.4	32.98	2.94	31.51	111	197	Peak
2462	94.51	-	-	90.1	32.98	2.94	31.51	111	197	Average
4924	48.81	-25.19	74	40.85	35.19	4.28	31.51	100	125	Peak
7386	50.96	-23.04	74	40.14	36.24	5.51	30.93	100	264	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.97	20.39	-19.61	40	36.34	17.29	0.34	33.58	100	96	Peak
100.81	20.87	-22.63	43.5	43.28	10.62	0.58	33.61	-	-	Peak
165.8	18.56	-24.94	43.5	42.02	9.36	0.75	33.57	-	-	Peak
326.82	20.61	-25.39	46	39.09	13.84	1.05	33.37	-	-	Peak
362.71	24.01	-21.99	46	41.45	14.8	1.11	33.35	-	-	Peak
561.56	26.38	-19.62	46	39.52	18.52	1.34	33	-	-	Peak
2462	106.88	-	-	102.47	32.98	2.94	31.51	100	274	Peak
2462	95.64	-	-	91.23	32.98	2.94	31.51	100	274	Average
4924	48.85	-25.15	74	40.89	35.19	4.28	31.51	100	126	Peak
7386	50.99	-23.01	74	40.17	36.24	5.51	30.93	100	261	Peak



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	May 24, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	May 24, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	May 24, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	May 24, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	May 24, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	May 21, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	May 21, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	May 21, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
HFH2-Z2 Loop Antenna	R&S	HFH2-Z2	100321	9KHZ-30MHZ	Oct. 22, 2012	May 21, 2013	Oct. 21, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	May 21, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	May 21, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	May 21, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	May 21, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	May 21, 2013	Nov. 22, 2013	Radiation (03CH01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP322704-04 as below.



Appendix C. Product Equality Declaration

Lenovo (Shanghai) Electronics Technology Co., Ltd.

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

Tel: 86-21-50807240-8237 ; Fax: 86-21-50807240-8237

Product Equality Declaration

We, Lenovo (Shanghai) Electronics Technology Co., Ltd., declare on our sole responsibility for the product of 60030, Z0A3 as below:


The differences between **60030, Z0A3** and previous is as below, the main difference are EMCC Card/LCD panel and touch panel have different supplier.

	Original (Report Number: 322704)		Variant (Report Number: 322704-04)
	1st source	2nd source	3th source
EMMC	Trade name: Samsung Model name: KMK2U000VM-B604 KMK3U000VM-B410 KMKUS000VM-B410 KMKJS000VM-B309	Trade name: Hynix Model name: H9TP32A8JDMCPR-KGM	Trade name: Hynix Model name: H9TP17A8JDACNR-KGM
LCD panel	Trade name: BOE Model name: BP070WS1-200	Trade name: CMI Model name: HJ070IA-01I	Trade name: Bitland Model name: BT070TN03
Touch Panel	Trade name: Ofilm Model name: MCF-070-0834	Trade name: Ofilm Model name: MCF-070-0834	Trade name: AVC Model name: NTP070CM352002

Except listings above, the others are all the same.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,



Contact Person: Spring Zhou

Company: Lenovo (Shanghai) Electronics Technology Co., Ltd.

TEL: 86-21-50807240-8237

FAX: 86-21-50807240-8237

E-mail: zhoucb1@lenovo.com