


# FCC Radio Test Report

**FCC ID: O57C640MT7921**

**Project No.** : 2007T046C  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Test Model** : Yoga 6 13ARE05  
**Series Model** : Yoga 6 13ARE05\*\*\*\*\*, Yoga 6 13ALC6, Yoga 6 13ALC6\*\*\*\* (\*=0~9, A~z, “\_” or blank)  
**Applicant** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**Address** : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone  
**Manufacturer** : Lenovo PC HK Limited  
**Address** : 23/F, Lincoln House, Taikoo Place 979 King’s Road, Quarry Bay, Hong Kong, P.R.China  
**Date of Receipt** : Jun. 07, 2021  
**Date of Test** : Jun. 07, 2021 ~ Jun. 24, 2021  
**Issued Date** : Jul. 06, 2021  
**Report Version** : R00  
**Standard(s)** : FCC Part15, Subpart E(15.407)  
ANSI C63.10-2013  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Welly Zhou



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: [www.newbtl.com](http://www.newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REVISION HISTORY</b>	<b>5</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	9
<b>2 . GENERAL INFORMATION</b>	<b>11</b>
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 TEST MODES	14
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
2.4 SUPPORT UNITS	15
<b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>16</b>
3.1 LIMIT	16
3.2 TEST PROCEDURE	16
3.3 DEVIATION FROM TEST STANDARD	16
3.4 TEST SETUP	17
3.5 EUT OPERATION CONDITIONS	17
3.6 TEST RESULTS	17
<b>4 . RADIATED EMISSIONS TEST</b>	<b>18</b>
4.1 LIMIT	18
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS - BELOW 30 MHZ	22
4.7 TEST RESULTS - 30 MHz TO 1000 MHz	22
4.8 TEST RESULTS - ABOVE 1000 MHz	22
<b>5 . OUTPUT POWER TEST</b>	<b>23</b>
5.1 Limit	23
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM TEST STANDARD	23
5.4 TEST SETUP	23
5.5 EUT OPERATING CONDITIONS	23

<b>Table of Contents</b>	<b>Page</b>
5.6 TEST RESULTS	23
6 . MEASUREMENT INSTRUMENTS LIST	24
7 . EUT TEST PHOTOS	26
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ	34
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	37
APPENDIX D - OUTPUT POWER	228

**REVISION HISTORY**

Report No.	Version	Description	Issued Date
BTL-FCCP-4-2007T046	R00	Original Report.	Aug. 28, 2020
BTL-FCCP-4-2007T046	R01	Revise Typo.	Sep. 07, 2020
BTL-FCCP-4-2007T046A	R00	1. Added Series models. 2. Added CPU. 3. Added a new appearance without cover. 4. Changed adapter.	Mar. 23, 2021
BTL-FCCP-4-2007T046B	R00	1. Added Realtek / RTL8852AE module card. 2. Added adapter * 2.	May 12, 2021
BTL-FCCP-4-2007T046C	R00	Added MediaTek / MT7921 module card.	Jul. 06, 2021

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.407(a)	Bandwidth	NOTE (3)	Pass	-----
15.407(a)	Output Power	APPENDIX D	Pass	-----
15.407(a)	Power Spectral Density	NOTE (3)	Pass	-----
15.407(c)	Automatically Discontinue Transmission	NOTE (3)	Pass	-----
15.407(h)	Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).	NOTE (3)	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) This is to request a Class II permissive change for FCC ID: O57C640MT7921.
- (3) This item is demonstrated to full compliance referring to the test report number as below table of the integrated module (model name: MT7921, FCC ID: RAS-MT7921), according to KDB 996369 D02 Q1 a) 2).

RF Module model	Report Number	Module Function
MT7921	RF200317E01	WLAN 2.4G
MT7921	RF200317E01-1, RF200317E01-4, RF200317E01-5	RLAN 5G Band 1~4
MT7921	RF200317E01-2	Bluetooth EDR
MT7921	RF200317E01-3	Bluetooth LE

- (4) The ac power lines conducted emissions and radiated emissions are tested to demonstrate full compliance of both module integrated into the host and host itself.
- (5) The output power of integrated module have been reduced, therefore, the full output power tests are performed and recorded.

(6) Based on the RF module the antennas for this Notebook Computer were updated as below table:

Antenna Information				
Antenna 1 (WLAN combo)	Manufacturer	AWAN		
	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna	
	Part number	AUF6Y-100025 (DC33002GC00)	AUF6Y-100026 (DC33002GC10)	
	Peak gain	Main Antenna :	Aux Antenna :	
		WLAN(2.4G):1.14dBi	WLAN(2.4G):-1.53dBi	
		WLAN(5G B1-3):-1.73dBi WLAN(5G B4):-2.83dBi	WLAN(5G B1-3):-2.43dBi WLAN(5G B4):-1.54dBi	

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
 BTL's Test Firm Registration Number for FCC: 357015  
 BTL's Designation Number for FCC: CN1240

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))  
 The BTL measurement uncertainty as below table:

#### A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

#### B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	57%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	23°C	52%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	23°C	52%	AC 120V/60Hz	Kwok Guo
Output Power	25.8°C	54%	AC 120V/60Hz	Kwok Guo



**1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING**

Antenna Mode	MINO			
Test Software	MT7961 QA 0.0.2.39			
UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	10	12.5	14.5	6 Mbps
IEEE 802.11n (HT20)	12.5	14	16	MCS 0
IEEE 802.11ac (VHT20)	12.5	14	16	MCS 0
IEEE 802.11ax (HEW20)	12.5	14	15.5	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	13	15		MCS 0
IEEE 802.11ac (VHT40)	13	15		MCS 0
IEEE 802.11ax (HEW40)	13	15.5		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	13			MCS 0
IEEE 802.11ax (HEW80)	13			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	14.5	14.5	11	6 Mbps
IEEE 802.11n (HT20)	16	14.5	12	MCS 0
IEEE 802.11ac (VHT20)	16	14.5	12	MCS 0
IEEE 802.11ax (HEW20)	15.5	15	12.5	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	15	13		MCS 0
IEEE 802.11ac (VHT40)	15	13		MCS 0
IEEE 802.11ax (HEW40)	16	13		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	13			MCS 0
IEEE 802.11ax (HEW80)	13			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	12.5	14.5	13	13	6 Mbps
IEEE 802.11n (HT20)	13.5	15.5	14.5	14.5	MCS 0
IEEE 802.11ac (VHT20)	13.5	15.5	14.5	14.5	MCS 0
IEEE 802.11ax (HEW20)	14	15.5	14.5	14.5	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	15.5	16	15	15	MCS 0
IEEE 802.11ac (VHT40)	15.5	16	15	15	MCS 0
IEEE 802.11ax (HEW40)	14.5	16.5	15	15.5	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	11.5	12	11.5		MCS 0
IEEE 802.11ax (HEW80)	14.5	15	15		MCS 0

UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	15	14.5	16	6 Mbps
IEEE 802.11n (HT20)	15.5	15.5	15.5	MCS 0
IEEE 802.11ac (VHT20)	15.5	15.5	15.5	MCS 0
IEEE 802.11ax (HEW20)	15.5	15.5	16.5	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	15.5	15		MCS 0
IEEE 802.11ac (VHT40)	15.5	15		MCS 0
IEEE 802.11ax (HEW40)	15.5	15		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	12.5			MCS 0
IEEE 802.11ax (HEW80)	15			MCS 0

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook Computer
Brand Name	Lenovo
Test Model	Yoga 6 13ARE05
Series Model	Yoga 6 13ARE05*****, Yoga 6 13ALC6, Yoga 6 13ALC6*****( *=0~9, A~z, “ ” or blank)
Model Difference(s)	Please refer to note 5.
Hardware Version	LA-K211P
Software Version	19041.329
RF Module Model	MT7921
EUT Power Rating	20Vdc 2.25A
Power Adapter Power Rating	1. Brand: Acbel (Lenovo) M/N: ADLX45YAC3D I/P: 100-240V~1.2A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W/15.0Vdc 3.0A/9.0Vdc 2.0A/5.0Vdc 2.0A 10.0W 2. Brand: Chicony (Lenovo) M/N: ADLX45YCC3G I/P: 100-240V~1.3A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W / 15Vdc 3A / 9Vdc 2A / 5.0Vdc 2.0A 10.0W 3. Brand: Delta (Lenovo) M/N: ADLX45YDC3D I/P: 100-240V~1.2A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W / 15.0Vdc 3.0A / 9.0Vdc 2.0A / 5.0Vdc 2.0A 10.0W
Power Adapter	1. Acbel (Lenovo) / ADLX45YAC3D 2. Chicony (Lenovo) / ADLX45YCC3G 3. Delta (Lenovo) / ADLX45YDC3D
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250 MHz~5350 MHz UNII-2C: 5470 MHz~5725 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM, OFDMA
Bit Rate of Transmitter	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: Up to 300 Mbps 802.11ac: Up to 866.7 Mbps 802.11ax: Up to 1201 Mbps
Maximum Output Power _UNII-1	IEEE 802.11a: 21.71 dBm (0.1484 W) IEEE 802.11n (HT20): 20.95 dBm (0.1246 W) IEEE 802.11n (HT40): 20.27 dBm (0.1064 W) IEEE 802.11ac (VHT20): 20.98 dBm (0.1253 W) IEEE 802.11ac (VHT40): 20.34 dBm (0.1082 W) IEEE 802.11ac (VHT80): 16.68 dBm (0.0465 W) IEEE 802.11ax (HEW20): 21.15 dBm (0.1303 W) IEEE 802.11ax (HEW40): 20.31 dBm (0.1075 W) IEEE 802.11ax (HEW80): 17.08 dBm (0.0511 W)
Maximum Output Power _UNII-2A	IEEE 802.11a: 21.85 dBm (0.1529 W) IEEE 802.11n (HT20): 21.43 dBm (0.1390 W) IEEE 802.11n (HT40): 20.31 dBm (0.1073 W) IEEE 802.11ac (VHT20): 21.45 dBm (0.1395 W) IEEE 802.11ac (VHT40): 20.35 dBm (0.1083 W) IEEE 802.11ac (VHT80): 16.84 dBm (0.0483 W) IEEE 802.11ax (HEW20): 21.31 dBm (0.1352 W) IEEE 802.11ax (HEW40): 20.80 dBm (0.1204 W) IEEE 802.11ax (HEW80): 17.15 dBm (0.0618 W)

Maximum Output Power _UNII-2C	IEEE 802.11a: 21.89 dBm (0.1545 W) IEEE 802.11n (HT20): 21.32 dBm (0.1354 W) IEEE 802.11n (HT40): 20.13 dBm (0.1031 W) IEEE 802.11ac (VHT20): 21.37 dBm (0.1372 W) IEEE 802.11ac (VHT40): 20.20 dBm (0.1047 W) IEEE 802.11ac (VHT80): 19.41 dBm (0.0873 W) IEEE 802.11ax (HEW20): 21.40 dBm (0.1381 W) IEEE 802.11ax (HEW40): 20.55 dBm (0.1136 W) IEEE 802.11ax (HEW80): 19.53 dBm (0.0898 W)
Maximum Output Power _UNII-3	IEEE 802.11a: 22.64 dBm (0.1837 W) IEEE 802.11n (HT20): 21.35 dBm (0.1366 W) IEEE 802.11n (HT40): 20.34 dBm (0.1081 W) IEEE 802.11ac (VHT20): 21.47 dBm (0.1403 W) IEEE 802.11ac (VHT40): 20.38 dBm (0.1092 W) IEEE 802.11ac (VHT80): 19.11 dBm (0.0815 W) IEEE 802.11ax (HEW20): 22.15 dBm (0.1641 W) IEEE 802.11ax (HEW40): 20.52 dBm (0.1128 W) IEEE 802.11ax (HEW80): 19.47 dBm (0.0884 W)
Maximum Output Power for Straddle Channel	IEEE 802.11a: 19.70 dBm (0.0934 W) IEEE 802.11n (HT20): 15.39 dBm (0.0346 W) IEEE 802.11n (HT40): 13.02 dBm (0.0201 W) IEEE 802.11ac (VHT20): 15.42 dBm (0.0348 W) IEEE 802.11ac (VHT40): 13.06 dBm (0.0202 W) IEEE 802.11ac (VHT80): 16.40 dBm (0.0436 W) IEEE 802.11ax (HEW20): 15.94 dBm (0.0393 W) IEEE 802.11ax (HEW40): 13.24 dBm (0.0211 W) IEEE 802.11ax (HEW80): 15.72 dBm (0.0373 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. This is a supplement report of BTL-FCCP-4-2007T046, BTL-FCCP-4-2007T046A, BTL-FCCP-4-2007T046B report. The differences compared with original report is added MediaTek / MT7921 module card.  
After evaluated, the changes with respect to the original one, all tests need to re-test.

## 3. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				


**2.2 TEST MODES**

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_IEEE 802.11a	100	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11a	36/48, 52/64	Bandedge
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	100/140, 149/165	
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46, 54/62 102/134, 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	Harmonic
	TX Mode_IEEE 802.11a	36/40/48 52/60/64	
	TX Mode_IEEE 802.11n (HT20) TX Mode_IEEE 802.11ax (HEW20)	100/116/140/144 149/157/165	
	TX Mode_IEEE 802.11n (HT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134/142 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122/138 155	
Output Power	TX Mode_IEEE 802.11a	36/40/48	-
	TX Mode_IEEE 802.11n (HT20) TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	52/60/64 100/116/140/144 149/157/165	
	TX Mode_IEEE 802.11n (HT40) TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134/142 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122/138 155	

**NOTE:**

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (Z axis) is recorded.

### 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

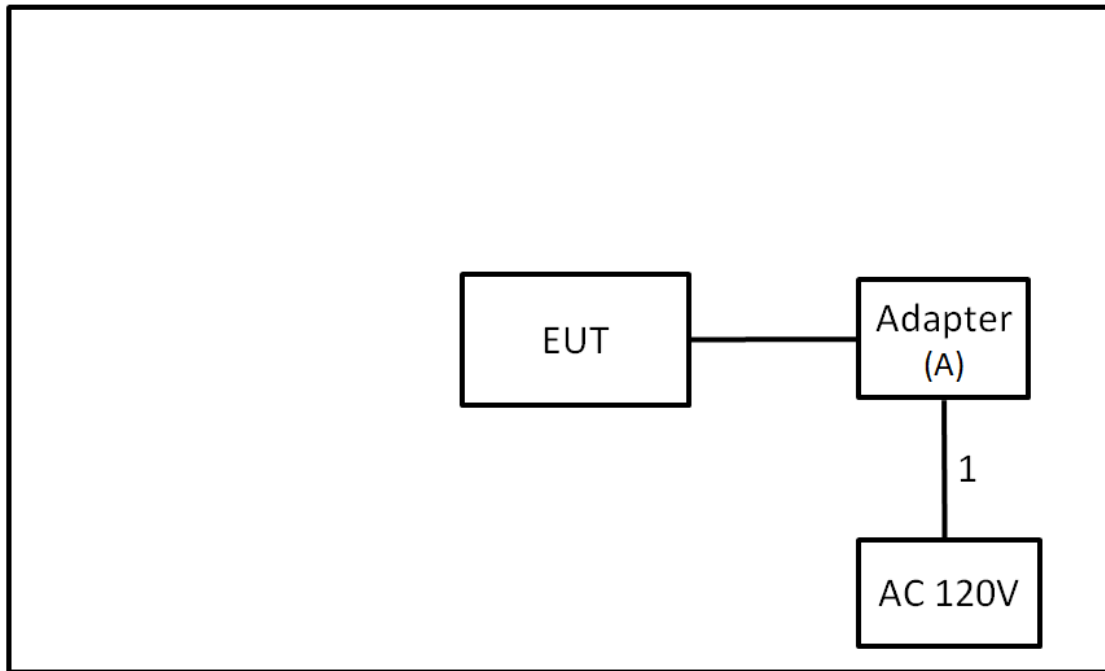

### 2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Adapter	Delta	ADLX45YDC3D	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Power Cable	NO	NO	0.9m

### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

**NOTE:**

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 3.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation



### 3.4 TEST SETUP

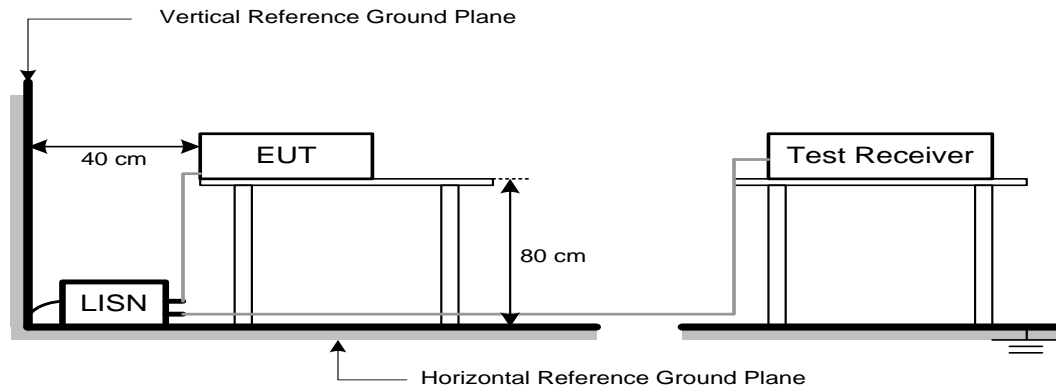

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS TEST

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27 NOTE (2)	68.3	74.3 (Note 3)
	10 NOTE (2)	105.3	111.3(Note 3)
	15.6 NOTE (2)	110.9	116.9(Note 3)
	27 NOTE (2)	122.3	128.3(Note 3)

#### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$



$$20\log d_{\text{limit}}/d_{\text{measure}}=20\log 3/1.5=6 \text{ dB.}$$



#### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.


#### 4.3 DEVIATION FROM TEST STANDARD

No deviation

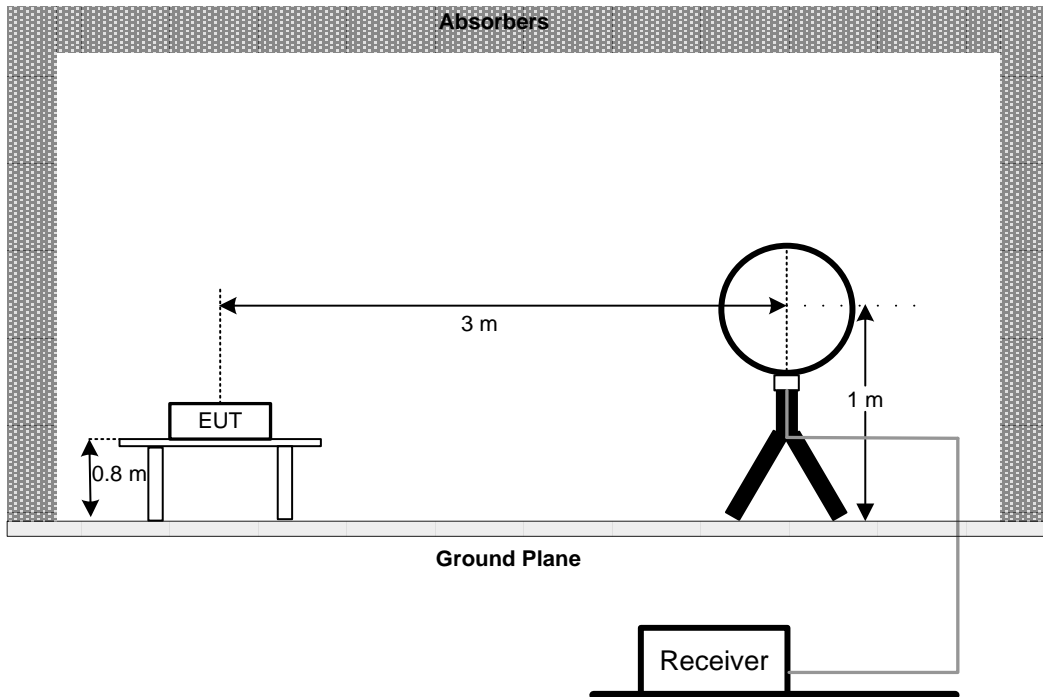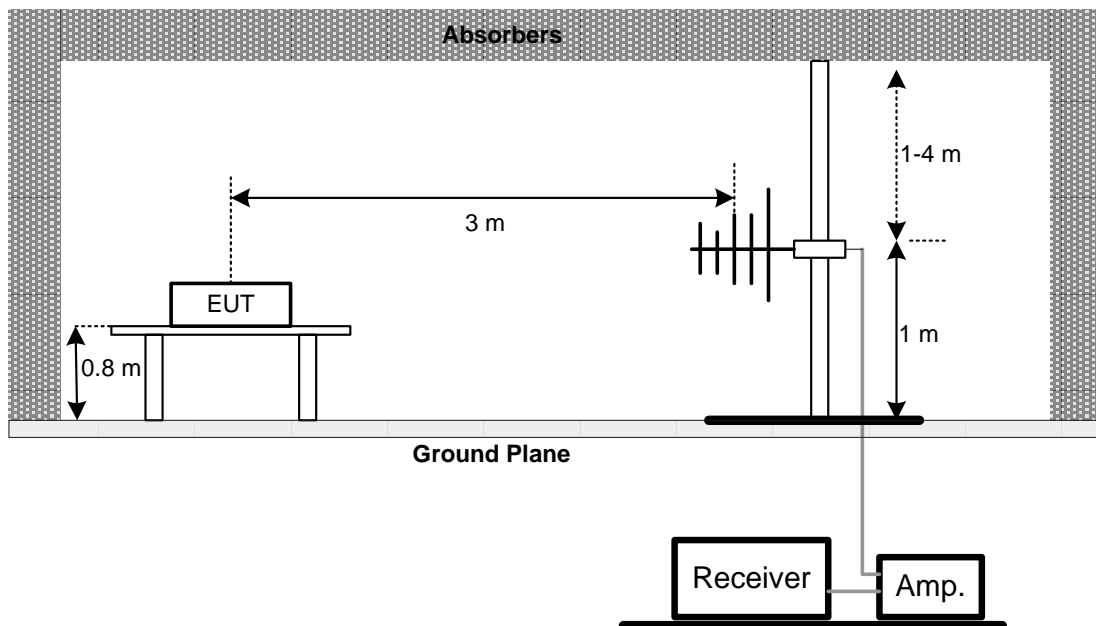**4.4 TEST SETUP****9 kHz to 30 MHz****30 MHz to 1 GHz**

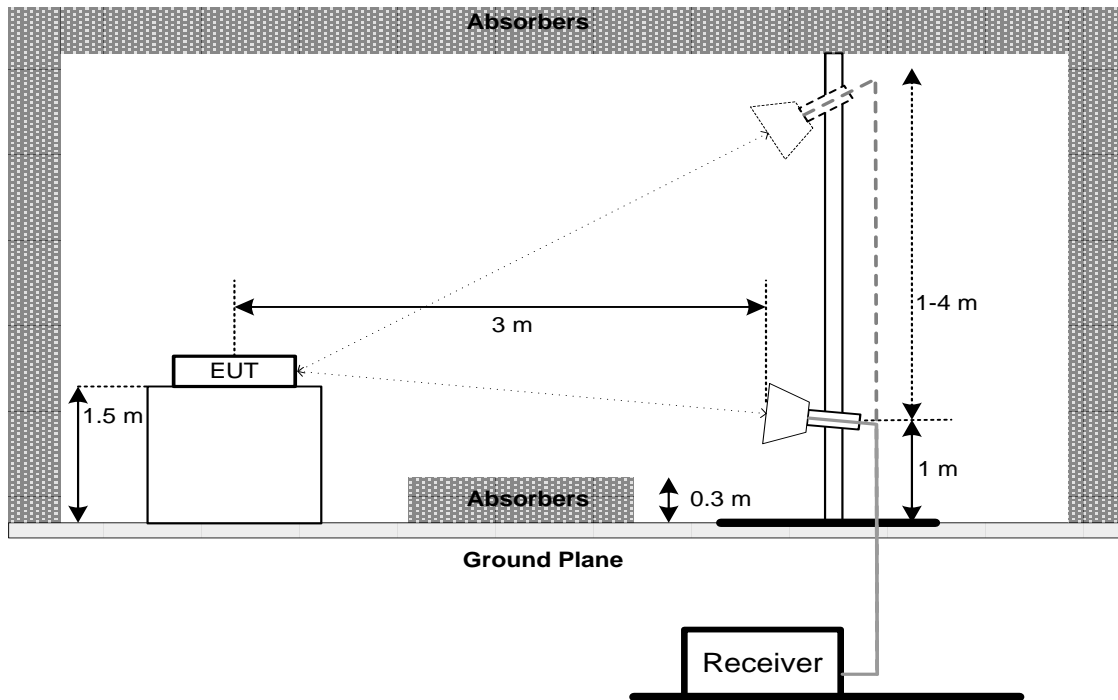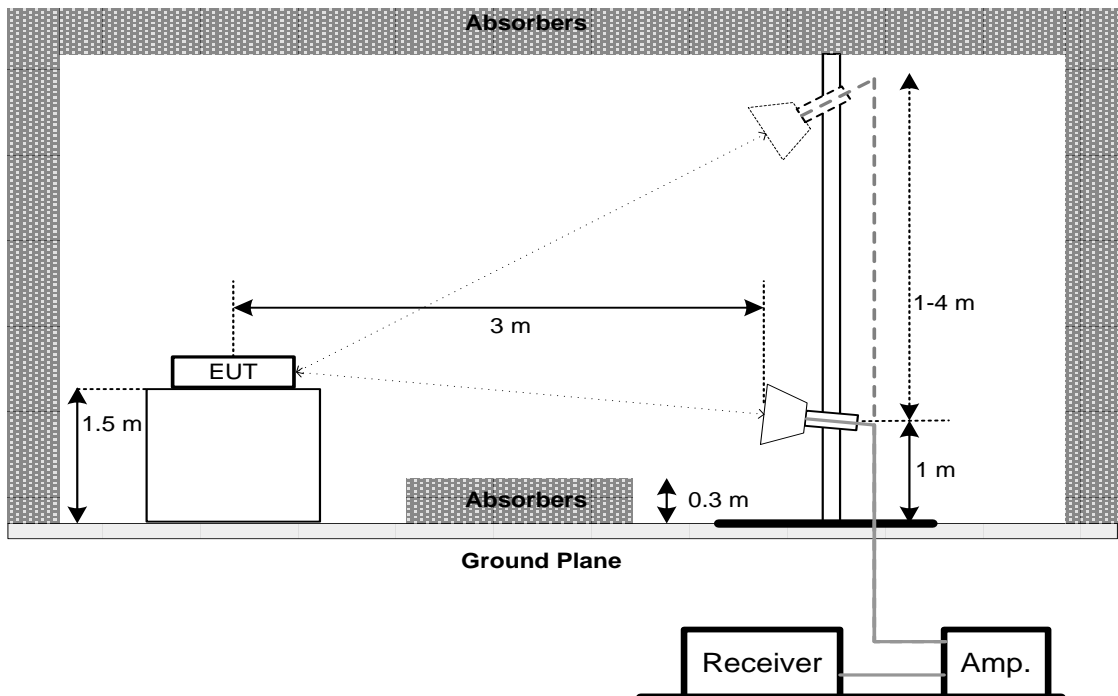**Above 1 GHz  
Band edge****Harmonic (1 GHz to 18 GHz)**

### Harmonic (Above 18 GHz)

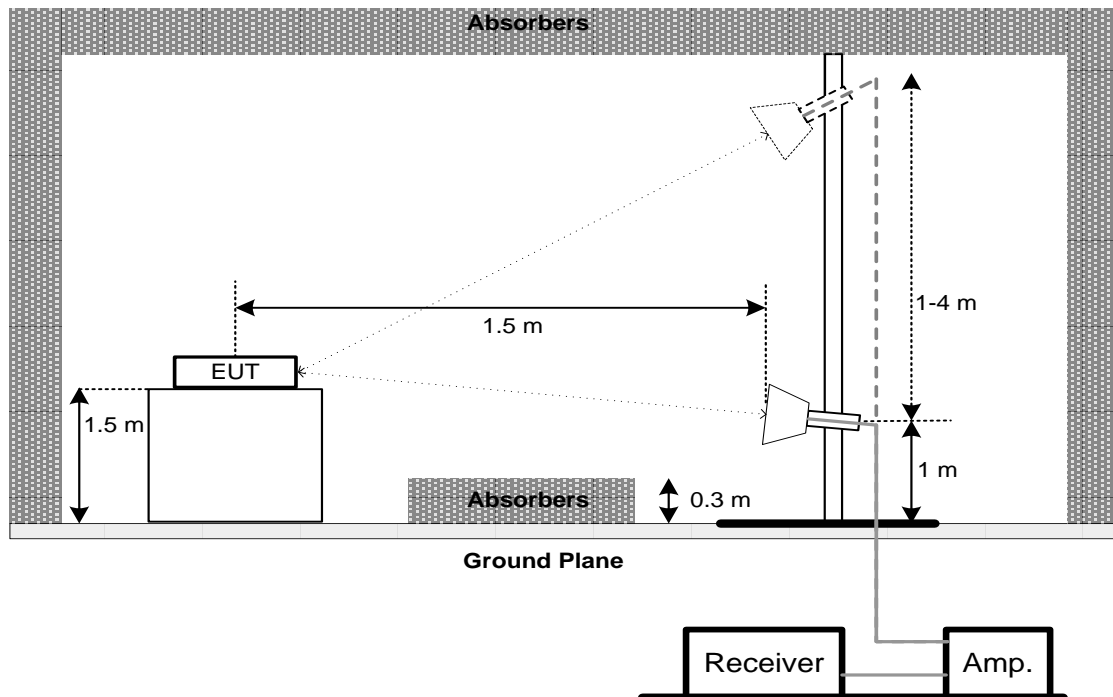

#### 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.6 TEST RESULTS - BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit..

#### 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX B.

#### 4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

**5. OUTPUT POWER TEST**

**5.1 Limit**

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350 5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

**5.2 TEST PROCEDURE**

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3.
  - a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
    - a)Method PM (Measurement using an RF average power meter):
      - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied  
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.  
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.  
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
      - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
      - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
      - (iv) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25%).

**5.3 DEVIATION FROM TEST STANDARD**

No deviation

**5.4 TEST SETUP**



**5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS**

Please refer to the APPENDIX D.

**6. MEASUREMENT INSTRUMENTS LIST**

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 15, 2022
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 20, 2022
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Band Reject Filter	Micro-Tronics	BRC50705-01	10	Feb. 27, 2022
11	Band Reject Filter	Micro-Tronics	BRC50704-01	8	Feb. 27, 2022
12	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 27, 2022
13	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.  
"\*" calibration period of equipment list is three year.  
Except \* item, all calibration period of equipment list is one year.


**7. EUT TEST PHOTOS****AC Power Line Conducted Emissions Test Photos**

**Radiated Emissions Test Photos****30 MHz to 1000 MHz**

**Radiated Emissions Test Photos****ABOVE 1 GHz**

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode	Normal	Tested Date	2021/6/23
Test Frequency	-	Phase	Line

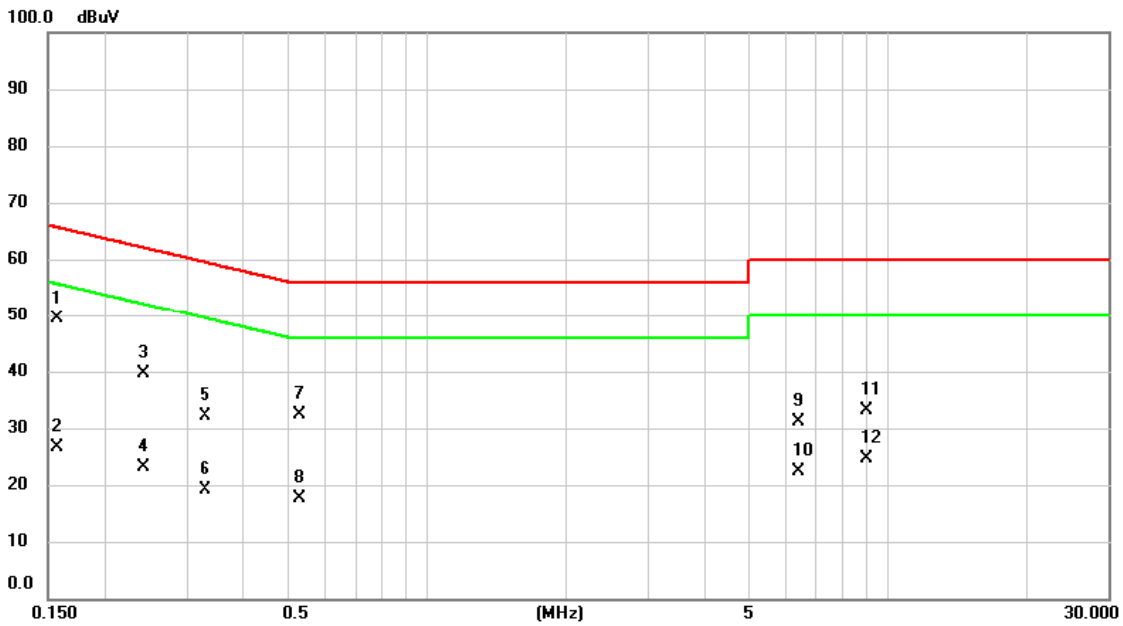


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1568	39.86	9.64	49.50	65.63	-16.13	QP	
2		0.1568	16.92	9.64	26.56	55.63	-29.07	AVG	
3		0.2423	30.04	9.63	39.67	62.02	-22.35	QP	
4		0.2423	13.52	9.63	23.15	52.02	-28.87	AVG	
5		0.3300	22.53	9.68	32.21	59.45	-27.24	QP	
6		0.3300	9.55	9.68	19.23	49.45	-30.22	AVG	
7		0.5302	22.77	9.68	32.45	56.00	-23.55	QP	
8		0.5302	7.97	9.68	17.65	46.00	-28.35	AVG	
9		6.4274	21.19	9.84	31.03	60.00	-28.97	QP	
10		6.4274	12.57	9.84	22.41	50.00	-27.59	AVG	
11		9.0218	23.23	9.89	33.12	60.00	-26.88	QP	
12		9.0218	14.72	9.89	24.61	50.00	-25.39	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	Normal	Tested Date	2021/6/23
Test Frequency	-	Phase	Neutral

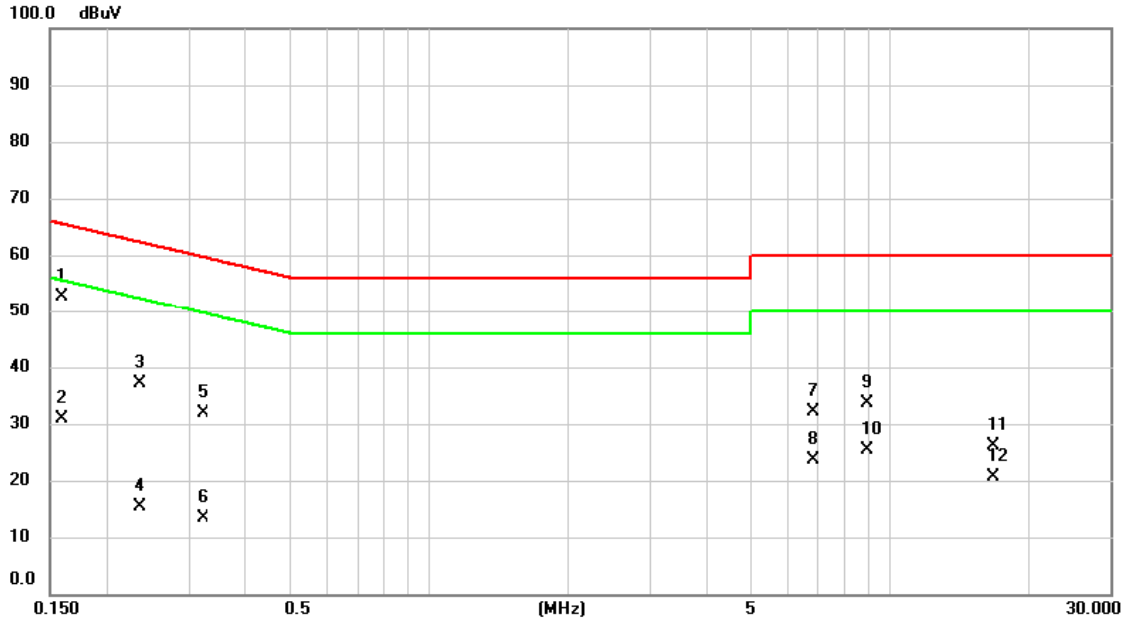

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1590	43.00	9.64	52.64	65.52	-12.88	QP	
2		0.1590	21.19	9.64	30.83	55.52	-24.69	AVG	
3		0.2355	27.47	9.63	37.10	62.25	-25.15	QP	
4		0.2355	5.86	9.63	15.49	52.25	-36.76	AVG	
5		0.3232	22.18	9.68	31.86	59.62	-27.76	QP	
6		0.3232	3.75	9.68	13.43	49.62	-36.19	AVG	
7		6.8348	22.38	9.84	32.22	60.00	-27.78	QP	
8		6.8348	13.78	9.84	23.62	50.00	-26.38	AVG	
9		8.9205	23.67	9.88	33.55	60.00	-26.45	QP	
10		8.9205	15.53	9.88	25.41	50.00	-24.59	AVG	
11		16.7438	16.33	9.91	26.24	60.00	-33.76	QP	
12		16.7438	10.81	9.91	20.72	50.00	-29.28	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/6/23
Test Frequency	-	Phase	Line

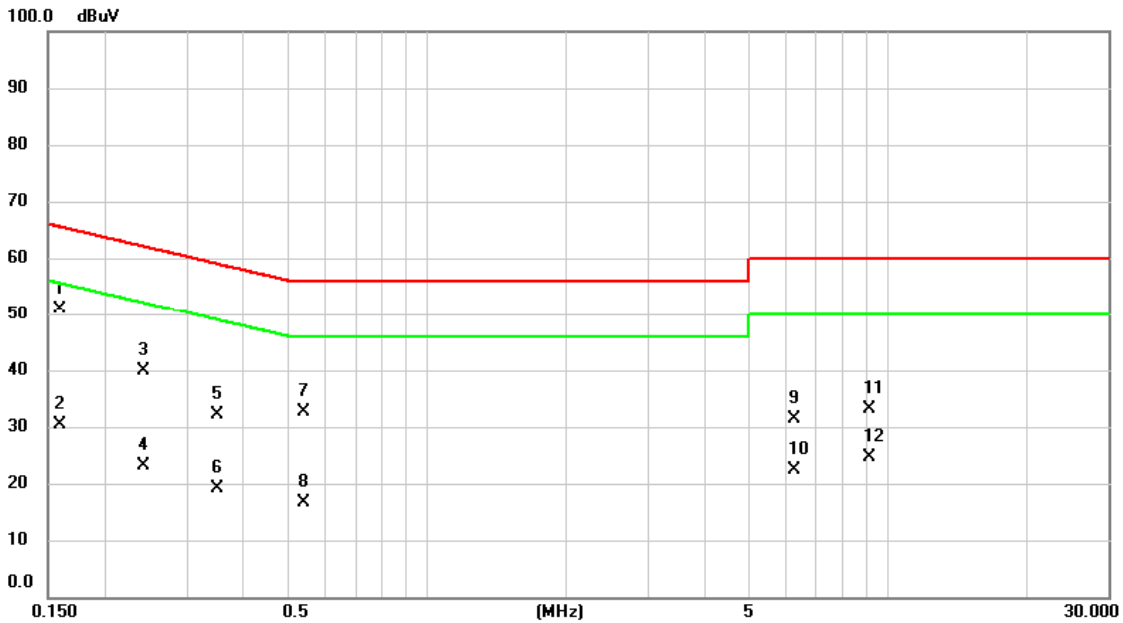


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1590	41.27	9.64	50.91	65.52	-14.61	QP	
2		0.1590	20.75	9.64	30.39	55.52	-25.13	AVG	
3		0.2423	30.15	9.63	39.78	62.02	-22.24	QP	
4		0.2423	13.51	9.63	23.14	52.02	-28.88	AVG	
5		0.3502	22.39	9.68	32.07	58.96	-26.89	QP	
6		0.3502	9.56	9.68	19.24	48.96	-29.72	AVG	
7		0.5392	23.02	9.68	32.70	56.00	-23.30	QP	
8		0.5392	7.06	9.68	16.74	46.00	-29.26	AVG	
9		6.2768	21.45	9.84	31.29	60.00	-28.71	QP	
10		6.2768	12.61	9.84	22.45	50.00	-27.55	AVG	
11		9.1140	23.21	9.89	33.10	60.00	-26.90	QP	
12		9.1140	14.83	9.89	24.72	50.00	-25.28	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.



Test Mode	Idle	Tested Date	2021/6/23
Test Frequency	-	Phase	Neutral

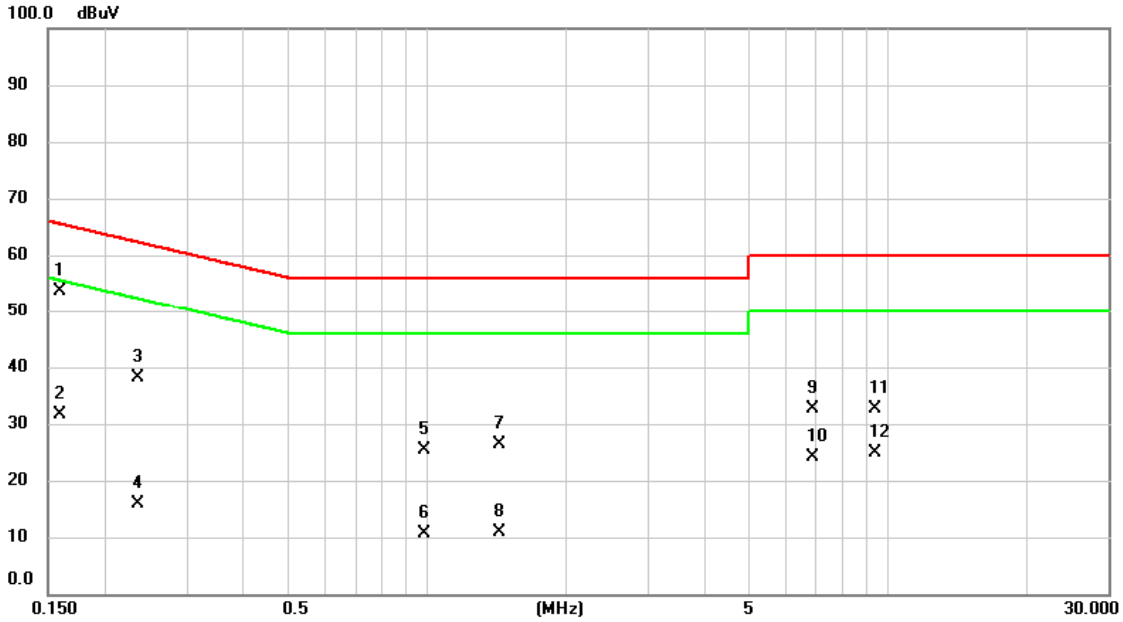


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1590	43.95	9.64	53.59	65.52	-11.93	QP	
2		0.1590	22.05	9.64	31.69	55.52	-23.83	AVG	
3		0.2355	28.44	9.63	38.07	62.25	-24.18	QP	
4		0.2355	6.31	9.63	15.94	52.25	-36.31	AVG	
5		0.9847	15.71	9.70	25.41	56.00	-30.59	QP	
6		0.9847	1.02	9.70	10.72	46.00	-35.28	AVG	
7		1.4347	16.77	9.71	26.48	56.00	-29.52	QP	
8		1.4347	1.09	9.71	10.80	46.00	-35.20	AVG	
9		6.8730	22.70	9.84	32.54	60.00	-27.46	QP	
10		6.8730	14.24	9.84	24.08	50.00	-25.92	AVG	
11		9.3727	22.77	9.89	32.66	60.00	-27.34	QP	
12		9.3727	15.00	9.89	24.89	50.00	-25.11	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ**

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

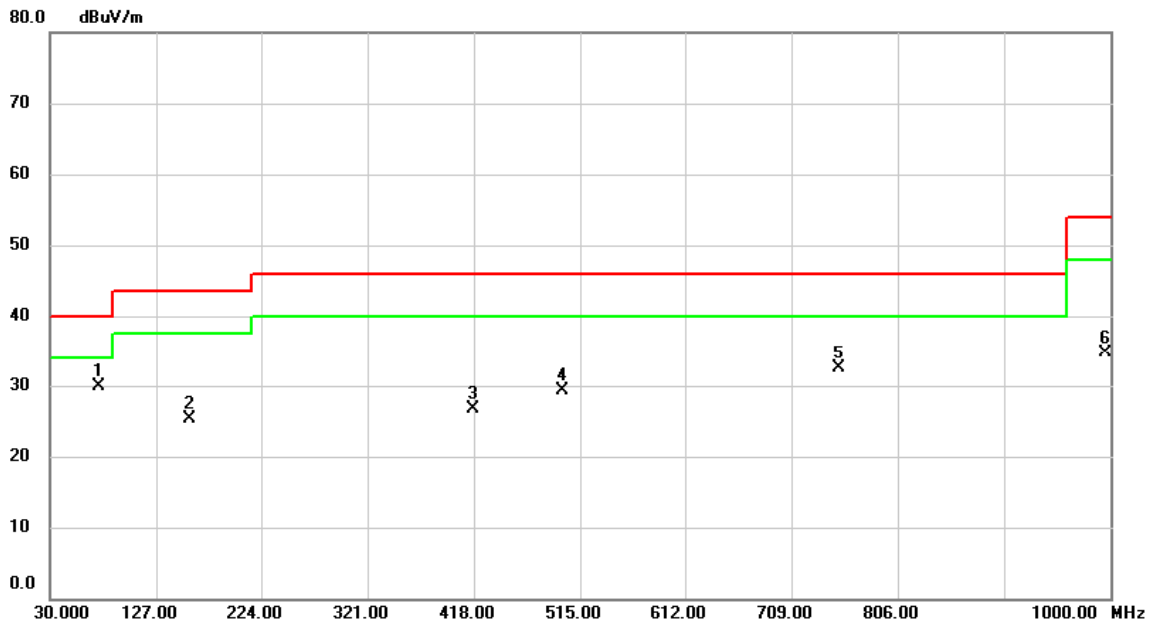


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	74.200	47.00	-17.14	29.86	40.00	-10.14	peak	
2		159.010	37.78	-12.40	25.38	43.50	-18.12	peak	
3		416.804	34.99	-8.31	26.68	46.00	-19.32	peak	
4		498.801	35.78	-6.56	29.22	46.00	-16.78	peak	
5		752.876	34.41	-1.87	32.54	46.00	-13.46	peak	
6		995.570	32.96	1.84	34.80	54.00	-19.20	peak	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

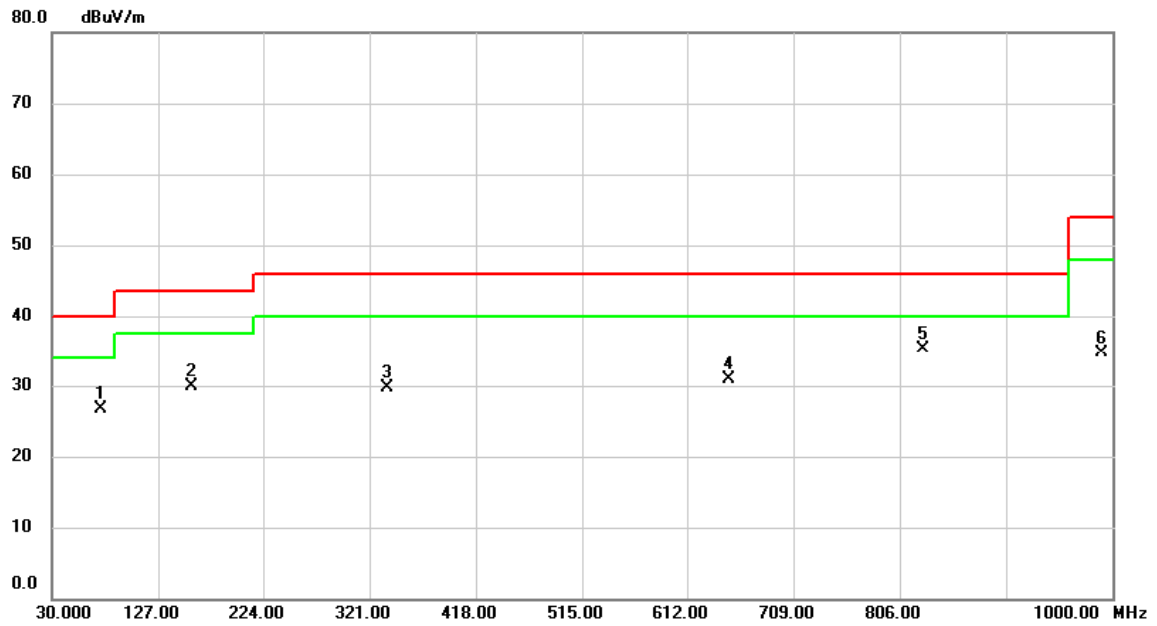

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		74.167	43.75	-17.14	26.61	40.00	-13.39	peak	
2		158.460	42.24	-12.40	29.84	43.50	-13.66	peak	
3		337.587	39.96	-10.19	29.77	46.00	-16.23	peak	
4		649.959	34.57	-3.74	30.83	46.00	-15.17	peak	
5	*	827.017	36.04	-0.67	35.37	46.00	-10.63	peak	
6		989.847	32.96	1.83	34.79	54.00	-19.21	peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

**APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

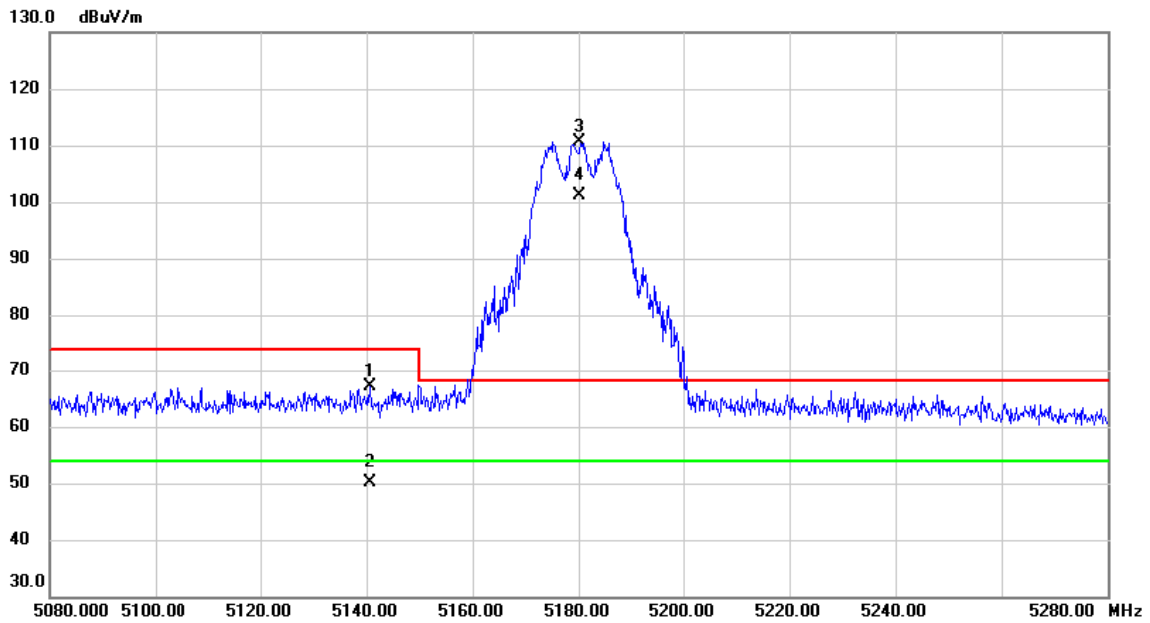


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5140.747	51.88	15.24	67.12	74.00	-6.88	peak	
2		5140.747	35.01	15.24	50.25	54.00	-3.75	AVG	
3	X	5180.000	95.35	15.33	110.68	68.20	42.48	peak	No Limit
4	*	5180.000	85.79	15.33	101.12	54.00	47.12	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

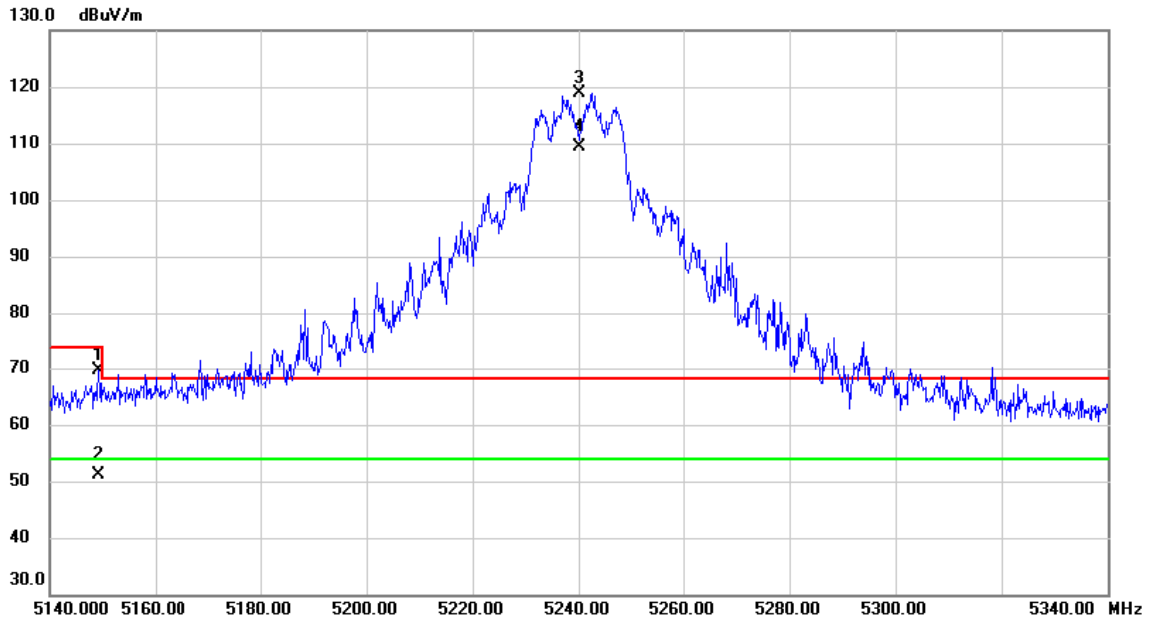

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.333	54.39	15.26	69.65	74.00	-4.35	peak	
2		5149.333	35.97	15.26	51.23	54.00	-2.77	AVG	
3	X	5240.000	103.39	15.47	118.86	68.20	50.66	peak	No Limit
4	*	5240.000	93.90	15.47	109.37	54.00	55.37	AVG	No Limit

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

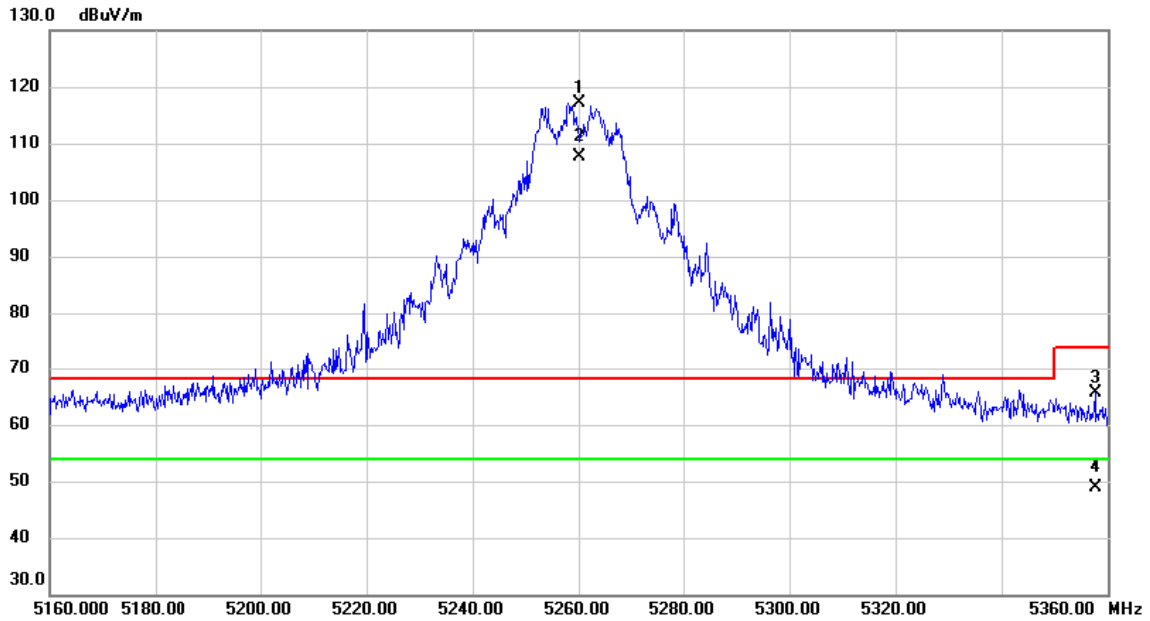


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	101.68	15.52	117.20	68.20	49.00	peak	No Limit
2	*	5260.000	92.10	15.52	107.62	54.00	53.62	AVG	No Limit
3		5357.720	49.99	15.73	65.72	74.00	-8.28	peak	
4		5357.720	33.03	15.73	48.76	54.00	-5.24	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

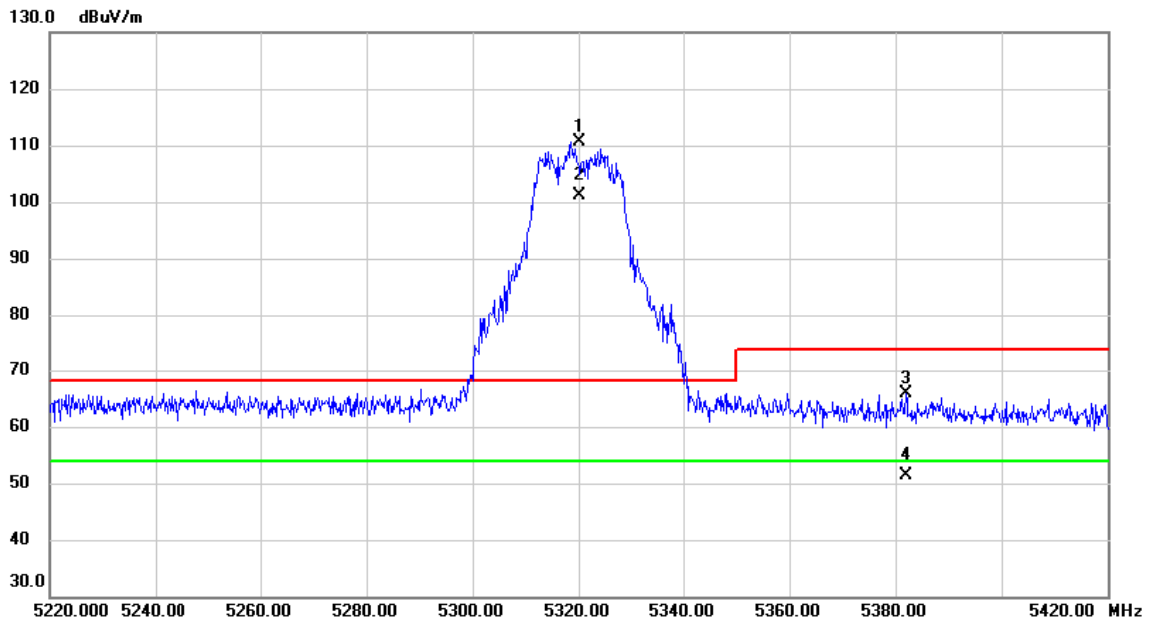


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	95.07	15.65	110.72	68.20	42.52	peak	No Limit
2	*	5320.000	85.59	15.65	101.24	54.00	47.24	AVG	No Limit
3		5382.080	50.15	15.80	65.95	74.00	-8.05	peak	
4		5382.080	35.69	15.80	51.49	54.00	-2.51	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

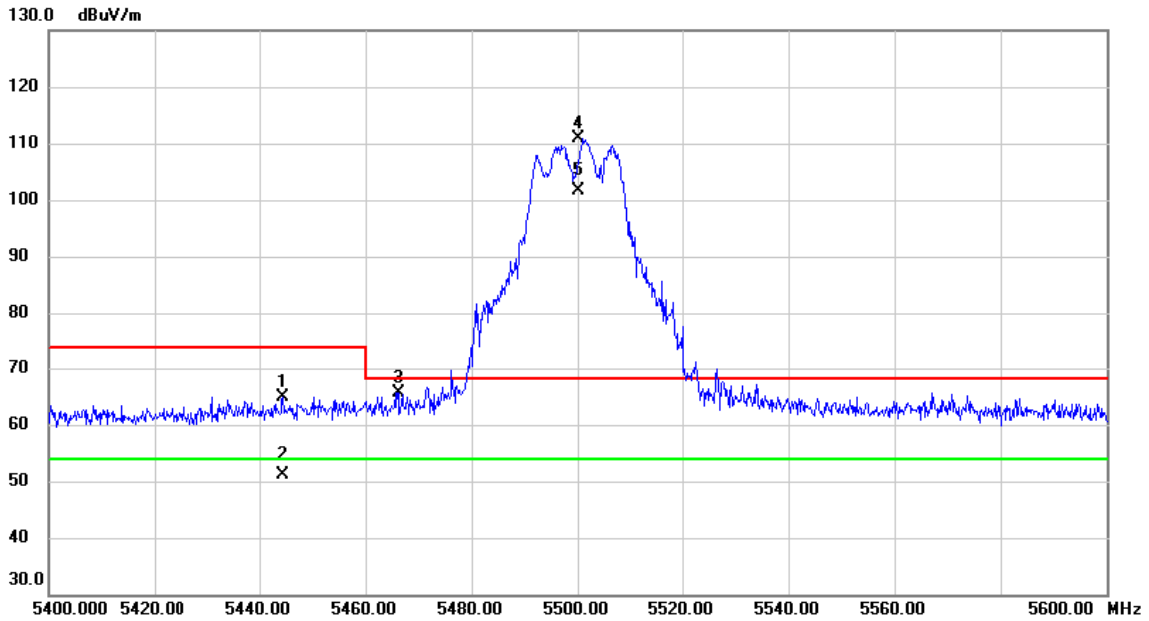


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5444.427	48.90	15.94	64.84	74.00	-9.16	peak	
2		5444.427	35.21	15.94	51.15	54.00	-2.85	AVG	
3		5466.193	49.76	15.99	65.75	68.20	-2.45	peak	
4	X	5500.000	94.87	16.06	110.93	68.20	42.73	peak	No Limit
5	*	5500.000	85.68	16.06	101.74	54.00	47.74	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

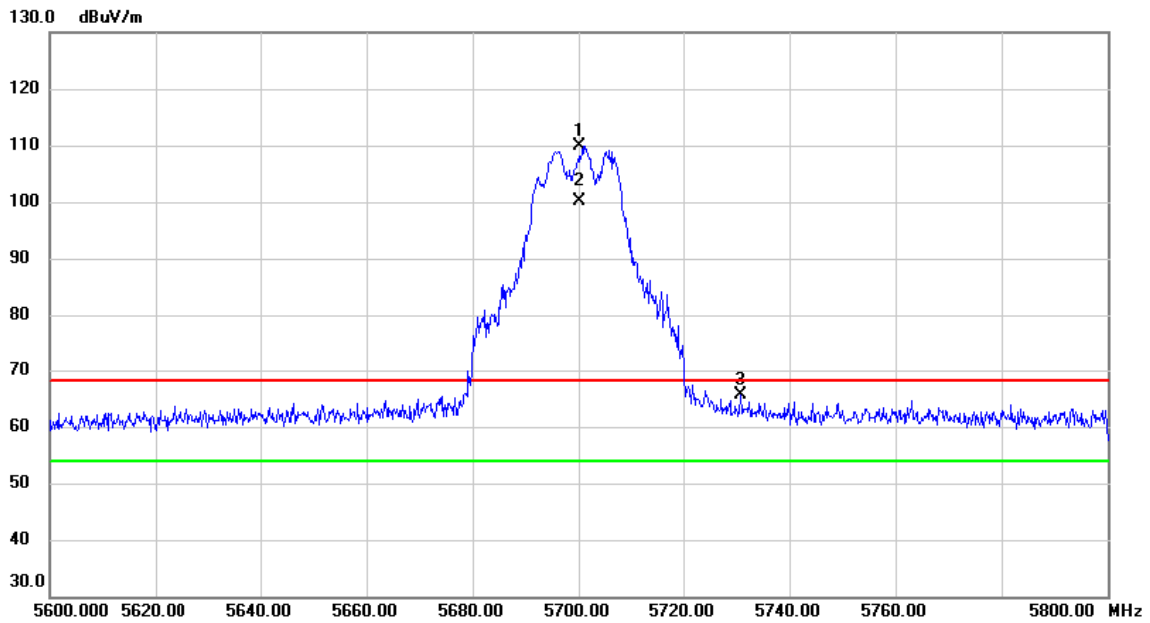


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	93.51	16.47	109.98	68.20	41.78	peak	No Limit
2	*	5700.000	83.72	16.47	100.19	54.00	46.19	AVG	No Limit
3		5730.867	49.12	16.52	65.64	68.20	-2.56	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

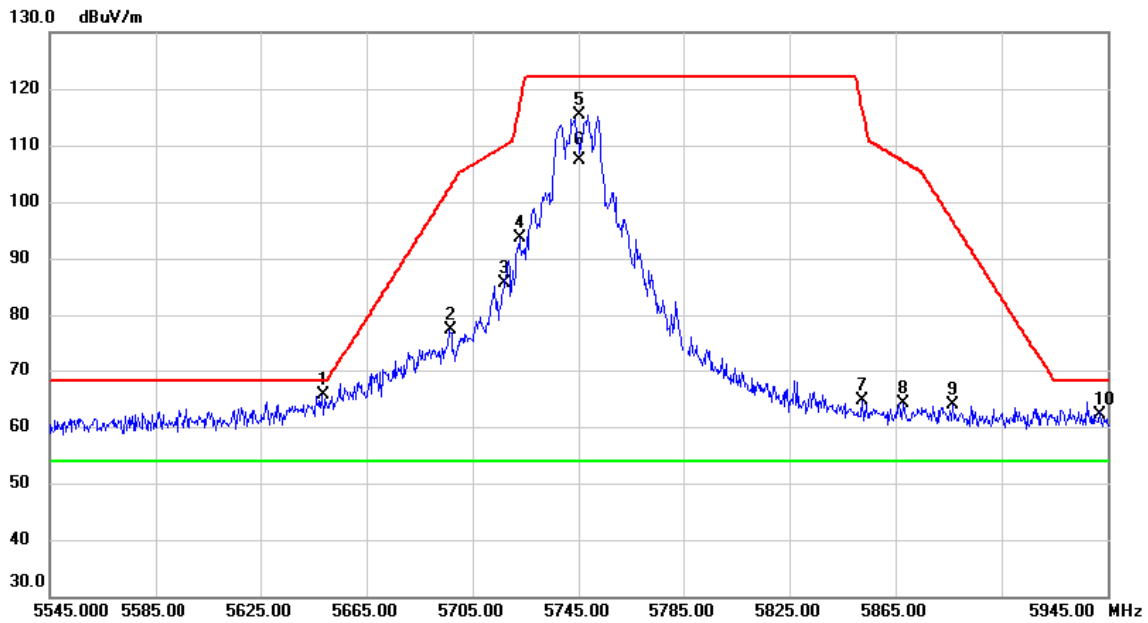


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.533	49.17	16.37	65.54	68.20	-2.66	peak	
2		5696.493	61.01	16.46	77.47	102.60	-25.13	peak	
3		5717.213	69.21	16.49	85.70	110.02	-24.32	peak	
4		5722.680	77.04	16.51	93.55	116.91	-23.36	peak	
5		5745.000	98.94	16.55	115.49	122.20	-6.71	peak	No Limit
6 *		5745.000	90.90	16.55	107.45	54.00	53.45	AVG	No Limit
7		5852.653	47.75	16.77	64.52	116.15	-51.63	peak	
8		5868.187	47.36	16.80	64.16	107.11	-42.95	peak	
9		5886.840	47.13	16.84	63.97	96.44	-32.47	peak	
10		5942.213	45.10	16.94	62.04	68.20	-6.16	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/6/21
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

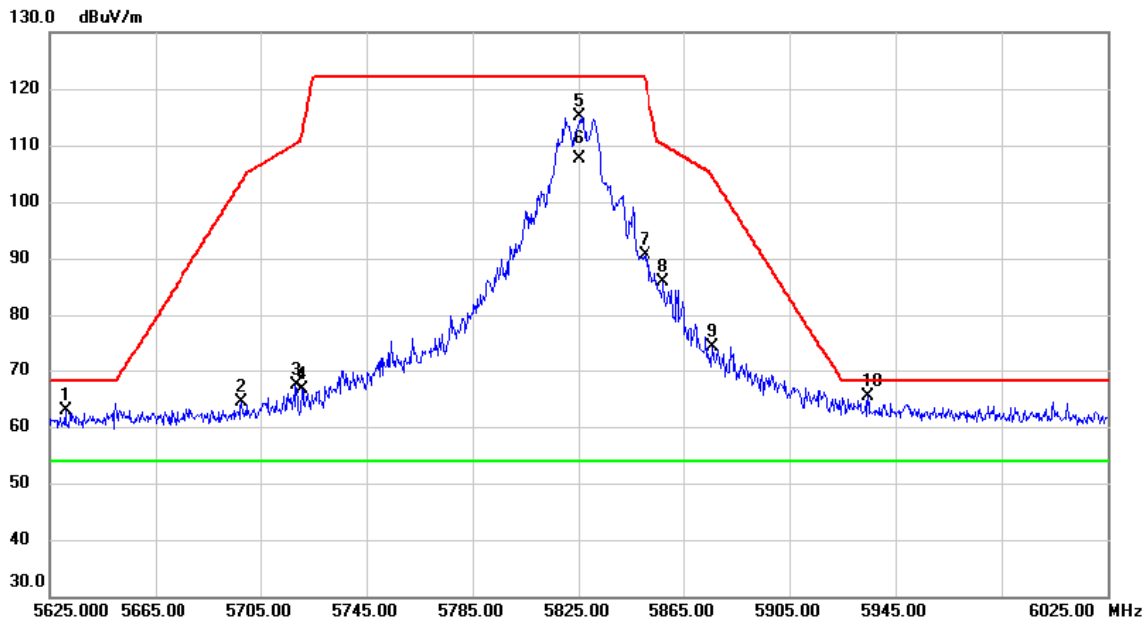


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5631.160	46.57	16.33	62.90	68.20	-5.30	peak	
2		5697.853	47.95	16.46	64.41	103.61	-39.20	peak	
3		5718.573	50.88	16.50	67.38	110.40	-43.02	peak	
4		5720.933	50.21	16.50	66.71	112.93	-46.22	peak	
5		5825.000	98.35	16.72	115.07	122.20	-7.13	peak	No Limit
6	*	5825.000	90.86	16.72	107.58	54.00	53.58	AVG	No Limit
7		5850.213	73.93	16.76	90.69	121.71	-31.02	peak	
8		5857.493	69.02	16.78	85.80	110.10	-24.30	peak	
9		5876.200	57.49	16.82	74.31	104.31	-30.00	peak	
10		5934.720	48.56	16.93	65.49	68.20	-2.71	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

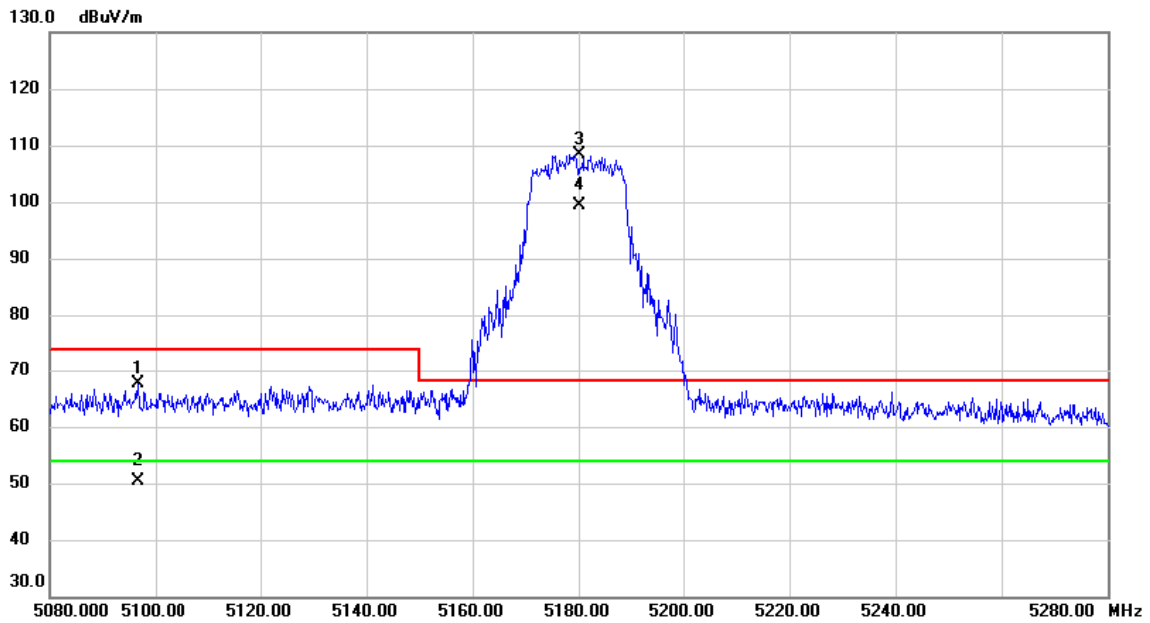


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5096.627	52.42	15.14	67.56	74.00	-6.44	peak	
2		5096.627	35.18	15.14	50.32	54.00	-3.68	AVG	
3	X	5180.000	93.07	15.33	108.40	68.20	40.20	peak	No Limit
4	*	5180.000	83.94	15.33	99.27	54.00	45.27	AVG	No Limit

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

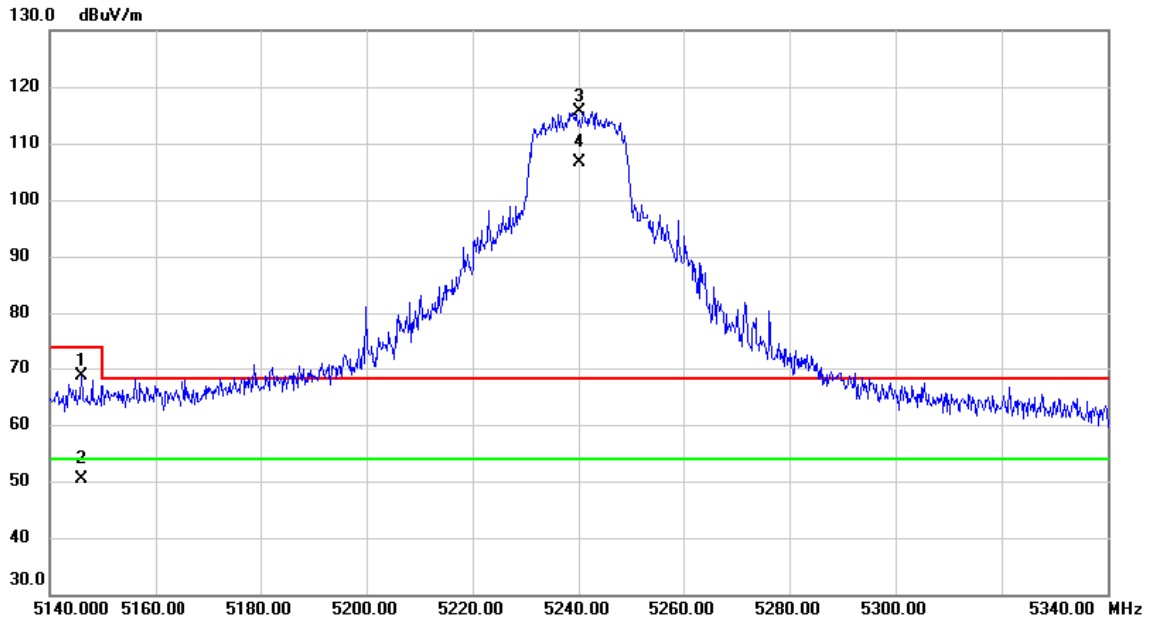


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.133	53.44	15.25	68.69	74.00	-5.31	peak	
2		5146.133	35.15	15.25	50.40	54.00	-3.60	AVG	
3	X	5240.000	100.18	15.47	115.65	68.20	47.45	peak	No Limit
4	*	5240.000	91.13	15.47	106.60	54.00	52.60	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

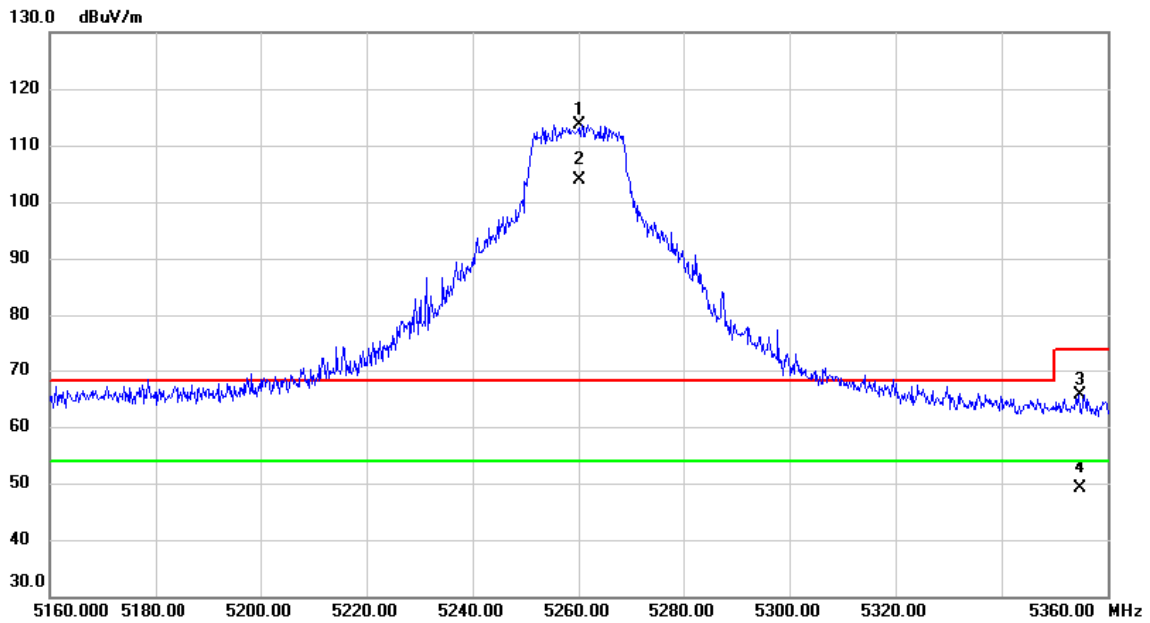


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	98.18	15.52	113.70	68.20	45.50	peak	No Limit
2	*	5260.000	88.48	15.52	104.00	54.00	50.00	AVG	No Limit
3		5354.720	49.92	15.73	65.65	74.00	-8.35	peak	
4		5354.720	33.32	15.73	49.05	54.00	-4.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

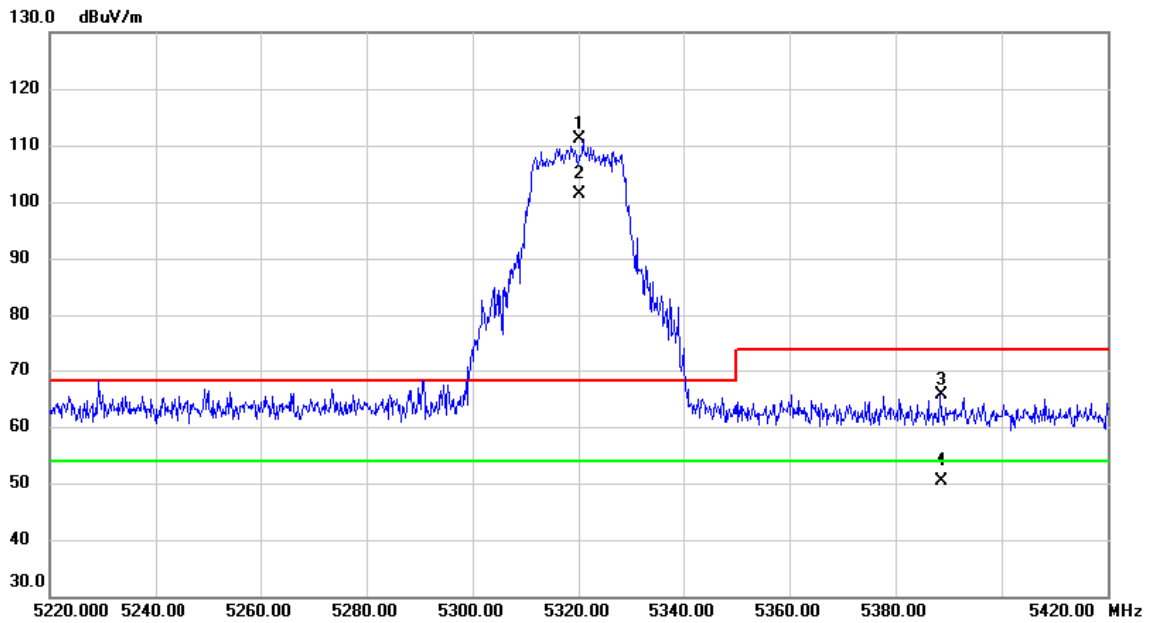


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	95.59	15.65	111.24	68.20	43.04	peak	No Limit
2	*	5320.000	85.83	15.65	101.48	54.00	47.48	AVG	No Limit
3		5388.540	49.91	15.81	65.72	74.00	-8.28	peak	
4		5388.540	34.65	15.81	50.46	54.00	-3.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

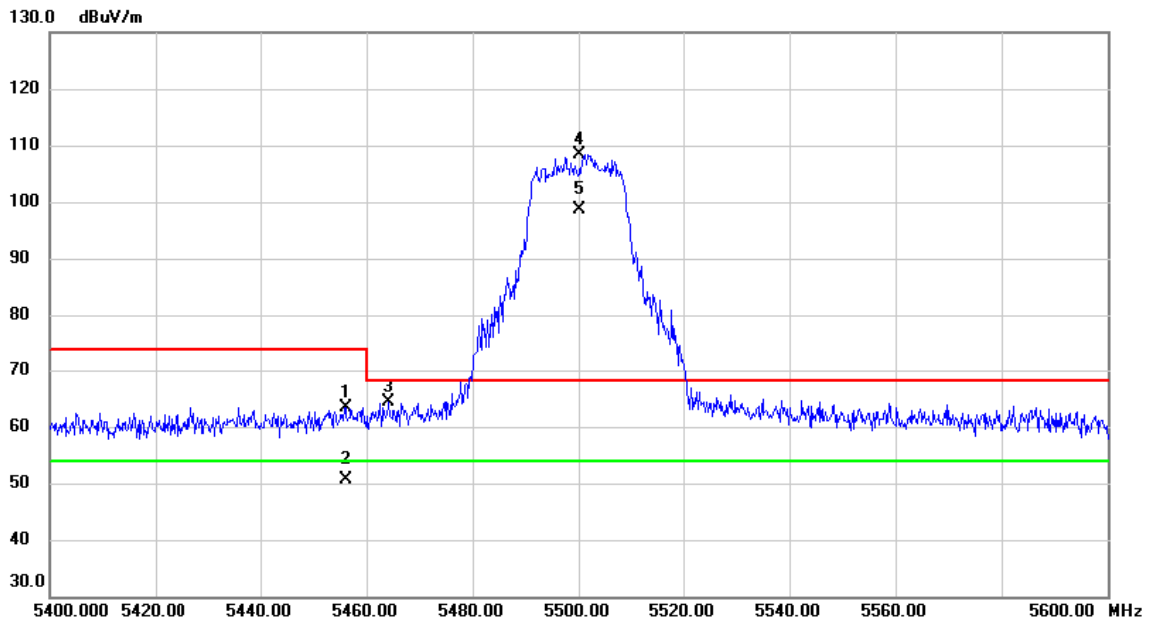

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.000	47.52	15.97	63.49	74.00	-10.51	peak	
2		5456.000	34.59	15.97	50.56	54.00	-3.44	AVG	
3		5464.207	48.31	15.99	64.30	68.20	-3.90	peak	
4	X	5500.000	92.31	16.06	108.37	68.20	40.17	peak	No Limit
5	*	5500.000	82.61	16.06	98.67	54.00	44.67	AVG	No Limit

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

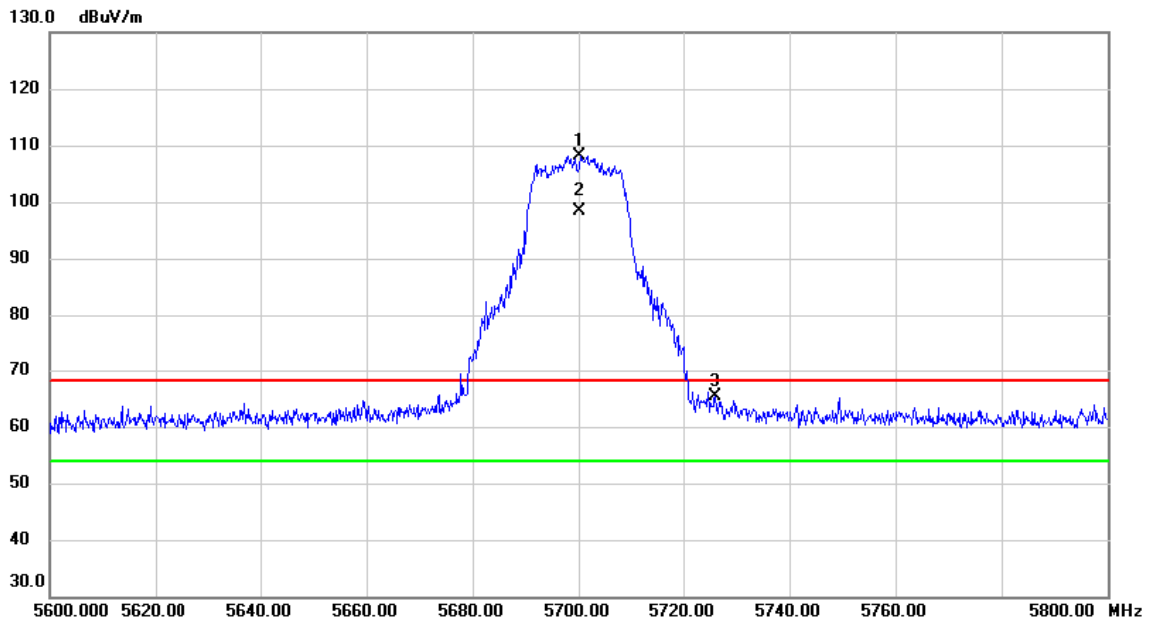


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	91.72	16.47	108.19	68.20	39.99	peak	No Limit
2	*	5700.000	81.99	16.47	98.46	54.00	44.46	AVG	No Limit
3		5726.113	48.78	16.51	65.29	68.20	-2.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

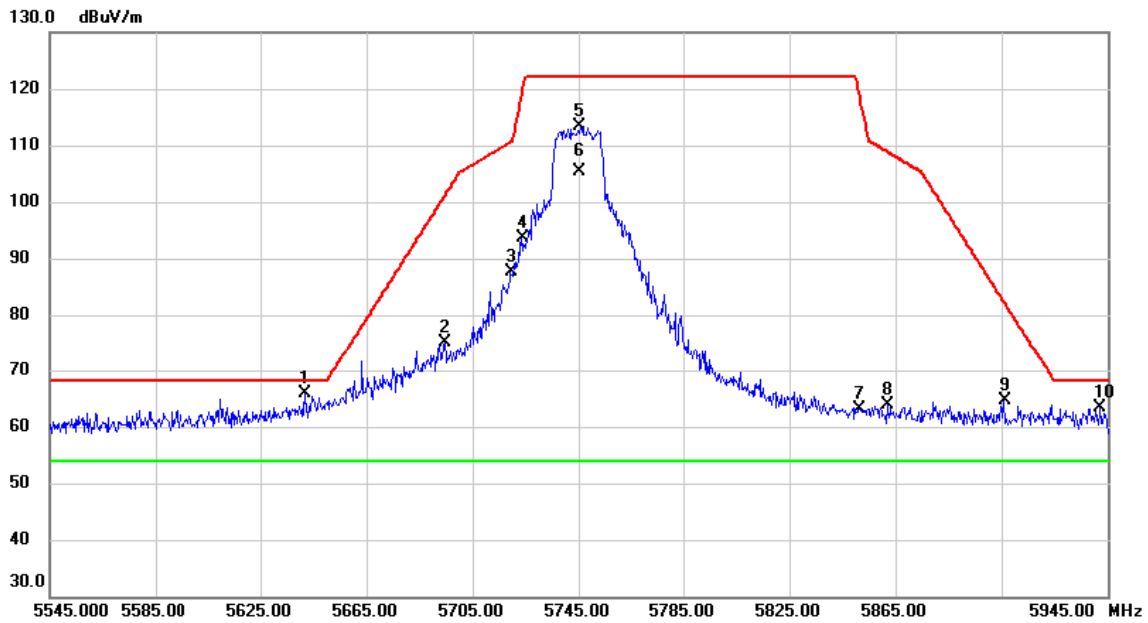


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5641.973	49.52	16.35	65.87	68.20	-2.33	peak	
2		5694.600	58.66	16.46	75.12	101.20	-26.08	peak	
3		5719.453	71.03	16.50	87.53	110.65	-23.12	peak	
4		5723.760	77.24	16.50	93.74	119.37	-25.63	peak	
5		5745.000	96.87	16.55	113.42	122.20	-8.78	peak	No Limit
6	*	5745.000	88.89	16.55	105.44	54.00	51.44	AVG	No Limit
7		5851.187	46.31	16.76	63.07	119.49	-56.42	peak	
8		5861.920	47.21	16.79	64.00	108.86	-44.86	peak	
9		5906.080	47.86	16.87	64.73	82.20	-17.47	peak	
10		5942.227	46.48	16.94	63.42	68.20	-4.78	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT20)	Test Date	2021/6/21
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

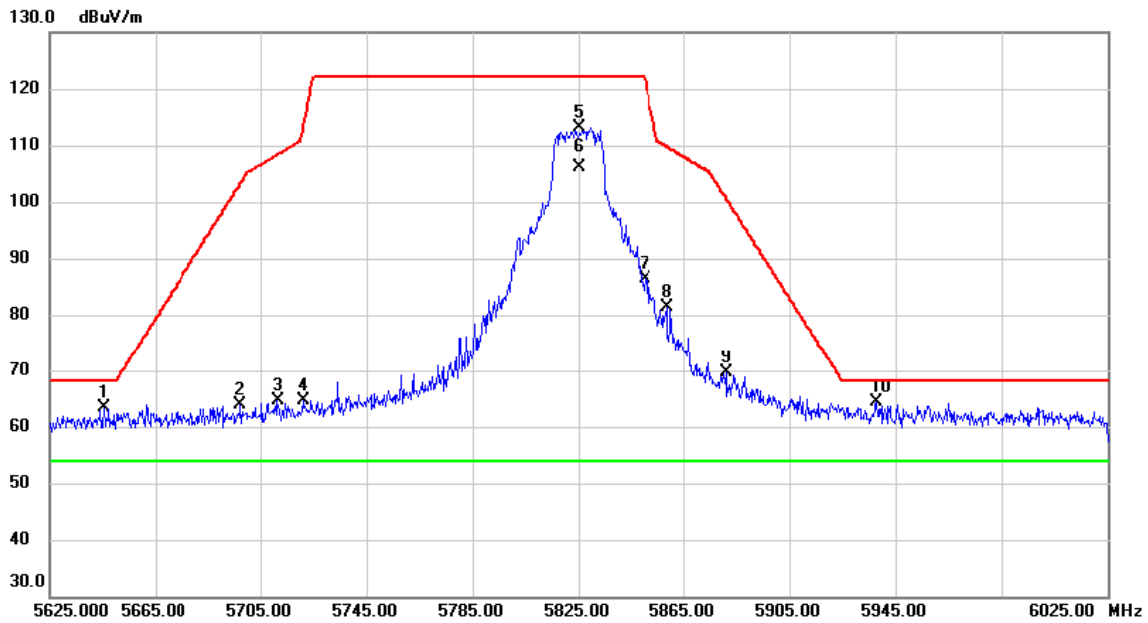


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5645.520	46.95	16.36	63.31	68.20	-4.89	peak	
2		5697.507	47.46	16.46	63.92	103.36	-39.44	peak	
3		5711.560	48.13	16.48	64.61	108.44	-43.83	peak	
4		5721.187	48.14	16.51	64.65	113.51	-48.86	peak	
5		5825.000	96.32	16.72	113.04	122.20	-9.16	peak	No Limit
6	*	5825.000	89.40	16.72	106.12	54.00	52.12	AVG	No Limit
7		5850.453	69.53	16.76	86.29	121.17	-34.88	peak	
8		5858.840	64.53	16.78	81.31	109.72	-28.41	peak	
9		5881.040	52.90	16.83	69.73	100.73	-31.00	peak	
10		5938.053	47.50	16.93	64.43	68.20	-3.77	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

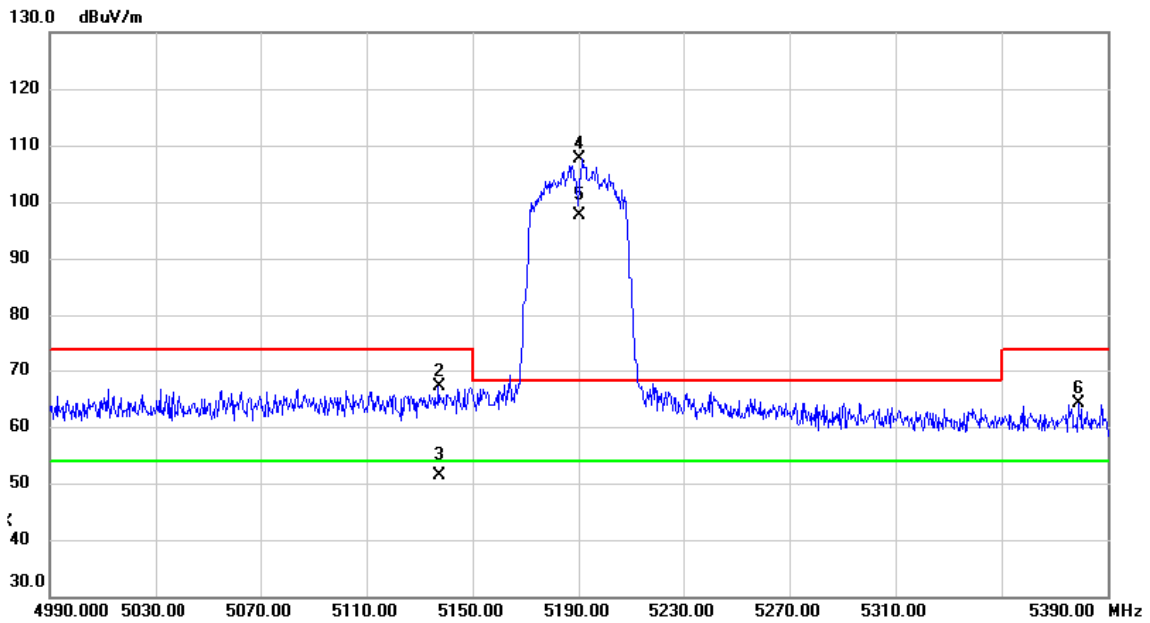


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2379.053	35.78	7.26	43.04	54.00	-10.96	AVG	
2		5137.253	51.78	15.23	67.01	74.00	-6.99	peak	
3		5137.253	36.03	15.23	51.26	54.00	-2.74	AVG	
4	X	5190.000	92.19	15.35	107.54	68.20	39.34	peak	No Limit
5	*	5190.000	82.37	15.35	97.72	54.00	43.72	AVG	No Limit
6		5379.053	48.23	15.78	64.01	74.00	-9.99	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

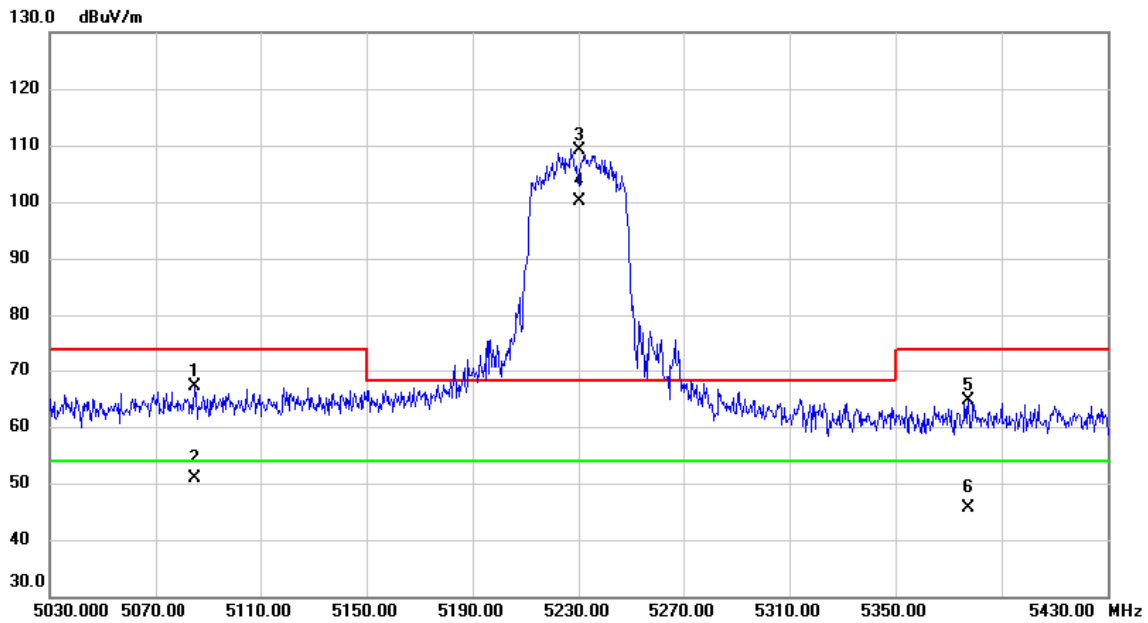

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5085.453	52.03	15.12	67.15	74.00	-6.85	peak	
2		5085.453	35.71	15.12	50.83	54.00	-3.17	AVG	
3	X	5230.000	93.81	15.44	109.25	68.20	41.05	peak	No Limit
4	*	5230.000	84.78	15.44	100.22	54.00	46.22	AVG	No Limit
5		5377.693	48.87	15.78	64.65	74.00	-9.35	peak	
6		5377.693	29.76	15.78	45.54	54.00	-8.46	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

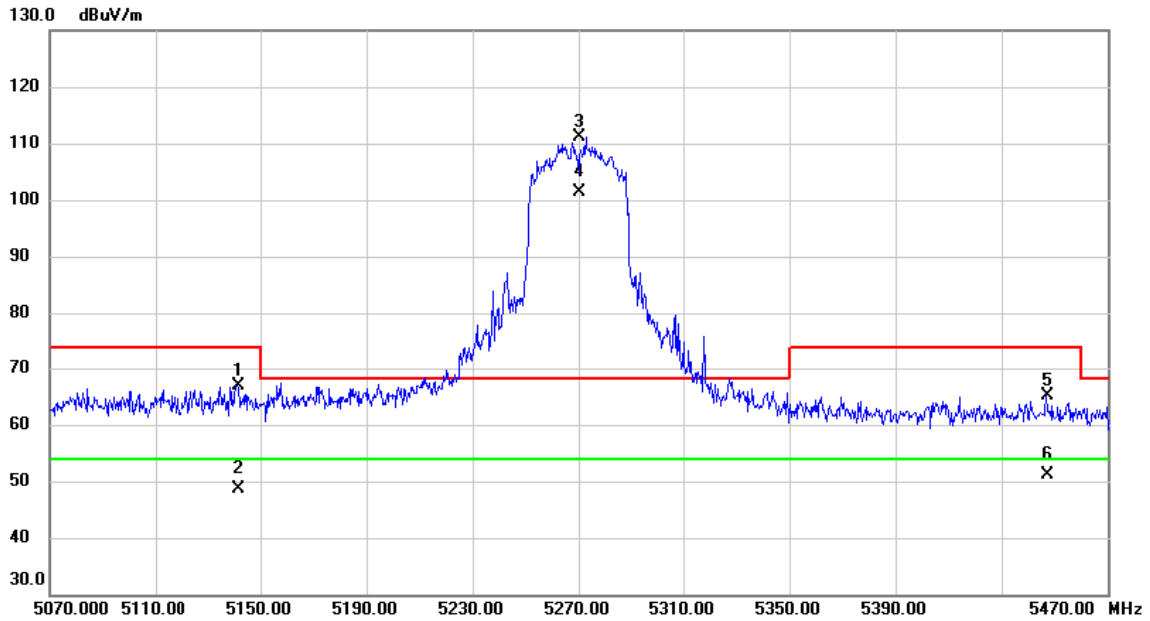


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5141.573	51.68	15.24	66.92	74.00	-7.08	peak	
2		5141.573	33.49	15.24	48.73	54.00	-5.27	AVG	
3	X	5270.000	95.57	15.55	111.12	68.20	42.92	peak	No Limit
4	*	5270.000	85.86	15.55	101.41	54.00	47.41	AVG	No Limit
5		5447.133	49.16	15.94	65.10	74.00	-8.90	peak	
6		5447.133	35.21	15.94	51.15	54.00	-2.85	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

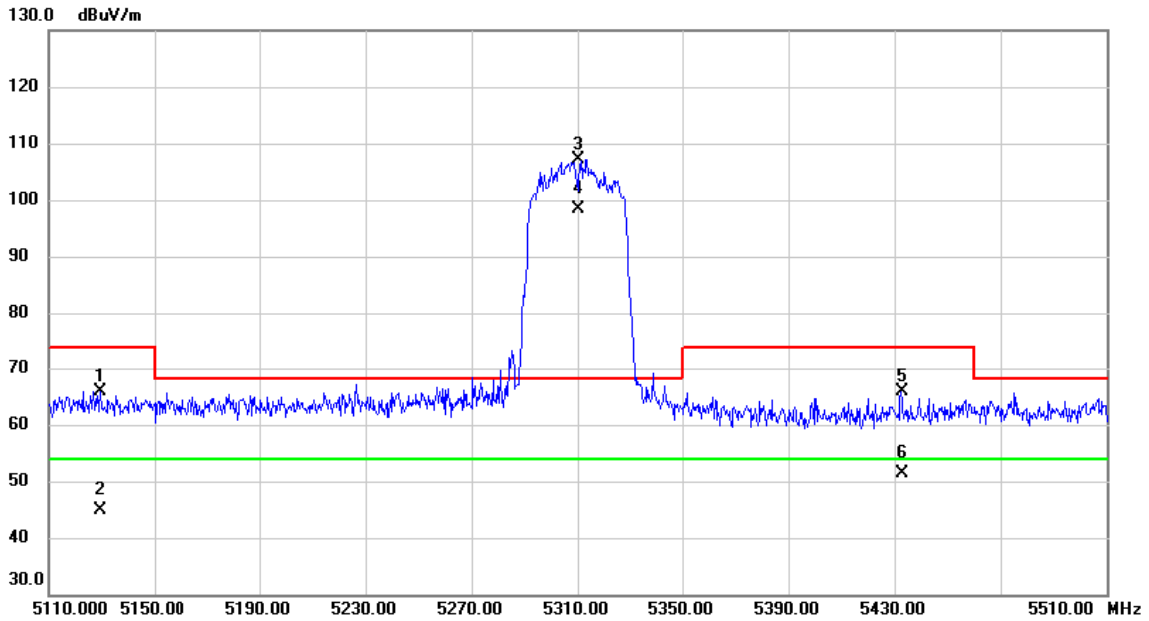


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5129.653	50.69	15.21	65.90	74.00	-8.10	peak	
2		5129.653	29.74	15.21	44.95	54.00	-9.05	AVG	
3	X	5310.000	91.53	15.63	107.16	68.20	38.96	peak	No Limit
4	*	5310.000	82.84	15.63	98.47	54.00	44.47	AVG	No Limit
5		5432.760	49.95	15.91	65.86	74.00	-8.14	peak	
6		5432.760	35.53	15.91	51.44	54.00	-2.56	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2C_ IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

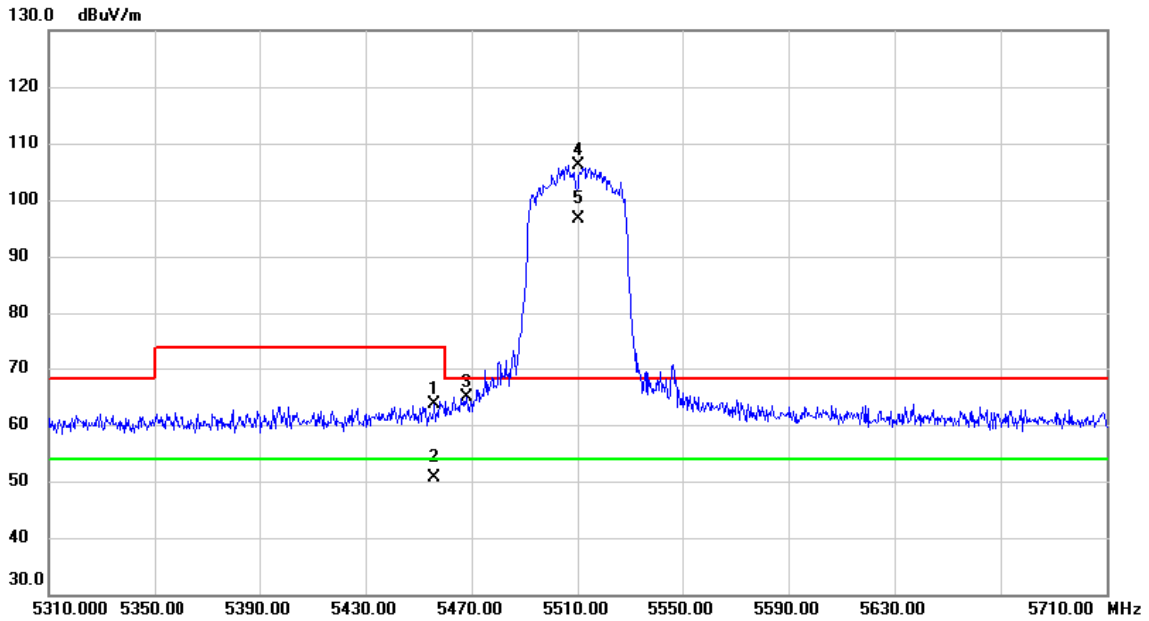

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.027	47.71	15.97	63.68	74.00	-10.32	peak	
2		5456.027	34.55	15.97	50.52	54.00	-3.48	AVG	
3		5468.400	48.99	15.99	64.98	68.20	-3.22	peak	
4	X	5510.000	89.93	16.08	106.01	68.20	37.81	peak	No Limit
5	*	5510.000	80.58	16.08	96.66	54.00	42.66	AVG	No Limit

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

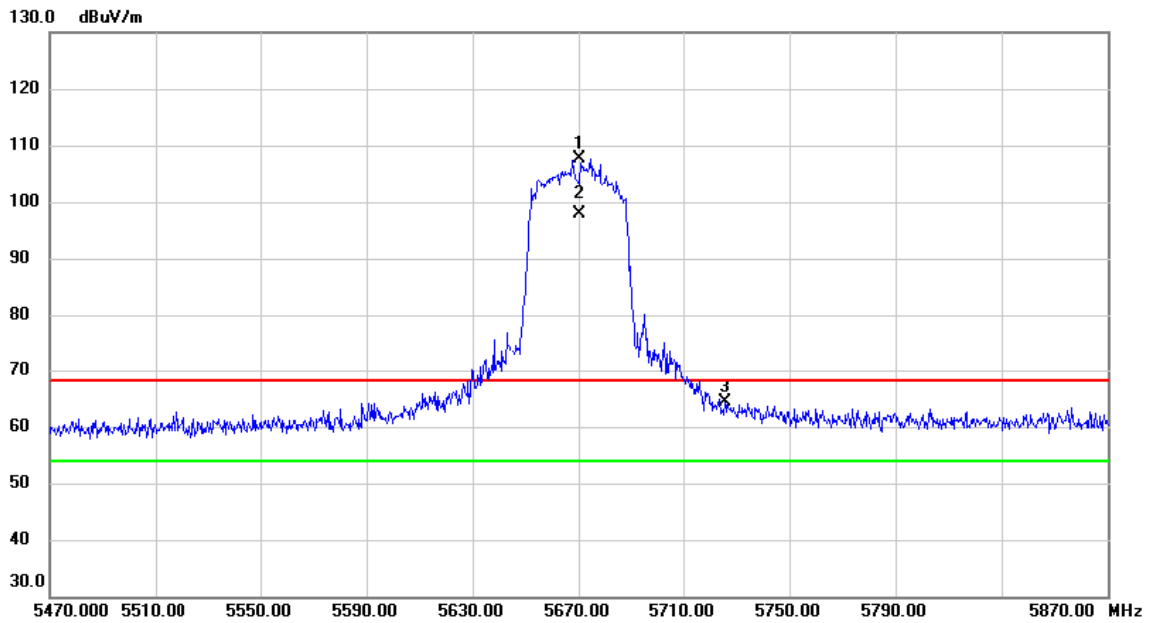


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5670.000	91.18	16.40	107.58	68.20	39.38	peak	No Limit
2	*	5670.000	81.42	16.40	97.82	54.00	43.82	AVG	No Limit
3		5725.707	47.89	16.51	64.40	68.20	-3.80	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

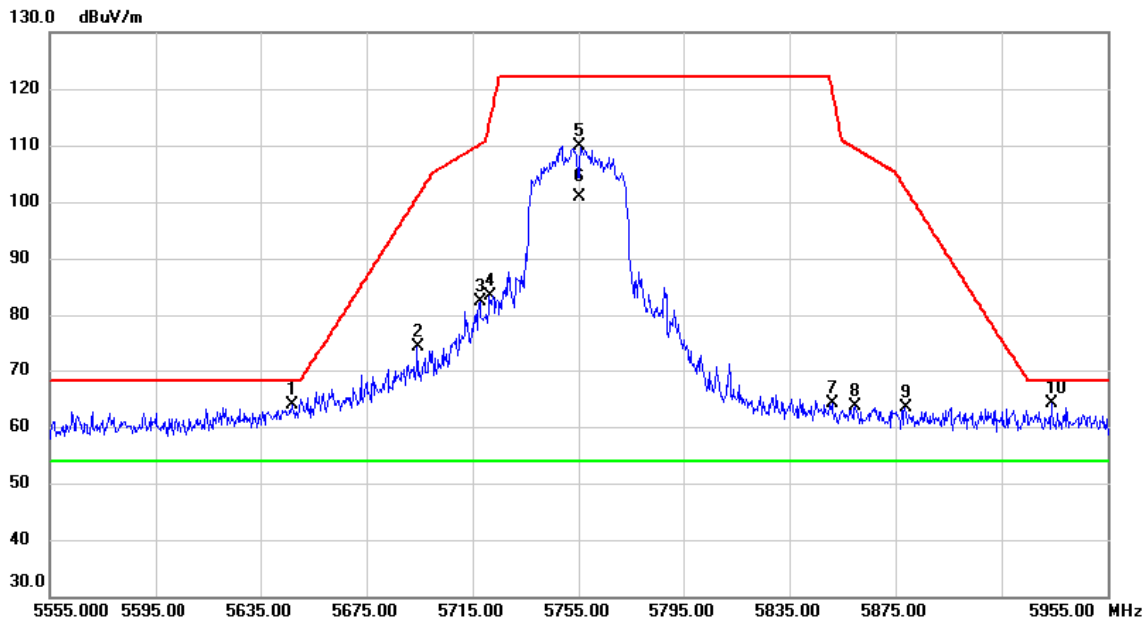


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.227	47.53	16.36	63.89	68.20	-4.31	peak	
2		5694.480	57.87	16.46	74.33	101.12	-26.79	peak	
3		5718.107	66.00	16.50	82.50	110.27	-27.77	peak	
4		5721.600	66.82	16.51	83.33	114.45	-31.12	peak	
5		5755.000	93.33	16.57	109.90	122.20	-12.30	peak	No Limit
6	*	5755.000	84.24	16.57	100.81	54.00	46.81	AVG	No Limit
7		5851.027	47.42	16.76	64.18	119.86	-55.68	peak	
8		5860.040	46.73	16.79	63.52	109.39	-45.87	peak	
9		5878.880	46.64	16.83	63.47	102.33	-38.86	peak	
10		5934.160	47.24	16.93	64.17	68.20	-4.03	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-3_ IEEE 802.11n (HT40)	Test Date	2021/6/21
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

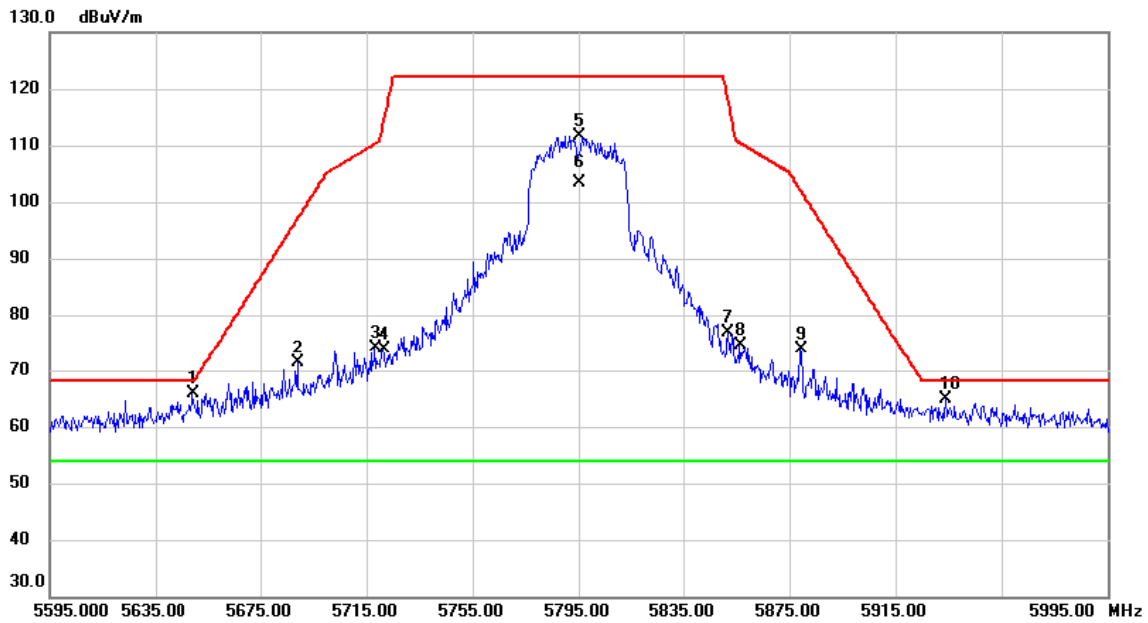

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5649.560	49.60	16.37	65.97	68.20	-2.23	peak	
2		5689.107	55.06	16.44	71.50	97.14	-25.64	peak	
3		5718.387	57.69	16.50	74.19	110.35	-36.16	peak	
4		5721.640	57.36	16.51	73.87	114.54	-40.67	peak	
5		5795.000	95.00	16.65	111.65	122.20	-10.55	peak	No Limit
6	*	5795.000	86.65	16.65	103.30	54.00	49.30	AVG	No Limit
7		5852.027	60.03	16.77	76.80	117.58	-40.78	peak	
8		5856.373	57.79	16.78	74.57	110.42	-35.85	peak	
9		5879.387	56.99	16.83	73.82	101.95	-28.13	peak	
10		5934.200	48.04	16.93	64.97	68.20	-3.23	peak	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-1_IEEE 802.11n (HT80)	Test Date	2021/6/21
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

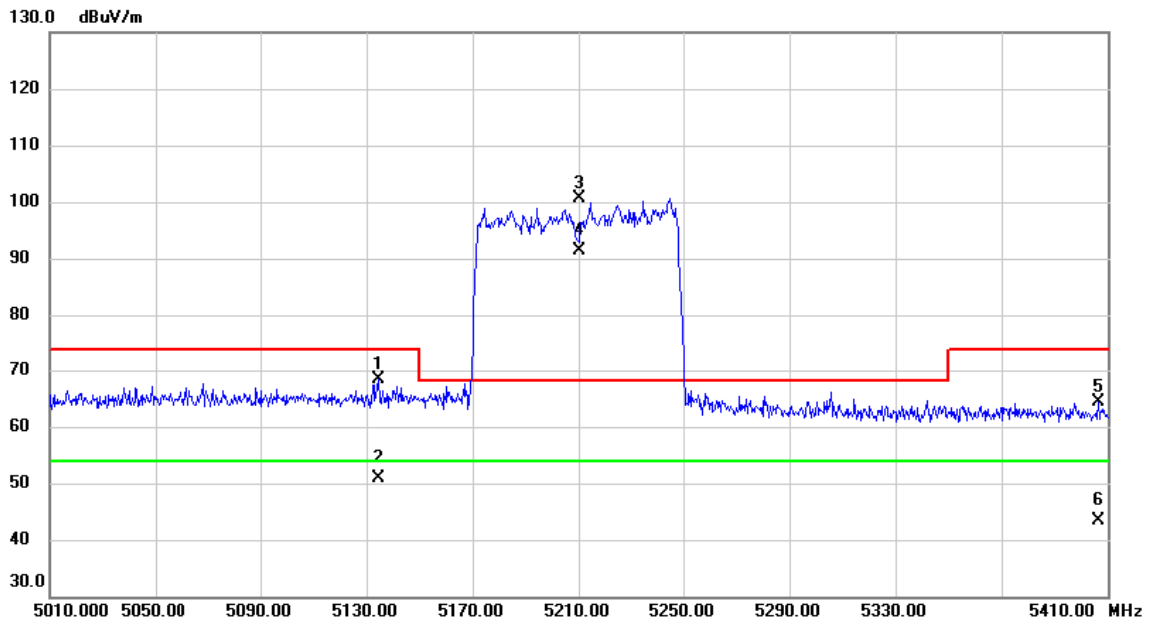

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5134.600	53.05	15.22	68.27	74.00	-5.73	peak	
2		5134.600	35.54	15.22	50.76	54.00	-3.24	AVG	
3	X	5210.000	85.26	15.40	100.66	68.20	32.46	peak	No Limit
4	*	5210.000	75.94	15.40	91.34	54.00	37.34	AVG	No Limit
5		5406.680	48.49	15.85	64.34	74.00	-9.66	peak	
6		5406.680	27.44	15.85	43.29	54.00	-10.71	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT80)	Test Date	2021/6/21
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

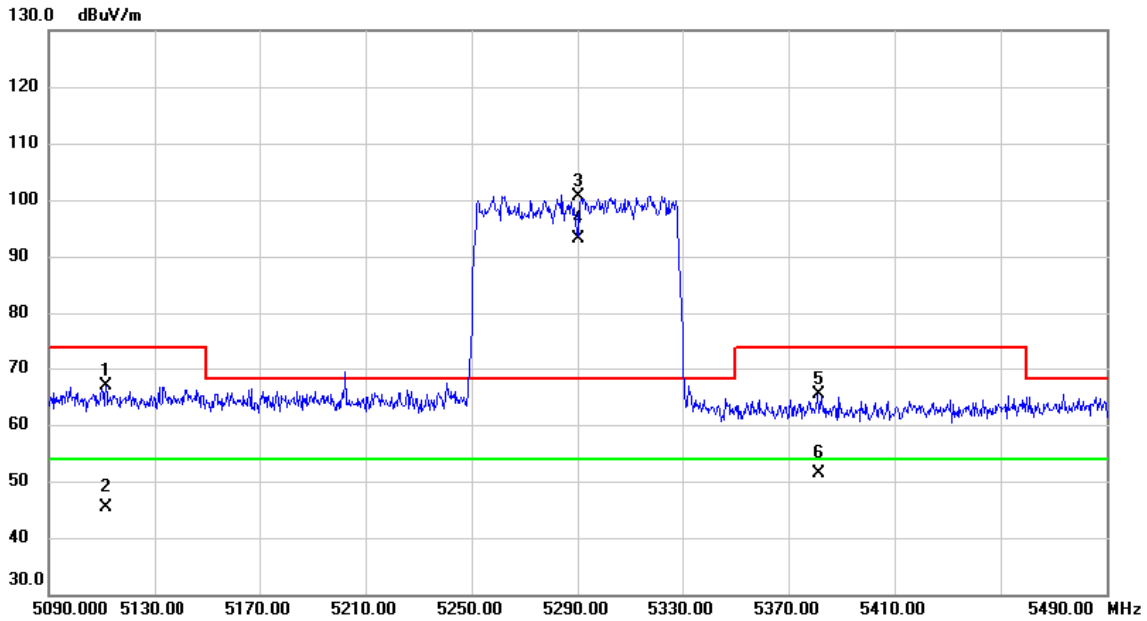


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5111.827	51.77	15.17	66.94	74.00	-7.06	peak	
2		5111.827	30.25	15.17	45.42	54.00	-8.58	AVG	
3	X	5290.000	85.16	15.59	100.75	68.20	32.55	peak	No Limit
4	*	5290.000	77.48	15.59	93.07	54.00	39.07	AVG	No Limit
5		5381.213	49.70	15.80	65.50	74.00	-8.50	peak	
6		5381.213	35.69	15.80	51.49	54.00	-2.51	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11n (HT80)	Test Date	2021/6/21
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

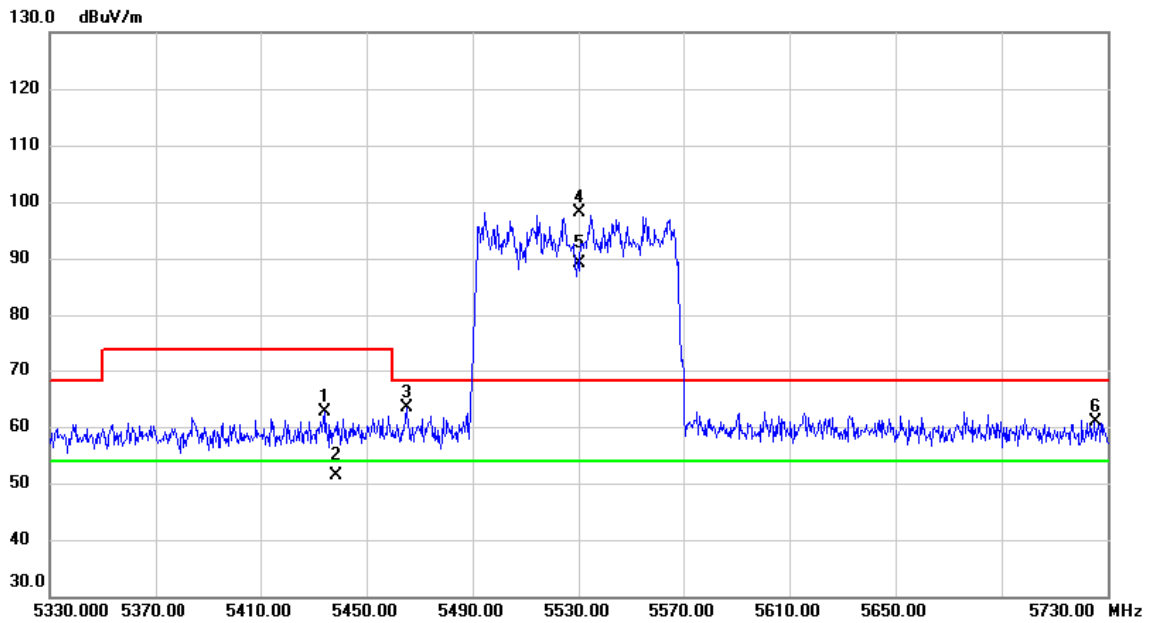


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5434.467	46.71	15.91	62.62	74.00	-11.38	peak	
2		5438.762	35.35	15.93	51.28	54.00	-2.72	AVG	
3		5465.253	47.42	15.99	63.41	68.20	-4.79	peak	
4	X	5530.000	81.97	16.12	98.09	68.20	29.89	peak	No Limit
5	*	5530.000	73.09	16.12	89.21	54.00	35.21	AVG	No Limit
6		5725.427	44.27	16.51	60.78	68.20	-7.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.




Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/6/21
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

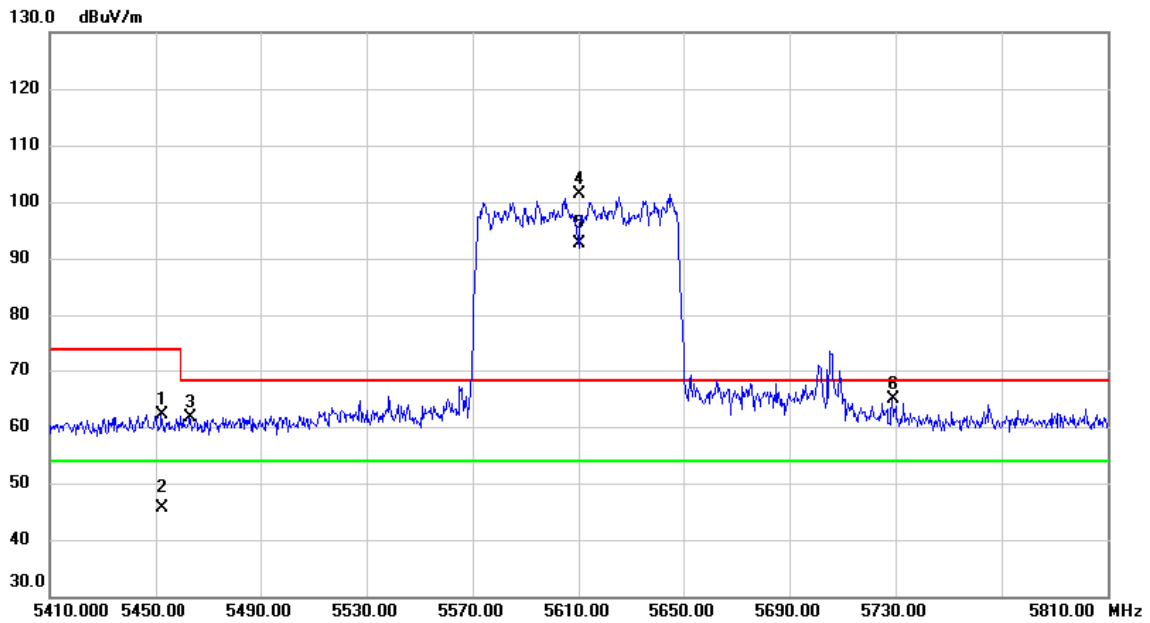

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.160	46.26	15.95	62.21	74.00	-11.79	peak	
2		5452.160	29.77	15.95	45.72	54.00	-8.28	AVG	
3		5463.533	45.68	15.98	61.66	68.20	-6.54	peak	
4	X	5610.000	85.19	16.29	101.48	68.20	33.28	peak	No Limit
5	*	5610.000	76.33	16.29	92.62	54.00	38.62	AVG	No Limit
6		5728.987	48.24	16.52	64.76	68.20	-3.44	peak	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT80)	Test Date	2021/6/21
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

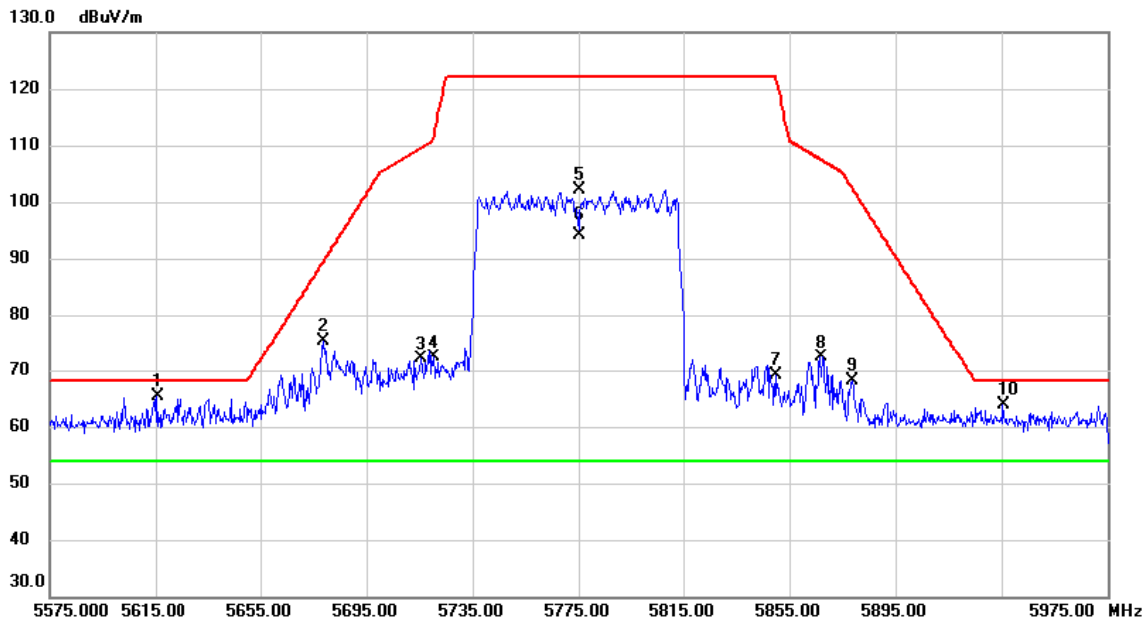


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5615.560	48.99	16.30	65.29	68.20	-2.91	peak	
2		5678.960	58.96	16.43	75.39	89.63	-14.24	peak	
3		5715.720	55.67	16.49	72.16	109.60	-37.44	peak	
4		5720.360	55.95	16.50	72.45	111.62	-39.17	peak	
5		5775.000	85.42	16.61	102.03	122.20	-20.17	peak	No Limit
6	*	5775.000	77.59	16.61	94.20	54.00	40.20	AVG	No Limit
7		5850.027	52.43	16.76	69.19	122.14	-52.95	peak	
8		5866.947	55.54	16.79	72.33	107.45	-35.12	peak	
9		5878.613	51.39	16.82	68.21	102.53	-34.32	peak	
10		5935.747	47.02	16.93	63.95	68.20	-4.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

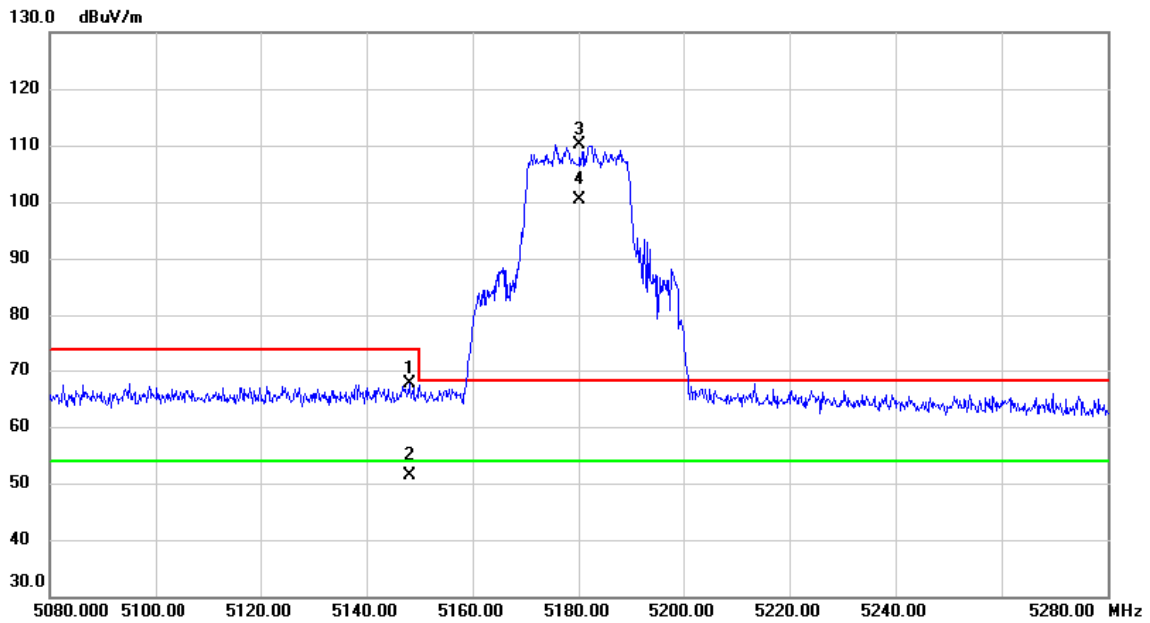


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.027	52.27	15.26	67.53	74.00	-6.47	peak	
2		5148.027	36.13	15.26	51.39	54.00	-2.61	AVG	
3	X	5180.000	94.85	15.33	110.18	68.20	41.98	peak	No Limit
4	*	5180.000	85.15	15.33	100.48	54.00	46.48	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

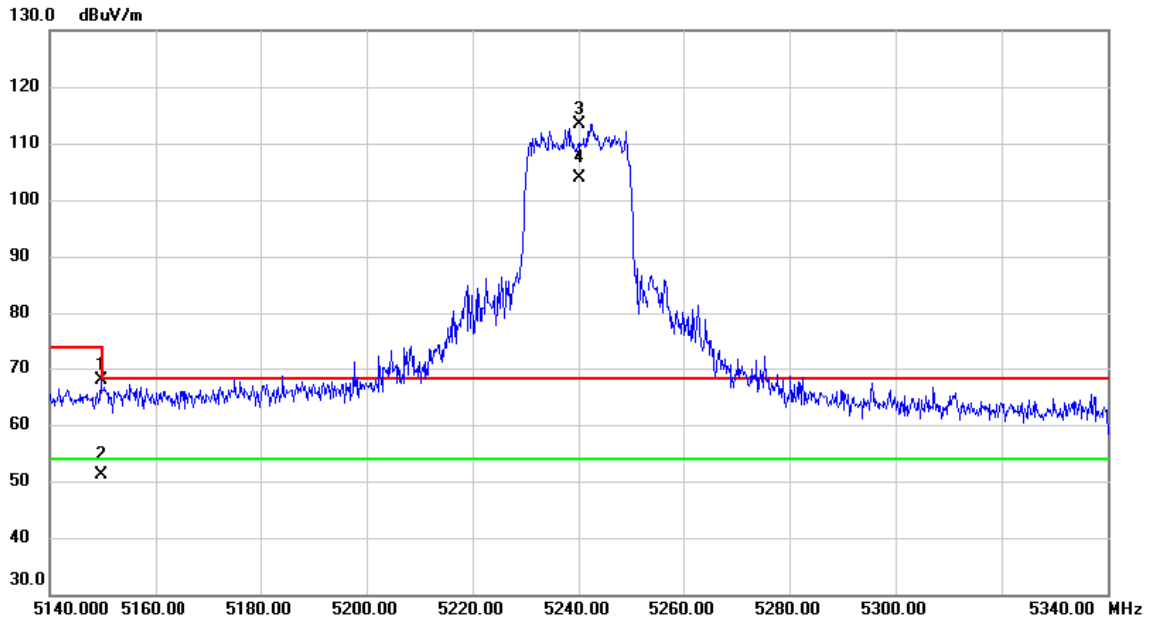


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.760	52.58	15.26	67.84	74.00	-6.16	peak	
2		5149.760	35.98	15.26	51.24	54.00	-2.76	AVG	
3	X	5240.000	97.87	15.47	113.34	68.20	45.14	peak	No Limit
4	*	5240.000	88.42	15.47	103.89	54.00	49.89	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

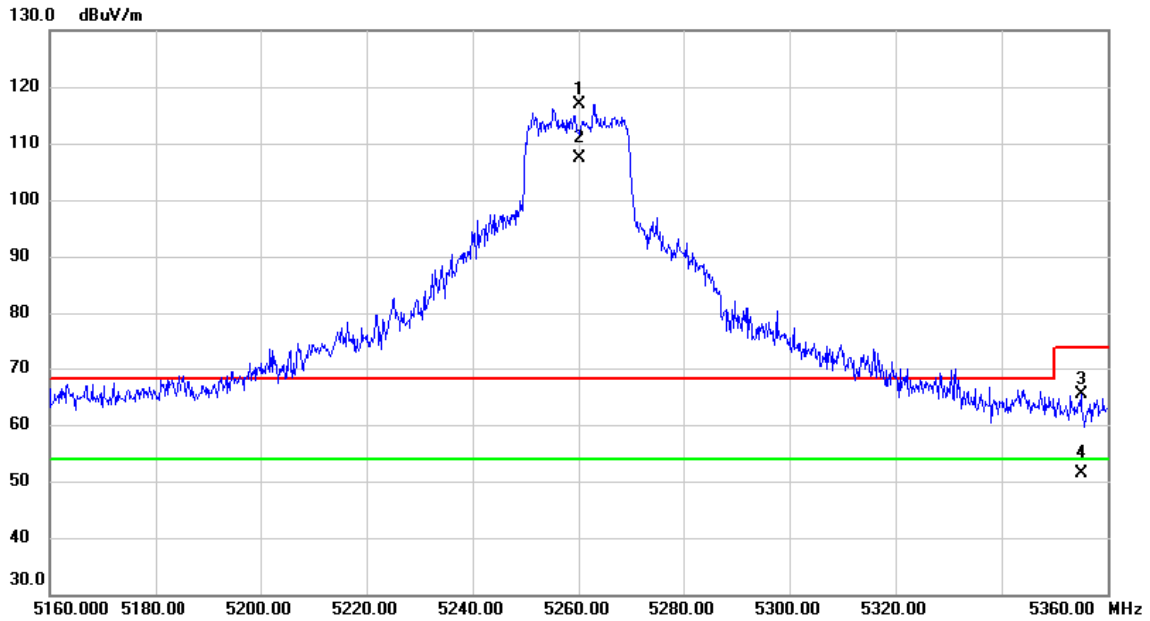


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	101.29	15.52	116.81	68.20	48.61	peak	No Limit
2	*	5260.000	91.92	15.52	107.44	54.00	53.44	AVG	No Limit
3		5355.133	49.74	15.73	65.47	74.00	-8.53	peak	
4		5355.133	35.71	15.73	51.44	54.00	-2.56	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

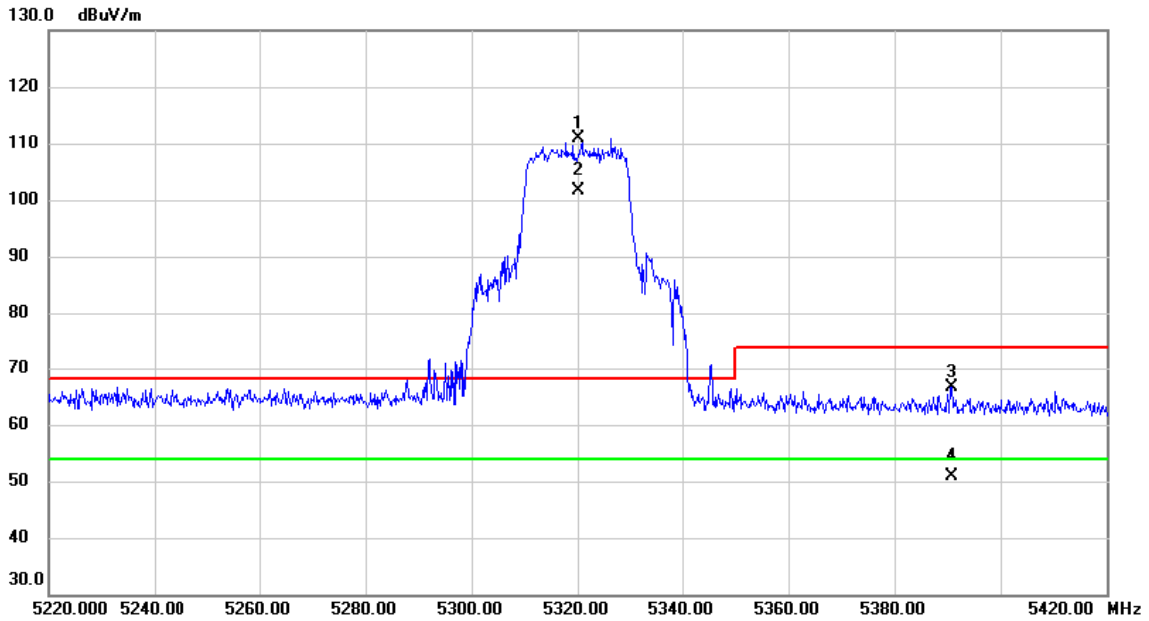


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	95.25	15.65	110.90	68.20	42.70	peak	No Limit
2	*	5320.000	86.02	15.65	101.67	54.00	47.67	AVG	No Limit
3		5390.800	50.91	15.81	66.72	74.00	-7.28	peak	
4		5390.800	35.03	15.81	50.84	54.00	-3.16	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

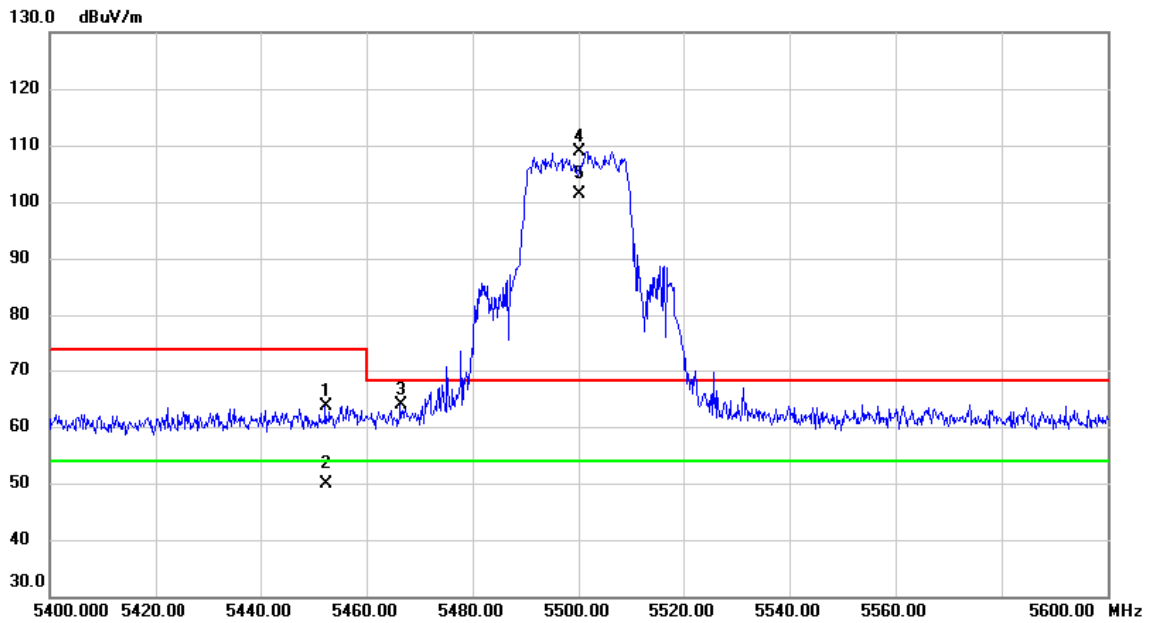


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.293	47.75	15.95	63.70	74.00	-10.30	peak	
2		5452.293	34.04	15.95	49.99	54.00	-4.01	AVG	
3		5466.520	47.84	15.99	63.83	68.20	-4.37	peak	
4	X	5500.000	92.79	16.06	108.85	68.20	40.65	peak	No Limit
5	*	5500.000	85.27	16.06	101.33	54.00	47.33	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

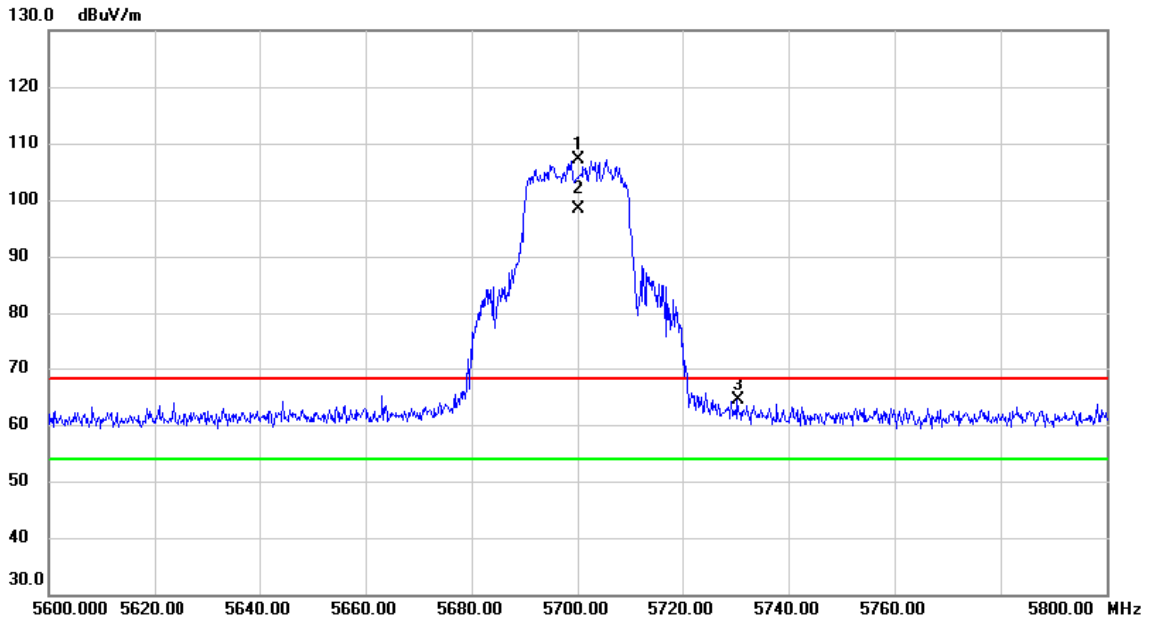


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	90.71	16.47	107.18	68.20	38.98	peak	No Limit
2	*	5700.000	81.80	16.47	98.27	54.00	44.27	AVG	No Limit
3		5730.453	47.90	16.52	64.42	68.20	-3.78	peak	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

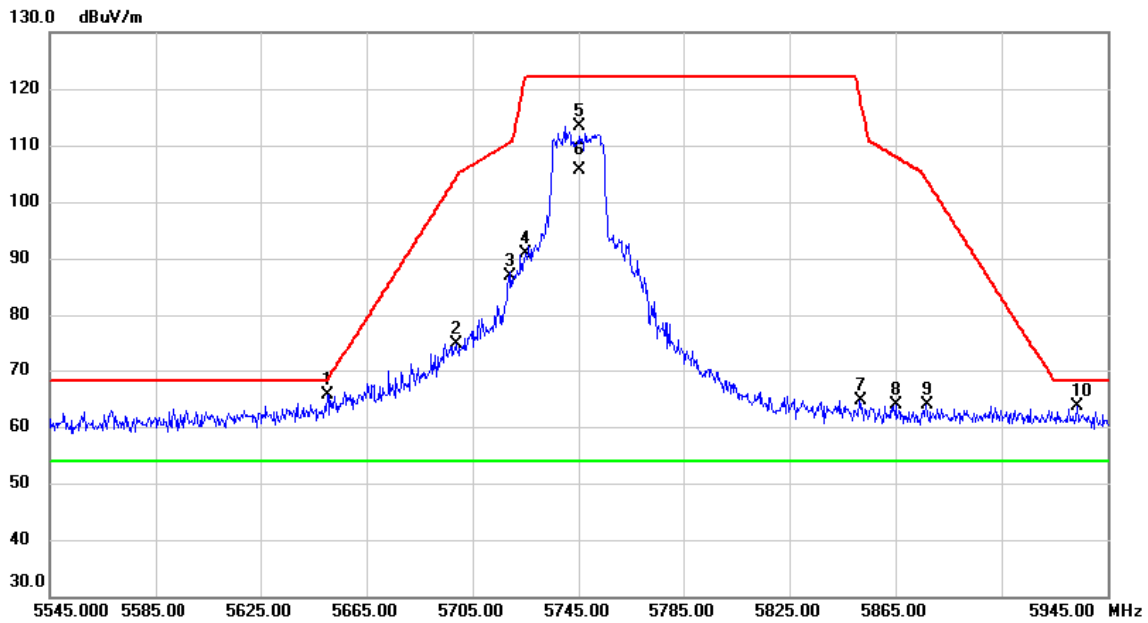


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5650.587	49.35	16.37	65.72	68.63	-2.91	peak	
2		5698.933	58.47	16.47	74.94	104.41	-29.47	peak	
3		5718.893	70.30	16.50	86.80	110.49	-23.69	peak	
4		5725.027	74.29	16.51	90.80	122.20	-31.40	peak	
5		5745.000	96.71	16.55	113.26	122.20	-8.94	peak	No Limit
6	*	5745.000	89.00	16.55	105.55	54.00	51.55	AVG	No Limit
7		5851.760	47.88	16.76	64.64	118.19	-53.55	peak	
8		5865.213	47.16	16.80	63.96	107.94	-43.98	peak	
9		5876.867	47.12	16.82	63.94	103.82	-39.88	peak	
10		5933.547	46.61	16.93	63.54	68.20	-4.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/6/21
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

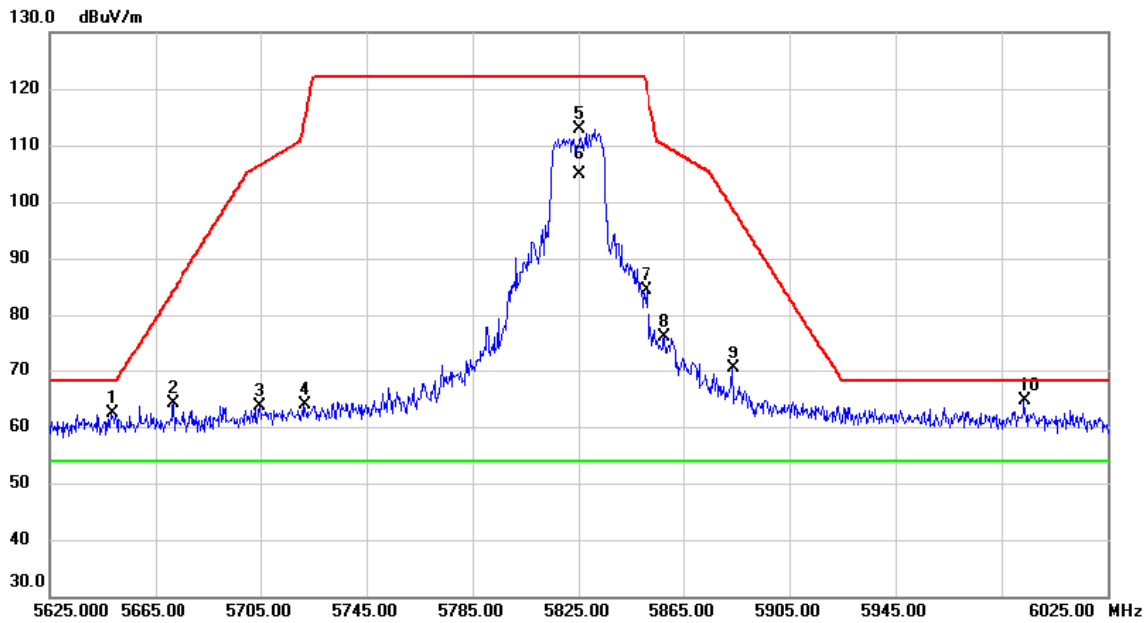


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.573	45.93	16.37	62.30	68.20	-5.90	peak	
2		5671.813	47.84	16.41	64.25	84.34	-20.09	peak	
3		5704.853	47.24	16.47	63.71	106.56	-42.85	peak	
4		5721.640	47.37	16.51	63.88	114.54	-50.66	peak	
5		5825.000	96.21	16.72	112.93	122.20	-9.27	peak	
6	*	5825.000	88.09	16.72	104.81	54.00	50.81	AVG	No Limit
7		5850.893	67.68	16.76	84.44	120.16	-35.72	peak	
8		5857.880	59.25	16.78	76.03	109.99	-33.96	peak	
9		5883.693	53.42	16.84	70.26	98.77	-28.51	peak	
10		5993.747	47.53	17.04	64.57	68.20	-3.63	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

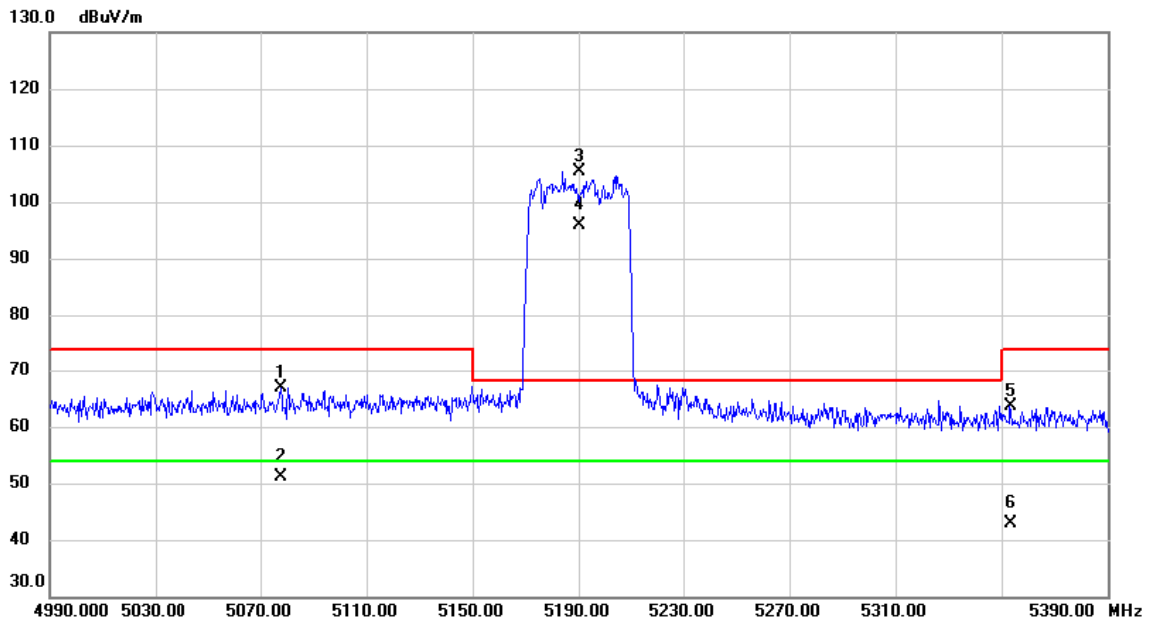


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5077.880	51.79	15.10	66.89	74.00	-7.11	peak	
2		5077.880	35.93	15.10	51.03	54.00	-2.97	AVG	
3	X	5190.000	89.94	15.35	105.29	68.20	37.09	peak	No Limit
4	*	5190.000	80.53	15.35	95.88	54.00	41.88	AVG	No Limit
5		5353.573	47.89	15.73	63.62	74.00	-10.38	peak	
6		5353.573	27.16	15.73	42.89	54.00	-11.11	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

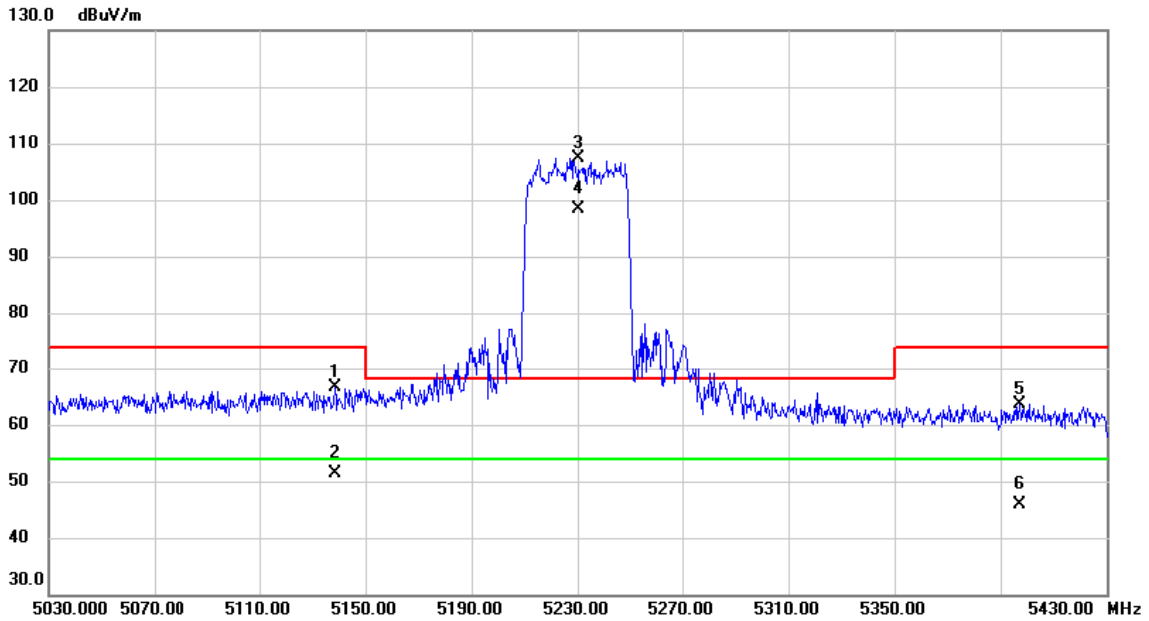


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5138.747	51.29	15.23	66.52	74.00	-7.48	peak	
2		5138.747	36.18	15.23	51.41	54.00	-2.59	AVG	
3	X	5230.000	92.06	15.44	107.50	68.20	39.30	peak	No Limit
4	*	5230.000	83.01	15.44	98.45	54.00	44.45	AVG	No Limit
5		5397.400	47.86	15.83	63.69	74.00	-10.31	peak	
6		5397.400	30.11	15.83	45.94	54.00	-8.06	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2A_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

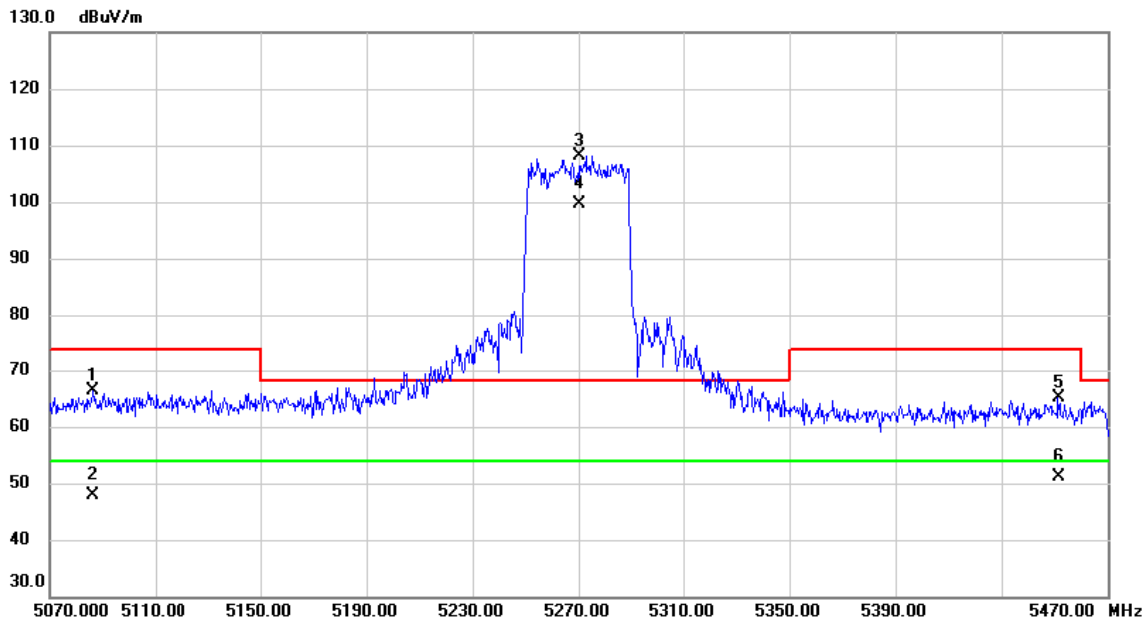

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5086.427	51.31	15.13	66.44	74.00	-7.56	peak	
2	X	5086.427	32.86	15.13	47.99	54.00	-6.01	AVG	
3	X	5270.000	92.68	15.55	108.23	68.20	40.03	peak	No Limit
4	*	5270.000	84.02	15.55	99.57	54.00	45.57	AVG	No Limit
5	X	5451.507	49.30	15.95	65.25	74.00	-8.75	peak	
6	X	5451.507	35.13	15.95	51.08	54.00	-2.92	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

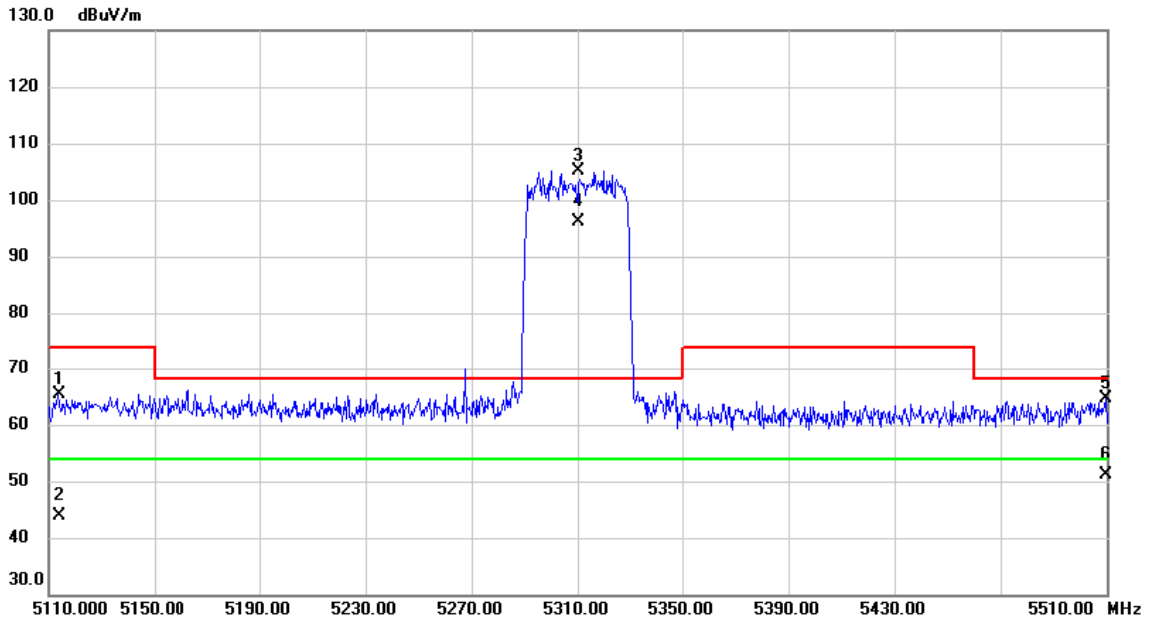


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5113.813	50.24	15.17	65.41	74.00	-8.59	peak	
2		5113.813	28.79	15.17	43.96	54.00	-10.04	AVG	
3	X	5310.000	89.47	15.63	105.10	68.20	36.90	peak	No Limit
4	*	5310.000	80.41	15.63	96.04	54.00	42.04	AVG	No Limit
5		5509.880	48.50	16.08	64.58	68.20	-3.62	peak	
6		5509.880	35.17	16.08	51.25	54.00	-2.75	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

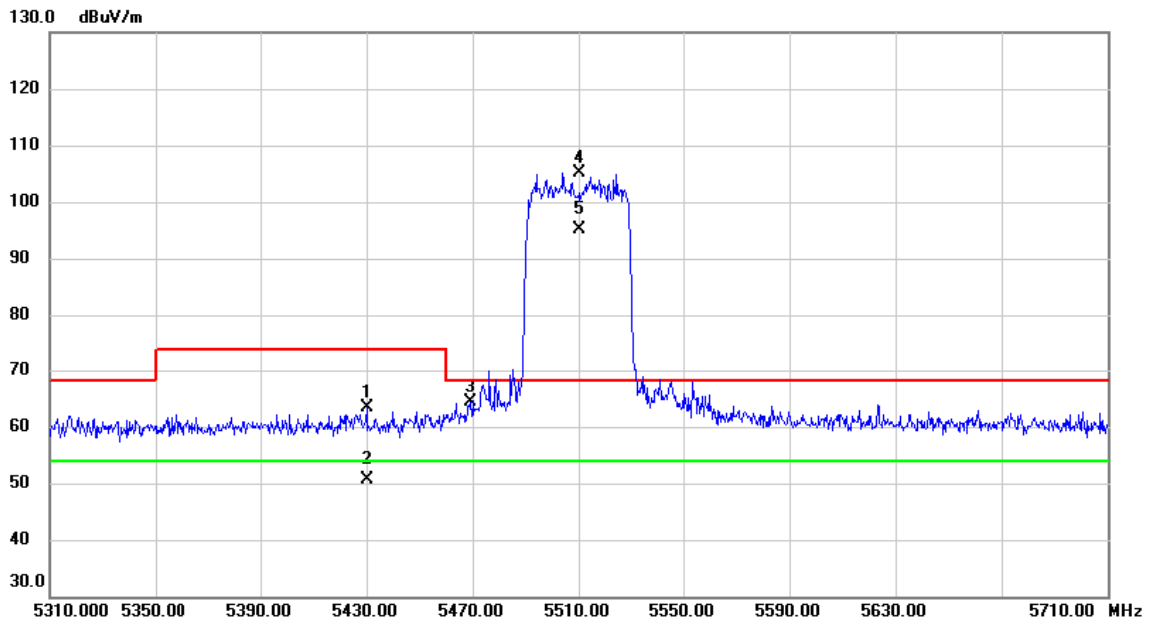


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5430.280	47.38	15.90	63.28	74.00	-10.72	peak	
2		5430.280	34.64	15.90	50.54	54.00	-3.46	AVG	
3		5469.387	48.37	15.99	64.36	68.20	-3.84	peak	
4	X	5510.000	88.95	16.08	105.03	68.20	36.83	peak	No Limit
5	*	5510.000	79.17	16.08	95.25	54.00	41.25	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

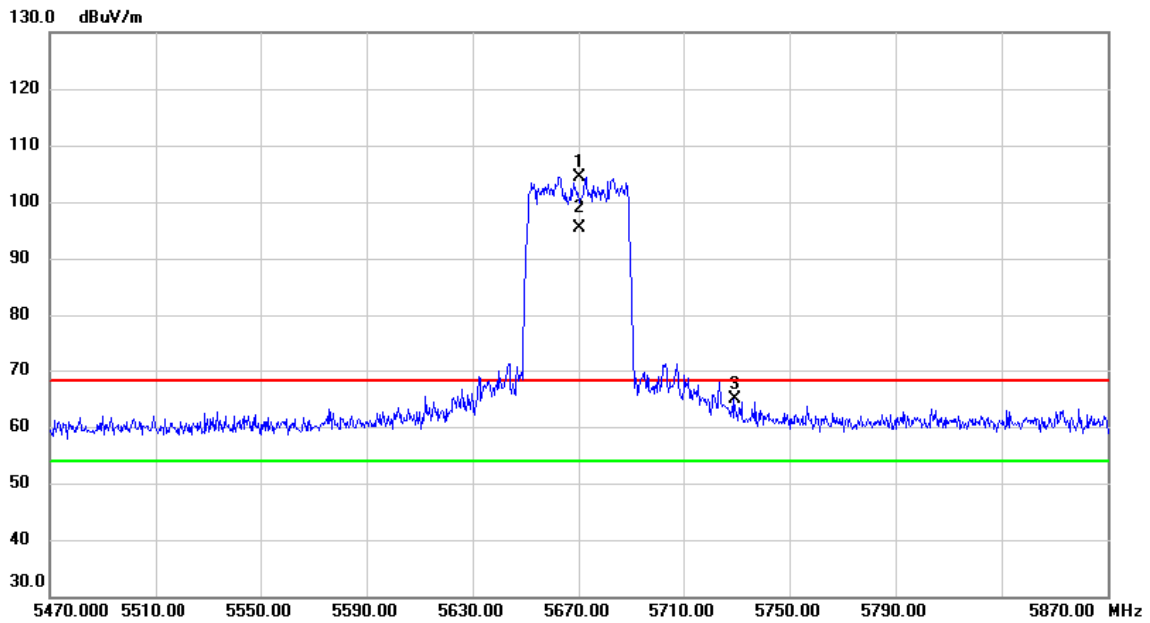

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5670.000	87.92	16.40	104.32	68.20	36.12	peak	No Limit
2	*	5670.000	78.93	16.40	95.33	54.00	41.33	AVG	No Limit
3		5729.467	48.28	16.52	64.80	68.20	-3.40	peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-3_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

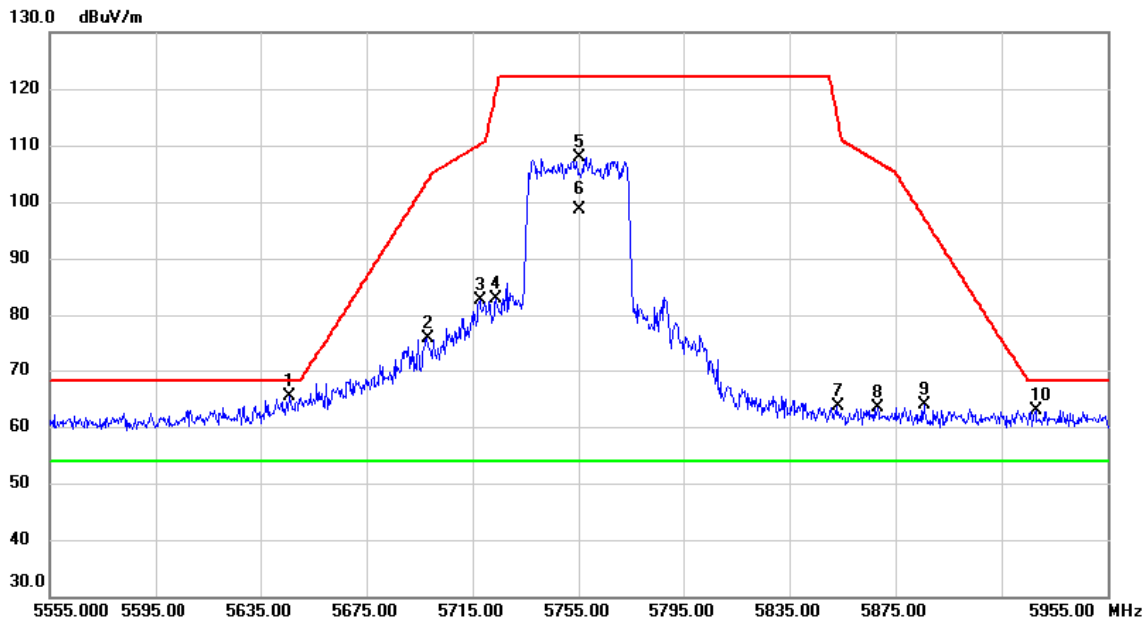


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5646.080	48.97	16.36	65.33	68.20	-2.87	peak	
2		5698.000	59.40	16.46	75.86	103.72	-27.86	peak	
3		5718.040	66.24	16.50	82.74	110.25	-27.51	peak	
4		5723.813	66.36	16.50	82.86	119.49	-36.63	peak	
5		5755.000	91.21	16.57	107.78	122.20	-14.42	peak	No Limit
6	*	5755.000	82.01	16.57	98.58	54.00	44.58	AVG	No Limit
7		5853.160	46.77	16.77	63.54	115.00	-51.46	peak	
8		5868.347	46.55	16.80	63.35	107.06	-43.71	peak	
9		5886.067	47.06	16.83	63.89	97.01	-33.12	peak	
10		5928.133	45.99	16.91	62.90	68.20	-5.30	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW40)	Test Date	2021/6/21
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

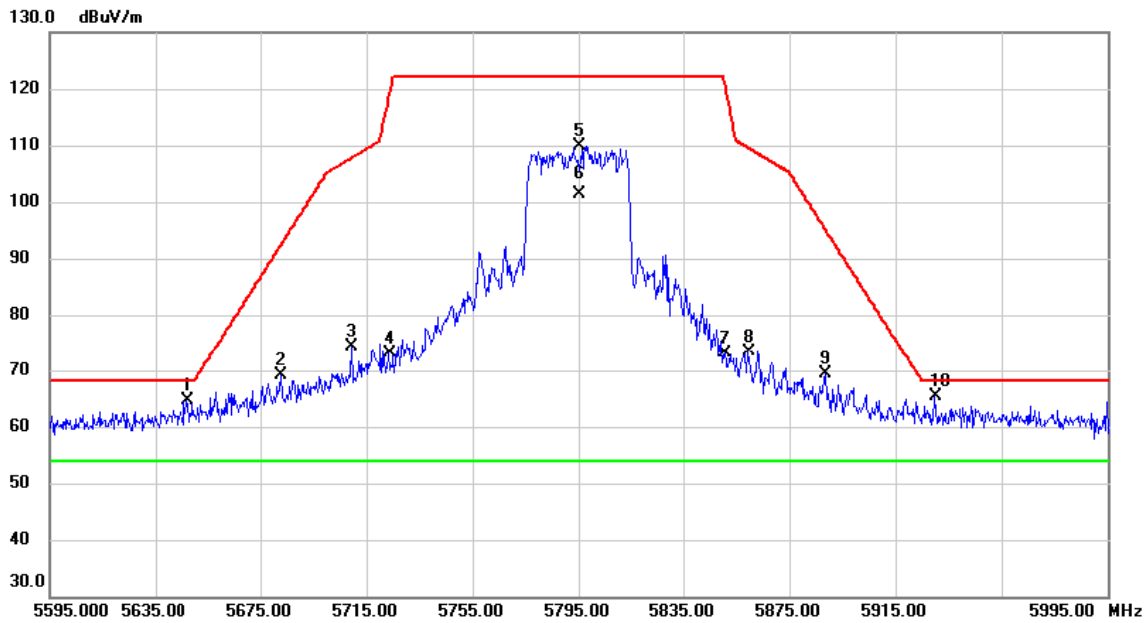


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.280	48.20	16.36	64.56	68.20	-3.64	peak	
2		5682.880	52.78	16.44	69.22	92.53	-23.31	peak	
3		5709.627	57.82	16.48	74.30	107.90	-33.60	peak	
4		5723.680	56.70	16.50	73.20	119.19	-45.99	peak	
5		5795.000	93.20	16.65	109.85	122.20	-12.35	peak	No Limit
6	*	5795.000	84.62	16.65	101.27	54.00	47.27	AVG	No Limit
7		5850.787	56.27	16.76	73.03	120.41	-47.38	peak	
8		5859.680	56.69	16.79	73.48	109.49	-36.01	peak	
9		5888.720	52.49	16.84	69.33	95.05	-25.72	peak	
10		5930.080	48.36	16.92	65.28	68.20	-2.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-1_IEEE 802.11ax (HEW80)	Test Date	2021/6/21
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

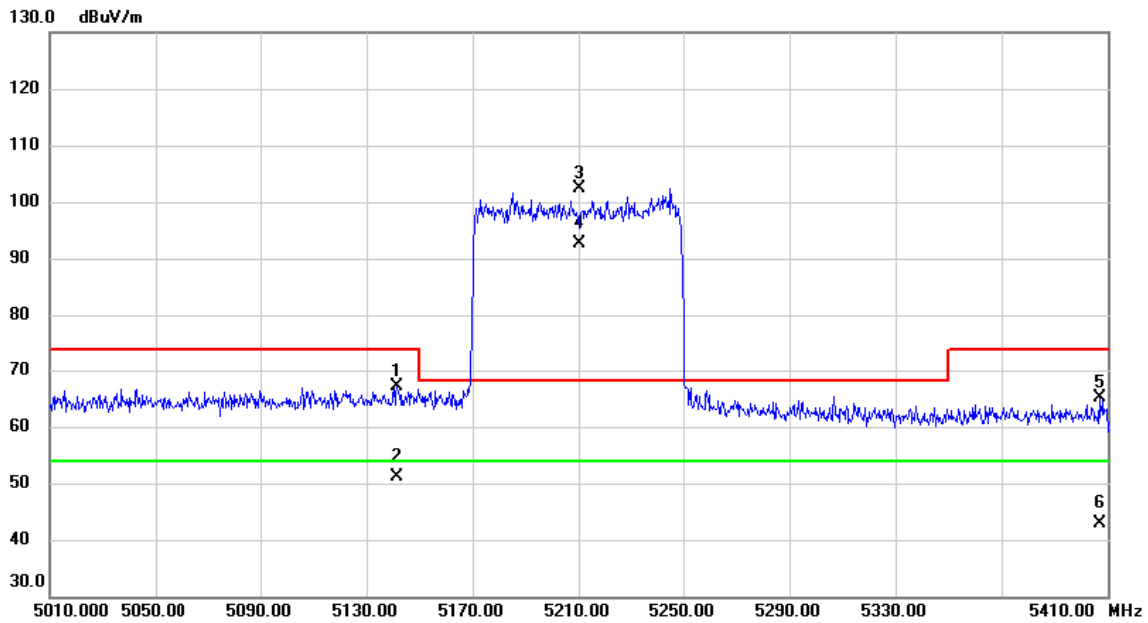

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5141.707	51.83	15.25	67.08	74.00	-6.92	peak	
2		5141.707	35.89	15.25	51.14	54.00	-2.86	AVG	
3	X	5210.000	86.93	15.40	102.33	68.20	34.13	peak	No Limit
4	*	5210.000	77.27	15.40	92.67	54.00	38.67	AVG	No Limit
5		5406.947	49.36	15.85	65.21	74.00	-8.79	peak	
6		5406.947	27.09	15.85	42.94	54.00	-11.06	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/6/21
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

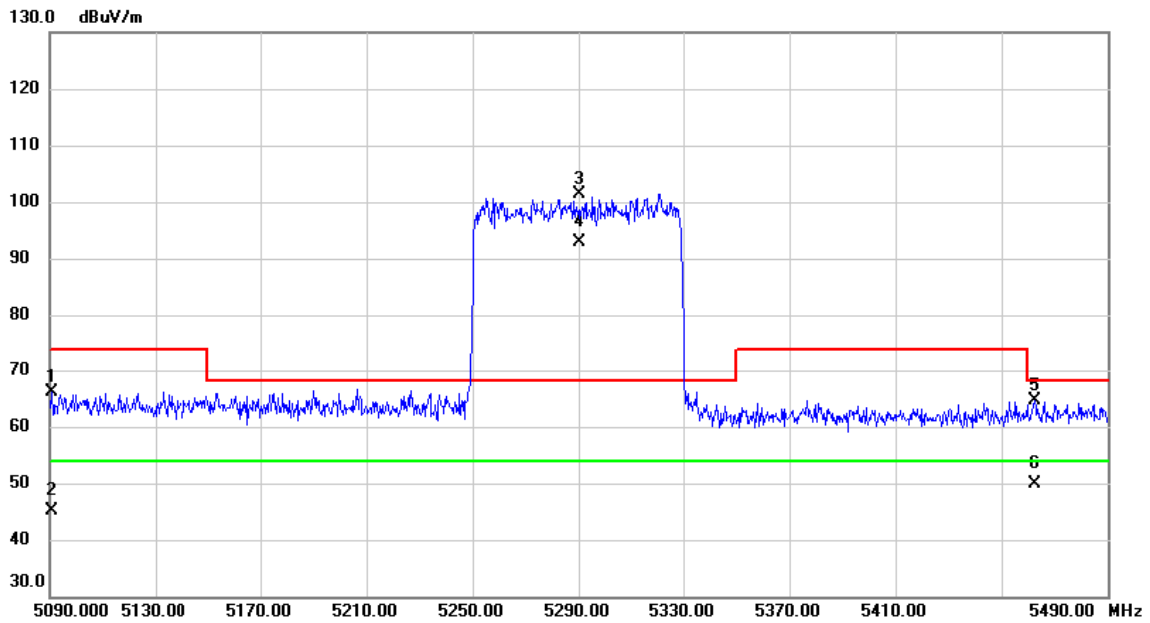

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5090.973	51.11	15.13	66.24	74.00	-7.76	peak	
2		5090.973	29.97	15.13	45.10	54.00	-8.90	AVG	
3	X	5290.000	85.90	15.59	101.49	68.20	33.29	peak	No Limit
4	*	5290.000	77.23	15.59	92.82	54.00	38.82	AVG	No Limit
5		5462.413	48.62	15.98	64.60	68.20	-3.60	peak	
6		5462.413	34.00	15.98	49.98	54.00	-4.02	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2C_ IEEE 802.11ax (HEW80)	Test Date	2021/6/21
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

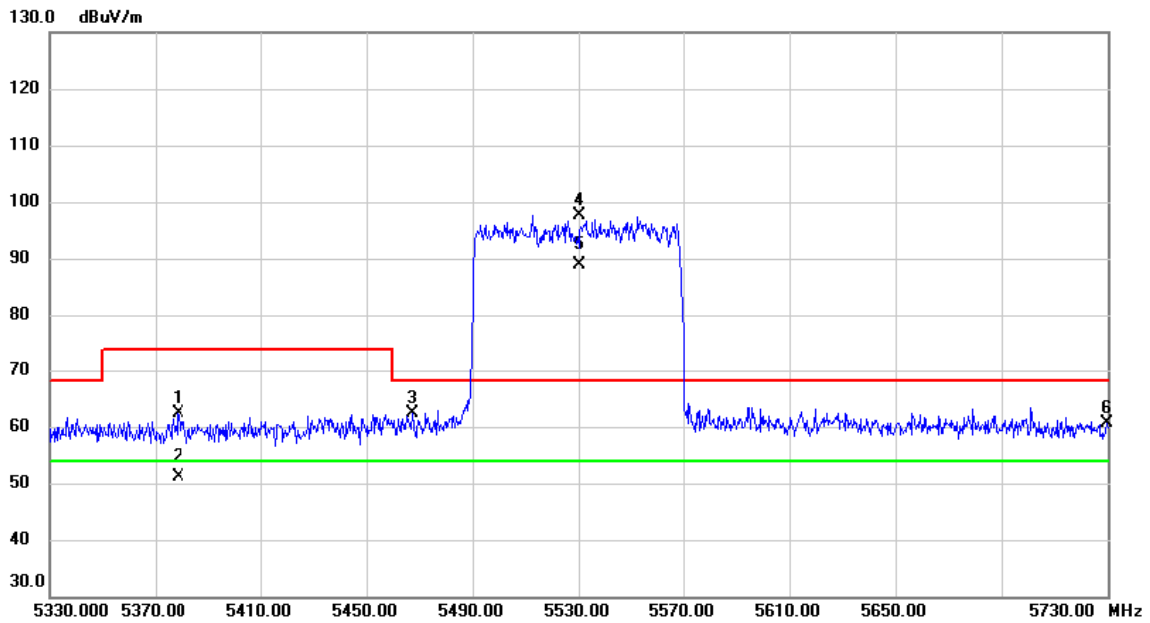

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5378.787	46.53	15.78	62.31	74.00	-11.69	peak	
2		5378.787	35.40	15.78	51.18	54.00	-2.82	AVG	
3		5467.520	46.47	15.99	62.46	68.20	-5.74	peak	
4	X	5530.000	81.43	16.12	97.55	68.20	29.35	peak	No Limit
5	*	5530.000	72.84	16.12	88.96	54.00	34.96	AVG	No Limit
6		5729.653	44.03	16.52	60.55	68.20	-7.65	peak	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-2C_ IEEE 802.11ax (HEW80)	Test Date	2021/6/21
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

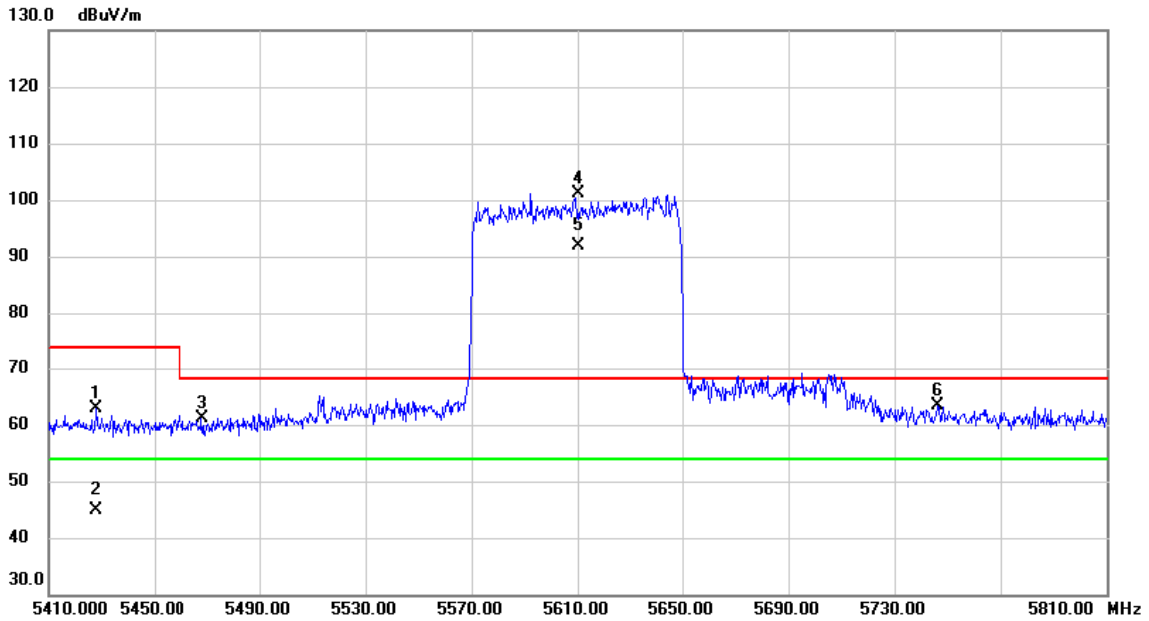

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5428.027	46.99	15.90	62.89	74.00	-11.11	peak	
2		5428.027	29.05	15.90	44.95	54.00	-9.05	AVG	
3		5468.280	45.07	15.99	61.06	68.20	-7.14	peak	
4	X	5610.000	84.87	16.29	101.16	68.20	32.96	peak	No Limit
5	*	5610.000	75.51	16.29	91.80	54.00	37.80	AVG	No Limit
6		5746.413	46.78	16.55	63.33	68.20	-4.87	peak	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW80)	Test Date	2021/6/21
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

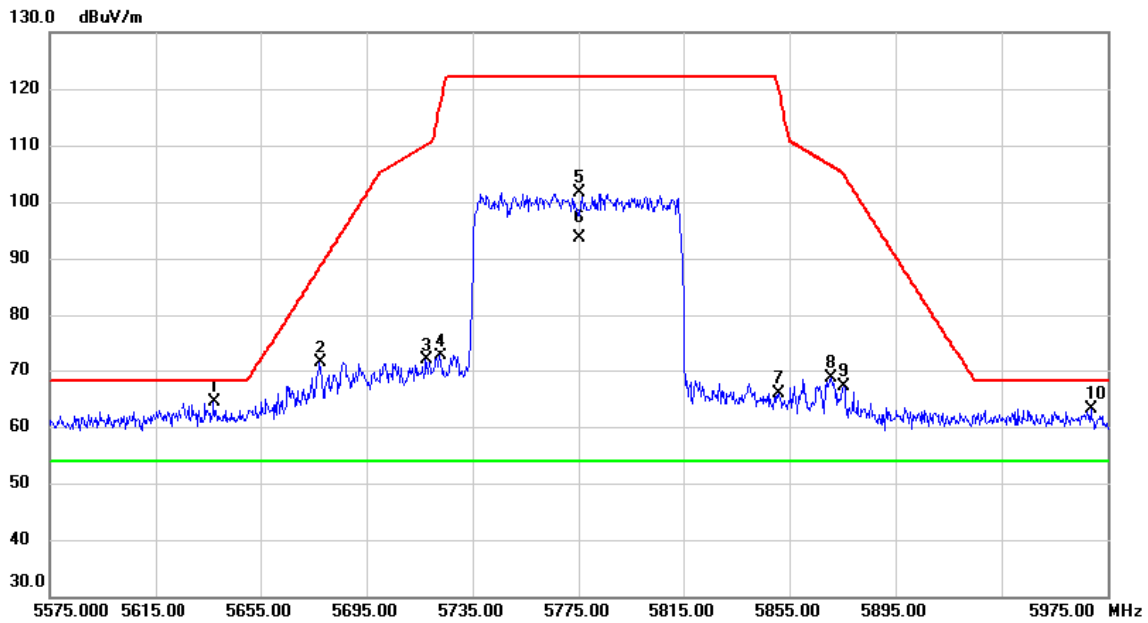


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5637.453	47.99	16.34	64.33	68.20	-3.87	peak	
2		5677.520	54.95	16.42	71.37	88.56	-17.19	peak	
3		5717.533	55.28	16.50	71.78	110.11	-38.33	peak	
4		5722.760	56.01	16.51	72.52	117.09	-44.57	peak	
5		5775.000	84.95	16.61	101.56	122.20	-20.64	peak	No Limit
6	*	5775.000	77.01	16.61	93.62	54.00	39.62	AVG	No Limit
7		5851.040	49.16	16.76	65.92	119.83	-53.91	peak	
8		5870.613	51.72	16.80	68.52	106.43	-37.91	peak	
9		5875.667	50.25	16.82	67.07	104.71	-37.64	peak	
10		5968.933	46.23	17.00	63.23	68.20	-4.97	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

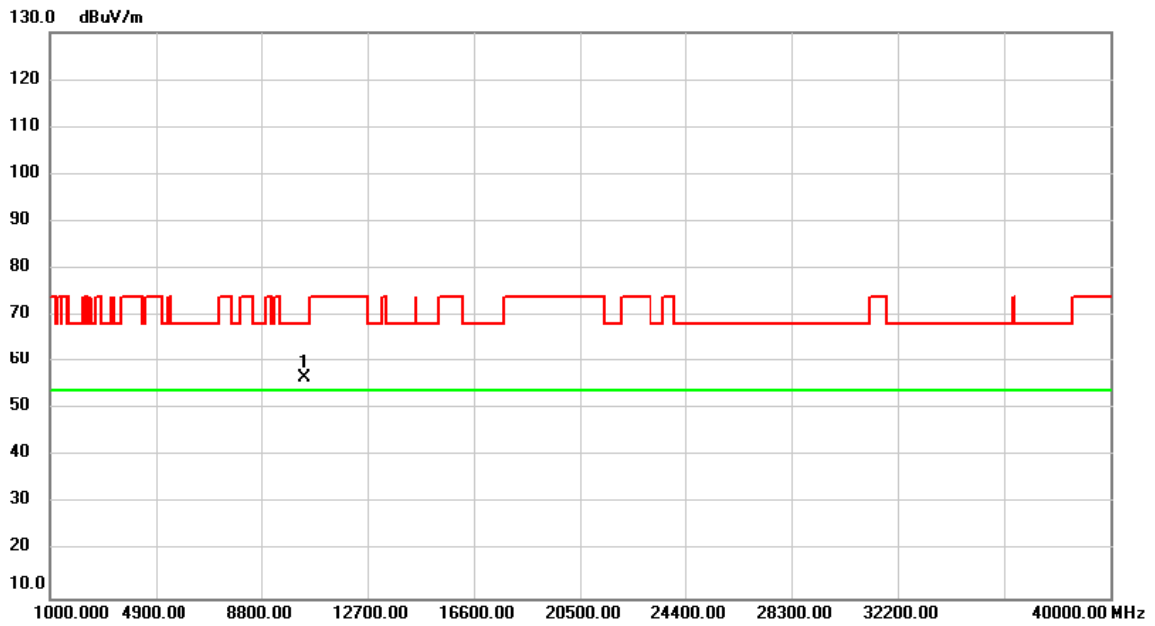


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.000	44.45	12.29	56.74	68.20	-11.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

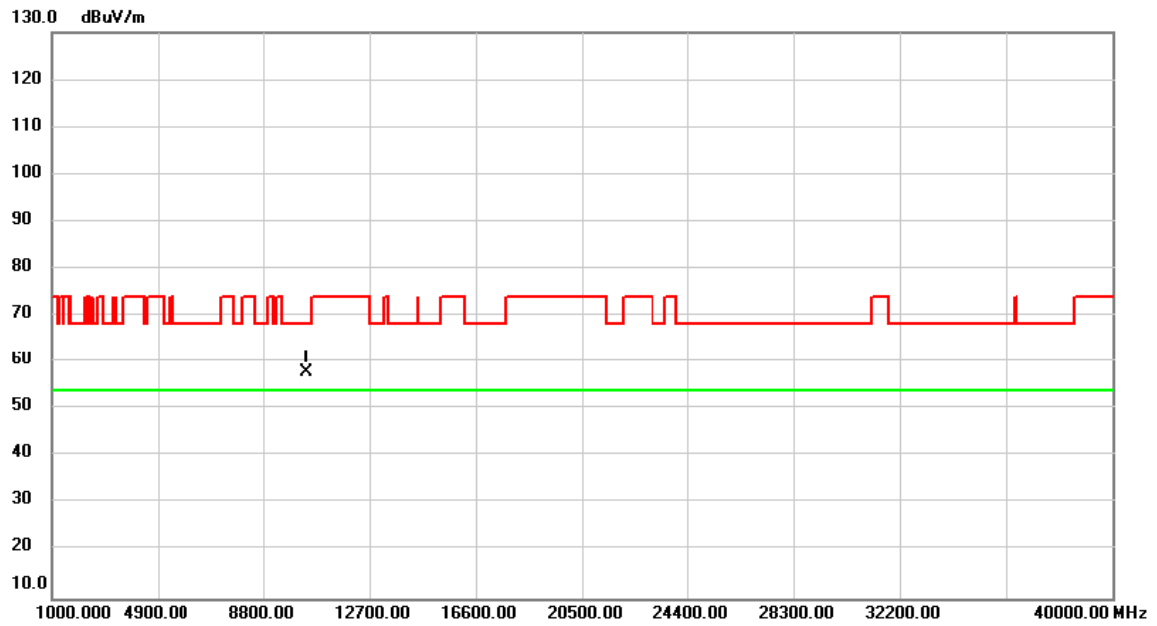


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.000	45.52	12.29	57.81	68.20	-10.39	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

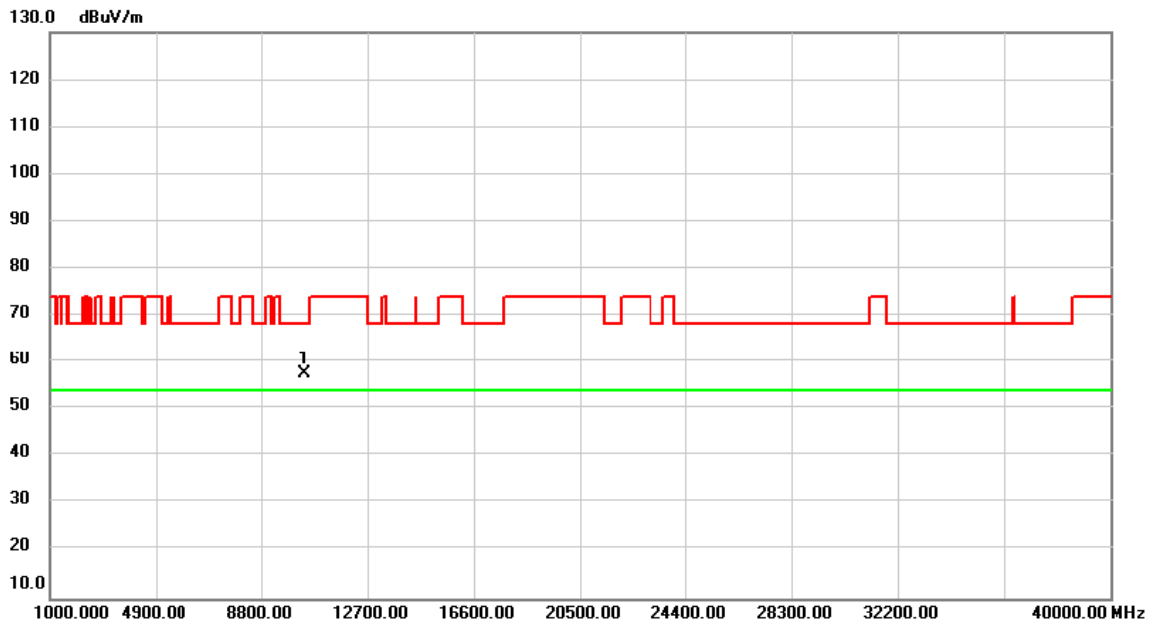


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	45.23	12.31	57.54	68.20	-10.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

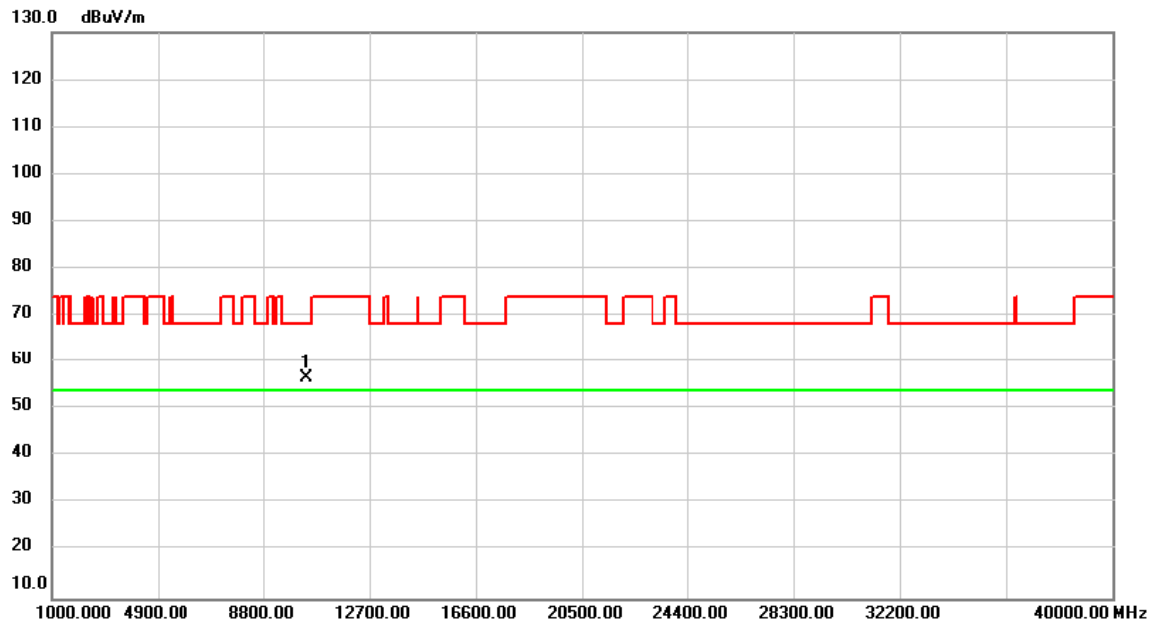


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.000	44.49	12.31	56.80	68.20	-11.40	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

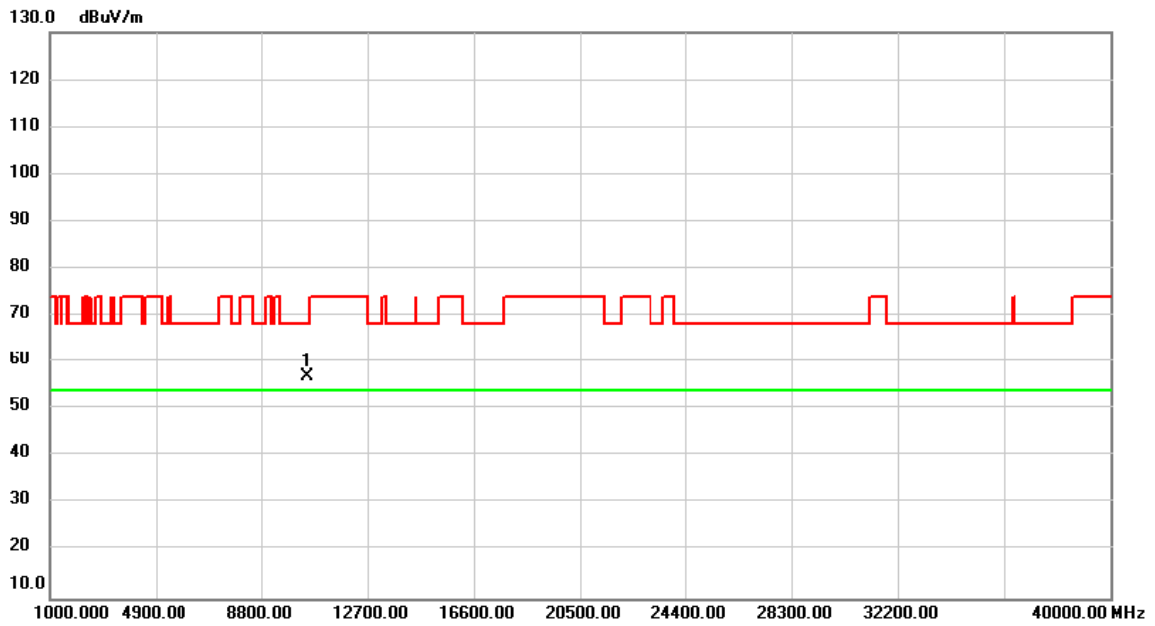


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.000	44.47	12.36	56.83	68.20	-11.37	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

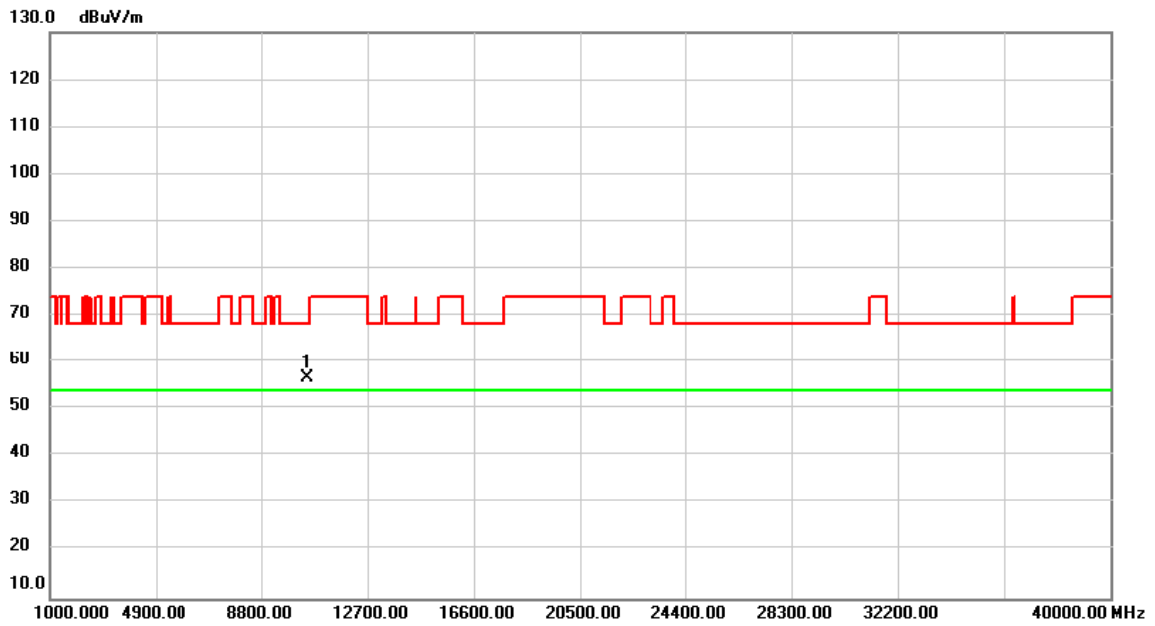


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.000	44.32	12.36	56.68	68.20	-11.52	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

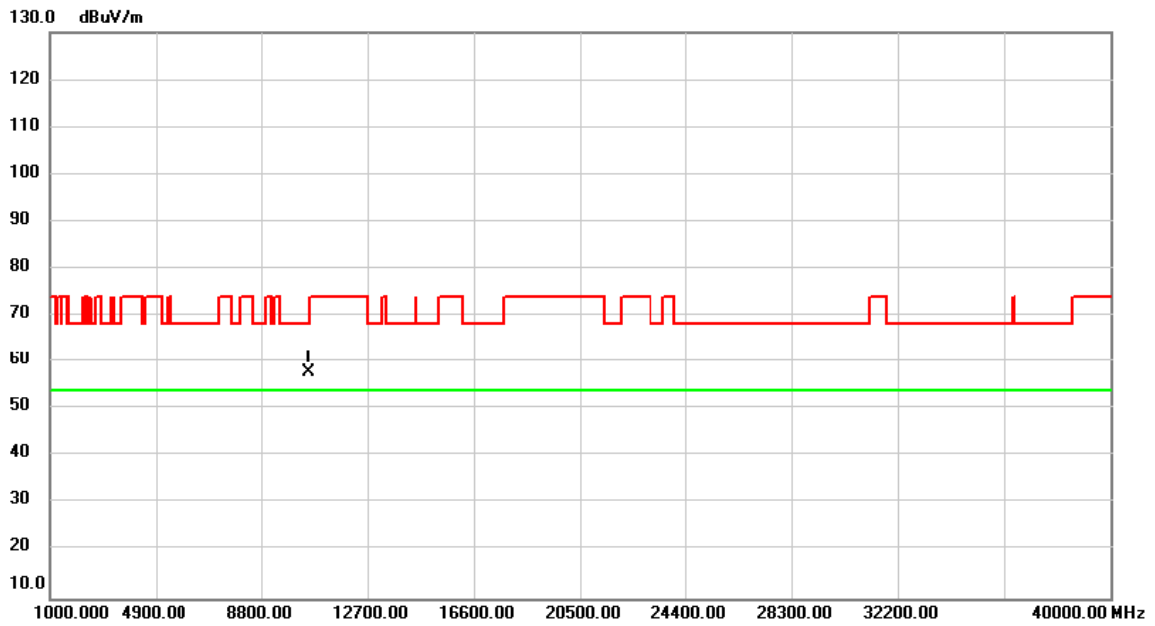


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.000	45.32	12.39	57.71	68.20	-10.49	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

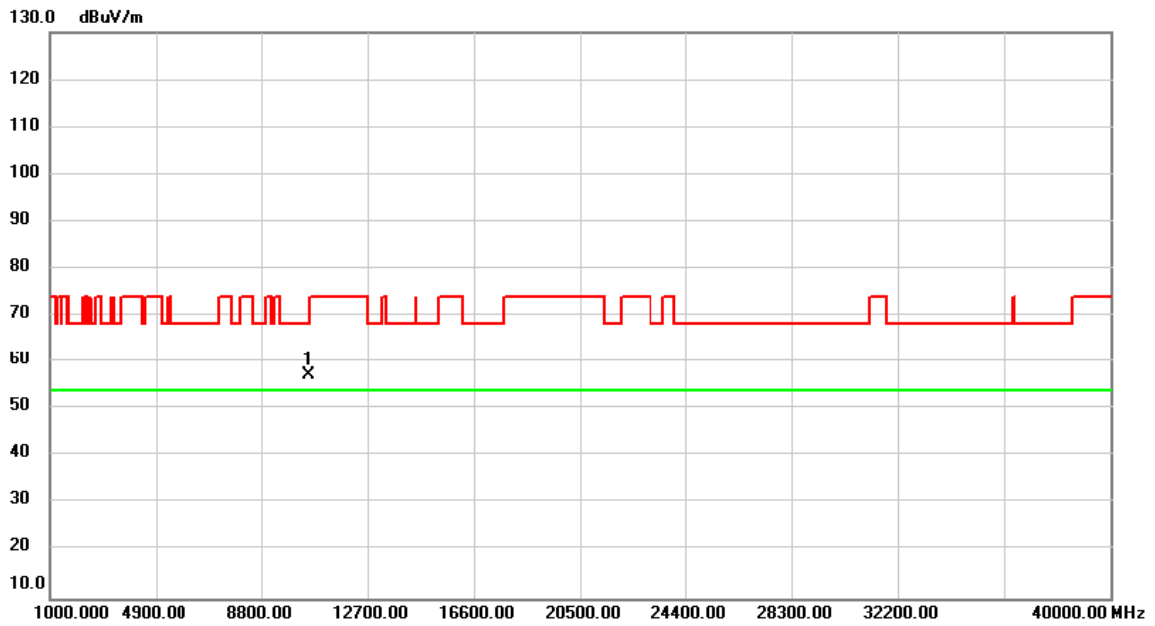


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.000	44.72	12.39	57.11	68.20	-11.09	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

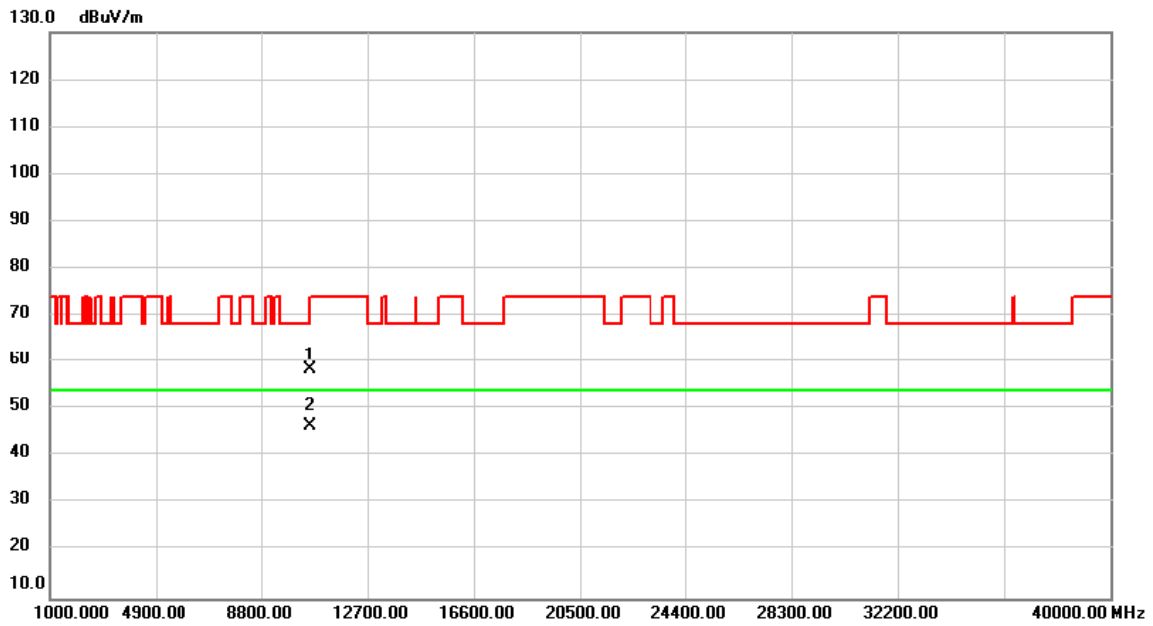


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	45.86	12.46	58.32	68.20	-9.88	peak	
2	*	10600.000	33.96	12.46	46.42	54.00	-7.58	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

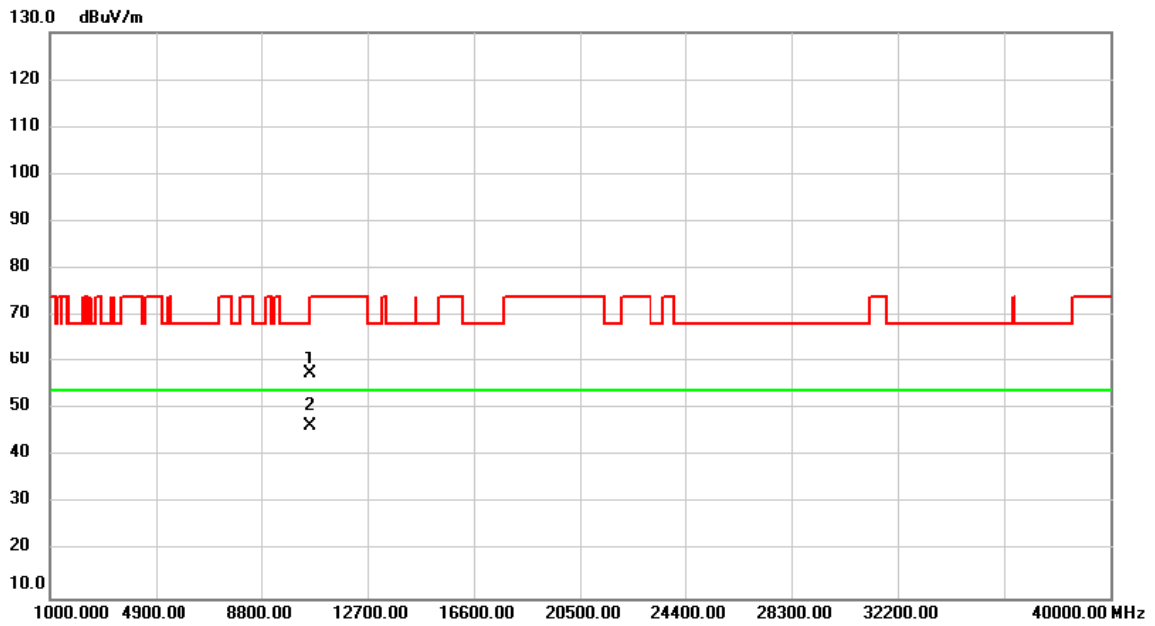


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	45.05	12.46	57.51	68.20	-10.69	peak	
2	*	10600.000	33.87	12.46	46.33	54.00	-7.67	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

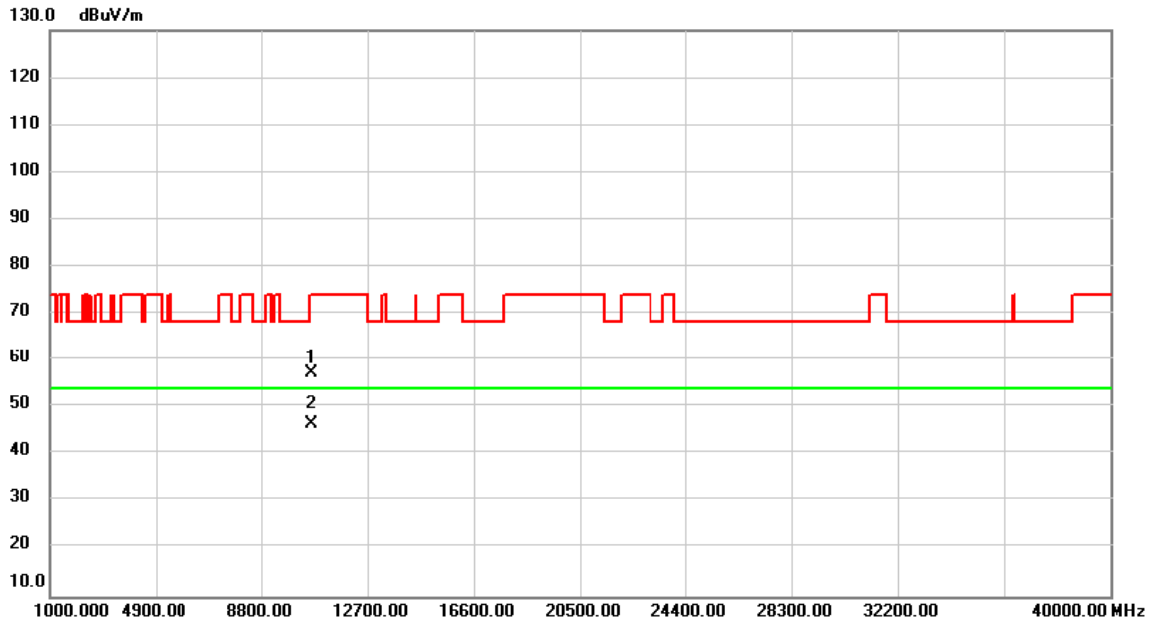


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	44.87	12.49	57.36	74.00	-16.64	peak	
2	*	10640.000	34.08	12.49	46.57	54.00	-7.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

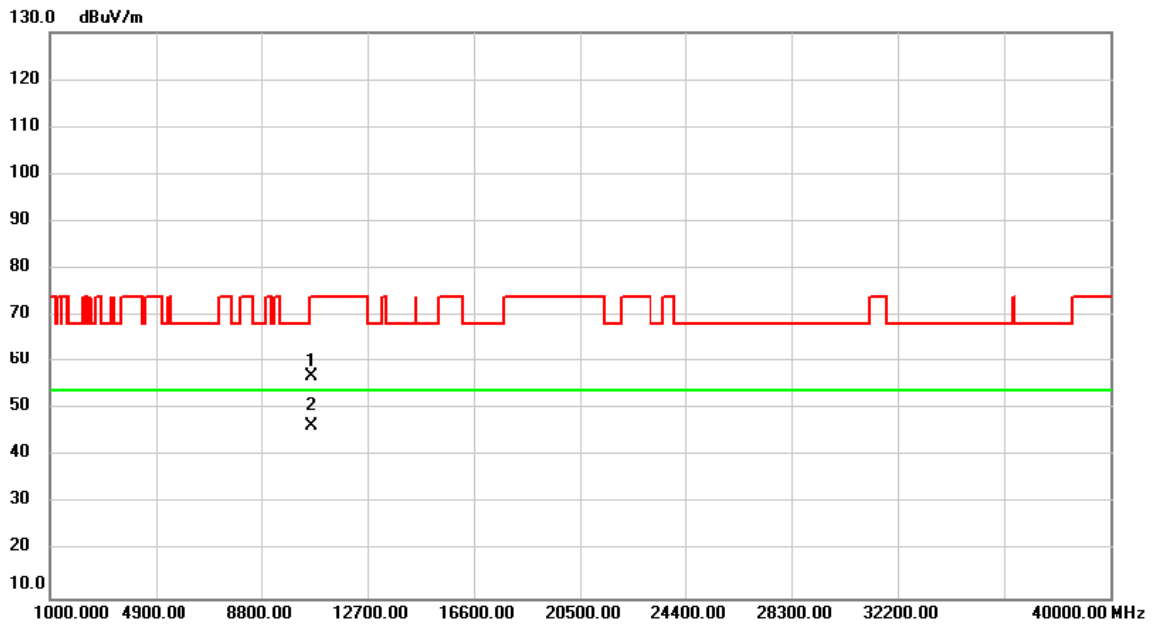


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	44.48	12.49	56.97	74.00	-17.03	peak	
2	*	10640.000	33.97	12.49	46.46	54.00	-7.54	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

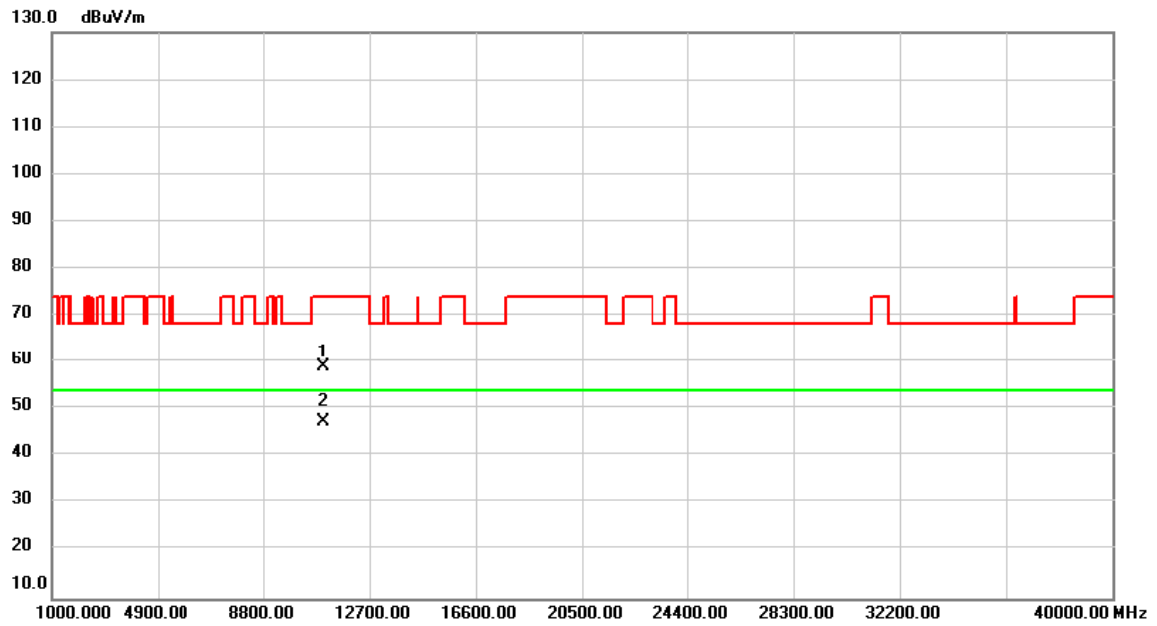


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	46.15	12.78	58.93	74.00	-15.07	peak	
2	*	11000.000	34.70	12.78	47.48	54.00	-6.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

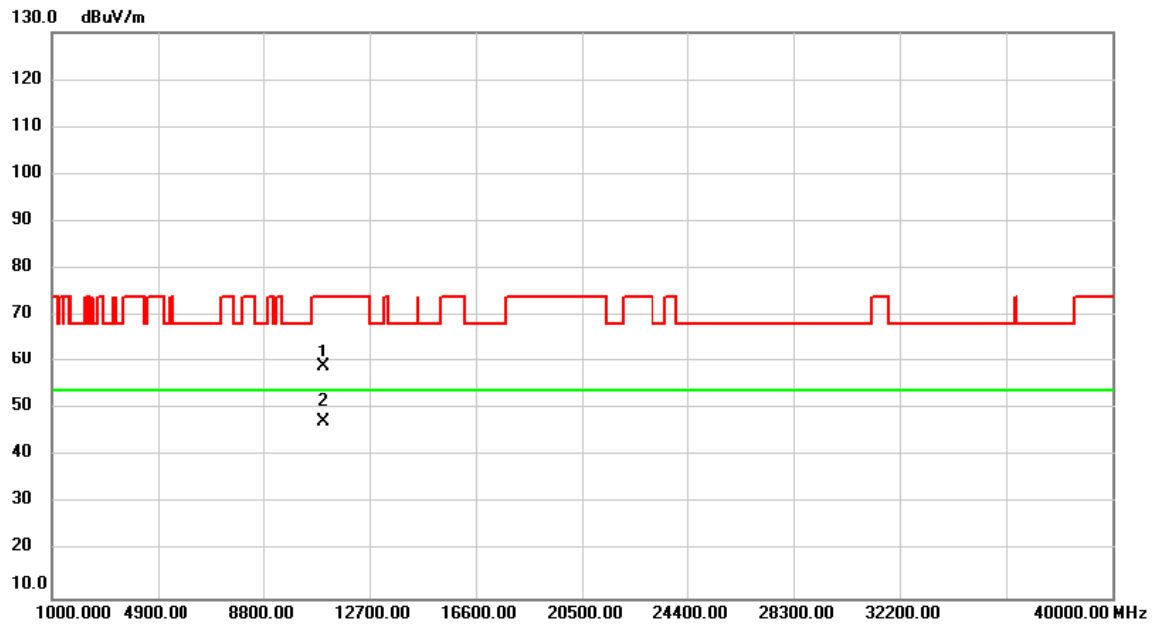


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	46.22	12.78	59.00	74.00	-15.00	peak	
2	*	11000.000	34.65	12.78	47.43	54.00	-6.57	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

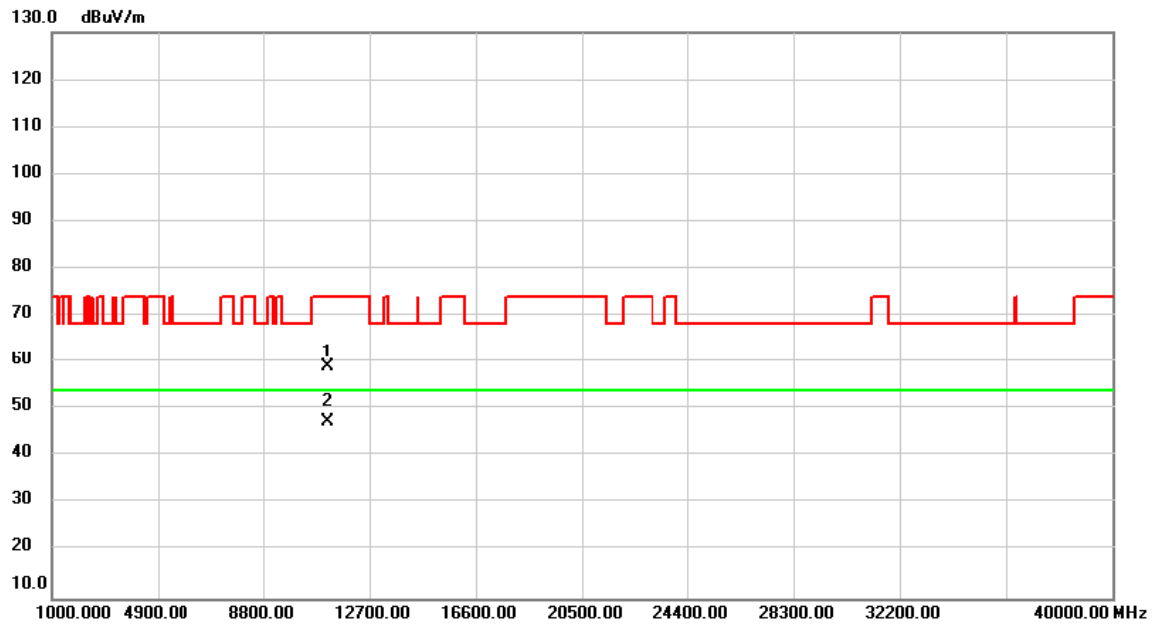


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	46.11	12.90	59.01	74.00	-14.99	peak	
2	*	11160.000	34.35	12.90	47.25	54.00	-6.75	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

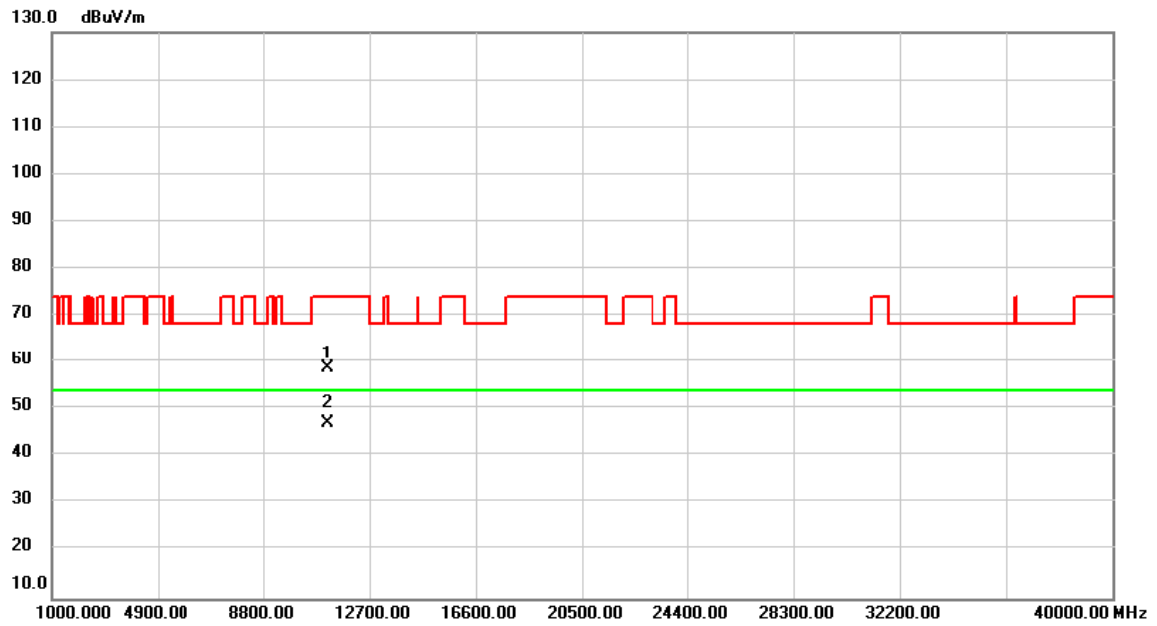


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	45.79	12.90	58.69	74.00	-15.31	peak	
2	*	11160.000	34.29	12.90	47.19	54.00	-6.81	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

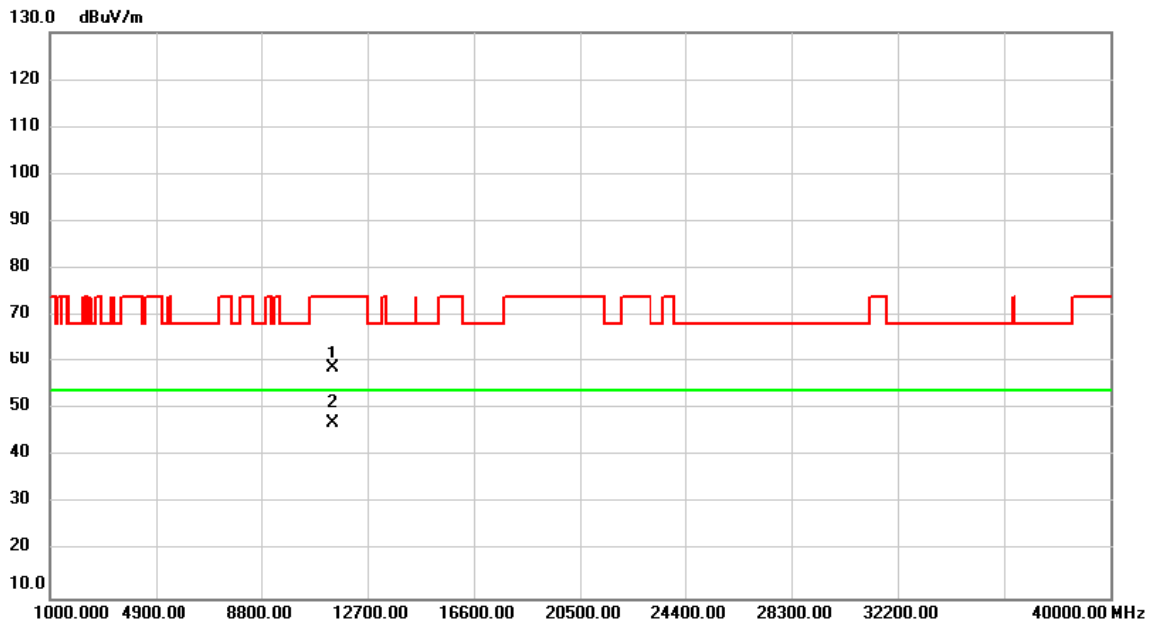

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	45.74	13.08	58.82	74.00	-15.18	peak	
2	*	11400.000	34.08	13.08	47.16	54.00	-6.84	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

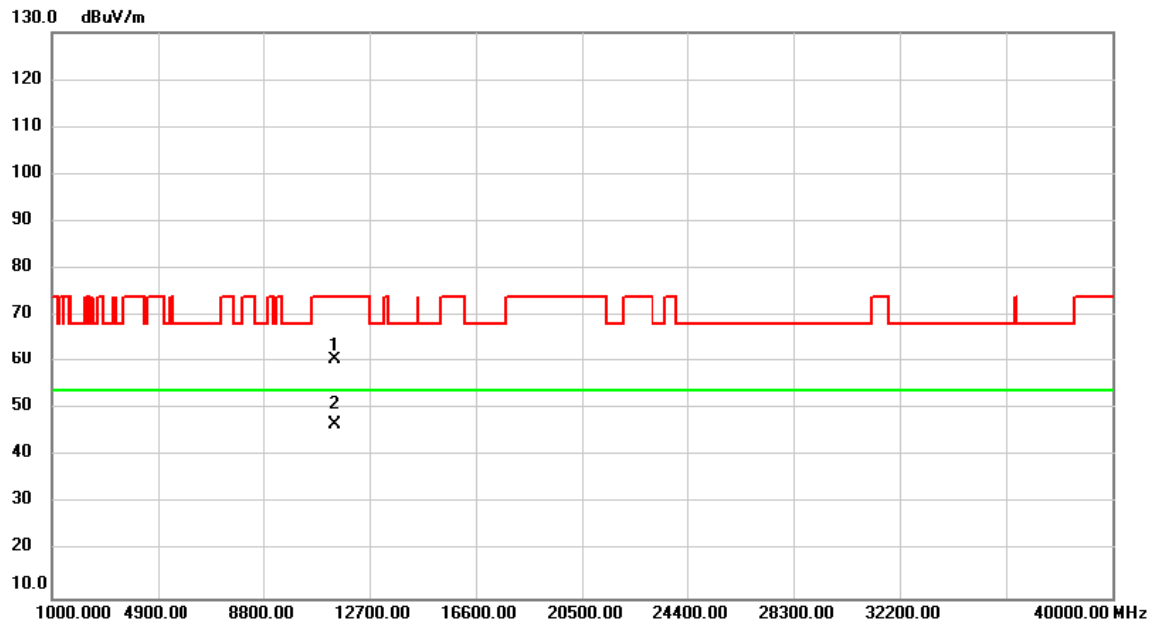


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	47.40	13.08	60.48	74.00	-13.52	peak	
2	*	11400.000	33.56	13.08	46.64	54.00	-7.36	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Vertical

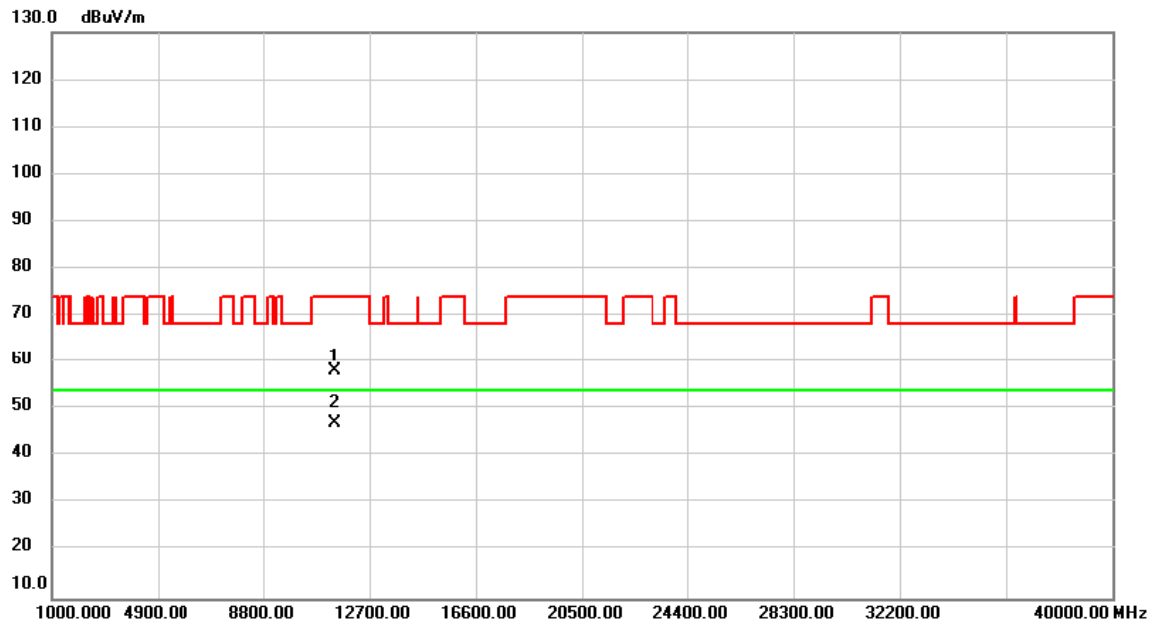


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	45.19	13.11	58.30	74.00	-15.70	peak	
2	*	11440.000	33.80	13.11	46.91	54.00	-7.09	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Horizontal

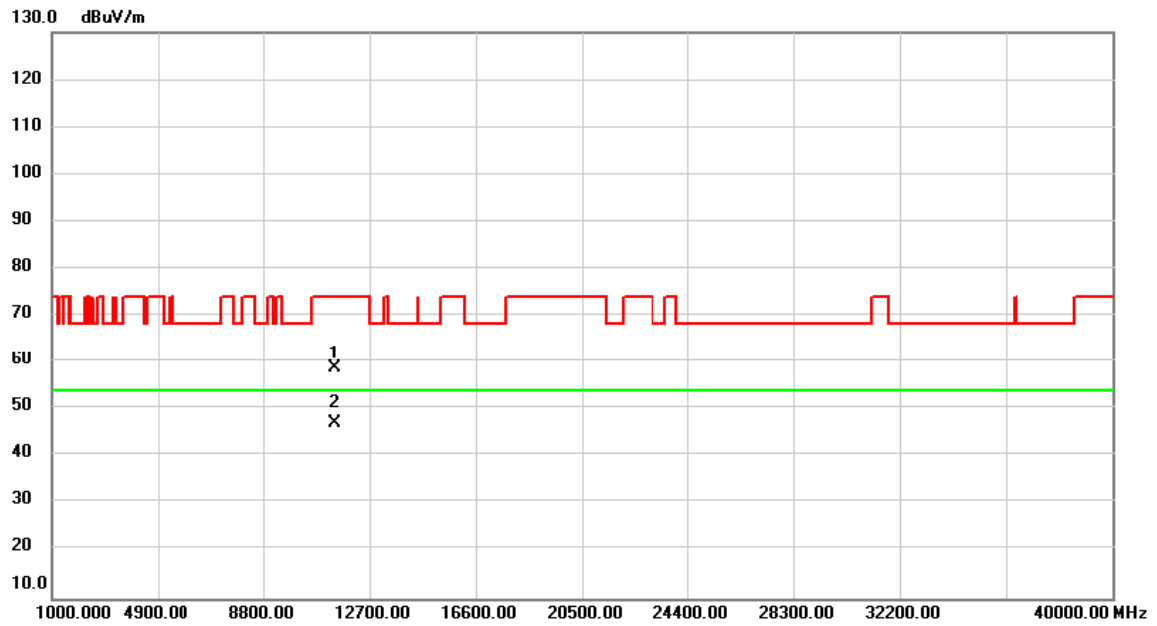


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	45.56	13.11	58.67	74.00	-15.33	peak	
2	*	11440.000	34.02	13.11	47.13	54.00	-6.87	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

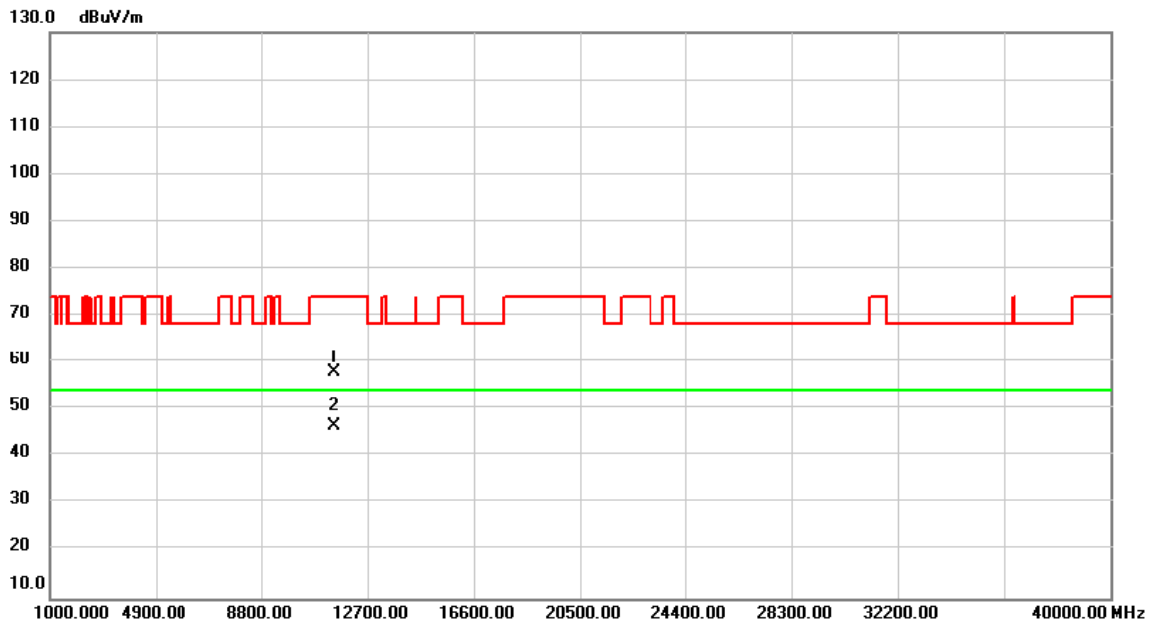


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	44.58	13.14	57.72	74.00	-16.28	peak	
2	*	11490.000	33.40	13.14	46.54	54.00	-7.46	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

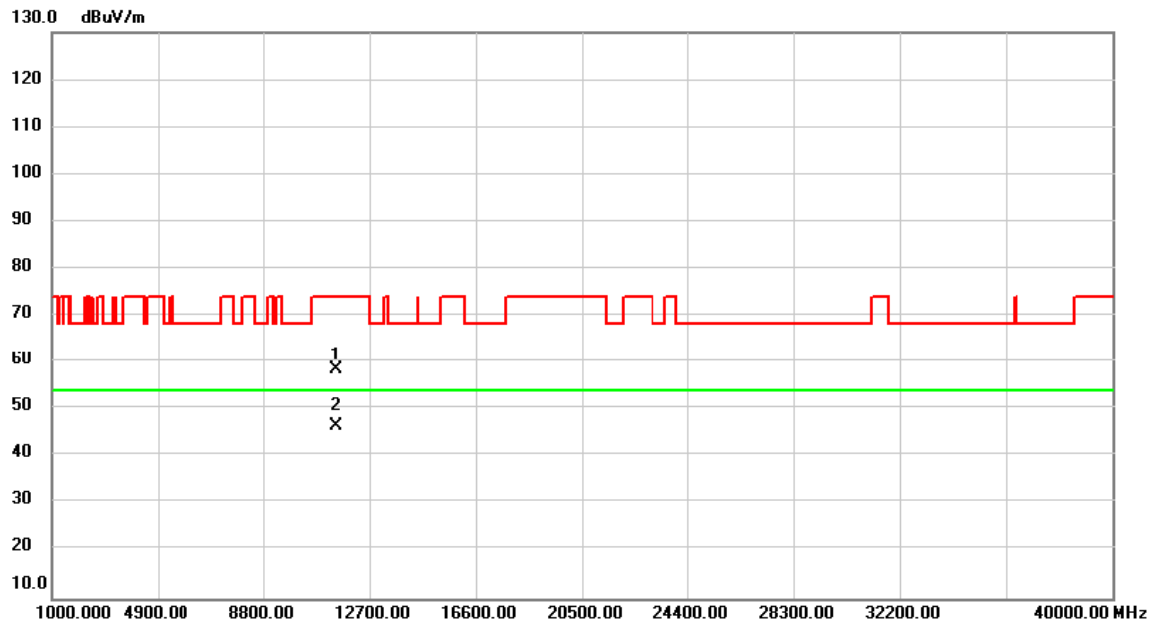


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	45.41	13.14	58.55	74.00	-15.45	peak	
2	*	11490.000	33.37	13.14	46.51	54.00	-7.49	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

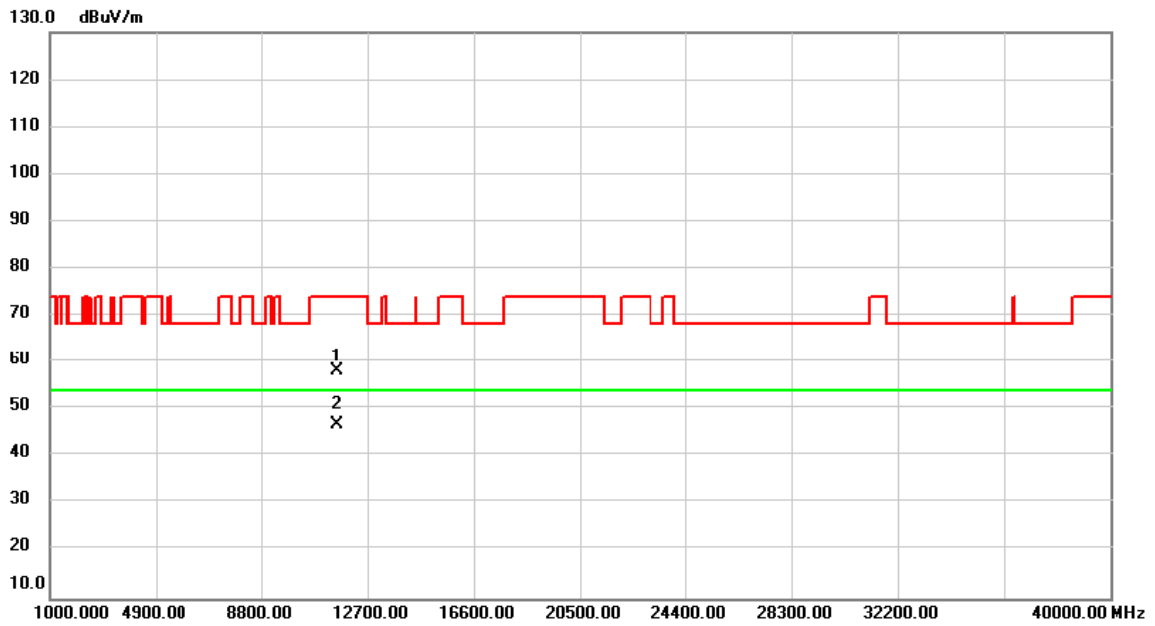


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	44.90	13.20	58.10	74.00	-15.90	peak	
2	*	11570.000	33.44	13.20	46.64	54.00	-7.36	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IIEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

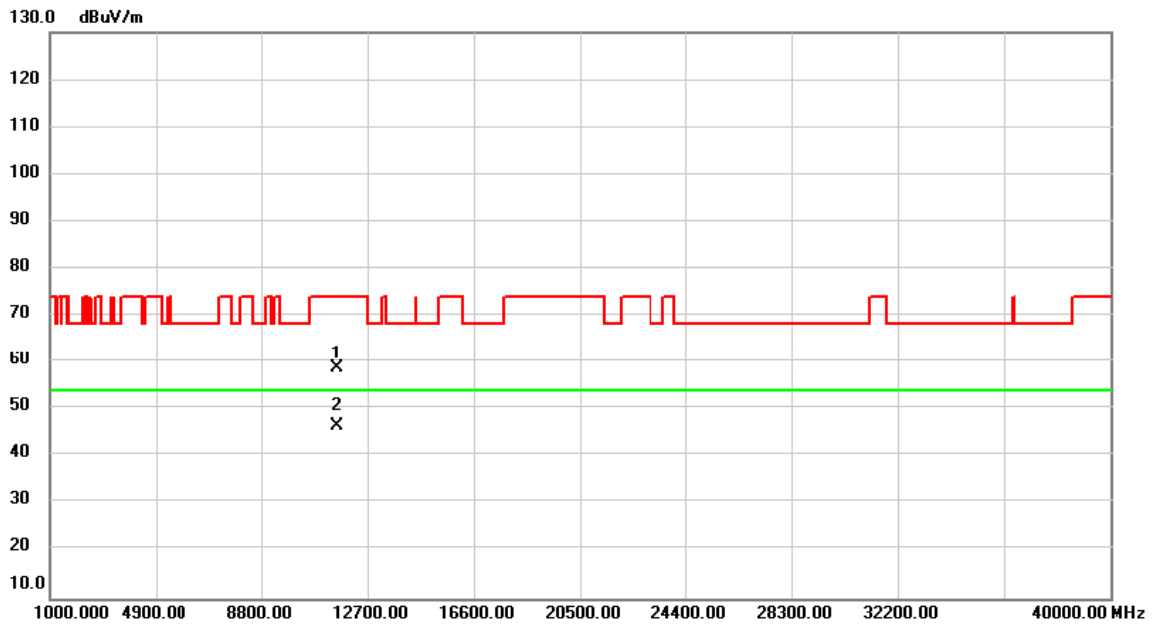


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	45.61	13.20	58.81	74.00	-15.19	peak	
2	*	11570.000	33.13	13.20	46.33	54.00	-7.67	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

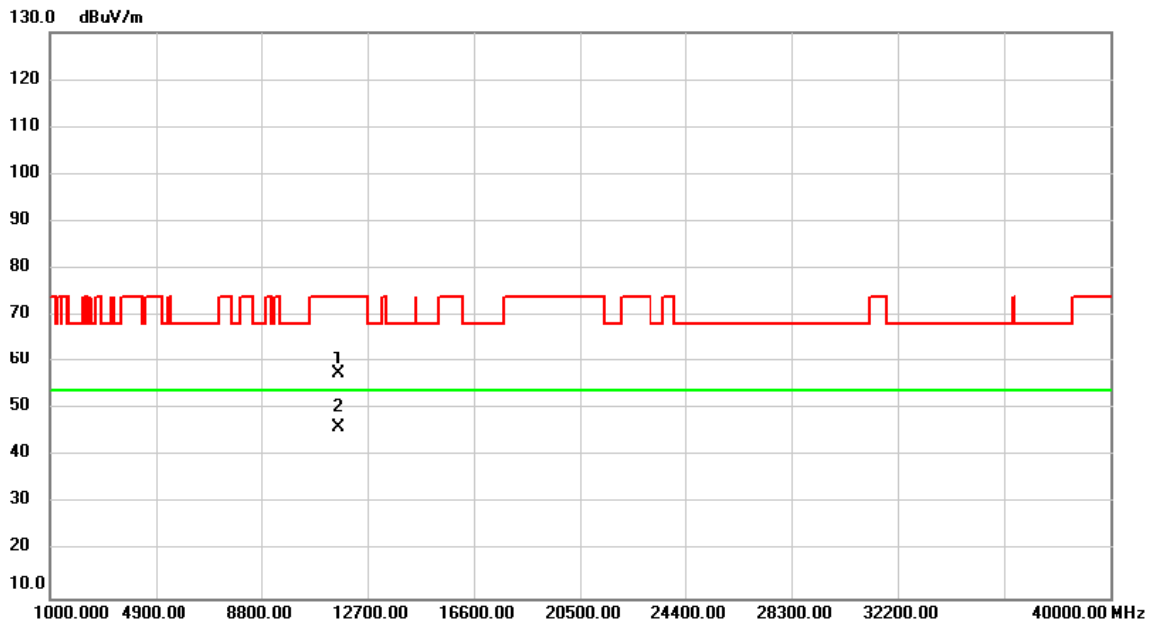


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	44.37	13.25	57.62	74.00	-16.38	peak	
2	*	11650.000	32.97	13.25	46.22	54.00	-7.78	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

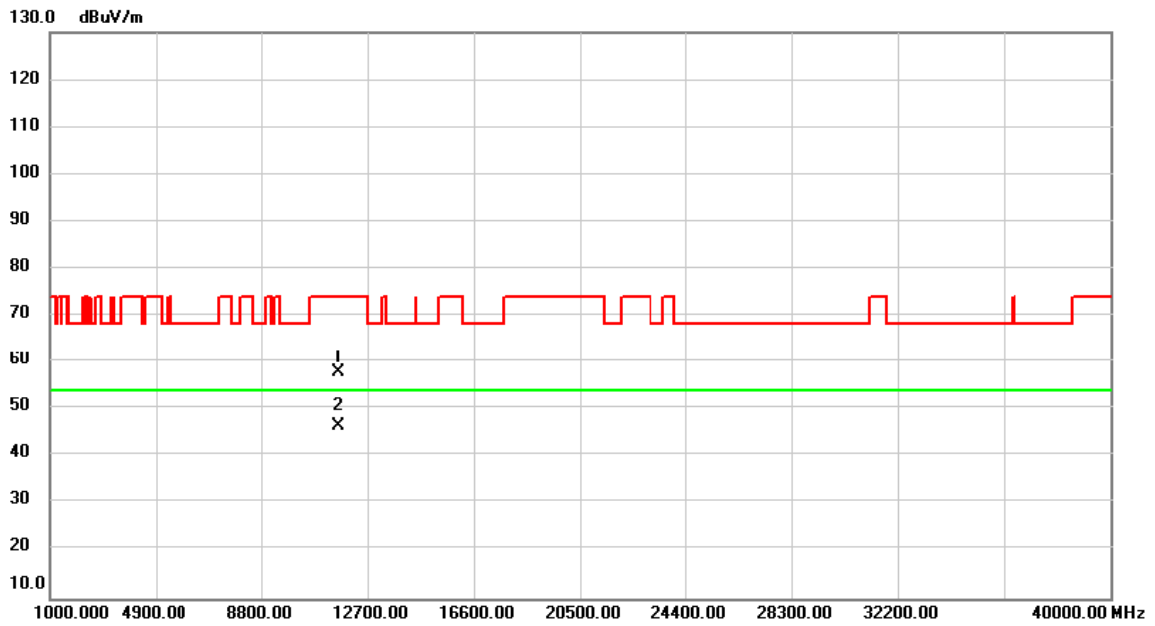


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	44.60	13.25	57.85	74.00	-16.15	peak	
2	*	11650.000	33.12	13.25	46.37	54.00	-7.63	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

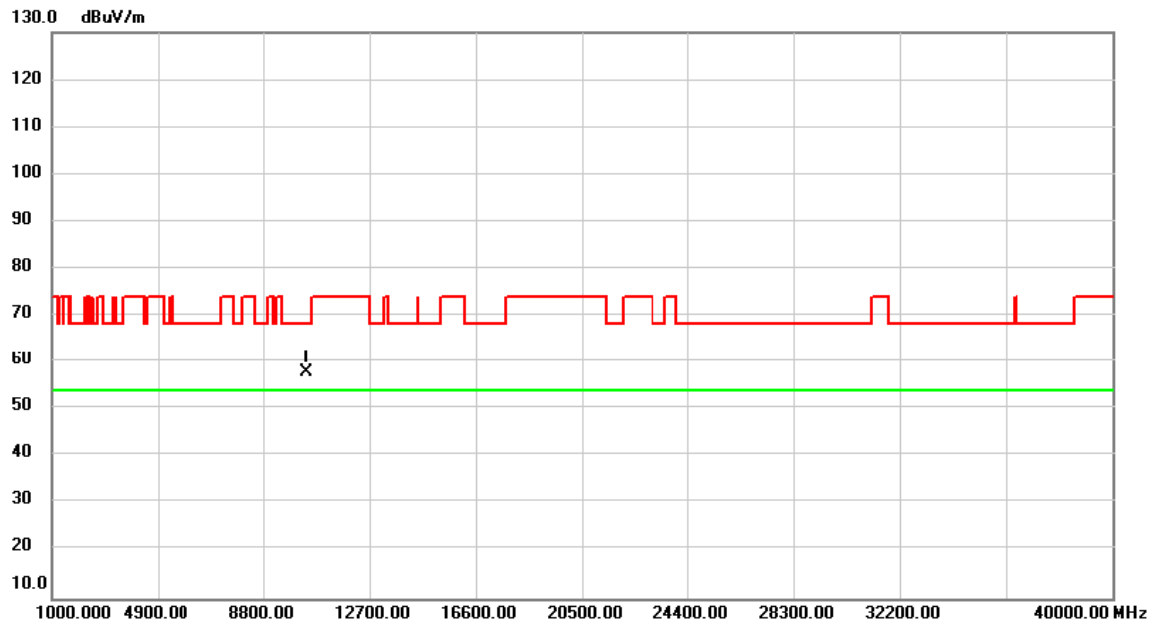


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.000	45.49	12.29	57.78	68.20	-10.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

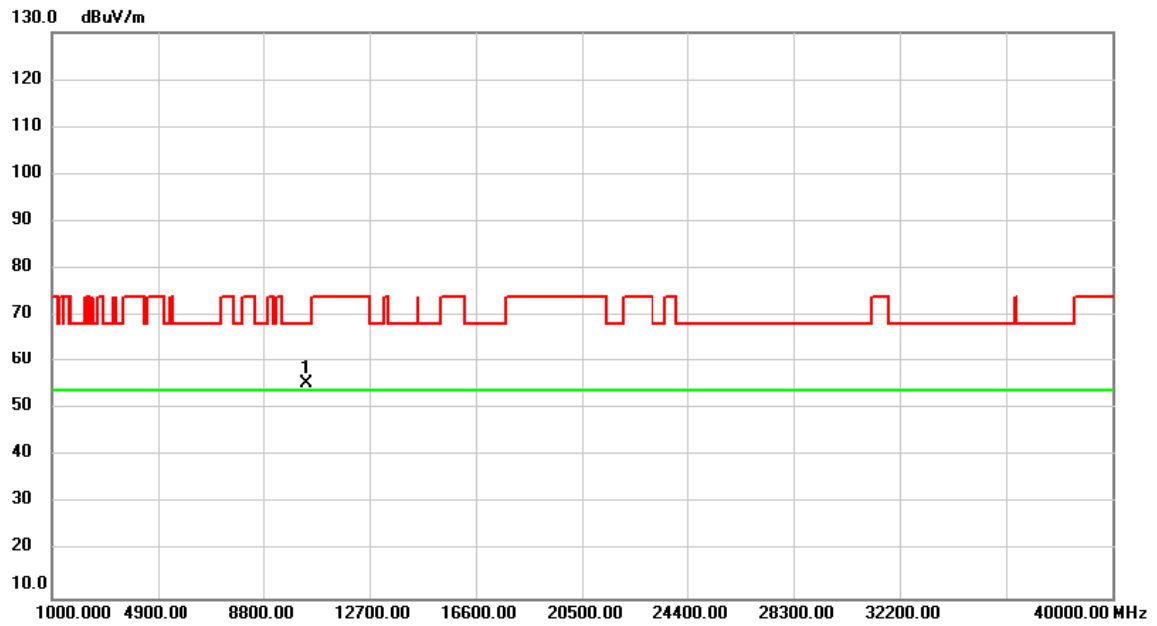


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.000	43.21	12.29	55.50	68.20	-12.70	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

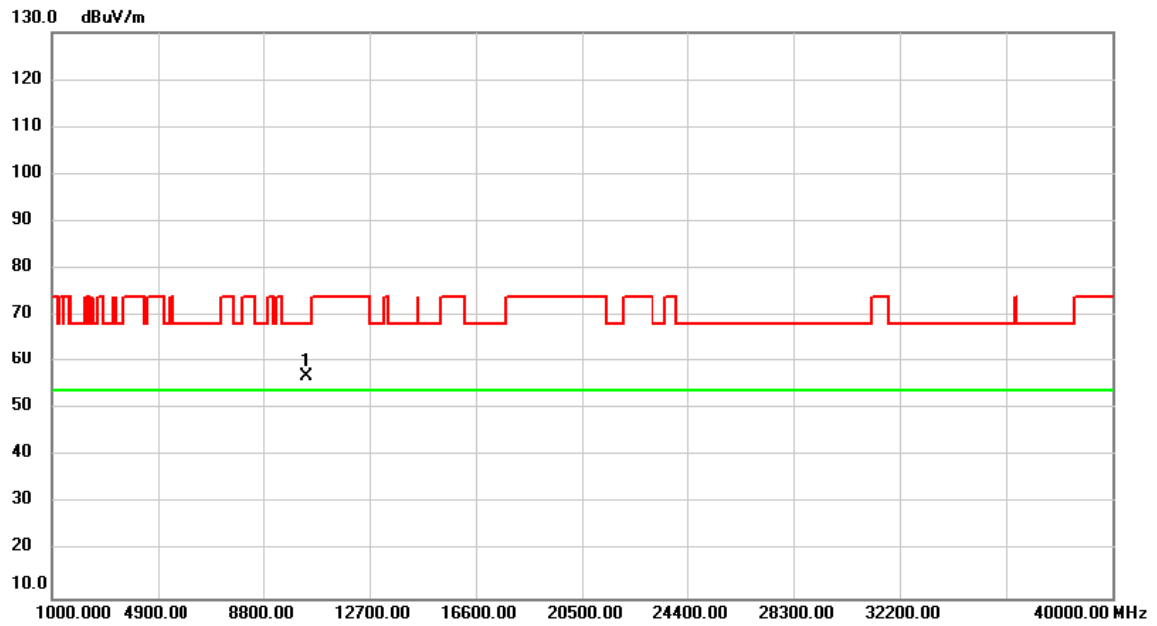


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	44.53	12.31	56.84	68.20	-11.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

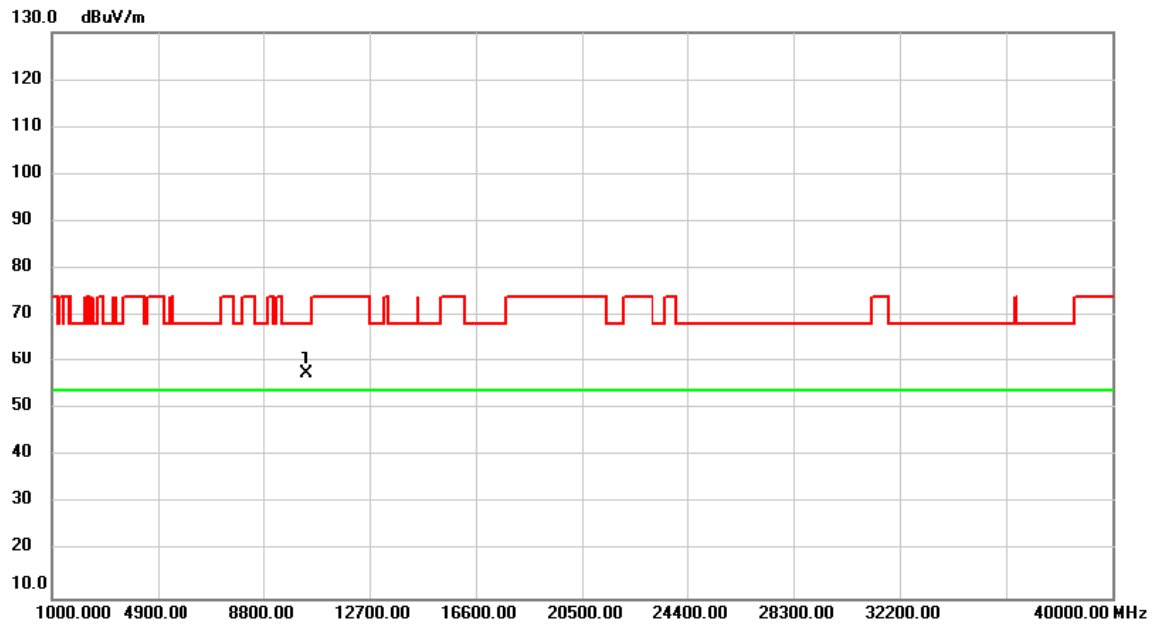


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	45.30	12.31	57.61	68.20	-10.59	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

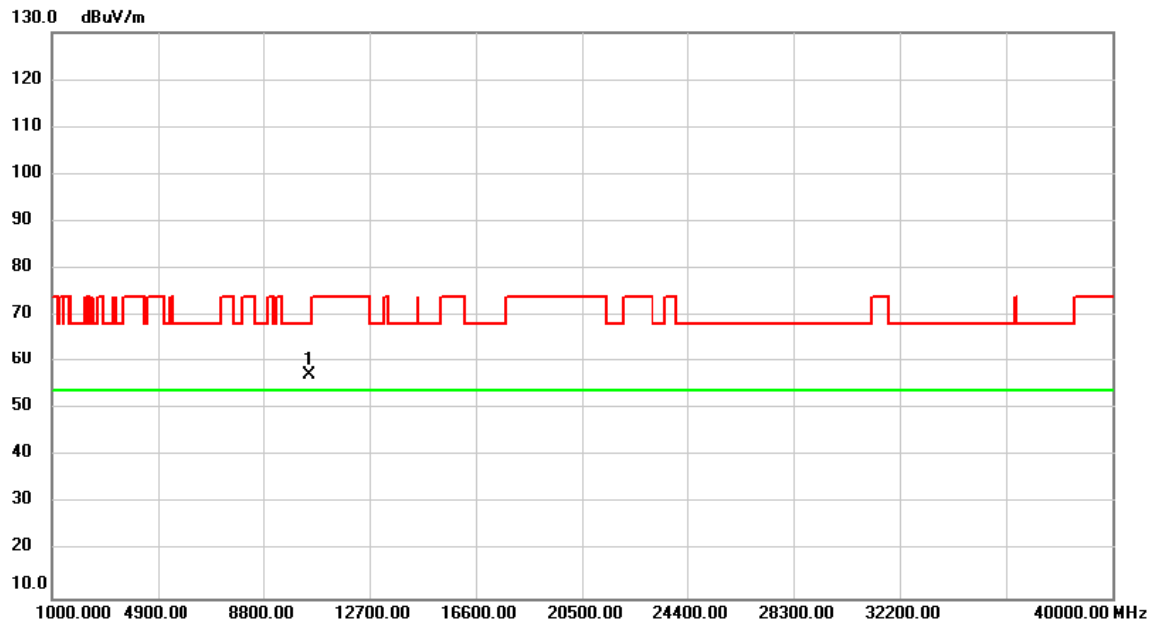


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.000	44.95	12.36	57.31	68.20	-10.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

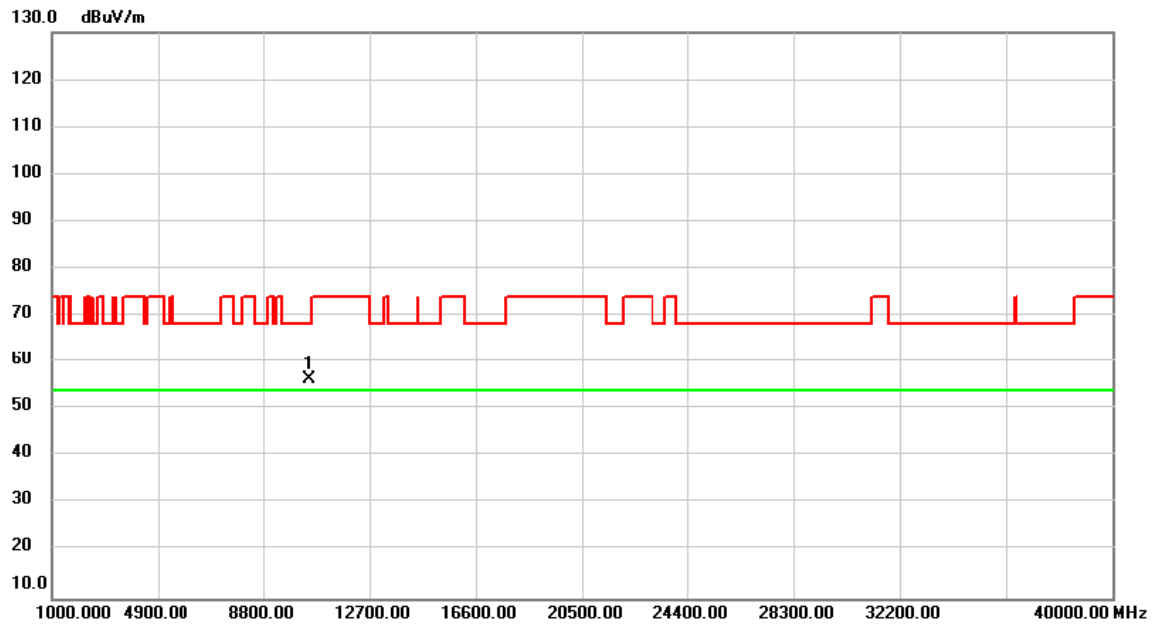


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.000	43.93	12.36	56.29	68.20	-11.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

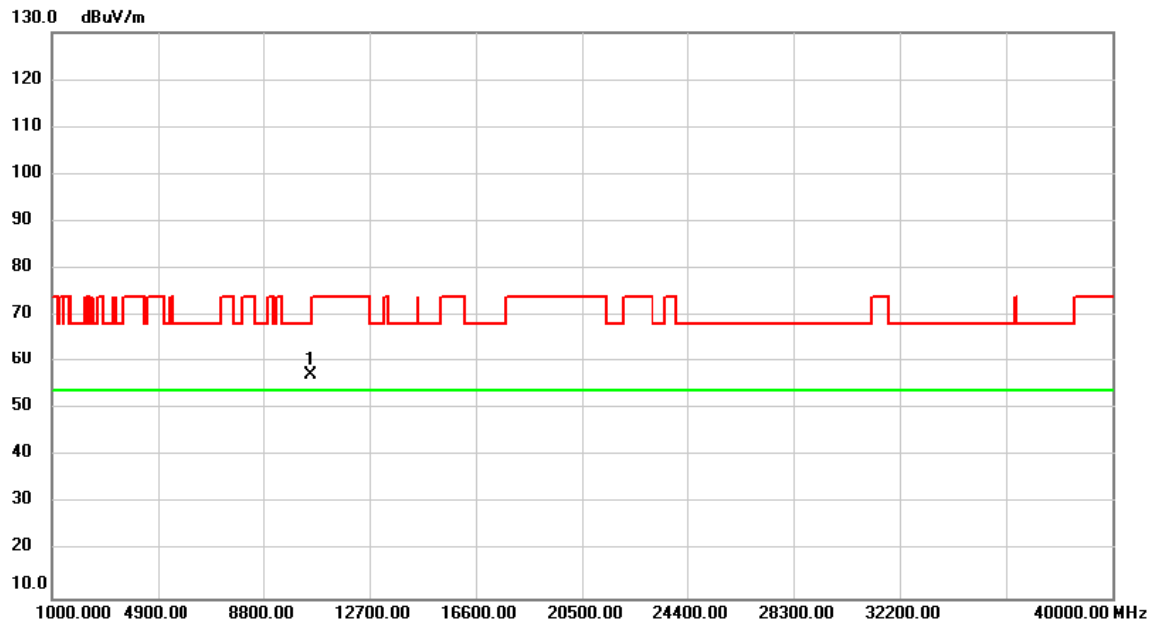


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.000	44.75	12.39	57.14	68.20	-11.06	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

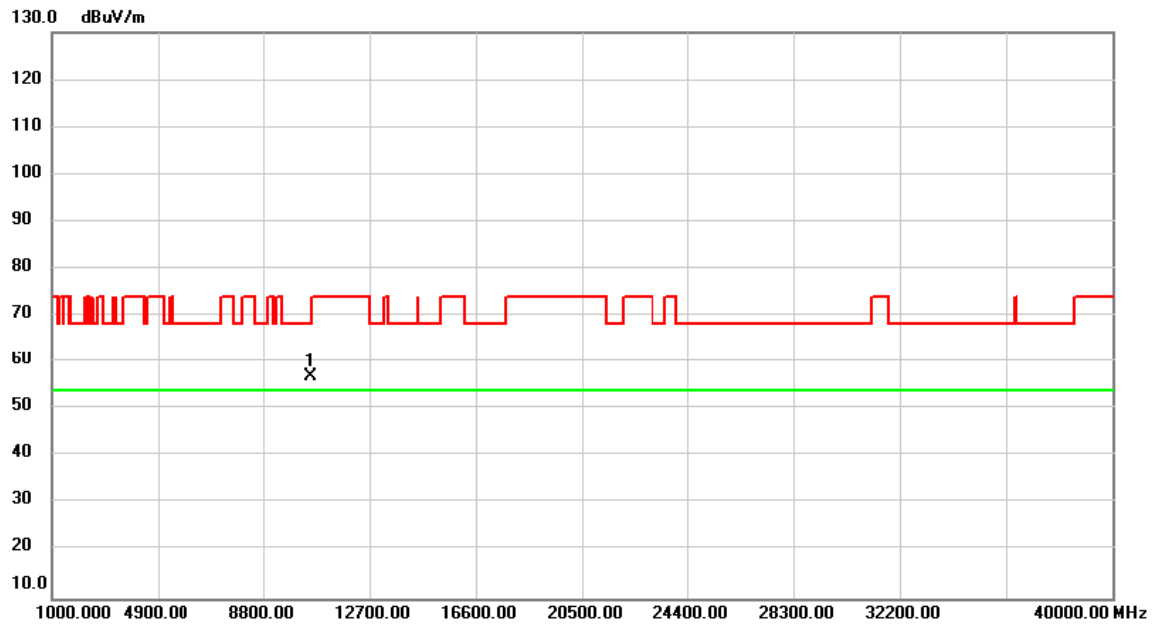


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.000	44.55	12.39	56.94	68.20	-11.26	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

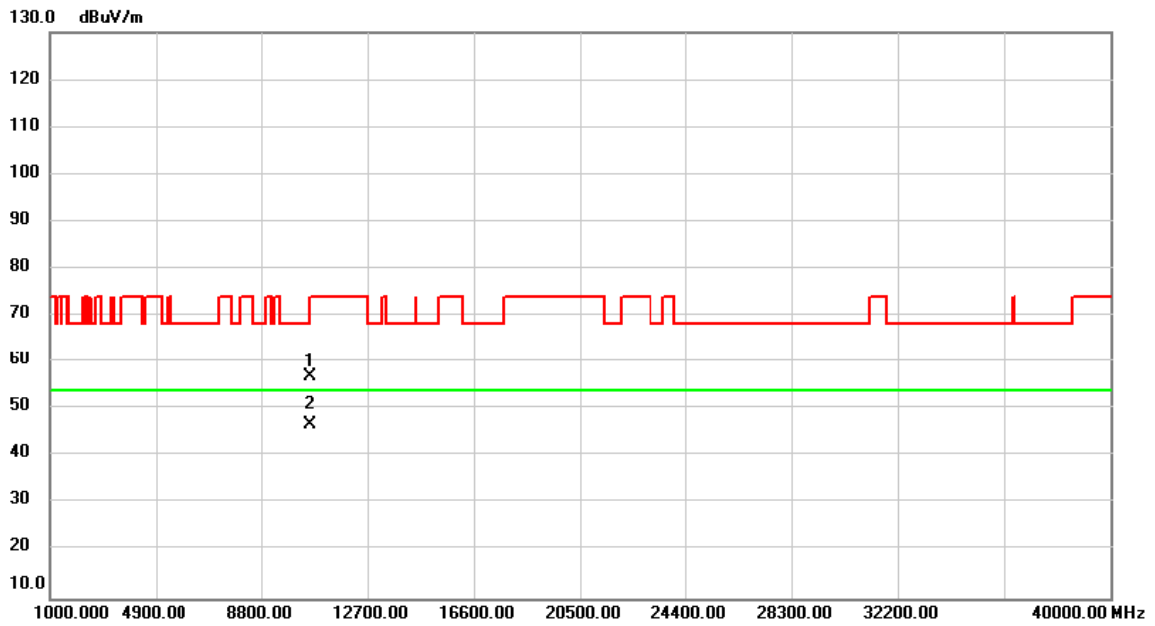


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	44.46	12.46	56.92	68.20	-11.28	peak	
2	*	10600.000	34.27	12.46	46.73	54.00	-7.27	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

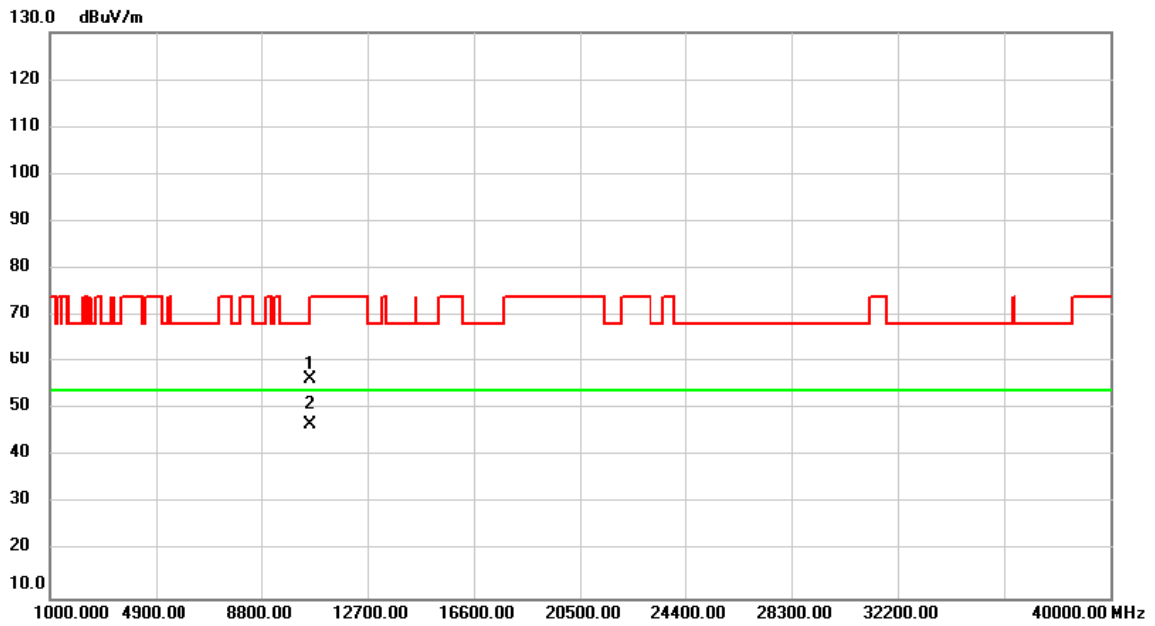


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	43.96	12.46	56.42	68.20	-11.78	peak	
2	*	10600.000	34.19	12.46	46.65	54.00	-7.35	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

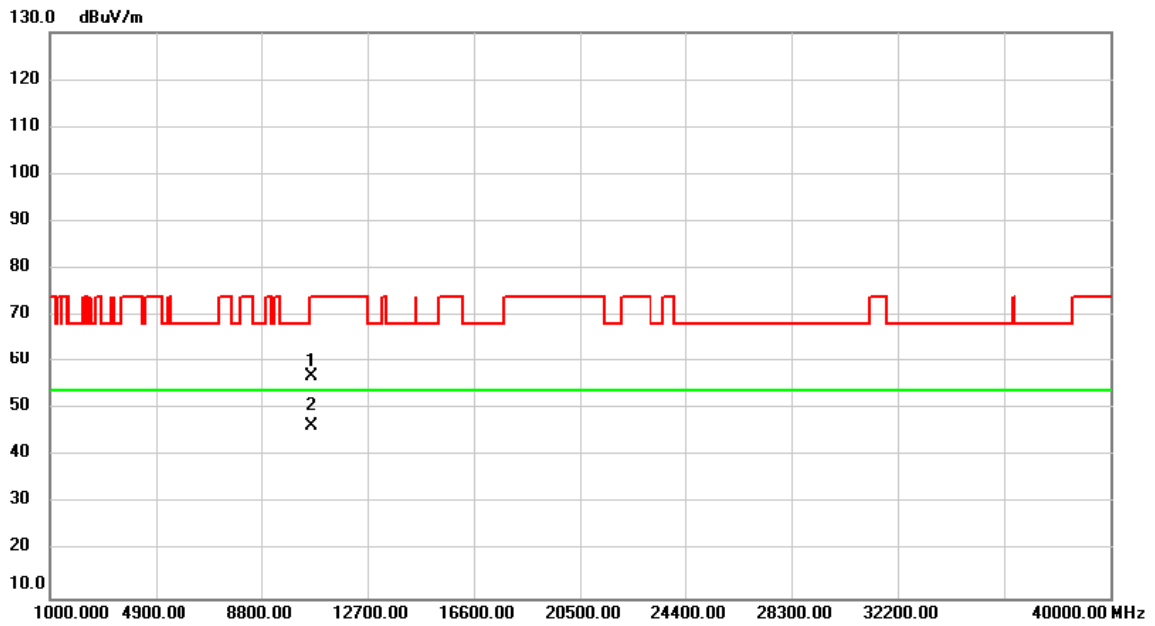


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	44.44	12.49	56.93	74.00	-17.07	peak	
2	*	10640.000	33.94	12.49	46.43	54.00	-7.57	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

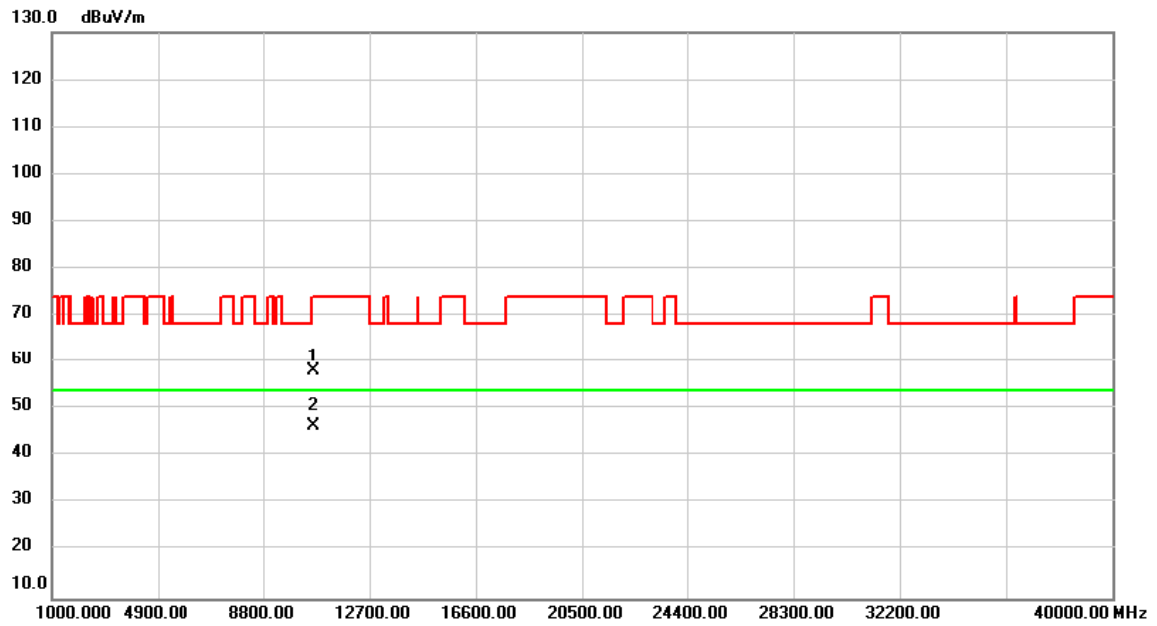


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	45.61	12.49	58.10	74.00	-15.90	peak	
2	*	10640.000	33.89	12.49	46.38	54.00	-7.62	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

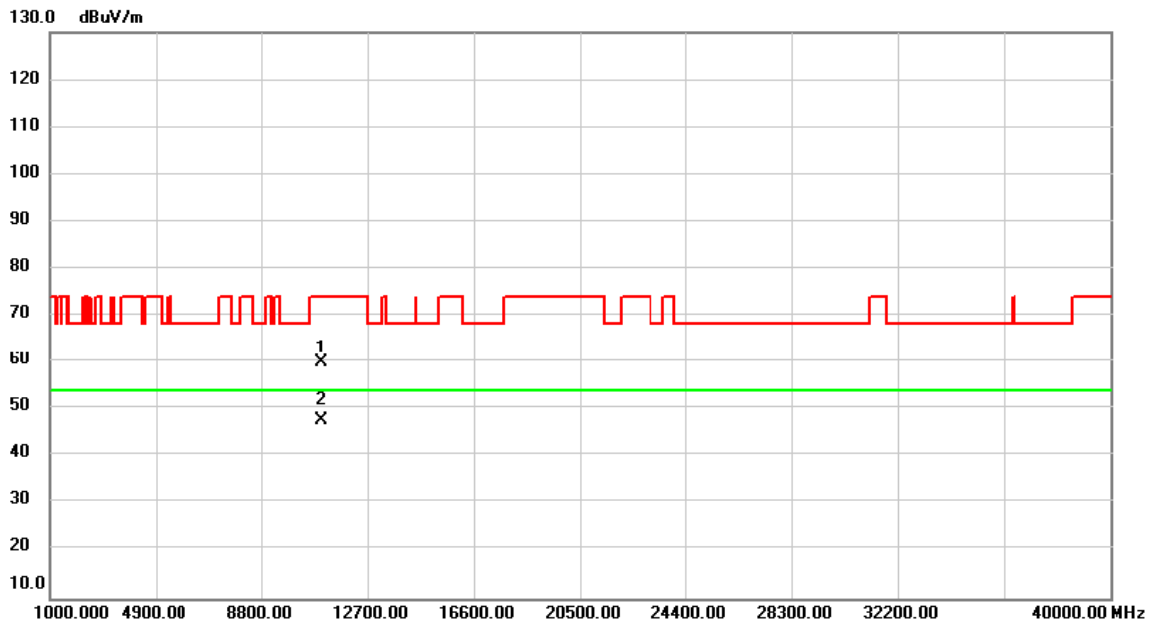


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	47.28	12.78	60.06	74.00	-13.94	peak	
2	*	11000.000	34.86	12.78	47.64	54.00	-6.36	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

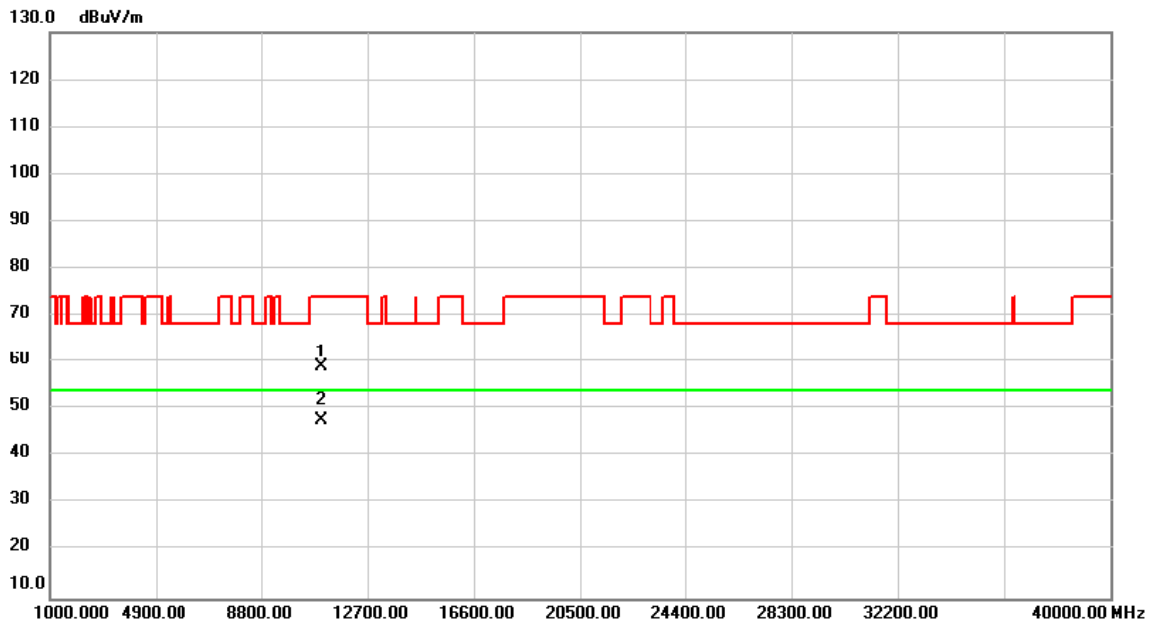


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	46.39	12.78	59.17	74.00	-14.83	peak	
2	*	11000.000	35.01	12.78	47.79	54.00	-6.21	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

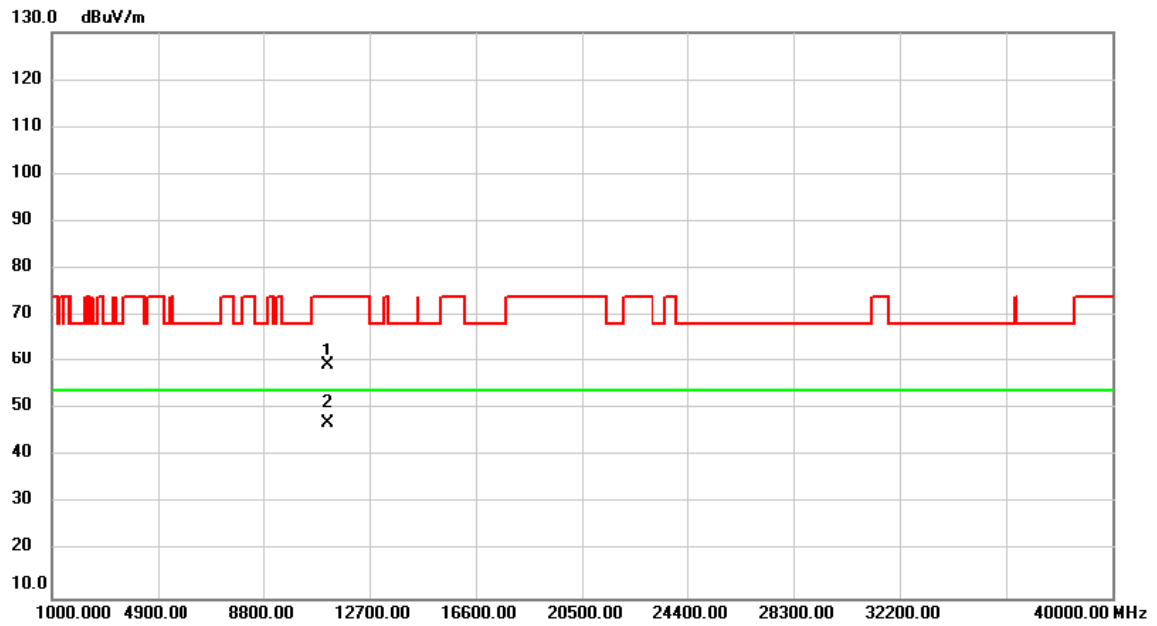

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	46.51	12.90	59.41	74.00	-14.59	peak	
2	*	11160.000	34.23	12.90	47.13	54.00	-6.87	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

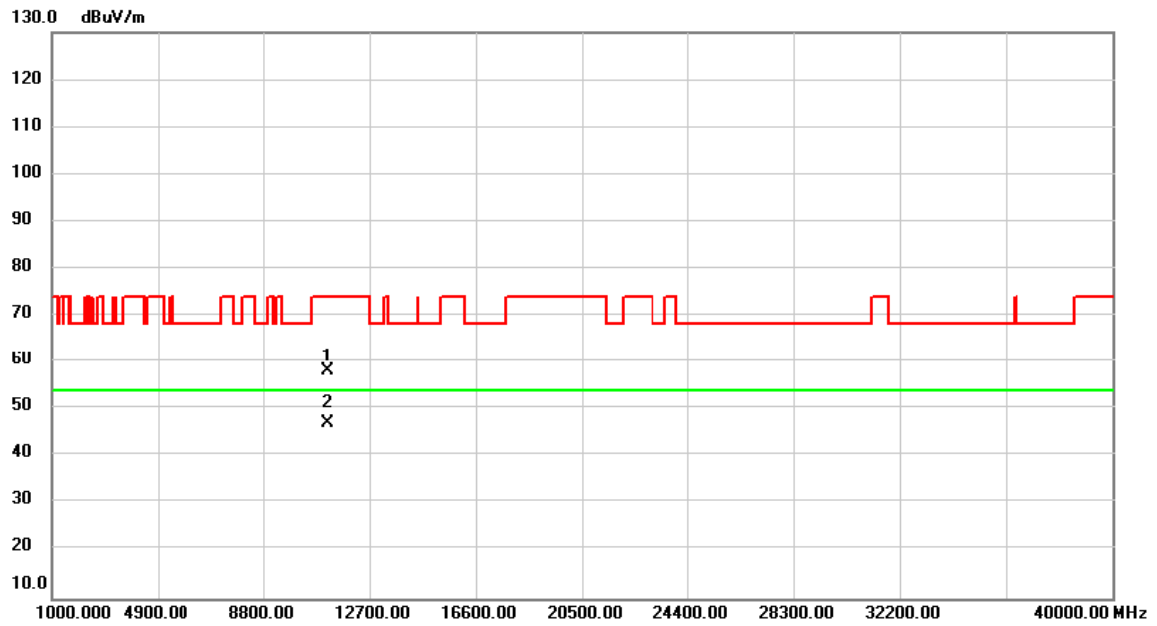


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	45.26	12.90	58.16	74.00	-15.84	peak	
2	*	11160.000	34.25	12.90	47.15	54.00	-6.85	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

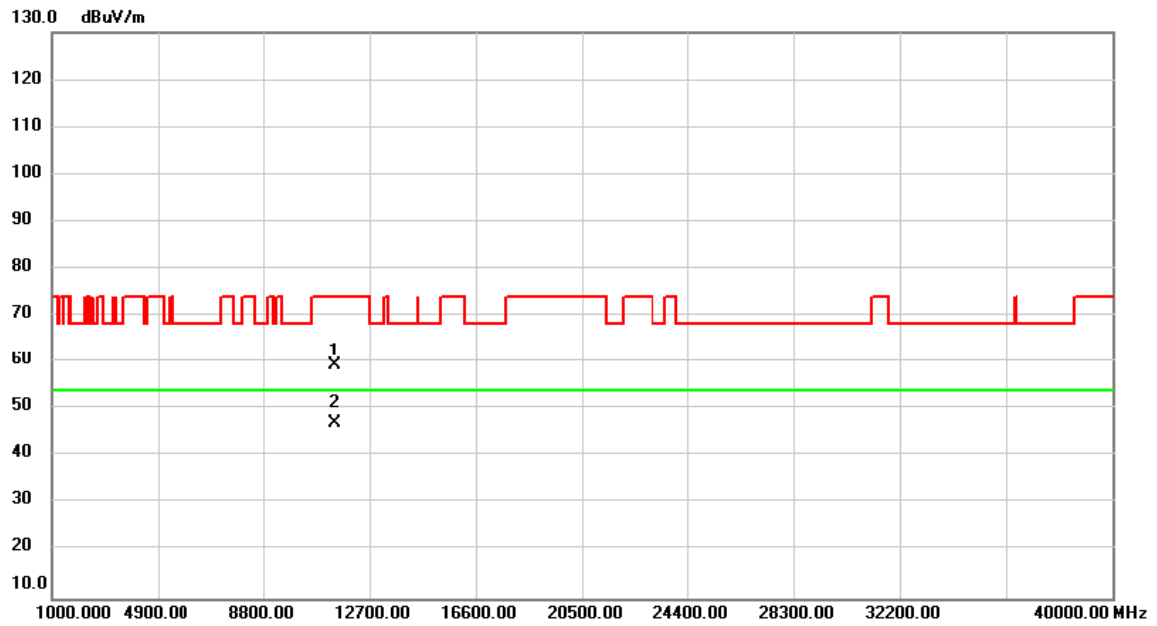


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	46.16	13.08	59.24	74.00	-14.76	peak	
2	*	11400.000	33.93	13.08	47.01	54.00	-6.99	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

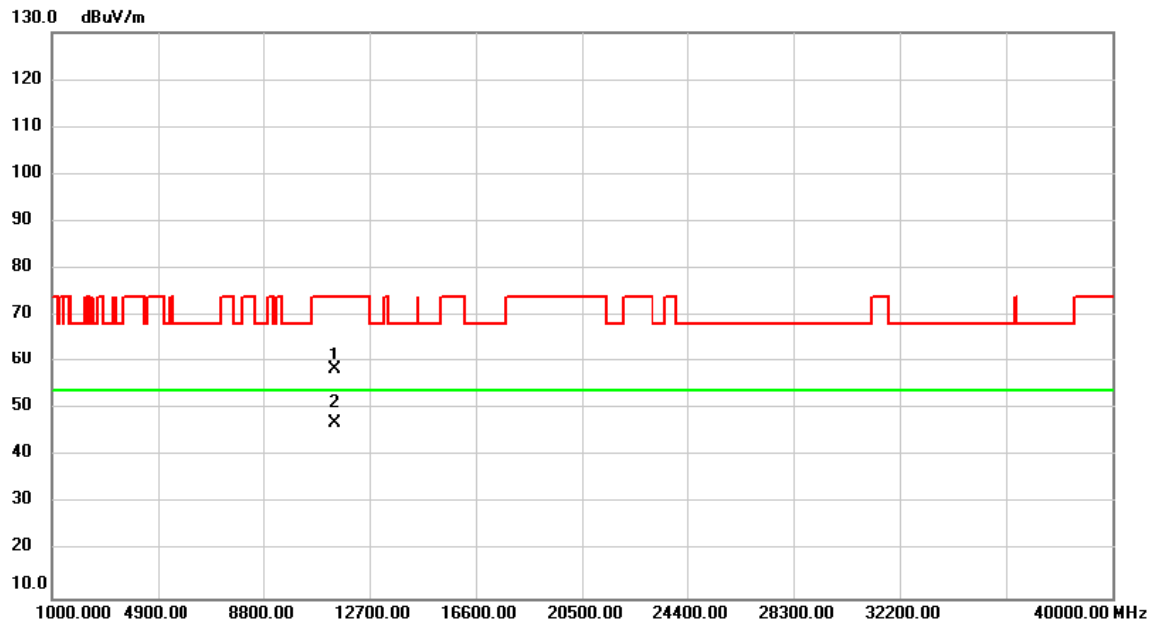


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	45.29	13.08	58.37	74.00	-15.63	peak	
2	*	11400.000	34.00	13.08	47.08	54.00	-6.92	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Vertical

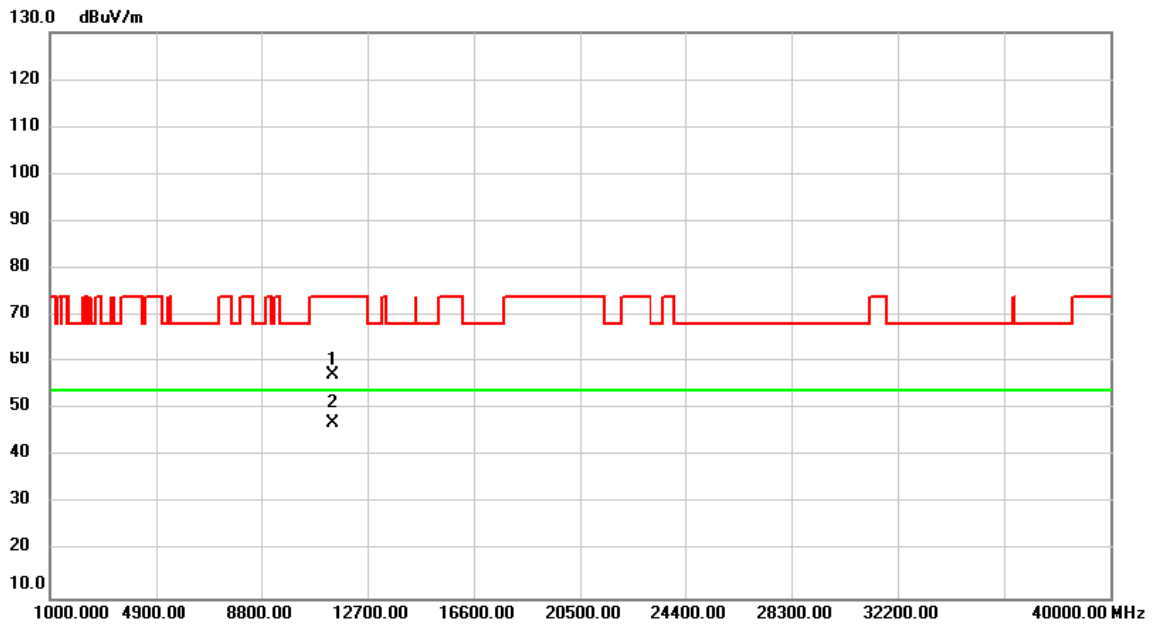


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	44.25	13.11	57.36	74.00	-16.64	peak	
2	*	11440.000	34.01	13.11	47.12	54.00	-6.88	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Horizontal

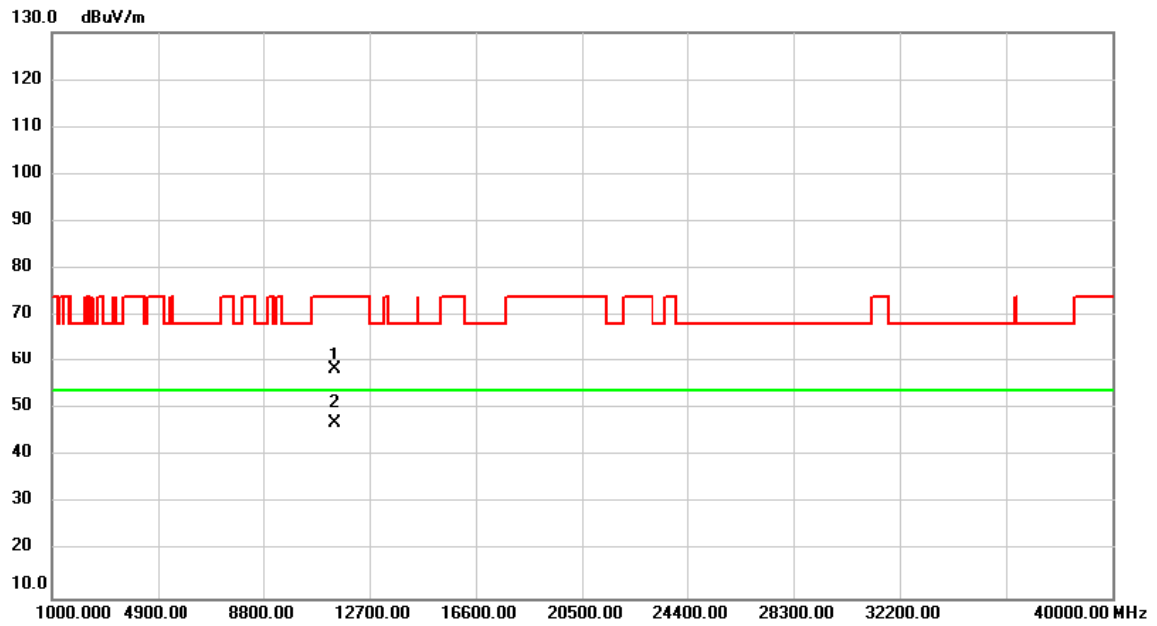


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	45.39	13.11	58.50	74.00	-15.50	peak	
2	*	11440.000	34.07	13.11	47.18	54.00	-6.82	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

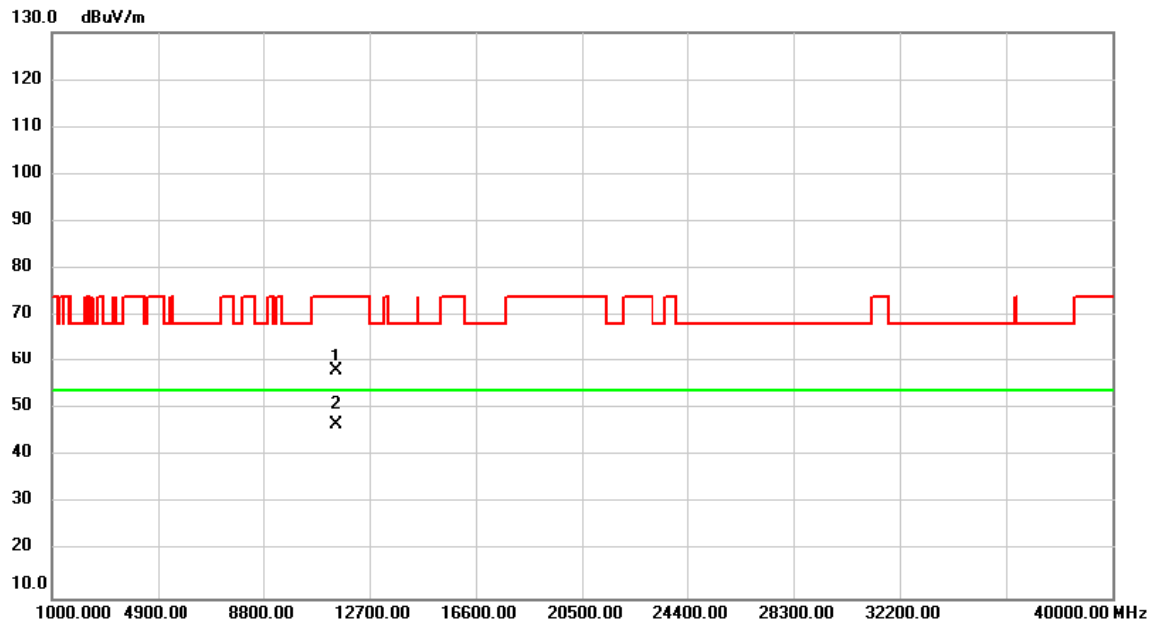


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	44.90	13.14	58.04	74.00	-15.96	peak	
2	*	11490.000	33.55	13.14	46.69	54.00	-7.31	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

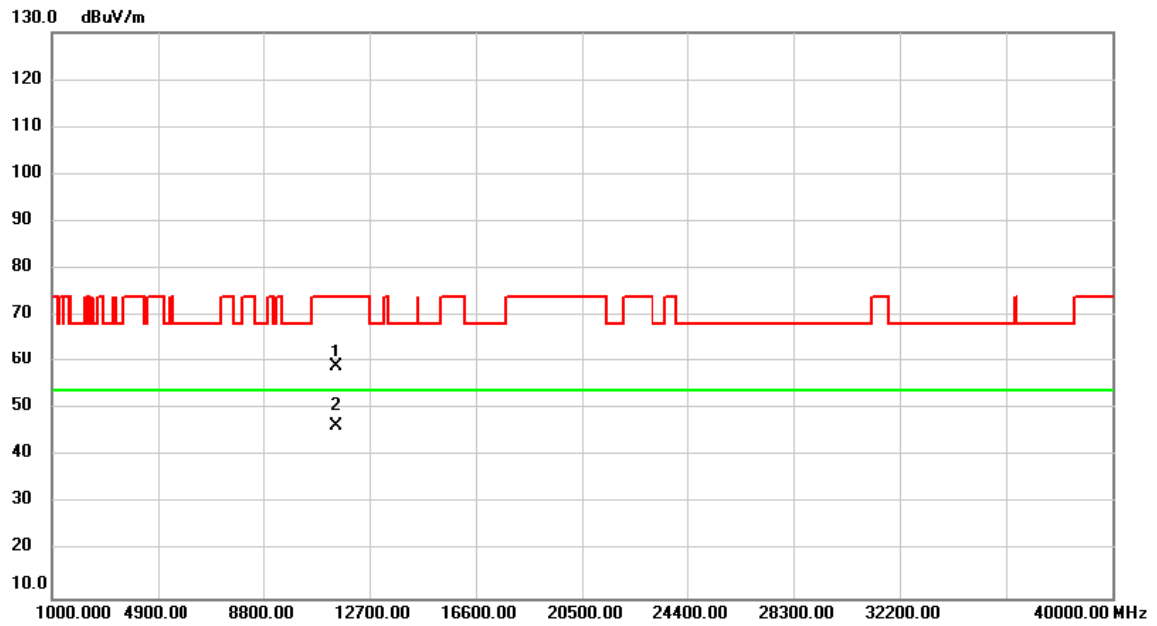


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	45.80	13.14	58.94	74.00	-15.06	peak	
2	*	11490.000	33.37	13.14	46.51	54.00	-7.49	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

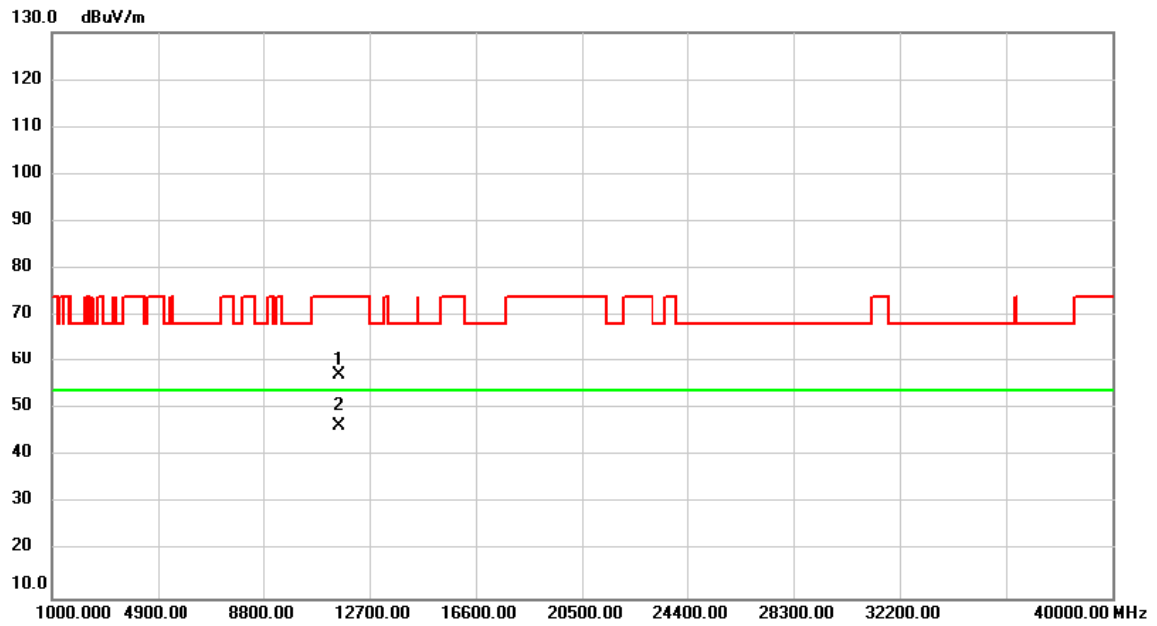

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	44.20	13.20	57.40	74.00	-16.60	peak	
2	*	11570.000	33.27	13.20	46.47	54.00	-7.53	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-3_ IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

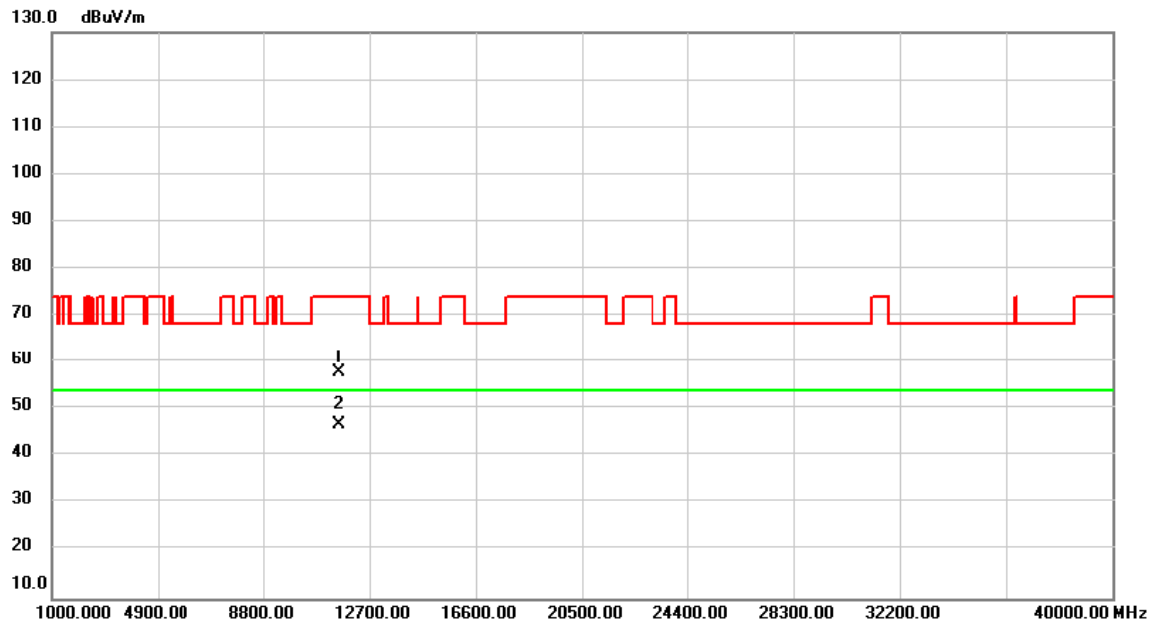


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	44.80	13.20	58.00	74.00	-16.00	peak	
2	*	11570.000	33.58	13.20	46.78	54.00	-7.22	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

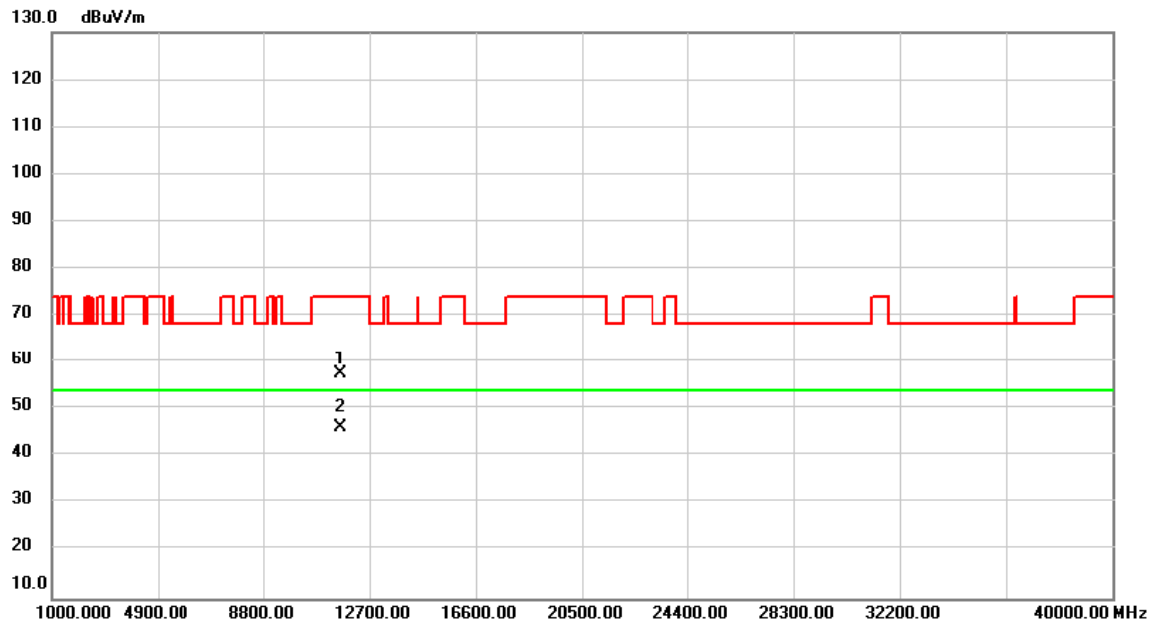


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	44.34	13.25	57.59	74.00	-16.41	peak	
2	*	11650.000	32.83	13.25	46.08	54.00	-7.92	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

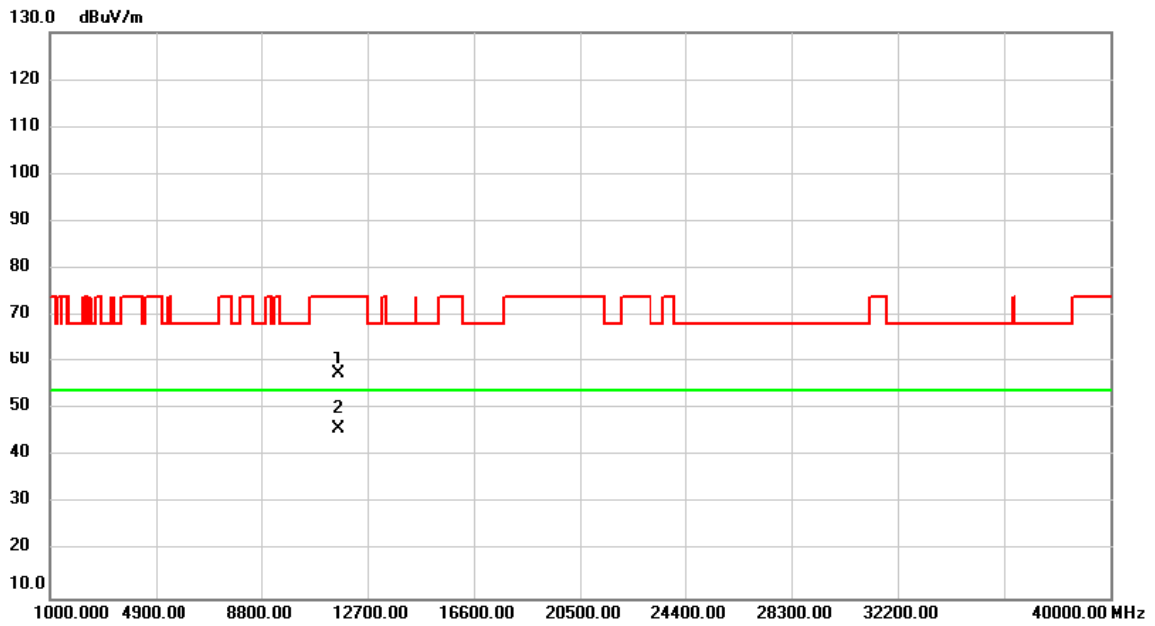


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	44.23	13.25	57.48	74.00	-16.52	peak	
2	*	11650.000	32.71	13.25	45.96	54.00	-8.04	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

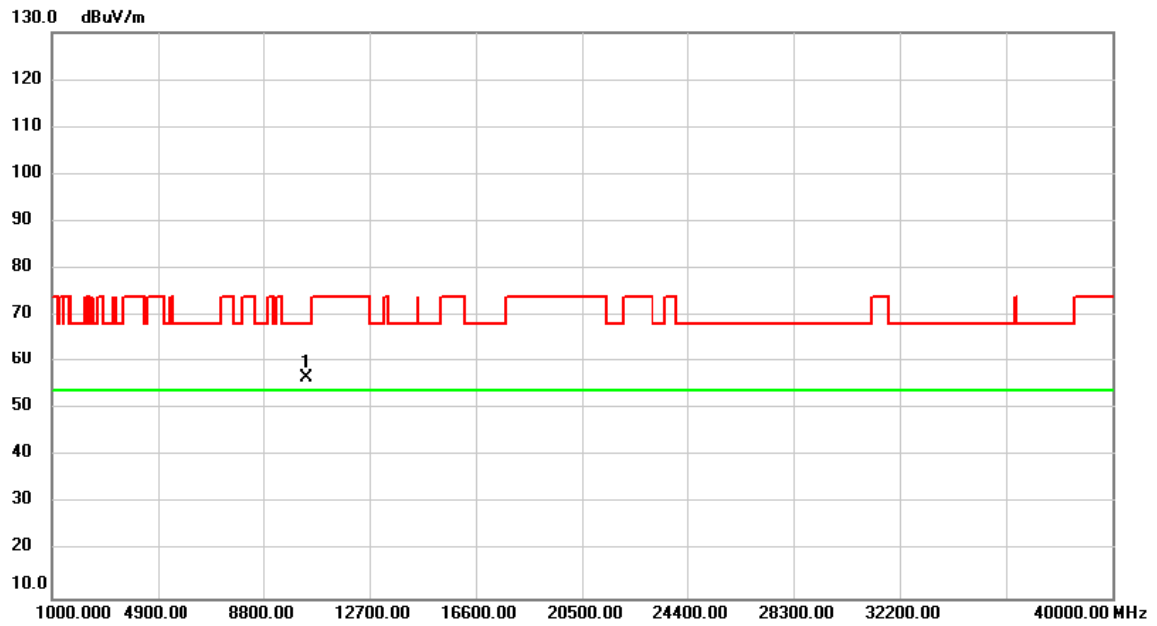


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10380.000	44.43	12.30	56.73	68.20	-11.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

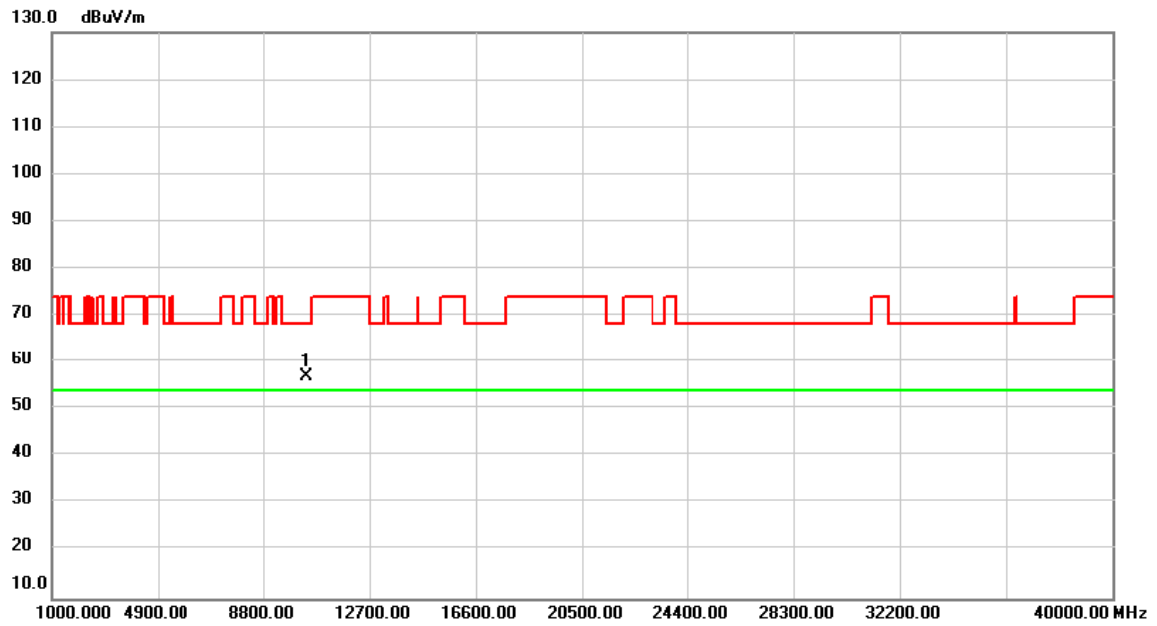


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.000	44.68	12.30	56.98	68.20	-11.22	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

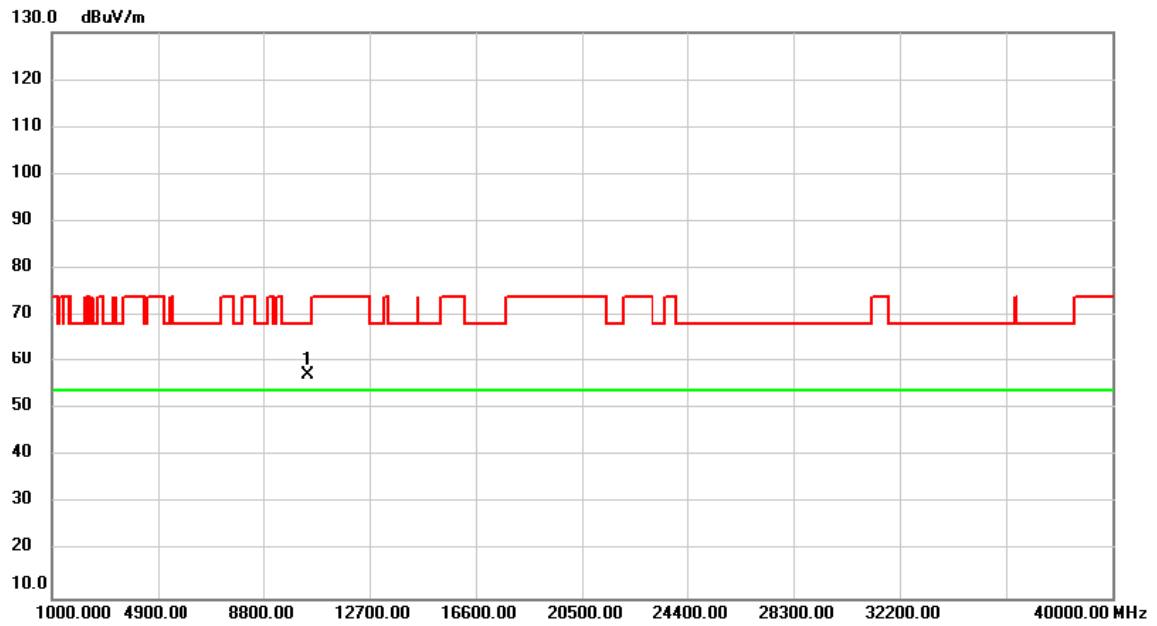


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.000	45.01	12.35	57.36	68.20	-10.84	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

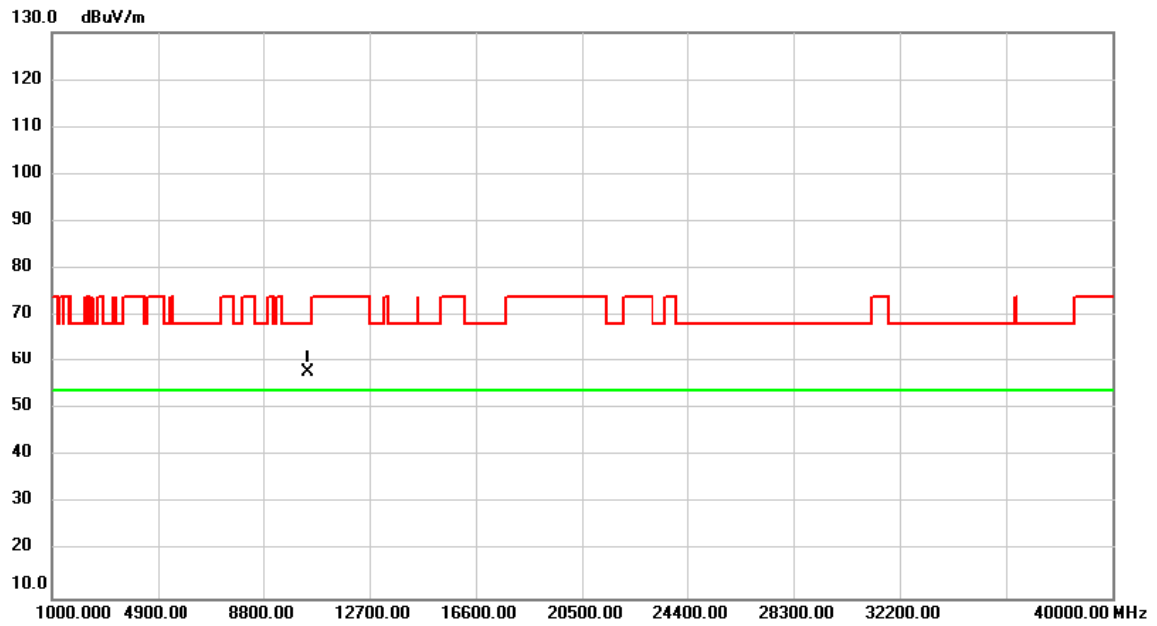


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.000	45.43	12.35	57.78	68.20	-10.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

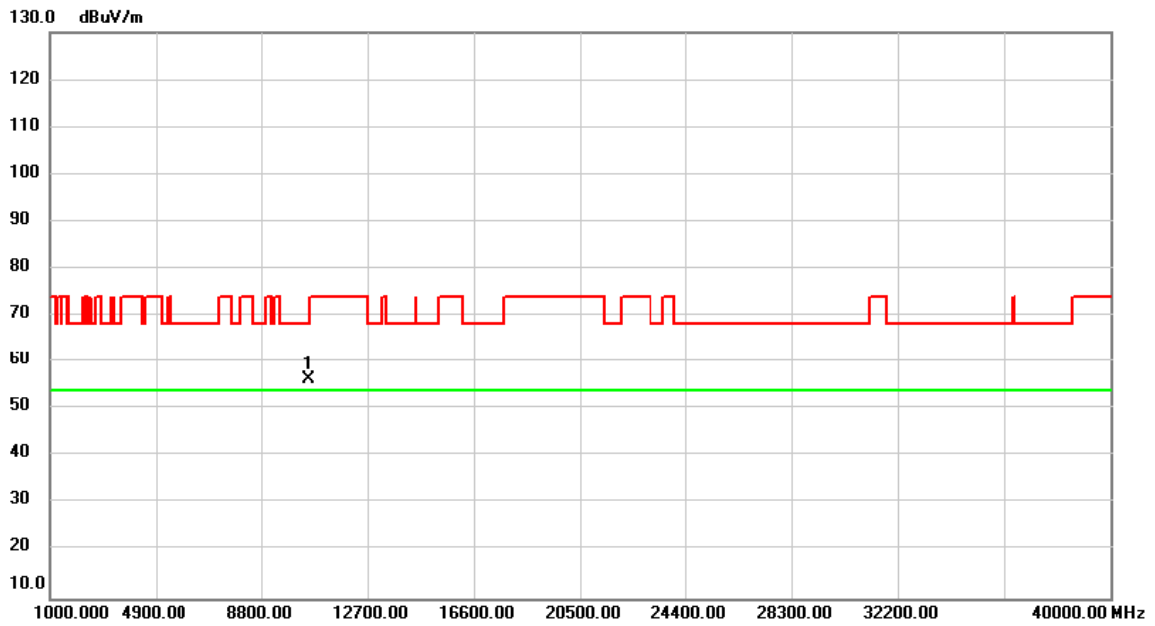


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.000	43.95	12.41	56.36	68.20	-11.84	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Horizontal

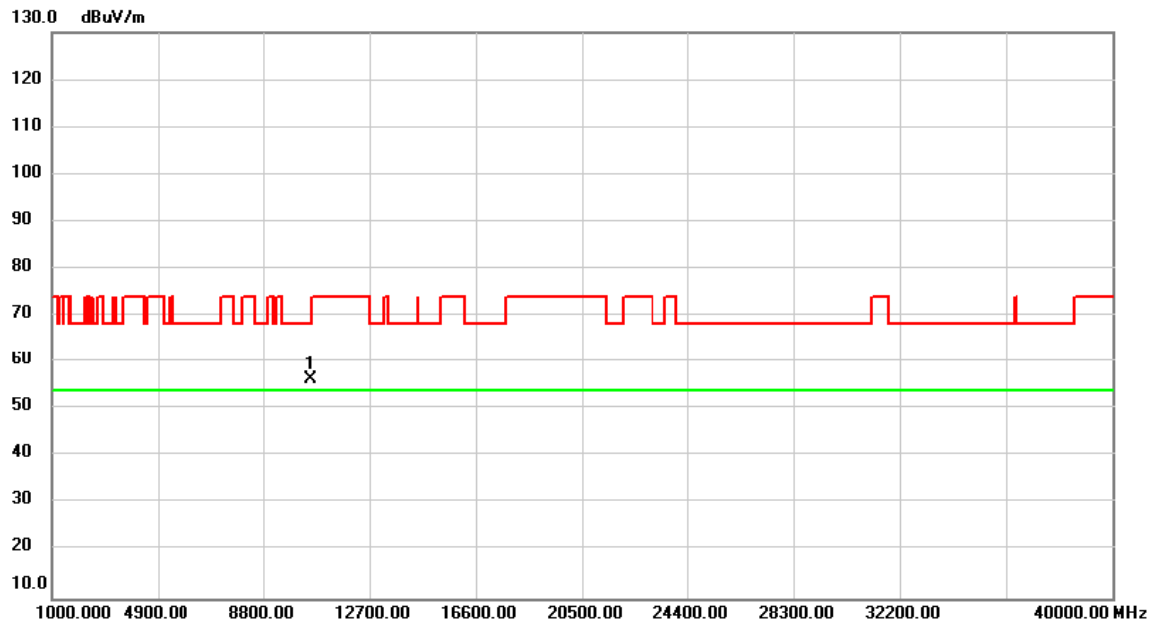


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.000	43.88	12.41	56.29	68.20	-11.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

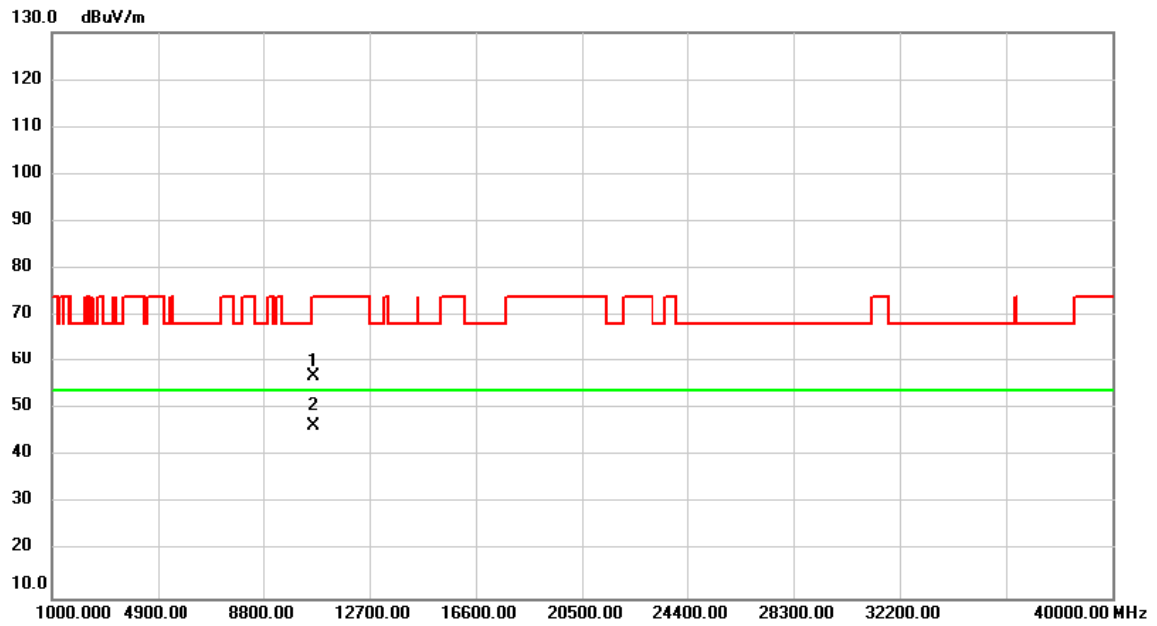


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	44.53	12.47	57.00	74.00	-17.00	peak	
2	*	10620.000	34.01	12.47	46.48	54.00	-7.52	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Horizontal

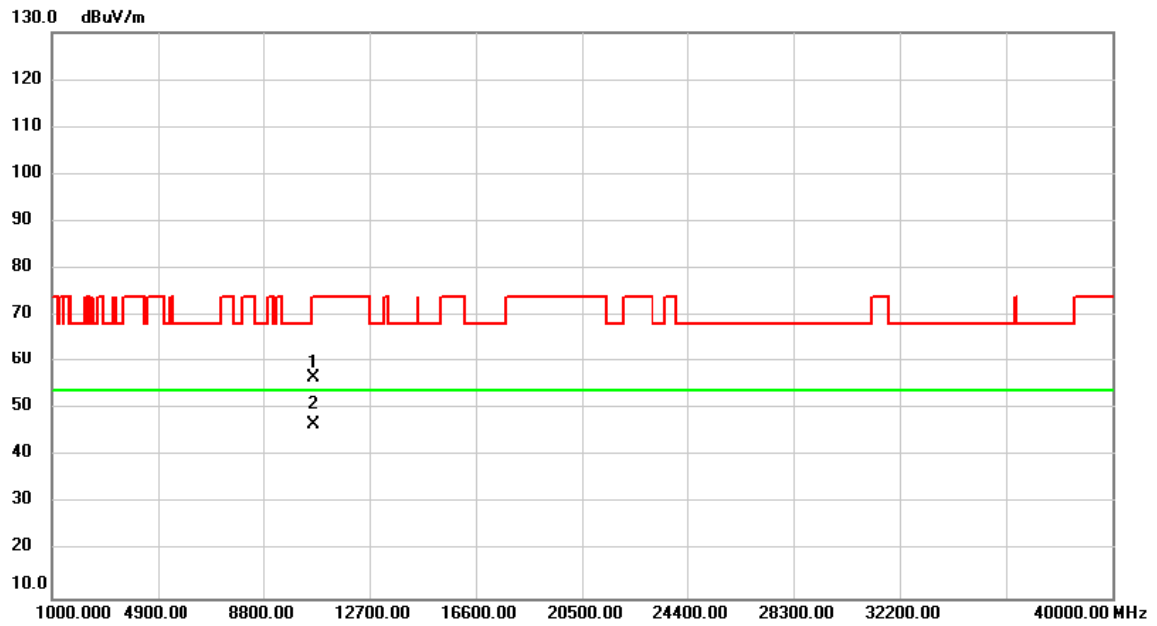


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	44.06	12.47	56.53	74.00	-17.47	peak	
2	*	10620.000	34.24	12.47	46.71	54.00	-7.29	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

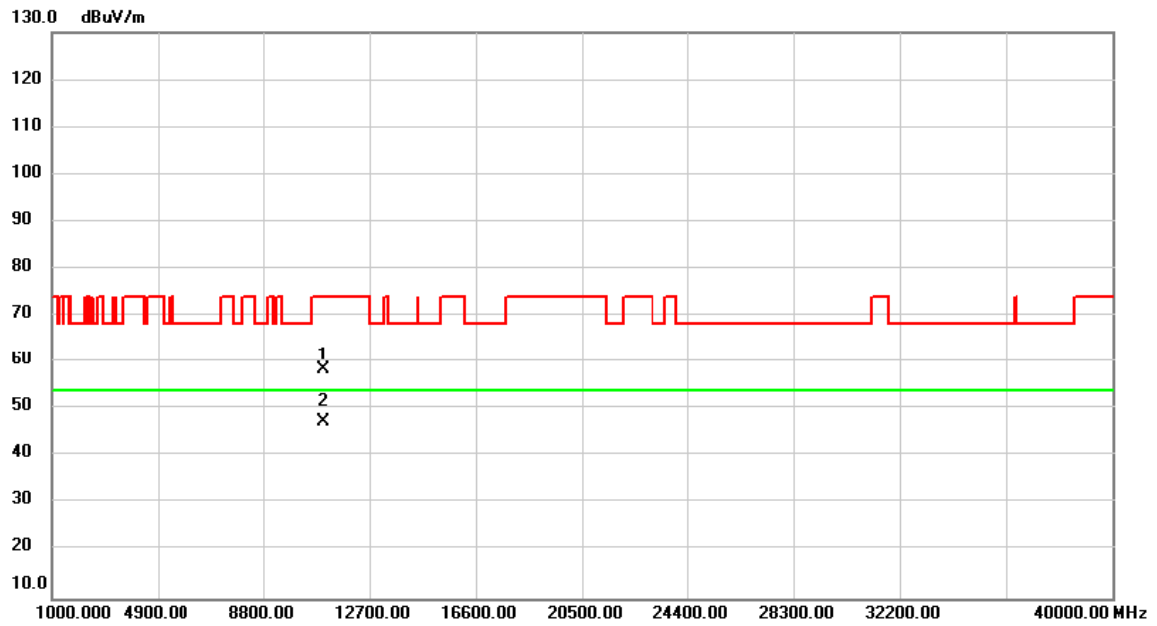


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	45.71	12.79	58.50	74.00	-15.50	peak	
2	*	11020.000	34.68	12.79	47.47	54.00	-6.53	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

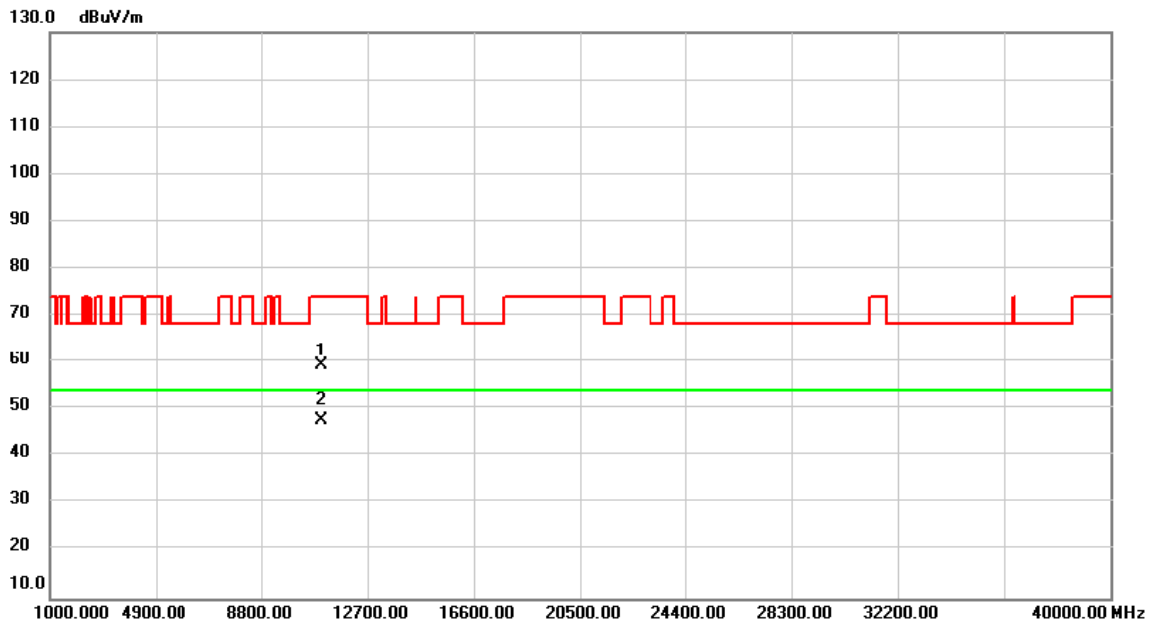


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	46.44	12.79	59.23	74.00	-14.77	peak	
2	*	11020.000	34.73	12.79	47.52	54.00	-6.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Vertical

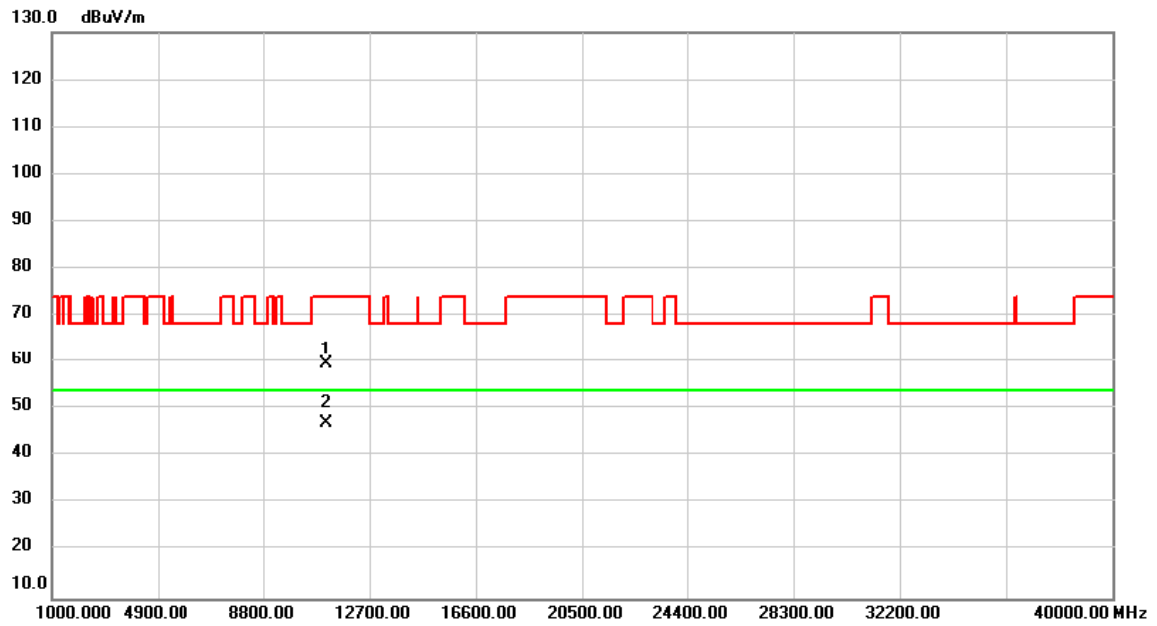


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	46.76	12.85	59.61	74.00	-14.39	peak	
2	*	11100.000	34.33	12.85	47.18	54.00	-6.82	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Horizontal

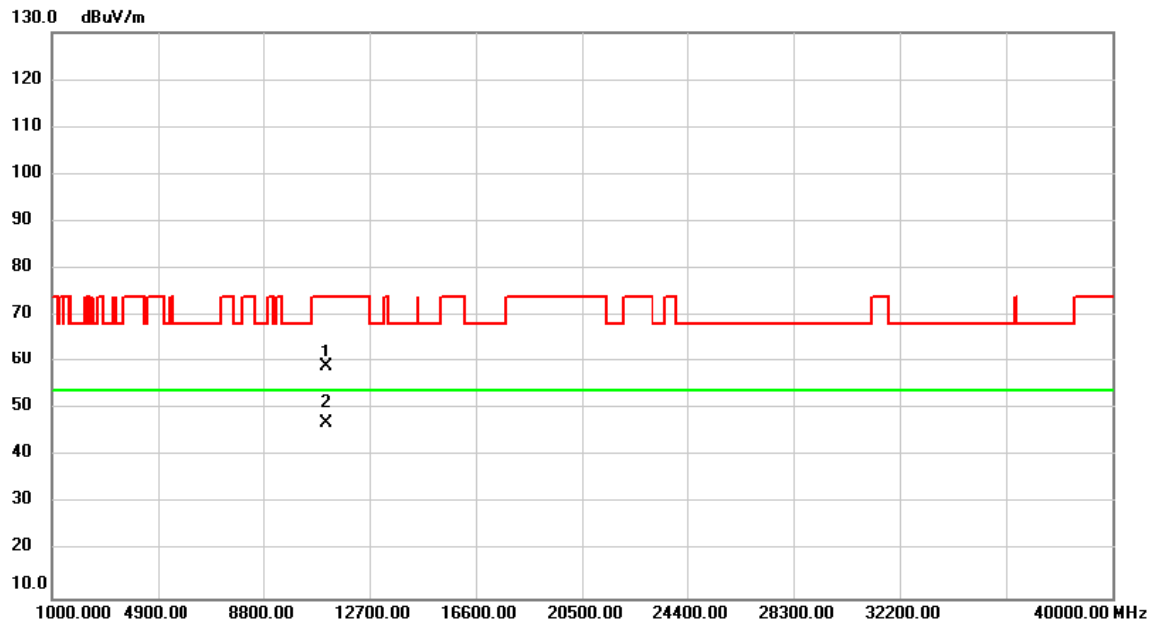


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	46.23	12.85	59.08	74.00	-14.92	peak	
2	*	11100.000	34.23	12.85	47.08	54.00	-6.92	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

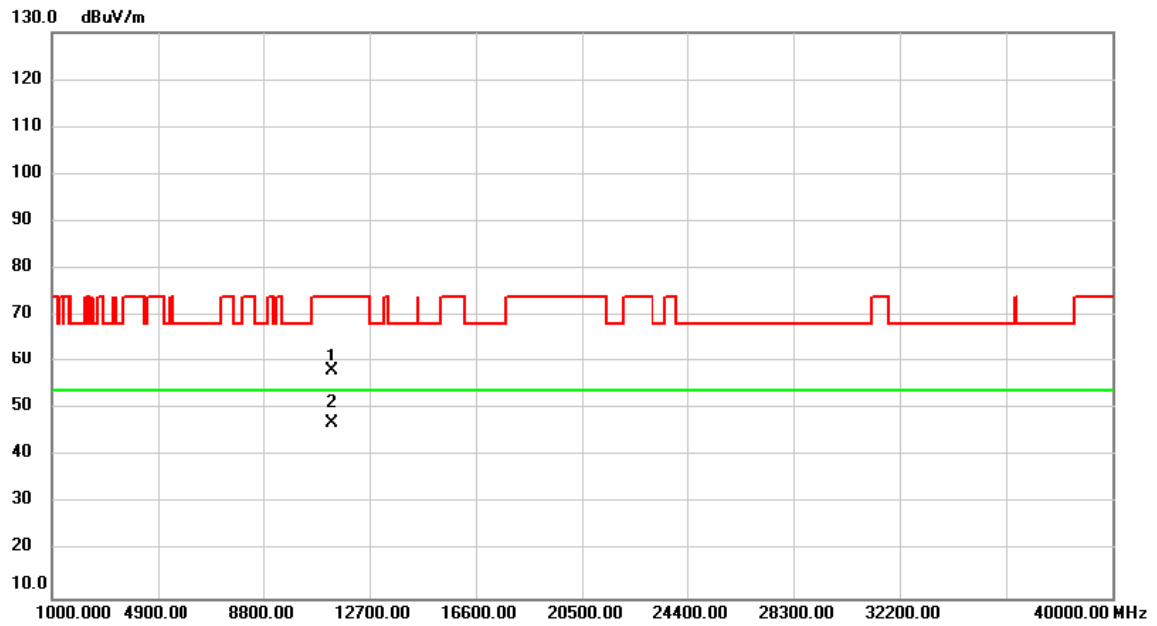

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	45.27	13.03	58.30	74.00	-15.70	peak	
2	*	11340.000	33.88	13.03	46.91	54.00	-7.09	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Horizontal

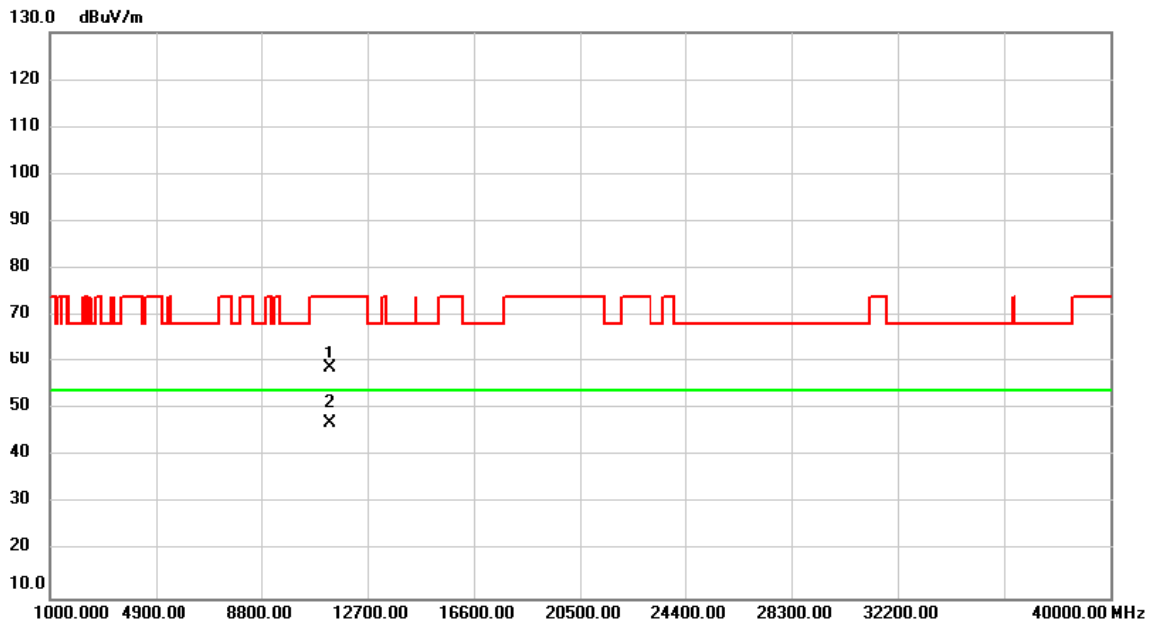


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	45.71	13.03	58.74	74.00	-15.26	peak	
2	*	11340.000	33.93	13.03	46.96	54.00	-7.04	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH142: 5710 MHz	Polarization	Vertical

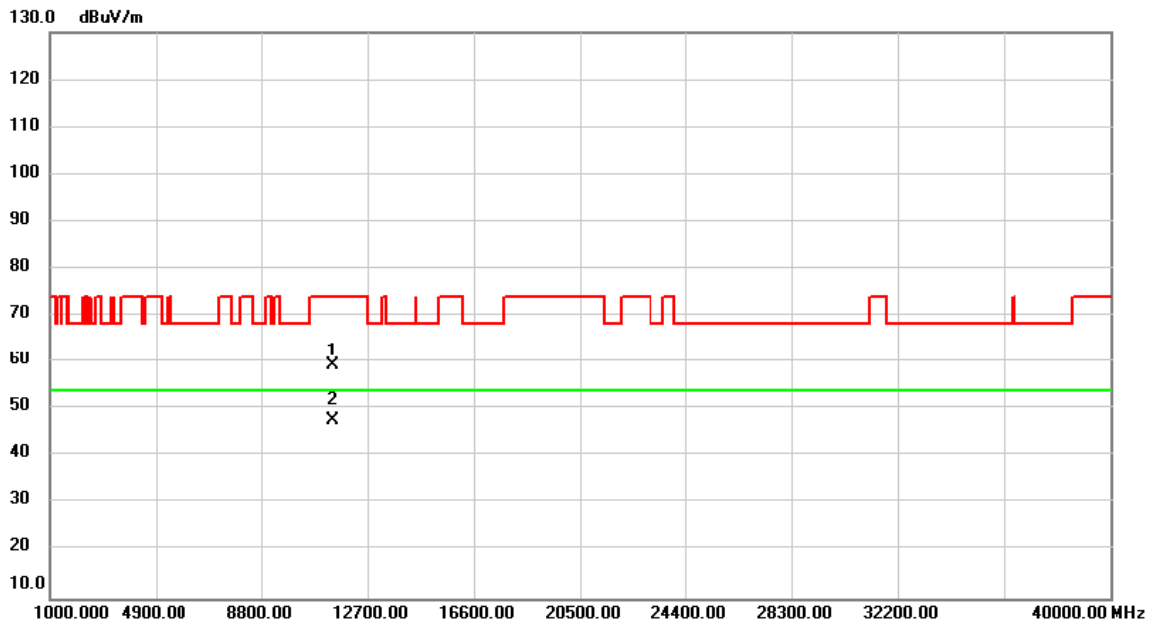


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.000	46.16	13.09	59.25	74.00	-14.75	peak	
2	*	11420.000	34.54	13.09	47.63	54.00	-6.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH142: 5710 MHz	Polarization	Horizontal

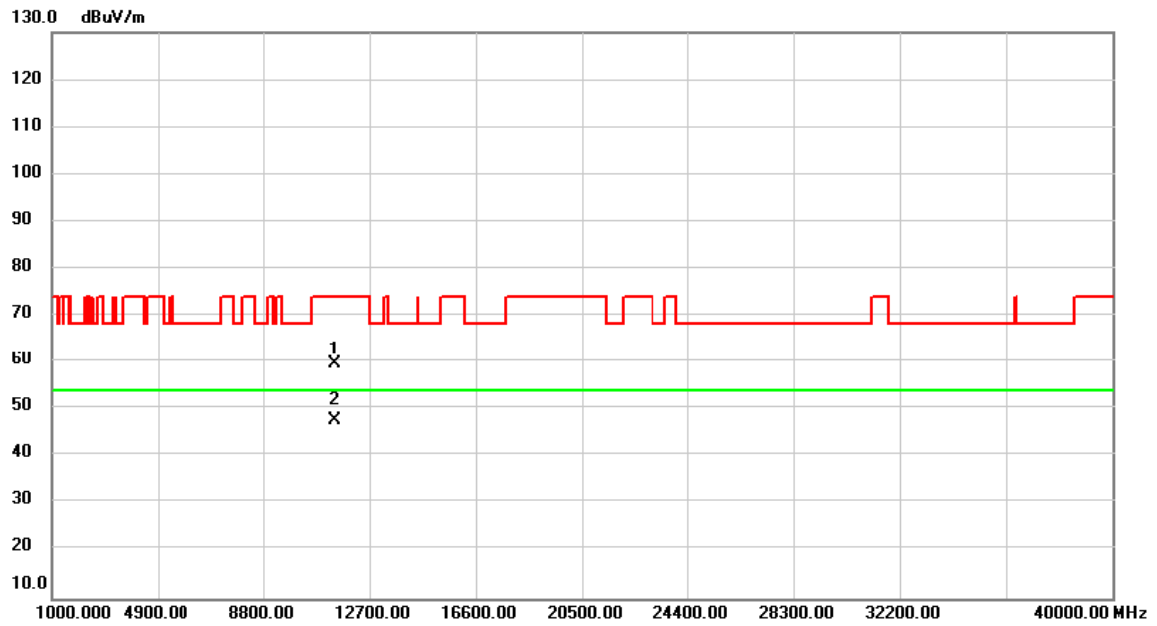


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.000	46.53	13.09	59.62	74.00	-14.38	peak	
2	*	11420.000	34.68	13.09	47.77	54.00	-6.23	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

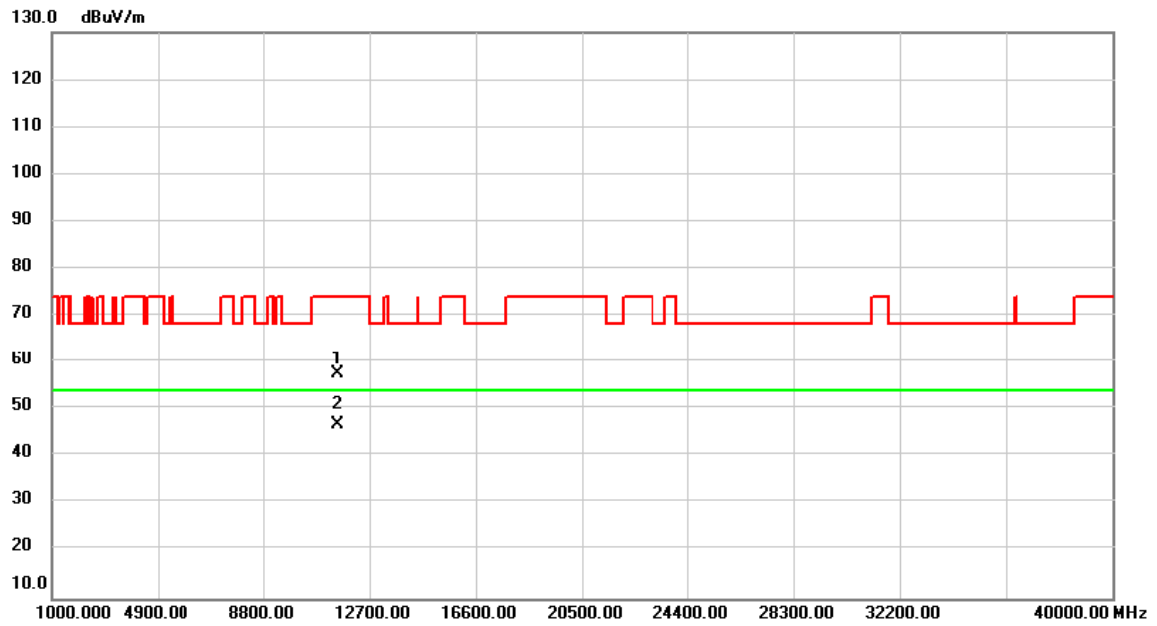


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	44.29	13.17	57.46	74.00	-16.54	peak	
2	*	11510.000	33.67	13.17	46.84	54.00	-7.16	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

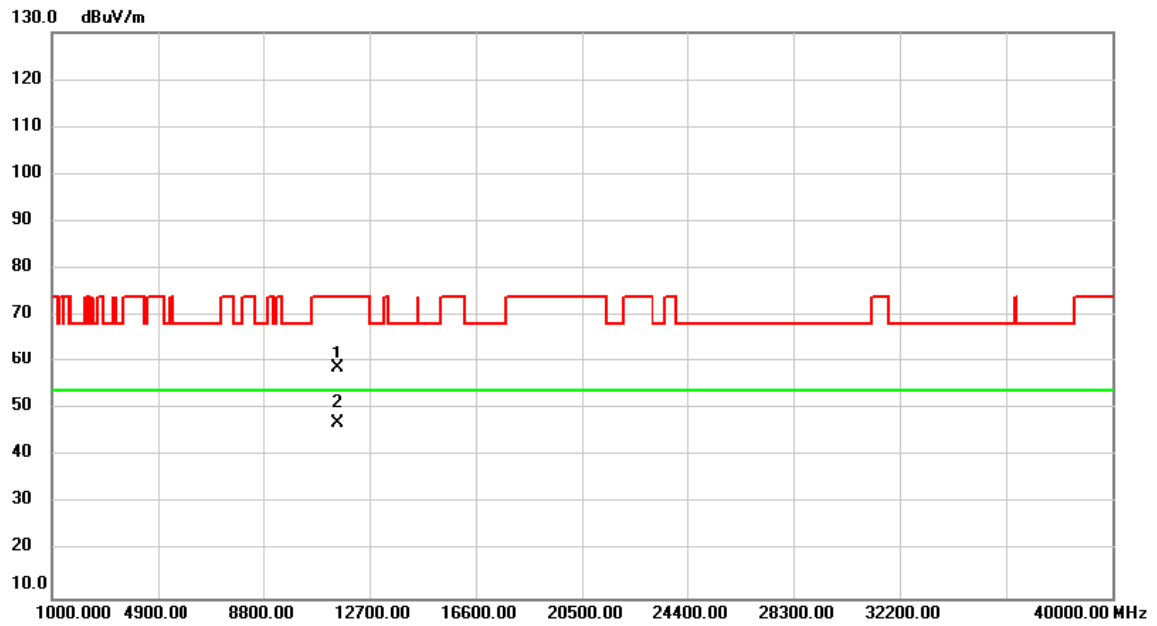


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	45.48	13.17	58.65	74.00	-15.35	peak	
2	*	11510.000	33.90	13.17	47.07	54.00	-6.93	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

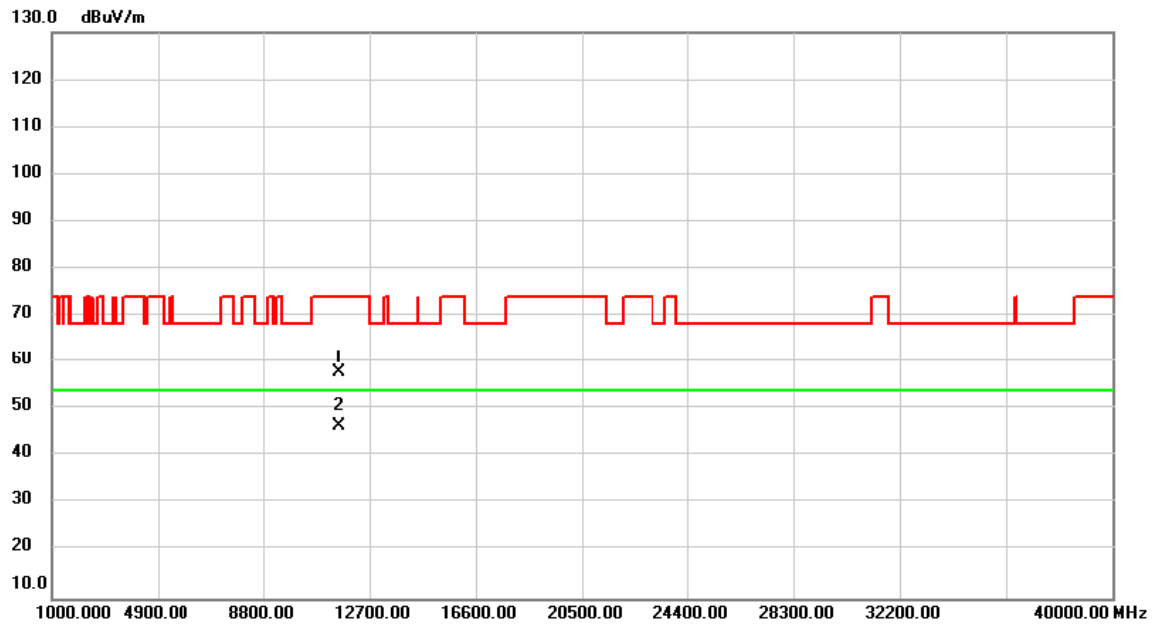


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	44.56	13.21	57.77	74.00	-16.23	peak	
2	*	11590.000	33.14	13.21	46.35	54.00	-7.65	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

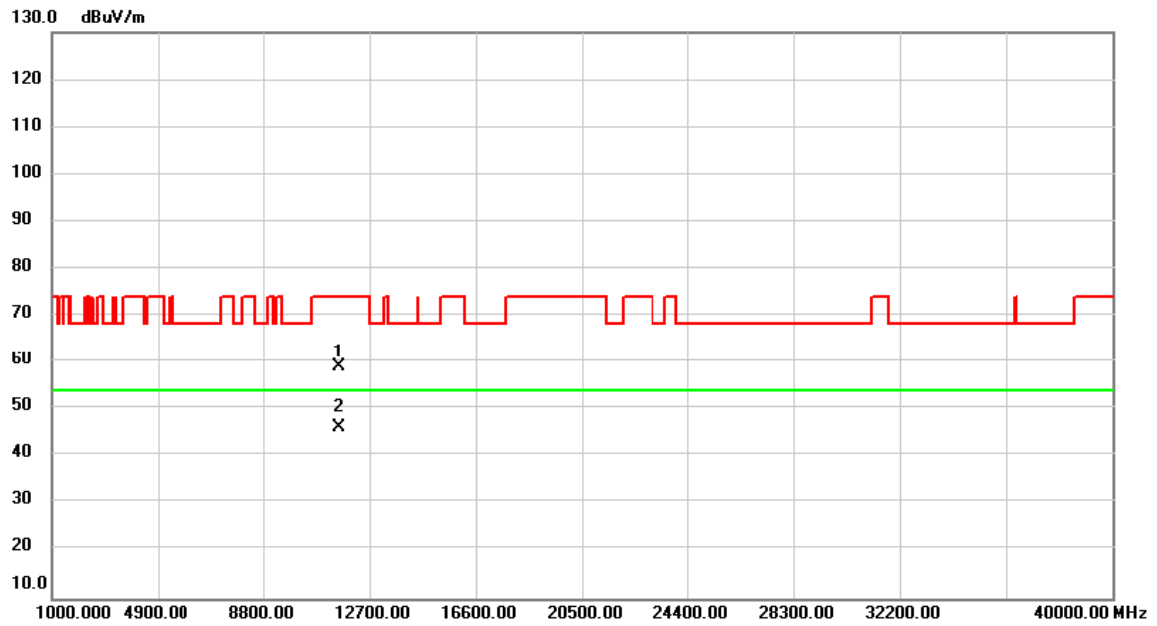


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	45.94	13.21	59.15	74.00	-14.85	peak	
2	*	11590.000	32.91	13.21	46.12	54.00	-7.88	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

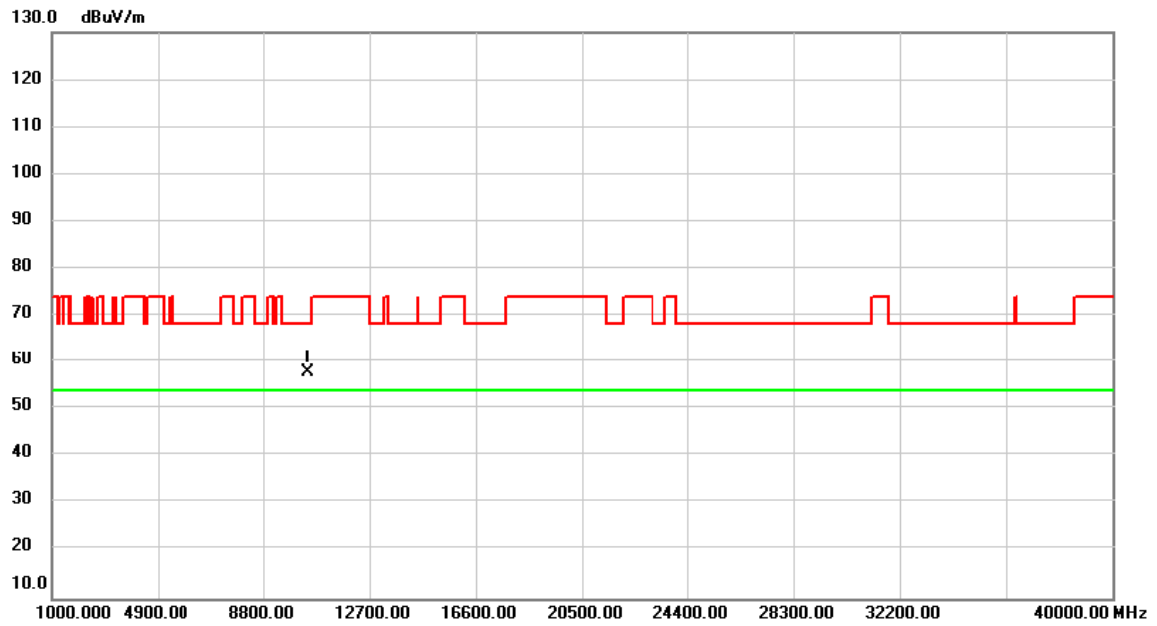


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.000	45.45	12.32	57.77	68.20	-10.43	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

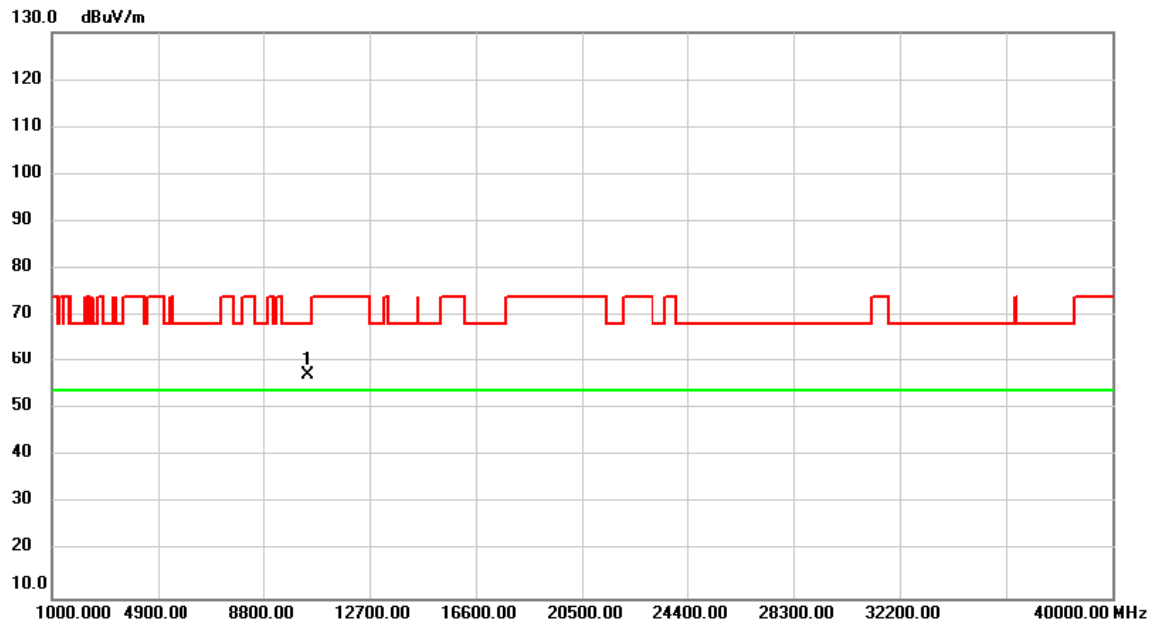


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.000	44.81	12.32	57.13	68.20	-11.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_ IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

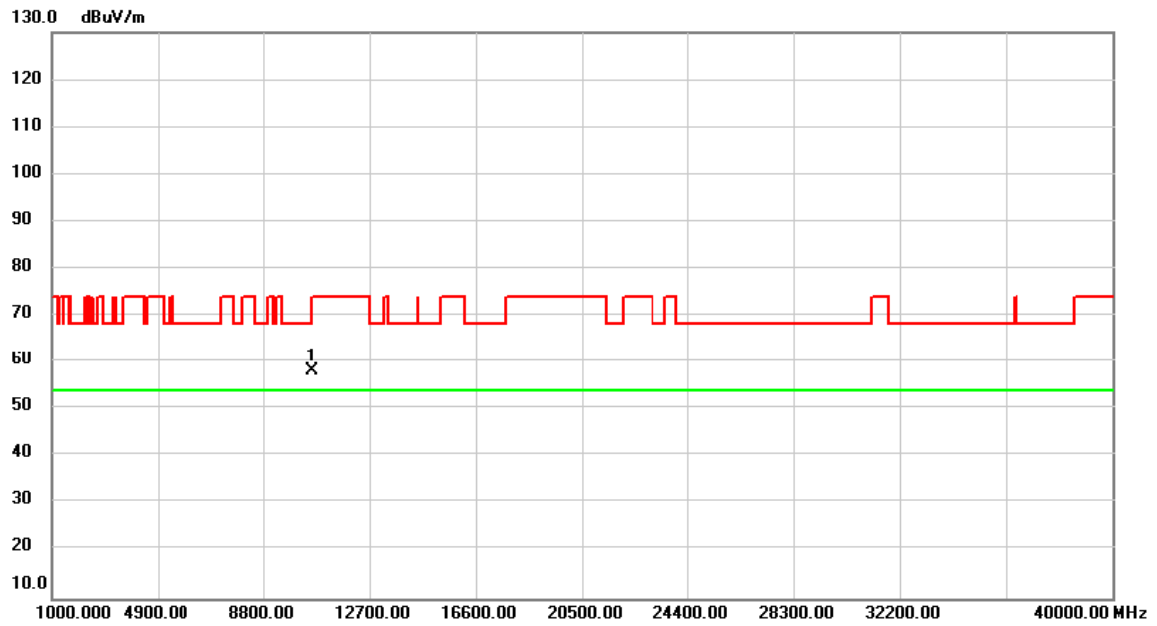


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.000	45.70	12.44	58.14	68.20	-10.06	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Horizontal

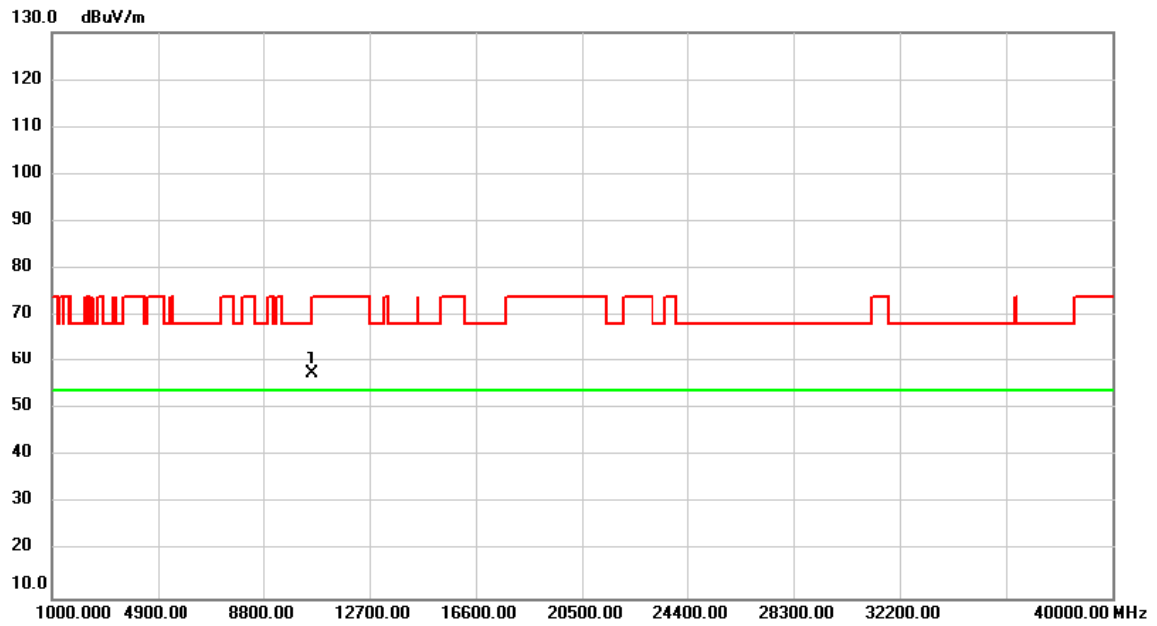


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.000	45.05	12.44	57.49	68.20	-10.71	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

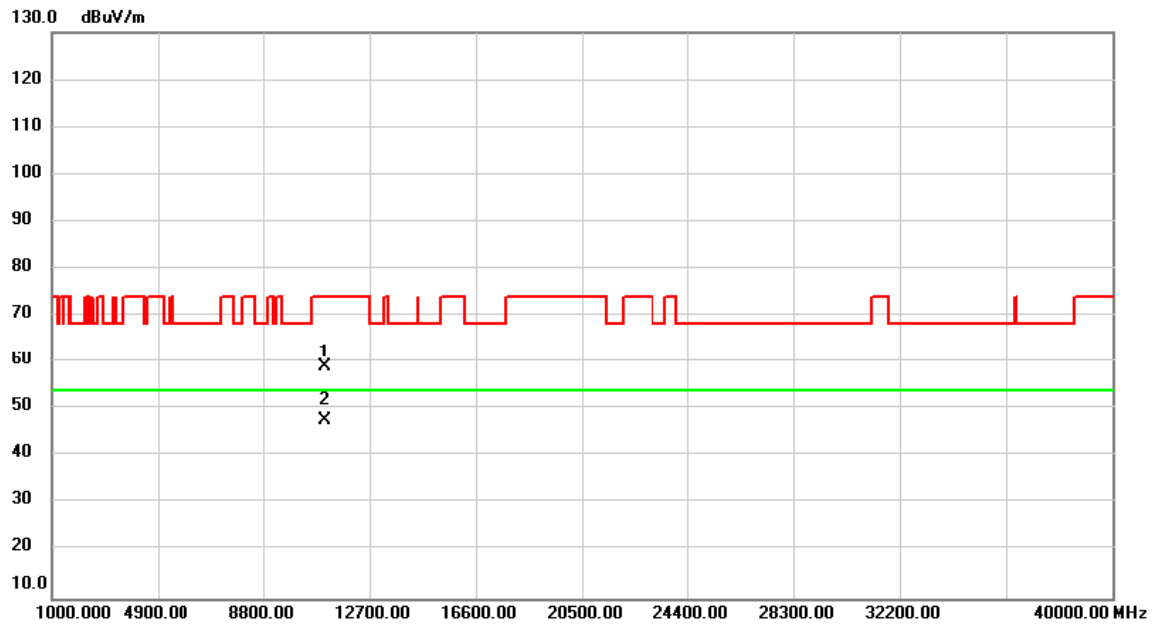


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	46.11	12.83	58.94	74.00	-15.06	peak	
2	*	11060.000	34.94	12.83	47.77	54.00	-6.23	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Horizontal

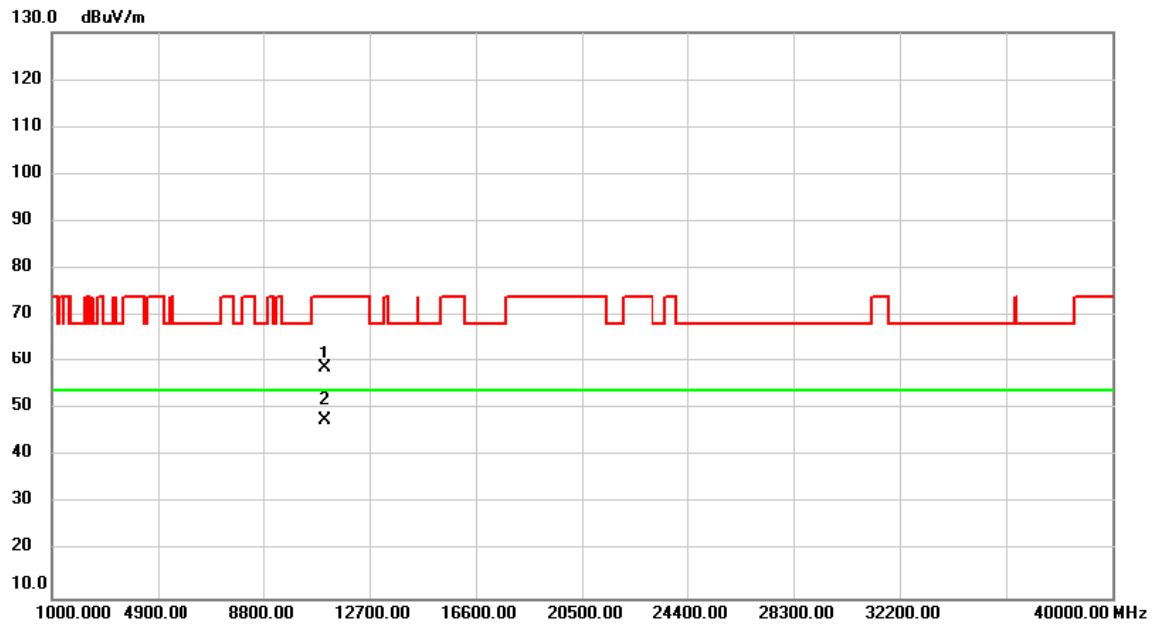


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	45.91	12.83	58.74	74.00	-15.26	peak	
2	*	11060.000	34.90	12.83	47.73	54.00	-6.27	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

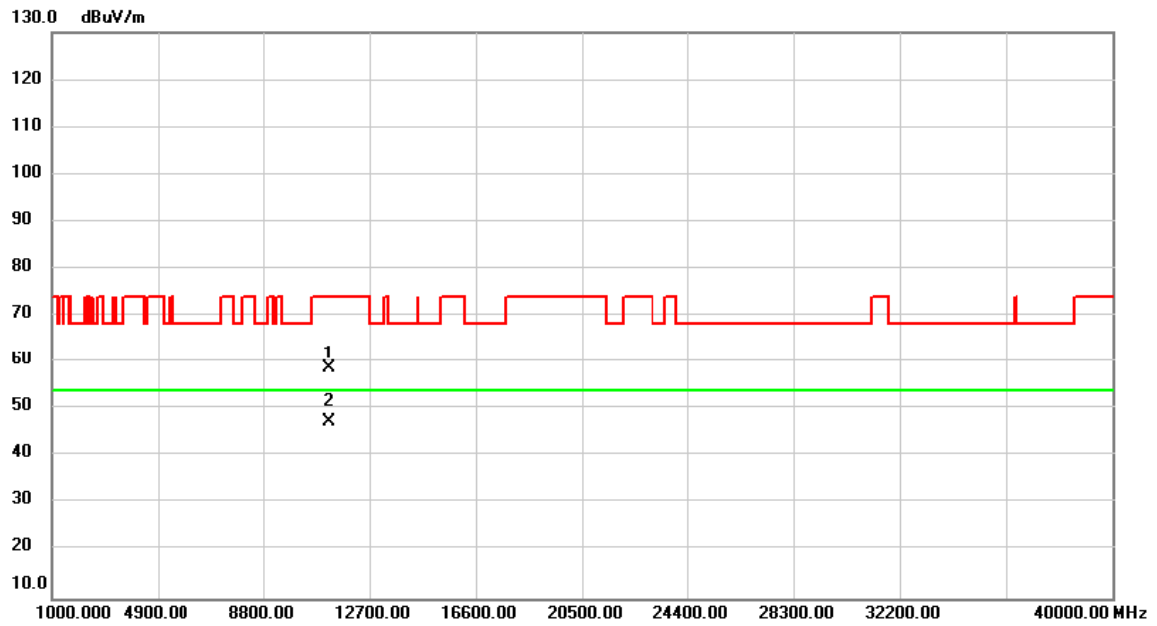


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	45.73	12.94	58.67	74.00	-15.33	peak	
2	*	11220.000	34.39	12.94	47.33	54.00	-6.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Horizontal

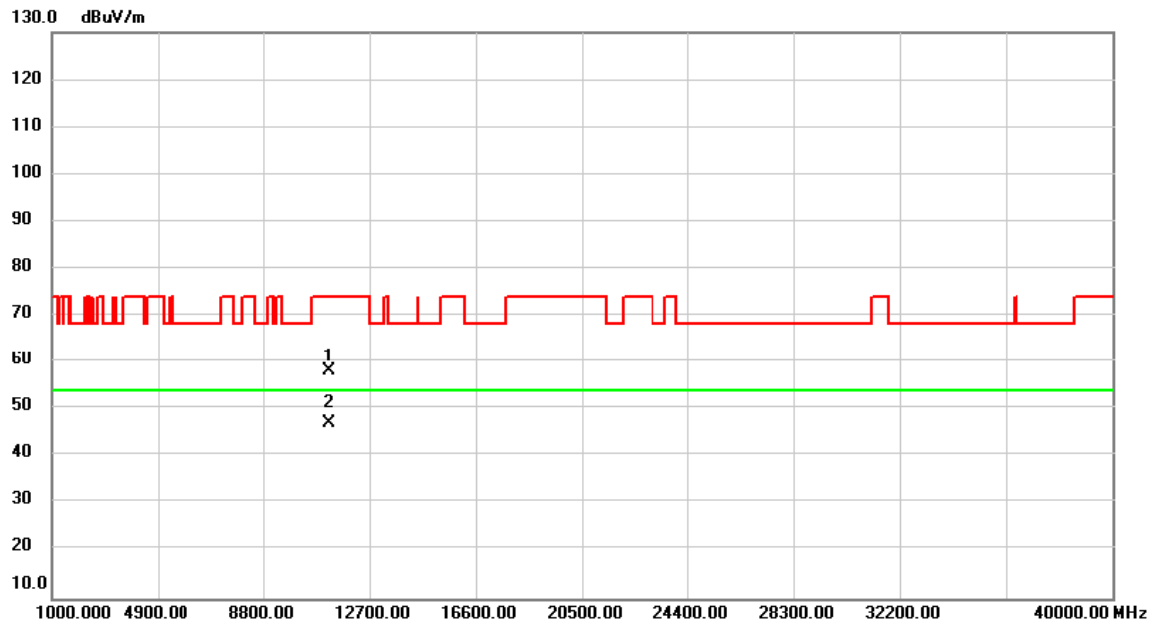


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	45.33	12.94	58.27	74.00	-15.73	peak	
2	*	11220.000	33.98	12.94	46.92	54.00	-7.08	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH138: 5690 MHz	Polarization	Vertical

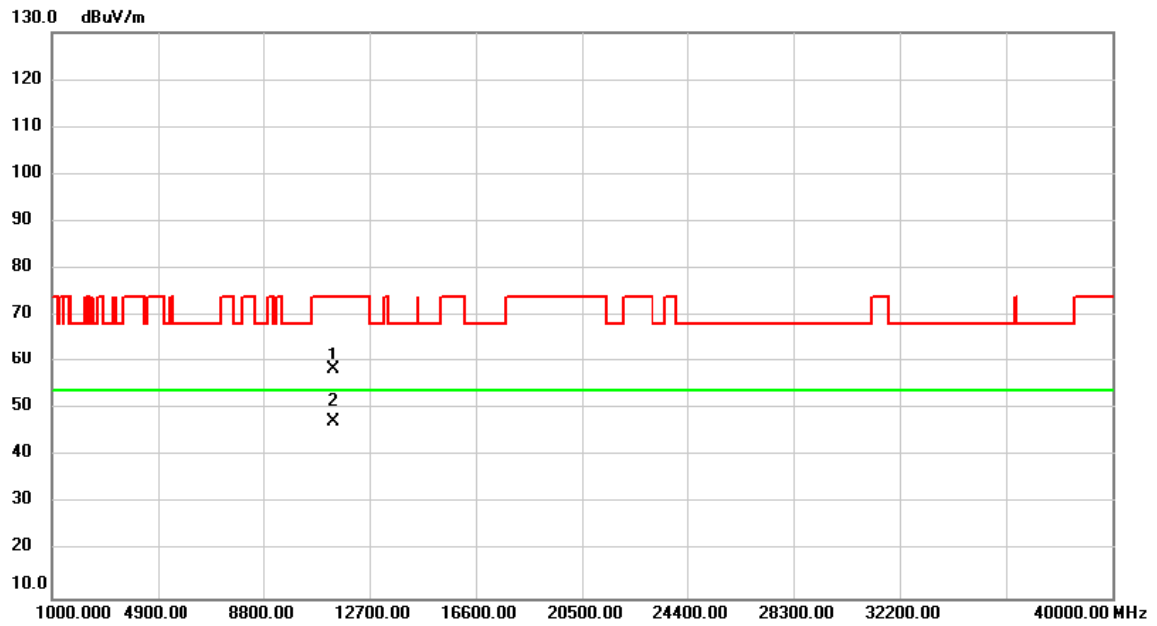

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.000	45.52	13.07	58.59	74.00	-15.41	peak	
2	*	11380.000	34.17	13.07	47.24	54.00	-6.76	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH138: 5690 MHz	Polarization	Horizontal

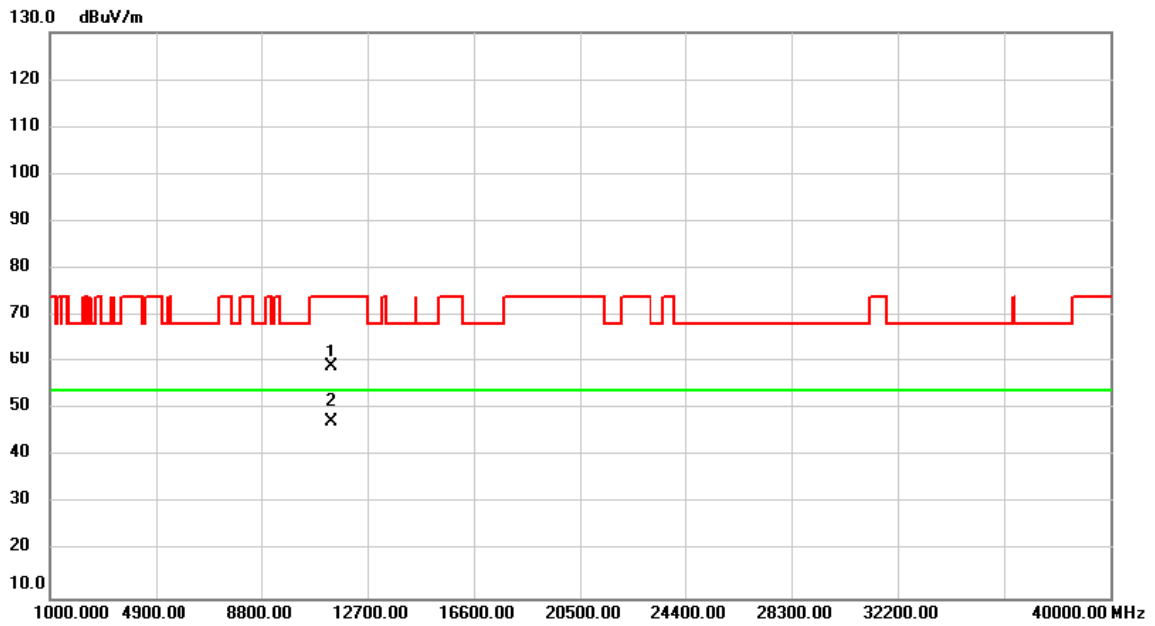


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.000	45.89	13.07	58.96	74.00	-15.04	peak	
2	*	11380.000	34.35	13.07	47.42	54.00	-6.58	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

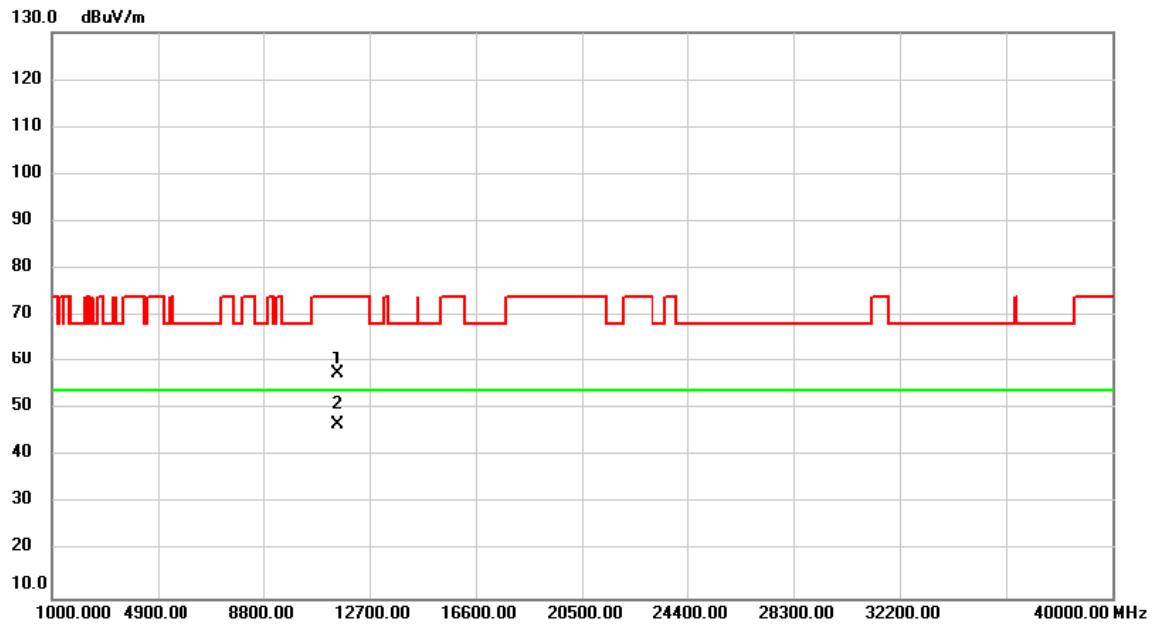


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	44.35	13.18	57.53	74.00	-16.47	peak	
2	*	11550.000	33.62	13.18	46.80	54.00	-7.20	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ac (VHT80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

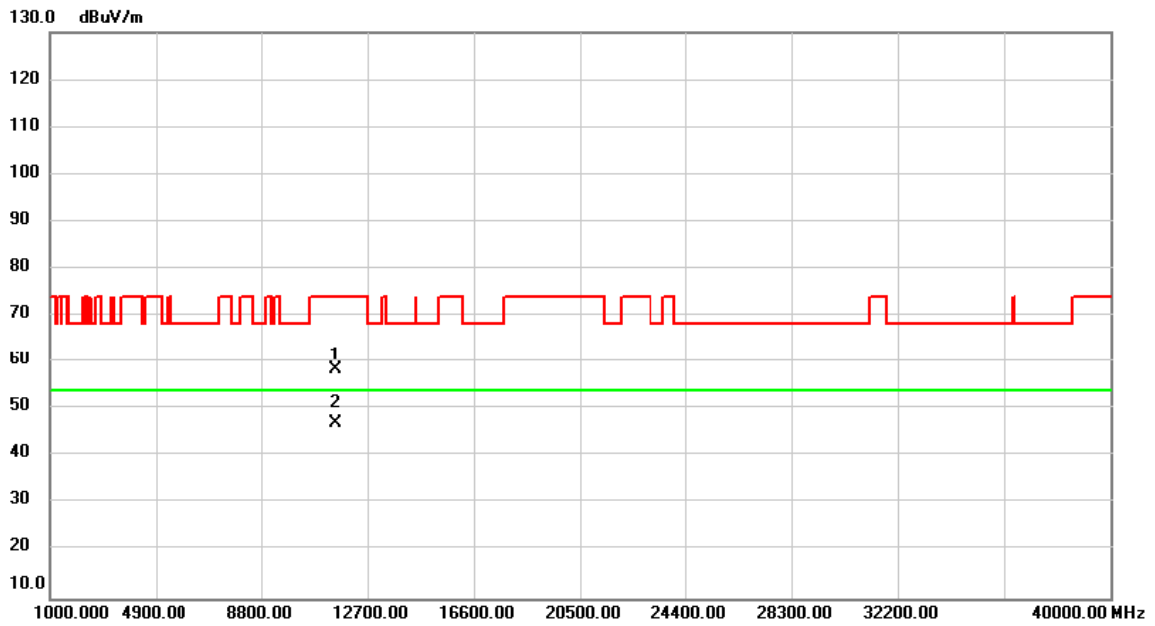


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	45.22	13.18	58.40	74.00	-15.60	peak	
2	*	11550.000	33.85	13.18	47.03	54.00	-6.97	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

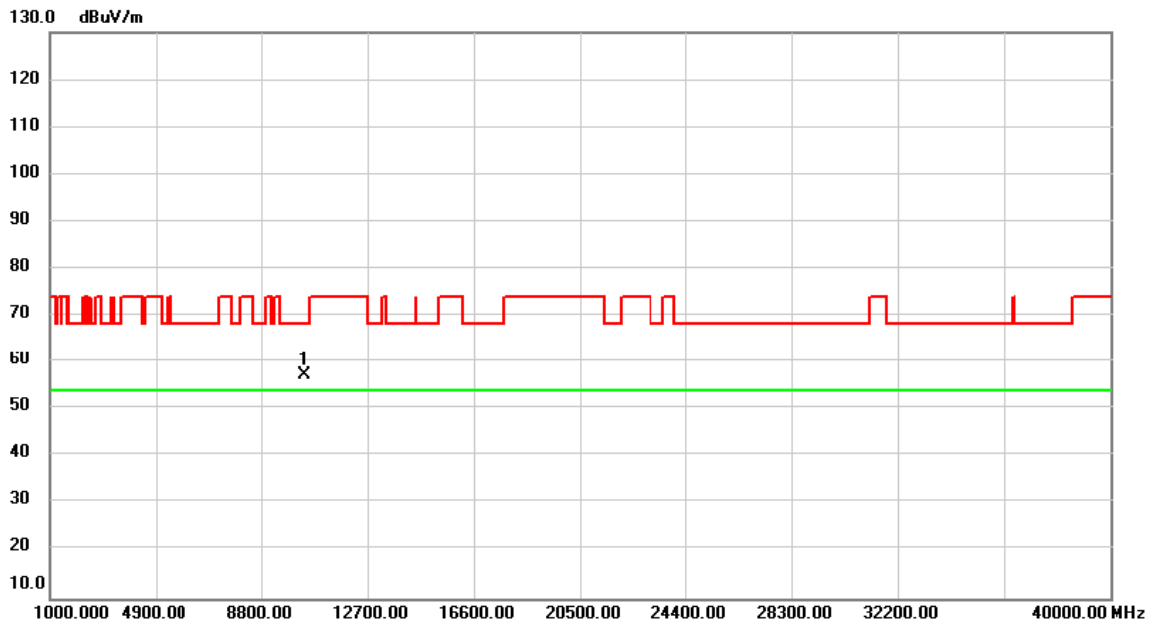


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.000	44.93	12.29	57.22	68.20	-10.98	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

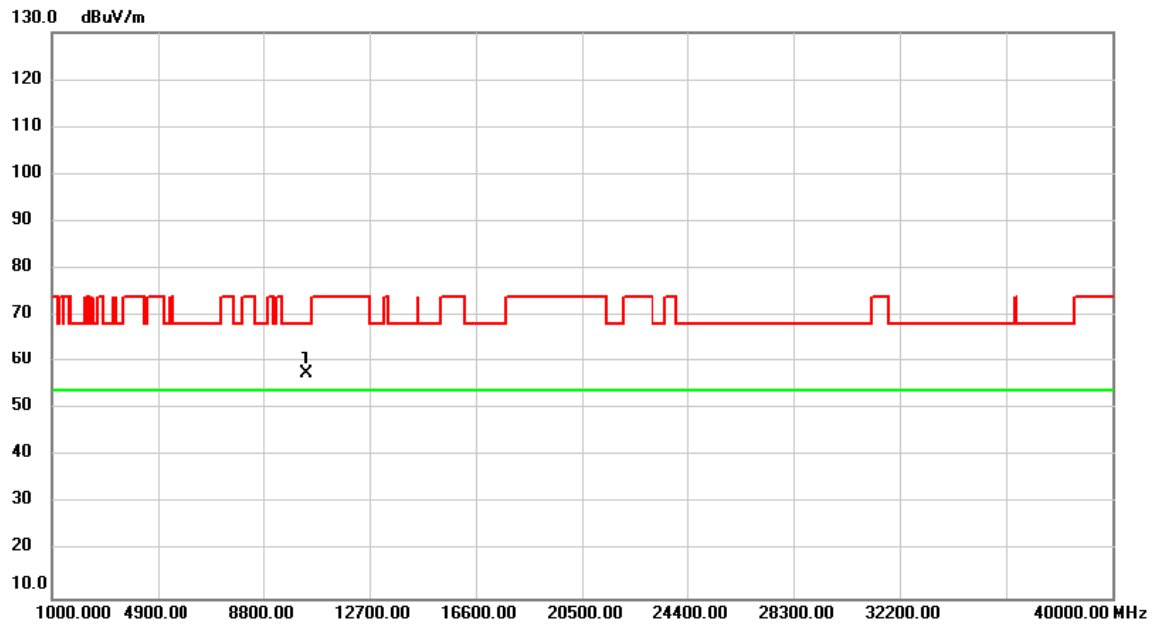


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.000	45.28	12.29	57.57	68.20	-10.63	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

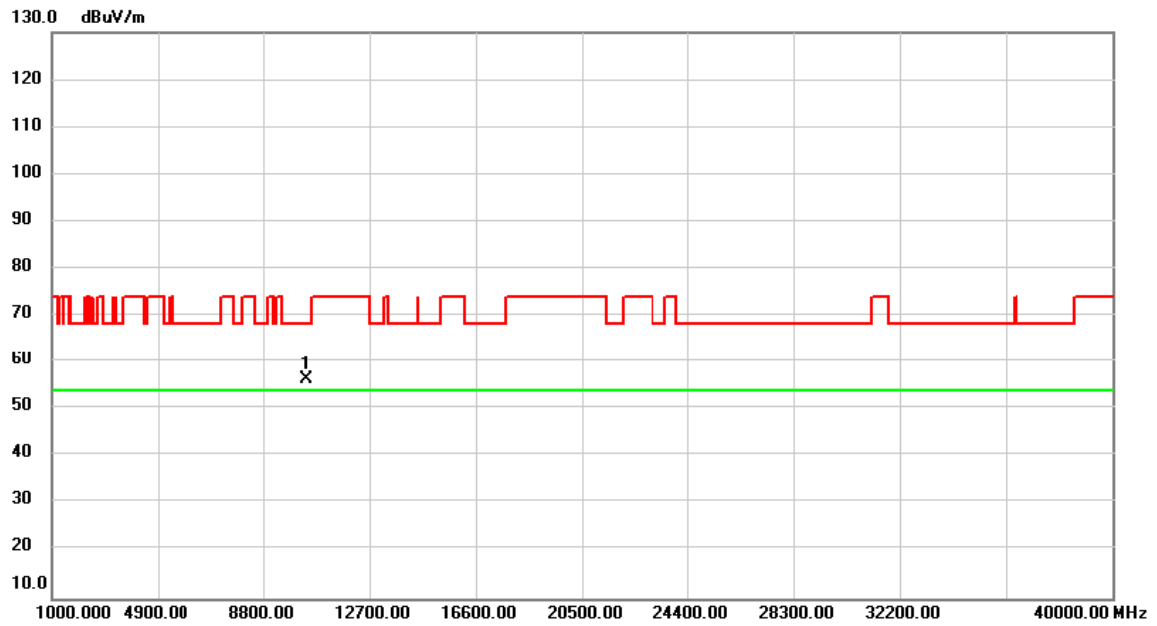


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	44.17	12.31	56.48	68.20	-11.72	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

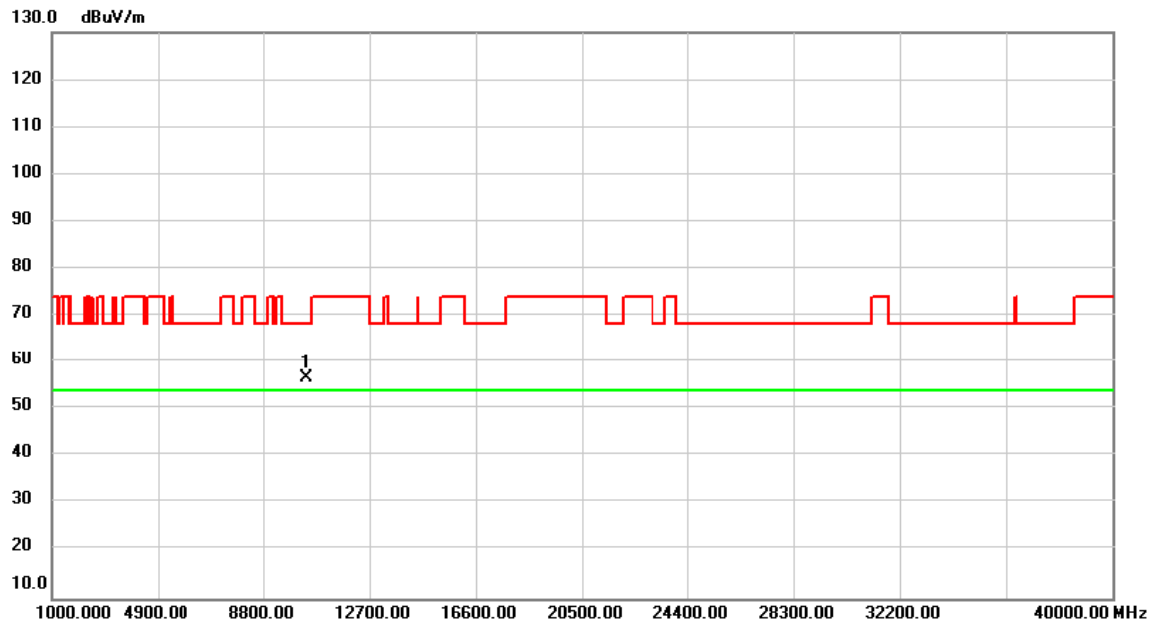


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	44.23	12.31	56.54	68.20	-11.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

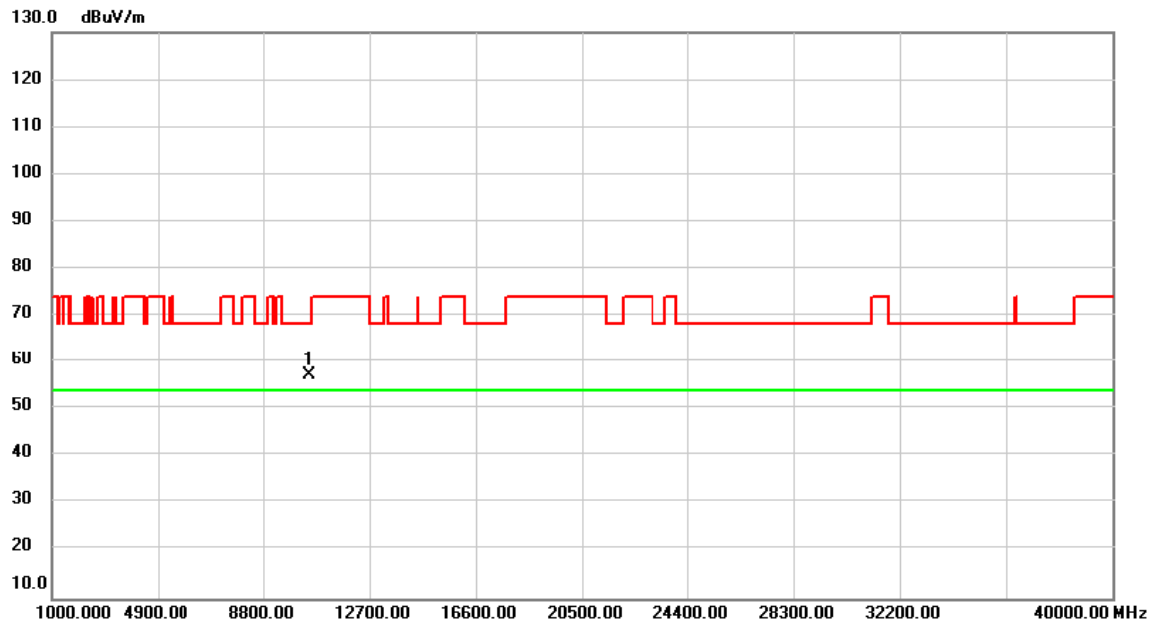


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.000	44.93	12.36	57.29	68.20	-10.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

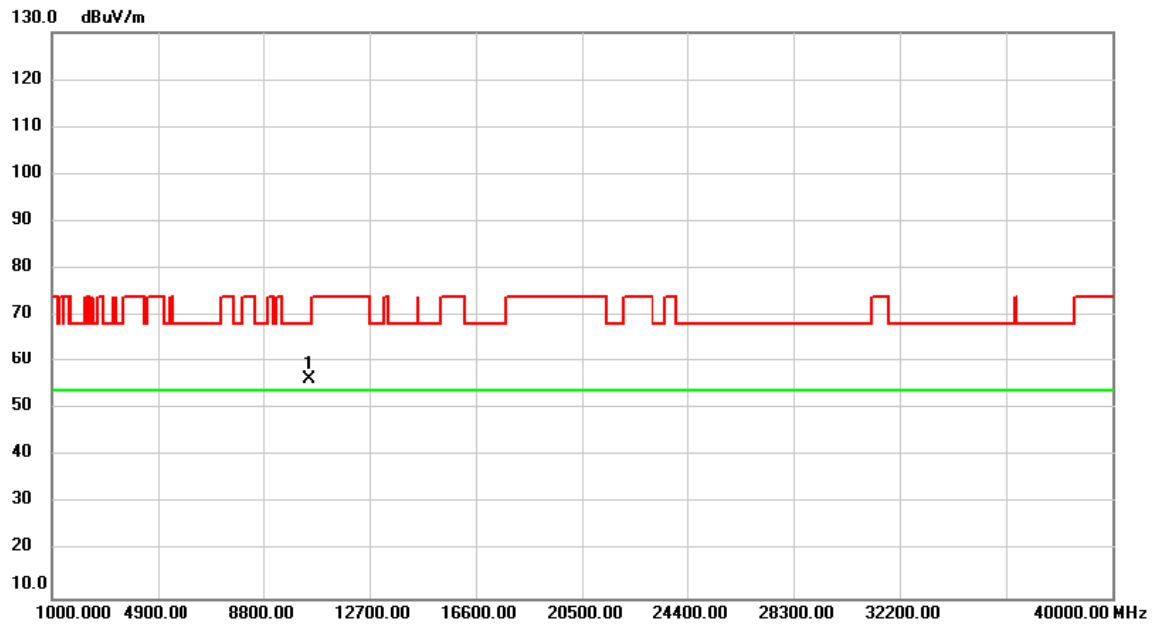


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.000	44.07	12.36	56.43	68.20	-11.77	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

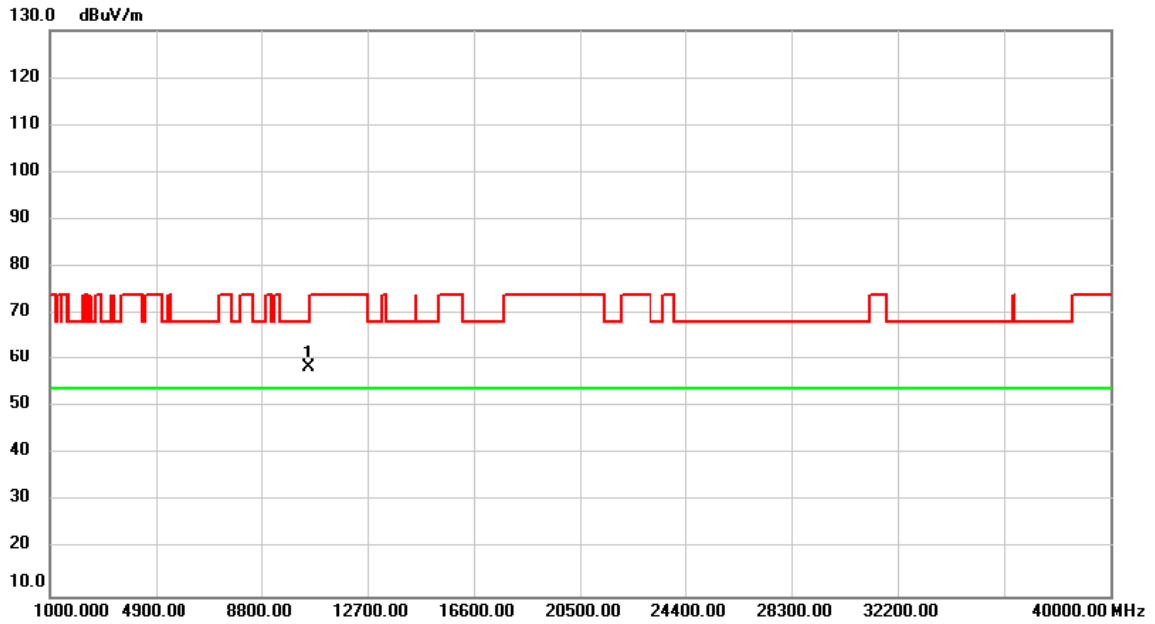


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.000	46.05	12.39	58.44	68.20	-9.76	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

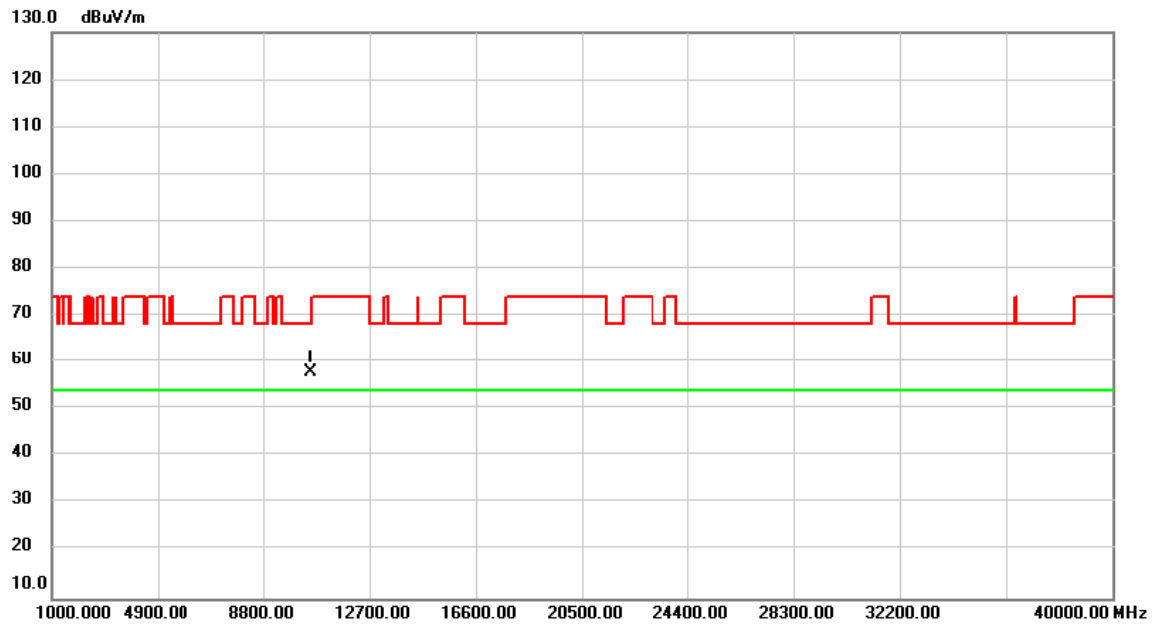


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.000	45.53	12.39	57.92	68.20	-10.28	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

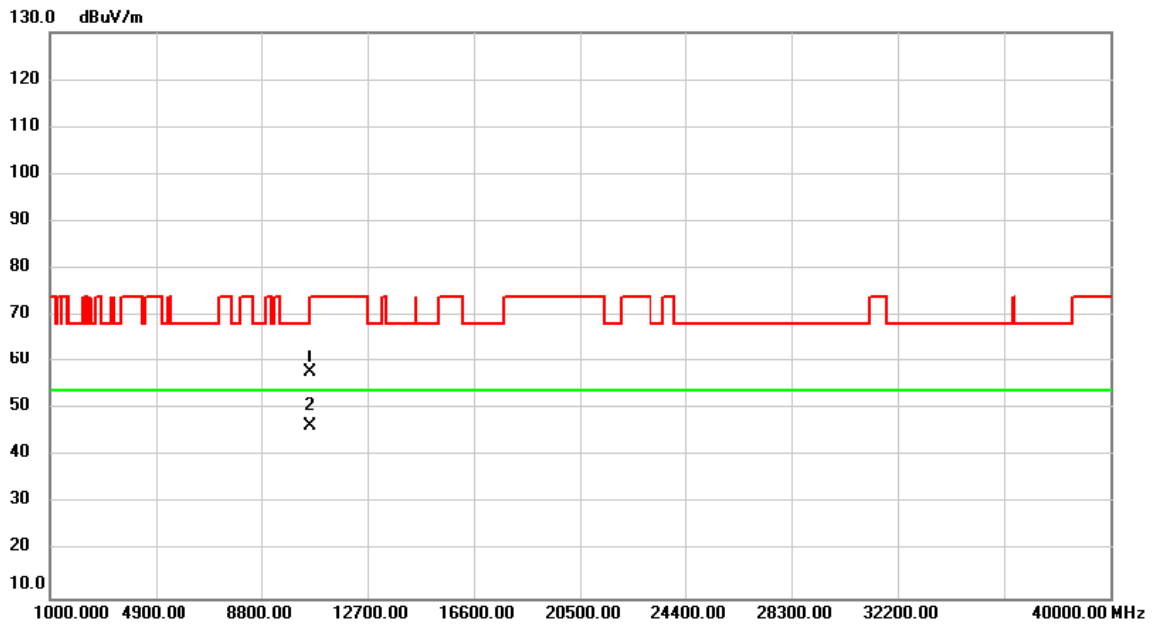


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	45.30	12.46	57.76	68.20	-10.44	peak	
2	*	10600.000	33.89	12.46	46.35	54.00	-7.65	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

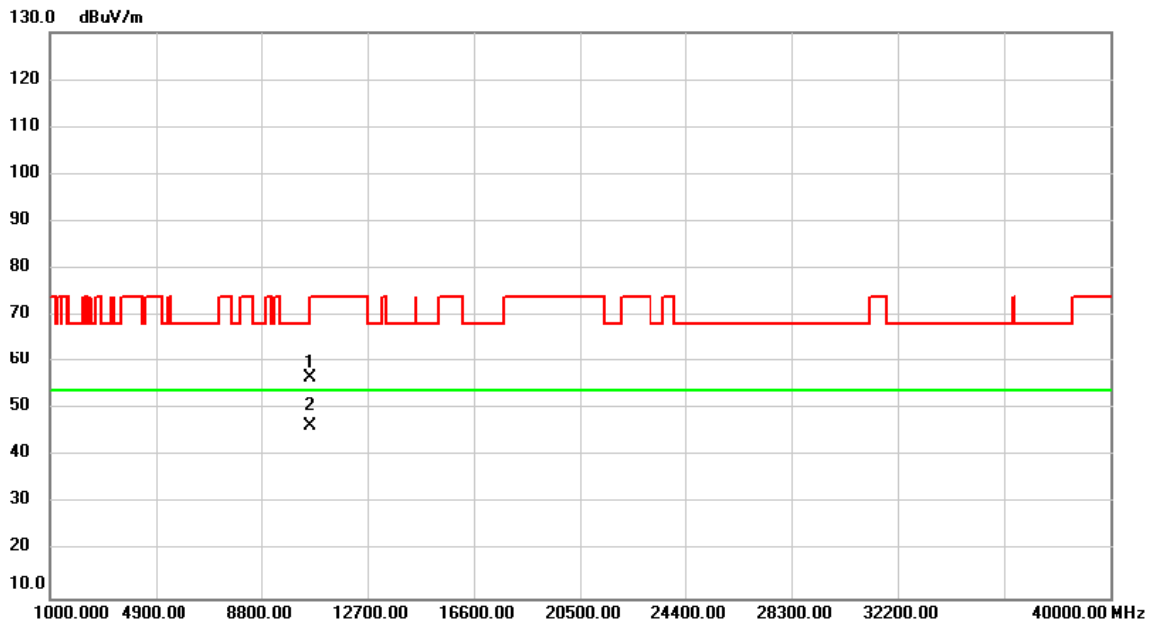


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	44.16	12.46	56.62	68.20	-11.58	peak	
2	*	10600.000	34.05	12.46	46.51	54.00	-7.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

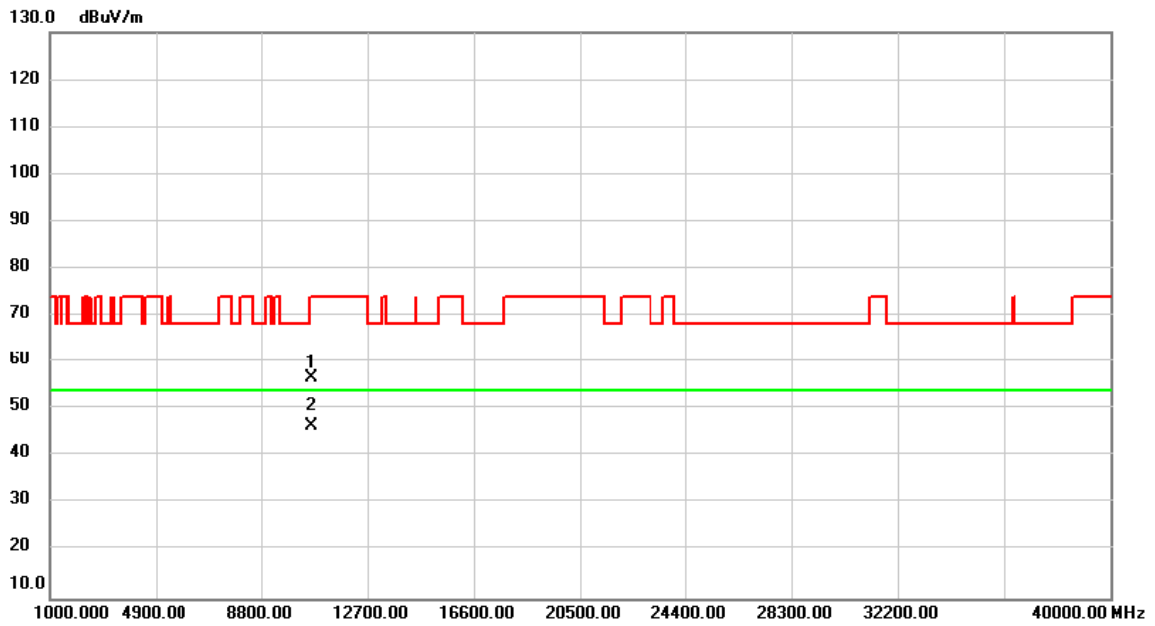


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	44.29	12.49	56.78	74.00	-17.22	peak	
2	*	10640.000	34.10	12.49	46.59	54.00	-7.41	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

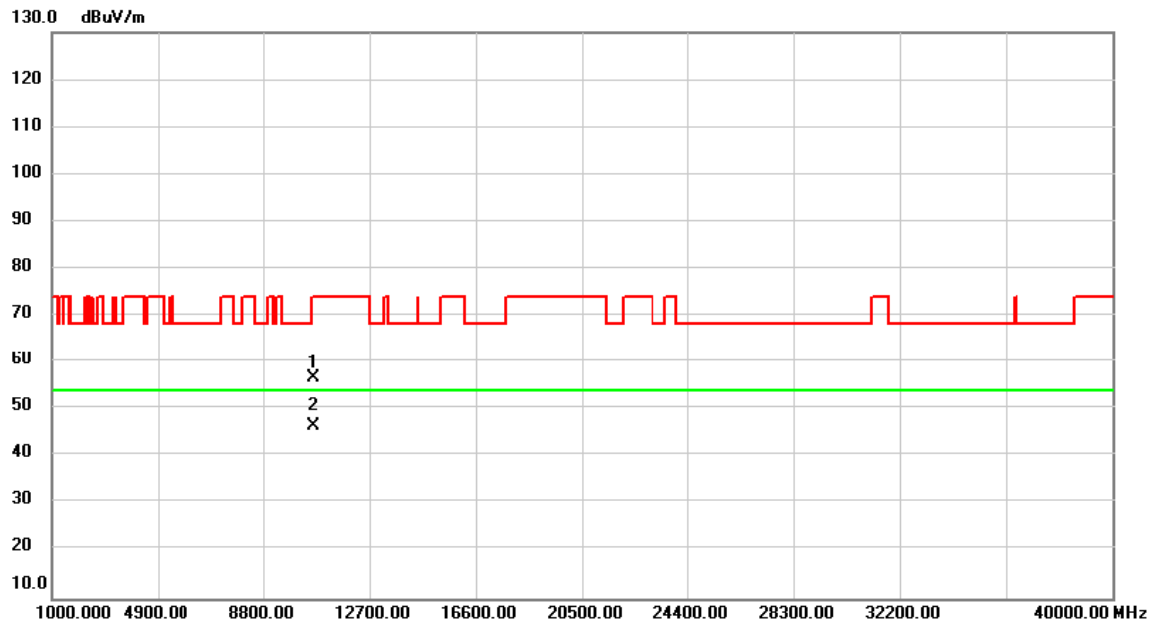


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	44.20	12.49	56.69	74.00	-17.31	peak	
2	*	10640.000	34.09	12.49	46.58	54.00	-7.42	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

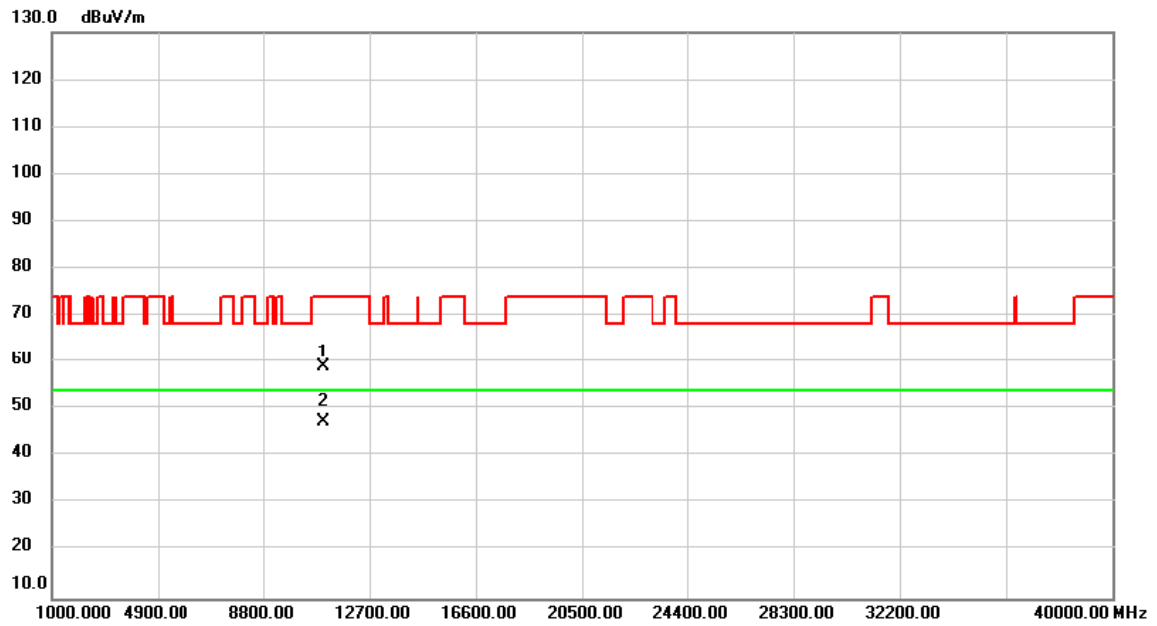


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	46.28	12.78	59.06	74.00	-14.94	peak	
2	*	11000.000	34.52	12.78	47.30	54.00	-6.70	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

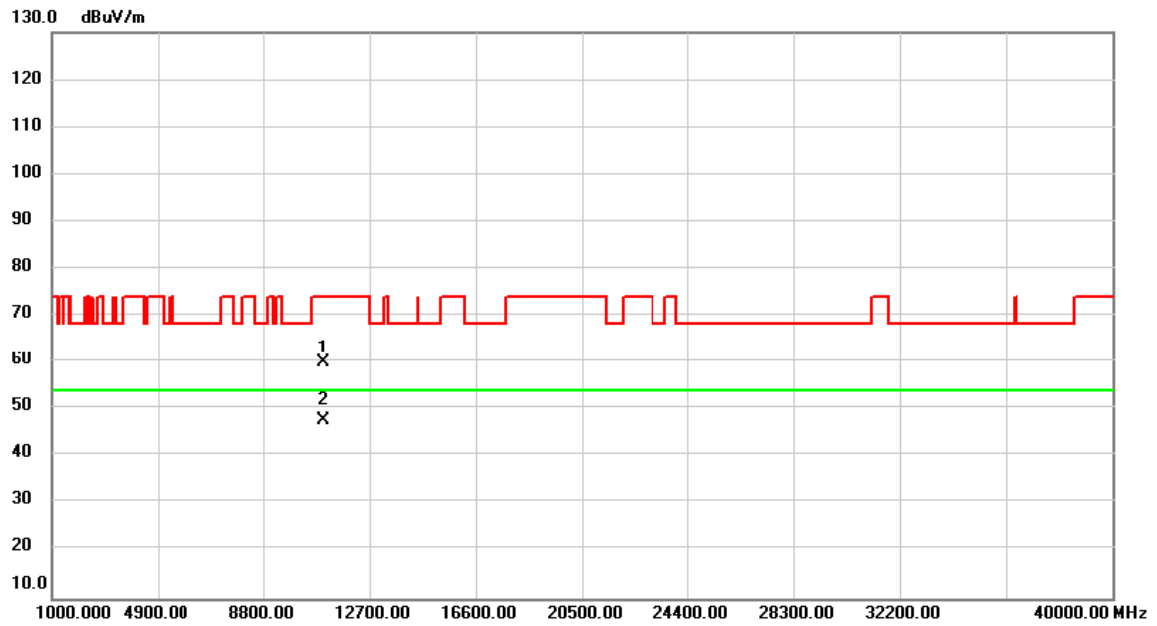


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	47.11	12.78	59.89	74.00	-14.11	peak	
2	*	11000.000	34.87	12.78	47.65	54.00	-6.35	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

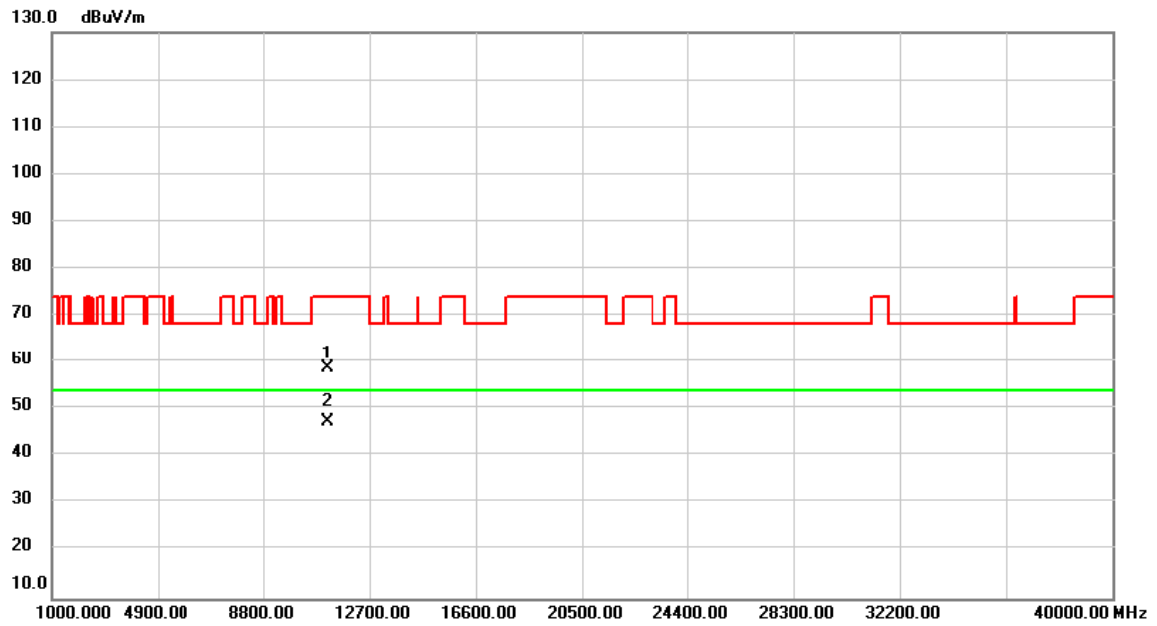


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	45.84	12.90	58.74	74.00	-15.26	peak	
2	*	11160.000	34.32	12.90	47.22	54.00	-6.78	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

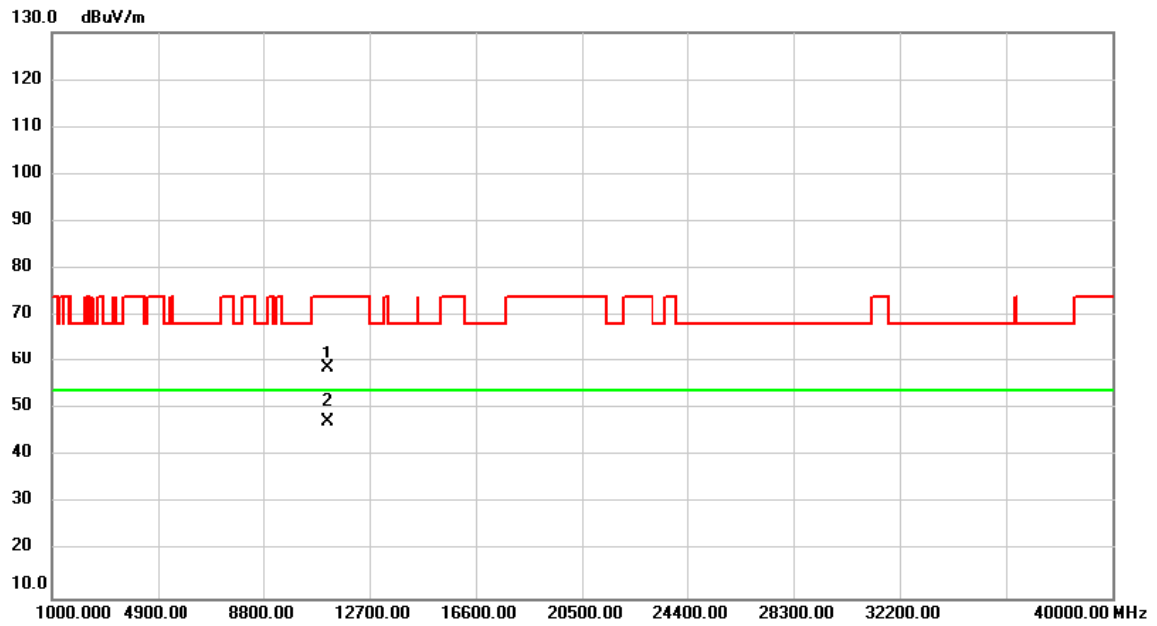


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	45.79	12.90	58.69	74.00	-15.31	peak	
2	*	11160.000	34.41	12.90	47.31	54.00	-6.69	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

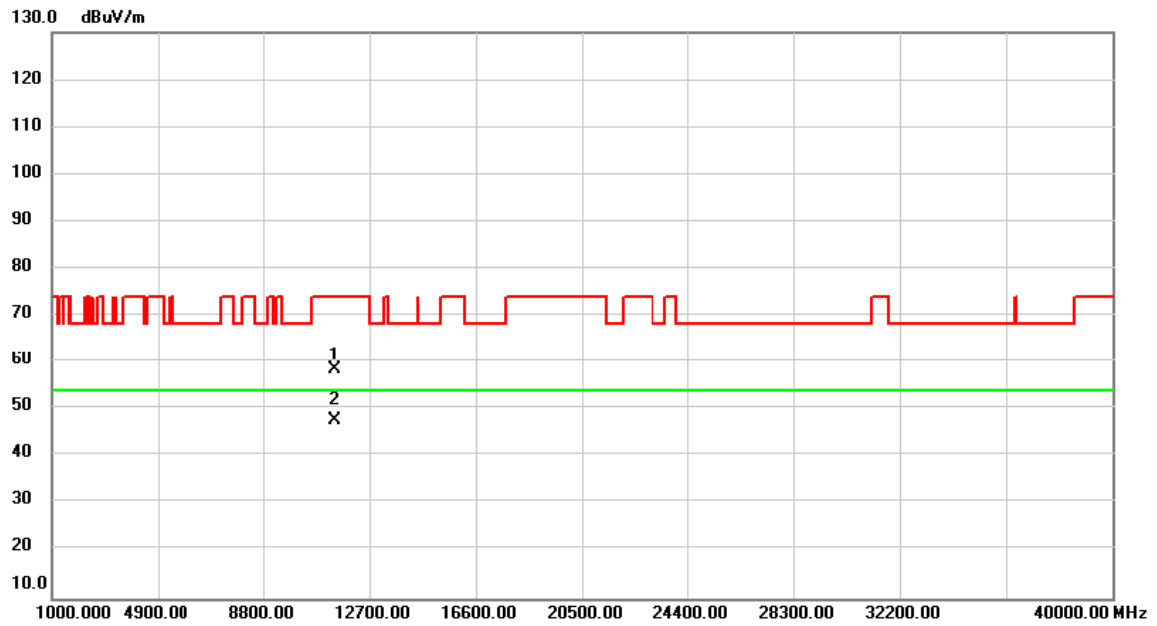


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	45.32	13.08	58.40	74.00	-15.60	peak	
2	*	11400.000	34.48	13.08	47.56	54.00	-6.44	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

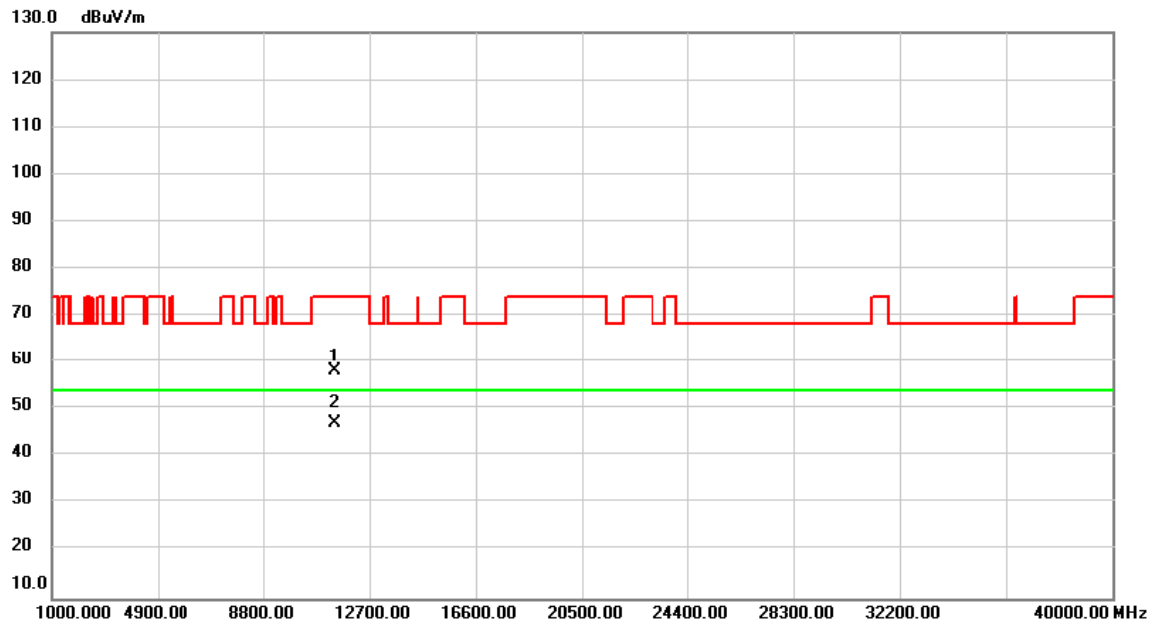


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	45.19	13.08	58.27	74.00	-15.73	peak	
2	*	11400.000	33.91	13.08	46.99	54.00	-7.01	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Vertical

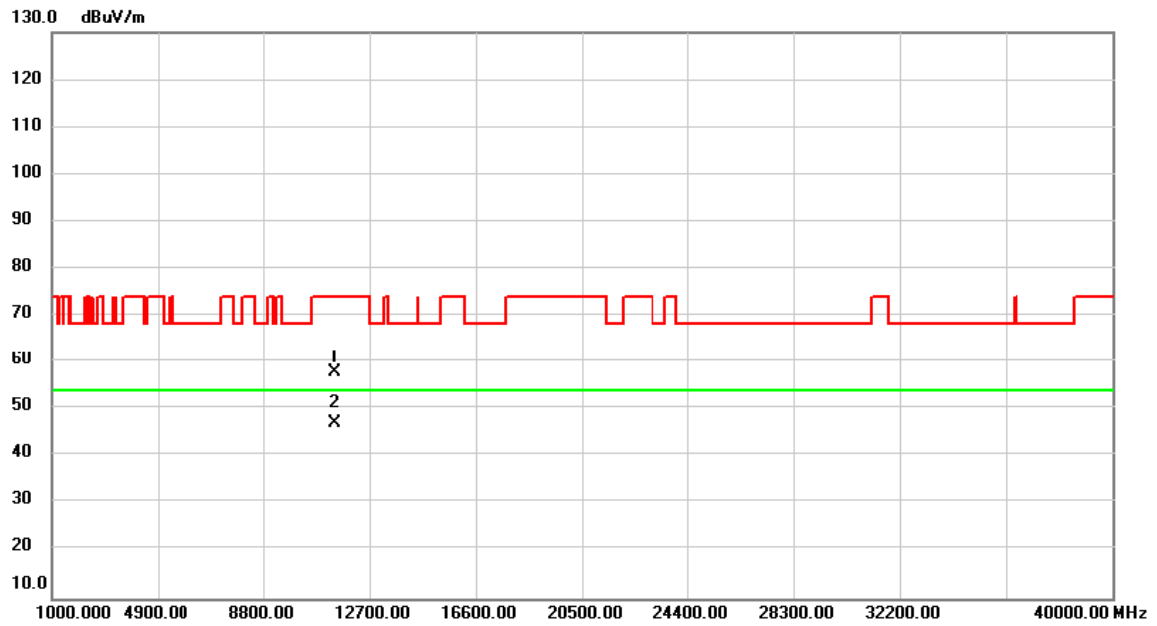


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	44.77	13.11	57.88	74.00	-16.12	peak	
2	*	11440.000	33.97	13.11	47.08	54.00	-6.92	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH144: 5720 MHz	Polarization	Horizontal

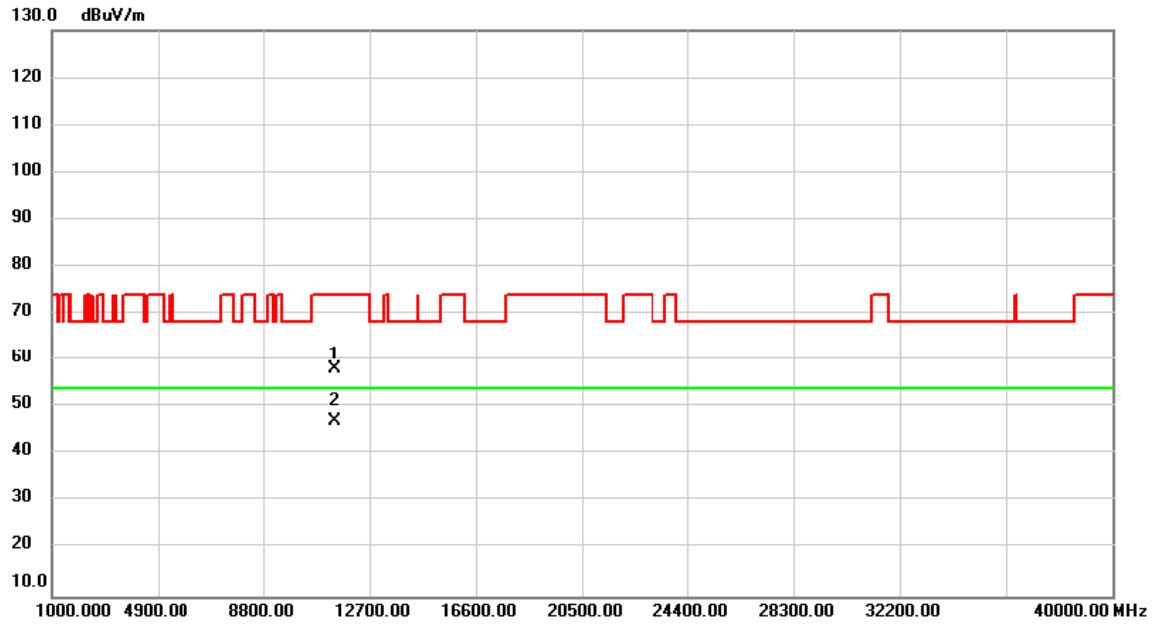


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.000	45.18	13.11	58.29	74.00	-15.71	peak	
2	*	11440.000	34.08	13.11	47.19	54.00	-6.81	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

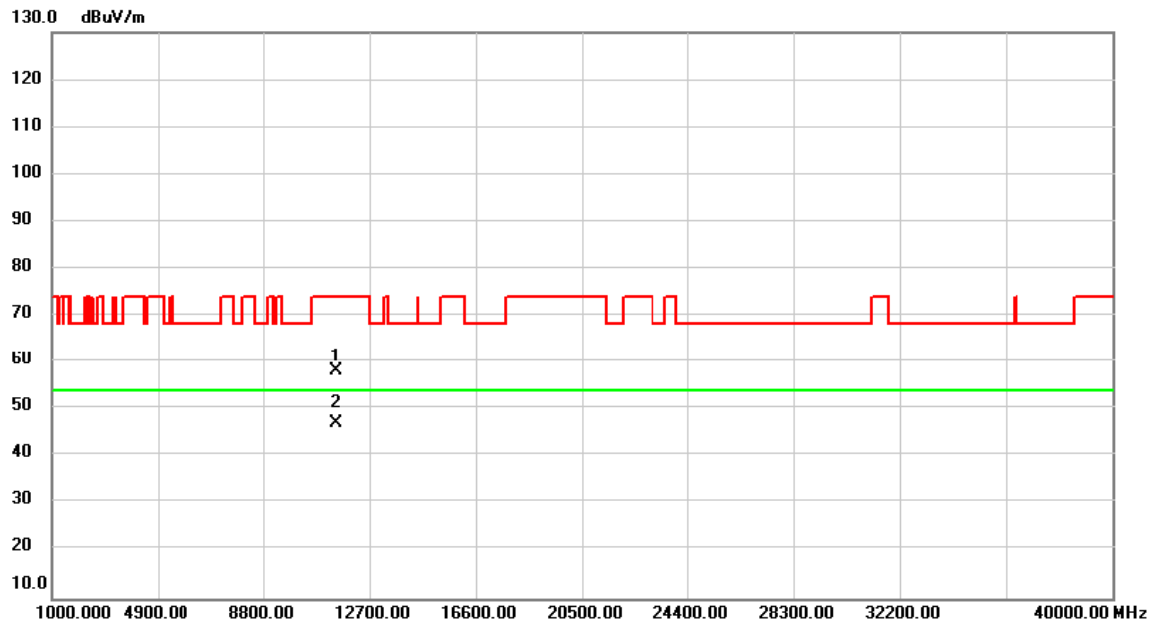

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	44.98	13.14	58.12	74.00	-15.88	peak	
2	*	11490.000	33.84	13.14	46.98	54.00	-7.02	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

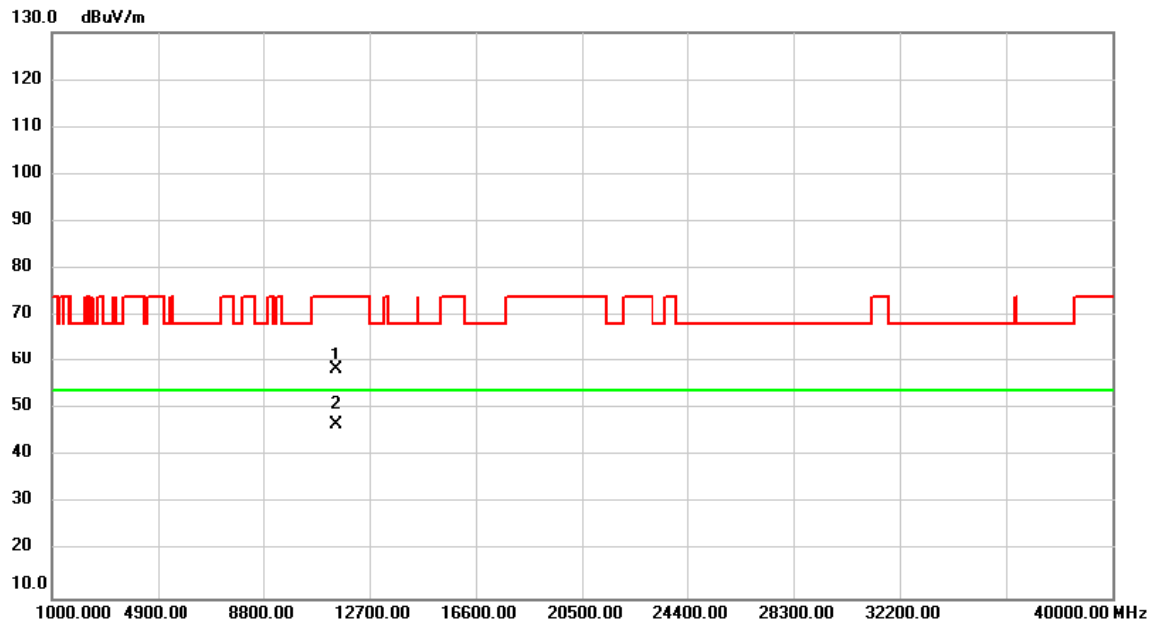


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	45.46	13.14	58.60	74.00	-15.40	peak	
2	*	11490.000	33.51	13.14	46.65	54.00	-7.35	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

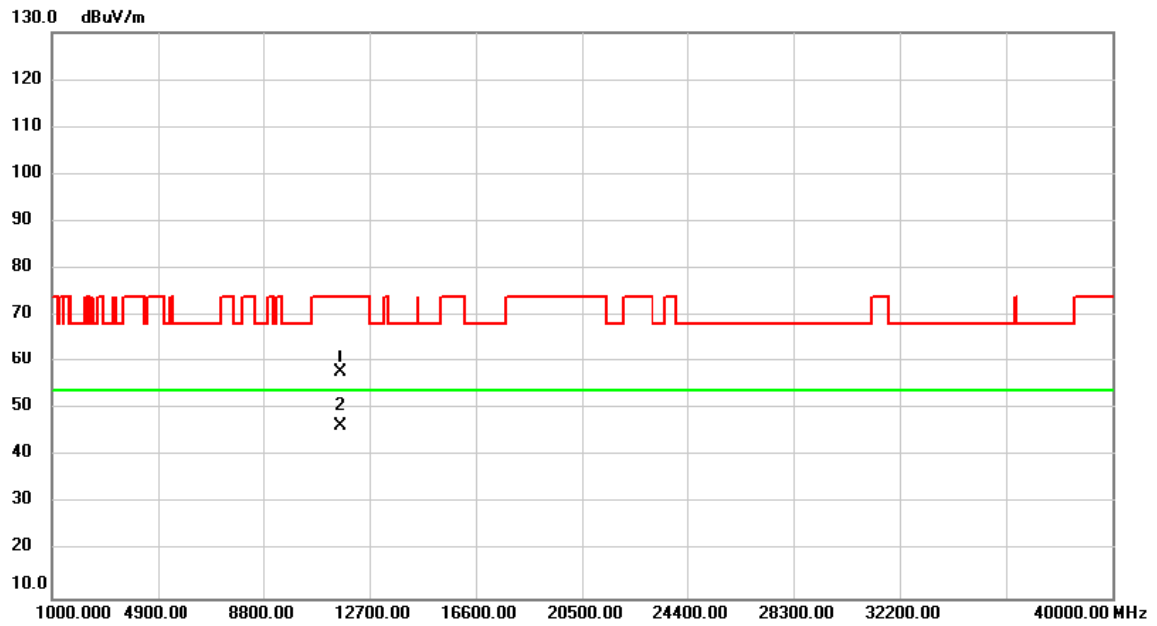


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	44.55	13.25	57.80	74.00	-16.20	peak	
2	*	11650.000	33.22	13.25	46.47	54.00	-7.53	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

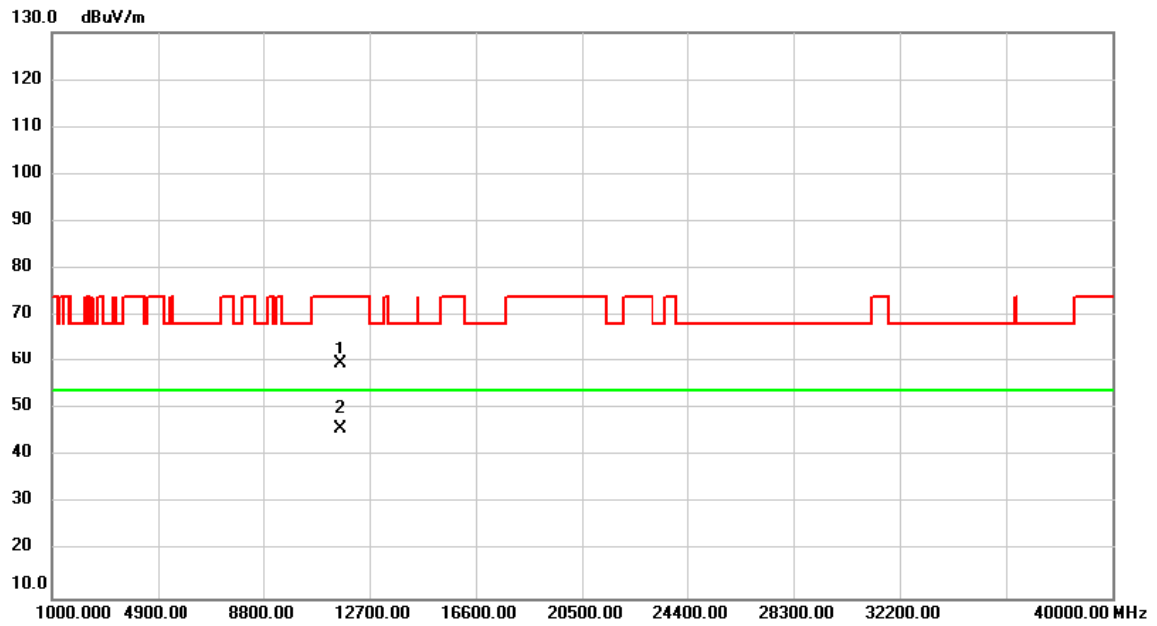


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	46.41	13.25	59.66	74.00	-14.34	peak	
2	*	11650.000	32.59	13.25	45.84	54.00	-8.16	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

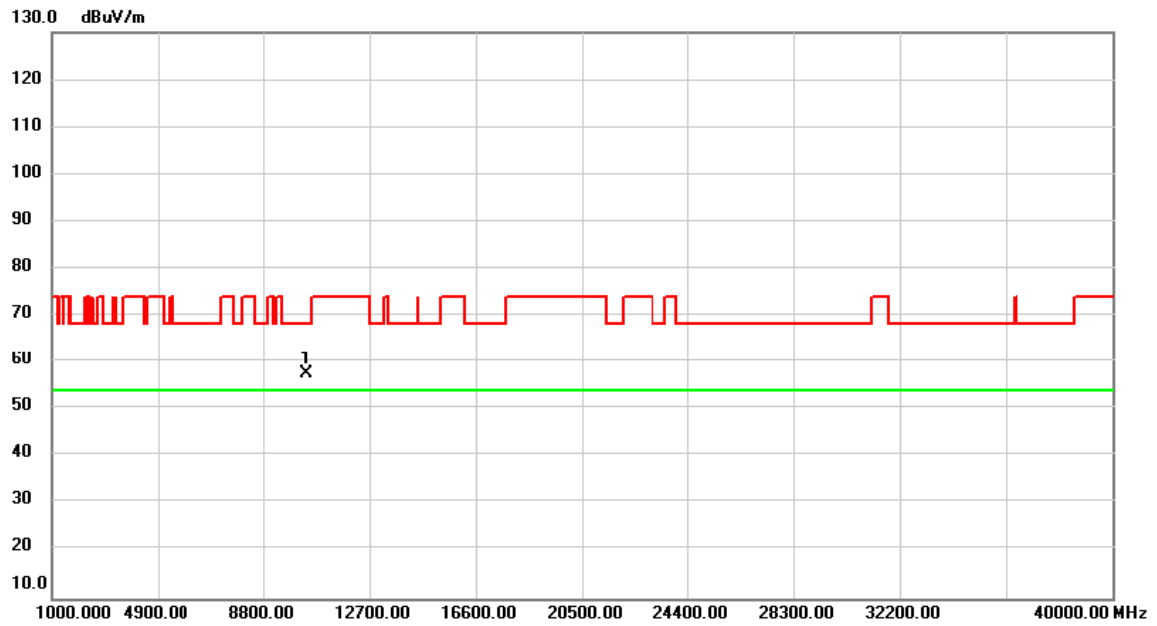


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10380.000	45.31	12.30	57.61	68.20	-10.59	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

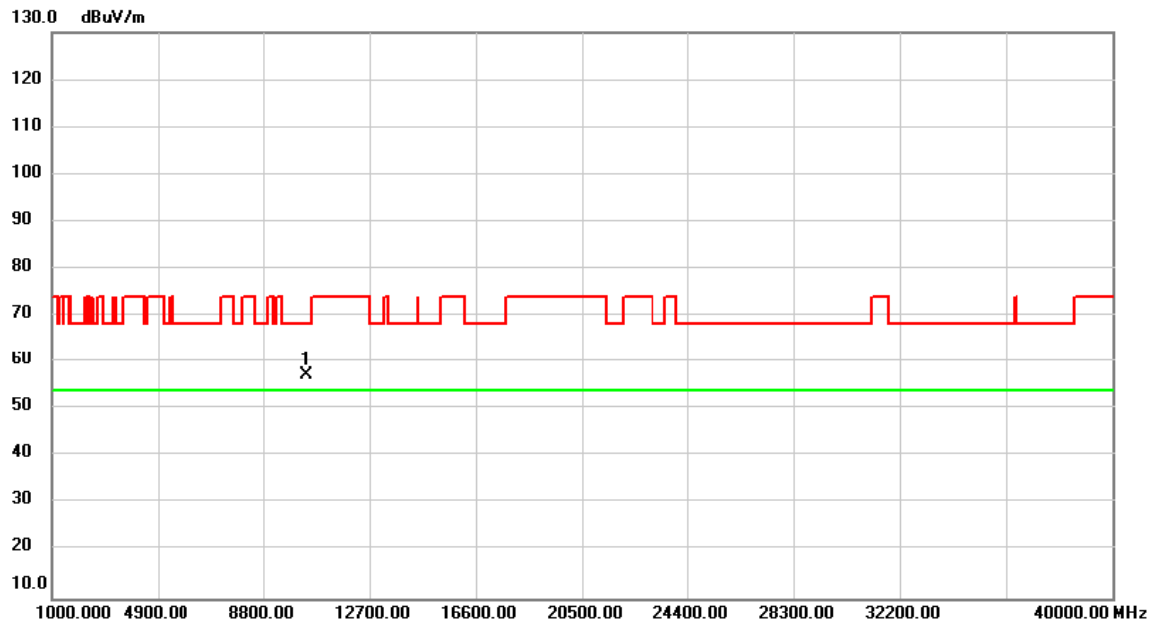


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.000	45.05	12.30	57.35	68.20	-10.85	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

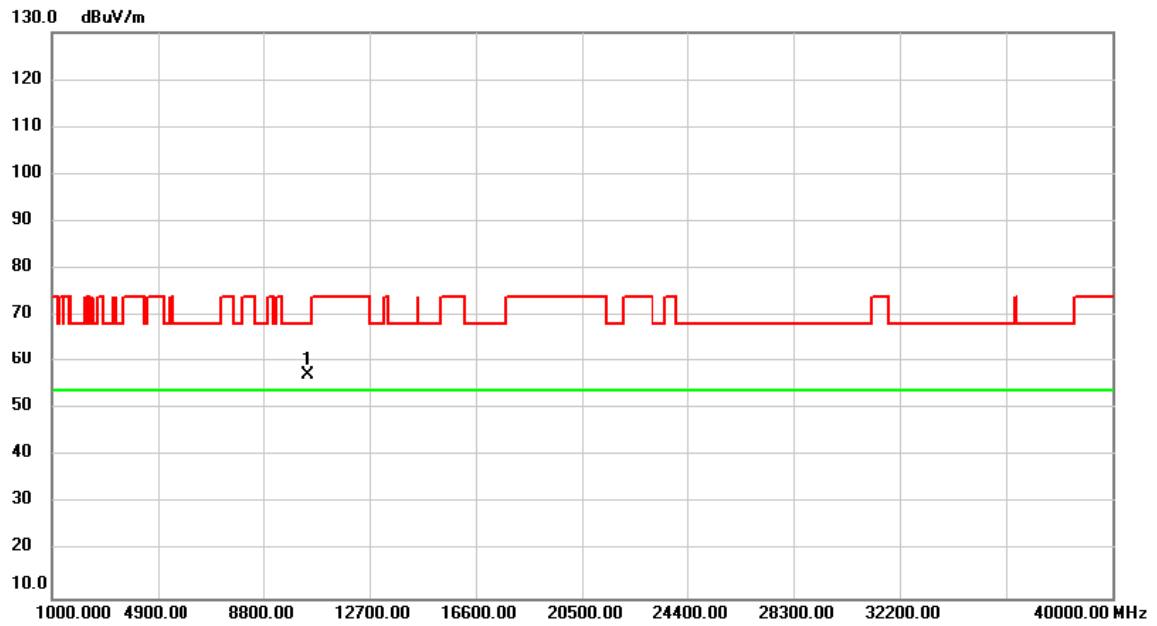


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.000	44.89	12.35	57.24	68.20	-10.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

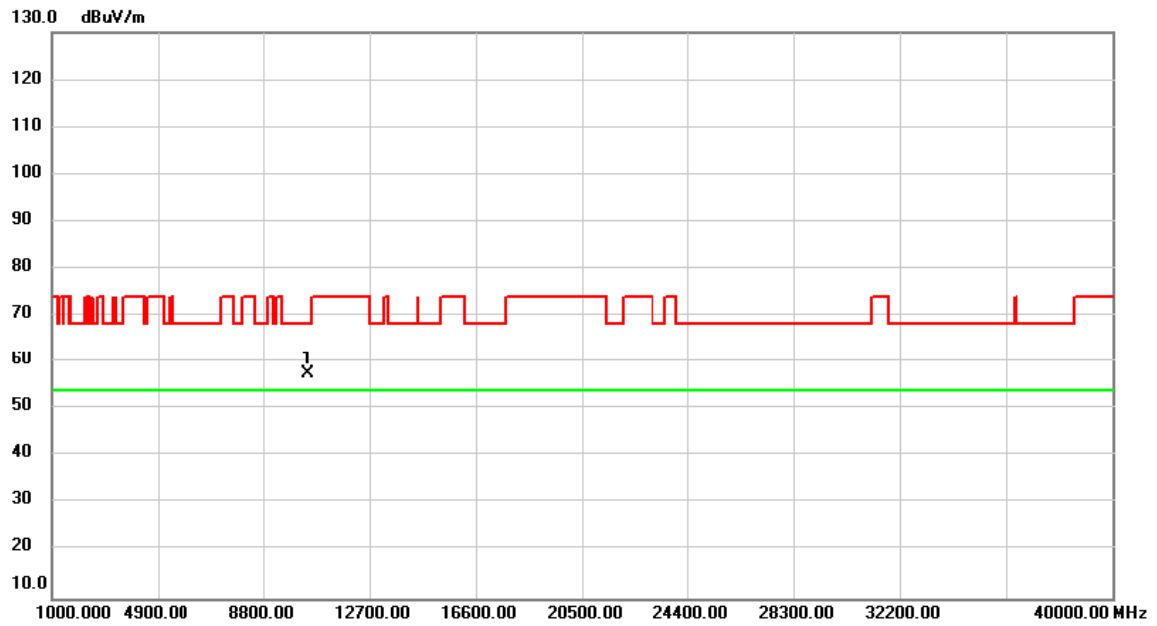


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.000	45.20	12.35	57.55	68.20	-10.65	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

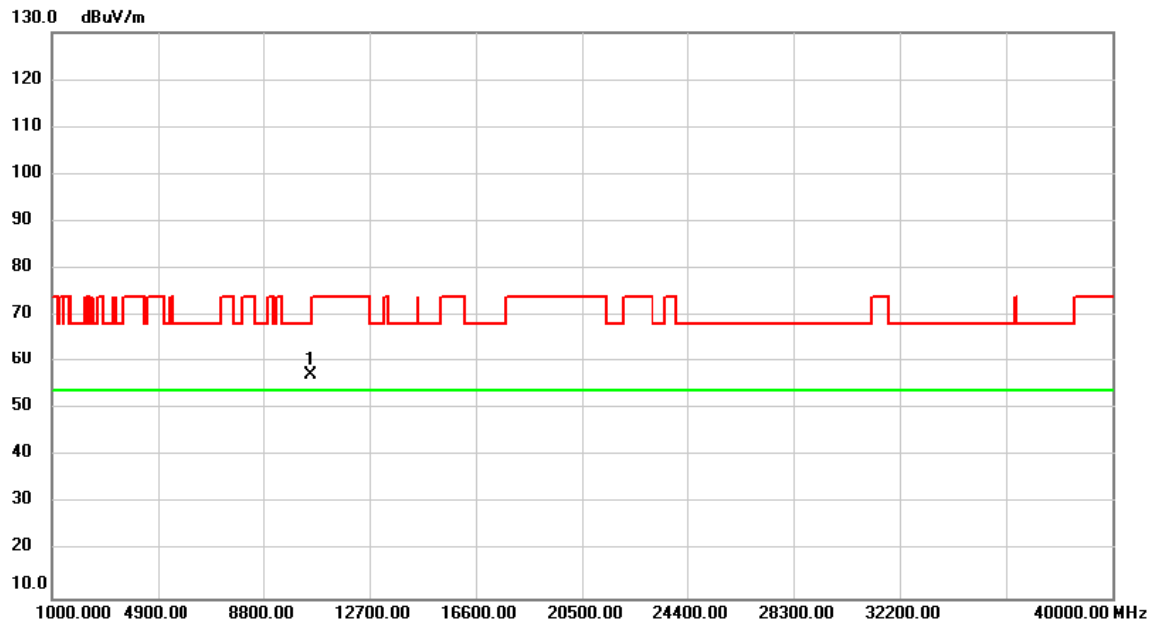


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.000	44.89	12.41	57.30	68.20	-10.90	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Horizontal

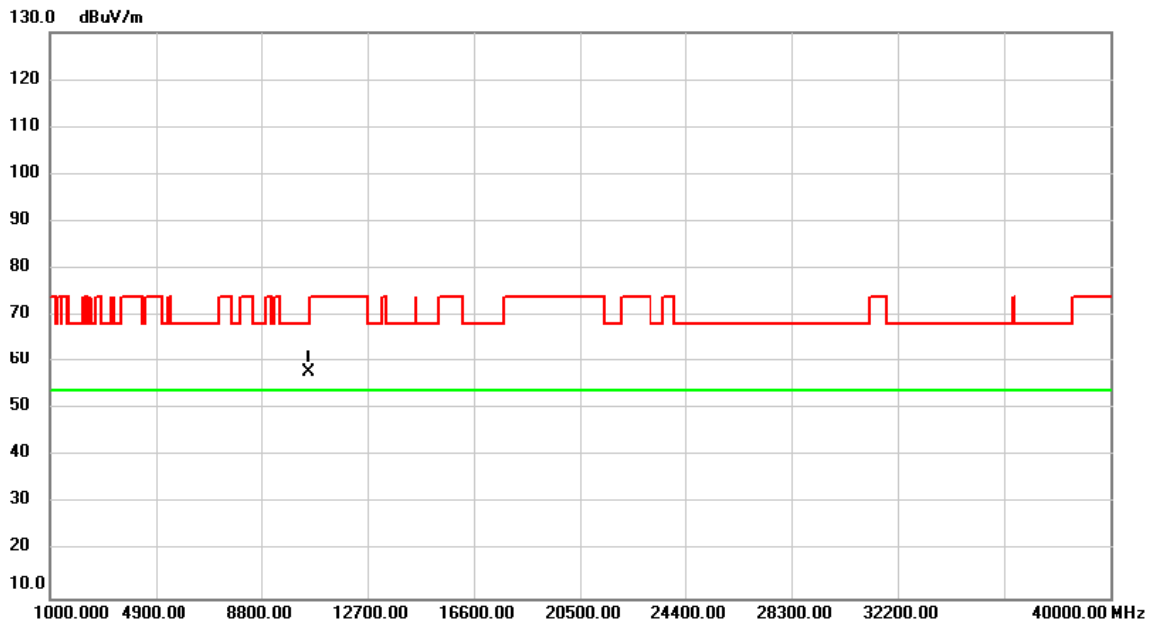


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.000	45.54	12.41	57.95	68.20	-10.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

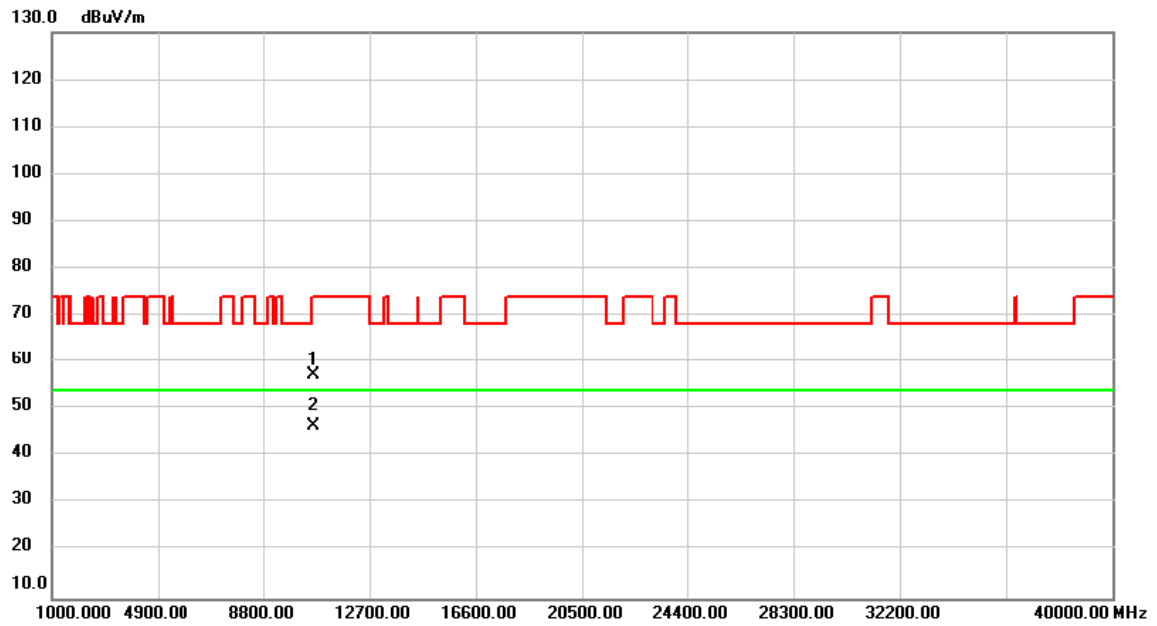


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	44.72	12.47	57.19	74.00	-16.81	peak	
2	*	10620.000	33.97	12.47	46.44	54.00	-7.56	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Horizontal

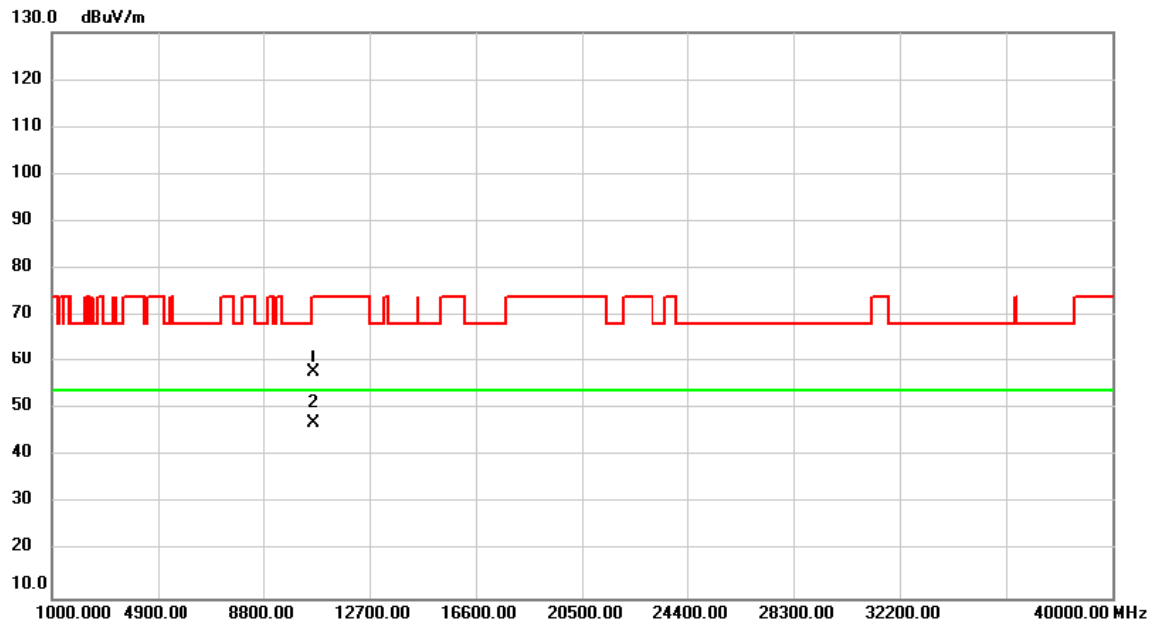


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	45.41	12.47	57.88	74.00	-16.12	peak	
2	*	10620.000	34.50	12.47	46.97	54.00	-7.03	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

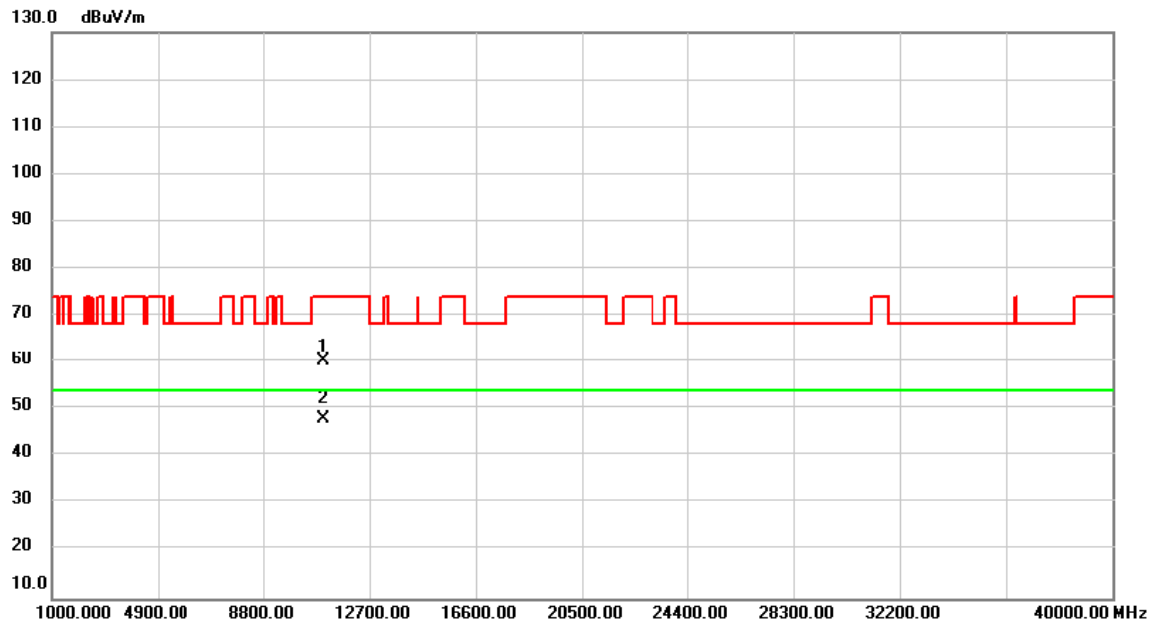


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	47.50	12.79	60.29	74.00	-13.71	peak	
2	*	11020.000	35.04	12.79	47.83	54.00	-6.17	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

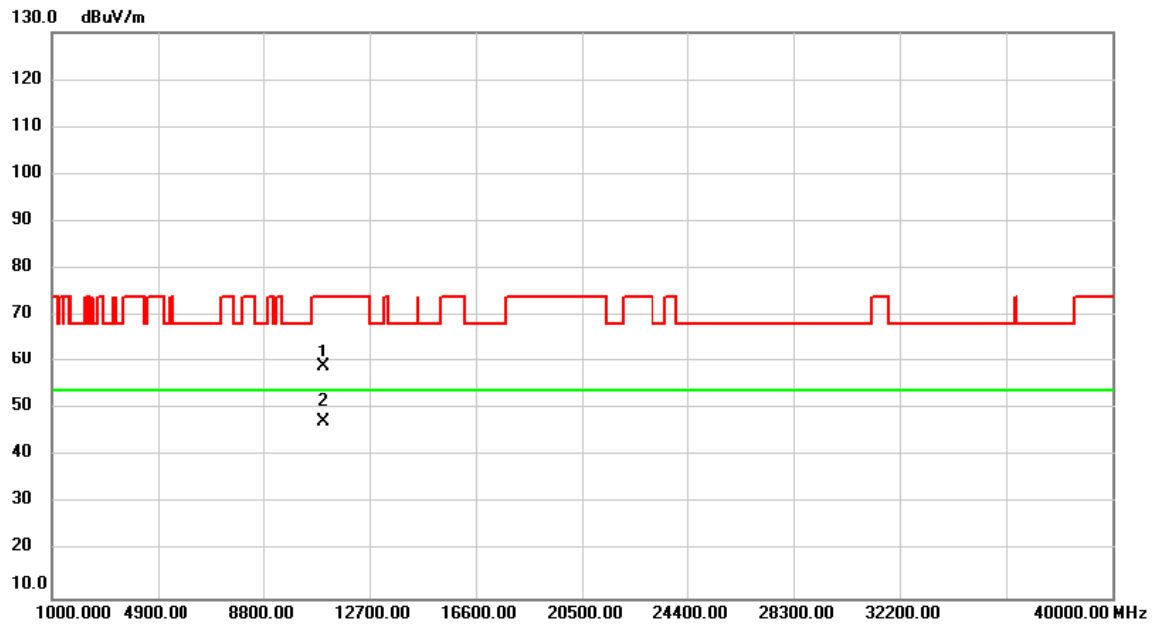


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	46.20	12.79	58.99	74.00	-15.01	peak	
2	*	11020.000	34.62	12.79	47.41	54.00	-6.59	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Vertical

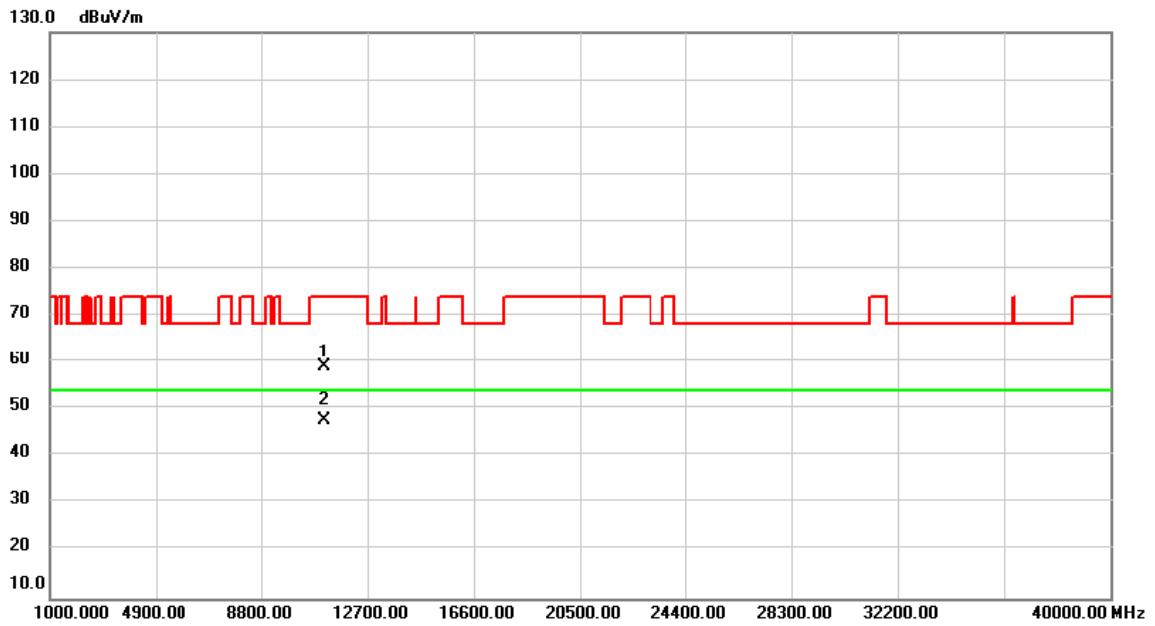


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	46.18	12.85	59.03	74.00	-14.97	peak	
2	*	11100.000	34.91	12.85	47.76	54.00	-6.24	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Horizontal

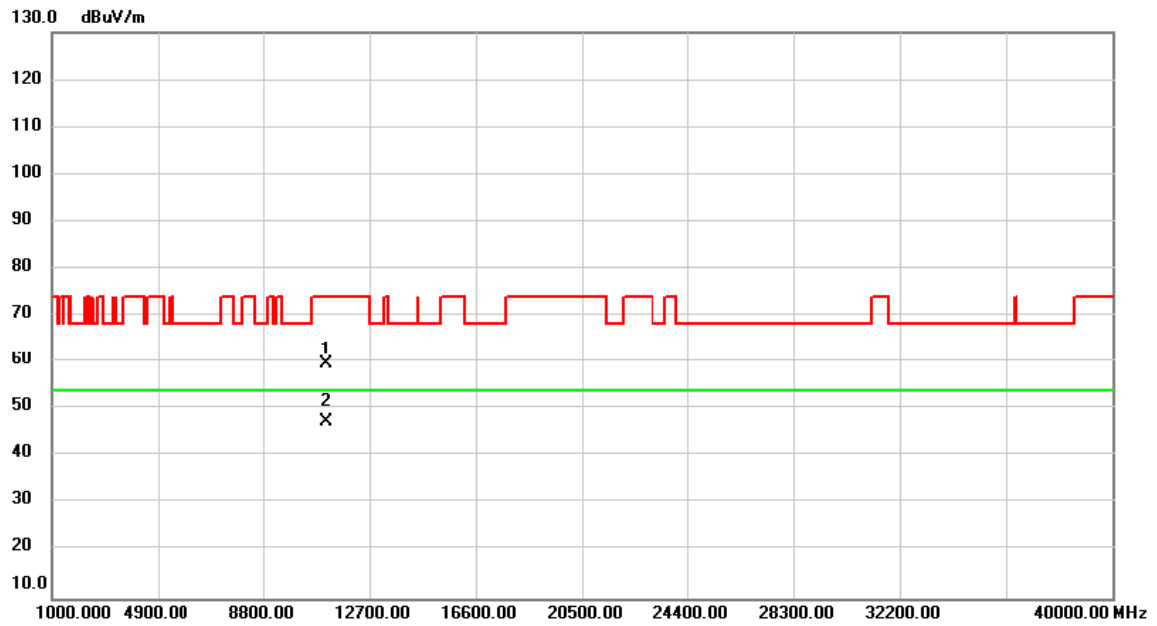


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	46.67	12.85	59.52	74.00	-14.48	peak	
2	*	11100.000	34.56	12.85	47.41	54.00	-6.59	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

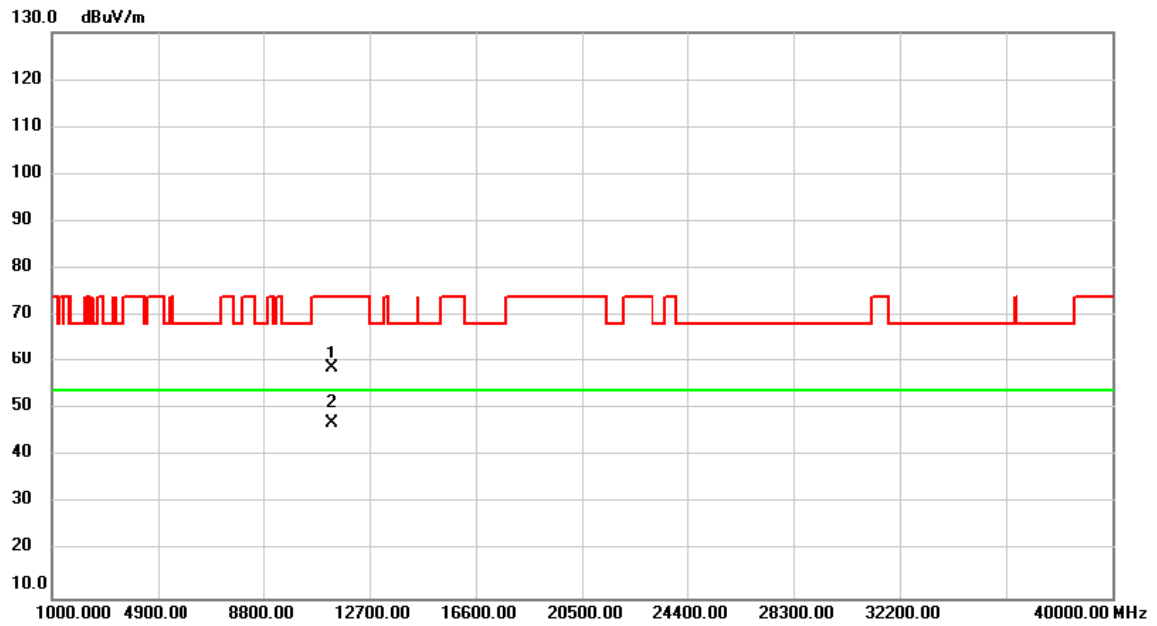

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	45.66	13.03	58.69	74.00	-15.31	peak	
2	*	11340.000	33.99	13.03	47.02	54.00	-6.98	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Horizontal

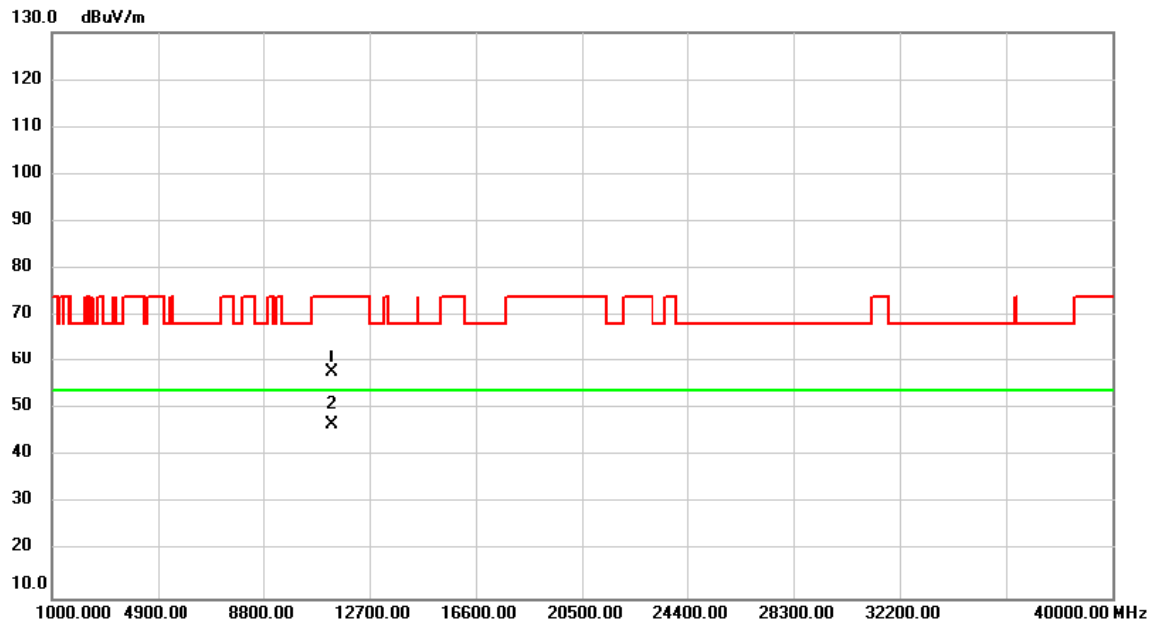


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	44.82	13.03	57.85	74.00	-16.15	peak	
2	*	11340.000	33.75	13.03	46.78	54.00	-7.22	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH142: 5710 MHz	Polarization	Vertical

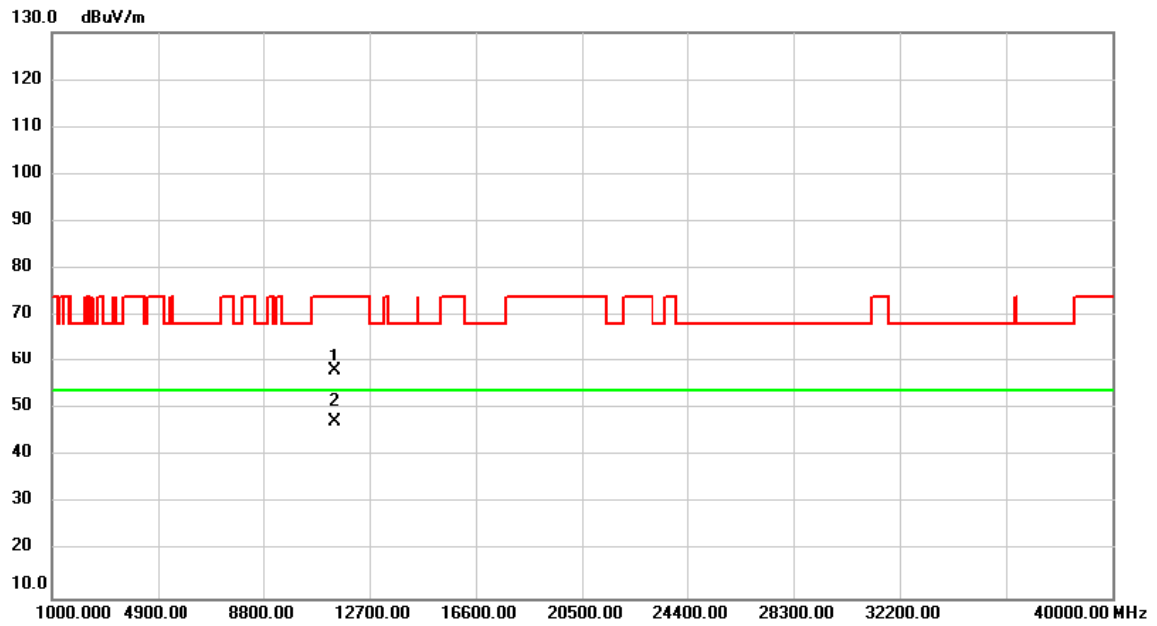


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.000	45.21	13.09	58.30	74.00	-15.70	peak	
2	*	11420.000	34.29	13.09	47.38	54.00	-6.62	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH142: 5710 MHz	Polarization	Horizontal

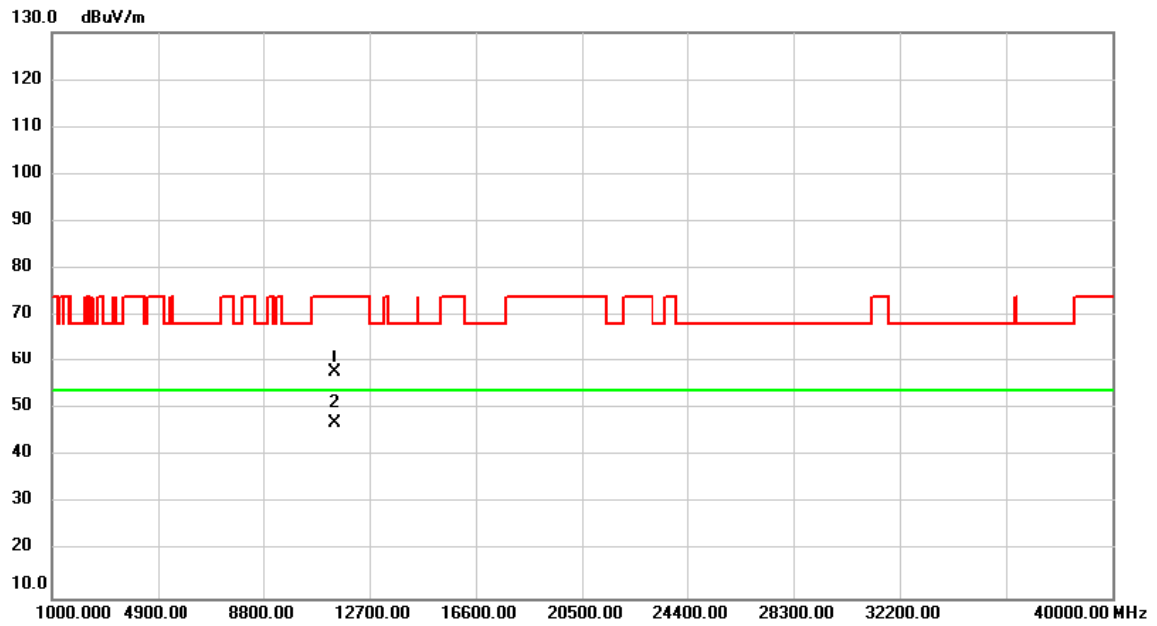


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.000	44.80	13.09	57.89	74.00	-16.11	peak	
2	*	11420.000	33.99	13.09	47.08	54.00	-6.92	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

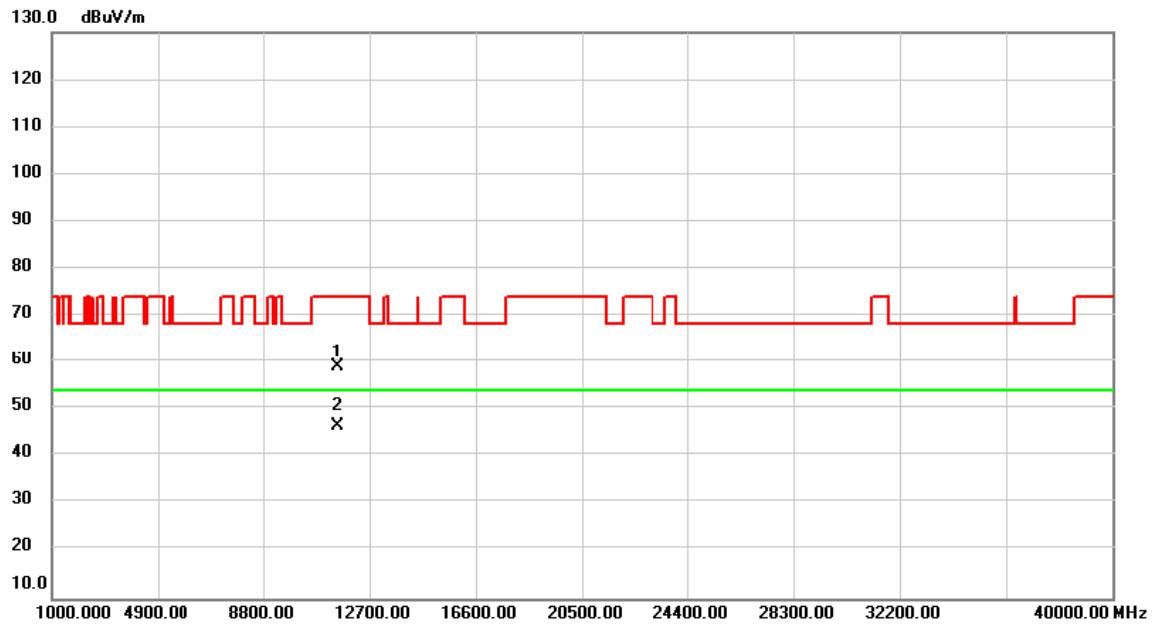


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	45.86	13.17	59.03	74.00	-14.97	peak	
2	*	11510.000	33.34	13.17	46.51	54.00	-7.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

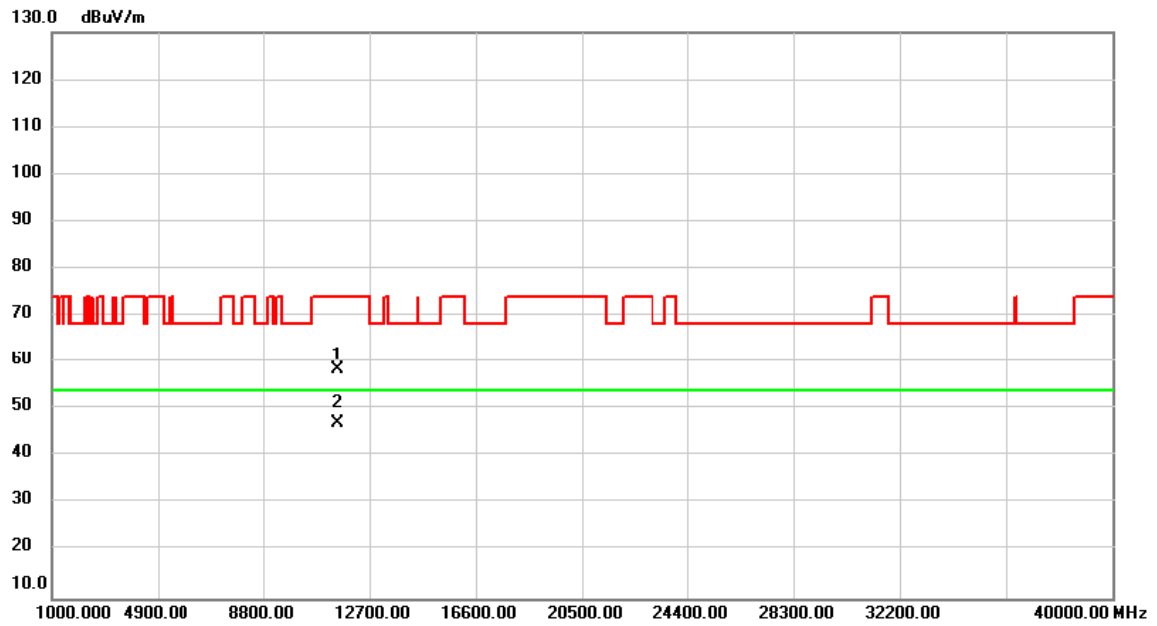


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	45.40	13.17	58.57	74.00	-15.43	peak	
2	*	11510.000	33.84	13.17	47.01	54.00	-6.99	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

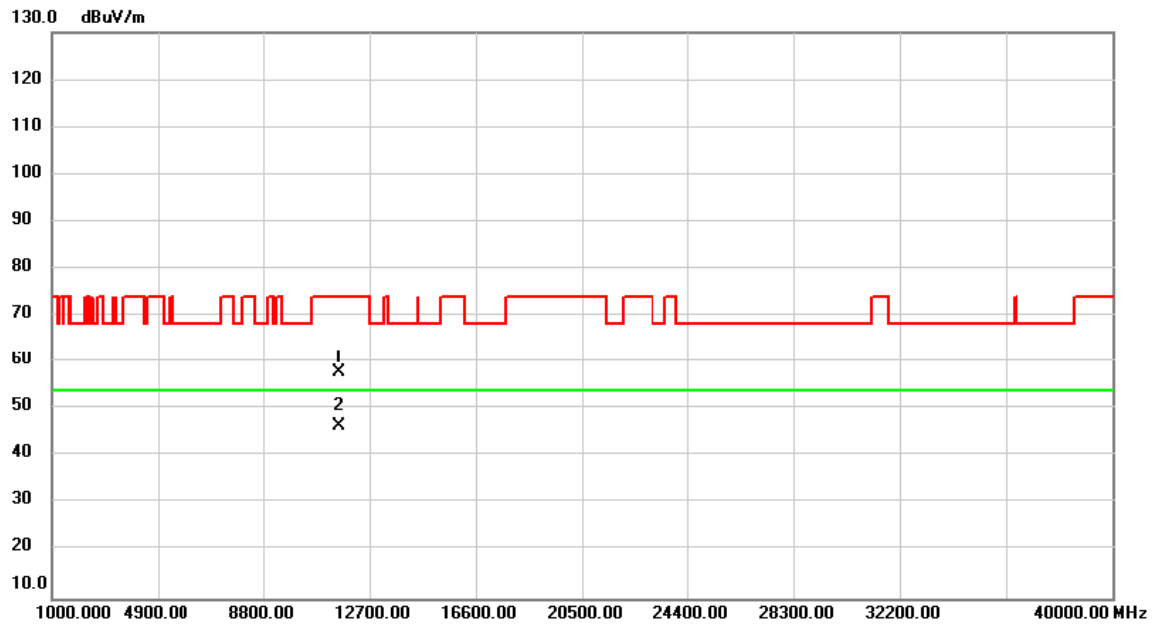


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	44.73	13.21	57.94	74.00	-16.06	peak	
2	*	11590.000	33.11	13.21	46.32	54.00	-7.68	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

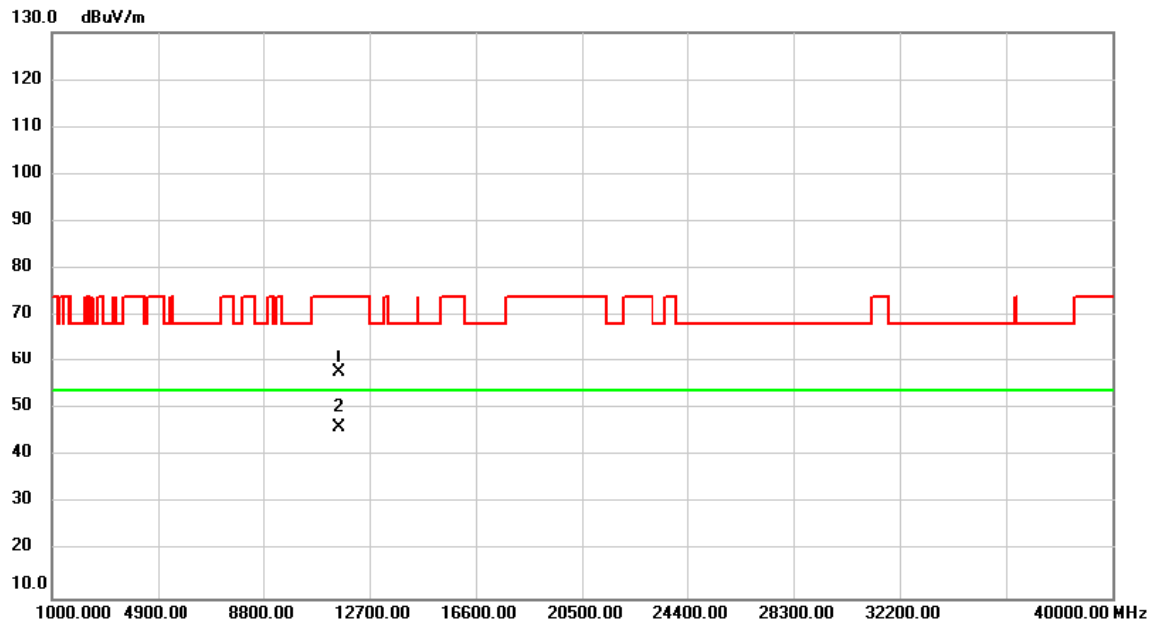


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	44.59	13.21	57.80	74.00	-16.20	peak	
2	*	11590.000	32.87	13.21	46.08	54.00	-7.92	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

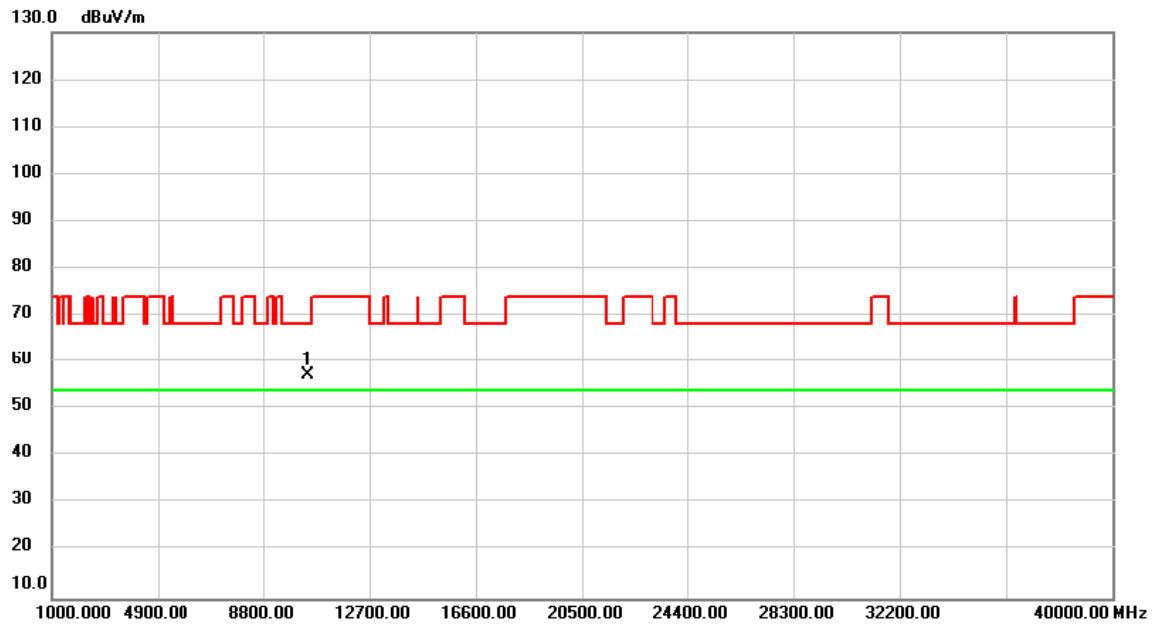


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.000	45.02	12.32	57.34	68.20	-10.86	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

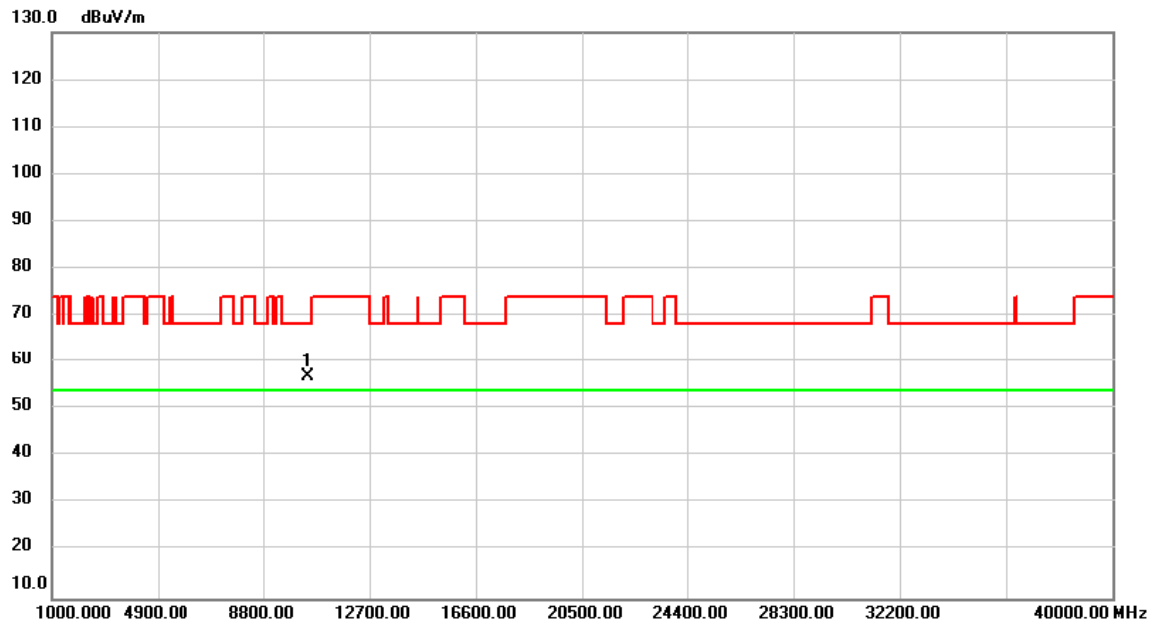


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.000	44.69	12.32	57.01	68.20	-11.19	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

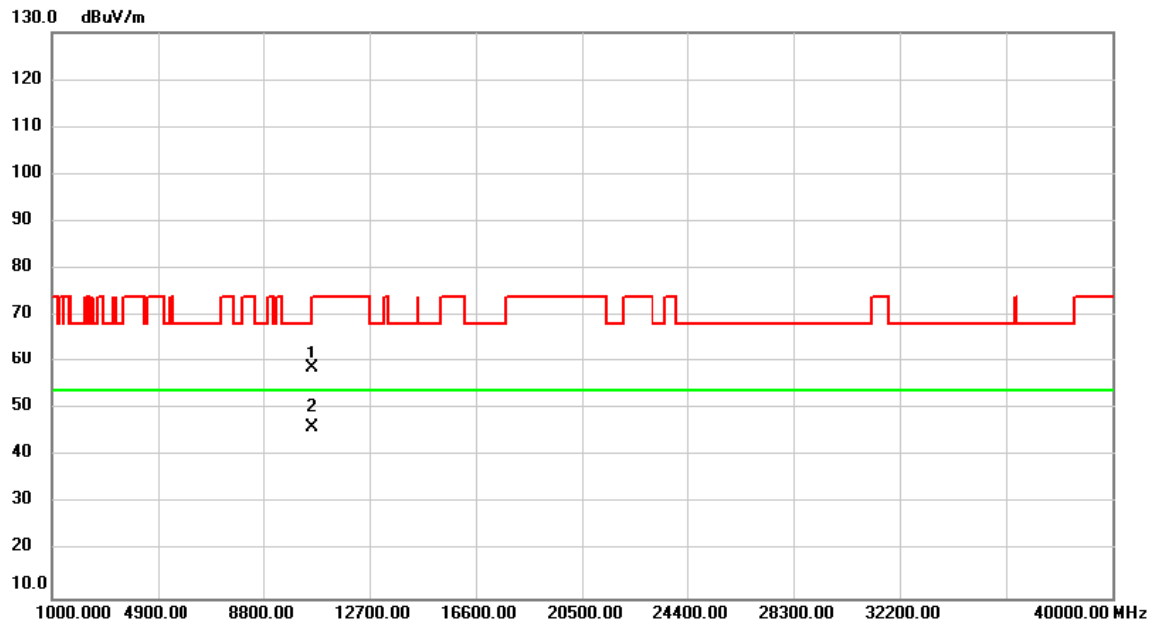


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.000	46.43	12.44	58.87	68.20	-9.33	peak	
2	*	10580.000	33.84	12.44	46.28	54.00	-7.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Horizontal

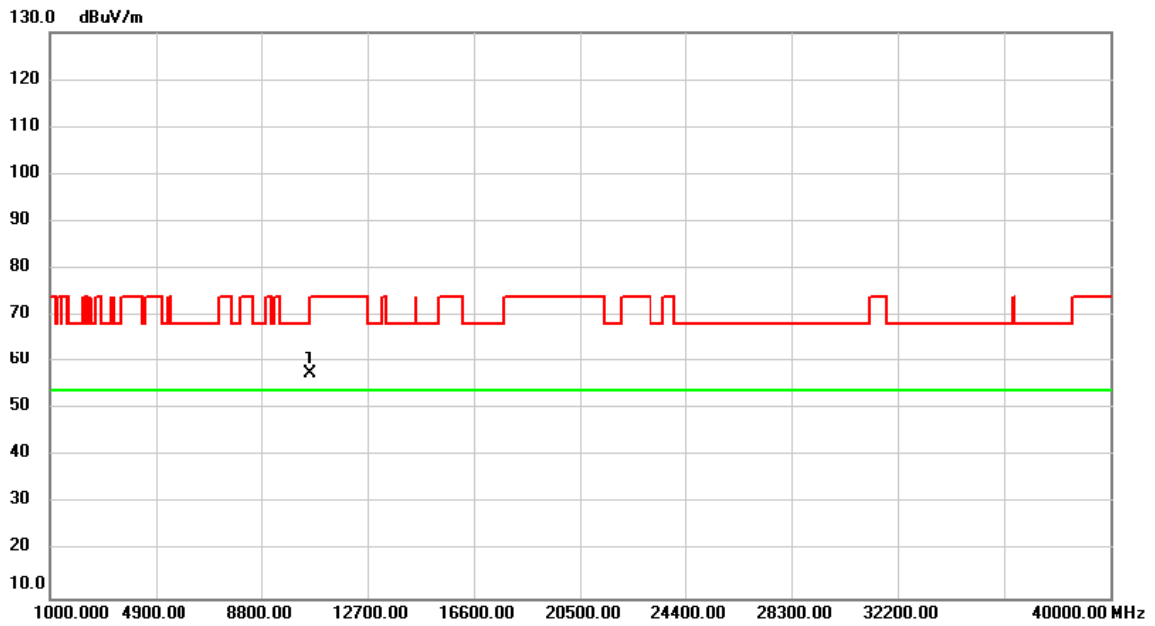


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10580.000	45.00	12.44	57.44	68.20	-10.76	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

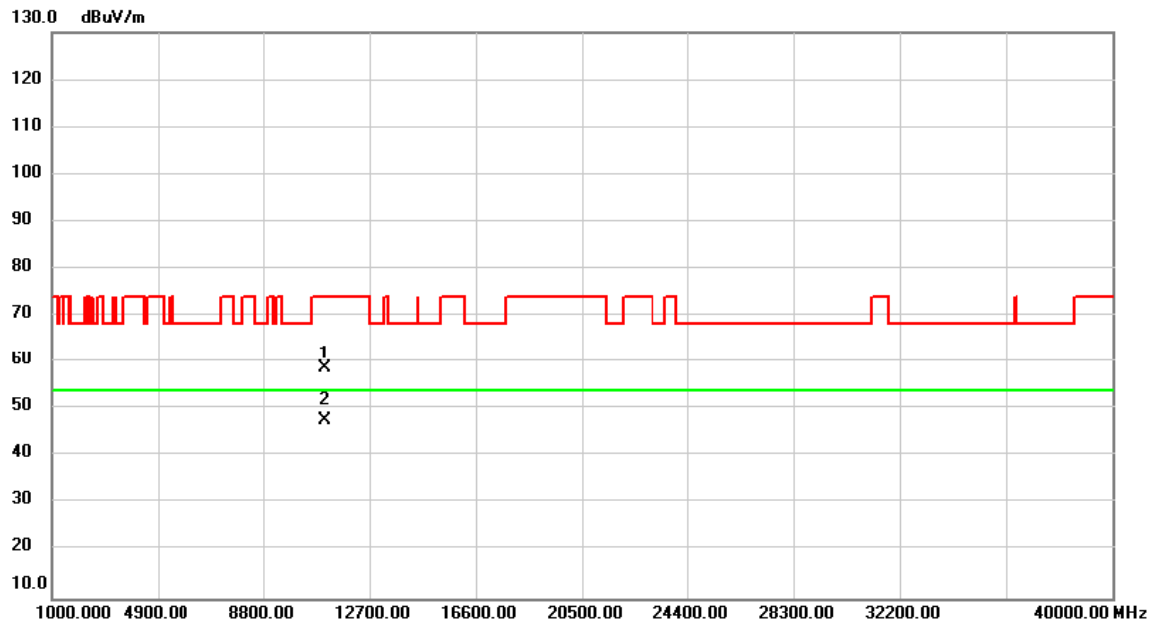


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	46.02	12.83	58.85	74.00	-15.15	peak	
2	*	11060.000	34.81	12.83	47.64	54.00	-6.36	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Horizontal

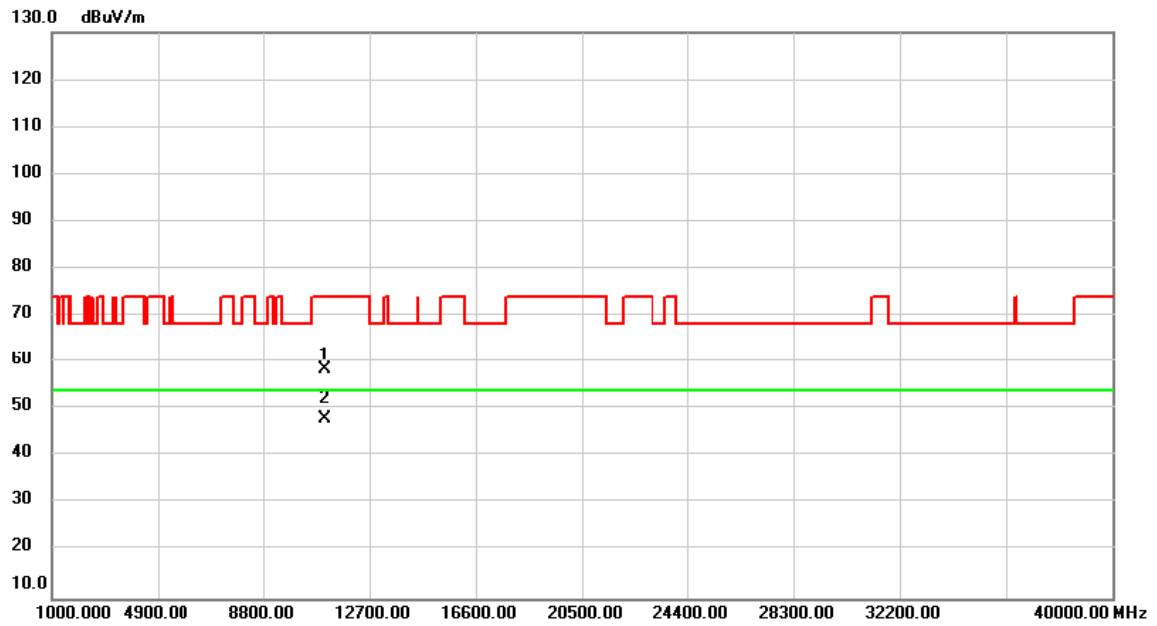


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	45.74	12.83	58.57	74.00	-15.43	peak	
2	*	11060.000	35.03	12.83	47.86	54.00	-6.14	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

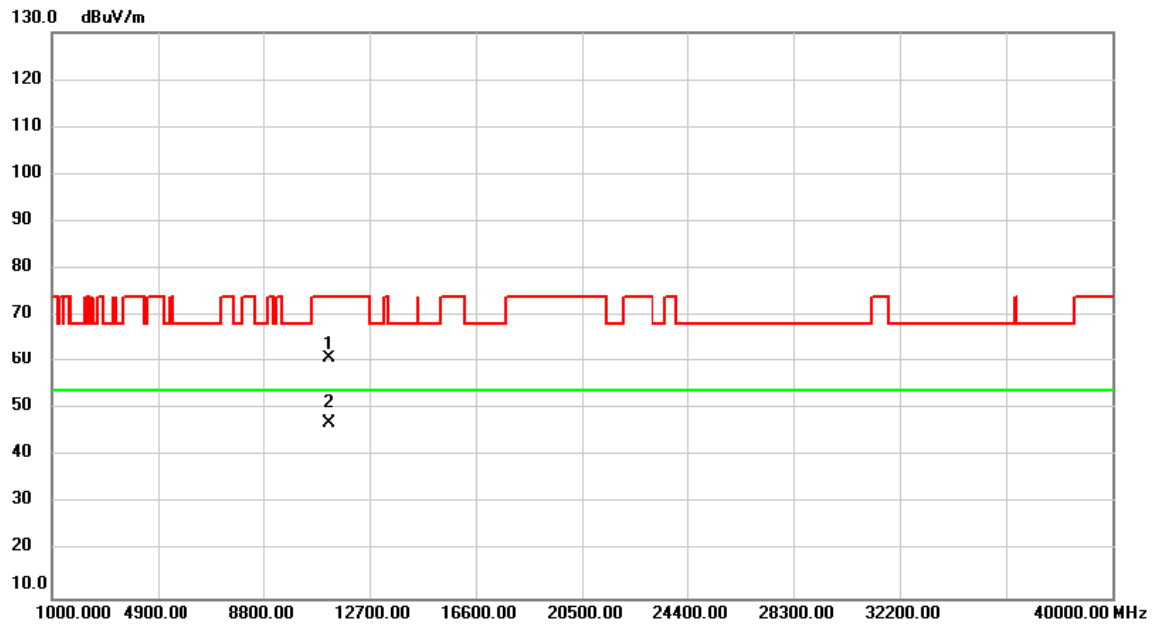


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	47.79	12.94	60.73	74.00	-13.27	peak	
2	*	11220.000	33.98	12.94	46.92	54.00	-7.08	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Horizontal

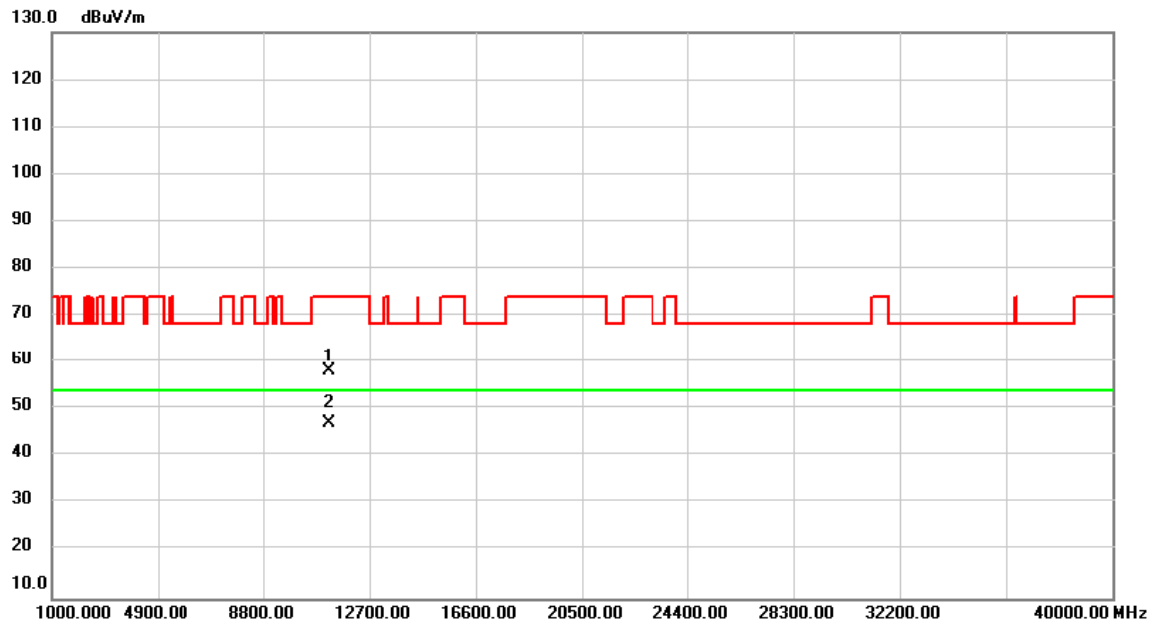


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	45.32	12.94	58.26	74.00	-15.74	peak	
2	*	11220.000	33.97	12.94	46.91	54.00	-7.09	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH138: 5690 MHz	Polarization	Vertical

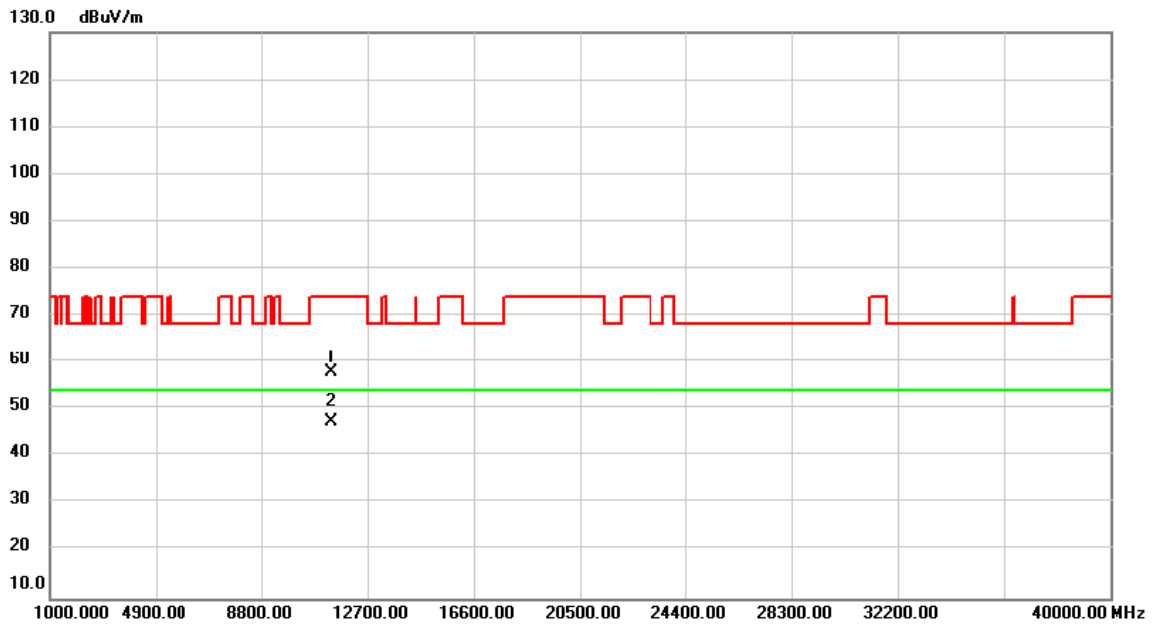

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.000	44.82	13.07	57.89	74.00	-16.11	peak	
2	*	11380.000	34.32	13.07	47.39	54.00	-6.61	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH138: 5690 MHz	Polarization	Horizontal

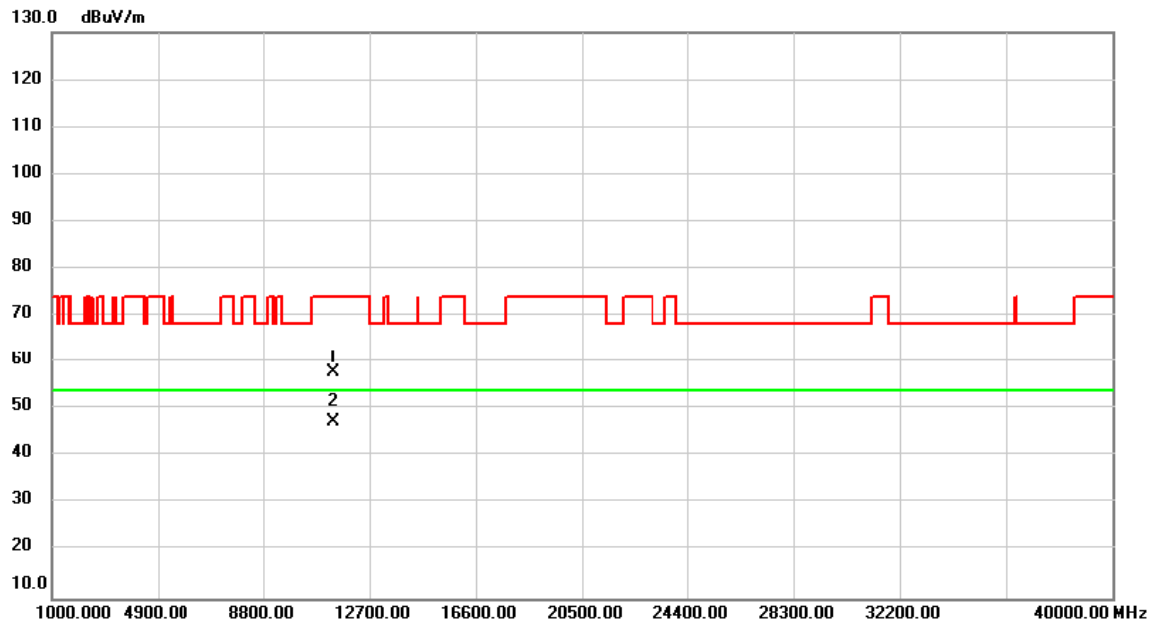


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.000	44.90	13.07	57.97	74.00	-16.03	peak	
2	*	11380.000	34.37	13.07	47.44	54.00	-6.56	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

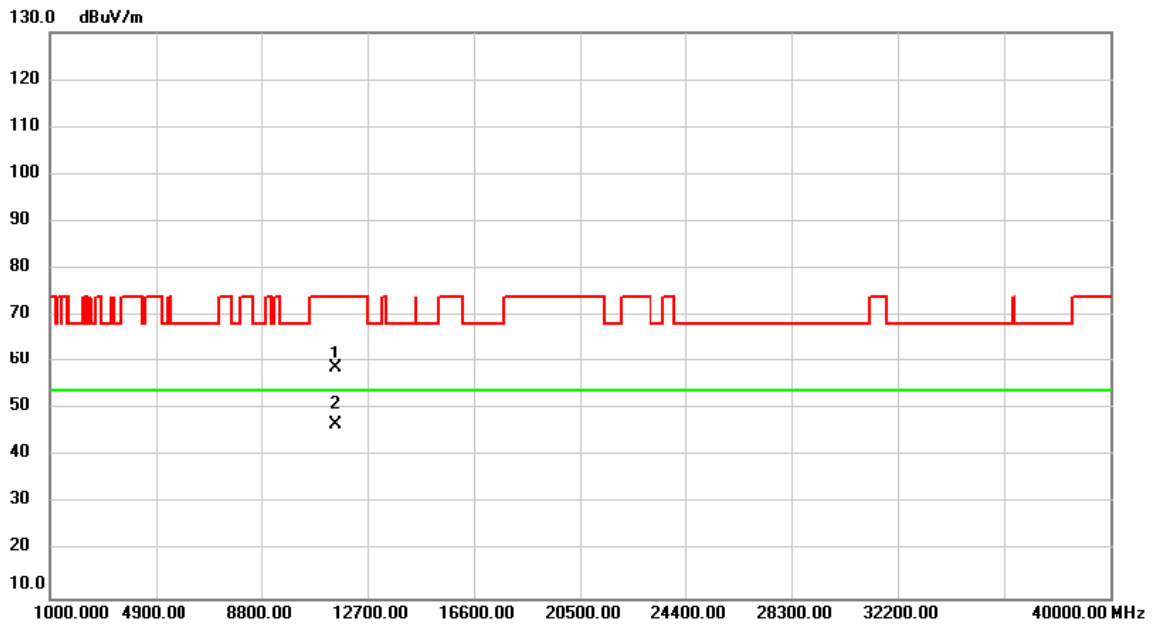


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	45.68	13.18	58.86	74.00	-15.14	peak	
2	*	11550.000	33.67	13.18	46.85	54.00	-7.15	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

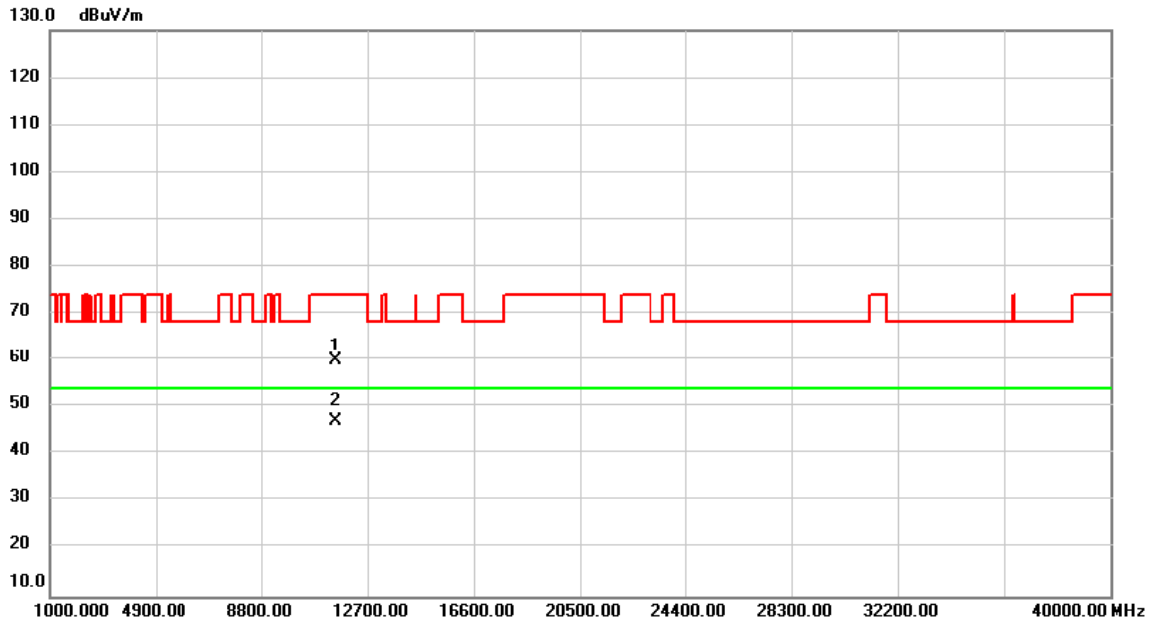

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	46.81	13.18	59.99	74.00	-14.01	peak	
2	*	11550.000	33.92	13.18	47.10	54.00	-6.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - OUTPUT POWER**

Test Mode	IEEE 802.11a_MIMO_Main	Tested Date	2021/6/21
-----------	------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	14.74	0.0298	23.98	0.2500	Pass
5200	16.12	0.0409	23.98	0.2500	Pass
5240	18.18	0.0658	23.98	0.2500	Pass
5260	18.21	0.0662	23.98	0.2500	Pass
5300	18.81	0.0760	23.98	0.2500	Pass
5320	16.05	0.0403	23.98	0.2500	Pass
5500	16.61	0.0458	23.98	0.2500	Pass
5580	18.46	0.0701	23.98	0.2500	Pass
5700	17.60	0.0575	23.98	0.2500	Pass
5745	18.68	0.0738	30.00	1.0000	Pass
5785	18.71	0.0743	30.00	1.0000	Pass
5825	19.53	0.0897	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_MIMO_Aux	Tested Date	2021/6/21
-----------	-----------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.10	0.0324	23.98	0.2500	Pass
5200	17.71	0.0590	23.98	0.2500	Pass
5240	19.17	0.0826	23.98	0.2500	Pass
5260	19.18	0.0828	23.98	0.2500	Pass
5300	18.86	0.0769	23.98	0.2500	Pass
5320	15.71	0.0372	23.98	0.2500	Pass
5500	17.07	0.0509	23.98	0.2500	Pass
5580	19.26	0.0843	23.98	0.2500	Pass
5700	17.96	0.0625	23.98	0.2500	Pass
5745	19.75	0.0944	30.00	1.0000	Pass
5785	19.67	0.0927	30.00	1.0000	Pass
5825	19.73	0.0940	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_MIMO_Total	Tested Date	2021/6/21
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.93	0.0621	23.98	0.2500	Pass
5200	20.00	0.0999	23.98	0.2500	Pass
5240	21.71	0.1484	23.98	0.2500	Pass
5260	21.73	0.1490	23.98	0.2500	Pass
5300	21.85	0.1529	23.98	0.2500	Pass
5320	18.89	0.0775	23.98	0.2500	Pass
5500	19.86	0.0967	23.98	0.2500	Pass
5580	21.89	0.1545	23.98	0.2500	Pass
5700	20.79	0.1201	23.98	0.2500	Pass
5745	22.26	0.1682	30.00	1.0000	Pass
5785	22.23	0.1670	30.00	1.0000	Pass
5825	22.64	0.1837	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Main	Tested Date	2021/6/21
-----------	-------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.53	0.0357	23.98	0.2500	Pass
5200	16.31	0.0428	23.98	0.2500	Pass
5240	17.42	0.0552	23.98	0.2500	Pass
5260	18.11	0.0647	23.98	0.2500	Pass
5300	17.68	0.0586	23.98	0.2500	Pass
5320	15.32	0.0340	23.98	0.2500	Pass
5500	15.56	0.0360	23.98	0.2500	Pass
5580	17.72	0.0592	23.98	0.2500	Pass
5700	17.01	0.0502	23.98	0.2500	Pass
5745	17.69	0.0587	30.00	1.0000	Pass
5785	17.81	0.0604	30.00	1.0000	Pass
5825	17.68	0.0586	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Aux	Tested Date	2021/6/21
-----------	------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.89	0.0388	23.98	0.2500	Pass
5200	17.34	0.0542	23.98	0.2500	Pass
5240	18.41	0.0693	23.98	0.2500	Pass
5260	18.71	0.0743	23.98	0.2500	Pass
5300	17.36	0.0545	23.98	0.2500	Pass
5320	14.89	0.0308	23.98	0.2500	Pass
5500	16.31	0.0428	23.98	0.2500	Pass
5580	18.82	0.0762	23.98	0.2500	Pass
5700	17.41	0.0551	23.98	0.2500	Pass
5745	18.76	0.0752	30.00	1.0000	Pass
5785	18.82	0.0762	30.00	1.0000	Pass
5825	18.26	0.0670	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Total	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.72	0.0745	23.98	0.2500	Pass
5200	19.87	0.0970	23.98	0.2500	Pass
5240	20.95	0.1246	23.98	0.2500	Pass
5260	21.43	0.1390	23.98	0.2500	Pass
5300	20.53	0.1131	23.98	0.2500	Pass
5320	18.12	0.0649	23.98	0.2500	Pass
5500	18.96	0.0787	23.98	0.2500	Pass
5580	21.32	0.1354	23.98	0.2500	Pass
5700	20.22	0.1053	23.98	0.2500	Pass
5745	21.27	0.1339	30.00	1.0000	Pass
5785	21.35	0.1366	30.00	1.0000	Pass
5825	20.99	0.1256	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Main	Tested Date	2021/6/21
-----------	-------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.56	0.0286	23.98	0.2500	Pass
5230	17.21	0.0526	23.98	0.2500	Pass
5270	17.38	0.0547	23.98	0.2500	Pass
5310	15.02	0.0318	23.98	0.2500	Pass
5510	16.28	0.0425	23.98	0.2500	Pass
5550	16.82	0.0481	23.98	0.2500	Pass
5670	16.48	0.0445	23.98	0.2500	Pass
5755	17.03	0.0505	30.00	1.0000	Pass
5795	16.76	0.0474	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Aux	Tested Date	2021/6/21
-----------	------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.40	0.0347	23.98	0.2500	Pass
5230	17.31	0.0538	23.98	0.2500	Pass
5270	17.21	0.0526	23.98	0.2500	Pass
5310	15.13	0.0326	23.98	0.2500	Pass
5510	17.03	0.0505	23.98	0.2500	Pass
5550	17.05	0.0507	23.98	0.2500	Pass
5670	17.68	0.0586	23.98	0.2500	Pass
5755	17.61	0.0577	30.00	1.0000	Pass
5795	17.76	0.0597	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Total	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.01	0.0632	23.98	0.2500	Pass
5230	20.27	0.1064	23.98	0.2500	Pass
5270	20.31	0.1073	23.98	0.2500	Pass
5310	18.09	0.0644	23.98	0.2500	Pass
5510	19.68	0.0929	23.98	0.2500	Pass
5550	19.95	0.0988	23.98	0.2500	Pass
5670	20.13	0.1031	23.98	0.2500	Pass
5755	20.34	0.1081	30.00	1.0000	Pass
5795	20.30	0.1071	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.59	0.0362	23.98	0.2500	Pass
5200	16.44	0.0441	23.98	0.2500	Pass
5240	17.45	0.0556	23.98	0.2500	Pass
5260	18.13	0.0650	23.98	0.2500	Pass
5300	17.88	0.0614	23.98	0.2500	Pass
5320	15.39	0.0346	23.98	0.2500	Pass
5500	16.04	0.0402	23.98	0.2500	Pass
5580	17.79	0.0601	23.98	0.2500	Pass
5700	17.03	0.0505	23.98	0.2500	Pass
5745	17.72	0.0592	30.00	1.0000	Pass
5785	17.87	0.0612	30.00	1.0000	Pass
5825	17.76	0.0597	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.93	0.0392	23.98	0.2500	Pass
5200	17.37	0.0546	23.98	0.2500	Pass
5240	18.43	0.0697	23.98	0.2500	Pass
5260	18.72	0.0745	23.98	0.2500	Pass
5300	17.41	0.0551	23.98	0.2500	Pass
5320	14.97	0.0314	23.98	0.2500	Pass
5500	16.42	0.0439	23.98	0.2500	Pass
5580	18.87	0.0771	23.98	0.2500	Pass
5700	17.43	0.0553	23.98	0.2500	Pass
5745	18.81	0.0760	30.00	1.0000	Pass
5785	18.98	0.0791	30.00	1.0000	Pass
5825	18.31	0.0678	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.77	0.0754	23.98	0.2500	Pass
5200	19.94	0.0986	23.98	0.2500	Pass
5240	20.98	0.1253	23.98	0.2500	Pass
5260	21.45	0.1395	23.98	0.2500	Pass
5300	20.66	0.1165	23.98	0.2500	Pass
5320	18.20	0.0660	23.98	0.2500	Pass
5500	19.24	0.0840	23.98	0.2500	Pass
5580	21.37	0.1372	23.98	0.2500	Pass
5700	20.24	0.1058	23.98	0.2500	Pass
5745	21.31	0.1352	30.00	1.0000	Pass
5785	21.47	0.1403	30.00	1.0000	Pass
5825	21.05	0.1275	30.00	1.0000	Pass



Test Mode	IEEE 802.11ac (VHT40)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.61	0.0289	23.98	0.2500	Pass
5230	17.26	0.0532	23.98	0.2500	Pass
5270	17.42	0.0552	23.98	0.2500	Pass
5310	15.06	0.0321	23.98	0.2500	Pass
5510	16.31	0.0428	23.98	0.2500	Pass
5550	16.86	0.0485	23.98	0.2500	Pass
5670	16.58	0.0455	23.98	0.2500	Pass
5755	17.11	0.0514	30.00	1.0000	Pass
5795	16.84	0.0483	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.44	0.0350	23.98	0.2500	Pass
5230	17.40	0.0550	23.98	0.2500	Pass
5270	17.25	0.0531	23.98	0.2500	Pass
5310	15.15	0.0327	23.98	0.2500	Pass
5510	17.13	0.0516	23.98	0.2500	Pass
5550	17.13	0.0516	23.98	0.2500	Pass
5670	17.72	0.0592	23.98	0.2500	Pass
5755	17.62	0.0578	30.00	1.0000	Pass
5795	17.81	0.0604	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.06	0.0639	23.98	0.2500	Pass
5230	20.34	0.1082	23.98	0.2500	Pass
5270	20.35	0.1083	23.98	0.2500	Pass
5310	18.12	0.0648	23.98	0.2500	Pass
5510	19.75	0.0944	23.98	0.2500	Pass
5550	20.01	0.1002	23.98	0.2500	Pass
5670	20.20	0.1047	23.98	0.2500	Pass
5755	20.38	0.1092	30.00	1.0000	Pass
5795	20.36	0.1087	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	13.16	0.0207	23.98	0.2500	Pass
5290	13.61	0.0230	23.98	0.2500	Pass
5530	14.23	0.0265	23.98	0.2500	Pass
5610	16.58	0.0455	23.98	0.2500	Pass
5775	15.83	0.0383	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	14.12	0.0258	23.98	0.2500	Pass
5290	14.03	0.0253	23.98	0.2500	Pass
5530	15.35	0.0343	23.98	0.2500	Pass
5610	16.21	0.0418	23.98	0.2500	Pass
5775	16.36	0.0433	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.68	0.0465	23.98	0.2500	Pass
5290	16.84	0.0483	23.98	0.2500	Pass
5530	17.84	0.0608	23.98	0.2500	Pass
5610	19.41	0.0873	23.98	0.2500	Pass
5775	19.11	0.0815	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 20)_MIMO_Main	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.64	0.0366	23.98	0.2500	Pass
5200	16.59	0.0456	23.98	0.2500	Pass
5240	17.65	0.0582	23.98	0.2500	Pass
5260	17.86	0.0611	23.98	0.2500	Pass
5300	15.92	0.0391	23.98	0.2500	Pass
5320	16.58	0.0455	23.98	0.2500	Pass
5500	17.94	0.0622	23.98	0.2500	Pass
5580	17.07	0.0509	23.98	0.2500	Pass
5700	15.64	0.0366	23.98	0.2500	Pass
5745	18.32	0.0679	30.00	1.0000	Pass
5785	18.31	0.0678	30.00	1.0000	Pass
5825	19.35	0.0861	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 20)_MIMO_Aux	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	16.09	0.0406	23.98	0.2500	Pass
5200	17.63	0.0579	23.98	0.2500	Pass
5240	18.58	0.0721	23.98	0.2500	Pass
5260	18.70	0.0741	23.98	0.2500	Pass
5300	18.13	0.0650	23.98	0.2500	Pass
5320	15.61	0.0364	23.98	0.2500	Pass
5500	17.07	0.0509	23.98	0.2500	Pass
5580	18.80	0.0759	23.98	0.2500	Pass
5700	17.53	0.0566	23.98	0.2500	Pass
5745	18.99	0.0793	30.00	1.0000	Pass
5785	18.86	0.0769	30.00	1.0000	Pass
5825	18.92	0.0780	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 20)_MIMO_Total	Tested Date	2021/6/21
-----------	-----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.88	0.0773	23.98	0.2500	Pass
5200	20.15	0.1035	23.98	0.2500	Pass
5240	21.15	0.1303	23.98	0.2500	Pass
5260	21.31	0.1352	23.98	0.2500	Pass
5300	20.97	0.1250	23.98	0.2500	Pass
5320	18.78	0.0755	23.98	0.2500	Pass
5500	19.84	0.0964	23.98	0.2500	Pass
5580	21.40	0.1381	23.98	0.2500	Pass
5700	20.32	0.1076	23.98	0.2500	Pass
5745	21.68	0.1472	30.00	1.0000	Pass
5785	21.60	0.1447	30.00	1.0000	Pass
5825	22.15	0.1641	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 40)_MIMO_Main	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.79	0.0301	23.98	0.2500	Pass
5230	16.49	0.0446	23.98	0.2500	Pass
5270	17.31	0.0538	23.98	0.2500	Pass
5310	15.38	0.0345	23.98	0.2500	Pass
5510	16.07	0.0405	23.98	0.2500	Pass
5550	16.82	0.0481	23.98	0.2500	Pass
5670	17.02	0.0504	23.98	0.2500	Pass
5755	17.03	0.0505	30.00	1.0000	Pass
5795	16.89	0.0489	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 40)_MIMO_Aux	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	15.89	0.0388	23.98	0.2500	Pass
5230	17.99	0.0630	23.98	0.2500	Pass
5270	18.23	0.0665	23.98	0.2500	Pass
5310	15.31	0.0340	23.98	0.2500	Pass
5510	17.52	0.0565	23.98	0.2500	Pass
5550	17.86	0.0611	23.98	0.2500	Pass
5670	18.01	0.0632	23.98	0.2500	Pass
5755	17.95	0.0624	30.00	1.0000	Pass
5795	17.56	0.0570	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 40)_MIMO_Total	Tested Date	2021/6/21
-----------	-----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.39	0.0689	23.98	0.2500	Pass
5230	20.31	0.1075	23.98	0.2500	Pass
5270	20.80	0.1204	23.98	0.2500	Pass
5310	18.36	0.0685	23.98	0.2500	Pass
5510	19.87	0.0970	23.98	0.2500	Pass
5550	20.38	0.1092	23.98	0.2500	Pass
5670	20.55	0.1136	23.98	0.2500	Pass
5755	20.52	0.1128	30.00	1.0000	Pass
5795	20.25	0.1059	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	13.68	0.0233	23.98	0.2500	Pass
5290	13.82	0.0241	23.98	0.2500	Pass
5530	14.02	0.0252	23.98	0.2500	Pass
5610	16.61	0.0458	23.98	0.2500	Pass
5775	16.02	0.0400	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 80)_MIMO_Aux	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	14.43	0.0277	23.98	0.2500	Pass
5290	14.43	0.0277	23.98	0.2500	Pass
5530	15.23	0.0333	23.98	0.2500	Pass
5610	16.43	0.0440	23.98	0.2500	Pass
5775	16.85	0.0484	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW 80)_MIMO_Total	Tested Date	2021/6/21
-----------	-----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	17.08	0.0511	23.98	0.2500	Pass
5290	17.15	0.0518	23.98	0.2500	Pass
5530	17.68	0.0586	23.98	0.2500	Pass
5610	19.53	0.0898	23.98	0.2500	Pass
5775	19.47	0.0884	30.00	1.0000	Pass

## For Straddle Channel:

Test Mode	IEEE 802.11a_MIMO_Main	Tested Date	2021/6/21
-----------	------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	16.52	0.0449	23.98	0.2500	Pass
5720	10.21	0.0105	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_MIMO_Aux	Tested Date	2021/6/21
-----------	-----------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	16.86	0.0485	23.98	0.2500	Pass
5720	10.25	0.0106	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_MIMO_Total	Tested Date	2021/6/21
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	19.70	0.0934	23.98	0.2500	Pass
5720	13.24	0.0211	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Main	Tested Date	2021/6/21
-----------	-------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.06	0.0161	23.98	0.2500	Pass
5720	7.82	0.0061	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Aux	Tested Date	2021/6/21
-----------	------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.68	0.0185	23.98	0.2500	Pass
5720	8.02	0.0063	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_MIMO_Total	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.39	0.0346	23.98	0.2500	Pass
5720	10.93	0.0124	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Main	Tested Date	2021/6/21
-----------	-------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.86	0.0097	23.98	0.2500	Pass
5710	0.21	0.0010	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Aux	Tested Date	2021/6/21
-----------	------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.16	0.0104	23.98	0.2500	Pass
5710	0.56	0.0011	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_MIMO_Total	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.02	0.0201	23.98	0.2500	Pass
5710	3.40	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.08	0.0161	23.98	0.2500	Pass
5720	7.91	0.0062	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.71	0.0187	23.98	0.2500	Pass
5720	8.13	0.0065	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.42	0.0348	23.98	0.2500	Pass
5720	11.03	0.0127	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.88	0.0097	23.98	0.2500	Pass
5710	2.25	0.0017	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.21	0.0105	23.98	0.2500	Pass
5710	0.68	0.0012	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.06	0.0202	23.98	0.2500	Pass
5710	4.55	0.0028	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	13.56	0.0227	23.98	0.2500	Pass
5690	-5.25	0.0003	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	13.21	0.0209	23.98	0.2500	Pass
5690	-4.68	0.0003	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	16.40	0.0436	23.98	0.2500	Pass
5690	-1.95	0.0006	30.00	1.0000	Pass



Test Mode	IEEE 802.11ax (HEW20)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.26	0.0168	23.98	0.2500	Pass
5720	7.86	0.0061	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	13.51	0.0224	23.98	0.2500	Pass
5720	8.26	0.0067	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.94	0.0393	23.98	0.2500	Pass
5720	11.07	0.0128	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.92	0.0098	23.98	0.2500	Pass
5710	0.52	0.0011	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.51	0.0112	23.98	0.2500	Pass
5710	0.81	0.0012	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.24	0.0211	23.98	0.2500	Pass
5710	3.68	0.0023	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_MIMO_Main	Tested Date	2021/6/21
-----------	---------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	12.25	0.0168	23.98	0.2500	Pass
5690	-4.83	0.0003	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_MIMO_Aux	Tested Date	2021/6/21
-----------	--------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	13.13	0.0206	23.98	0.2500	Pass
5690	-4.25	0.0004	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_MIMO_Total	Tested Date	2021/6/21
-----------	----------------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.72	0.0373	23.98	0.2500	Pass
5690	-1.52	0.0007	30.00	1.0000	Pass

**End of Test Report**