

FCC Radio Test Report

FCC ID: O57C640RTL8852

Project No. : 2007T046B
Equipment : Notebook Computer
Brand Name : Lenovo
Test Model : Yoga 6 13ARE05
Series Model : Yoga 6 13ARE05*****, Yoga 6 13ALC6, Yoga 6 13ALC6***** (*=0~9, A~z, “_” or blank)
Applicant : Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone
Manufacturer : Lenovo PC HK Limited
Address : 23/F, Lincoln House, Taikoo Place 979 King’s Road, Quarry Bay, Hong Kong, P.R.China
Date of Receipt : Apr. 13, 2021
Date of Test : Apr. 13, 2021 ~ May 04, 2021
Issued Date : May 12, 2021
Report Version : R00
Standard(s) : FCC Part15, Subpart E(15.407)
ANSI C63.10-2013
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Welly Zhou



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 TEST MODES	9
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 SUPPORT UNITS	10
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	11
3.1 LIMIT	11
3.2 TEST PROCEDURE	11
3.3 DEVIATION FROM TEST STANDARD	11
3.4 TEST SETUP	12
3.5 EUT OPERATION CONDITIONS	12
3.6 TEST RESULTS	12
4 . RADIATED EMISSIONS TEST	13
4.1 LIMIT	13
4.2 TEST PROCEDURE	14
4.3 DEVIATION FROM TEST STANDARD	14
4.4 TEST SETUP	15
4.5 EUT OPERATION CONDITIONS	17
4.6 TEST RESULTS - 30 MHz TO 1000 MHz	17
4.7 TEST RESULTS - ABOVE 1000 MHz	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTOS	19
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	22
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ	27
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	30

REVISION HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-4-2007T046	R00	Original Report.	Aug. 28, 2020
BTL-FCCP-4-2007T046	R01	Revise Typo.	Sep. 07, 2020
BTL-FCCP-4-2007T046A	R00	1. Added Series models. 2. Added CPU. 3. Added a new appearance without cover. 4. Changed adapter.	Mar. 23, 2021
BTL-FCCP-4-2007T046B	R00	1. Added Realtek / RTL8852AE module card. 2. Added adapter * 2.	May 12, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) This is to request a Class II permissive change for FCC ID: O57C640RTL8852.

This FCC ID: O57C640RTL8852 is change ID based Realtek Semiconductor Corp., the original application information follow as model: RTL8852AE, FCC ID: TX2-RTL8852AE, approved on 10/16/2020)

Thus, only conducted emissions and radiated spurious emissions were evaluated and recorded in this report. For the test results of all other test items please refer to module test report as below table:

RF Module model	Report Number	Module Function
RTL8852AE	RF200522E04	WLAN 2.4G
RTL8852AE	RF200522E04-1	RLAN 5G Band 1~4
RTL8852AE	RF200522E04-2	Bluetooth EDR
RTL8852AE	RF200522E04-3	Bluetooth LE

- (3) Based on the RF module the antennas for this Notebook Computer were updated as below table:

Antenna Information				
Antenna 1 (WLAN combo)	Manufacturer	AWAN		
	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna	
	Part number	AUF6Y-100025 (DC33002GC00)	AUF6Y-100026 (DC33002GC10)	
	Peak gain	Main Antenna :	Aux Antenna :	
		WLAN(2.4G):1.14dBi	WLAN(2.4G):-1.53dBi	
		WLAN(5G B1-3):-1.73dBi WLAN(5G B4):-2.83dBi	WLAN(5G B1-3):-2.43dBi WLAN(5G B4):-1.54dBi	

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's Test Firm Registration Number for FCC: 357015
 BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
 The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	73%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	26°C	52%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	26°C	52%	AC 120V/60Hz	Kwok Guo

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook Computer
Brand Name	Lenovo
Test Model	Yoga 6 13ARE05
Series Model	Yoga 6 13ARE05*****, Yoga 6 13ALC6, Yoga 6 13ALC6*****(*=0~9, A~z, “ ” or blank)
Model Difference(s)	Please refer to note 5.
Hardware Version	LA-K211P
Software Version	19041.329
RF Module Model	RTL8852AE
EUT Power Rating	20Vdc 2.25A
Power Adapter Power Rating	1. Brand: Acbel (Lenovo) M/N: ADLX45YAC3D I/P: 100-240V~1.2A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W/15.0Vdc 3.0A/9.0Vdc 2.0A/5.0Vdc 2.0A 10.0W 2. Brand: Chicony (Lenovo) M/N: ADLX45YCC3G I/P: 100-240V~1.3A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W / 15Vdc 3A / 9Vdc 2A / 5.0Vdc 2.0A 10.0W 3. Brand: Delta (Lenovo) M/N: ADLX45YDC3D I/P: 100-240V~1.2A 50-60Hz O/P: 20.0Vdc 2.25A 45.0W / 15.0Vdc 3.0A / 9.0Vdc 2.0A / 5.0Vdc 2.0A 10.0W
Power Adapter	1. Acbel (Lenovo) / ADLX45YAC3D 2. Chicony (Lenovo) / ADLX45YCC3G 3. Delta (Lenovo) / ADLX45YDC3D
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250 MHz~5350 MHz UNII-2C: 5470 MHz~5725 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM, OFDMA
Bit Rate of Transmitter	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: Up to 150 Mbps 802.11ac: Up to 433.3 Mbps 802.11ax: Up to 1201 Mbps
Maximum Output Power _UNII-1 (Reference module report)	IEEE 802.11ax (HEW40): 22.92dBm (0.19588 W)
Maximum Output Power _UNII-2A (Reference module report)	IEEE 802.11ax (HEW40): 22.70dBm (0.18621 W)
Maximum Output Power _UNII-2C (Reference module report)	IEEE 802.11n (HT40):: 23.96 dBm (0.24889 W)
Maximum Output Power _UNII-3 (Reference module report)	IEEE 802.11ax (HEW20): 28.07 dBm (0.6412 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. This is a supplement report of BTL-FCCP-4-2007T046, BTL-FCCP-4-2007T046A report. The differences compared with original report are
 - a. Added Realtek / RTL8852AE module card.
 - b. Added adapter * 2.
 After evaluated, the changes with respect to the original one, all tests need to re-test.

3. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				


2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_IEEE 802.11ax (HEW40)	102	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11a	36/48, 52/64	Bandedge
	TX Mode_IEEE 802.11n (HT20) TX Mode_IEEE 802.11ax (HEW20)	100/140, 149/165	
	TX Mode_IEEE 802.11n (HT40) TX Mode_IEEE 802.11ax (HEW40)	38/46, 54/62 102/134, 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	Harmonic
	TX Mode_IEEE 802.11a	36/40/48 52/60/64	
	TX Mode_IEEE 802.11n (HT20) TX Mode_IEEE 802.11ax (HEW20)	100/116/140 149/157/165	
	TX Mode_IEEE 802.11n (HT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	

NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.
- (4) There were no emissions found below 30 MHz within 20 dB of the limit.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

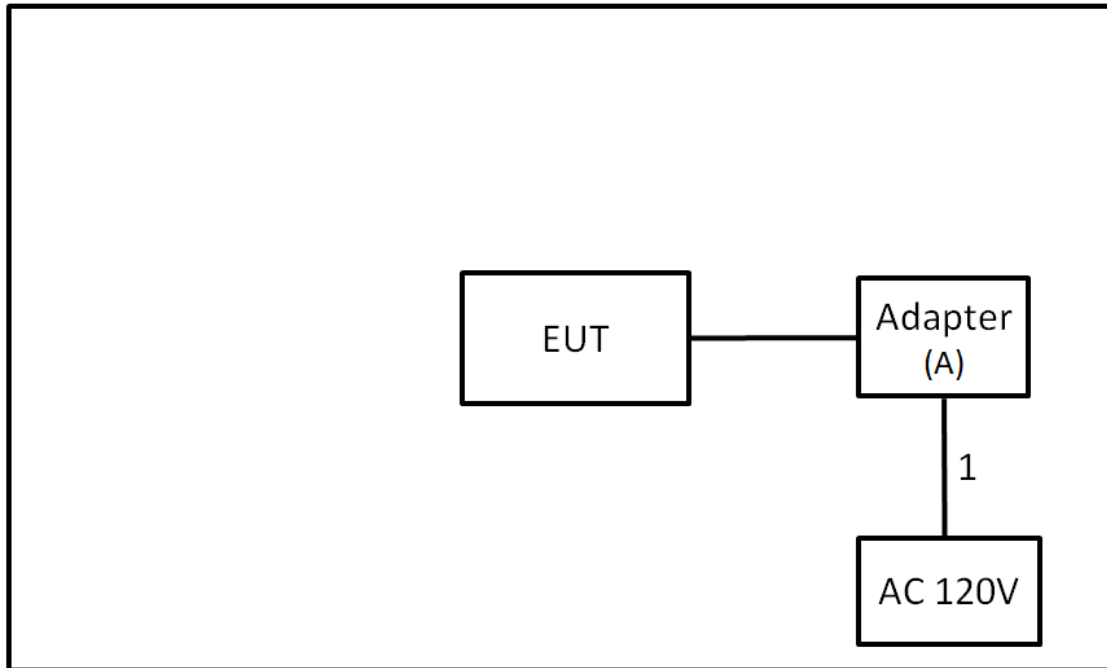

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Adapter	Delta	ADLX45YDC3D	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Power Cable	NO	NO	0.9m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

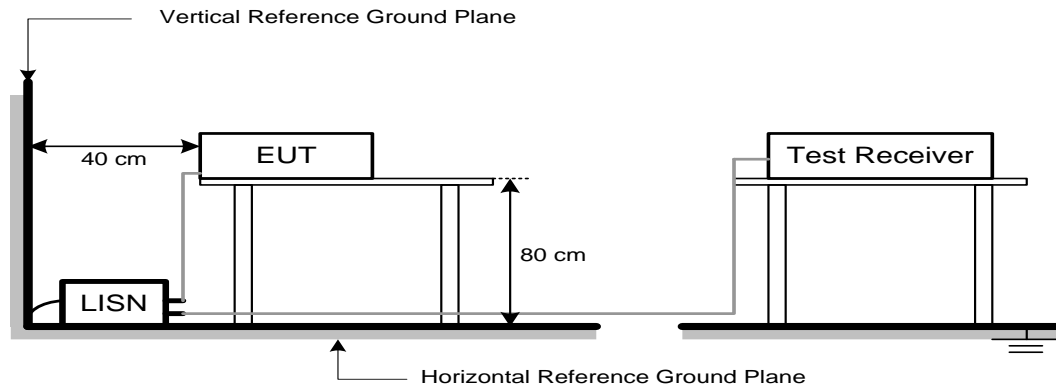

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27 NOTE (2)	68.3	74.3 (Note 3)
	10 NOTE (2)	105.3	111.3(Note 3)
	15.6 NOTE (2)	110.9	116.9(Note 3)
	27 NOTE (2)	122.3	128.3(Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$



$$20\log d_{\text{limit}}/d_{\text{measure}}=20\log 3/1.5=6 \text{ dB.}$$



4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.3 DEVIATION FROM TEST STANDARD

No deviation

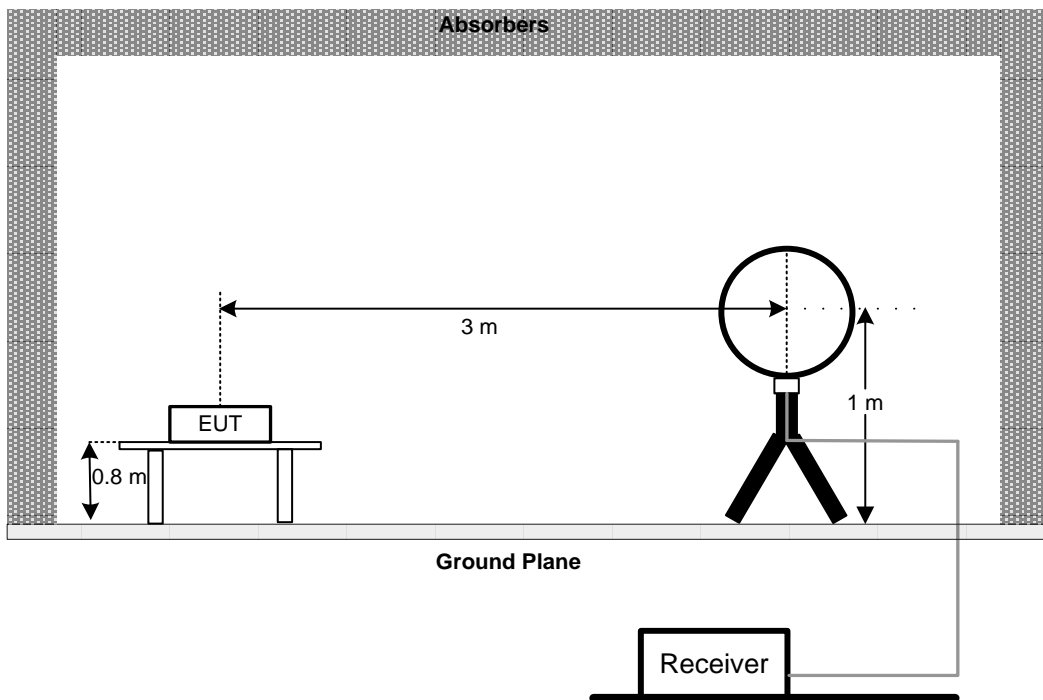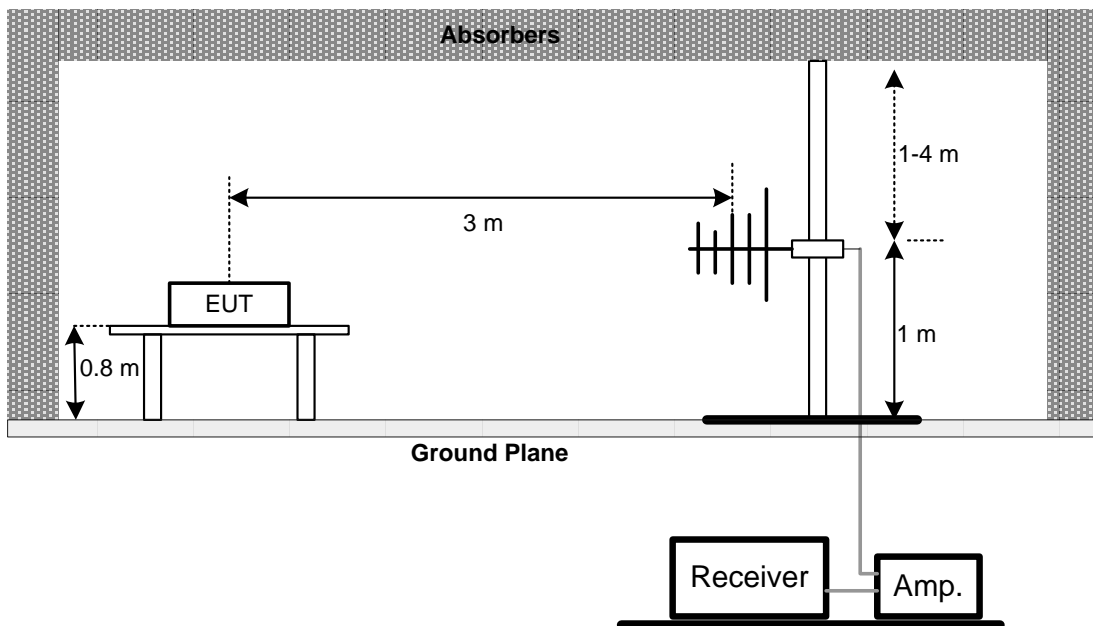4.4 TEST SETUP**9 kHz to 30 MHz****30 MHz to 1 GHz**

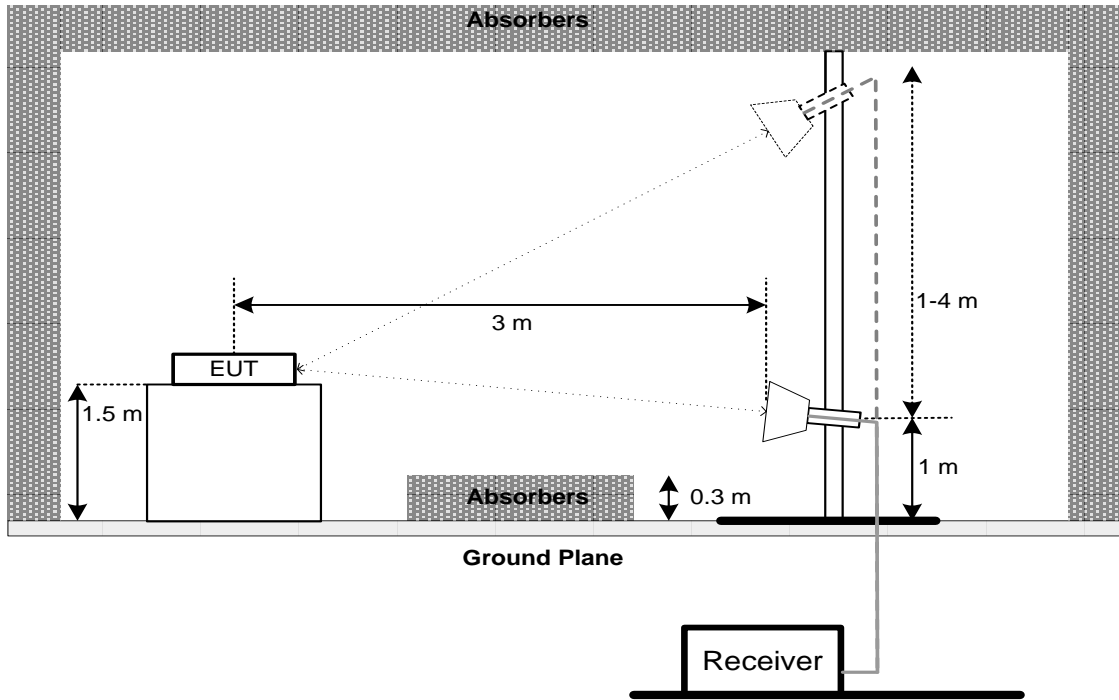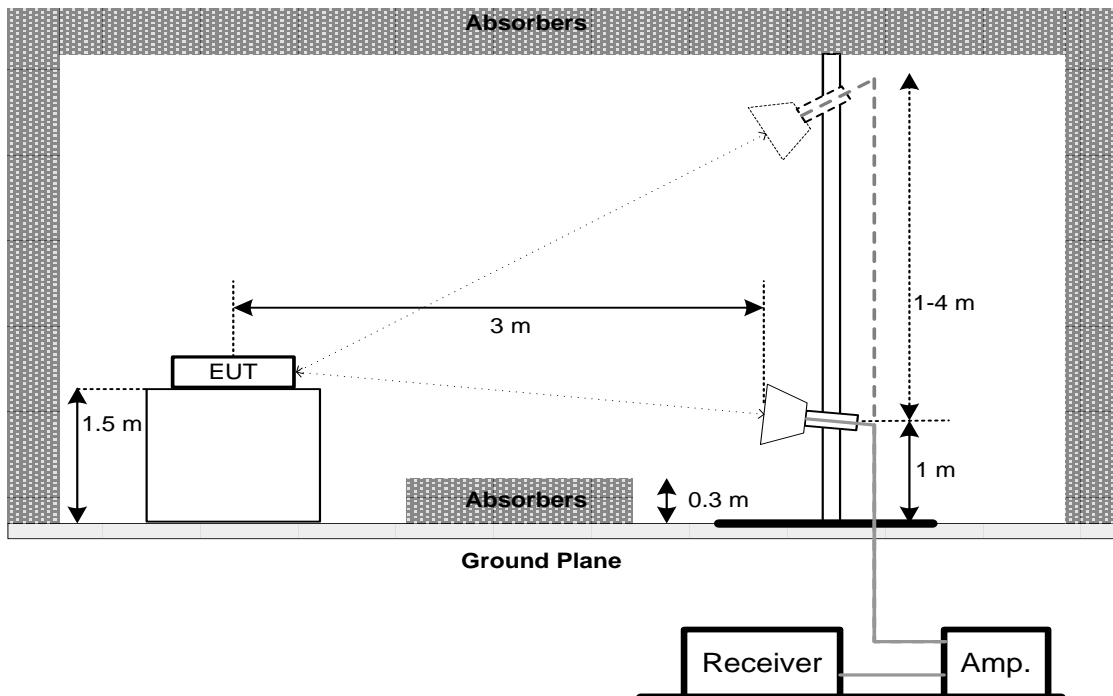**Above 1 GHz
Band edge****Harmonic (1 GHz to 18 GHz)**

Harmonic (Above 18 GHz)

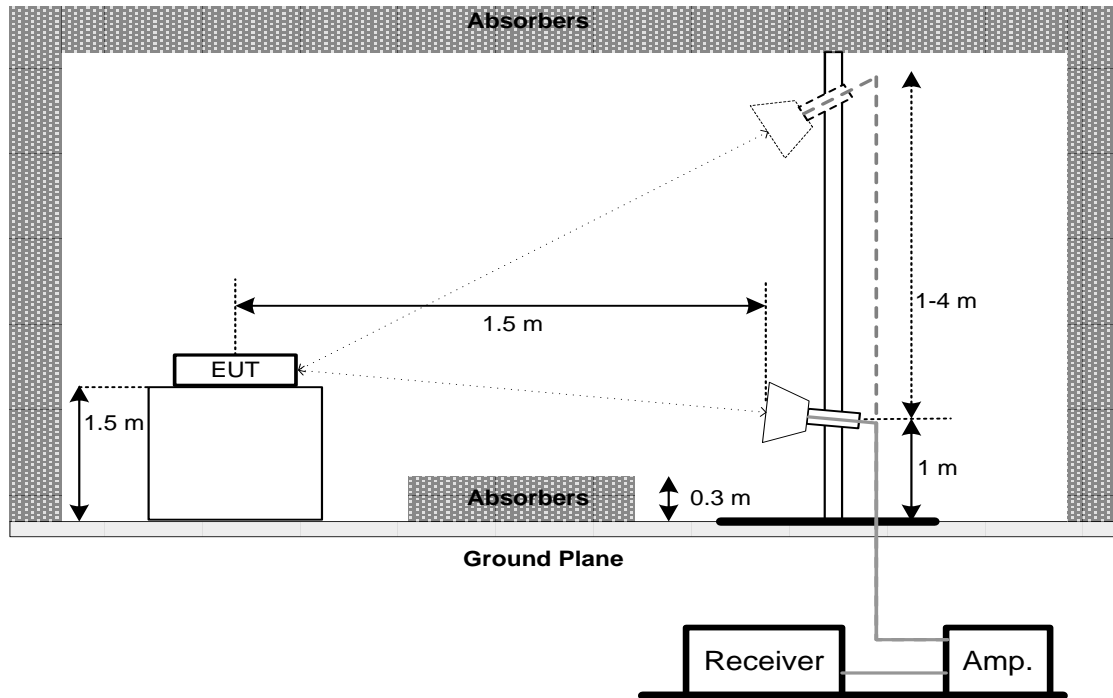

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 15, 2022
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May. 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Band Reject Filter	Micro-Tronics	BRC50705-01	10	Feb. 27, 2022
11	Band Reject Filter	Micro-Tronics	BRC50704-01	8	Feb. 27, 2022
12	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 27, 2022
13	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021


Remark: "N/A" denotes no model name, serial no. or calibration specified.

"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/4/28
Test Frequency	-	Phase	Line

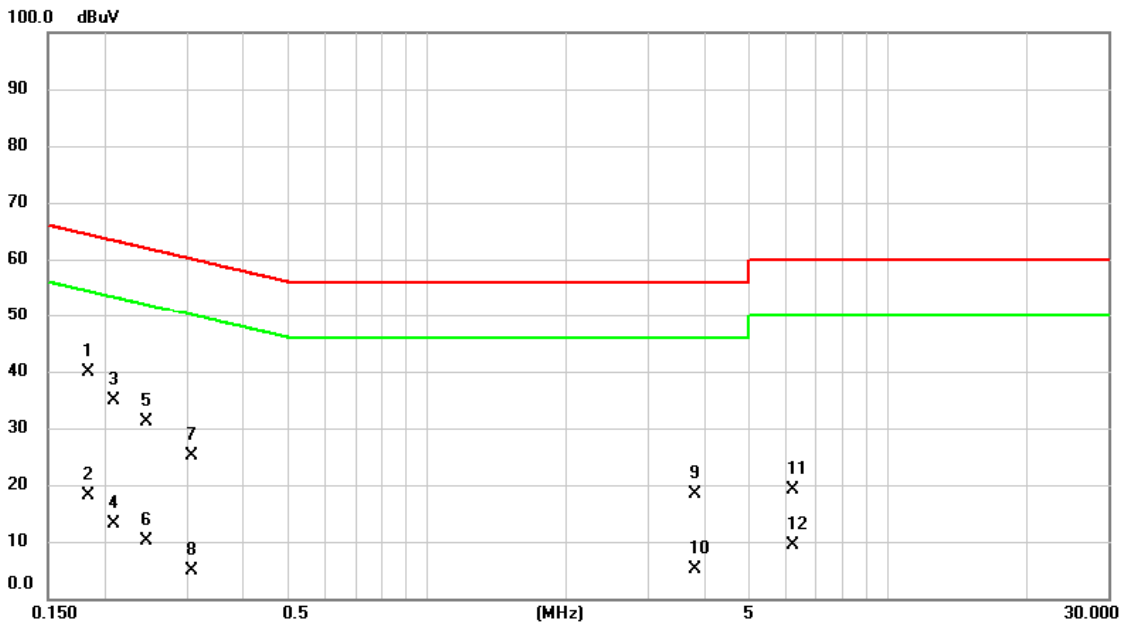


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1836	39.82	0.01	39.83	64.32	-24.49	QP	
2		0.1836	18.04	0.01	18.05	54.32	-36.27	AVG	
3		0.2085	34.94	0.01	34.95	63.26	-28.31	QP	
4		0.2085	13.22	0.01	13.23	53.26	-40.03	AVG	
5		0.2445	31.07	0.02	31.09	61.94	-30.85	QP	
6		0.2445	10.07	0.02	10.09	51.94	-41.85	AVG	
7		0.3074	25.16	0.03	25.19	60.04	-34.85	QP	
8		0.3074	4.83	0.03	4.86	50.04	-45.18	AVG	
9		3.7995	18.31	0.11	18.42	56.00	-37.58	QP	
10		3.7995	4.93	0.11	5.04	46.00	-40.96	AVG	
11		6.2452	18.86	0.16	19.02	60.00	-40.98	QP	
12		6.2452	9.11	0.16	9.27	50.00	-40.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/4/28
Test Frequency	-	Phase	Neutral

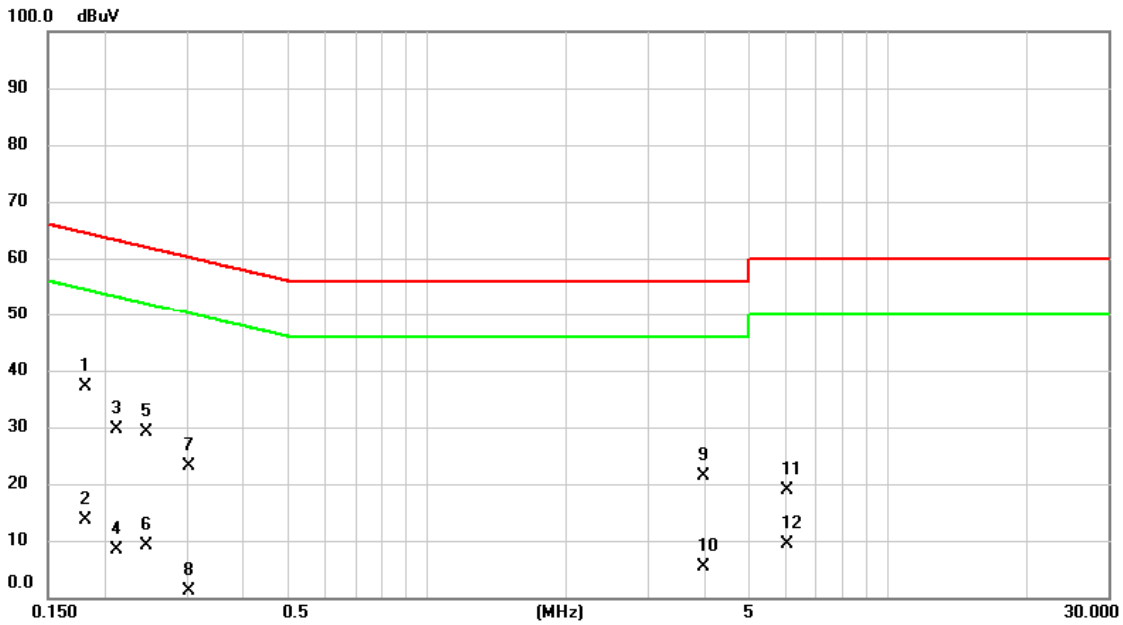


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1815	37.13	0.01	37.14	64.42	-27.28	QP	
2		0.1815	13.74	0.01	13.75	54.42	-40.67	AVG	
3		0.2108	29.71	0.01	29.72	63.17	-33.45	QP	
4		0.2108	8.31	0.01	8.32	53.17	-44.85	AVG	
5		0.2445	29.16	0.02	29.18	61.94	-32.76	QP	
6		0.2445	9.16	0.02	9.18	51.94	-42.76	AVG	
7		0.3030	23.16	0.03	23.19	60.16	-36.97	QP	
8		0.3030	1.04	0.03	1.07	50.16	-49.09	AVG	
9		3.9660	21.35	0.11	21.46	56.00	-34.54	QP	
10		3.9660	5.21	0.11	5.32	46.00	-40.68	AVG	
11		6.0450	18.64	0.15	18.79	60.00	-41.21	QP	
12		6.0450	9.19	0.15	9.34	50.00	-40.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/4/28
Test Frequency	-	Phase	Line

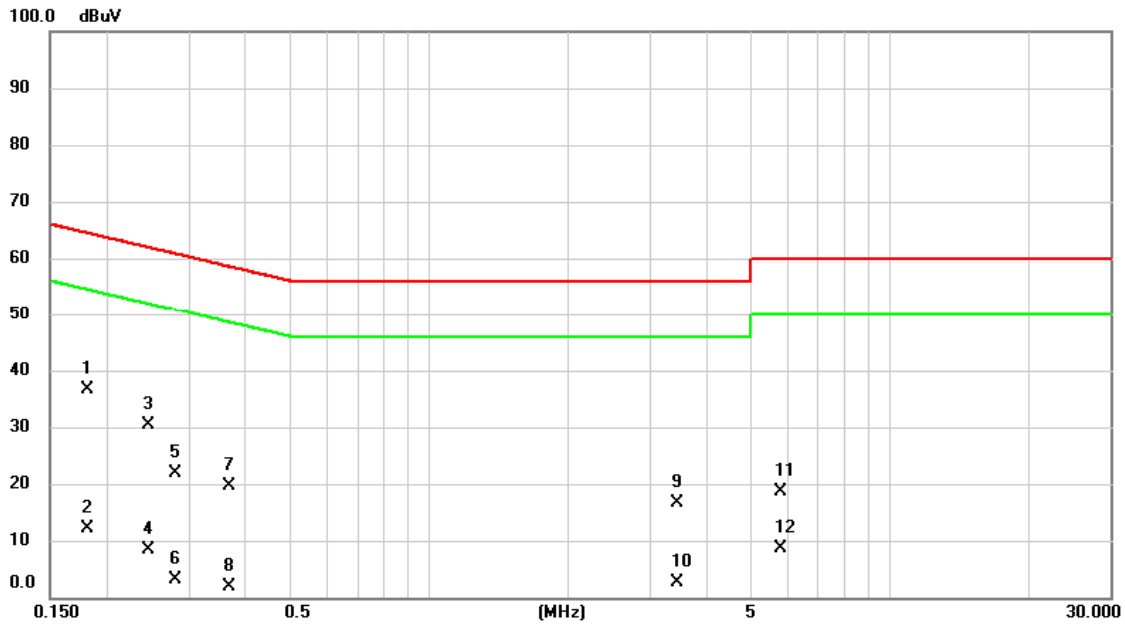


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1815	36.51	0.01	36.52	64.42	-27.90	QP	
2		0.1815	12.20	0.01	12.21	54.42	-42.21	AVG	
3		0.2445	30.27	0.02	30.29	61.94	-31.65	QP	
4		0.2445	8.42	0.02	8.44	51.94	-43.50	AVG	
5		0.2805	21.84	0.03	21.87	60.80	-38.93	QP	
6		0.2805	3.05	0.03	3.08	50.80	-47.72	AVG	
7		0.3682	19.68	0.03	19.71	58.54	-38.83	QP	
8		0.3682	1.81	0.03	1.84	48.54	-46.70	AVG	
9		3.4440	16.65	0.10	16.75	56.00	-39.25	QP	
10		3.4440	2.51	0.10	2.61	46.00	-43.39	AVG	
11		5.7862	18.56	0.15	18.71	60.00	-41.29	QP	
12		5.7862	8.51	0.15	8.66	50.00	-41.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/4/28
Test Frequency	-	Phase	Neutral

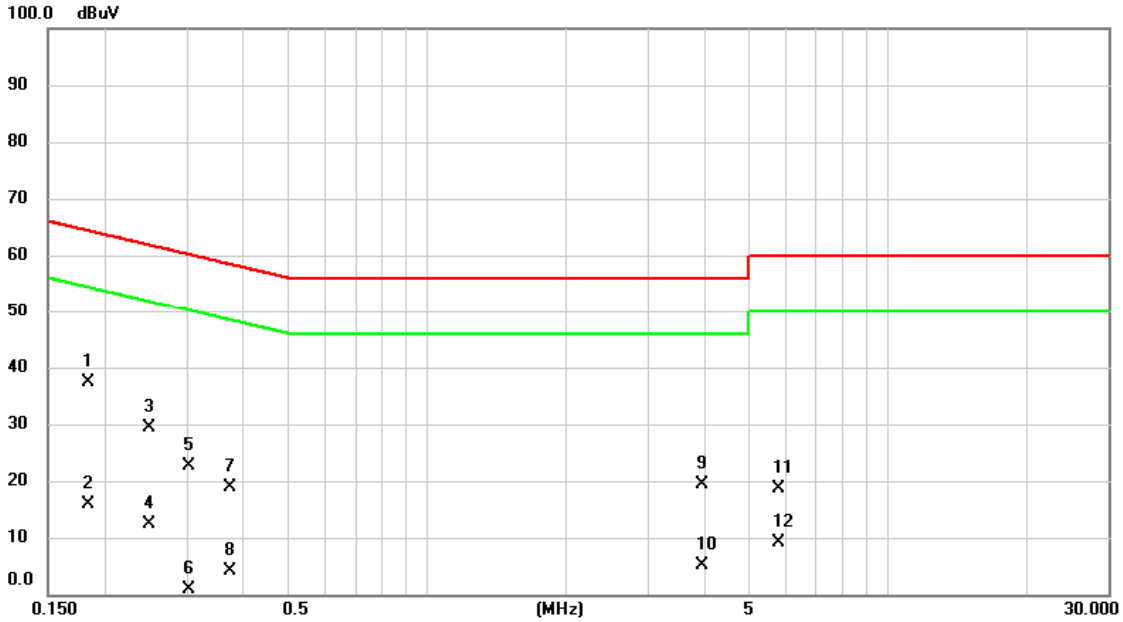


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1836	37.43	0.01	37.44	64.32	-26.88	QP	
2		0.1836	15.83	0.01	15.84	54.32	-38.48	AVG	
3		0.2490	29.28	0.02	29.30	61.79	-32.49	QP	
4		0.2490	12.27	0.02	12.29	51.79	-39.50	AVG	
5		0.3030	22.64	0.03	22.67	60.16	-37.49	QP	
6		0.3030	0.78	0.03	0.81	50.16	-49.35	AVG	
7		0.3750	18.94	0.03	18.97	58.39	-39.42	QP	
8		0.3750	4.11	0.03	4.14	48.39	-44.25	AVG	
9		3.9322	19.26	0.11	19.37	56.00	-36.63	QP	
10		3.9322	5.10	0.11	5.21	46.00	-40.79	AVG	
11		5.8132	18.36	0.15	18.51	60.00	-41.49	QP	
12		5.8132	8.89	0.15	9.04	50.00	-40.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/4/28
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

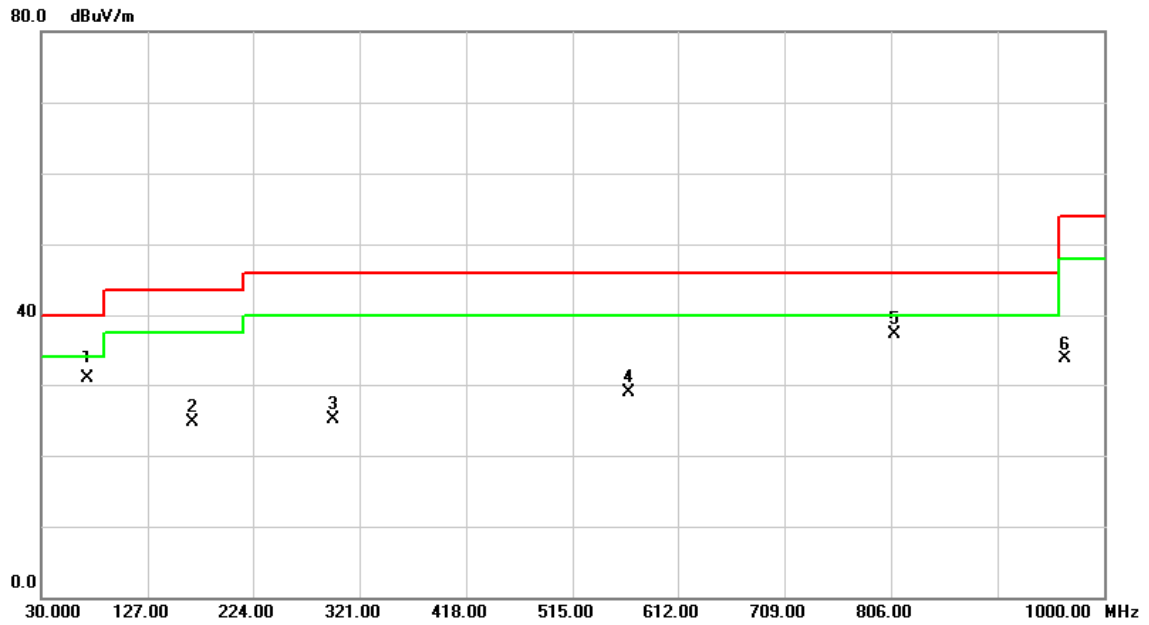


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		71.710	47.55	-16.60	30.95	40.00	-9.05	QP	
2		169.001	37.24	-12.56	24.68	43.50	-18.82	peak	
3		297.106	35.99	-10.98	25.01	46.00	-20.99	peak	
4		565.699	34.38	-5.47	28.91	46.00	-17.09	peak	
5	*	809.848	37.91	-0.67	37.24	46.00	-8.76	peak	
6		964.239	31.98	1.82	33.80	54.00	-20.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/4/28
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

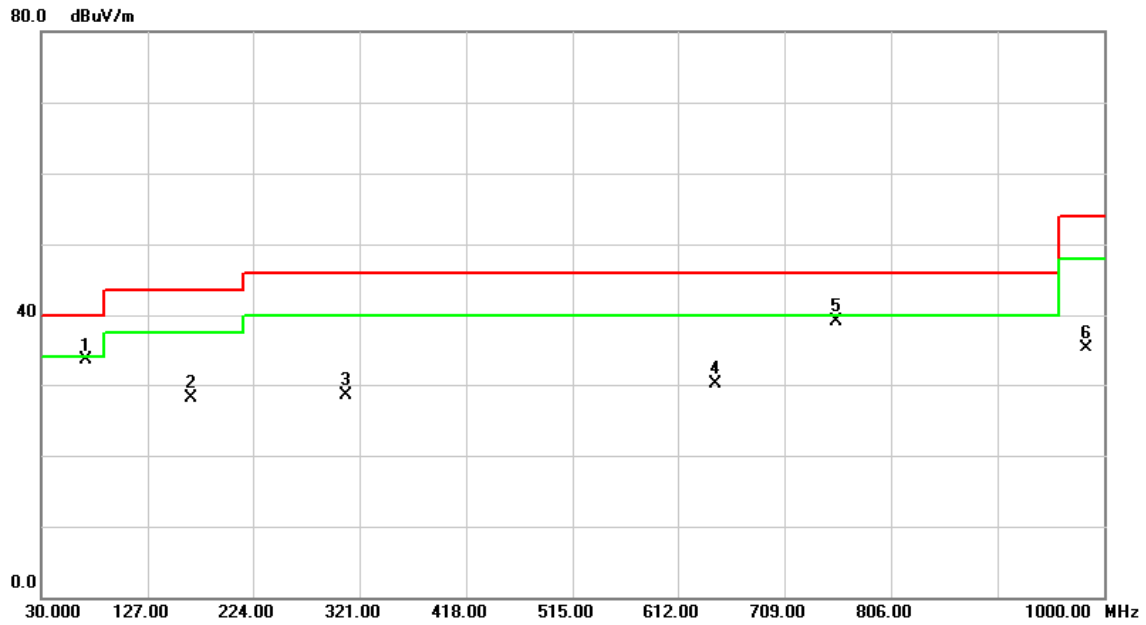


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	71.257	50.05	-16.49	33.56	40.00	-6.44	peak	
2		167.805	40.64	-12.53	28.11	43.50	-15.39	peak	
3		309.037	39.31	-10.72	28.59	46.00	-17.41	peak	
4		646.693	33.84	-3.79	30.05	46.00	-15.95	peak	
5		755.786	40.95	-1.79	39.16	46.00	-6.84	peak	
6		983.284	33.54	1.83	35.37	54.00	-18.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

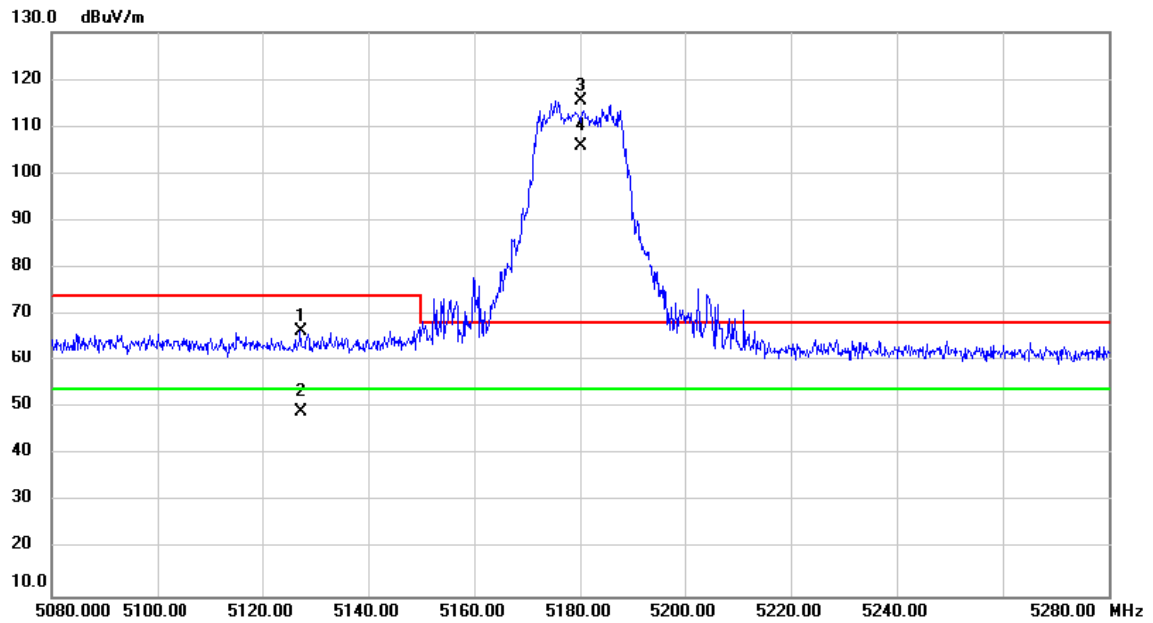


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5127.300	51.47	15.21	66.68	74.00	-7.32	peak	
2		5127.300	33.94	15.21	49.15	54.00	-4.85	AVG	
3	X	5180.000	100.14	15.33	115.47	68.20	47.27	peak	No Limit
4	*	5180.000	90.54	15.33	105.87	54.00	51.87	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

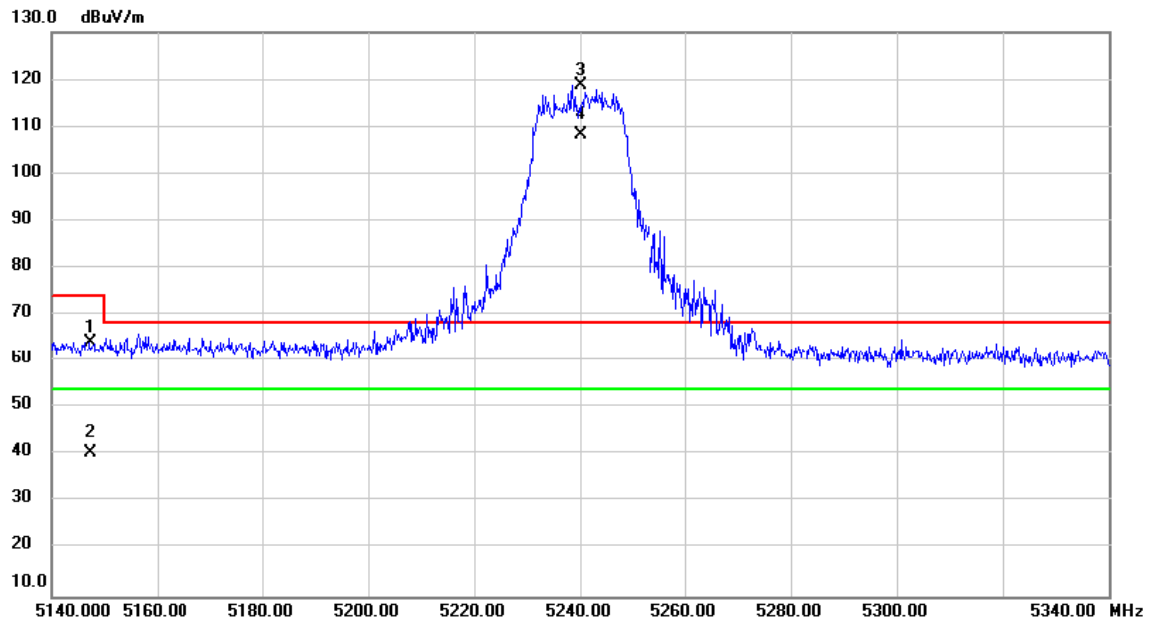


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.233	49.03	15.26	64.29	74.00	-9.71	peak	
2		5147.233	25.05	15.26	40.31	54.00	-13.69	AVG	
3	X	5240.000	103.42	15.47	118.89	68.20	50.69	peak	No Limit
4	*	5240.000	92.84	15.47	108.31	54.00	54.31	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

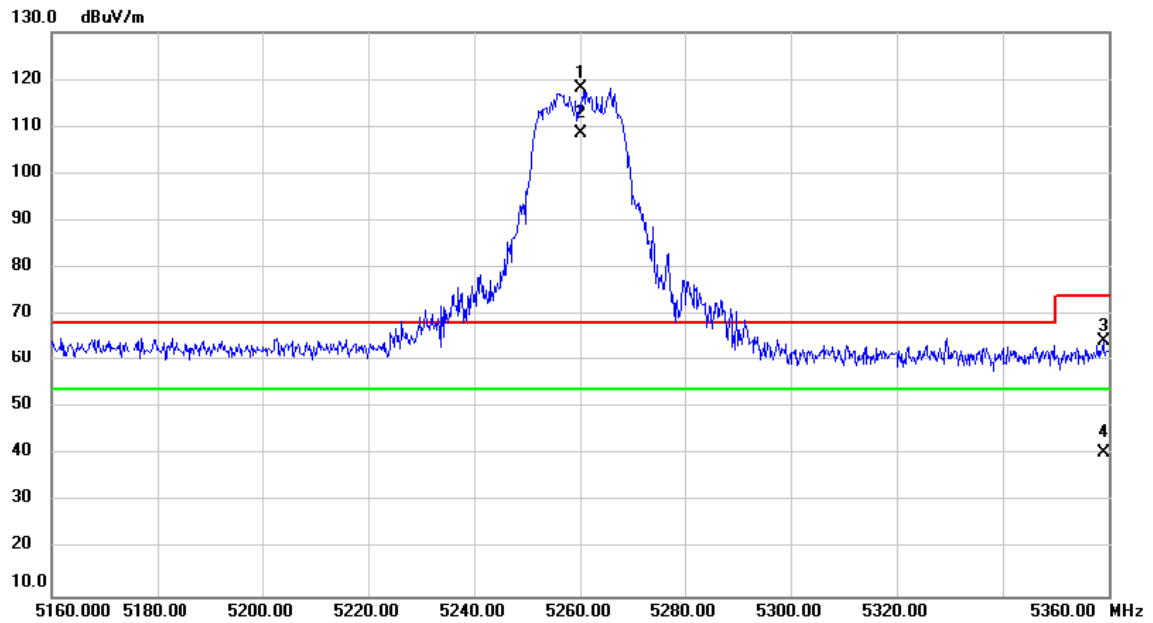


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	102.55	15.52	118.07	68.20	49.87	peak	No Limit
2	*	5260.000	93.08	15.52	108.60	54.00	54.60	AVG	No Limit
3		5359.020	48.69	15.74	64.43	74.00	-9.57	peak	
4		5359.020	24.78	15.74	40.52	54.00	-13.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

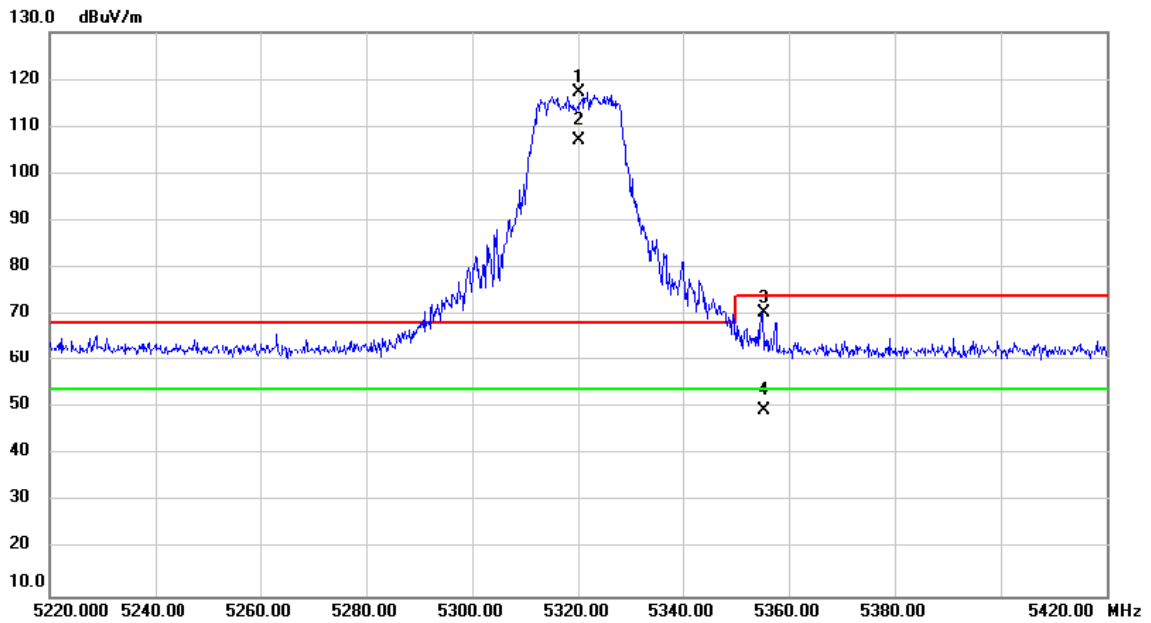


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	101.71	15.65	117.36	68.20	49.16	peak	No Limit
2	*	5320.000	91.49	15.65	107.14	54.00	53.14	AVG	No Limit
3		5355.267	54.72	15.73	70.45	74.00	-3.55	peak	
4		5355.267	33.68	15.73	49.41	54.00	-4.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

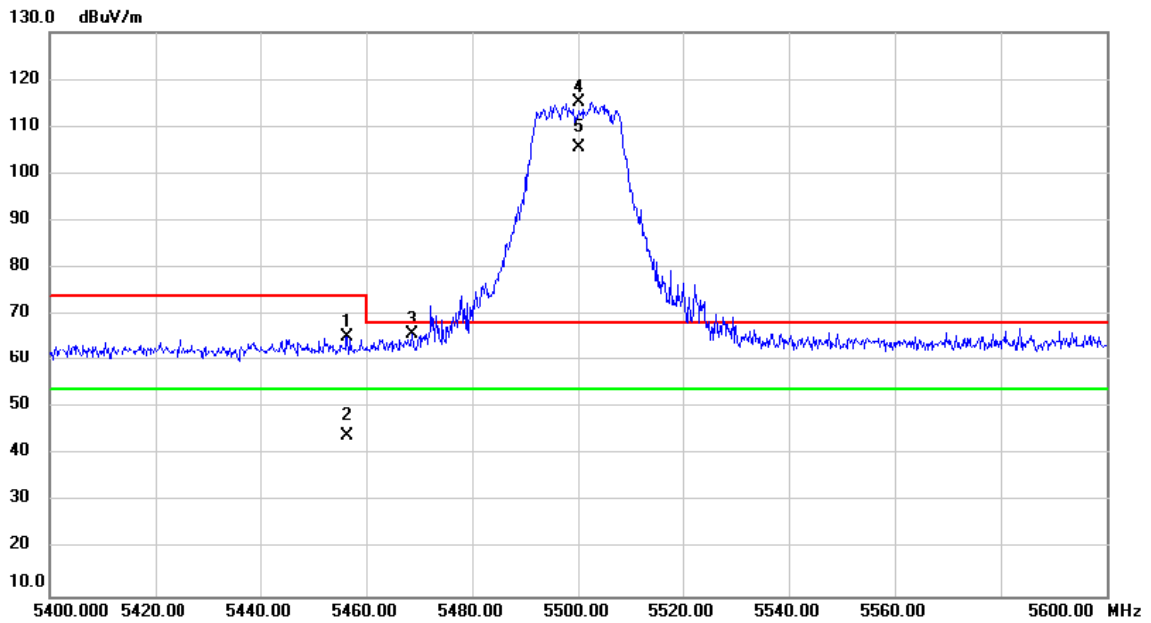


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.393	49.53	15.97	65.50	74.00	-8.50	peak	
2		5456.393	28.00	15.97	43.97	54.00	-10.03	AVG	
3		5468.667	49.82	15.99	65.81	68.20	-2.39	peak	
4	X	5500.000	99.13	16.06	115.19	68.20	46.99	peak	No Limit
5	*	5500.000	89.60	16.06	105.66	54.00	51.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

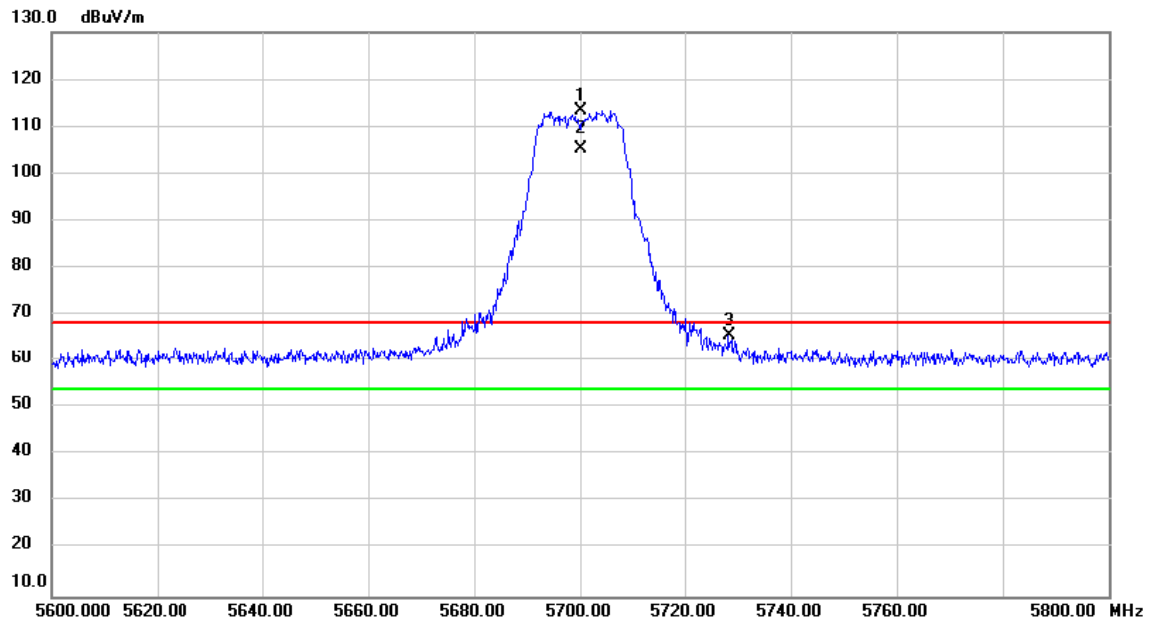


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	97.01	16.47	113.48	68.20	45.28	peak	No Limit
2	*	5700.000	88.83	16.47	105.30	54.00	51.30	AVG	No Limit
3		5728.347	49.10	16.51	65.61	68.20	-2.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

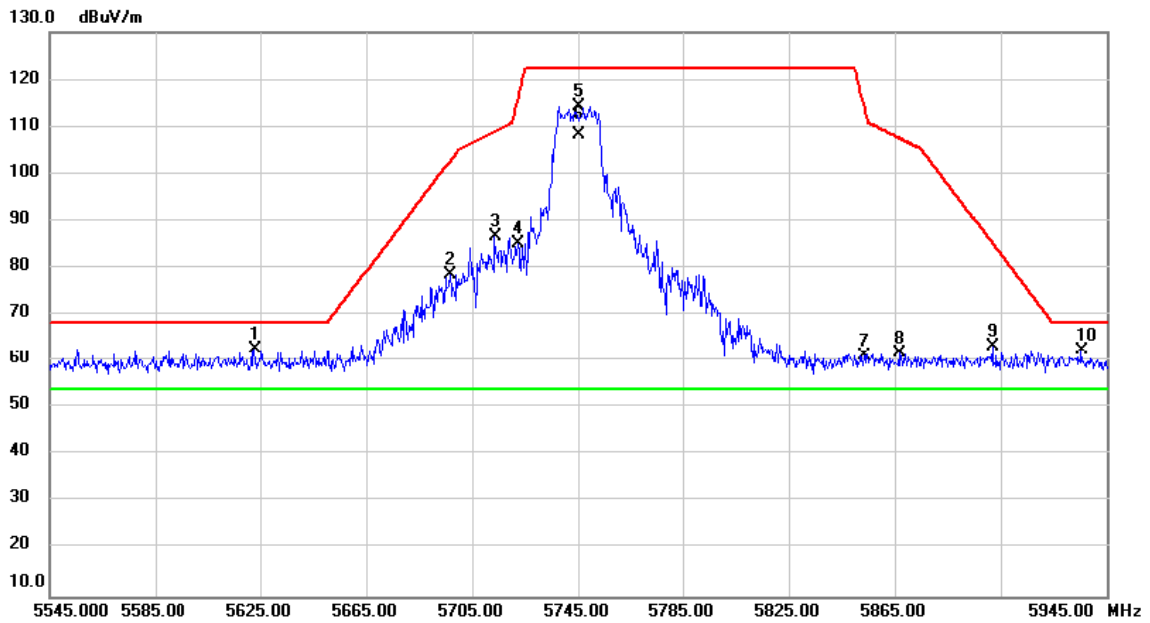


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5622.947	46.43	16.31	62.74	68.20	-5.46	peak	
2		5696.707	62.06	16.46	78.52	102.76	-24.24	peak	
3		5713.573	70.09	16.49	86.58	109.00	-22.42	peak	
4		5722.467	68.66	16.51	85.17	116.42	-31.25	peak	
5		5745.000	97.76	16.55	114.31	122.20	-7.89	peak	No Limit
6	*	5745.000	91.78	16.55	108.33	54.00	54.33	AVG	No Limit
7		5853.720	44.49	16.77	61.26	113.72	-52.46	peak	
8		5866.827	45.03	16.79	61.82	107.49	-45.67	peak	
9		5901.853	46.47	16.85	63.32	85.33	-22.01	peak	
10		5935.507	45.52	16.93	62.45	68.20	-5.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/24
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

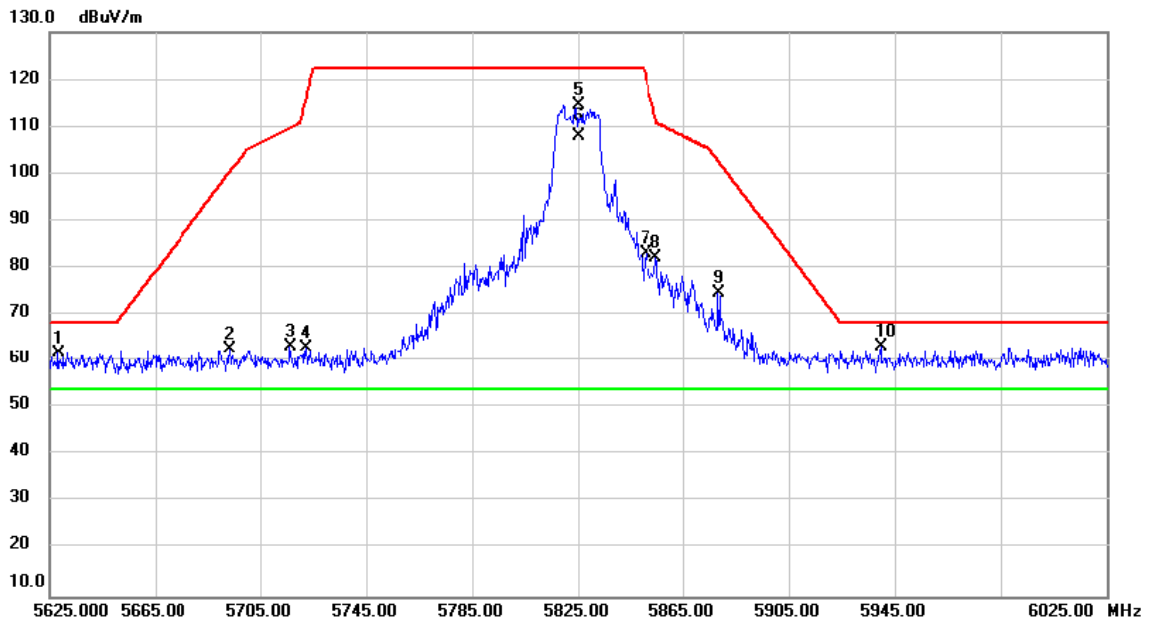


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5628.493	45.50	16.32	61.82	68.20	-6.38	peak	
2		5693.587	46.22	16.45	62.67	100.45	-37.78	peak	
3		5716.333	46.86	16.49	63.35	109.77	-46.42	peak	
4		5722.387	46.44	16.51	62.95	116.24	-53.29	peak	
5		5825.000	97.93	16.72	114.65	122.20	-7.55	peak	No Limit
6	*	5825.000	91.23	16.72	107.95	54.00	53.95	AVG	No Limit
7		5851.093	66.24	16.76	83.00	119.71	-36.71	peak	
8		5854.720	65.39	16.77	82.16	111.44	-29.28	peak	
9		5878.467	57.76	16.82	74.58	102.63	-28.05	peak	
10		5939.813	46.35	16.93	63.28	68.20	-4.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

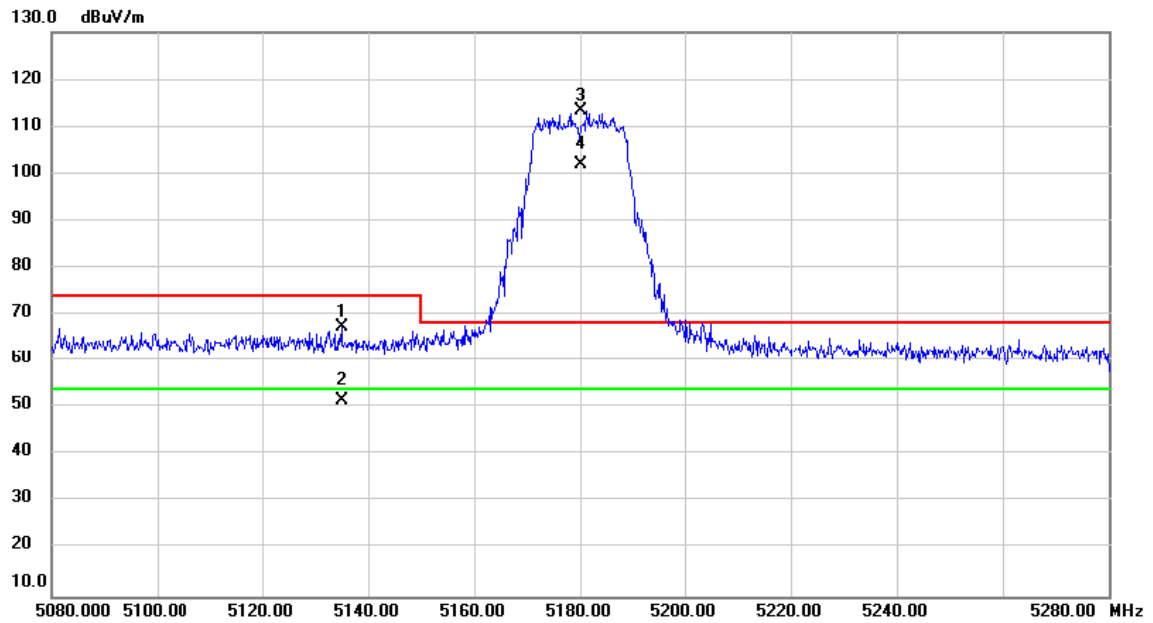


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5135.040	52.34	15.22	67.56	74.00	-6.44	peak	
2		5135.040	36.32	15.22	51.54	54.00	-2.46	AVG	
3	X	5180.000	97.98	15.33	113.31	68.20	45.11	peak	No Limit
4	*	5180.000	86.66	15.33	101.99	54.00	47.99	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

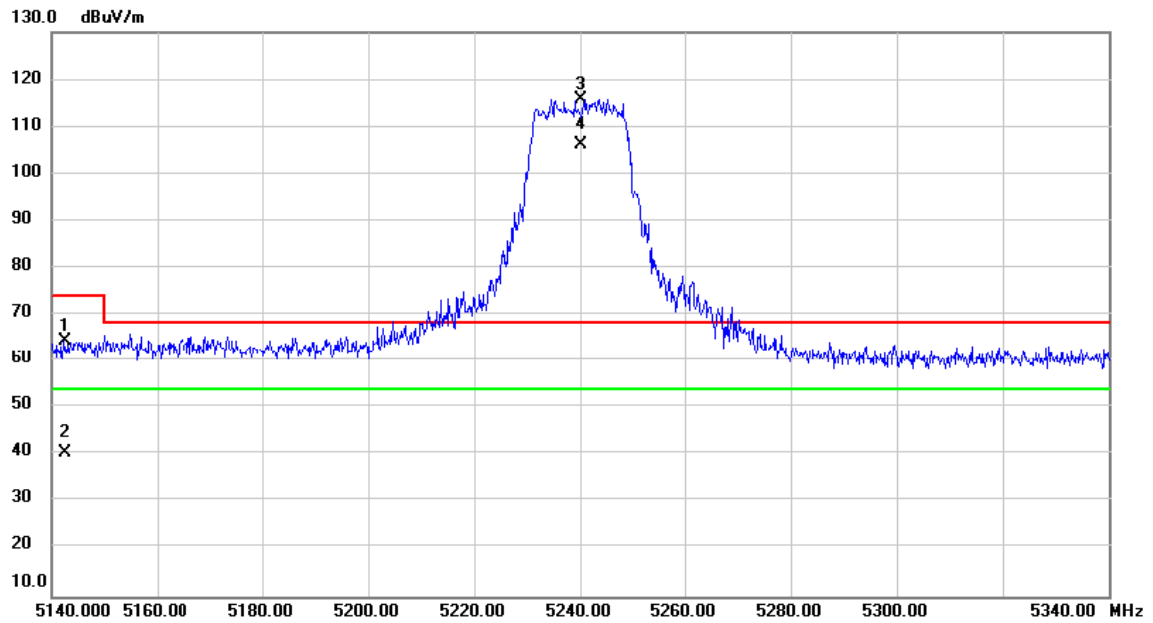


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5142.413	49.09	15.25	64.34	74.00	-9.66	peak	
2		5142.413	25.17	15.25	40.42	54.00	-13.58	AVG	
3	X	5240.000	100.39	15.47	115.86	68.20	47.66	peak	No Limit
4	*	5240.000	90.81	15.47	106.28	54.00	52.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

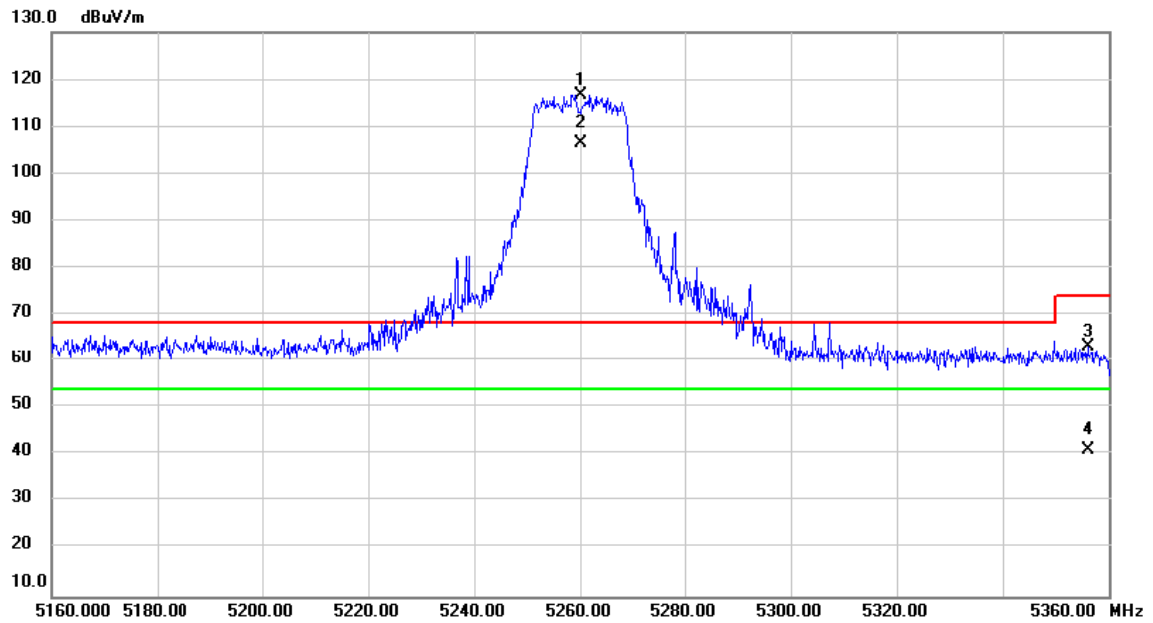


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	101.24	15.52	116.76	68.20	48.56	peak	No Limit
2	*	5260.000	91.05	15.52	106.57	54.00	52.57	AVG	No Limit
3		5356.053	47.60	15.73	63.33	74.00	-10.67	peak	
4		5356.053	25.41	15.73	41.14	54.00	-12.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

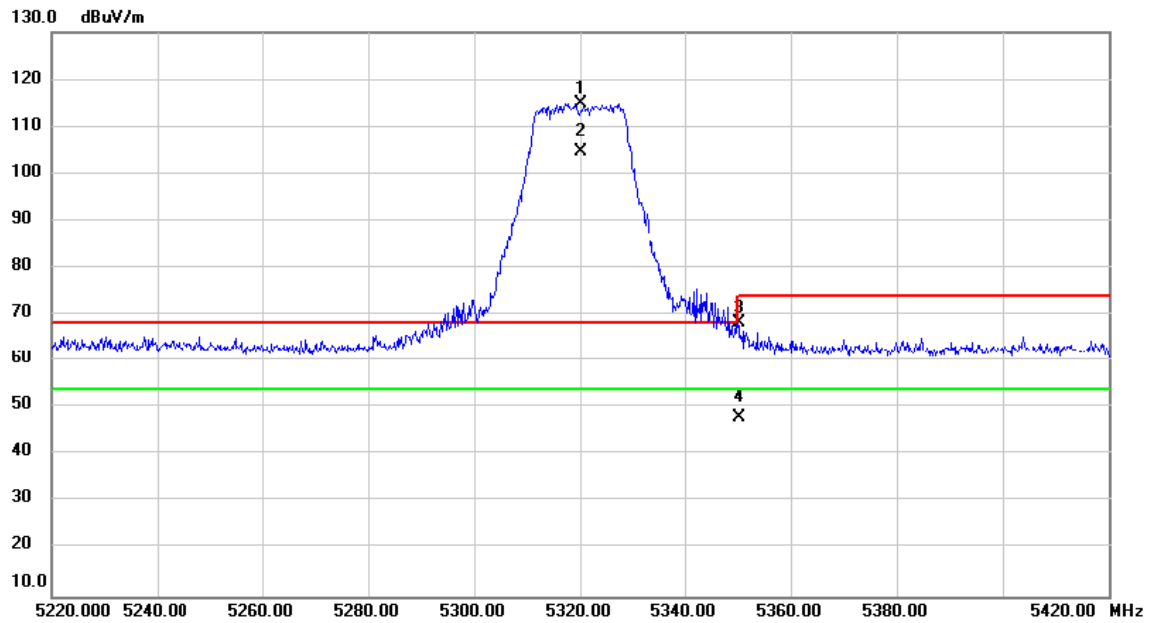


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	99.30	15.65	114.95	68.20	46.75	peak	No Limit
2	*	5320.000	89.15	15.65	104.80	54.00	50.80	AVG	No Limit
3		5350.187	52.77	15.72	68.49	74.00	-5.51	peak	
4		5350.187	32.15	15.72	47.87	54.00	-6.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

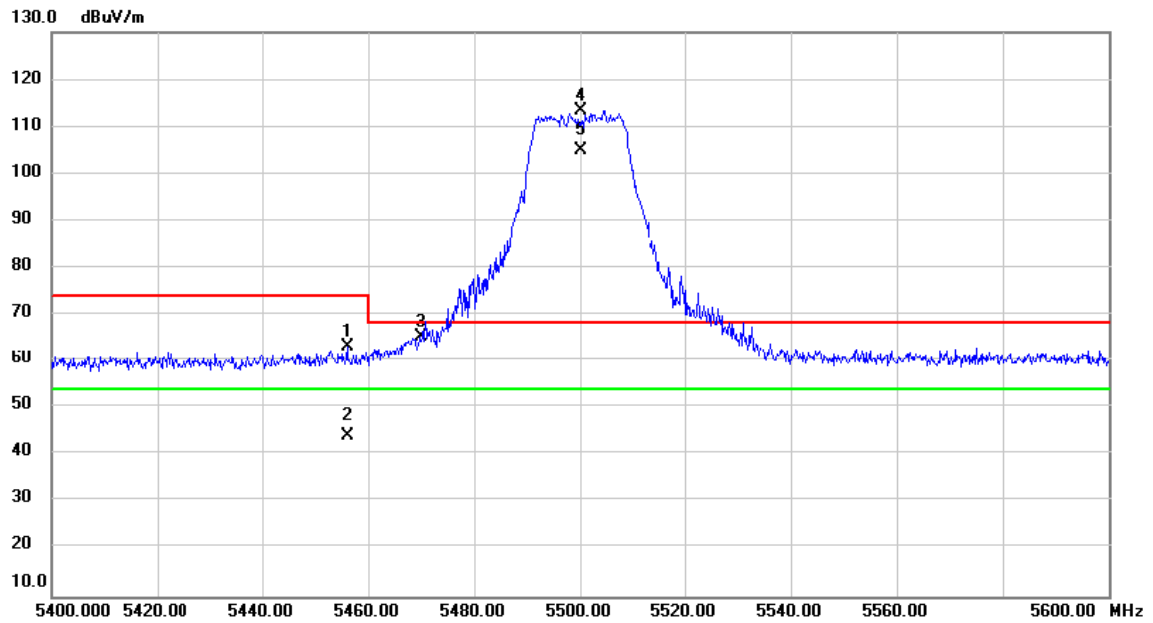


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.073	47.24	15.97	63.21	74.00	-10.79	peak	
2		5456.073	27.98	15.97	43.95	54.00	-10.05	AVG	
3		5469.933	49.26	16.00	65.26	68.20	-2.94	peak	
4	X	5500.000	97.37	16.06	113.43	68.20	45.23	peak	No Limit
5	*	5500.000	89.01	16.06	105.07	54.00	51.07	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

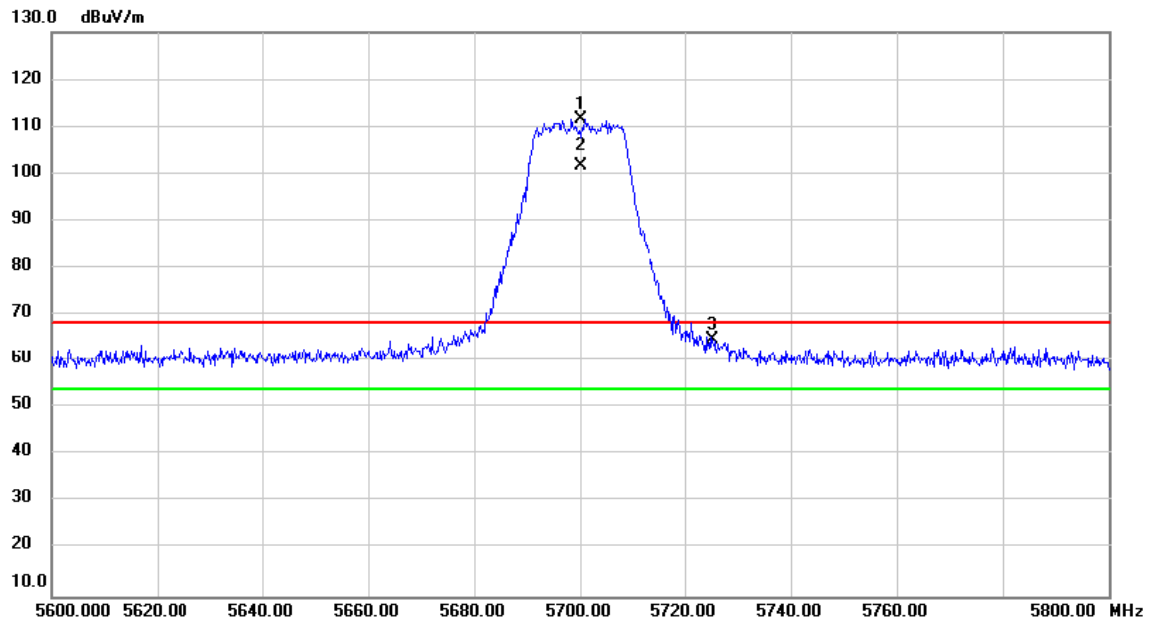


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	95.11	16.47	111.58	68.20	43.38	peak	No Limit
2	*	5700.000	85.22	16.47	101.69	54.00	47.69	AVG	No Limit
3		5725.300	48.20	16.51	64.71	68.20	-3.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

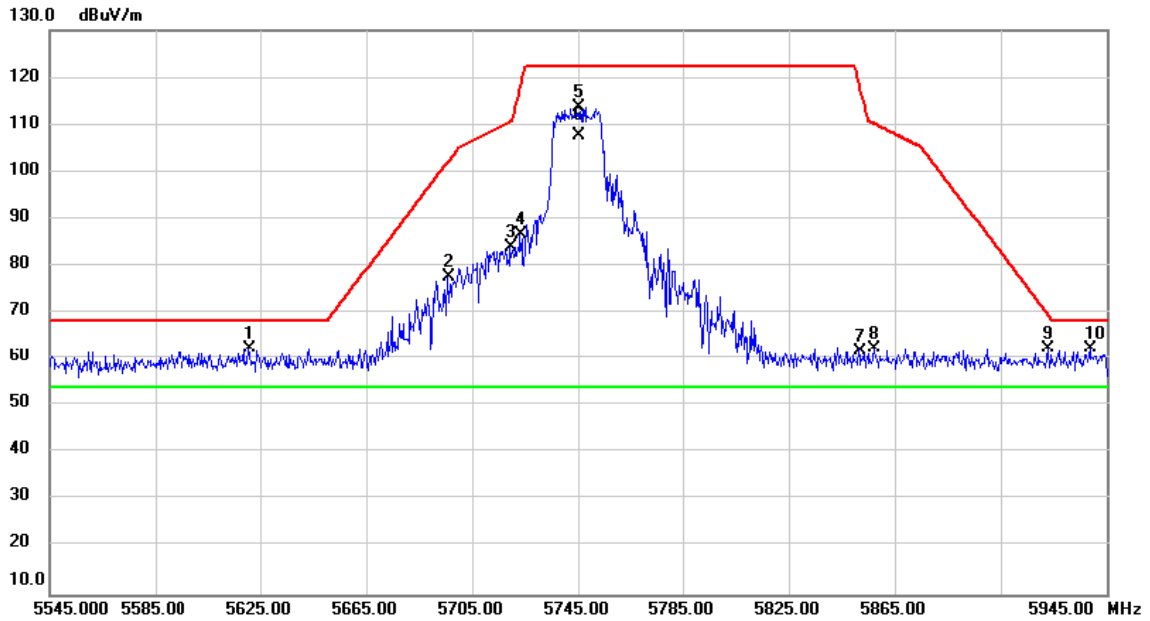


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5620.893	45.97	16.30	62.27	68.20	-5.93	peak	
2		5695.960	61.20	16.46	77.66	102.21	-24.55	peak	
3		5719.667	67.49	16.50	83.99	110.71	-26.72	peak	
4		5723.267	70.05	16.50	86.55	118.25	-31.70	peak	
5		5745.000	97.07	16.55	113.62	122.20	-8.58	peak	No Limit
6	*	5745.000	90.98	16.55	107.53	54.00	53.53	AVG	No Limit
7		5851.733	45.14	16.76	61.90	118.25	-56.35	peak	
8		5857.080	45.42	16.78	62.20	110.22	-48.02	peak	
9		5922.827	45.37	16.90	62.27	69.81	-7.54	peak	
10		5938.693	45.50	16.93	62.43	68.20	-5.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT20)	Test Date	2021/4/24
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

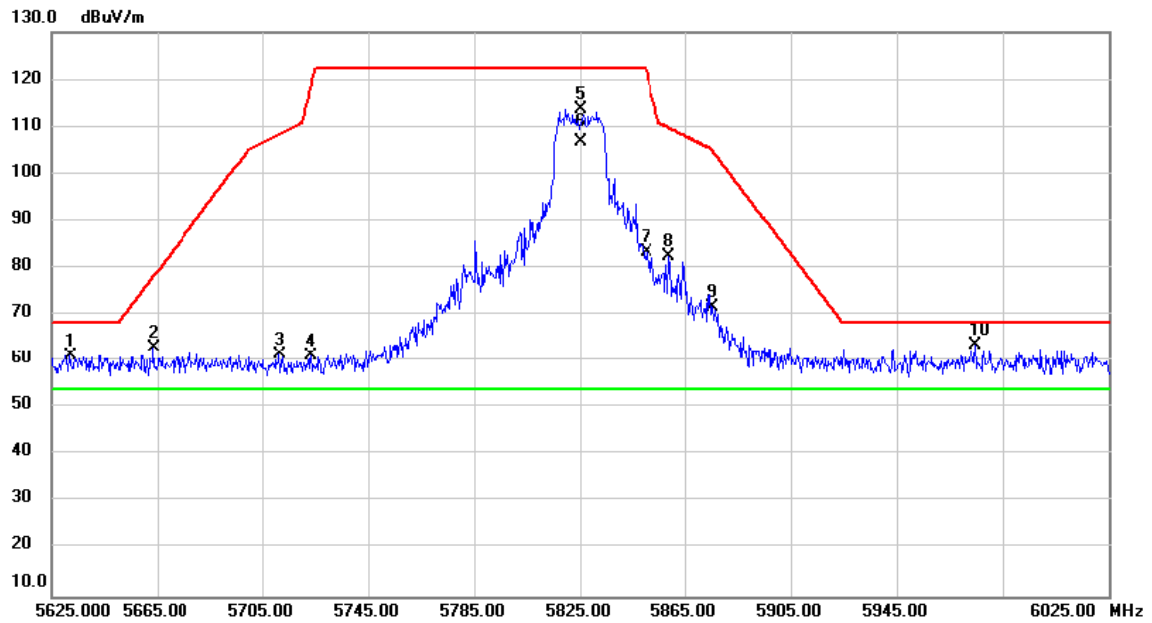


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5632.080	44.76	16.33	61.09	68.20	-7.11	peak	
2		5663.573	46.63	16.40	63.03	78.24	-15.21	peak	
3		5711.587	44.83	16.48	61.31	108.44	-47.13	peak	
4		5723.427	44.58	16.50	61.08	118.61	-57.53	peak	
5		5825.000	96.99	16.72	113.71	122.20	-8.49	peak	No Limit
6	*	5825.000	90.02	16.72	106.74	54.00	52.74	AVG	No Limit
7		5850.320	66.66	16.76	83.42	121.47	-38.05	peak	
8		5858.827	65.59	16.78	82.37	109.73	-27.36	peak	
9		5875.547	54.88	16.82	71.70	104.80	-33.10	peak	
10		5974.693	46.58	17.00	63.58	68.20	-4.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

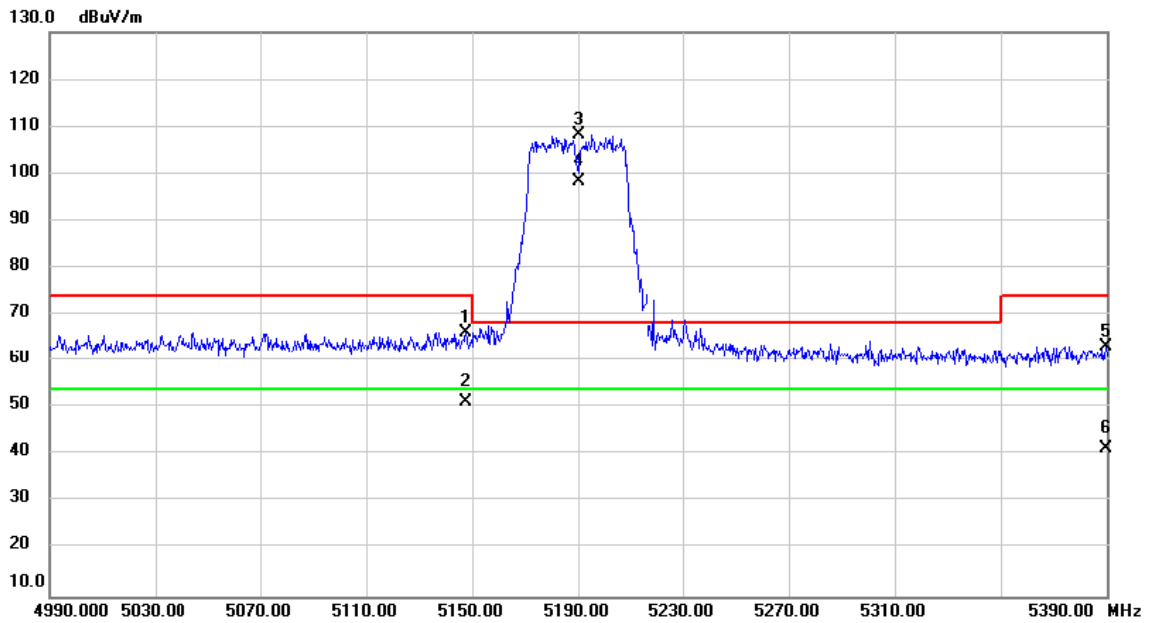


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.693	51.05	15.26	66.31	74.00	-7.69	peak	
2		5147.693	36.13	15.26	51.39	54.00	-2.61	AVG	
3	X	5190.000	92.90	15.35	108.25	68.20	40.05	peak	No Limit
4	*	5190.000	83.07	15.35	98.42	54.00	44.42	AVG	No Limit
5		5389.880	47.50	15.81	63.31	74.00	-10.69	peak	
6		5389.880	25.56	15.81	41.37	54.00	-12.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

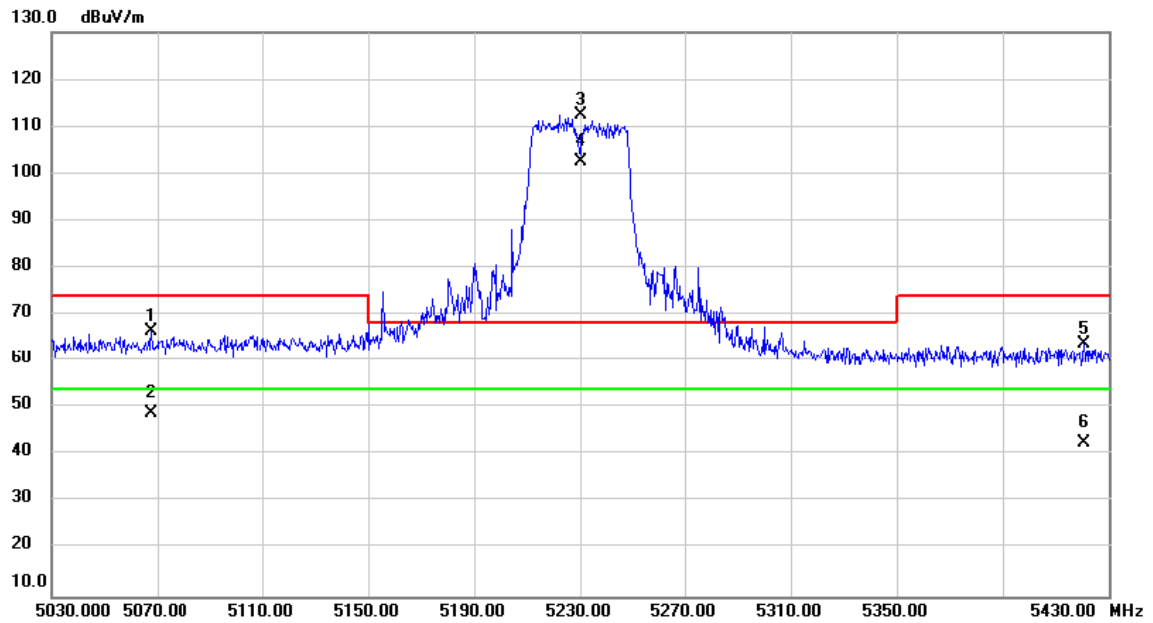


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5067.787	51.50	15.08	66.58	74.00	-7.42	peak	
2		5067.787	33.78	15.08	48.86	54.00	-5.14	AVG	
3	X	5230.000	96.93	15.44	112.37	68.20	44.17	peak	No Limit
4	*	5230.000	87.24	15.44	102.68	54.00	48.68	AVG	No Limit
5		5420.880	48.05	15.89	63.94	74.00	-10.06	peak	
6		5420.880	26.66	15.89	42.55	54.00	-11.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

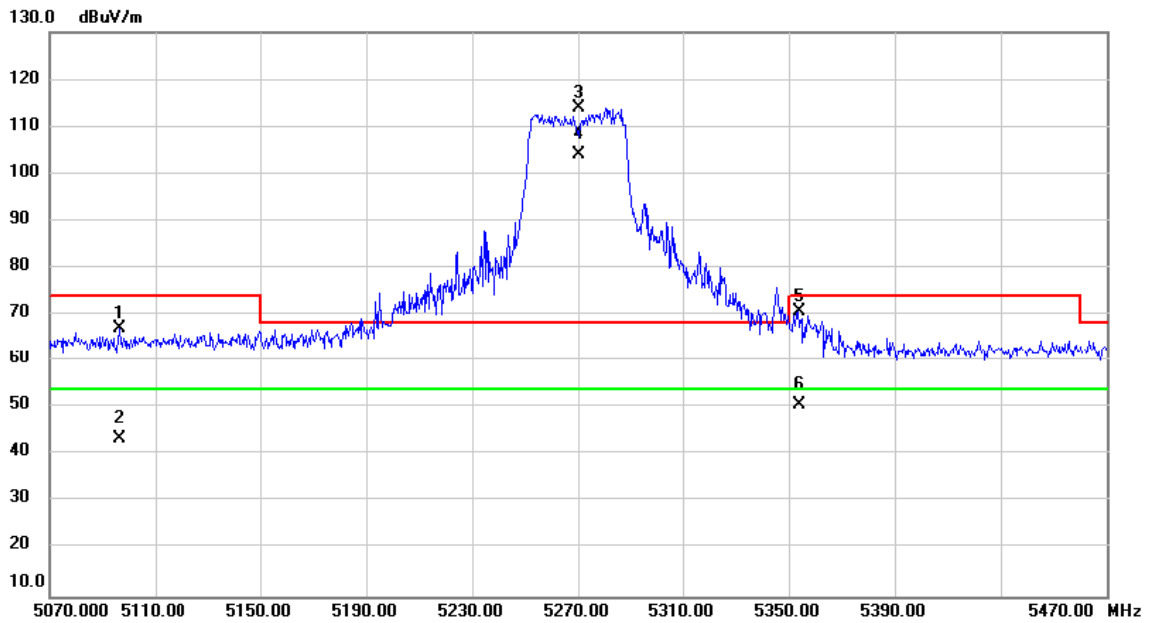


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5096.613	51.87	15.14	67.01	74.00	-6.99	peak	
2		5096.613	28.25	15.14	43.39	54.00	-10.61	AVG	
3	X	5270.000	98.41	15.55	113.96	68.20	45.76	peak	No Limit
4	*	5270.000	88.36	15.55	103.91	54.00	49.91	AVG	No Limit
5		5353.947	54.99	15.73	70.72	74.00	-3.28	peak	
6		5353.947	35.06	15.73	50.79	54.00	-3.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

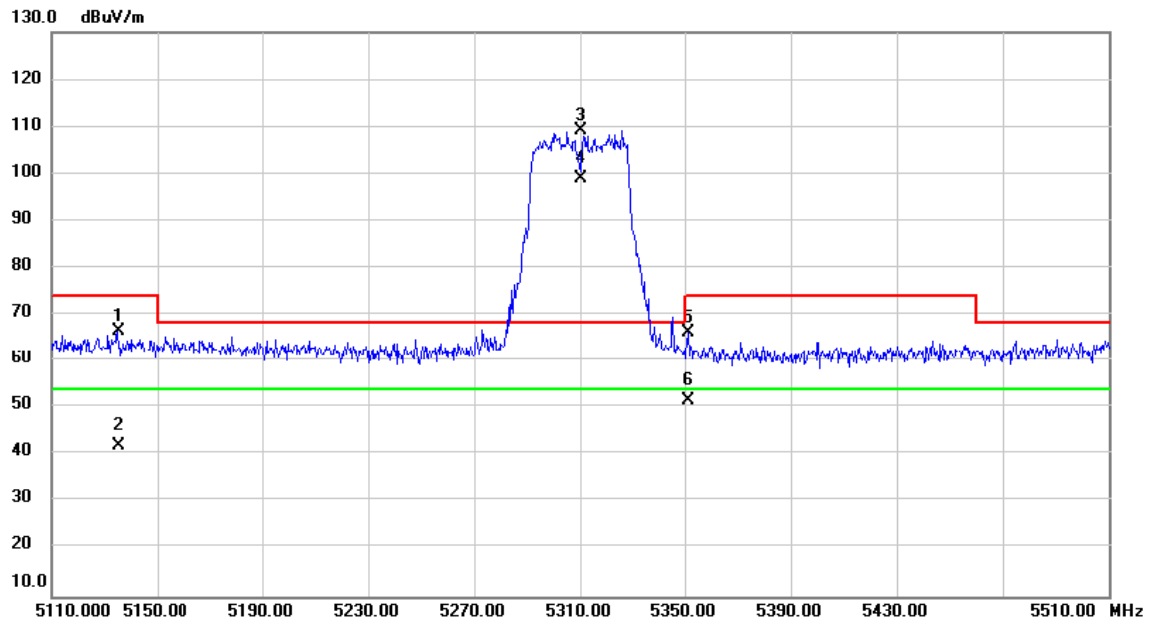


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5135.147	51.35	15.22	66.57	74.00	-7.43	peak	
2		5135.147	26.73	15.22	41.95	54.00	-12.05	AVG	
3	X	5310.000	93.64	15.63	109.27	68.20	41.07	peak	No Limit
4	*	5310.000	83.30	15.63	98.93	54.00	44.93	AVG	No Limit
5		5351.507	50.52	15.72	66.24	74.00	-7.76	peak	
6		5351.507	35.72	15.72	51.44	54.00	-2.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

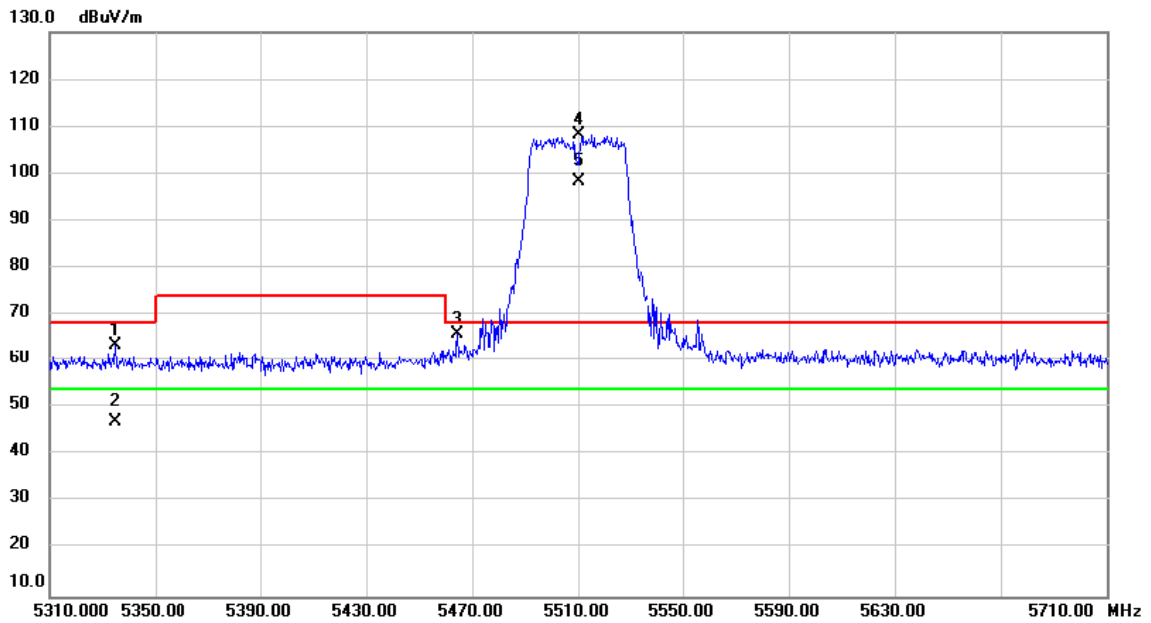


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5335.000	47.94	15.68	63.62	68.20	-4.58	peak	
2		5335.000	31.41	15.68	47.09	54.00	-6.91	AVG	
3		5464.560	49.87	15.99	65.86	68.20	-2.34	peak	
4	X	5510.000	92.06	16.08	108.14	68.20	39.94	peak	No Limit
5	*	5510.000	82.32	16.08	98.40	54.00	44.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

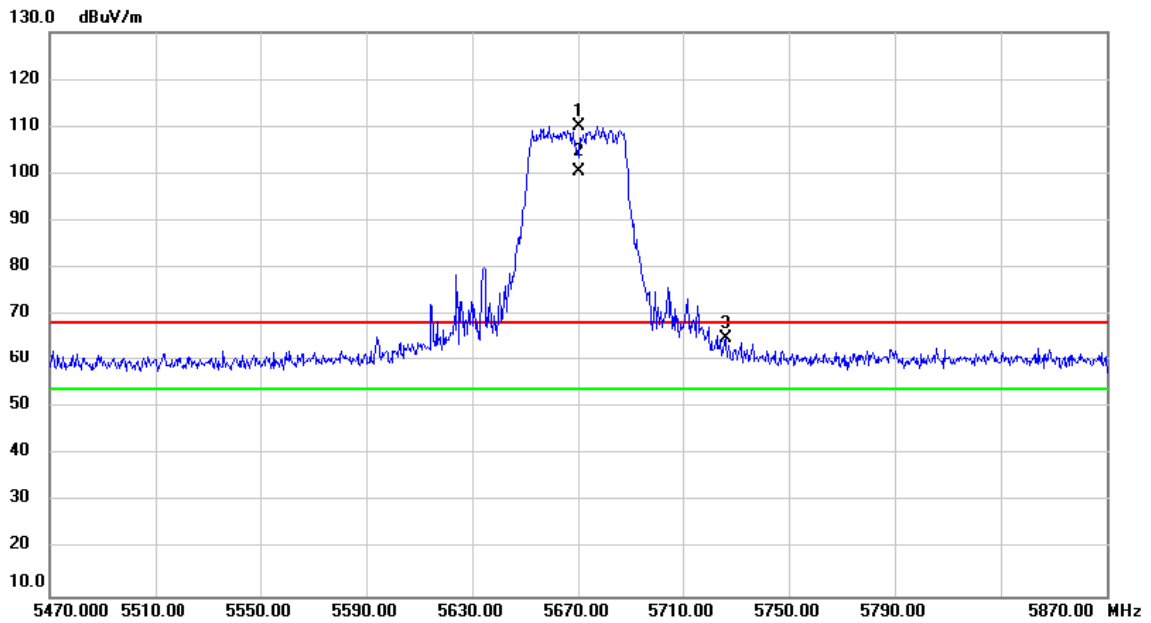


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5670.000	93.62	16.40	110.02	68.20	41.82	peak	No Limit
2	*	5670.000	83.94	16.40	100.34	54.00	46.34	AVG	No Limit
3		5726.147	48.64	16.51	65.15	68.20	-3.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

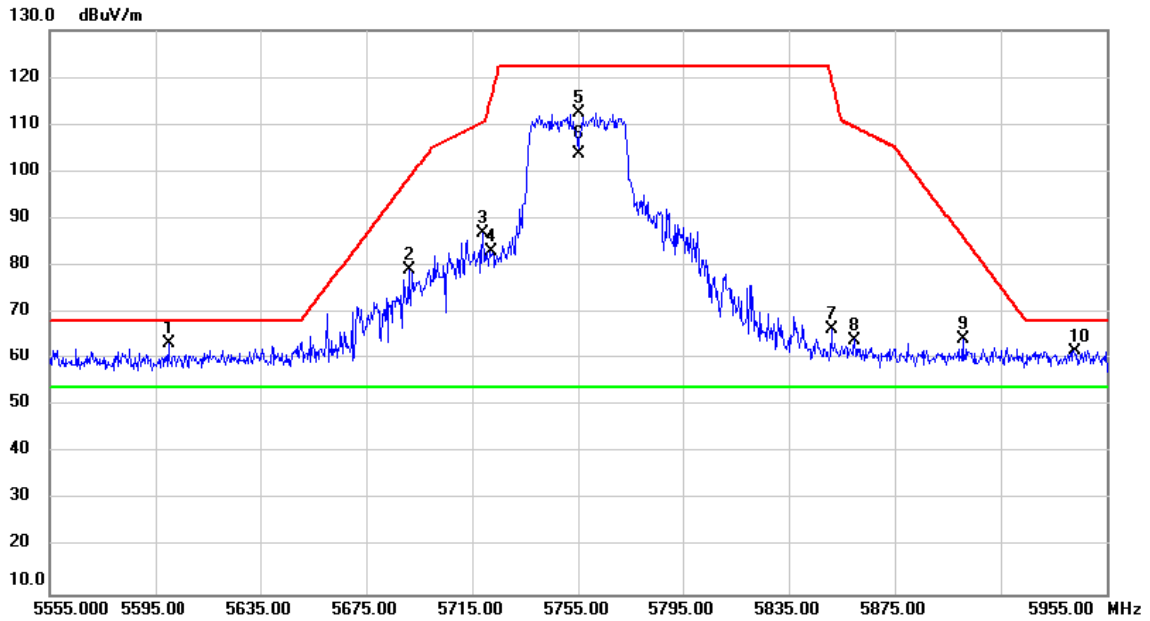


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5600.000	47.25	16.26	63.51	68.20	-4.69	peak	
2		5691.080	62.62	16.45	79.07	98.60	-19.53	peak	
3		5719.147	70.58	16.50	87.08	110.56	-23.48	peak	
4		5721.987	66.66	16.51	83.17	115.33	-32.16	peak	
5		5755.000	95.79	16.57	112.36	122.20	-9.84	peak	No Limit
6	*	5755.000	87.31	16.57	103.88	54.00	49.88	AVG	No Limit
7		5851.293	49.90	16.76	66.66	119.25	-52.59	peak	
8		5860.013	47.51	16.79	64.30	109.40	-45.10	peak	
9		5900.907	47.62	16.86	64.48	86.03	-21.55	peak	
10		5942.787	44.82	16.94	61.76	68.20	-6.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT40)	Test Date	2021/4/24
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

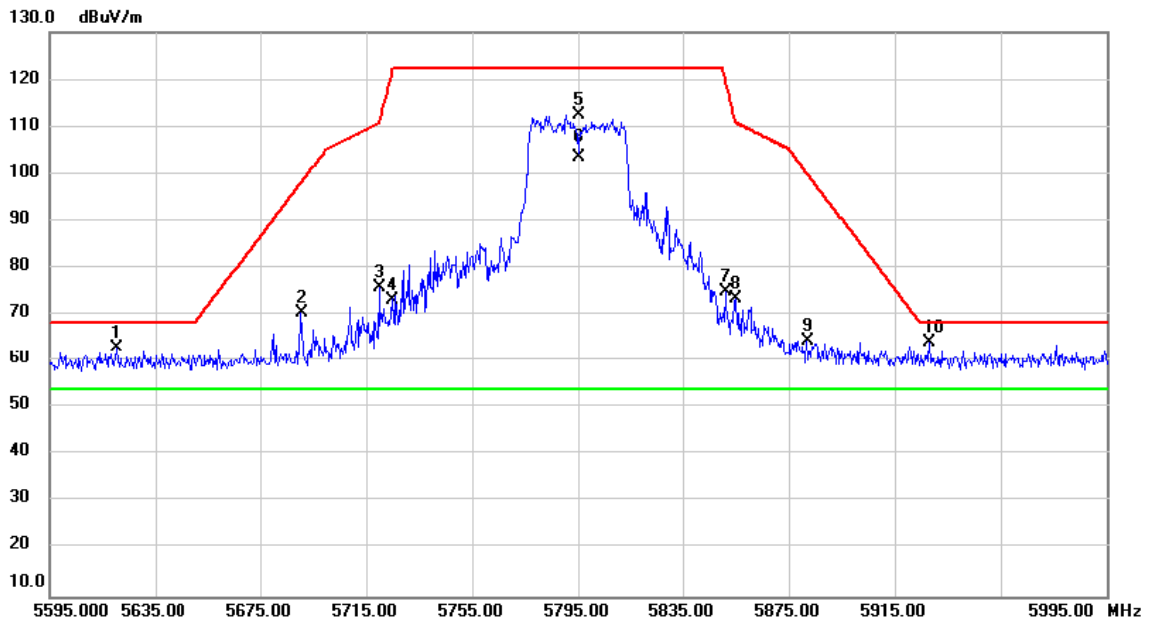


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5620.267	46.65	16.30	62.95	68.20	-5.25	peak	
2		5690.533	54.14	16.45	70.59	98.19	-27.60	peak	
3		5720.013	59.26	16.50	75.76	110.83	-35.07	peak	
4		5724.947	56.60	16.50	73.10	122.08	-48.98	peak	
5		5795.000	95.75	16.65	112.40	122.20	-9.80	peak	No Limit
6	*	5795.000	86.84	16.65	103.49	54.00	49.49	AVG	No Limit
7		5851.293	58.26	16.76	75.02	119.25	-44.23	peak	
8		5855.133	56.66	16.77	73.43	110.76	-37.33	peak	
9		5881.987	47.68	16.83	64.51	100.03	-35.52	peak	
10		5928.187	47.23	16.91	64.14	68.20	-4.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

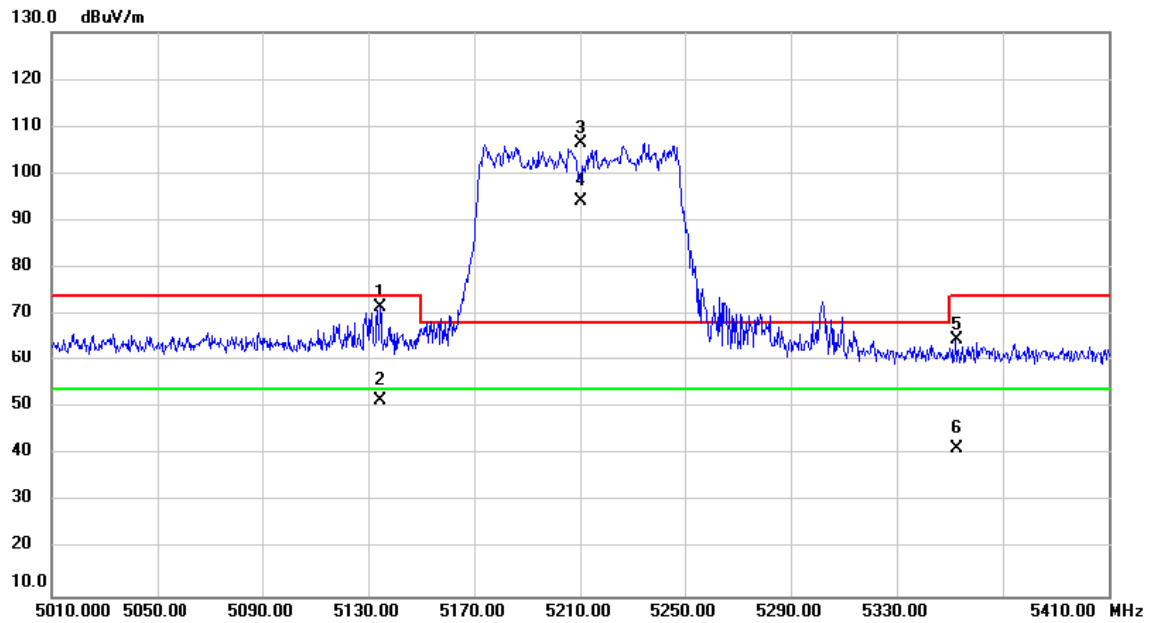


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5134.747	56.51	15.22	71.73	74.00	-2.27	peak	
2		5134.747	36.19	15.22	51.41	54.00	-2.59	AVG	
3	X	5210.000	91.08	15.40	106.48	68.20	38.28	peak	No Limit
4	*	5210.000	78.71	15.40	94.11	54.00	40.11	AVG	No Limit
5		5352.533	48.93	15.72	64.65	74.00	-9.35	peak	
6		5352.533	25.78	15.72	41.50	54.00	-12.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

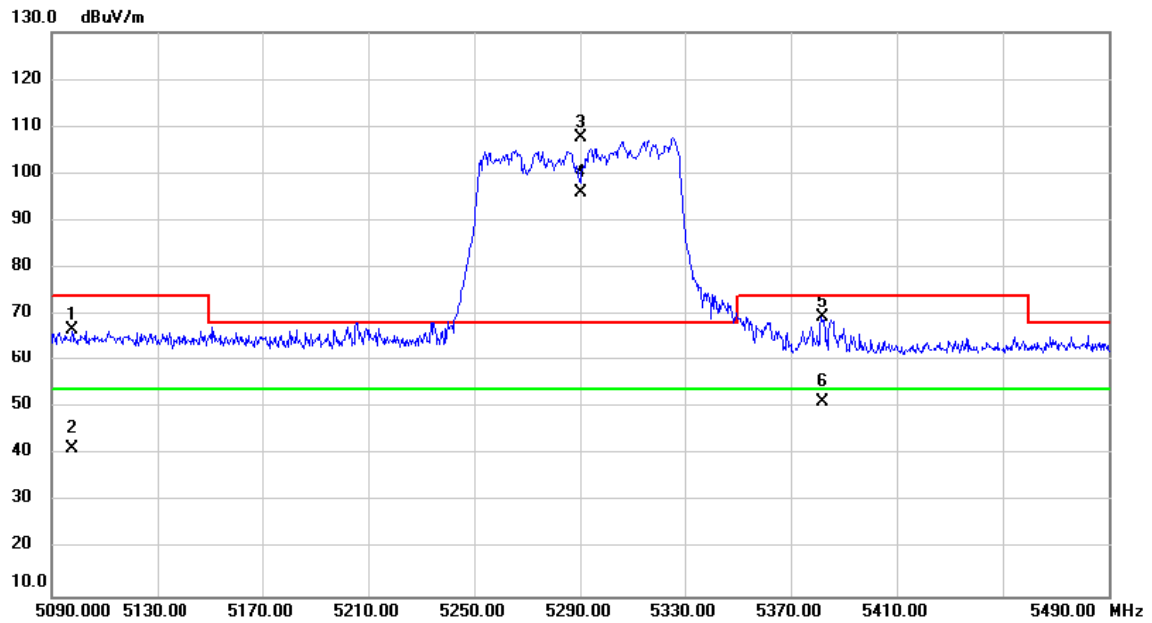


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5097.960	51.55	15.15	66.70	74.00	-7.30	peak	
2		5097.960	26.23	15.15	41.38	54.00	-12.62	AVG	
3	X	5290.000	92.12	15.59	107.71	68.20	39.51	peak	No Limit
4	*	5290.000	80.50	15.59	96.09	54.00	42.09	AVG	No Limit
5		5381.800	53.76	15.80	69.56	74.00	-4.44	peak	
6		5381.800	35.31	15.80	51.11	54.00	-2.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

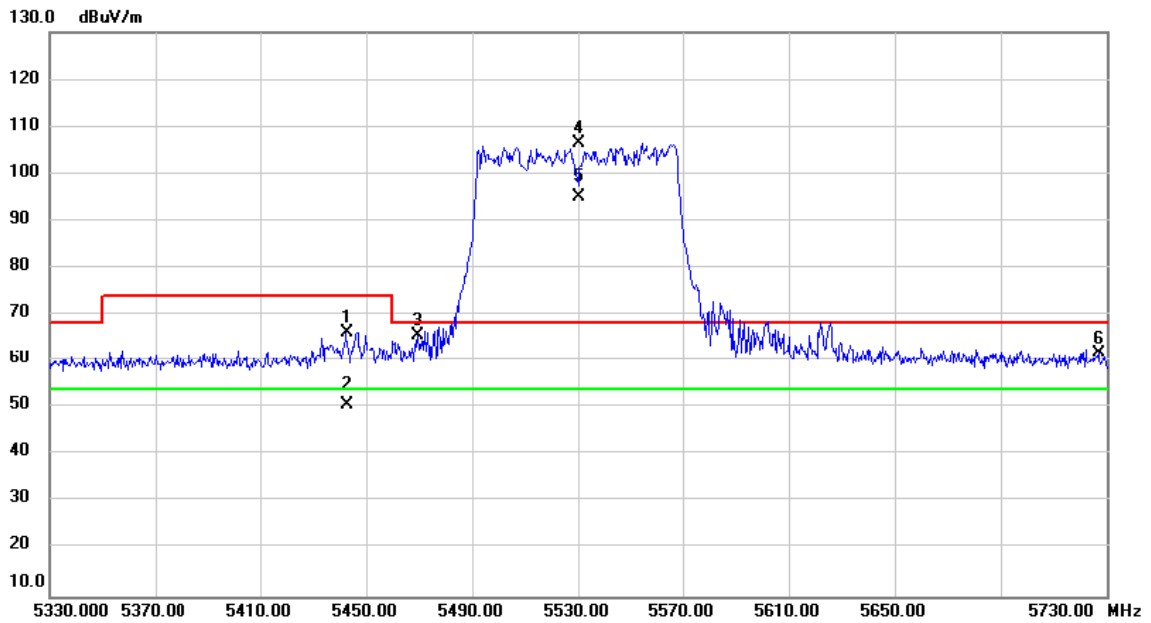


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5442.547	50.32	15.94	66.26	74.00	-7.74	peak	
2		5442.547	34.69	15.94	50.63	54.00	-3.37	AVG	
3		5469.627	49.60	16.00	65.60	68.20	-2.60	peak	
4	X	5530.000	90.45	16.12	106.57	68.20	38.37	peak	No Limit
5	*	5530.000	79.00	16.12	95.12	54.00	41.12	AVG	No Limit
6		5726.827	45.11	16.51	61.62	68.20	-6.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

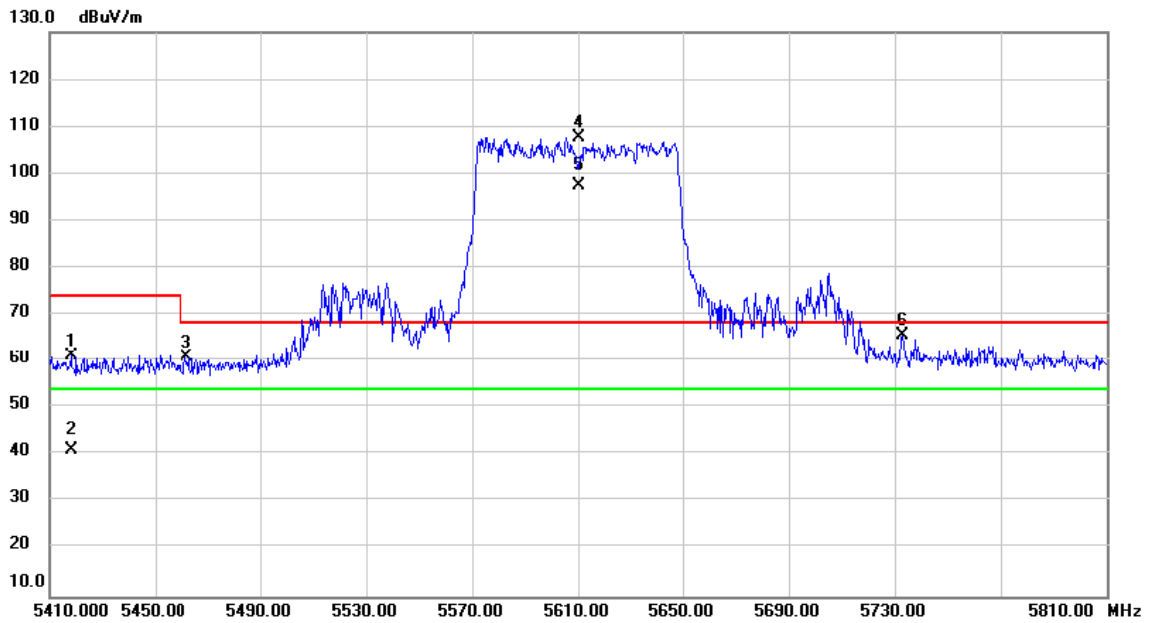


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5418.267	45.30	15.88	61.18	74.00	-12.82	peak	
2		5418.267	25.30	15.88	41.18	54.00	-12.82	AVG	
3		5461.920	44.78	15.98	60.76	68.20	-7.44	peak	
4	X	5610.000	91.49	16.29	107.78	68.20	39.58	peak	No Limit
5	*	5610.000	81.27	16.29	97.56	54.00	43.56	AVG	No Limit
6		5732.813	49.06	16.53	65.59	68.20	-2.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

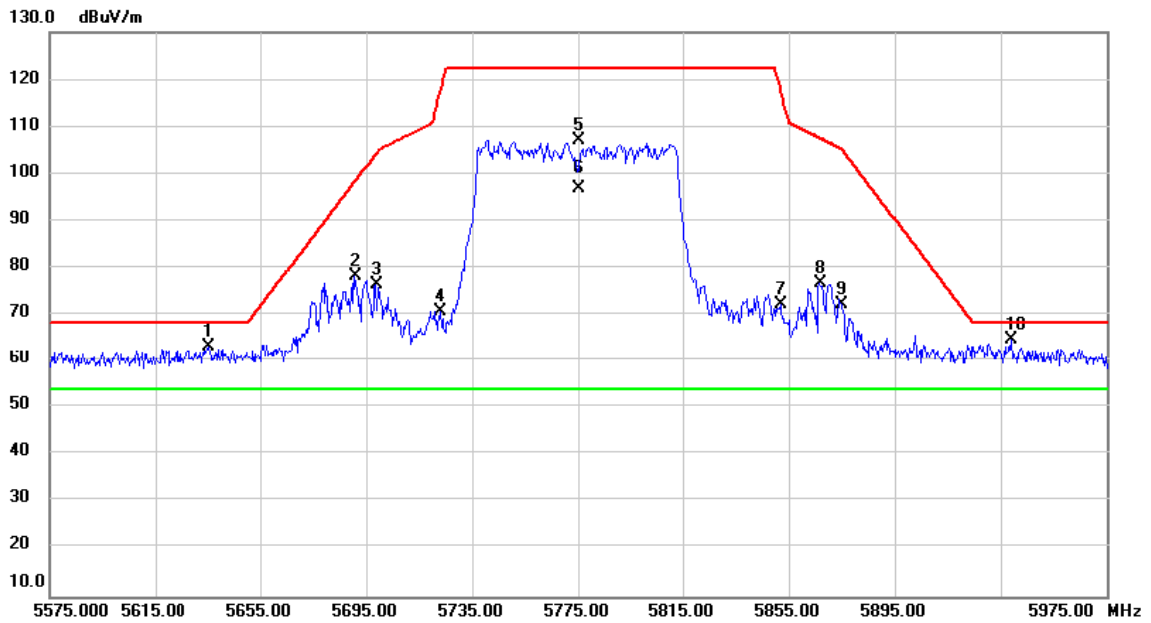


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5635.640	46.96	16.33	63.29	68.20	-4.91	peak	
2		5690.773	61.81	16.45	78.26	98.37	-20.11	peak	
3		5698.880	60.04	16.47	76.51	104.37	-27.86	peak	
4		5723.040	54.17	16.51	70.68	117.73	-47.05	peak	
5		5775.000	90.49	16.61	107.10	122.20	-15.10	peak	No Limit
6	*	5775.000	80.13	16.61	96.74	54.00	42.74	AVG	No Limit
7		5852.133	55.40	16.77	72.17	117.34	-45.17	peak	
8		5866.867	60.05	16.79	76.84	107.48	-30.64	peak	
9		5875.027	55.47	16.82	72.29	105.18	-32.89	peak	
10		5939.160	47.72	16.93	64.65	68.20	-3.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

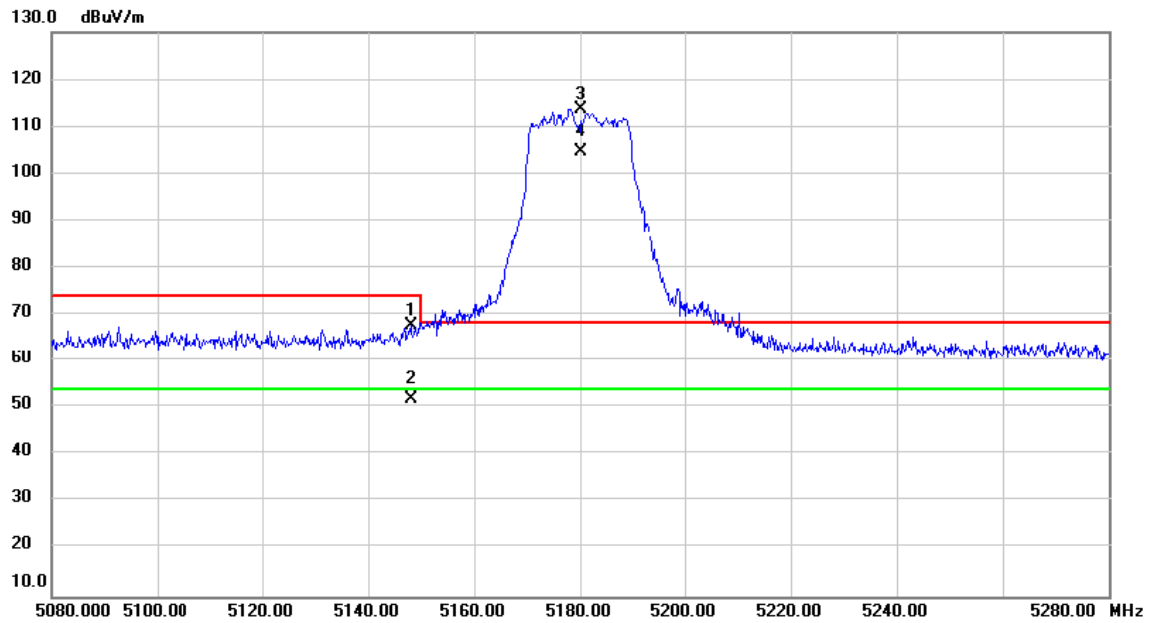


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.167	52.57	15.26	67.83	74.00	-6.17	peak	
2		5148.167	36.45	15.26	51.71	54.00	-2.29	AVG	
3	X	5180.000	98.37	15.33	113.70	68.20	45.50	peak	No Limit
4	*	5180.000	89.30	15.33	104.63	54.00	50.63	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

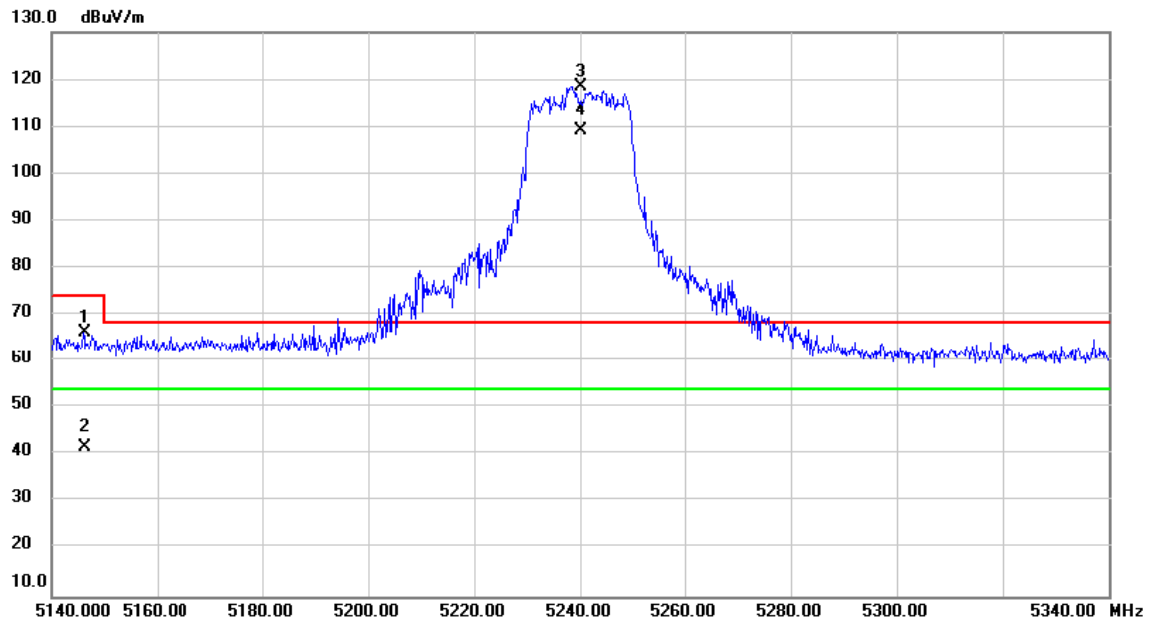


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.187	51.06	15.25	66.31	74.00	-7.69	peak	
2		5146.187	26.39	15.25	41.64	54.00	-12.36	AVG	
3	X	5240.000	102.97	15.47	118.44	68.20	50.24	peak	No Limit
4	*	5240.000	93.66	15.47	109.13	54.00	55.13	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

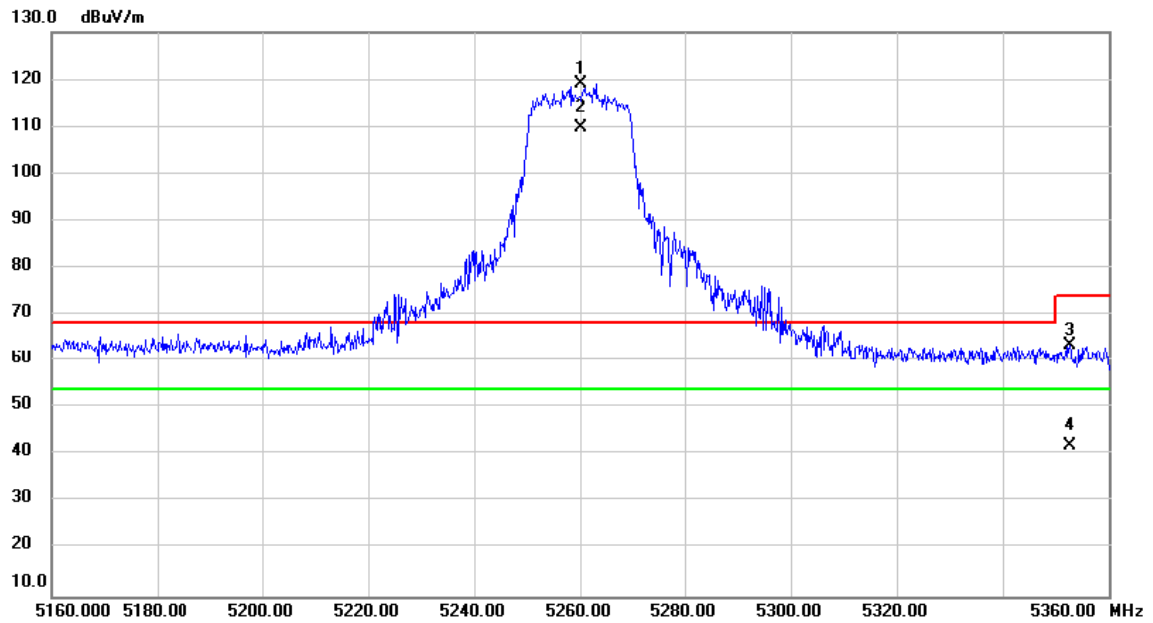


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.000	103.43	15.52	118.95	68.20	50.75	peak	No Limit
2	*	5260.000	94.11	15.52	109.63	54.00	55.63	AVG	No Limit
3		5352.780	47.74	15.73	63.47	74.00	-10.53	peak	
4		5352.780	26.16	15.73	41.89	54.00	-12.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

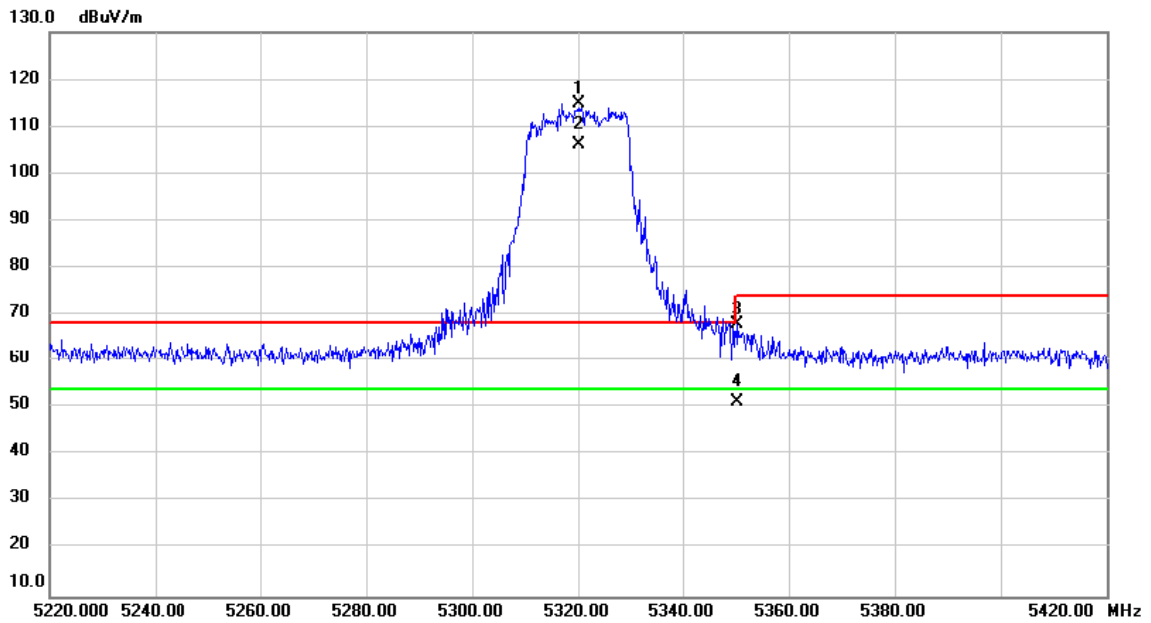


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.000	99.15	15.65	114.80	68.20	46.60	peak	No Limit
2	*	5320.000	90.36	15.65	106.01	54.00	52.01	AVG	No Limit
3		5350.307	52.46	15.72	68.18	74.00	-5.82	peak	
4		5350.307	35.50	15.72	51.22	54.00	-2.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

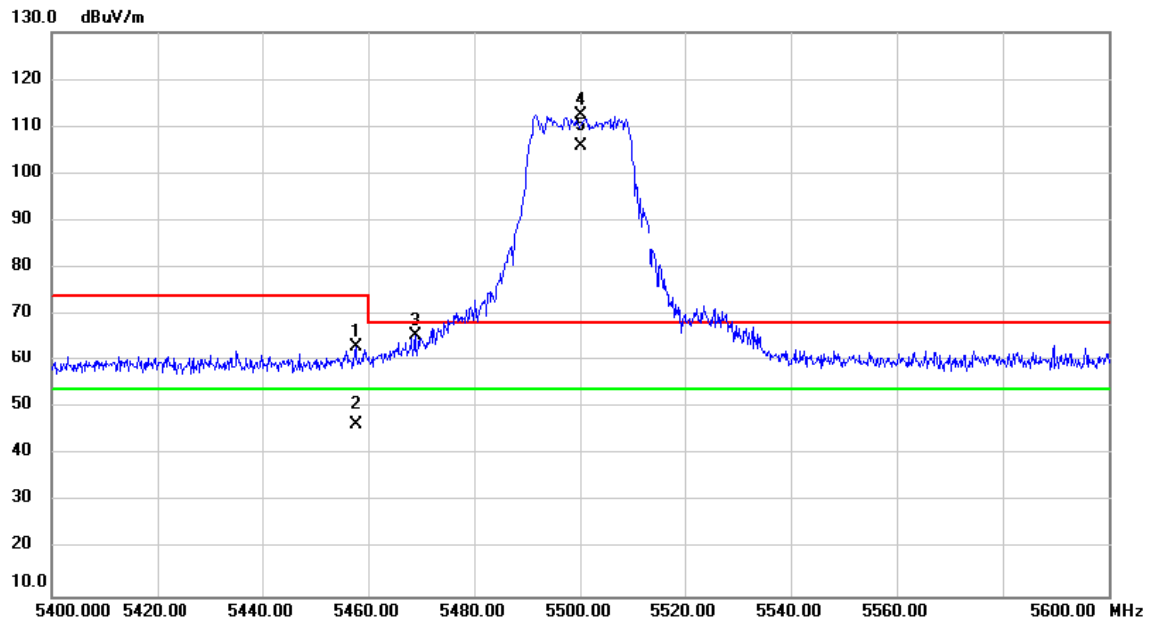


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.607	47.27	15.97	63.24	74.00	-10.76	peak	
2		5457.607	30.38	15.97	46.35	54.00	-7.65	AVG	
3		5468.867	49.52	15.99	65.51	68.20	-2.69	peak	
4	X	5500.000	96.37	16.06	112.43	68.20	44.23	peak	No Limit
5	*	5500.000	89.94	16.06	106.00	54.00	52.00	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

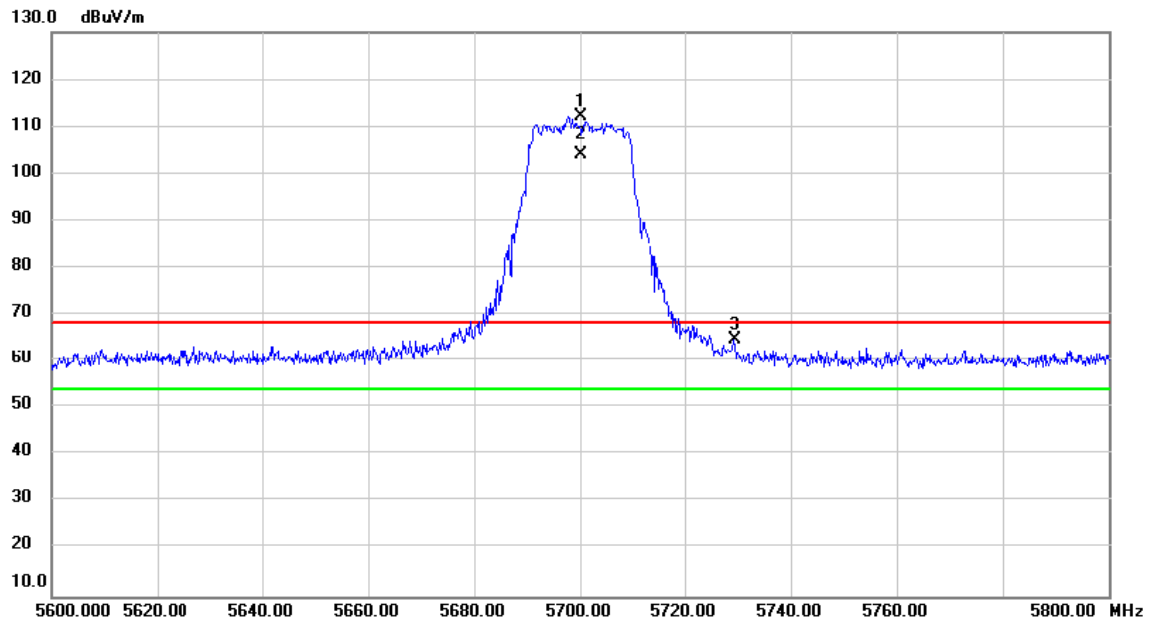


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	95.63	16.47	112.10	68.20	43.90	peak	No Limit
2	*	5700.000	87.61	16.47	104.08	54.00	50.08	AVG	No Limit
3		5729.380	48.31	16.52	64.83	68.20	-3.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

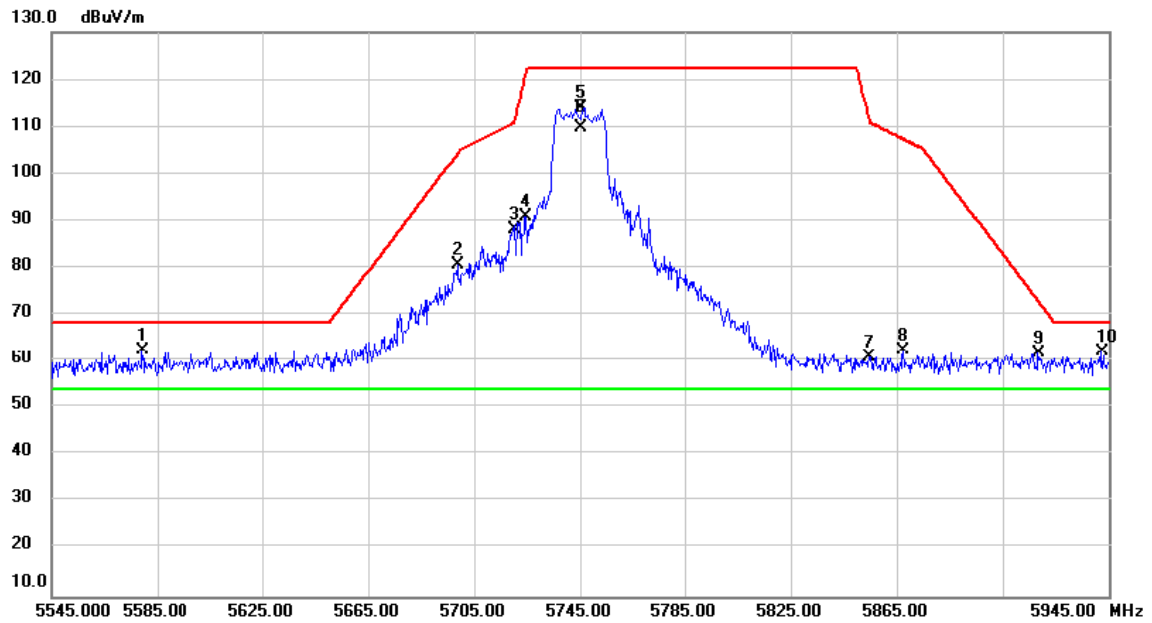


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5579.240	46.26	16.23	62.49	68.20	-5.71	peak	
2	5698.787	64.06	16.47	80.53	104.30	-23.77	peak	
3	5719.947	71.59	16.50	88.09	110.79	-22.70	peak	
4	5724.587	74.49	16.50	90.99	121.26	-30.27	peak	
5	5745.000	97.52	16.55	114.07	122.20	-8.13	peak	No Limit
6 *	5745.000	93.33	16.55	109.88	54.00	55.88	AVG	No Limit
7	5854.707	43.97	16.77	60.74	111.47	-50.73	peak	
8	5867.453	45.53	16.80	62.33	107.31	-44.98	peak	
9	5918.520	44.96	16.90	61.86	73.00	-11.14	peak	
10	5942.507	45.04	16.94	61.98	68.20	-6.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

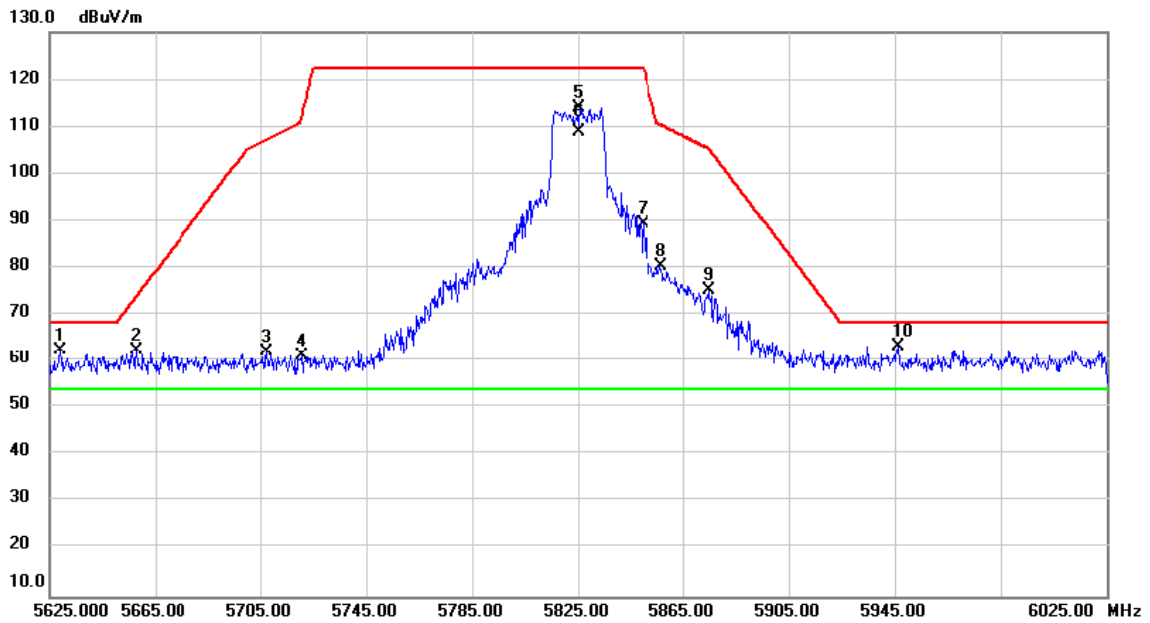


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5629.227	46.08	16.33	62.41	68.20	-5.79	peak	
2		5657.880	46.02	16.38	62.40	74.03	-11.63	peak	
3		5707.507	45.44	16.47	61.91	107.30	-45.39	peak	
4		5720.627	44.77	16.50	61.27	112.23	-50.96	peak	
5		5825.000	97.38	16.72	114.10	122.20	-8.10	peak	No Limit
6	*	5825.000	92.12	16.72	108.84	54.00	54.84	AVG	No Limit
7		5849.853	72.71	16.76	89.47	122.20	-32.73	peak	
8		5856.493	63.53	16.78	80.31	110.38	-30.07	peak	
9		5874.960	58.31	16.81	75.12	105.21	-30.09	peak	
10		5946.227	46.25	16.95	63.20	68.20	-5.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

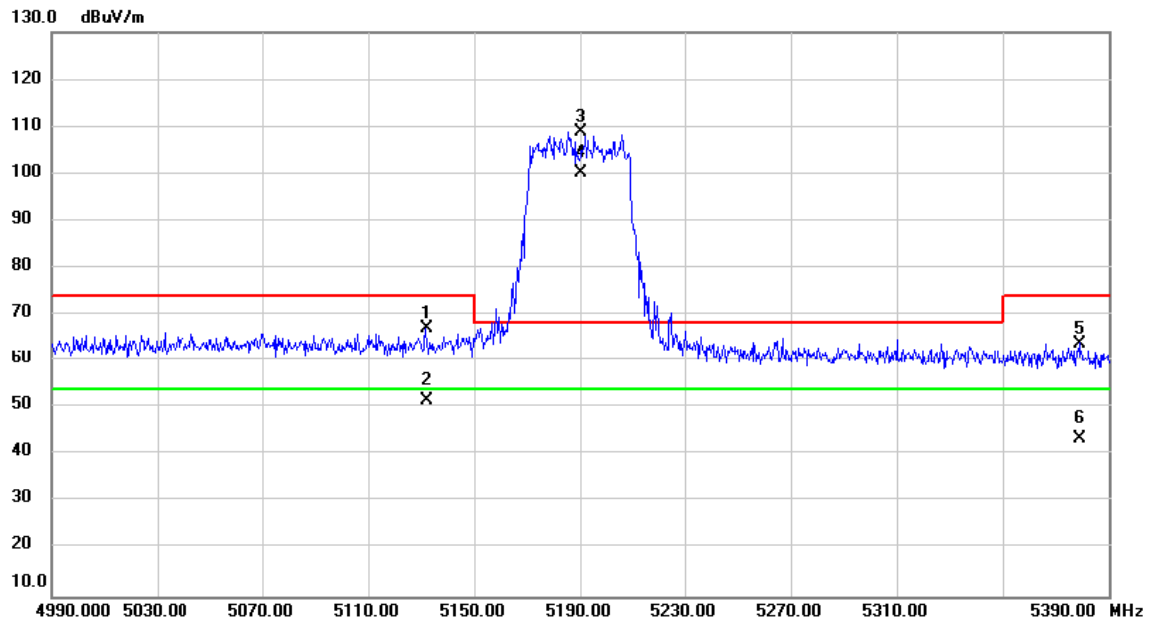


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5131.867	52.06	15.22	67.28	74.00	-6.72	peak	
2		5131.867	36.40	15.22	51.62	54.00	-2.38	AVG	
3	X	5190.000	93.54	15.35	108.89	68.20	40.69	peak	No Limit
4	*	5190.000	84.73	15.35	100.08	54.00	46.08	AVG	No Limit
5		5378.920	48.22	15.78	64.00	74.00	-10.00	peak	
6		5378.920	27.72	15.78	43.50	54.00	-10.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

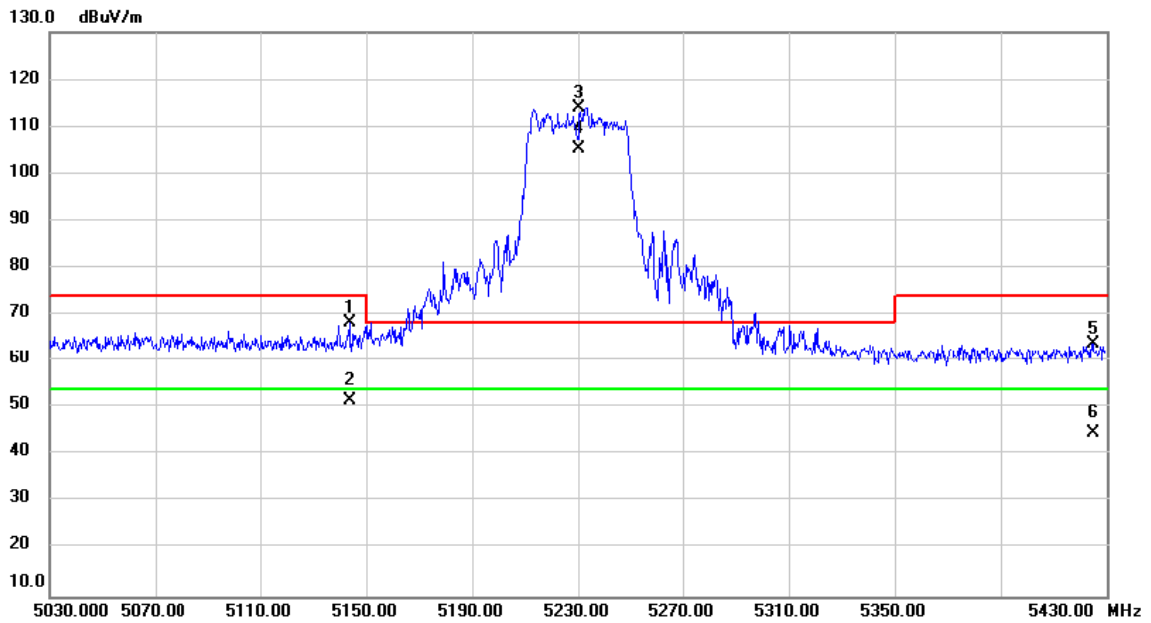


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5143.800	52.99	15.25	68.24	74.00	-5.76	peak	
2		5143.800	36.20	15.25	51.45	54.00	-2.55	AVG	
3	X	5230.000	98.46	15.44	113.90	68.20	45.70	peak	No Limit
4	*	5230.000	89.76	15.44	105.20	54.00	51.20	AVG	No Limit
5		5424.800	47.96	15.89	63.85	74.00	-10.15	peak	
6		5424.800	28.87	15.89	44.76	54.00	-9.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

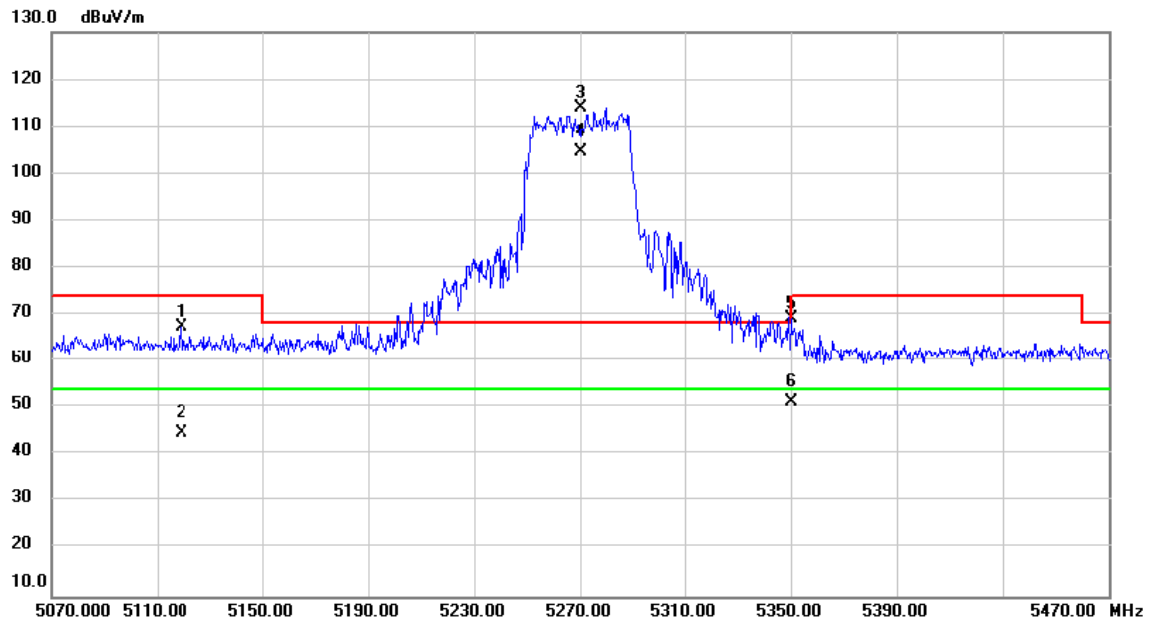


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5119.067	52.32	15.18	67.50	74.00	-6.50	peak	
2		5119.067	29.59	15.18	44.77	54.00	-9.23	AVG	
3	X	5270.000	98.41	15.55	113.96	68.20	45.76	peak	No Limit
4	*	5270.000	89.15	15.55	104.70	54.00	50.70	AVG	No Limit
5		5350.253	53.65	15.72	69.37	74.00	-4.63	peak	
6		5350.253	35.55	15.72	51.27	54.00	-2.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

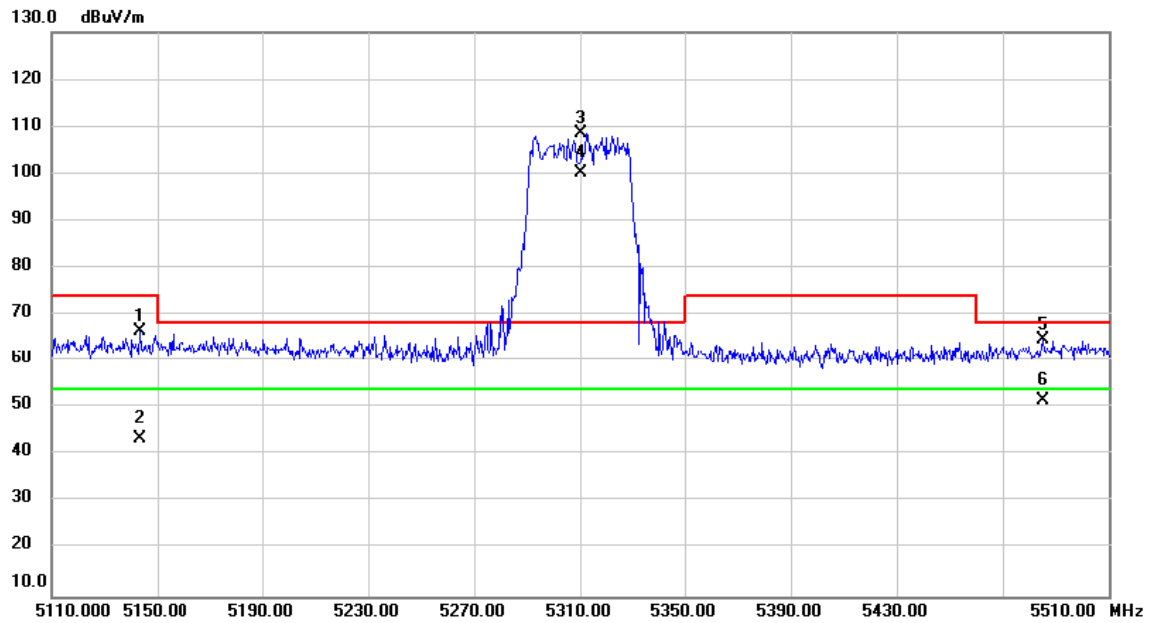


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5143.333	51.42	15.25	66.67	74.00	-7.33	peak	
2		5143.333	28.33	15.25	43.58	54.00	-10.42	AVG	
3	X	5310.000	92.98	15.63	108.61	68.20	40.41	peak	No Limit
4	*	5310.000	84.52	15.63	100.15	54.00	46.15	AVG	No Limit
5		5485.413	48.79	16.03	64.82	68.20	-3.38	peak	
6		5485.413	35.56	16.03	51.59	54.00	-2.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

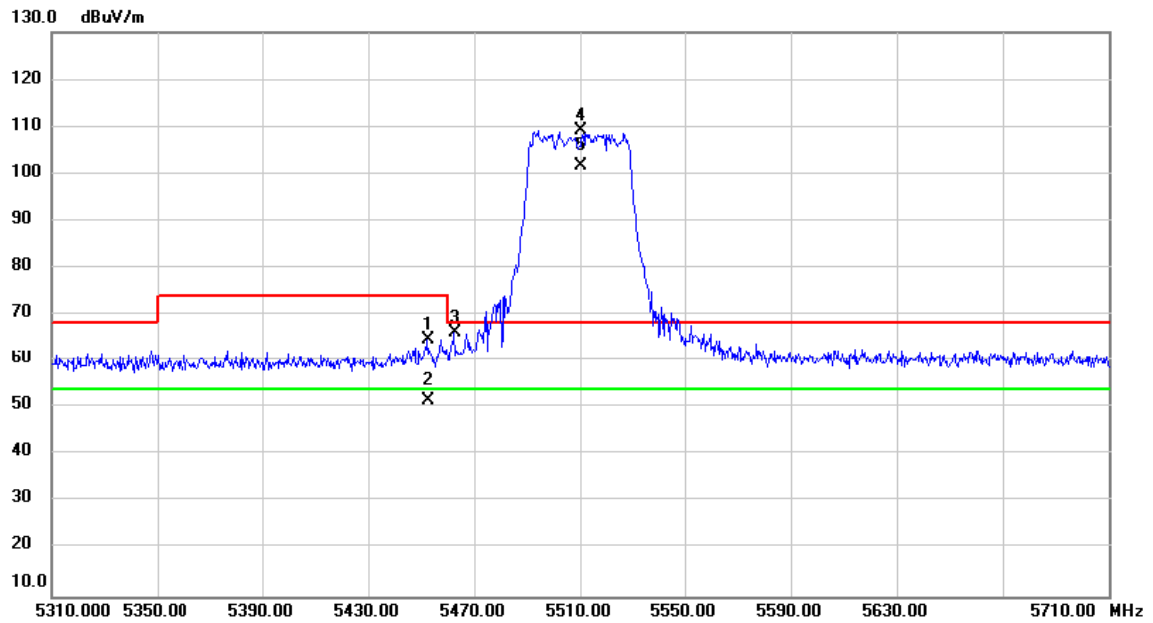


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.680	48.86	15.95	64.81	74.00	-9.19	peak	
2		5452.680	35.54	15.95	51.49	54.00	-2.51	AVG	
3		5462.560	50.14	15.98	66.12	68.20	-2.08	peak	
4	X	5510.000	93.15	16.08	109.23	68.20	41.03	peak	No Limit
5	*	5510.000	85.51	16.08	101.59	54.00	47.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

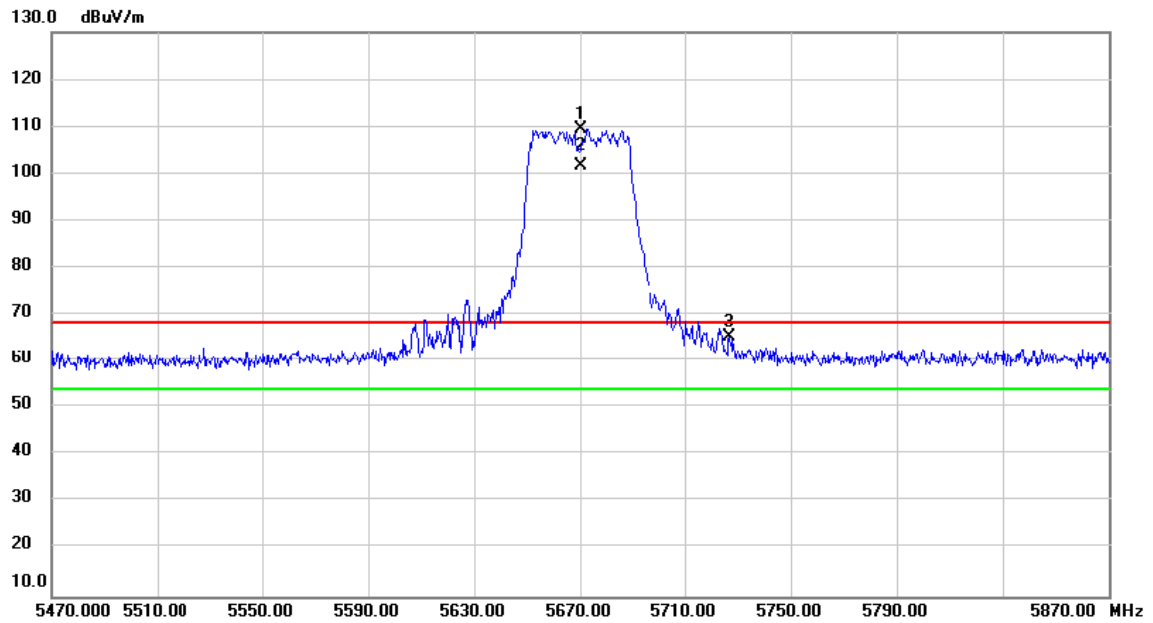


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5670.000	93.19	16.40	109.59	68.20	41.39	peak	No Limit
2	*	5670.000	85.27	16.40	101.67	54.00	47.67	AVG	No Limit
3		5726.813	48.93	16.51	65.44	68.20	-2.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

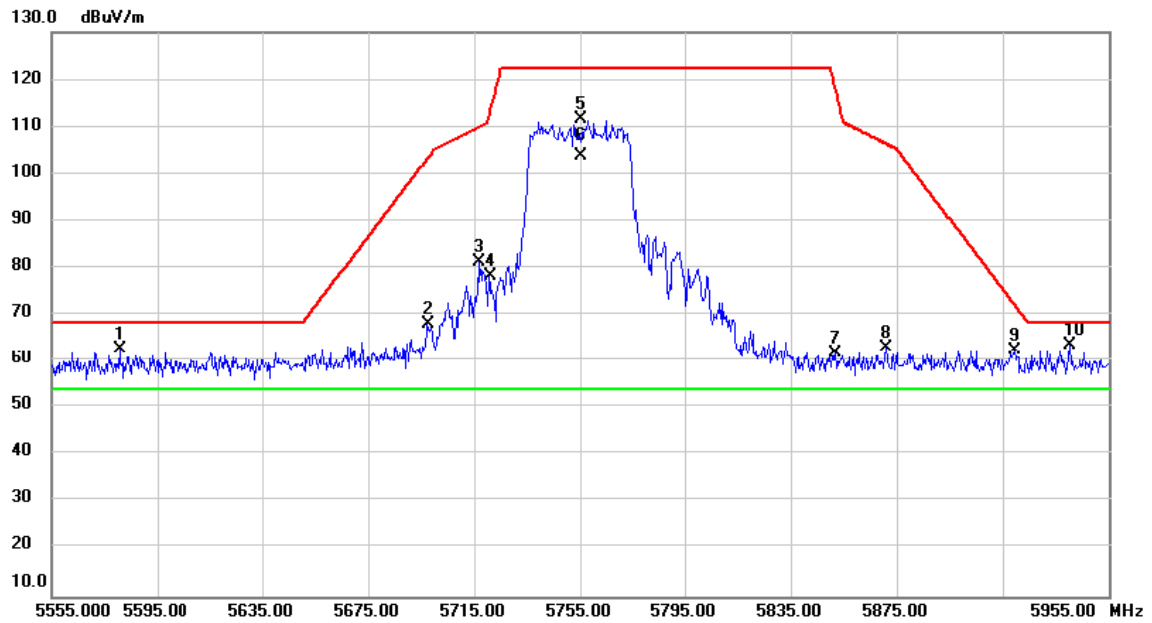


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5580.840	46.55	16.22	62.77	68.20	-5.43	peak	
2		5697.680	51.57	16.46	68.03	103.48	-35.45	peak	
3		5716.680	64.71	16.49	81.20	109.87	-28.67	peak	
4		5720.920	61.87	16.50	78.37	112.90	-34.53	peak	
5		5755.000	94.83	16.57	111.40	122.20	-10.80	peak	No Limit
6	*	5755.000	87.15	16.57	103.72	54.00	49.72	AVG	No Limit
7		5851.853	45.05	16.76	61.81	117.98	-56.17	peak	
8		5871.053	46.10	16.80	62.90	106.31	-43.41	peak	
9		5919.427	45.58	16.90	62.48	72.32	-9.84	peak	
10		5940.253	46.66	16.93	63.59	68.20	-4.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

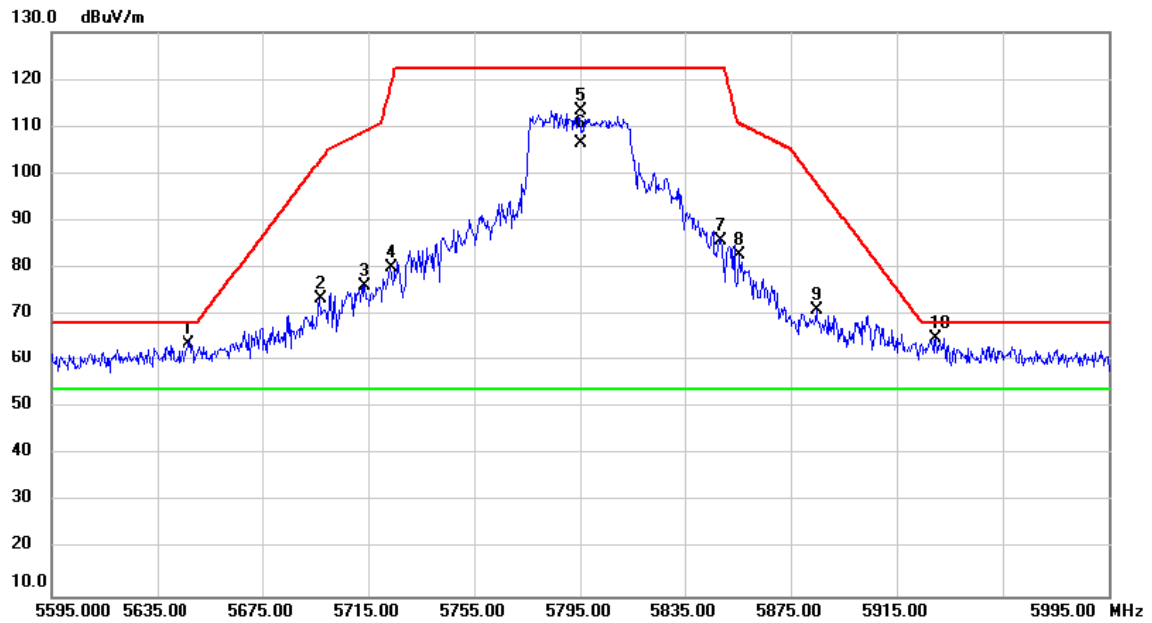


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.213	47.57	16.36	63.93	68.20	-4.27	peak	
2		5696.920	56.88	16.46	73.34	102.92	-29.58	peak	
3		5713.853	59.67	16.49	76.16	109.08	-32.92	peak	
4		5723.640	63.56	16.50	80.06	119.10	-39.04	peak	
5		5795.000	96.62	16.65	113.27	122.20	-8.93	peak	No Limit
6	*	5795.000	89.83	16.65	106.48	54.00	52.48	AVG	No Limit
7		5848.800	68.99	16.76	85.75	122.20	-36.45	peak	
8		5855.453	66.01	16.77	82.78	110.67	-27.89	peak	
9		5884.840	54.16	16.83	70.99	97.92	-26.93	peak	
10		5929.880	48.18	16.92	65.10	68.20	-3.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

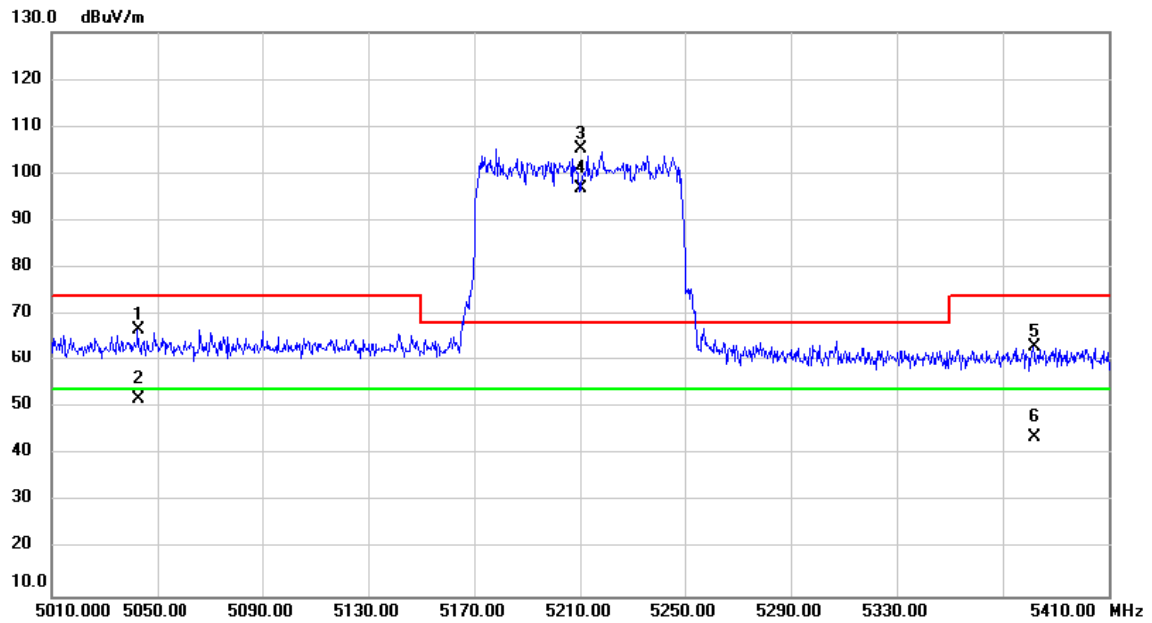


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5042.600	51.79	15.02	66.81	74.00	-7.19	peak	
2		5042.600	36.68	15.02	51.70	54.00	-2.30	AVG	
3	X	5210.000	89.73	15.40	105.13	68.20	36.93	peak	No Limit
4	*	5210.000	81.59	15.40	96.99	54.00	42.99	AVG	No Limit
5		5381.760	47.38	15.80	63.18	74.00	-10.82	peak	
6		5381.760	28.03	15.80	43.83	54.00	-10.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

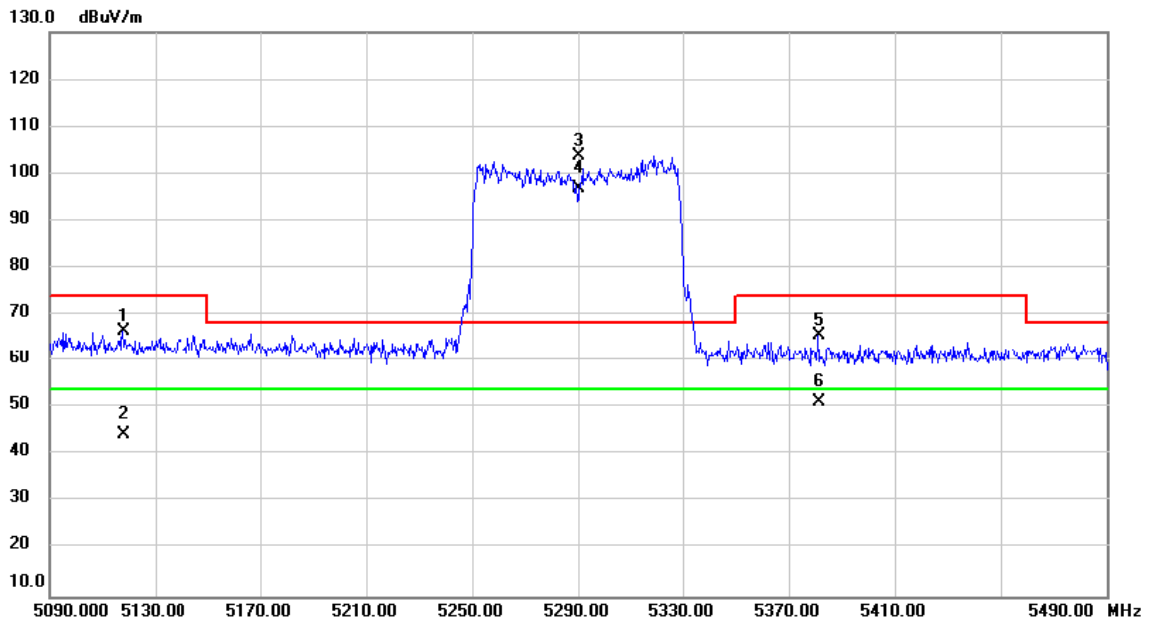


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5117.747	51.30	15.18	66.48	74.00	-7.52	peak	
2		5117.747	29.07	15.18	44.25	54.00	-9.75	AVG	
3	X	5290.000	88.08	15.59	103.67	68.20	35.47	peak	No Limit
4	*	5290.000	81.35	15.59	96.94	54.00	42.94	AVG	No Limit
5		5381.253	49.77	15.80	65.57	74.00	-8.43	peak	
6		5381.253	35.56	15.80	51.36	54.00	-2.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

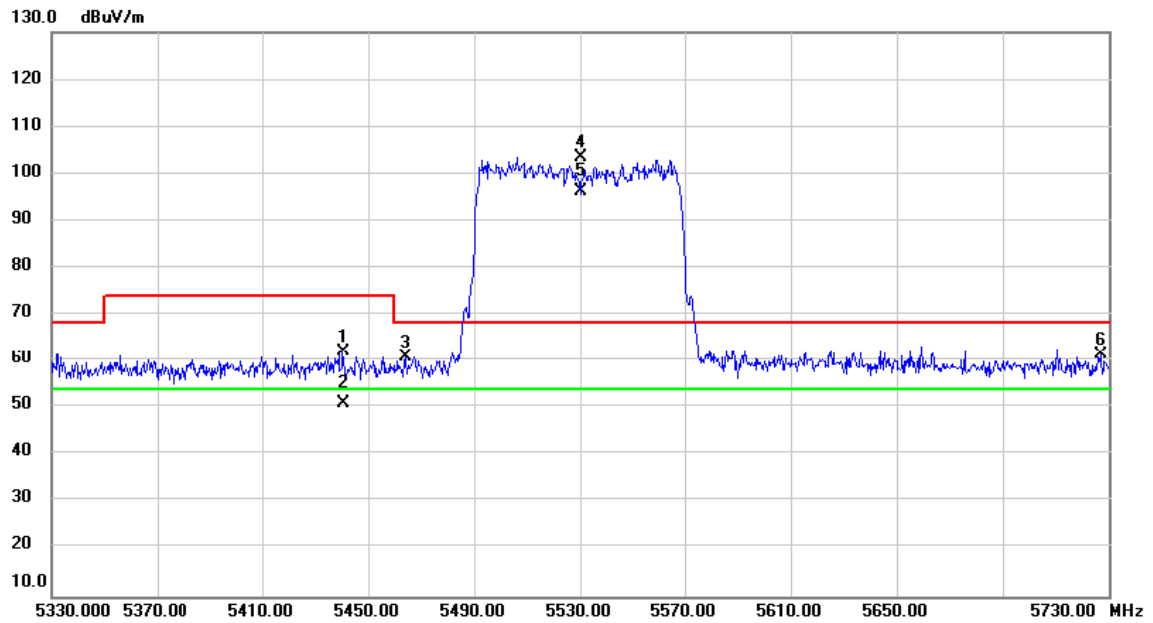


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5440.453	46.00	15.93	61.93	74.00	-12.07	peak	
2		5440.453	35.14	15.93	51.07	54.00	-2.93	AVG	
3		5464.013	44.82	15.99	60.81	68.20	-7.39	peak	
4	X	5530.000	87.30	16.12	103.42	68.20	35.22	peak	No Limit
5	*	5530.000	80.10	16.12	96.22	54.00	42.22	AVG	No Limit
6		5727.160	44.83	16.51	61.34	68.20	-6.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

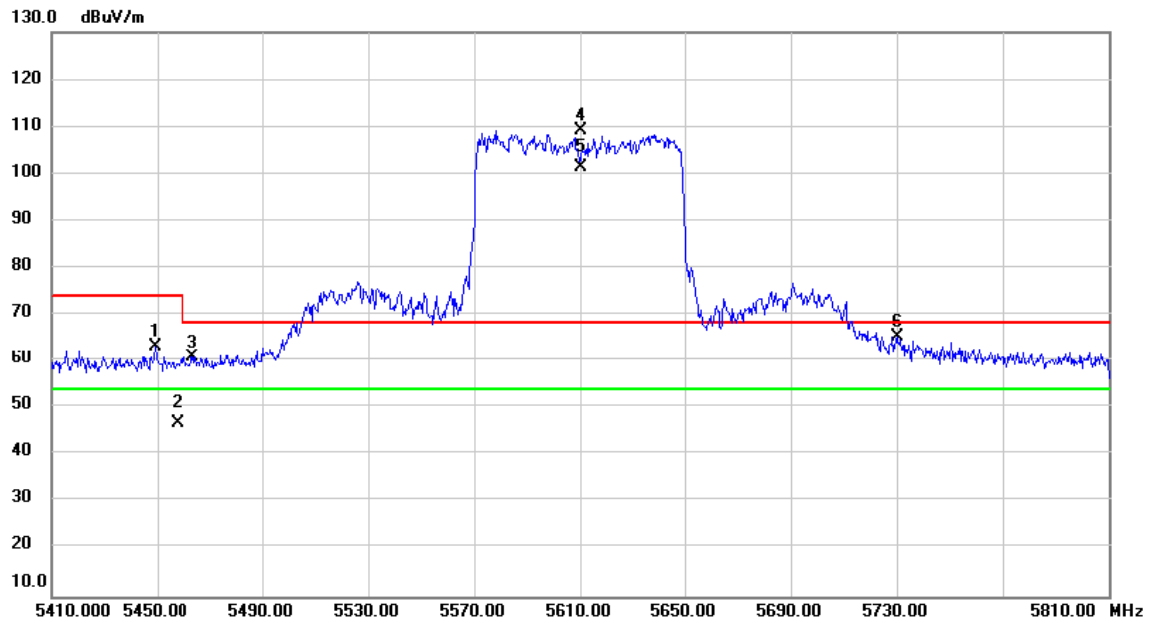


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5449.347	47.44	15.95	63.39	74.00	-10.61	peak	
2		5457.865	30.87	15.97	46.84	54.00	-7.16	AVG	
3		5463.600	44.93	15.98	60.91	68.20	-7.29	peak	
4	X	5610.000	92.78	16.29	109.07	68.20	40.87	peak	No Limit
5	*	5610.000	85.21	16.29	101.50	54.00	47.50	AVG	No Limit
6		5730.067	48.76	16.52	65.28	68.20	-2.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

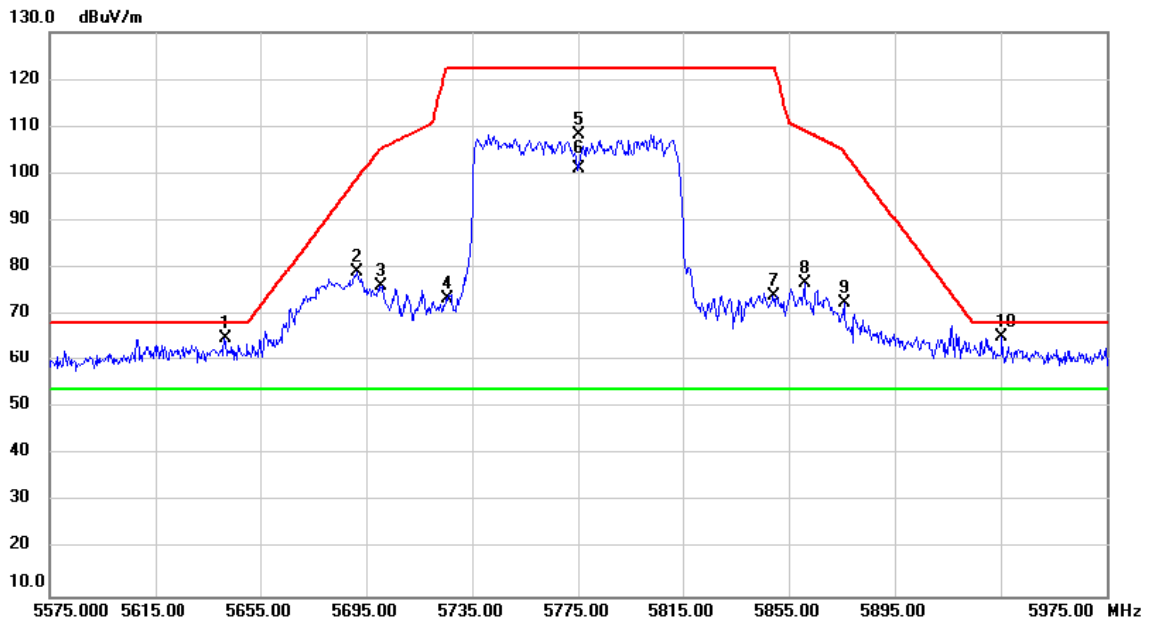


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5641.680	48.56	16.35	64.91	68.20	-3.29	peak	
2		5691.493	62.65	16.45	79.10	98.90	-19.80	peak	
3		5700.400	59.75	16.46	76.21	105.31	-29.10	peak	
4		5725.627	56.82	16.51	73.33	122.20	-48.87	peak	
5		5775.000	91.56	16.61	108.17	122.20	-14.03	peak	No Limit
6	*	5775.000	84.36	16.61	100.97	54.00	46.97	AVG	No Limit
7		5849.253	57.36	16.76	74.12	122.20	-48.08	peak	
8		5861.133	59.88	16.79	76.67	109.08	-32.41	peak	
9		5876.133	55.67	16.82	72.49	104.36	-31.87	peak	
10		5935.493	48.49	16.93	65.42	68.20	-2.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

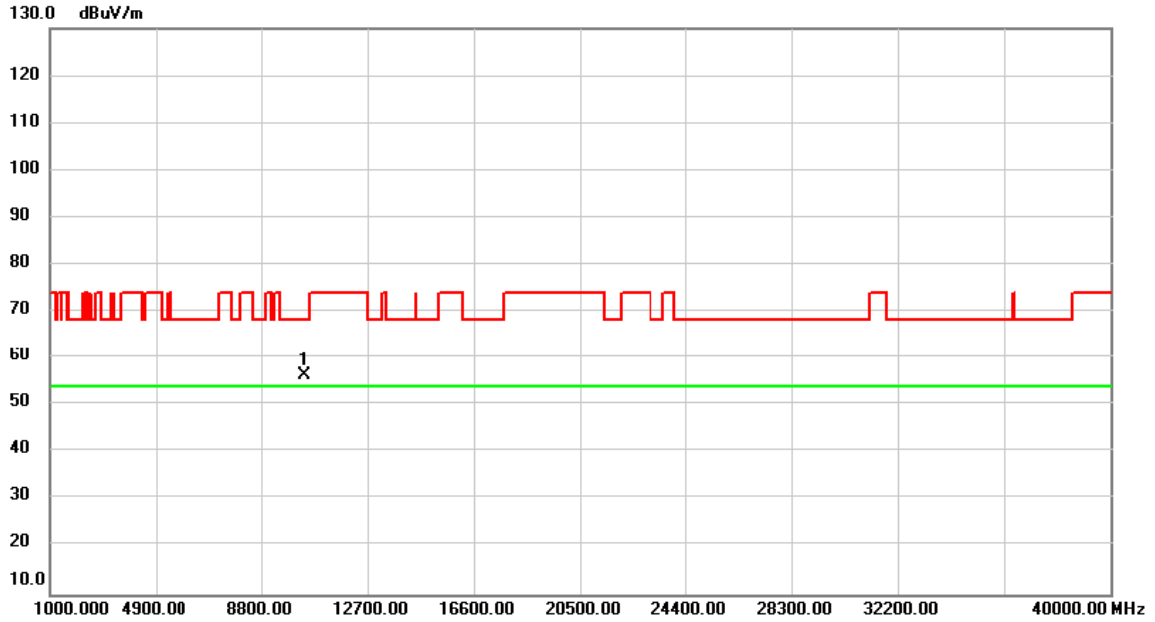


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	44.14	12.29	56.43	68.20	-11.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

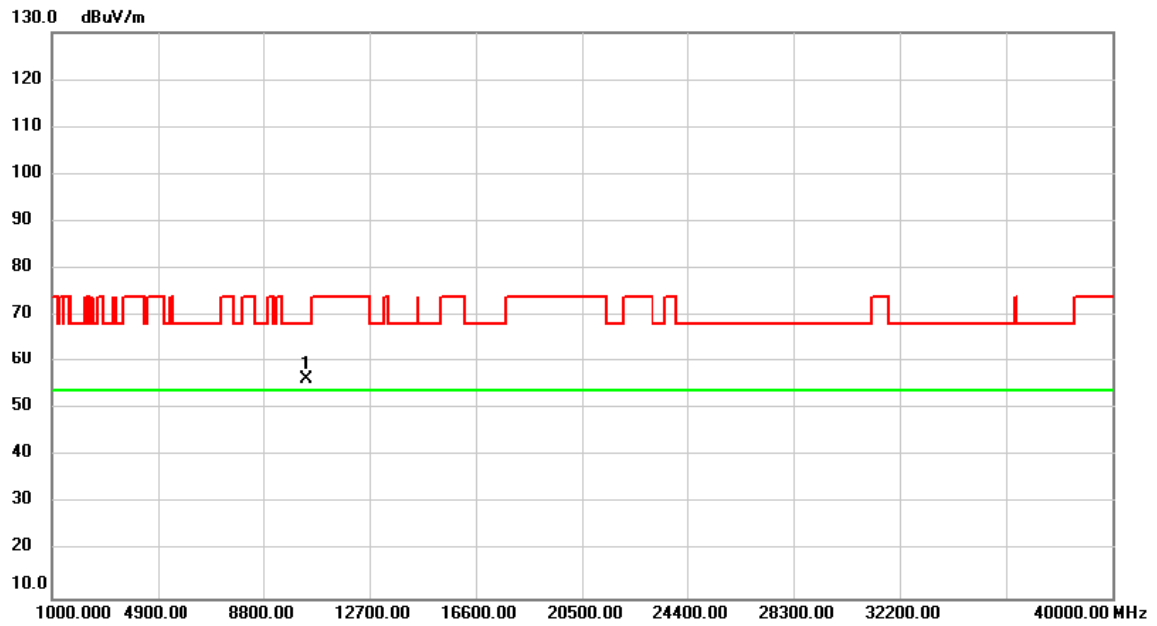


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	44.19	12.29	56.48	68.20	-11.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

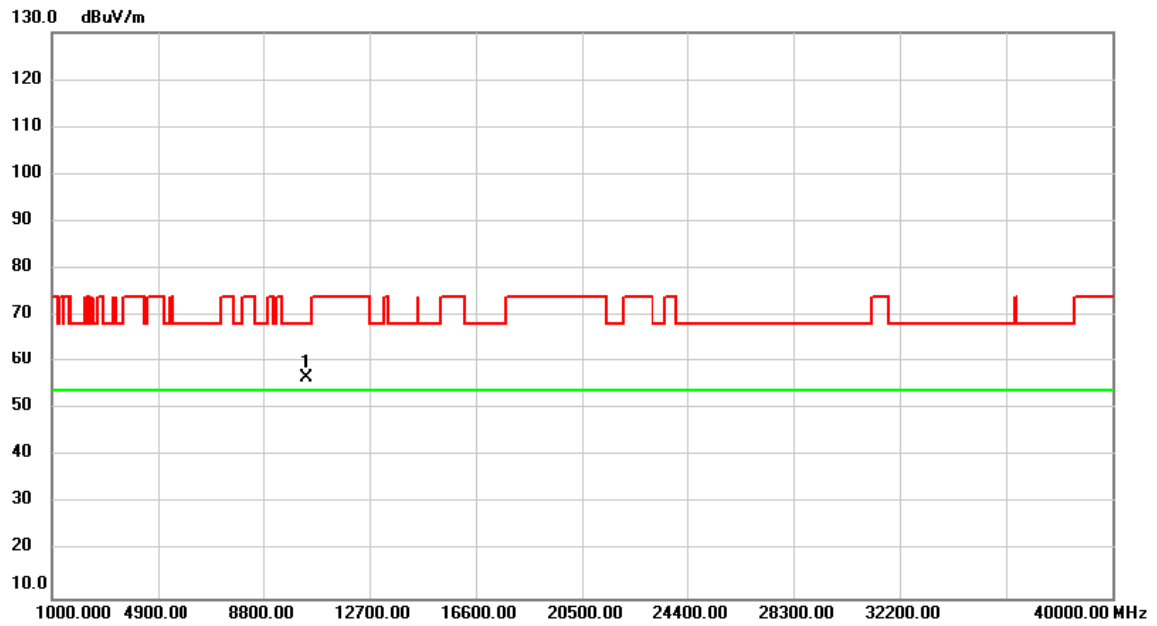


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	44.46	12.31	56.77	68.20	-11.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

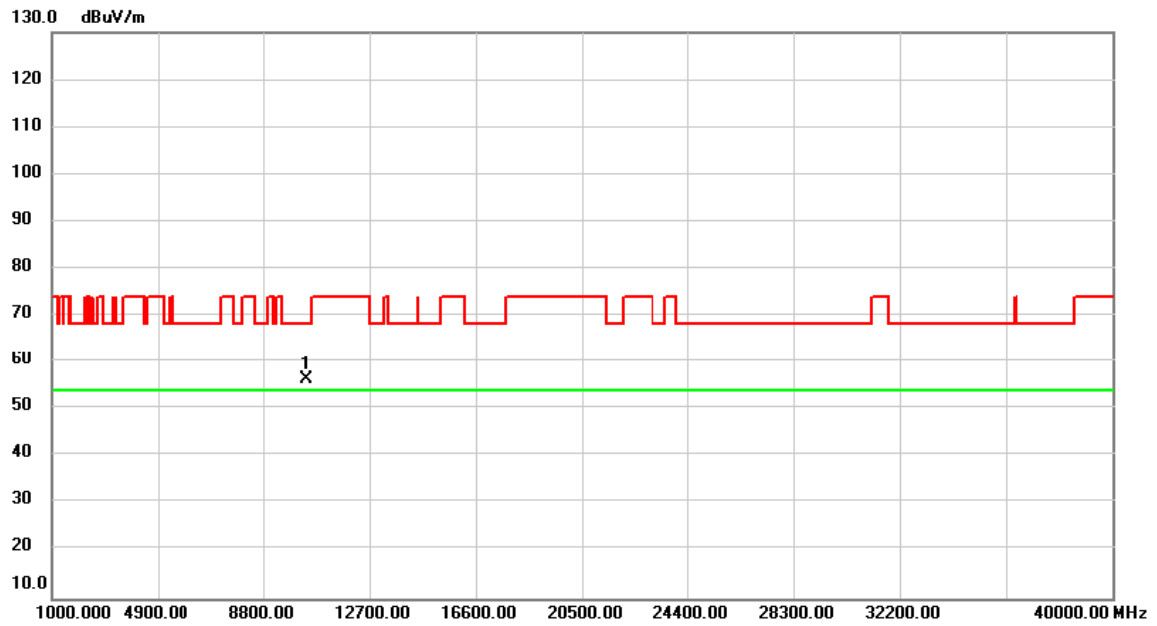


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	44.05	12.31	56.36	68.20	-11.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

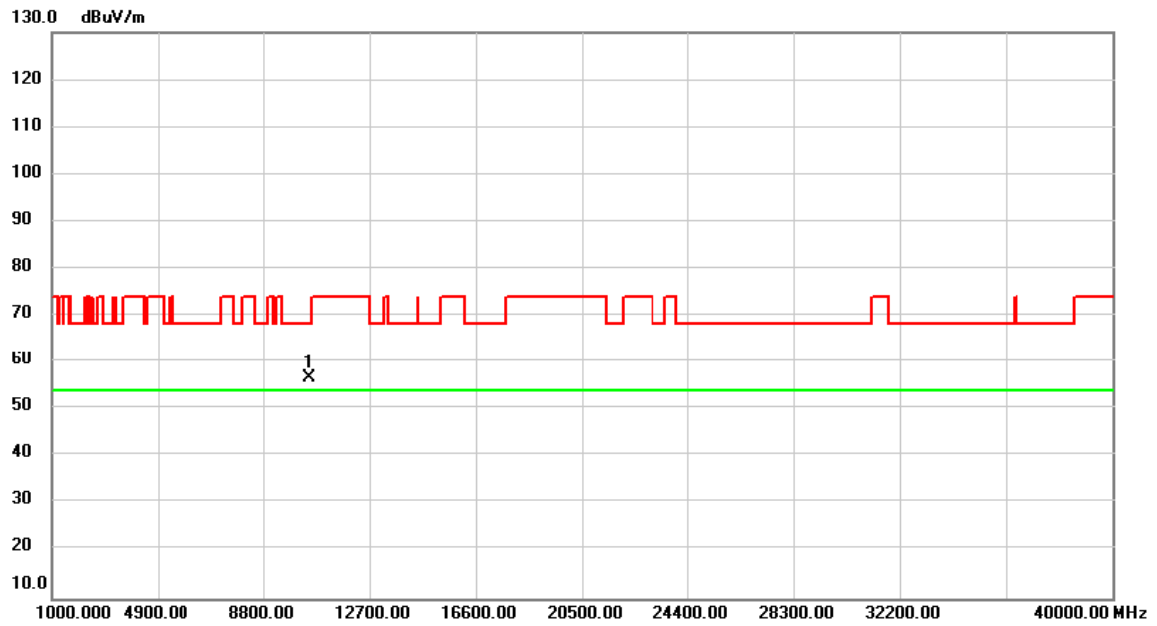


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	44.36	12.36	56.72	68.20	-11.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

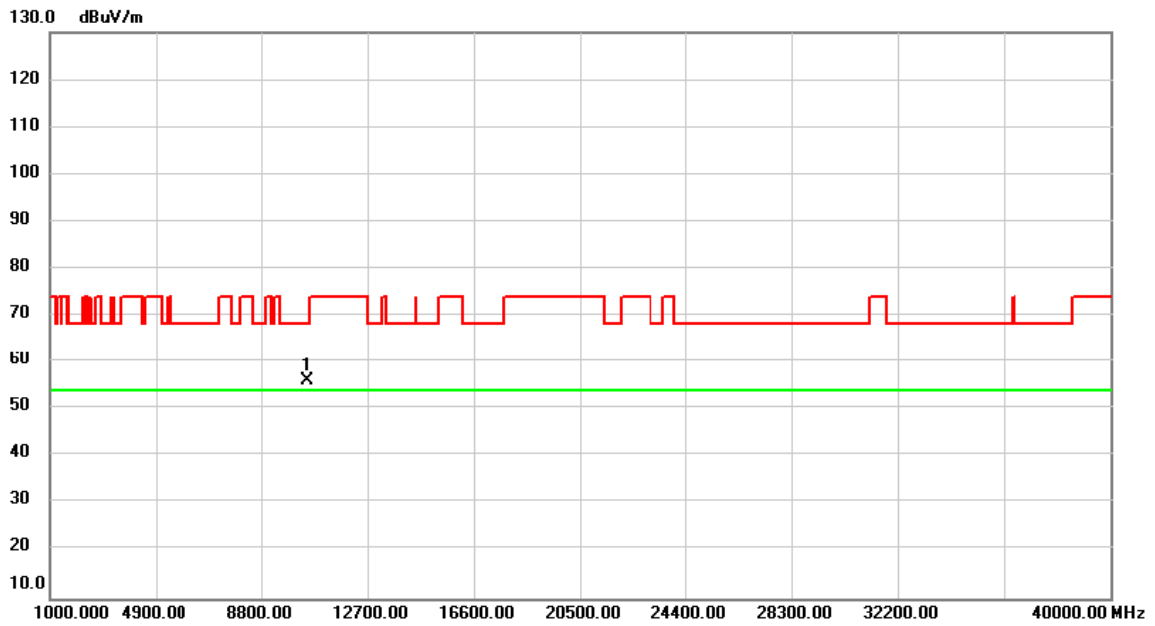


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	43.83	12.36	56.19	68.20	-12.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

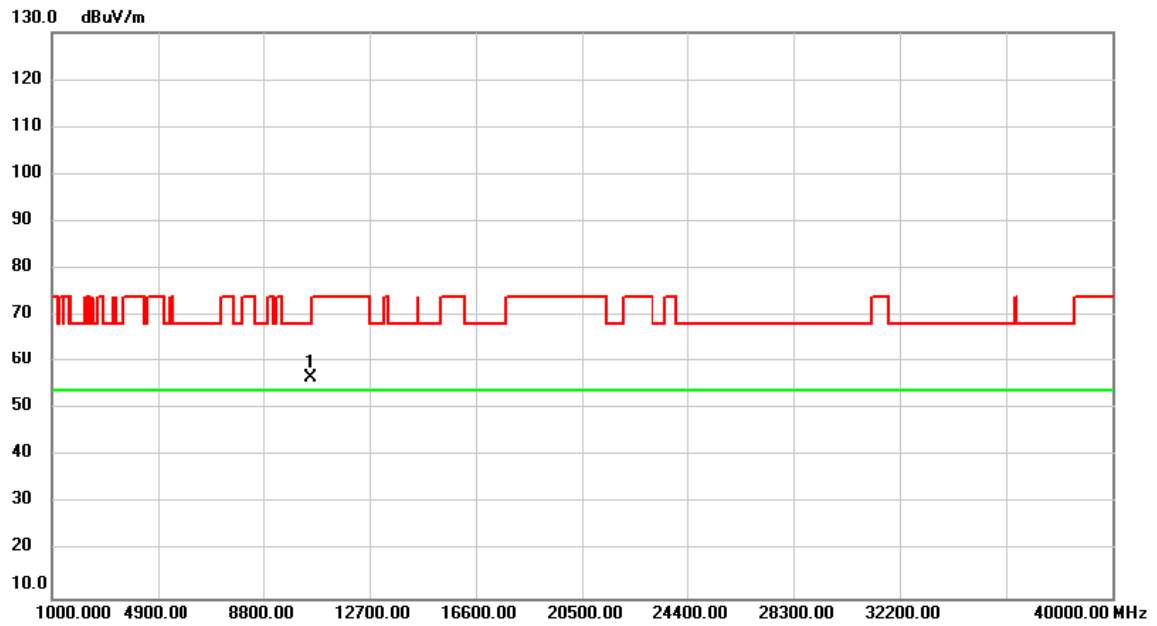


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	44.28	12.39	56.67	68.20	-11.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

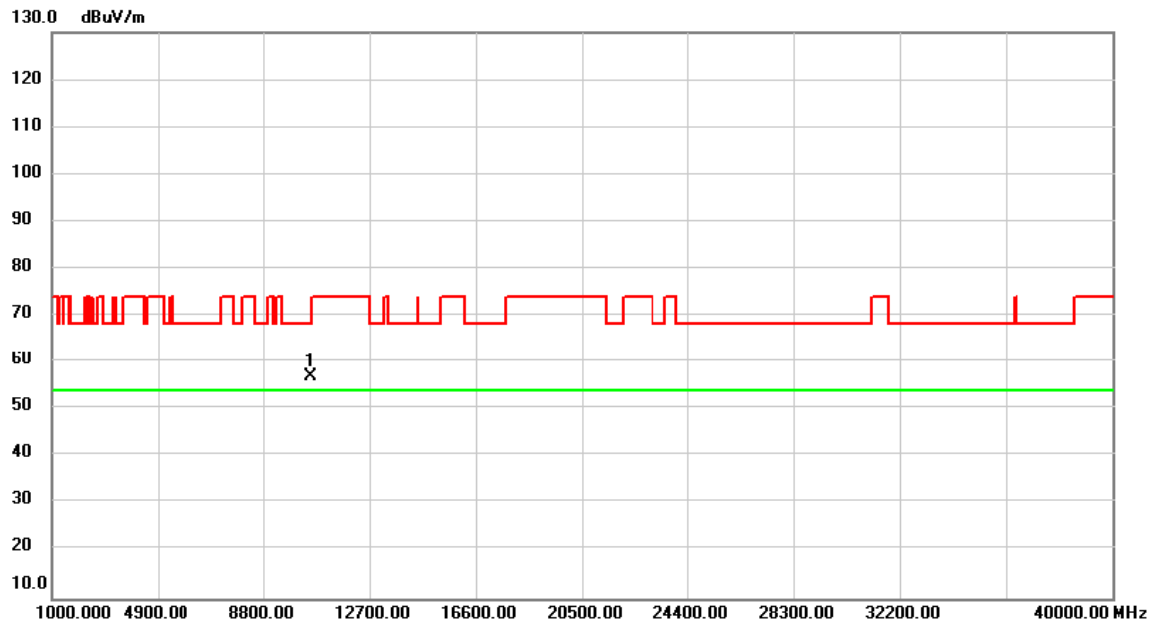


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	44.60	12.39	56.99	68.20	-11.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

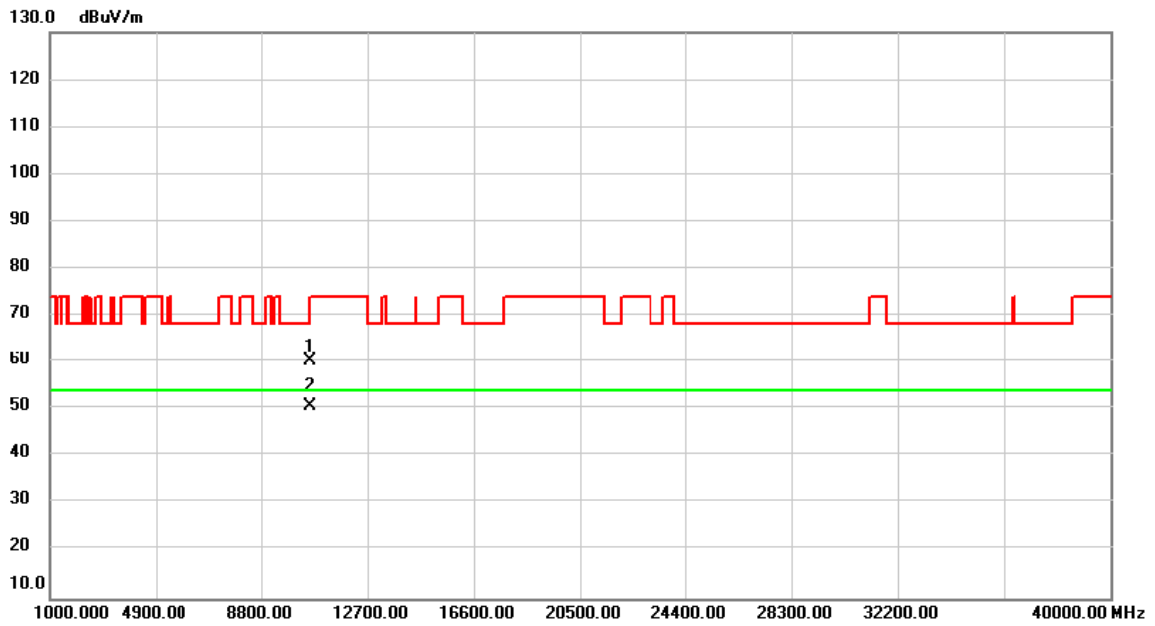


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	47.93	12.46	60.39	68.20	-7.81	peak	
2	*	10600.00	38.07	12.46	50.53	54.00	-3.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

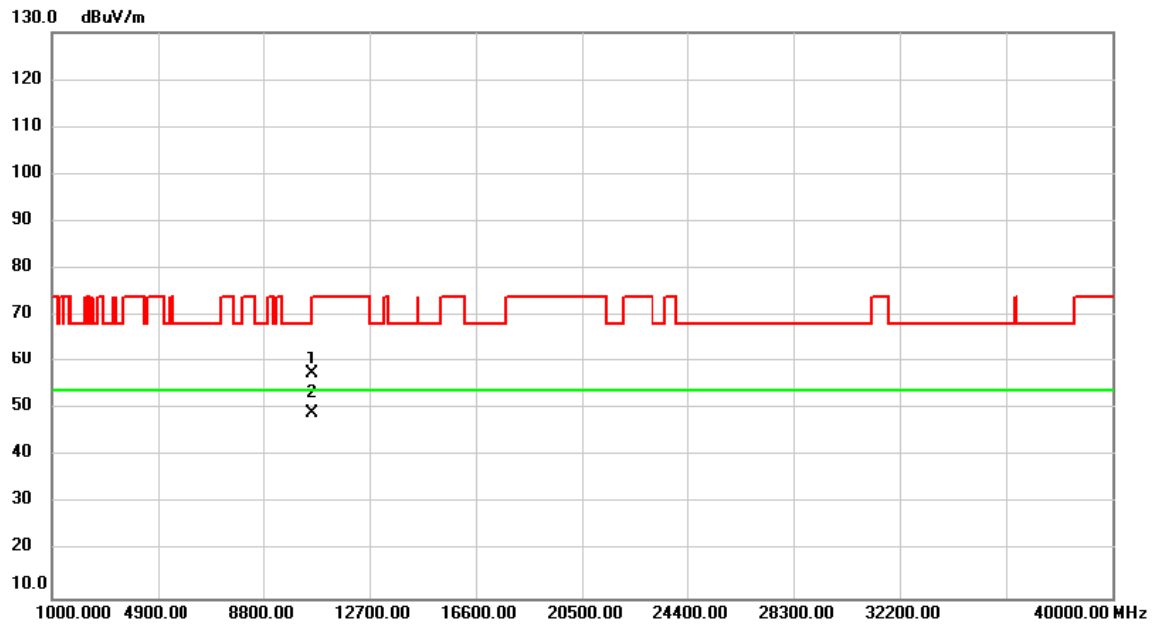


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	45.12	12.46	57.58	68.20	-10.62	peak	
2	*	10600.00	36.71	12.46	49.17	54.00	-4.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

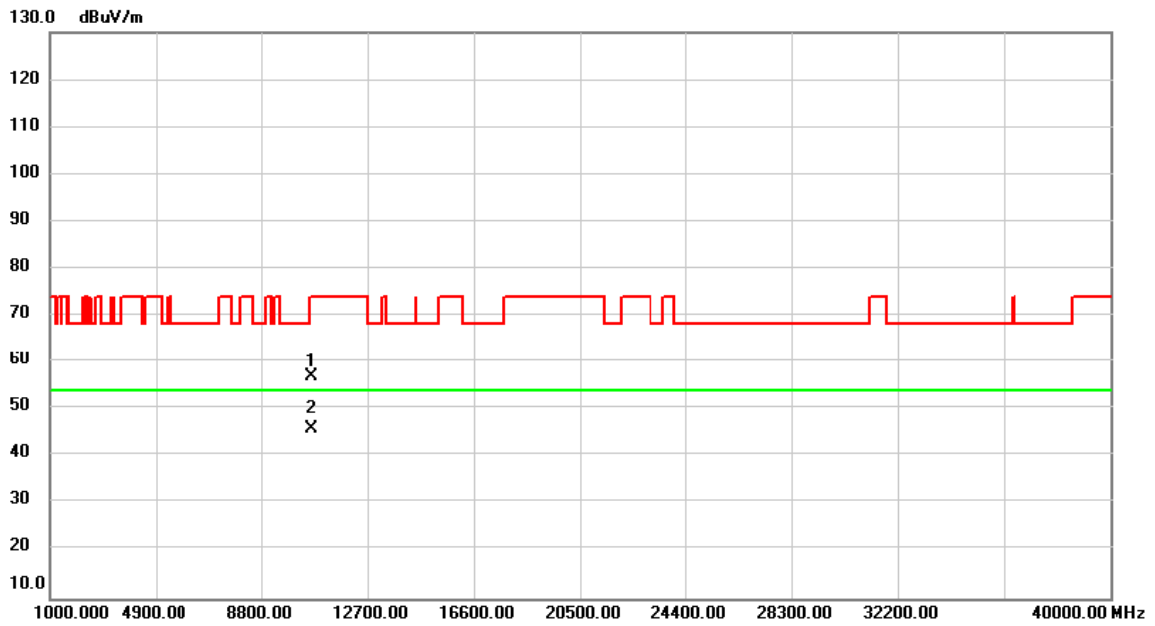


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	44.54	12.49	57.03	74.00	-16.97	peak	
2	*	10640.00	33.46	12.49	45.95	54.00	-8.05	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

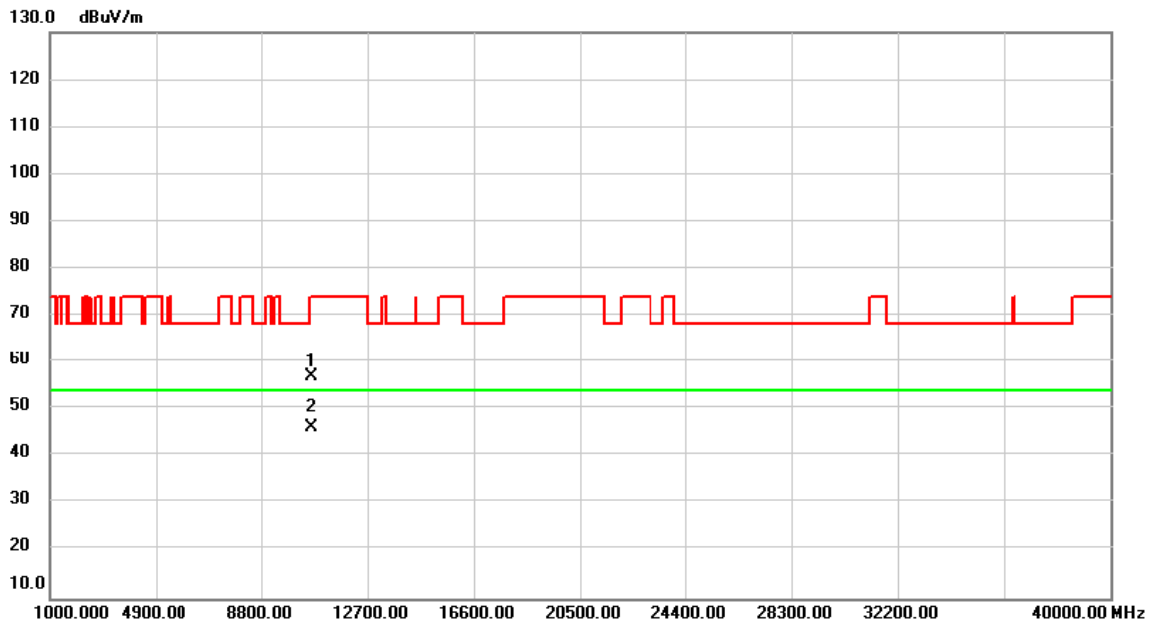


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	44.36	12.49	56.85	74.00	-17.15	peak	
2	*	10640.00	33.60	12.49	46.09	54.00	-7.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

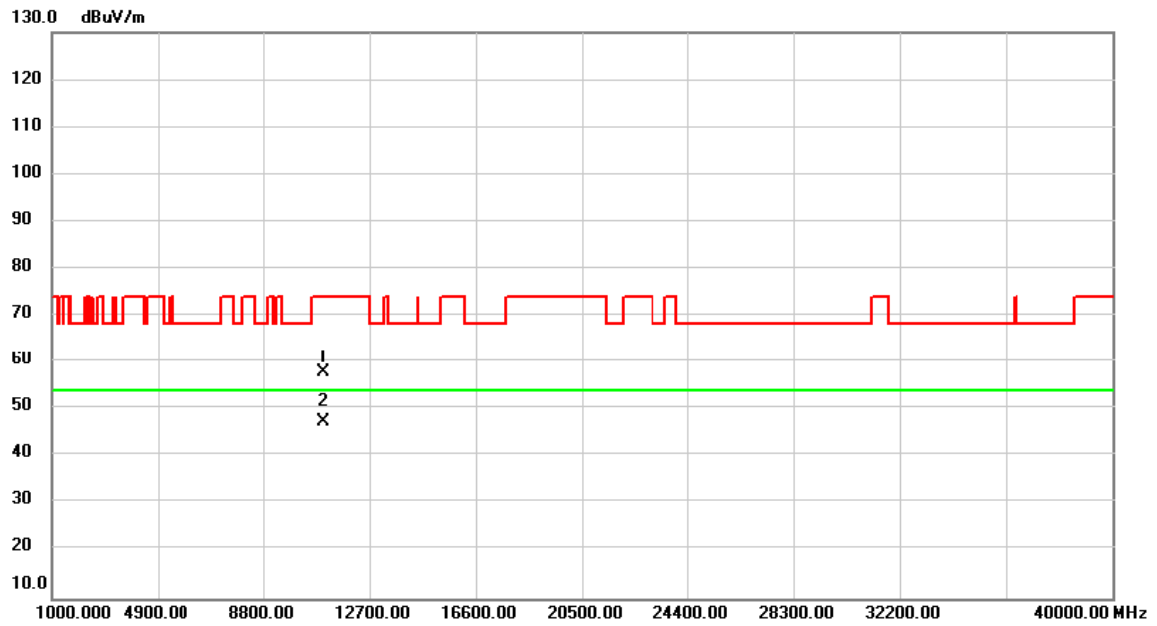


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.13	12.78	57.91	74.00	-16.09	peak	
2	*	11000.00	34.54	12.78	47.32	54.00	-6.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

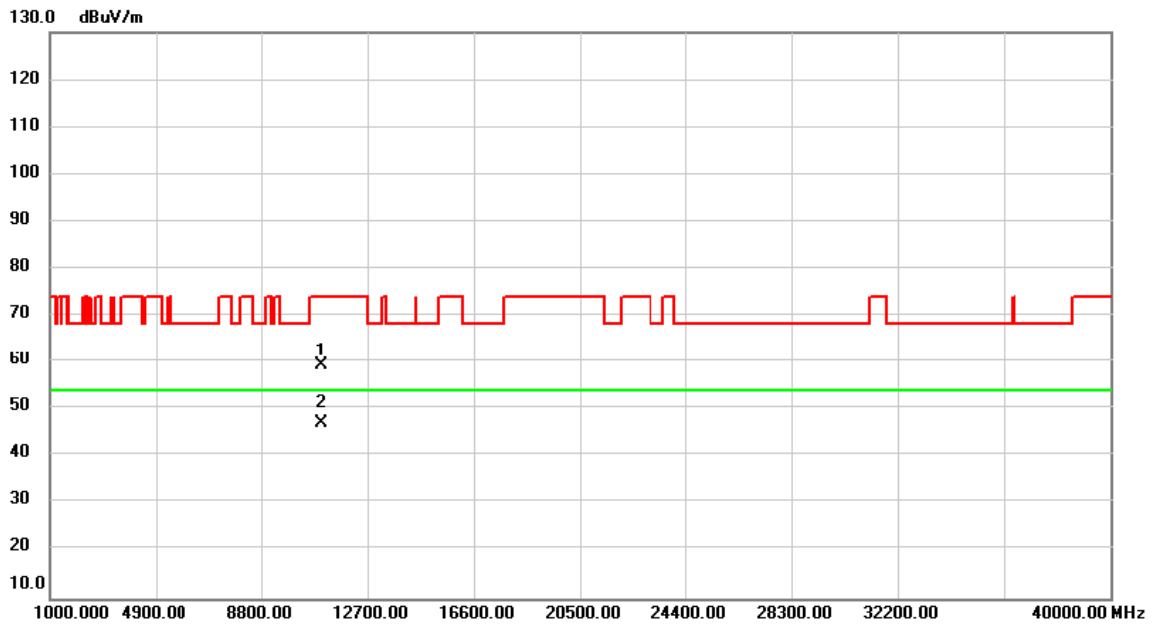


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.55	12.78	59.33	74.00	-14.67	peak	
2	*	11000.00	34.26	12.78	47.04	54.00	-6.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

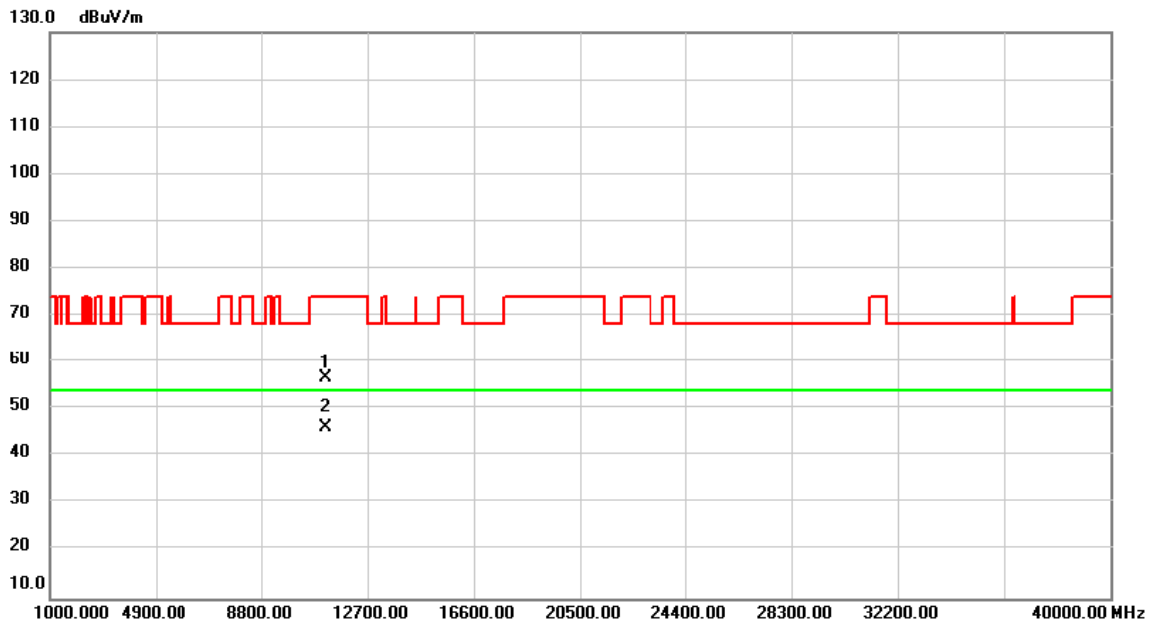


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	43.67	12.90	56.57	74.00	-17.43	peak	
2	*	11160.00	33.13	12.90	46.03	54.00	-7.97	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

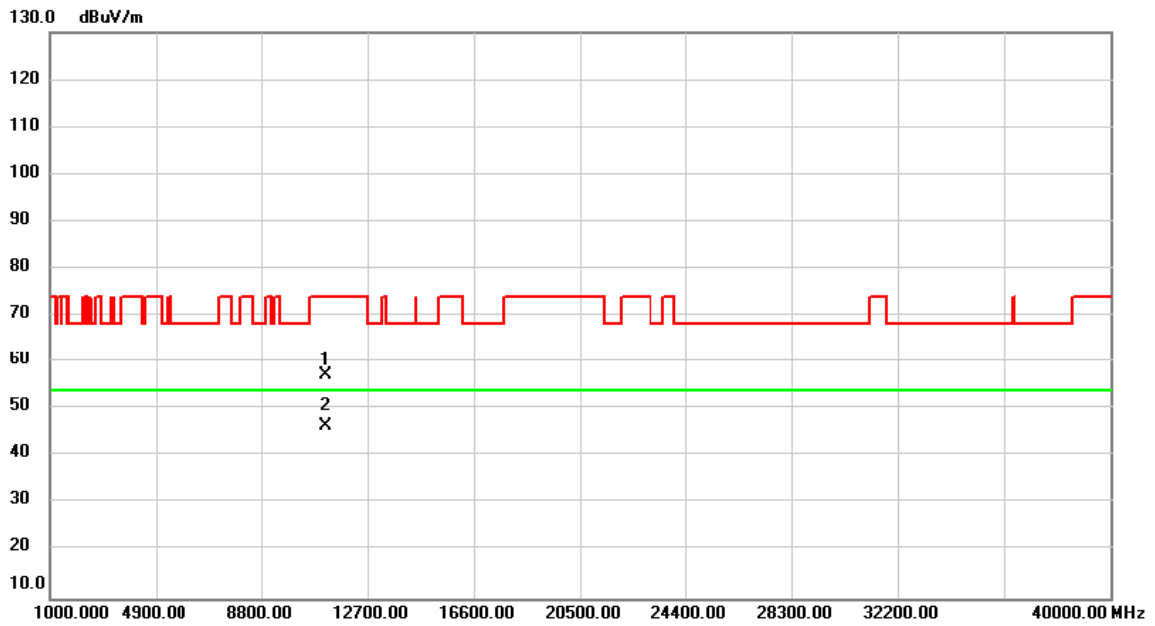


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	44.26	12.90	57.16	74.00	-16.84	peak	
2	*	11160.00	33.63	12.90	46.53	54.00	-7.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

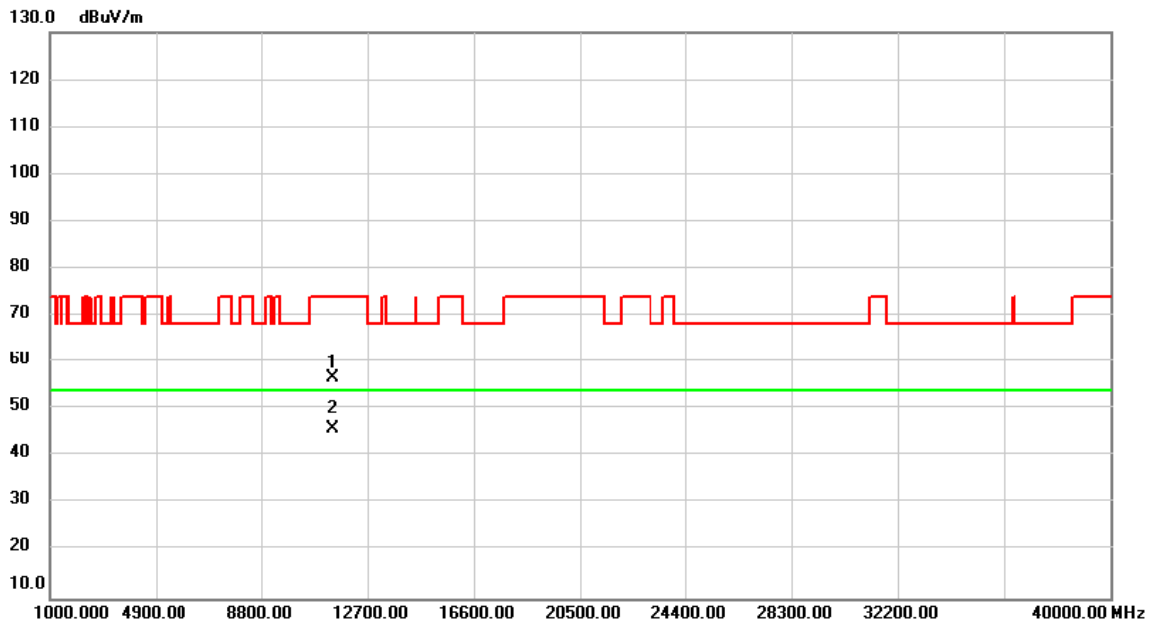


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	43.44	13.08	56.52	74.00	-17.48	peak	
2	*	11400.00	32.67	13.08	45.75	54.00	-8.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

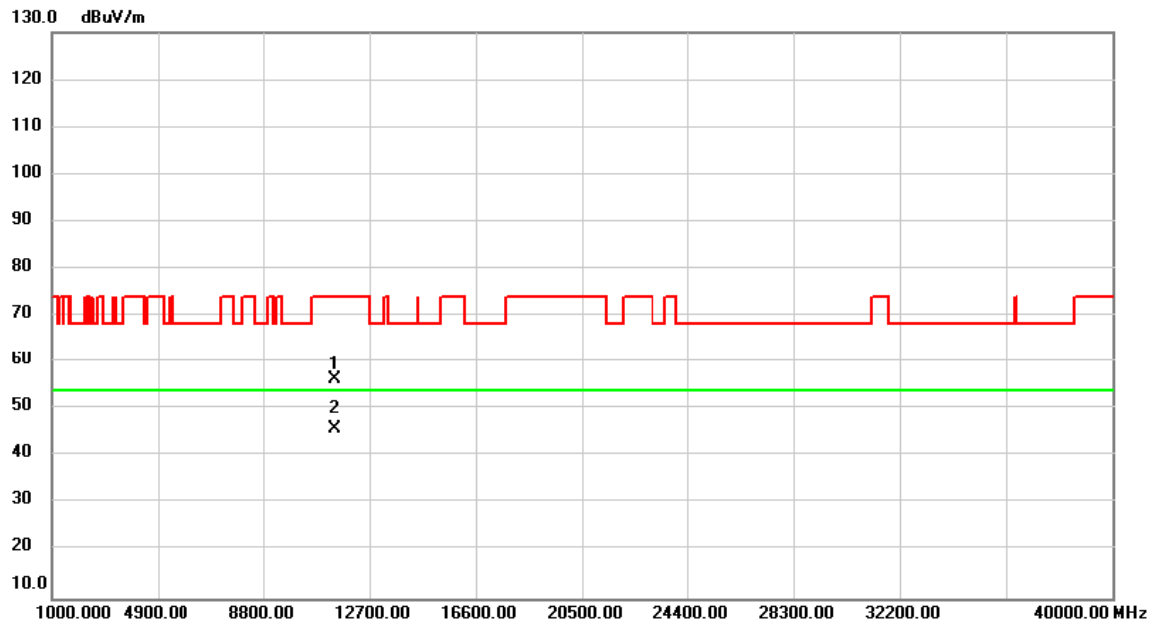


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	43.41	13.08	56.49	74.00	-17.51	peak	
2	*	11400.00	32.76	13.08	45.84	54.00	-8.16	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

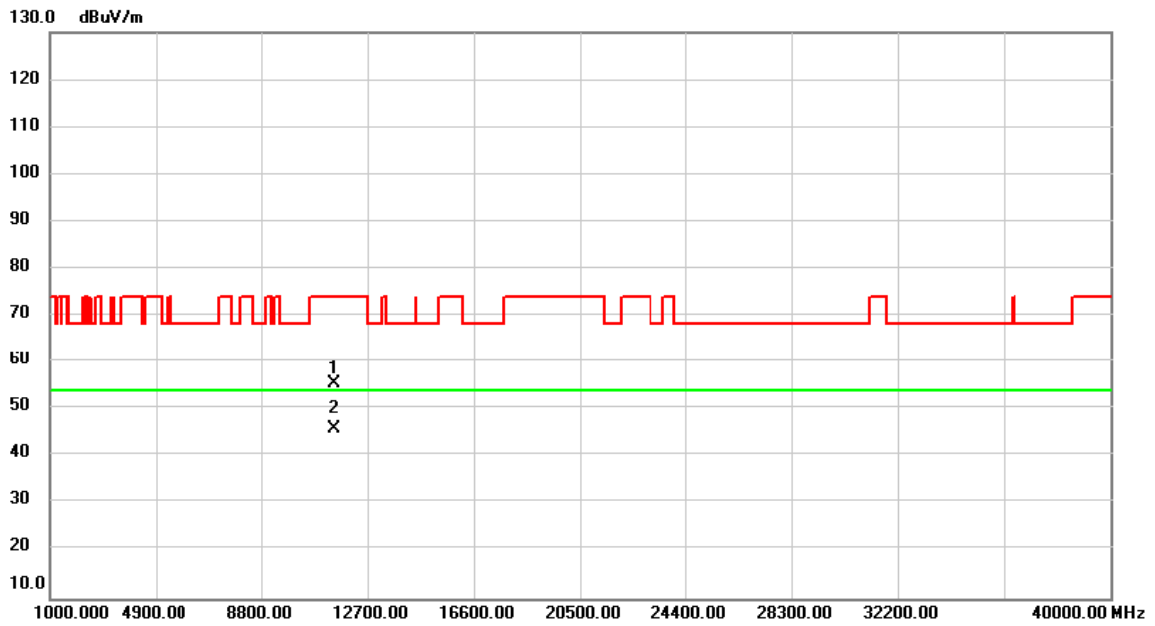


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	42.45	13.14	55.59	74.00	-18.41	peak	
2	*	11490.00	32.76	13.14	45.90	54.00	-8.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IIEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

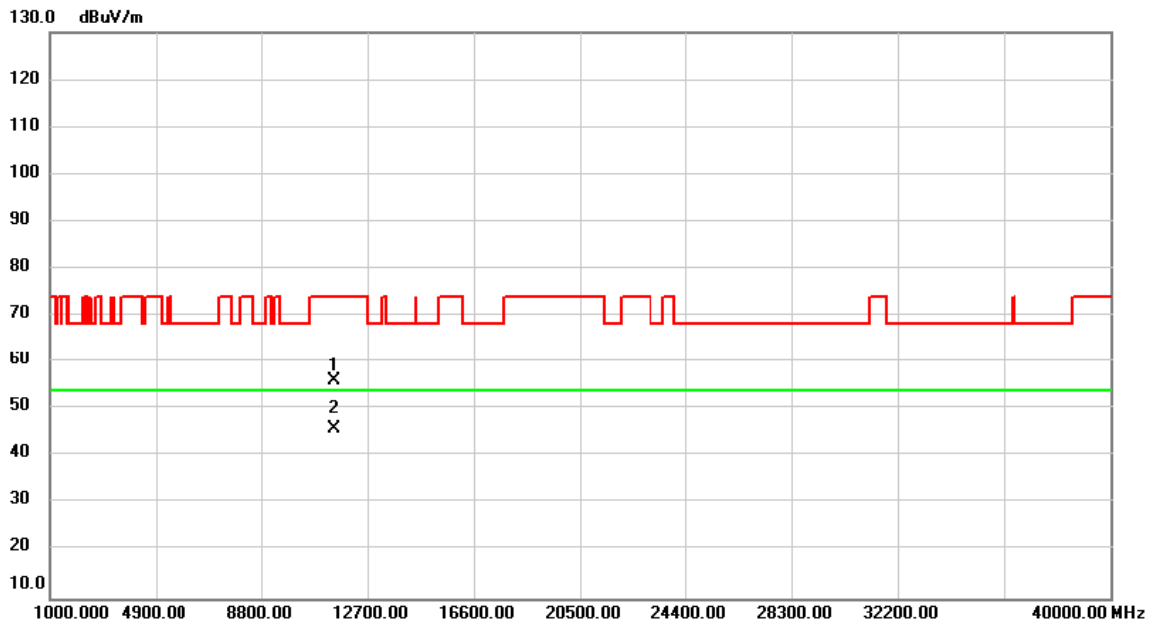


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	42.89	13.14	56.03	74.00	-17.97	peak	
2	*	11490.00	32.58	13.14	45.72	54.00	-8.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

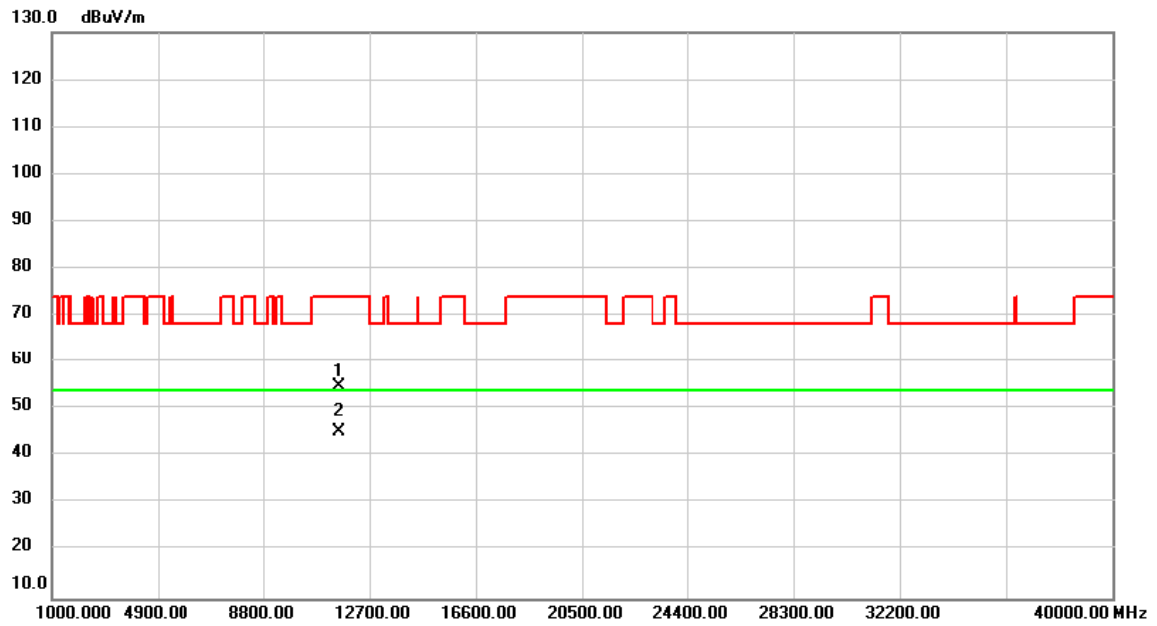


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	41.60	13.20	54.80	74.00	-19.20	peak	
2	*	11570.00	32.15	13.20	45.35	54.00	-8.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

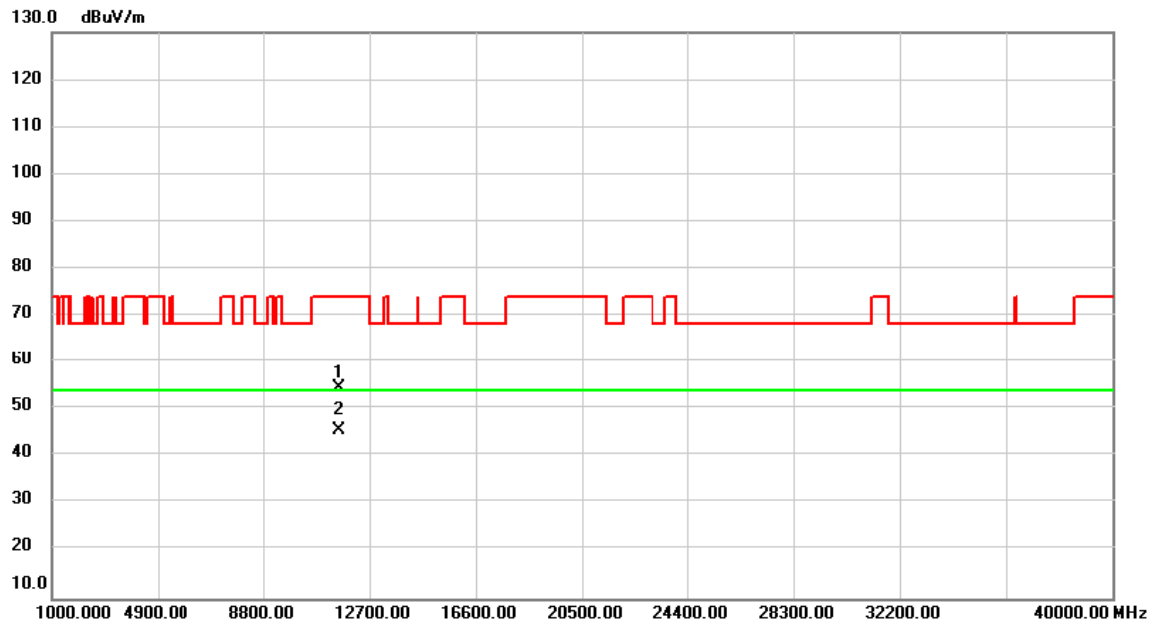


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	41.46	13.20	54.66	74.00	-19.34	peak	
2	*	11570.00	32.40	13.20	45.60	54.00	-8.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

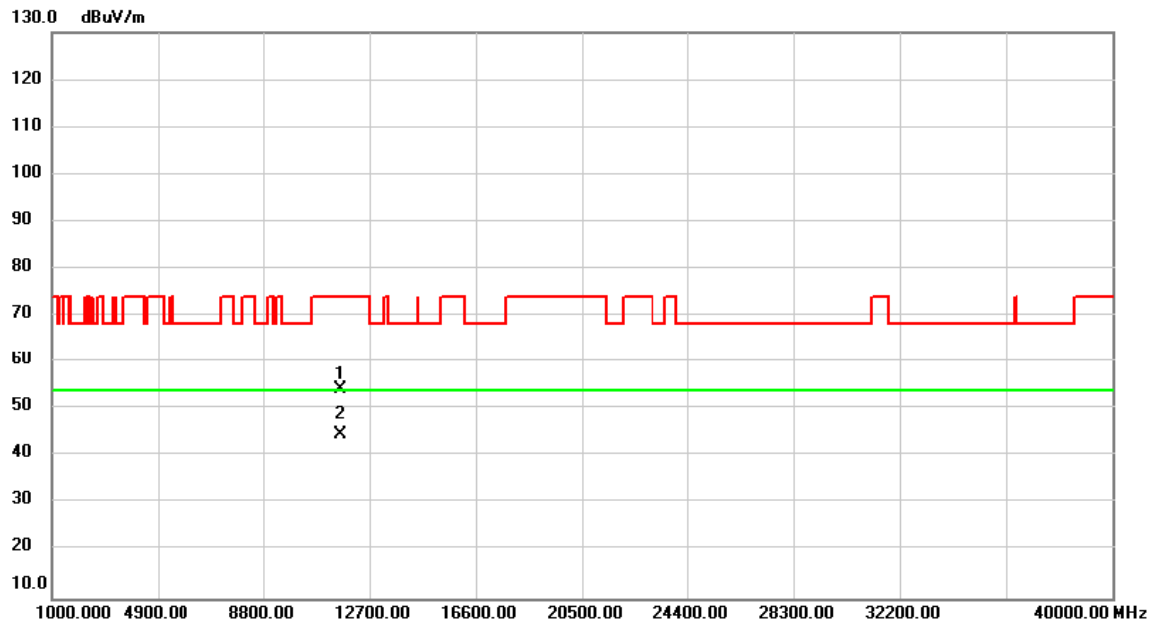


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	41.13	13.25	54.38	74.00	-19.62	peak	
2	*	11650.00	31.36	13.25	44.61	54.00	-9.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11a	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

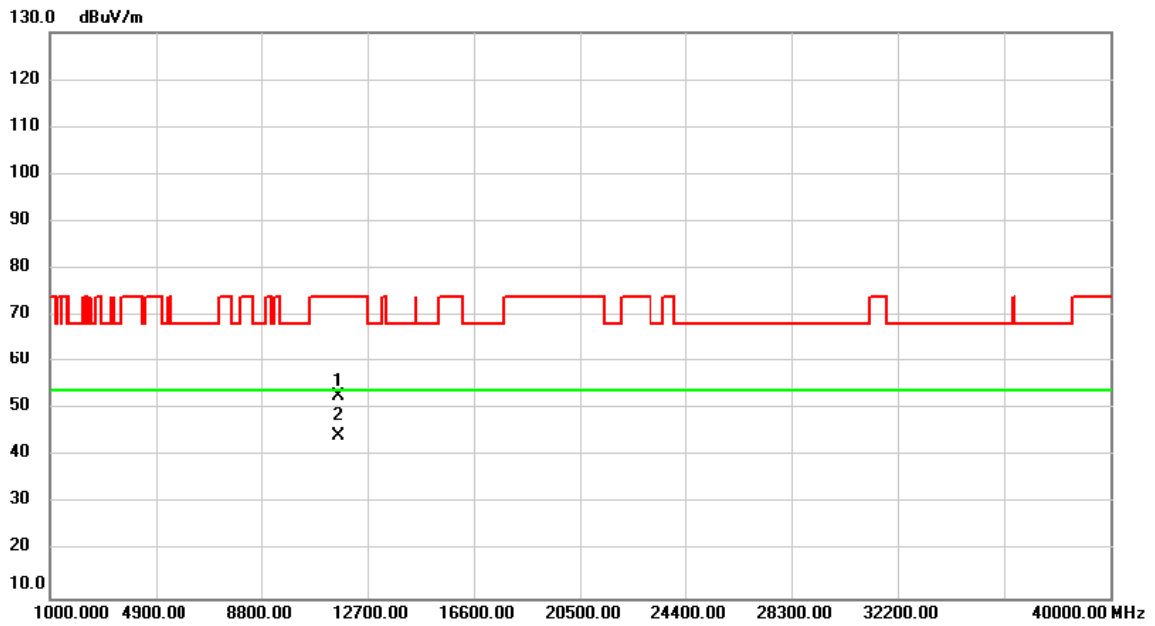


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	39.51	13.25	52.76	74.00	-21.24	peak	
2	*	11650.00	31.23	13.25	44.48	54.00	-9.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

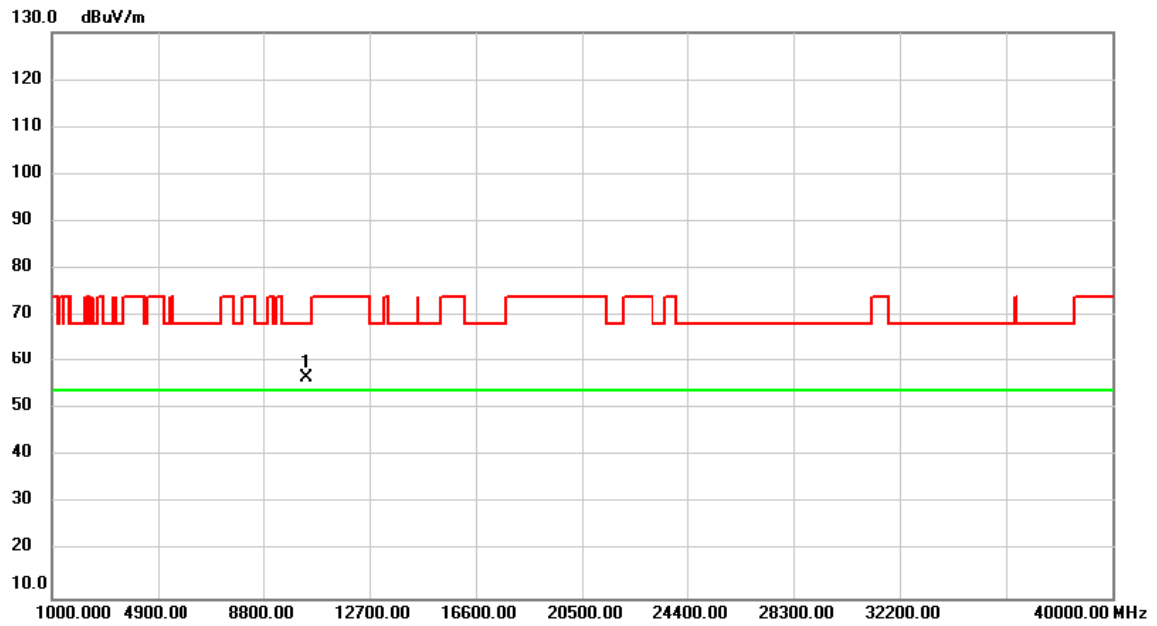


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	44.41	12.29	56.70	68.20	-11.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

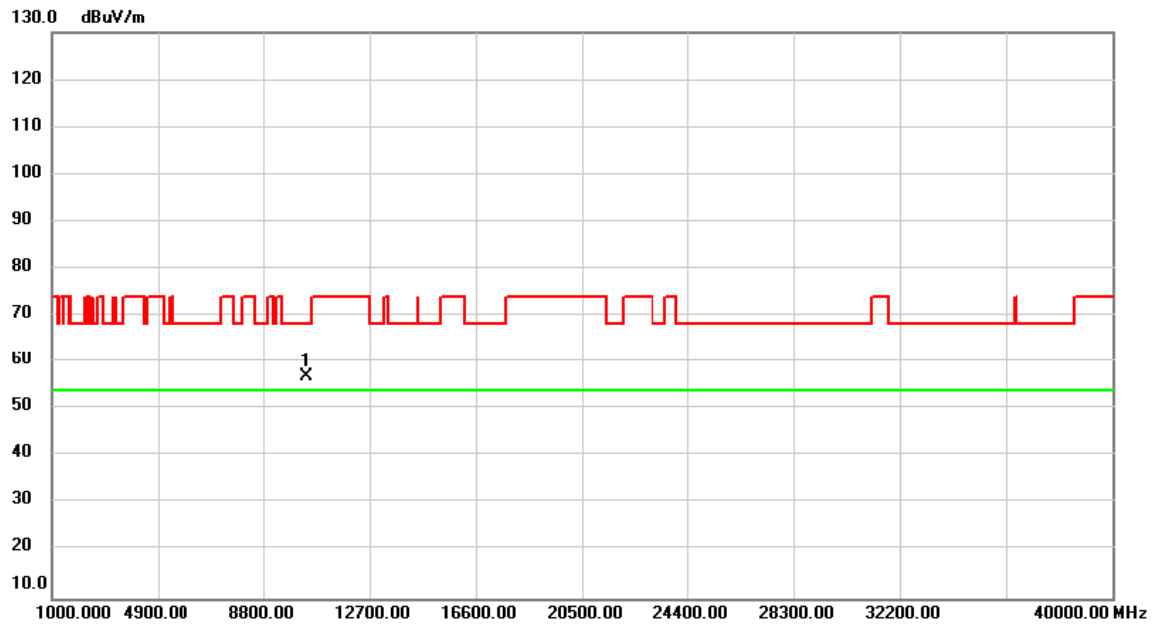


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	44.74	12.29	57.03	68.20	-11.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

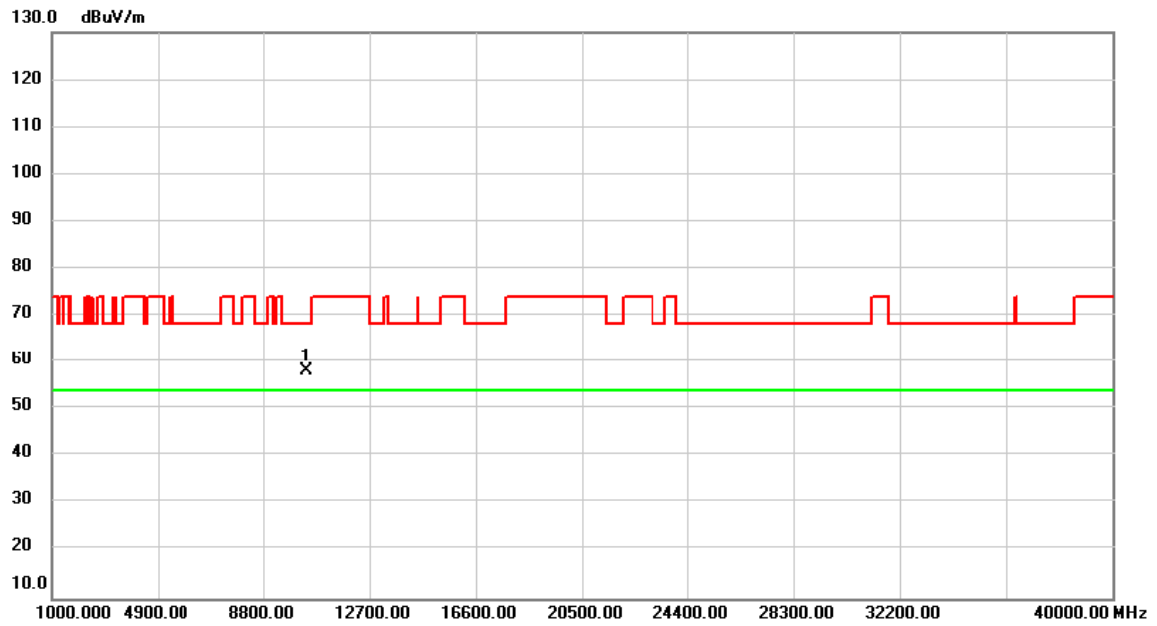


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	45.76	12.31	58.07	68.20	-10.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

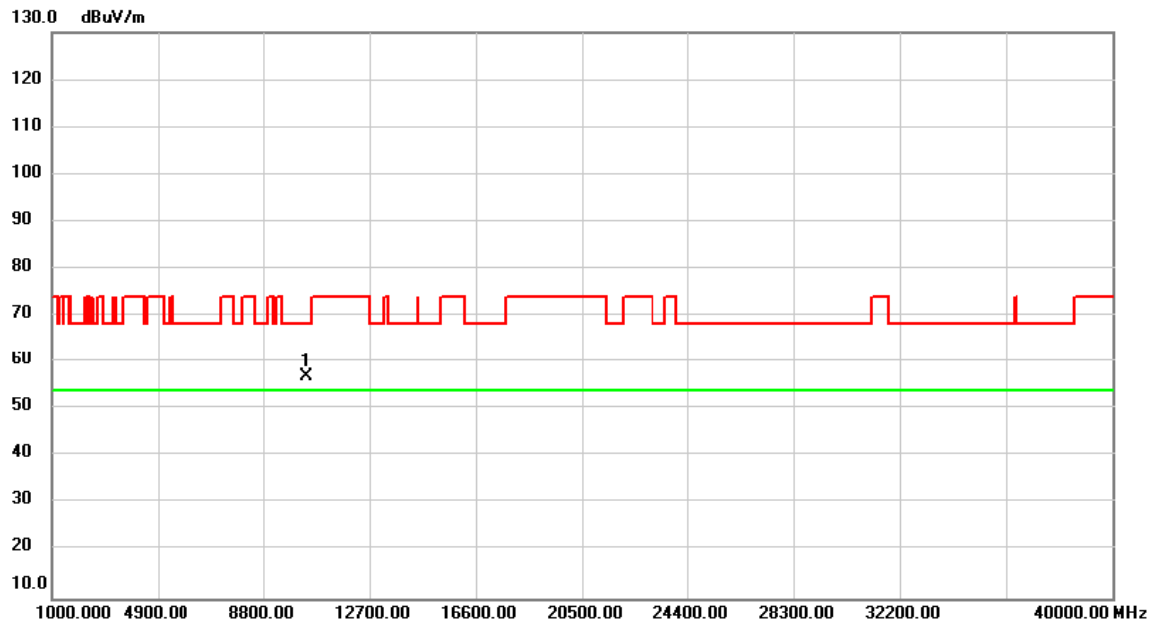


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	44.63	12.31	56.94	68.20	-11.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

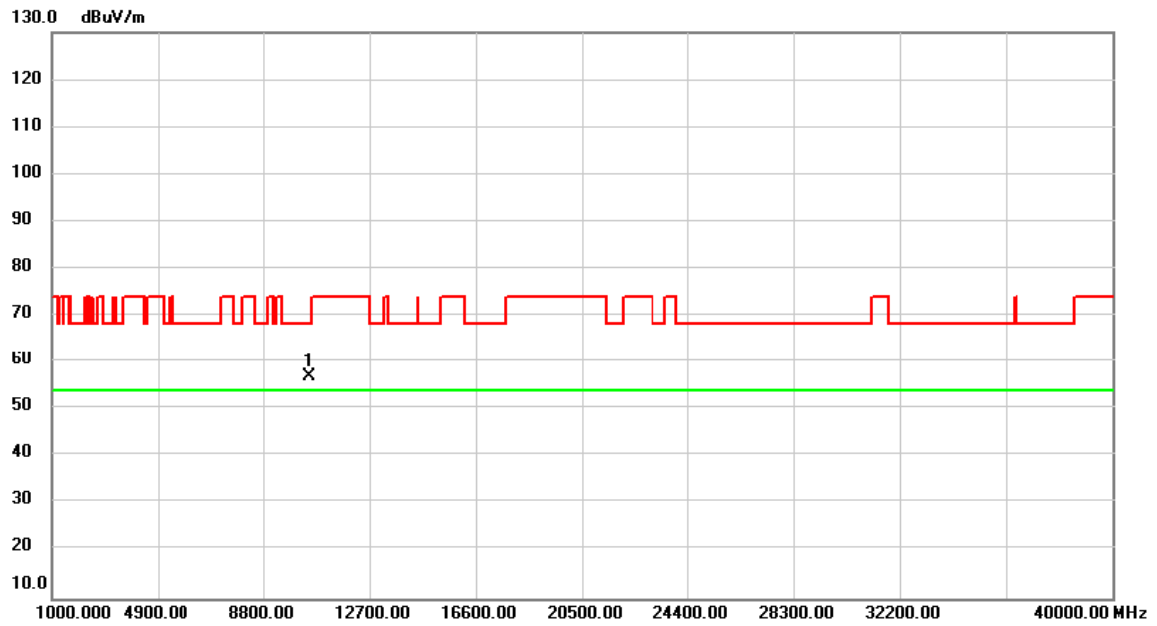


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	44.64	12.36	57.00	68.20	-11.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

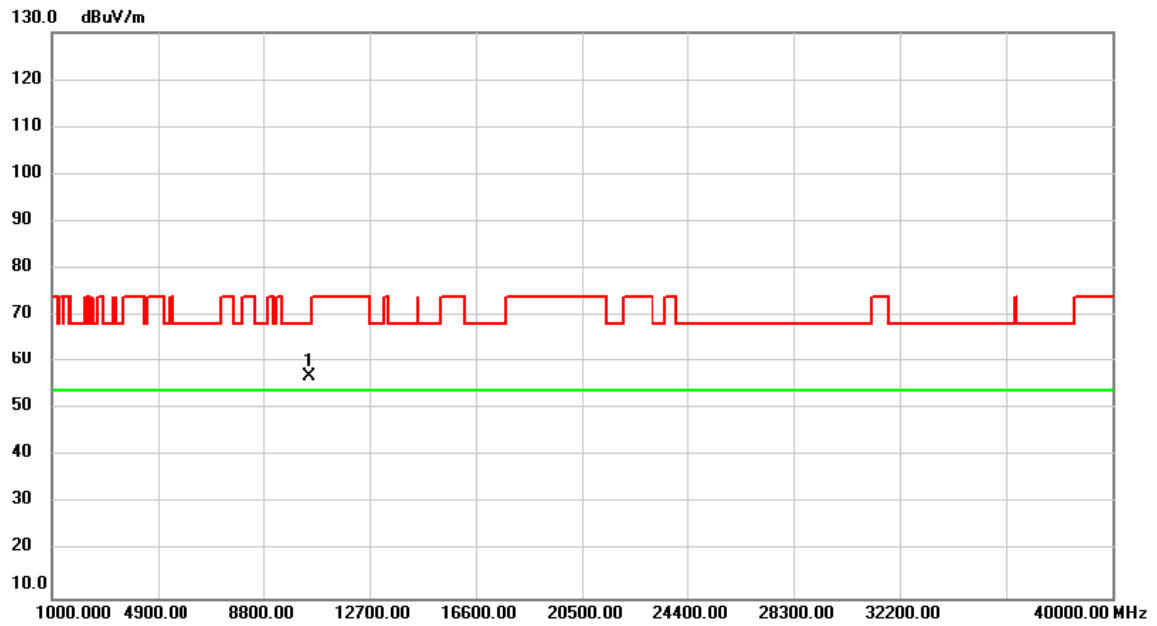


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	44.62	12.36	56.98	68.20	-11.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

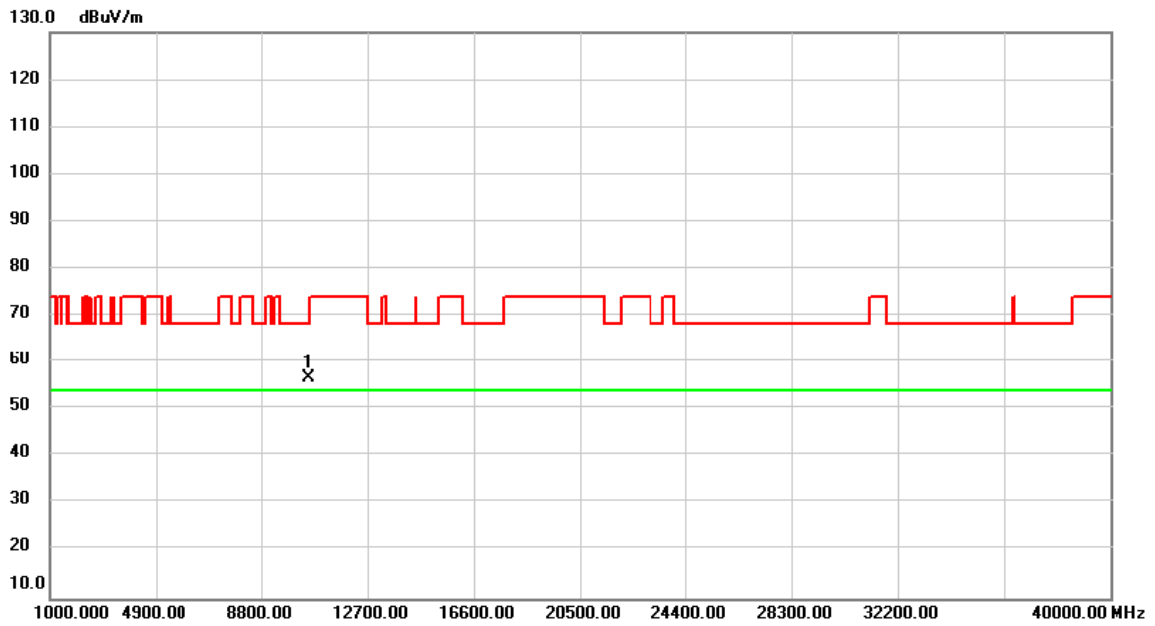


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	44.23	12.39	56.62	68.20	-11.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

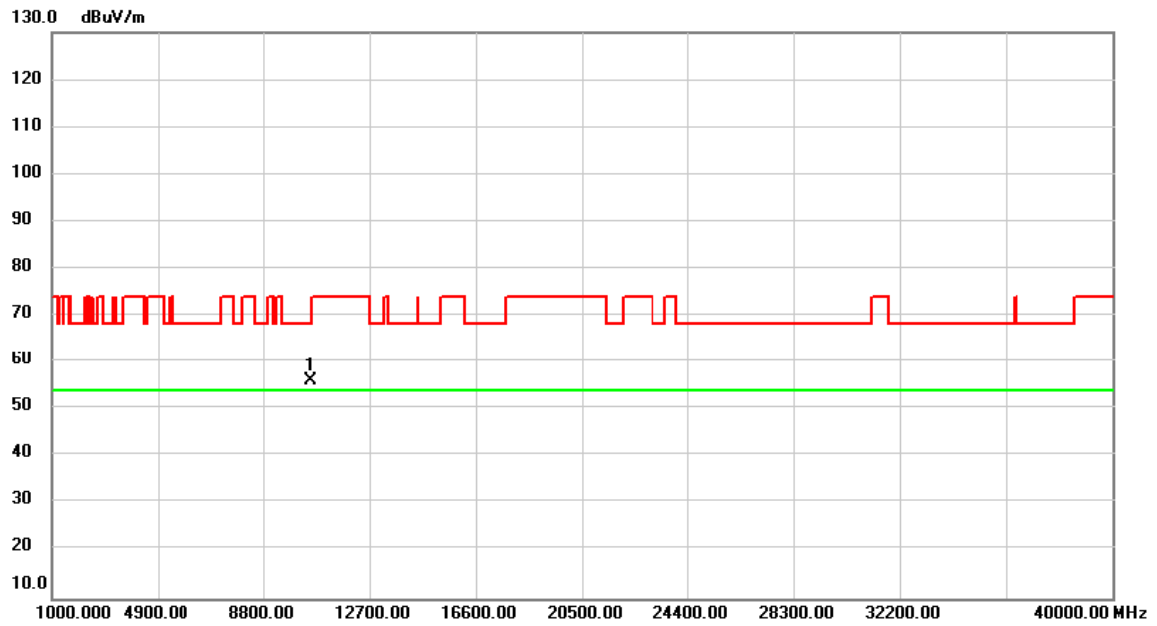


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	43.64	12.39	56.03	68.20	-12.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

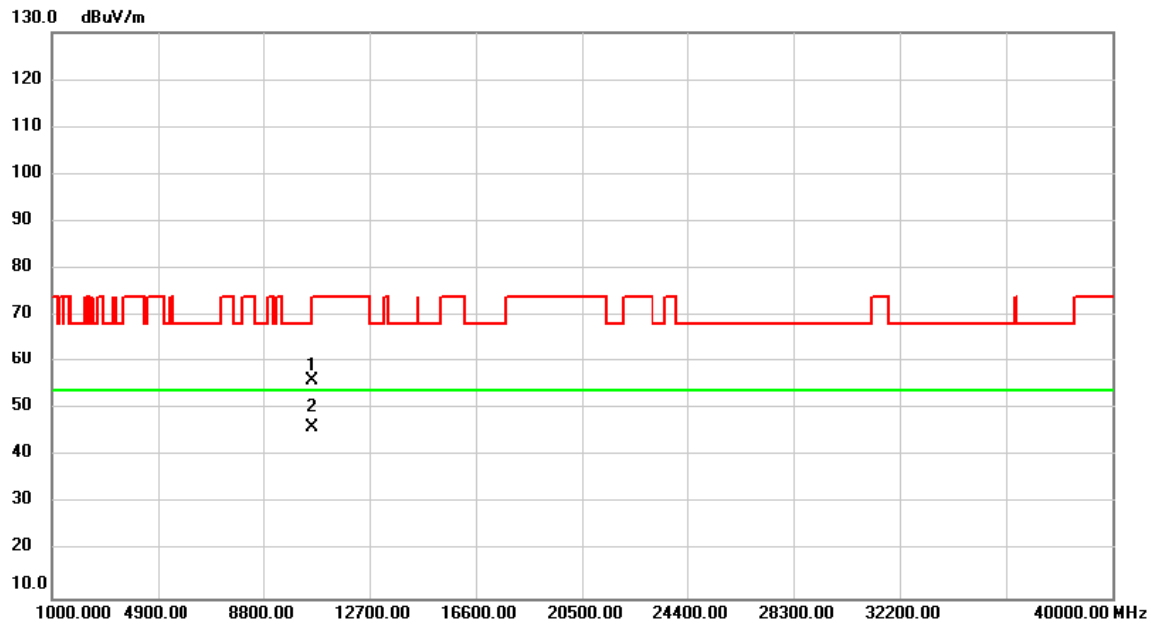


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	43.72	12.46	56.18	68.20	-12.02	peak	
2	*	10600.00	33.71	12.46	46.17	54.00	-7.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

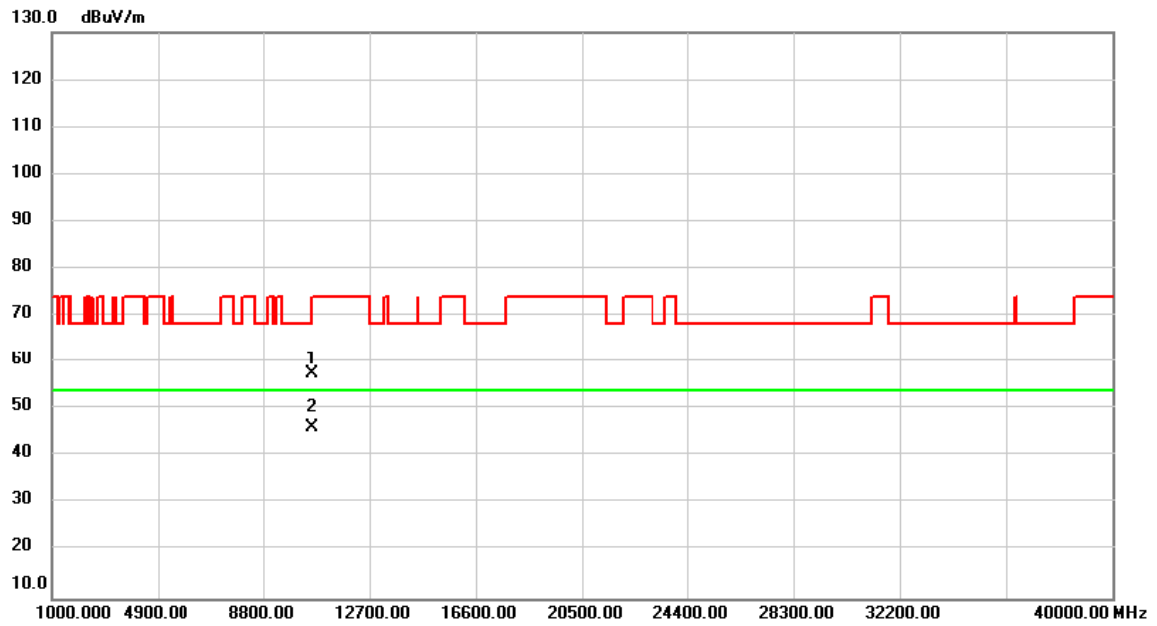


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	45.03	12.46	57.49	68.20	-10.71	peak	
2	*	10600.00	33.68	12.46	46.14	54.00	-7.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

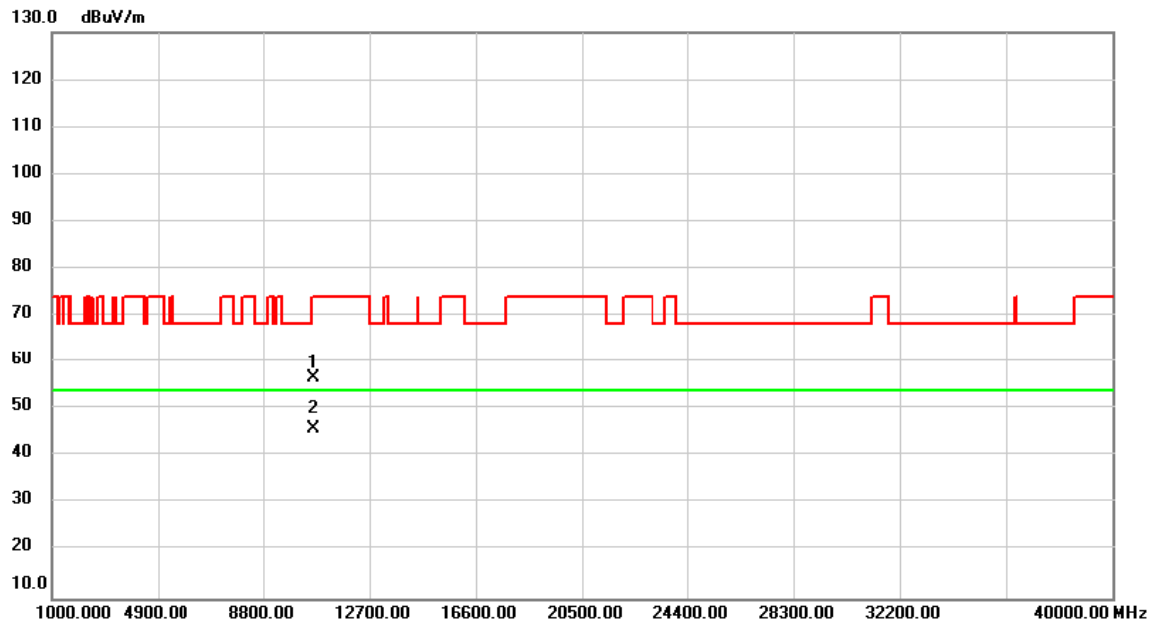


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	44.23	12.49	56.72	74.00	-17.28	peak	
2	*	10640.00	33.38	12.49	45.87	54.00	-8.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

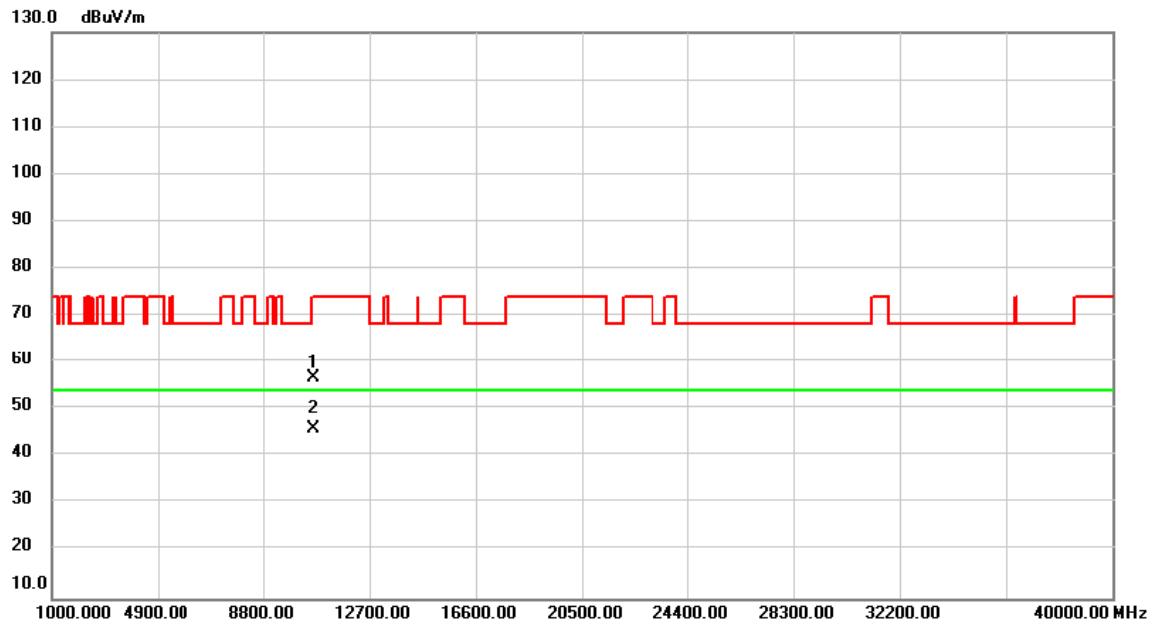


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	44.26	12.49	56.75	74.00	-17.25	peak	
2	*	10640.00	33.46	12.49	45.95	54.00	-8.05	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

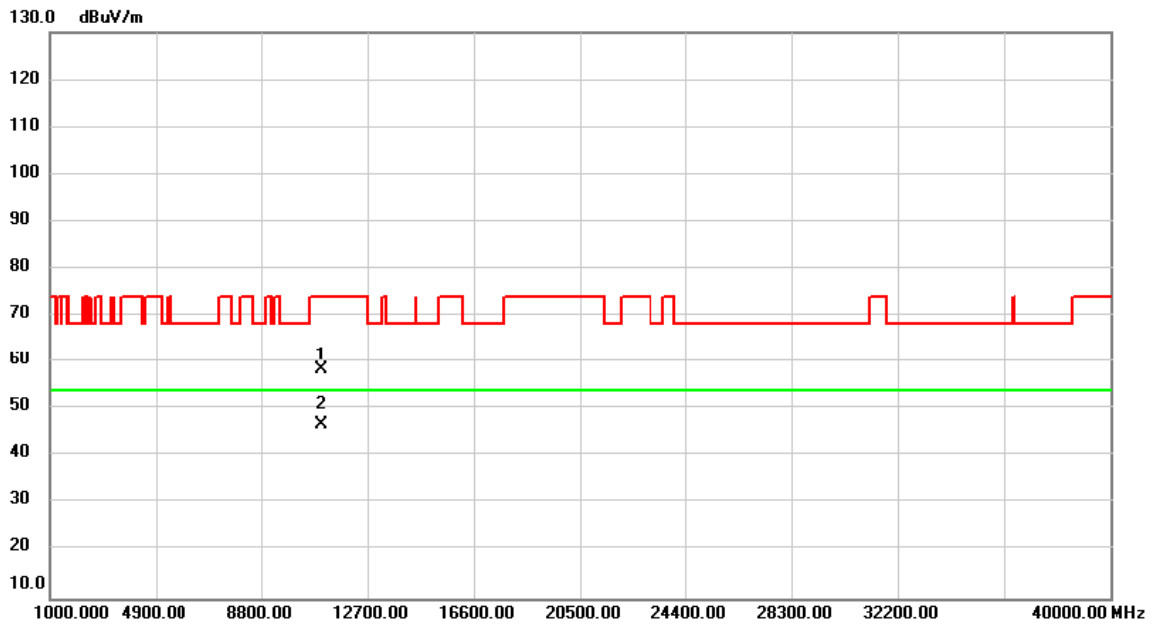


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.79	12.78	58.57	74.00	-15.43	peak	
2	*	11000.00	33.93	12.78	46.71	54.00	-7.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

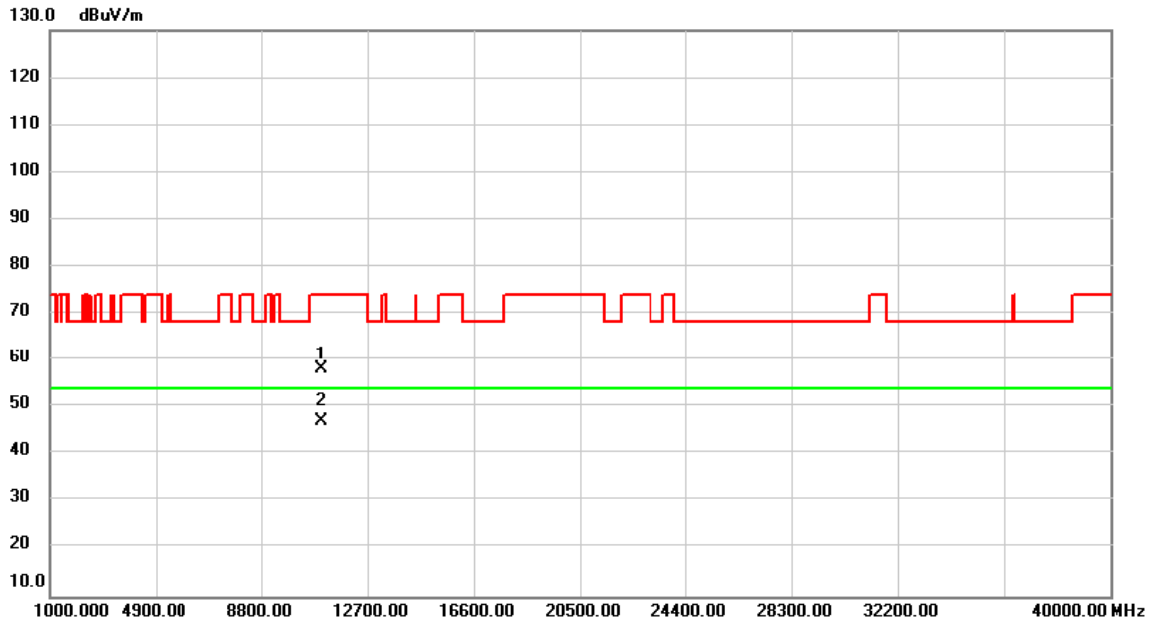


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.38	12.78	58.16	74.00	-15.84	peak	
2	*	11000.00	34.35	12.78	47.13	54.00	-6.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

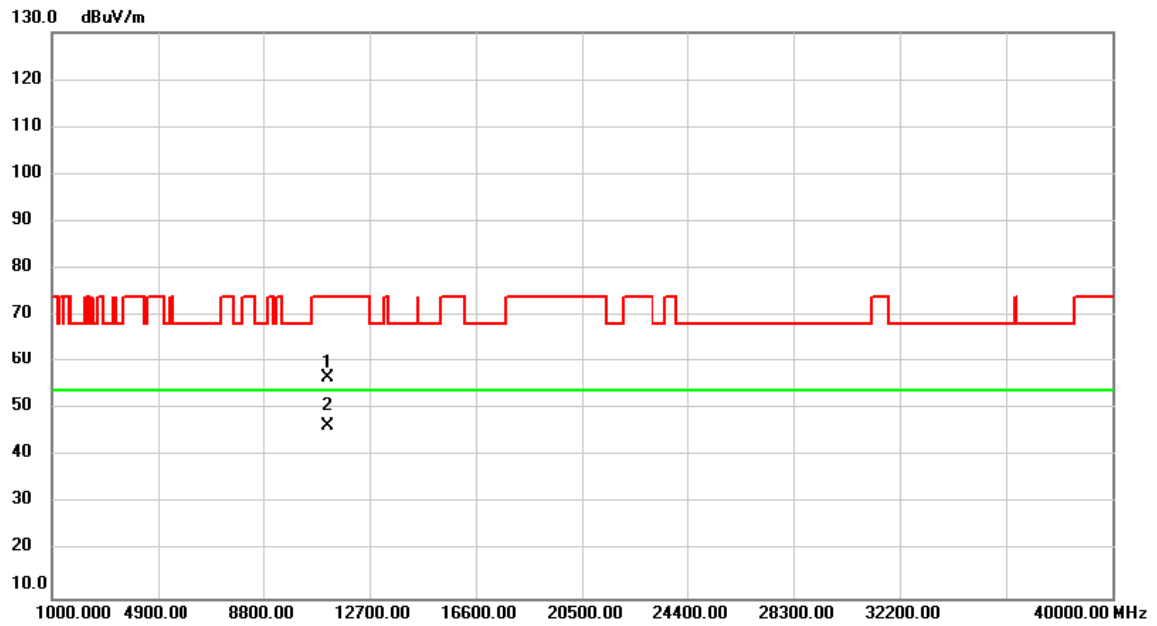


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	43.78	12.90	56.68	74.00	-17.32	peak	
2	*	11160.00	33.59	12.90	46.49	54.00	-7.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

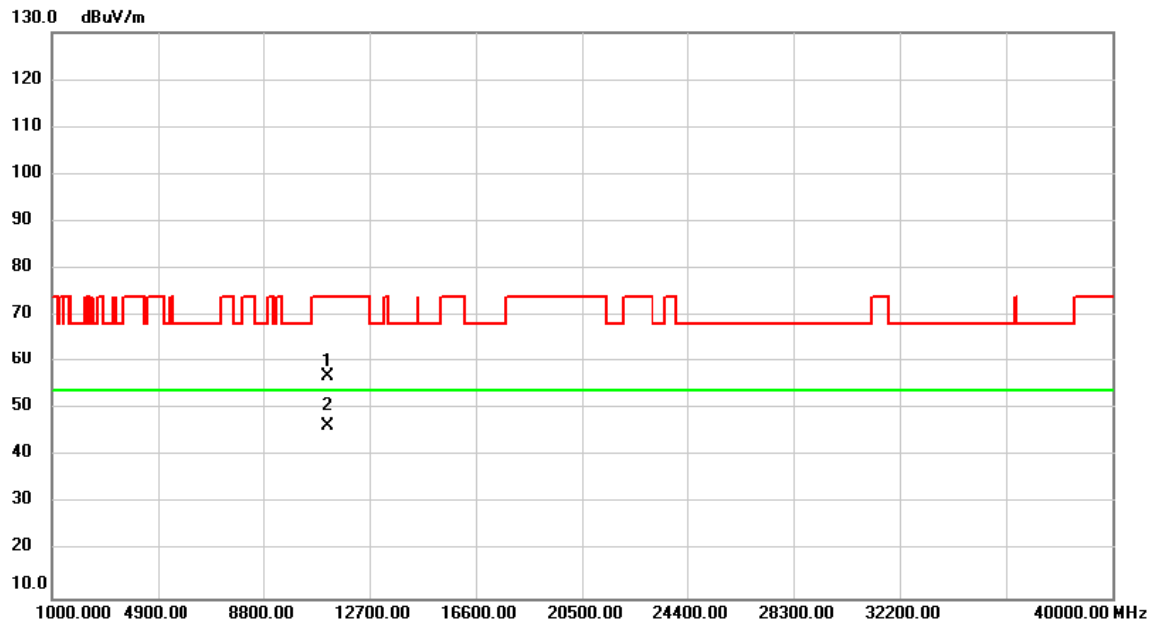


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	43.91	12.90	56.81	74.00	-17.19	peak	
2	*	11160.00	33.44	12.90	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

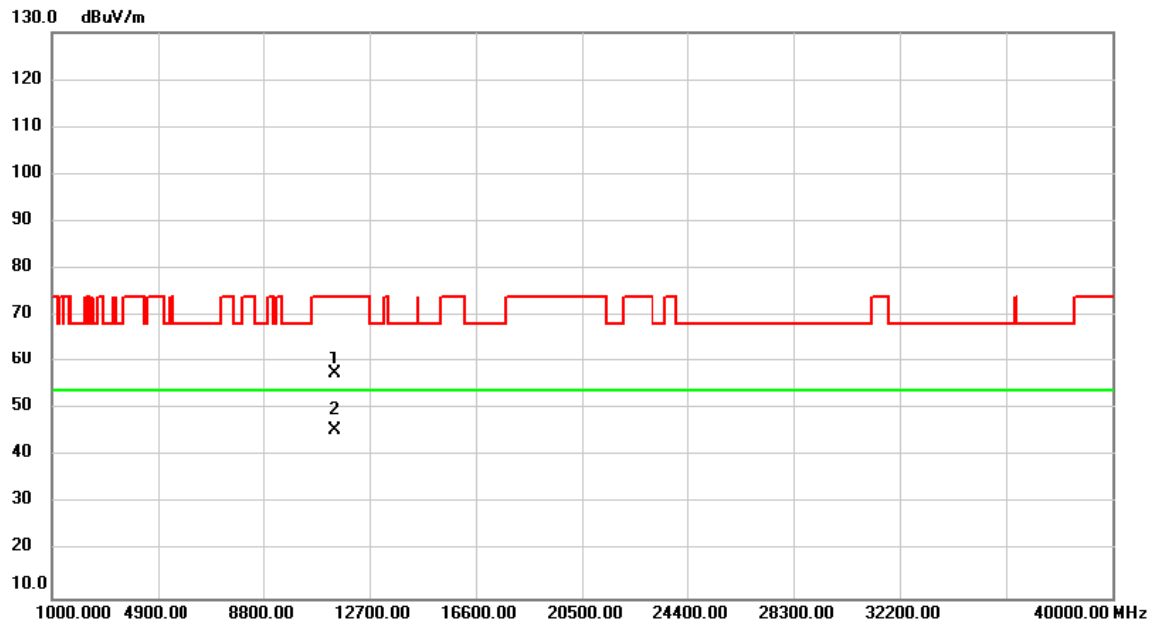


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	44.50	13.08	57.58	74.00	-16.42	peak	
2	*	11400.00	32.53	13.08	45.61	54.00	-8.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

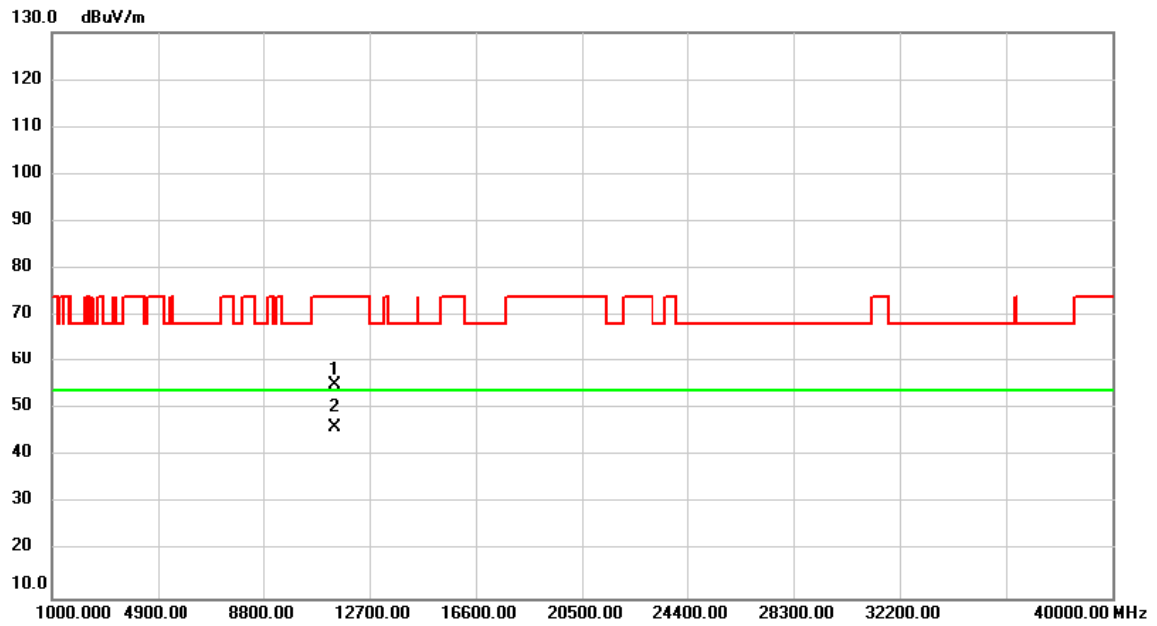


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	42.20	13.08	55.28	74.00	-18.72	peak	
2	*	11400.00	32.95	13.08	46.03	54.00	-7.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

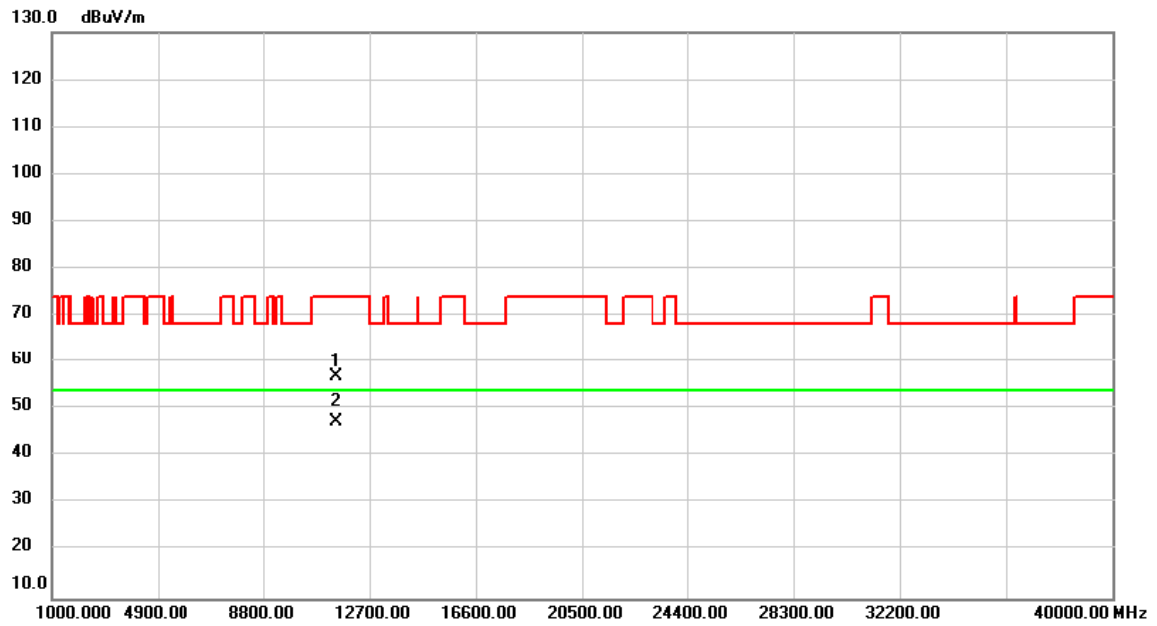


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	43.95	13.14	57.09	74.00	-16.91	peak	
2	*	11490.00	34.07	13.14	47.21	54.00	-6.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

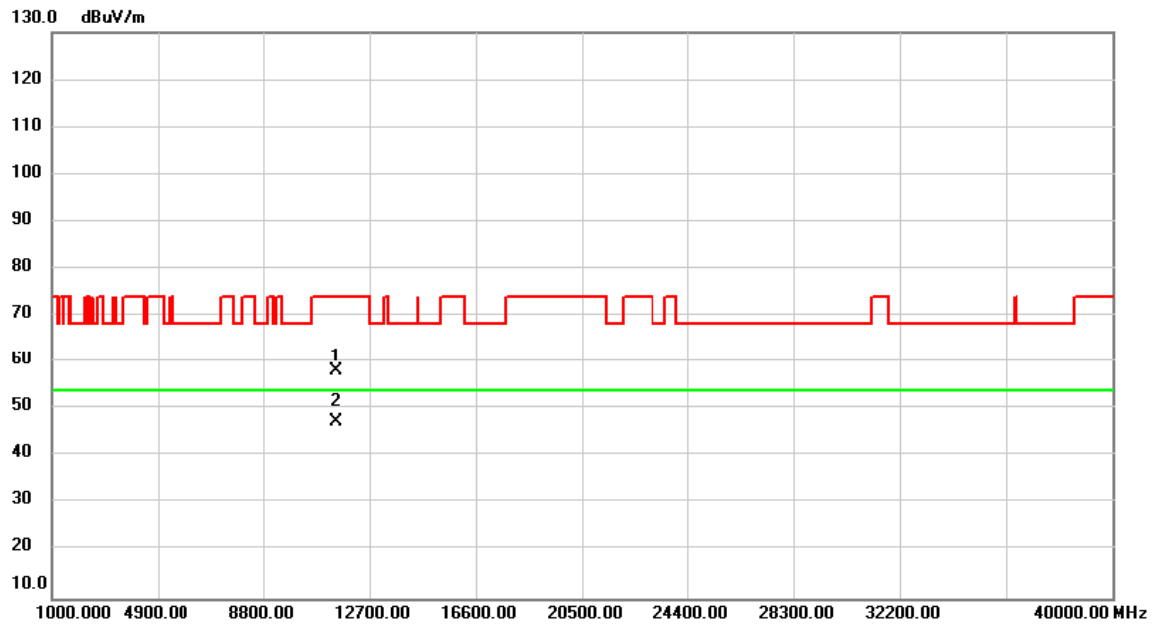


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	45.04	13.14	58.18	74.00	-15.82	peak	
2	*	11490.00	34.20	13.14	47.34	54.00	-6.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

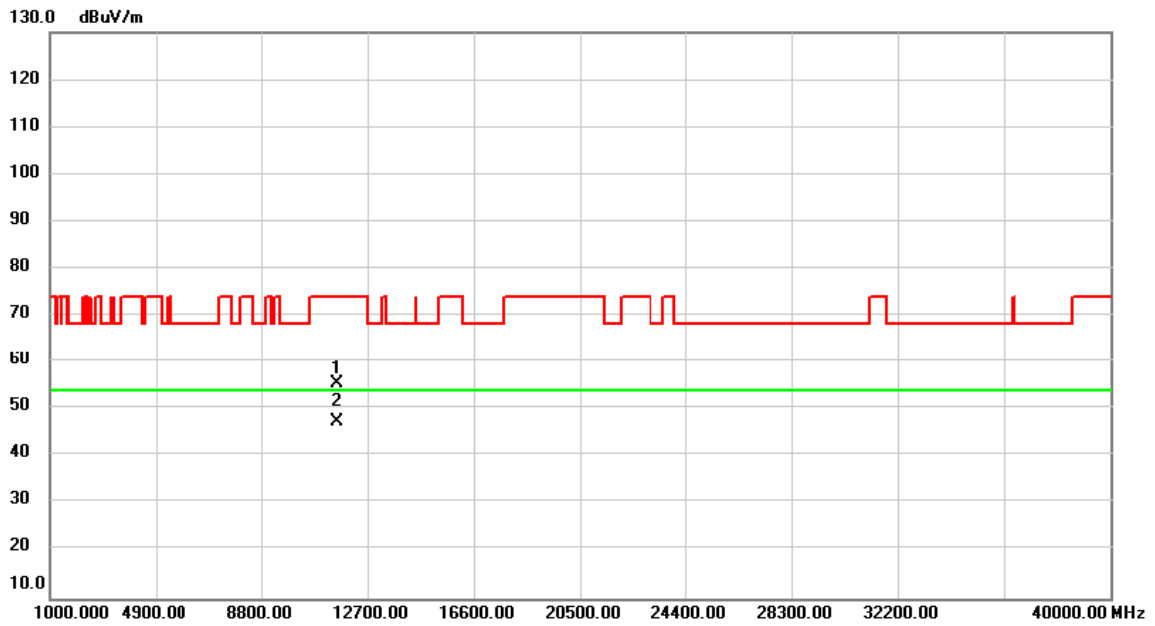


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	42.40	13.20	55.60	74.00	-18.40	peak	
2	*	11570.00	34.15	13.20	47.35	54.00	-6.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

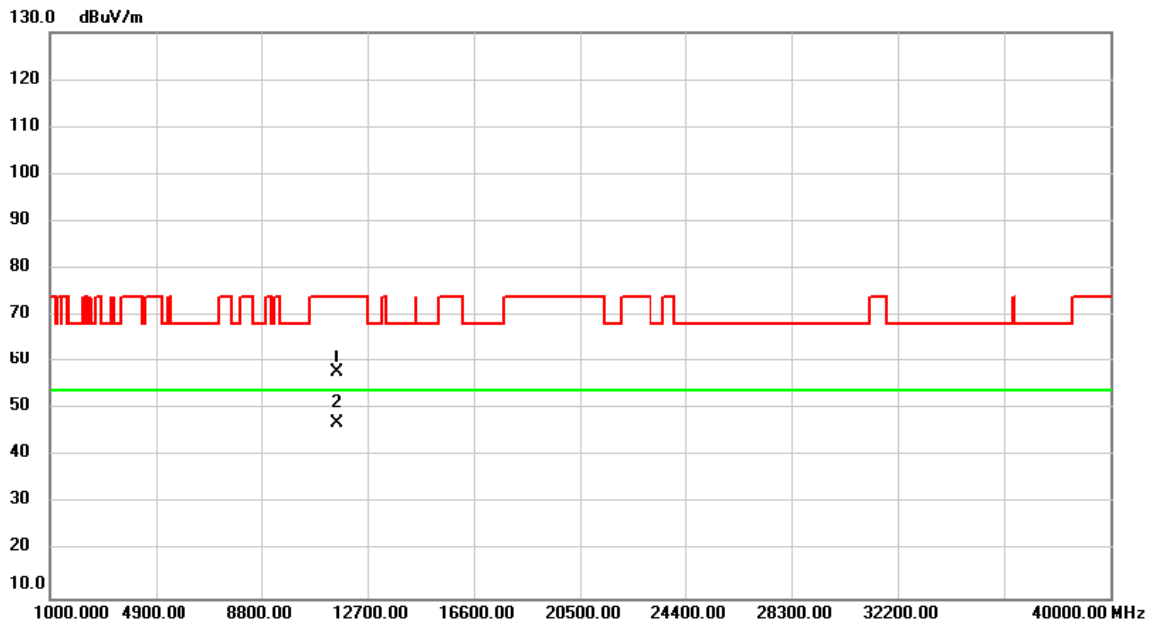


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.52	13.20	57.72	74.00	-16.28	peak	
2	*	11570.00	33.83	13.20	47.03	54.00	-6.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

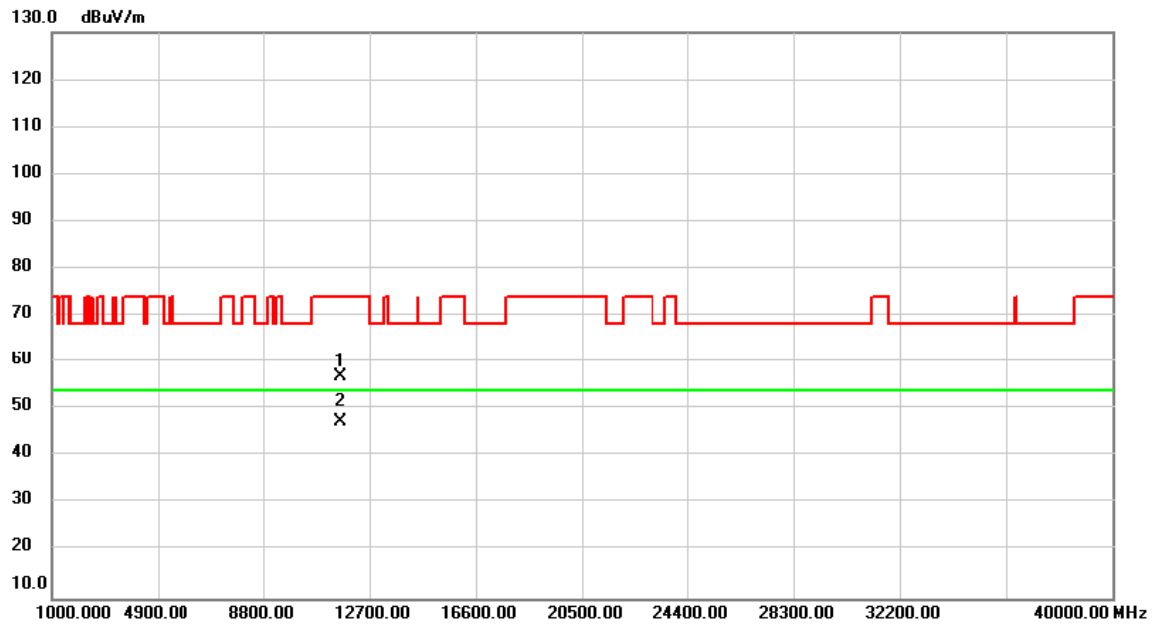


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.61	13.25	56.86	74.00	-17.14	peak	
2	*	11650.00	33.98	13.25	47.23	54.00	-6.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

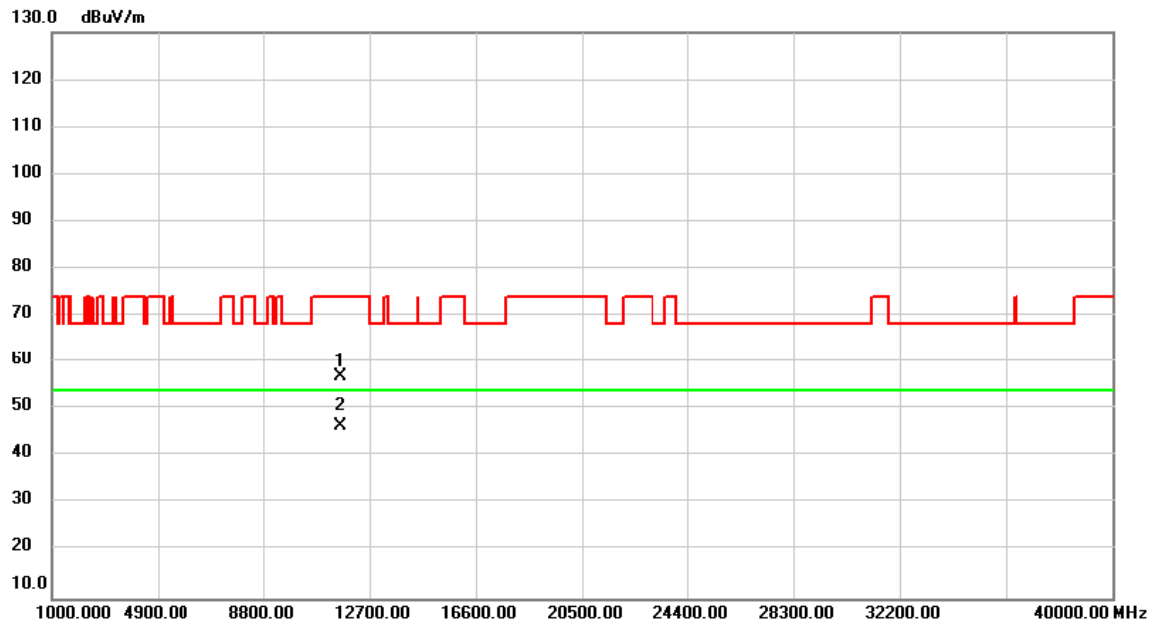


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.79	13.25	57.04	74.00	-16.96	peak	
2	*	11650.00	33.30	13.25	46.55	54.00	-7.45	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

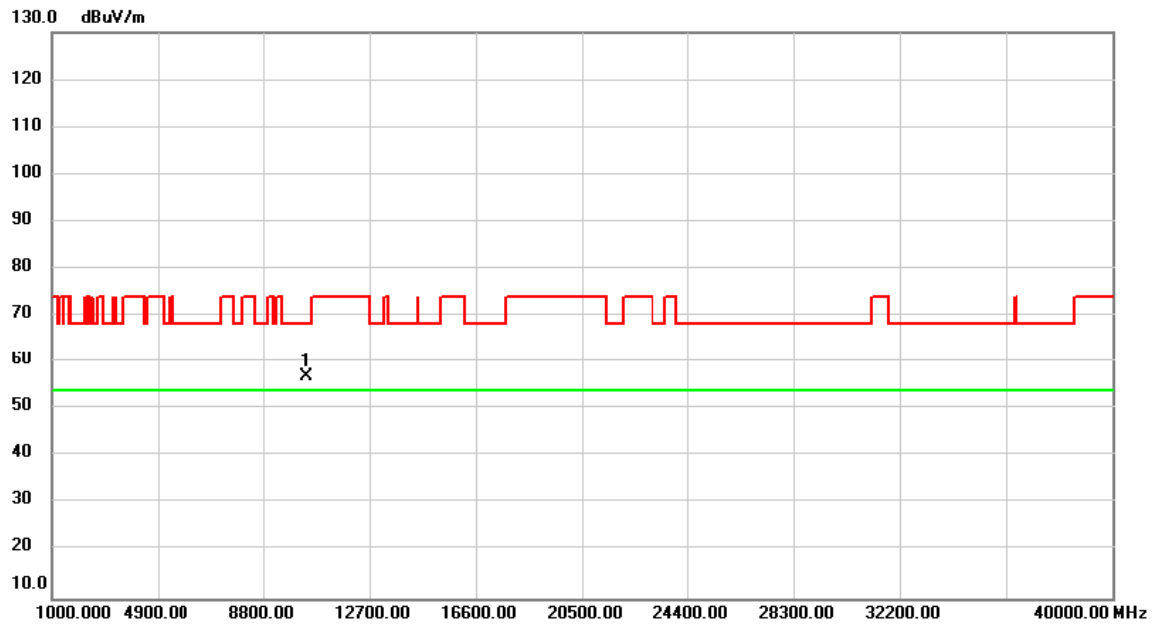


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	44.63	12.30	56.93	68.20	-11.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

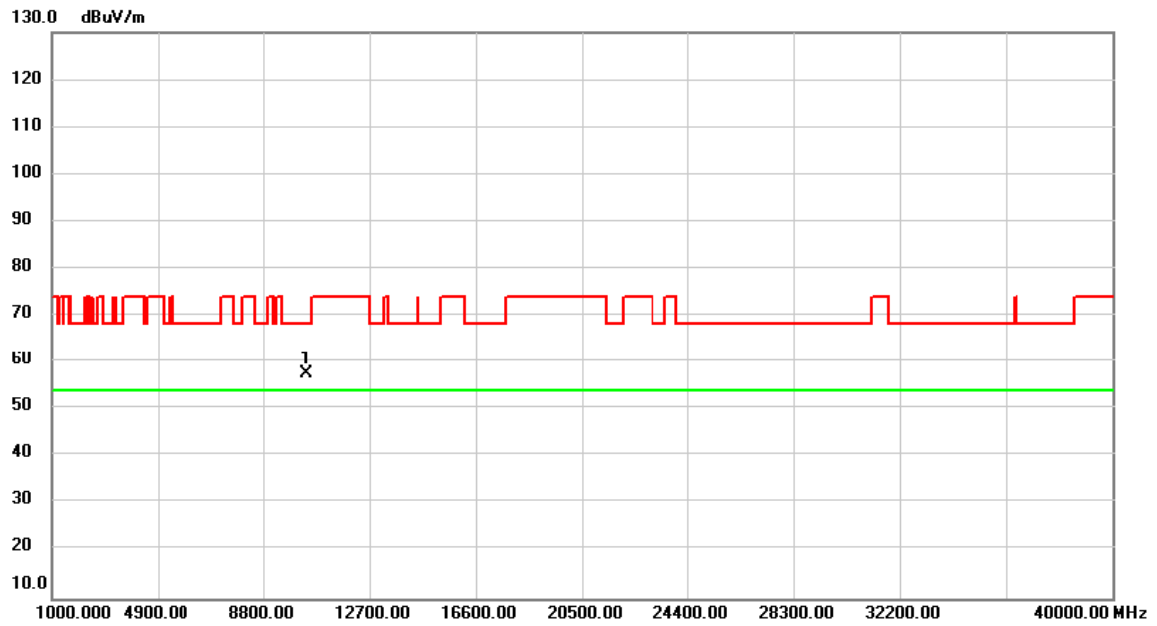


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	45.26	12.30	57.56	68.20	-10.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

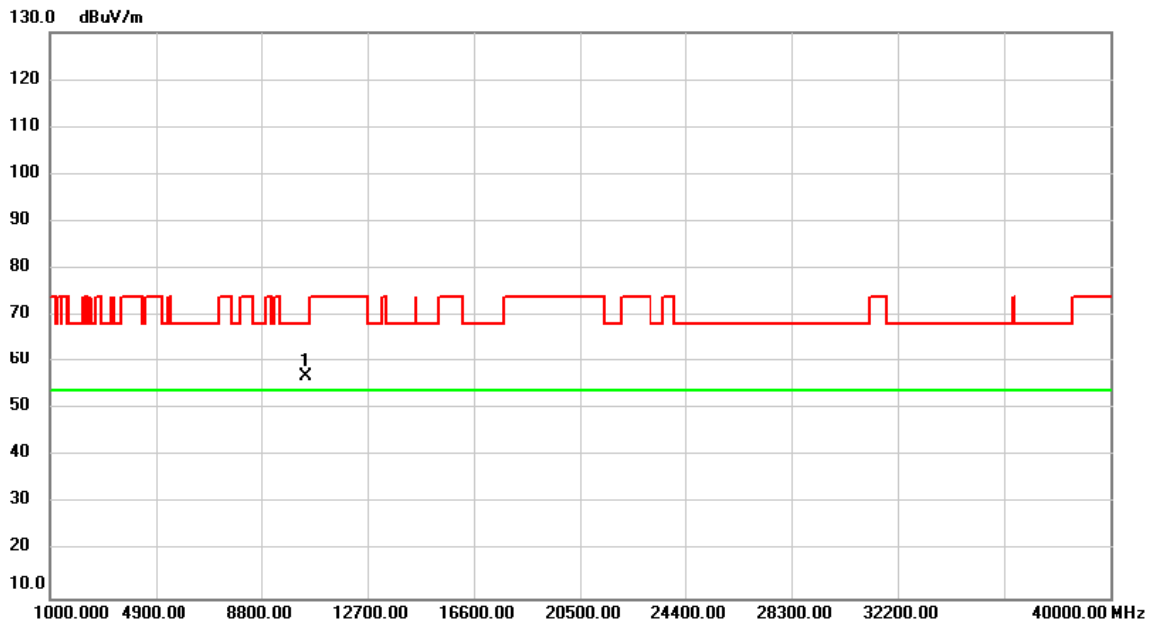


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	44.67	12.35	57.02	68.20	-11.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

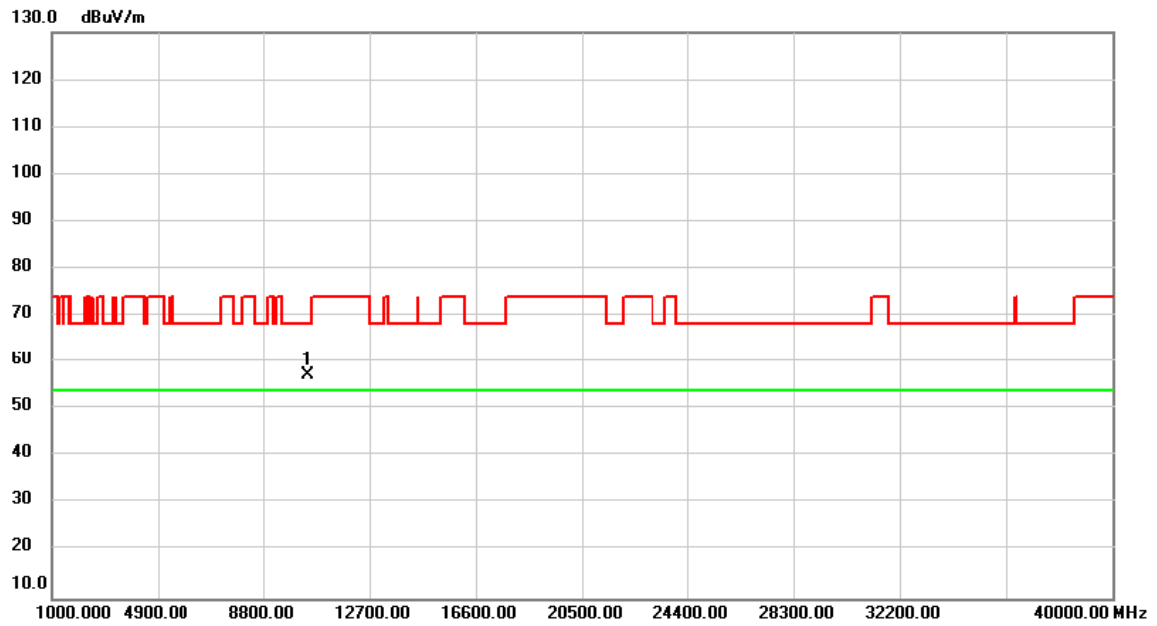


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	44.91	12.35	57.26	68.20	-10.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

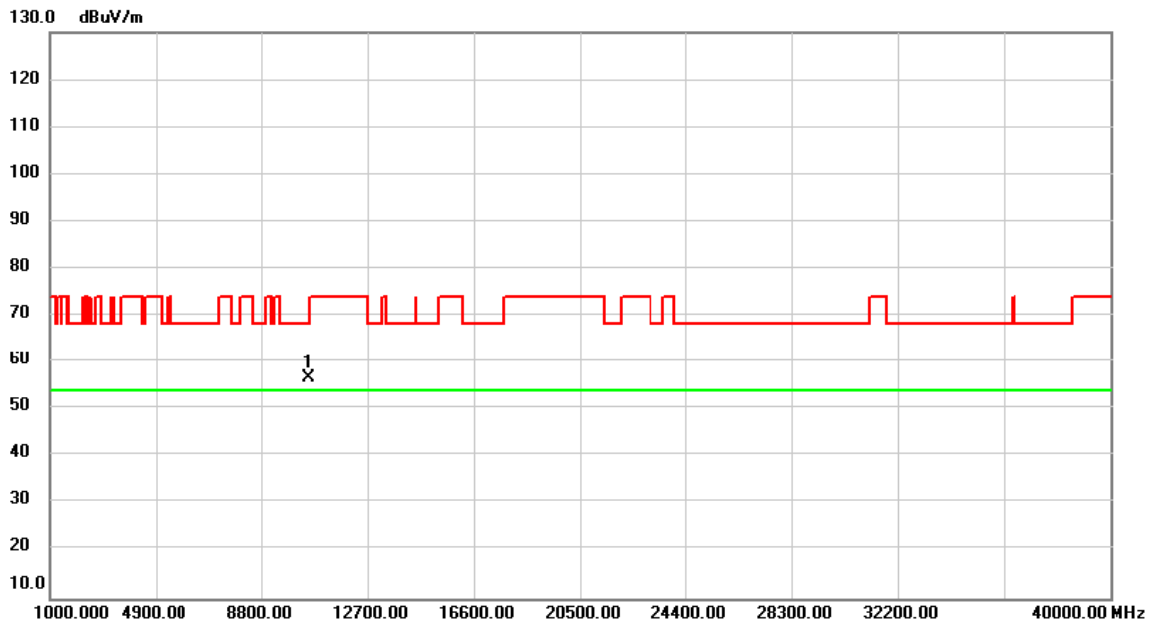


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	44.14	12.41	56.55	68.20	-11.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Horizontal

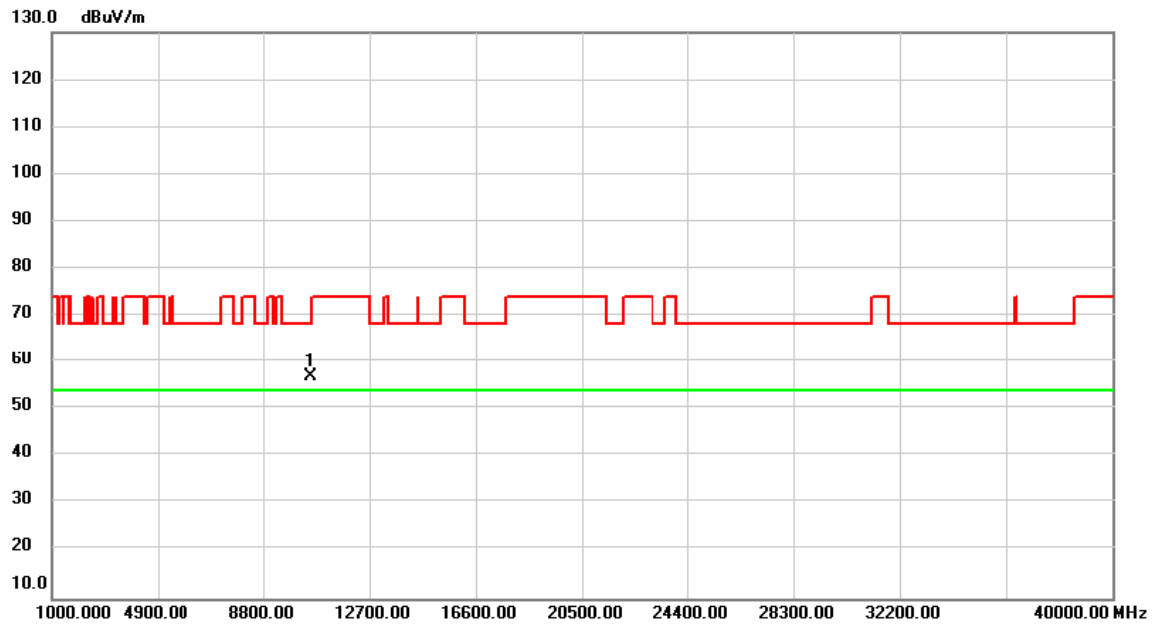


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	44.69	12.41	57.10	68.20	-11.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

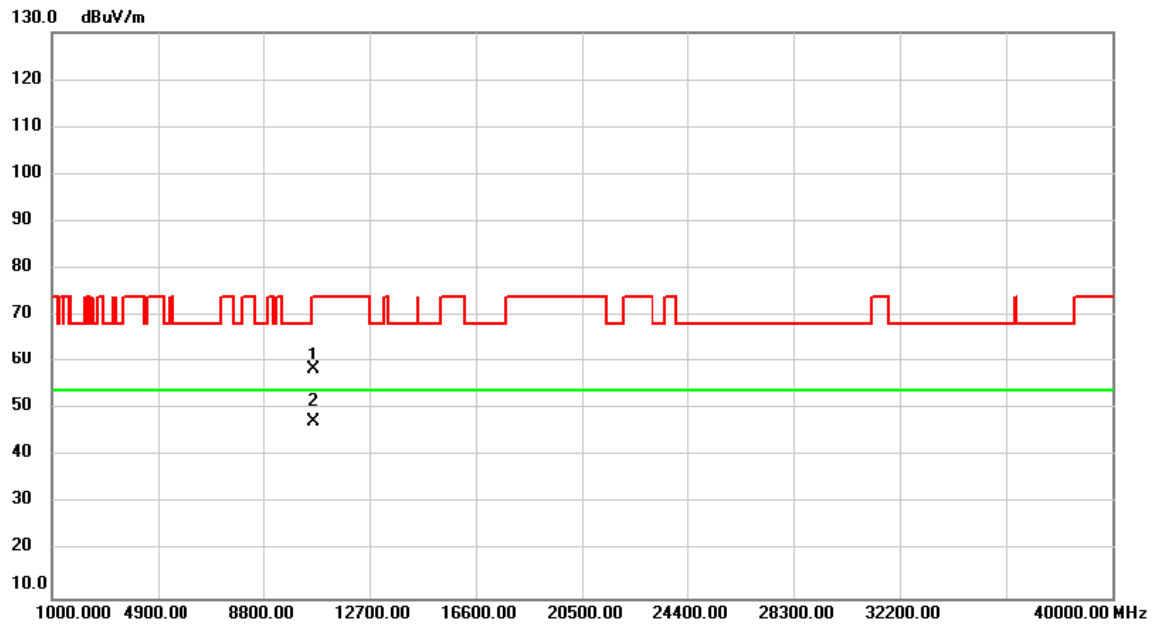


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	46.01	12.47	58.48	74.00	-15.52	peak	
2	*	10620.00	34.91	12.47	47.38	54.00	-6.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Horizontal

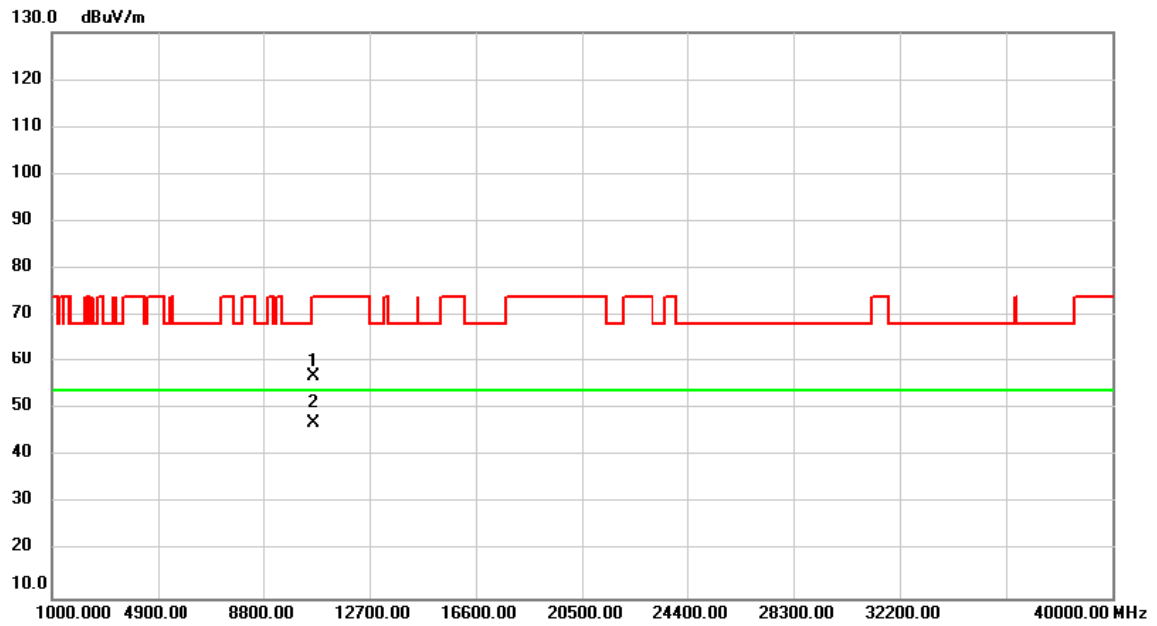


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	44.41	12.47	56.88	74.00	-17.12	peak	
2	*	10620.00	34.63	12.47	47.10	54.00	-6.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

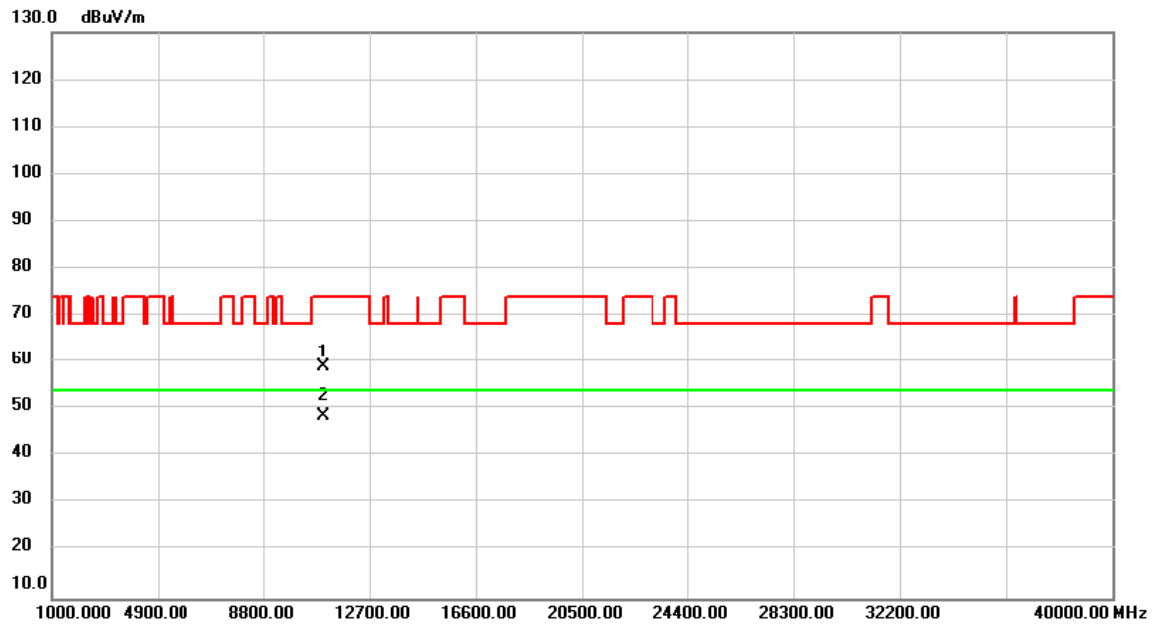


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.32	12.79	59.11	74.00	-14.89	peak	
2	*	11020.00	35.73	12.79	48.52	54.00	-5.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

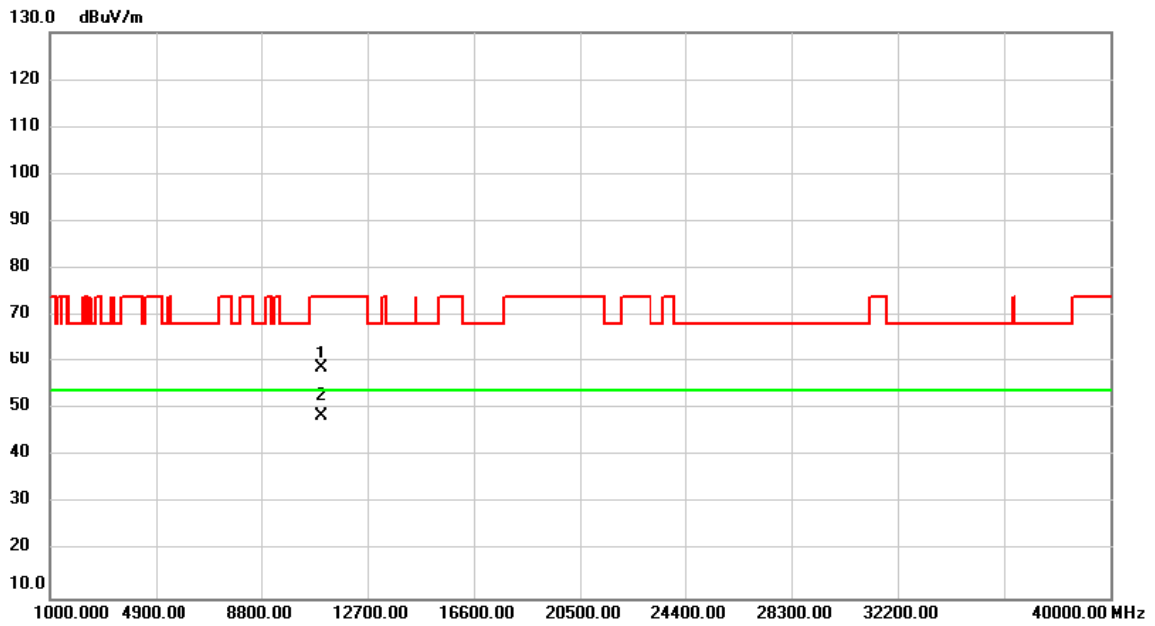


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	45.86	12.79	58.65	74.00	-15.35	peak	
2	*	11020.00	35.70	12.79	48.49	54.00	-5.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Vertical

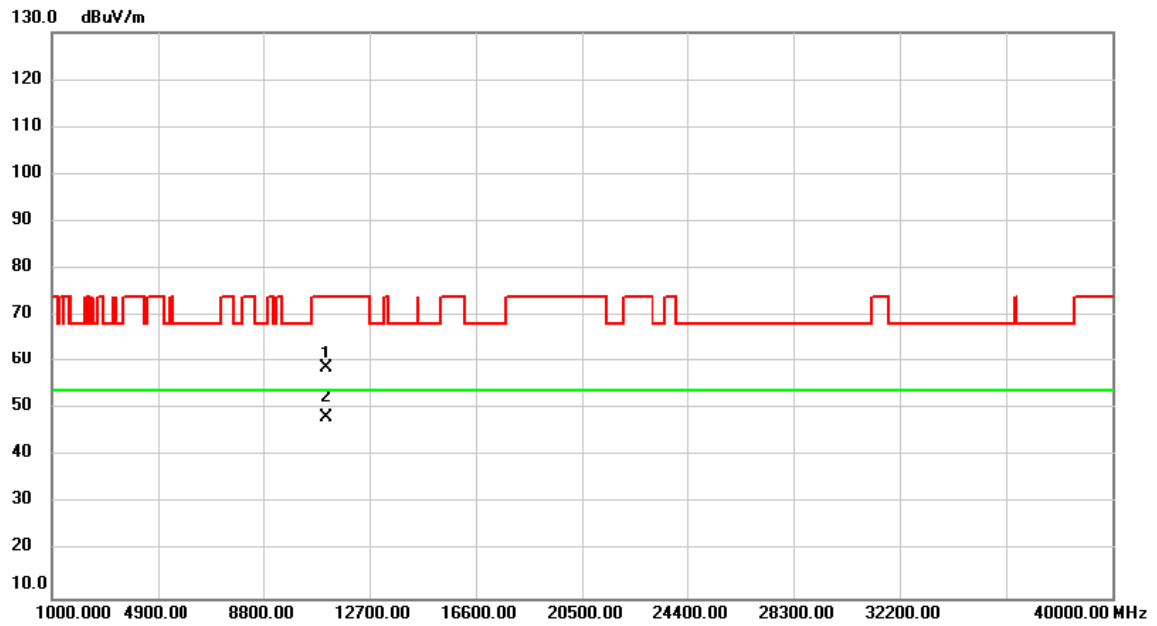


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	45.83	12.85	58.68	74.00	-15.32	peak	
2	*	11100.00	35.43	12.85	48.28	54.00	-5.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Horizontal

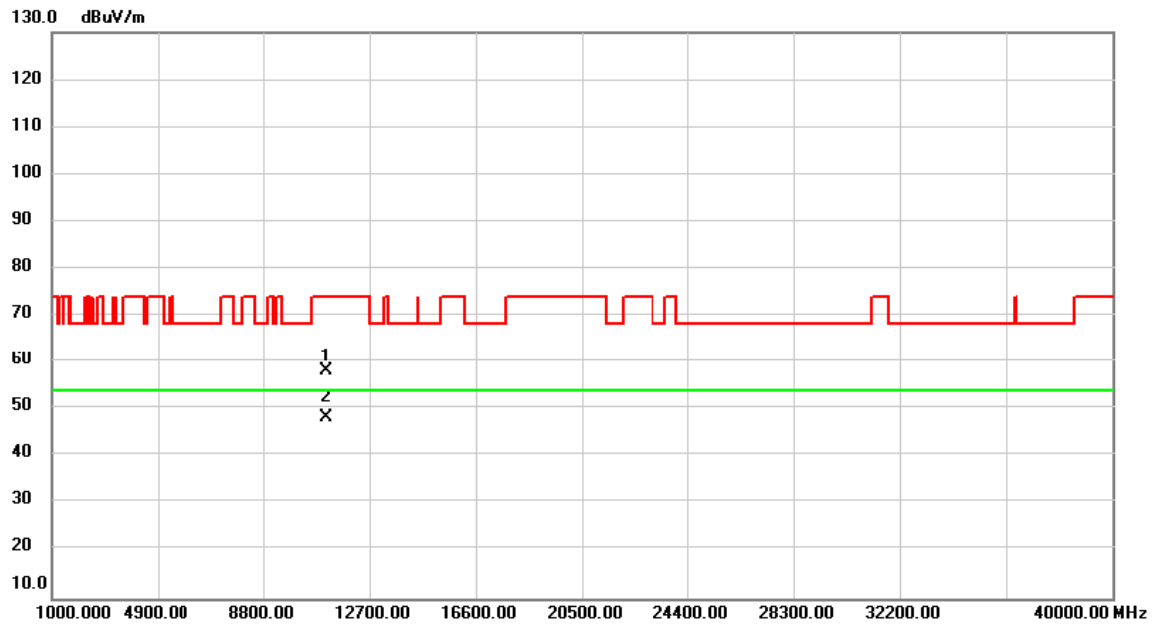


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	45.25	12.85	58.10	74.00	-15.90	peak	
2	*	11100.00	35.52	12.85	48.37	54.00	-5.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

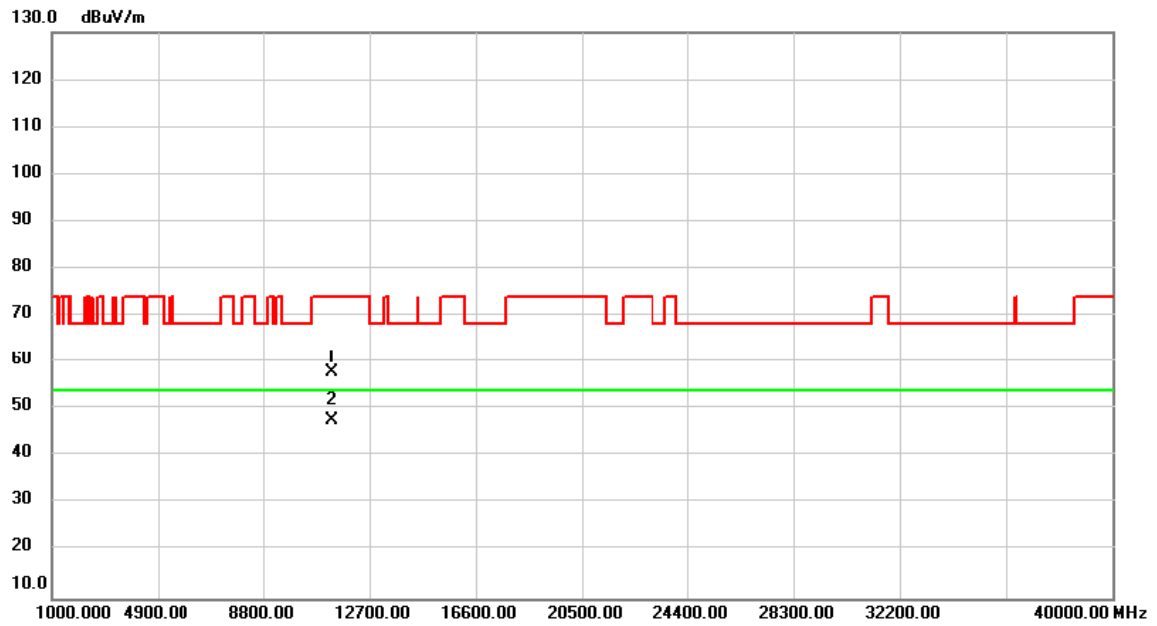


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	44.72	13.03	57.75	74.00	-16.25	peak	
2	*	11340.00	34.64	13.03	47.67	54.00	-6.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Horizontal

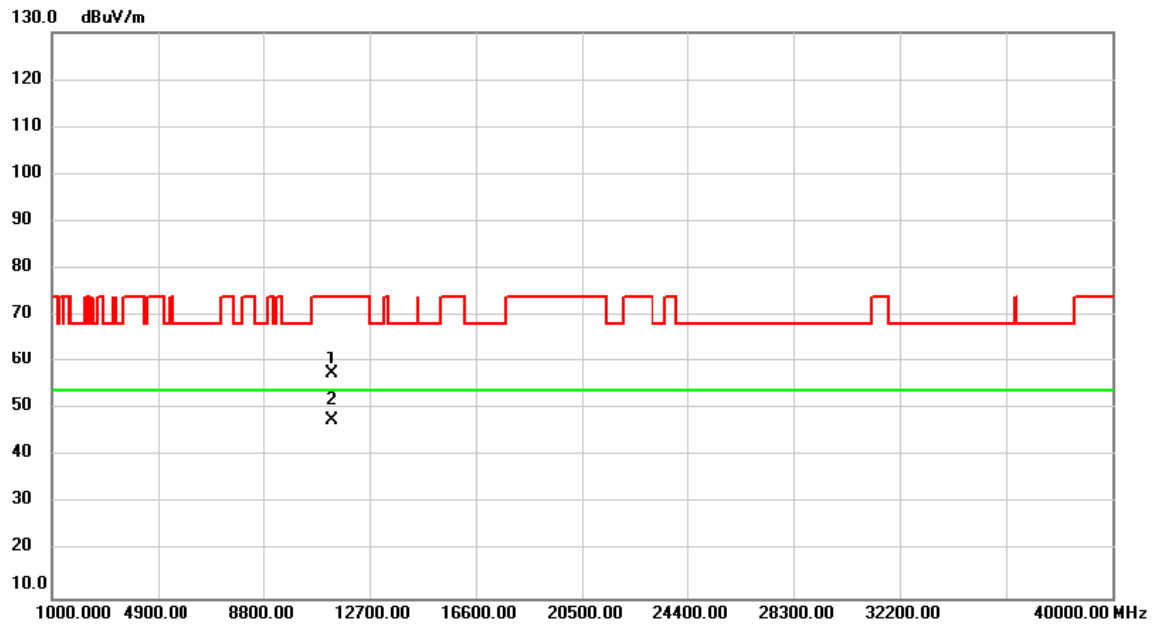


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	44.62	13.03	57.65	74.00	-16.35	peak	
2	*	11340.00	34.73	13.03	47.76	54.00	-6.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

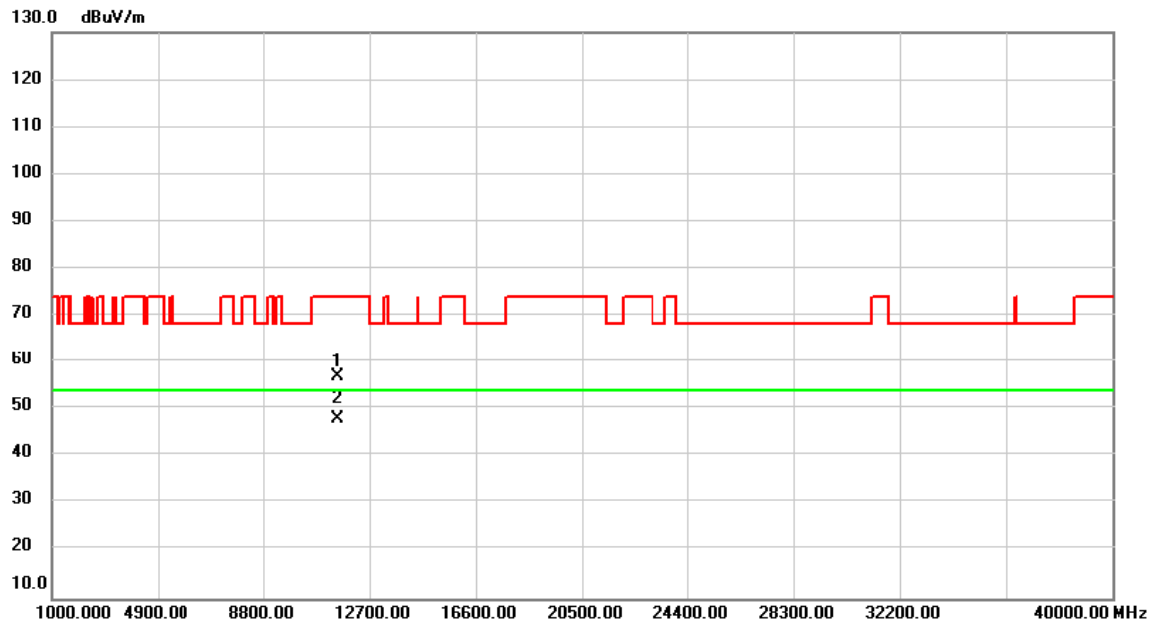


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	43.67	13.17	56.84	74.00	-17.16	peak	
2	*	11510.00	34.65	13.17	47.82	54.00	-6.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

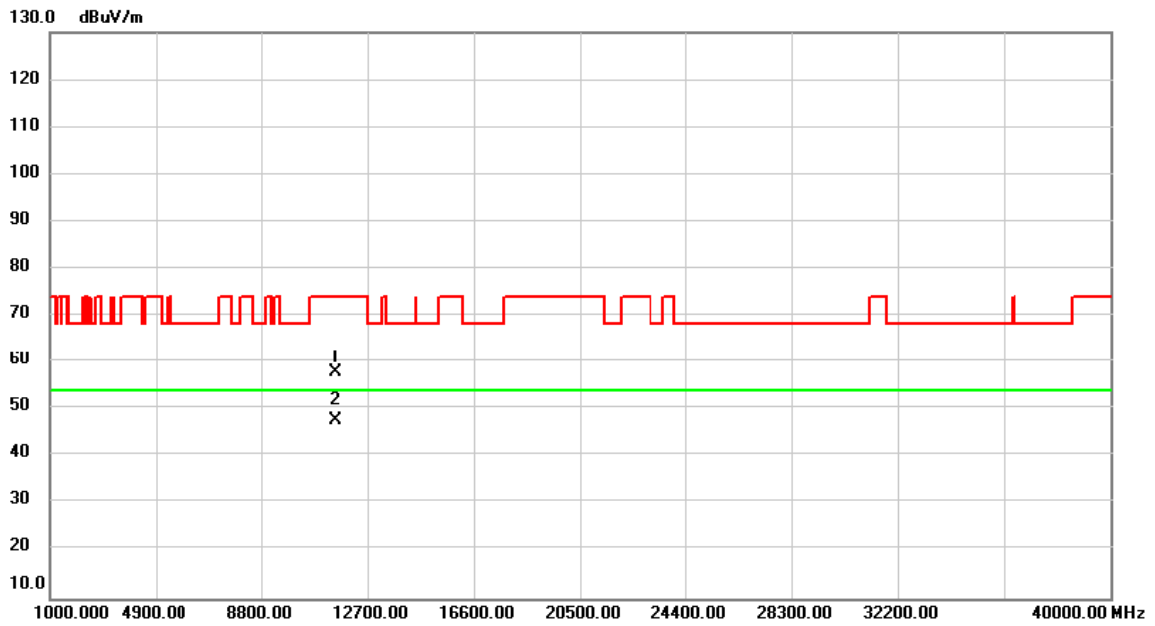


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	44.62	13.17	57.79	74.00	-16.21	peak	
2	*	11510.00	34.35	13.17	47.52	54.00	-6.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

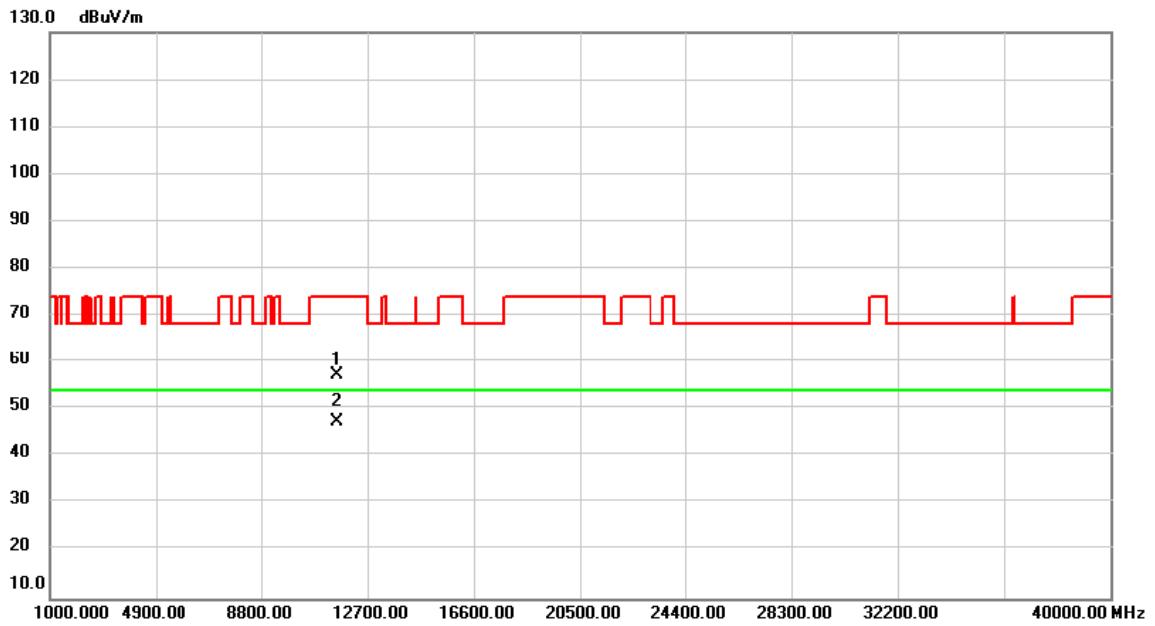


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.15	13.21	57.36	74.00	-16.64	peak	
2	*	11590.00	34.24	13.21	47.45	54.00	-6.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11n (HT40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

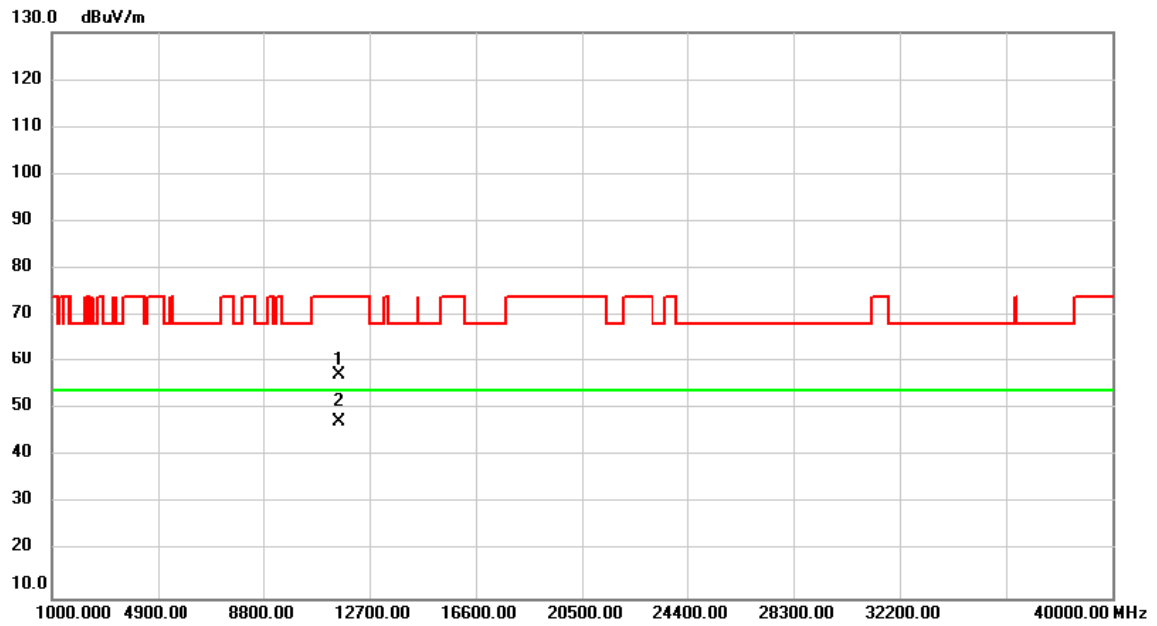


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	43.91	13.21	57.12	74.00	-16.88	peak	
2	*	11590.00	34.17	13.21	47.38	54.00	-6.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

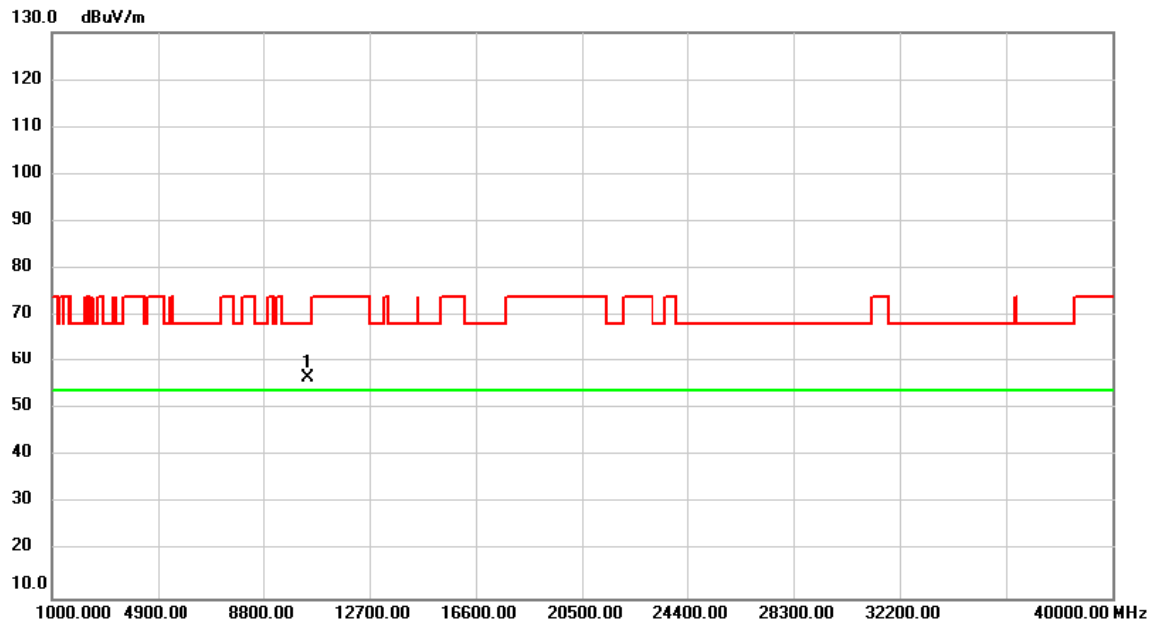


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	44.28	12.32	56.60	68.20	-11.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

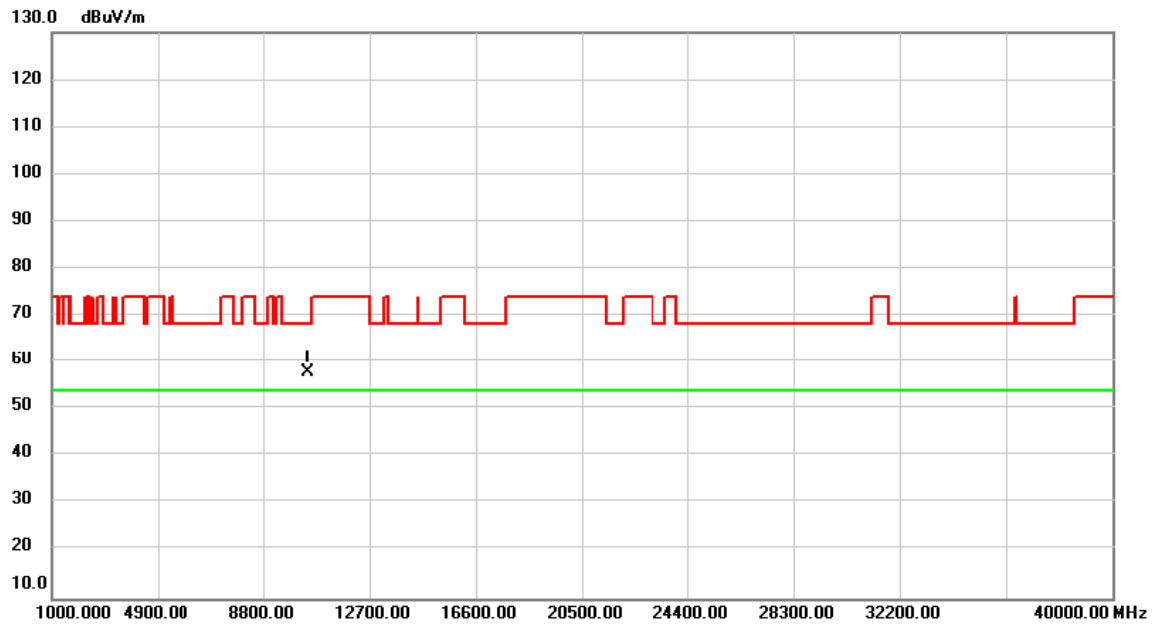


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	45.40	12.32	57.72	68.20	-10.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

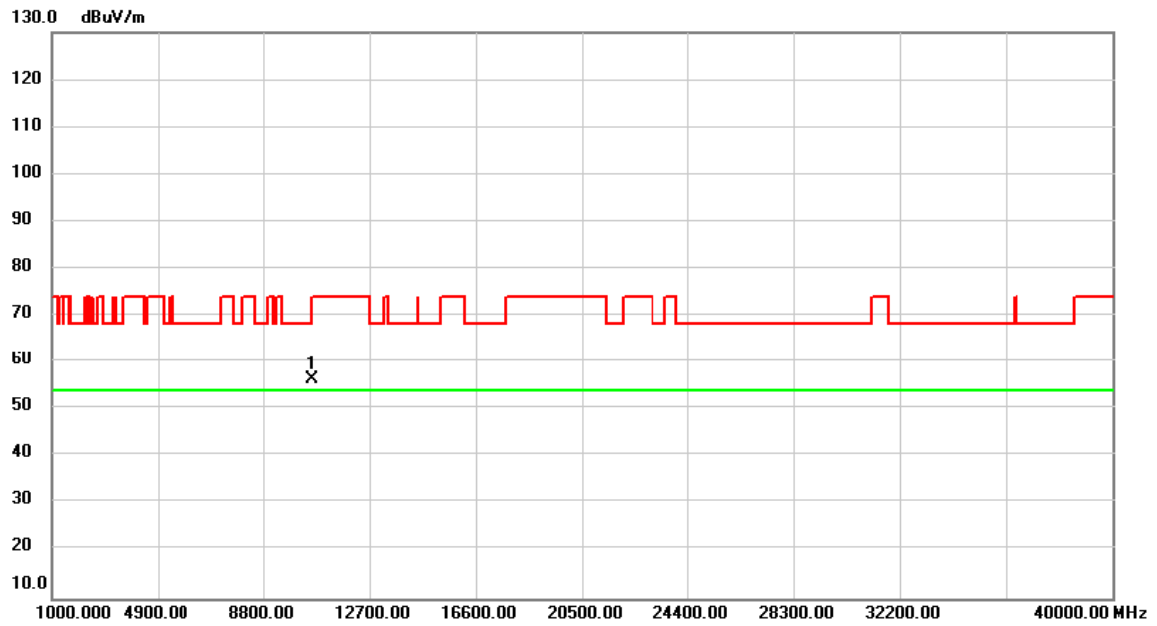


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	44.05	12.44	56.49	68.20	-11.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Horizontal

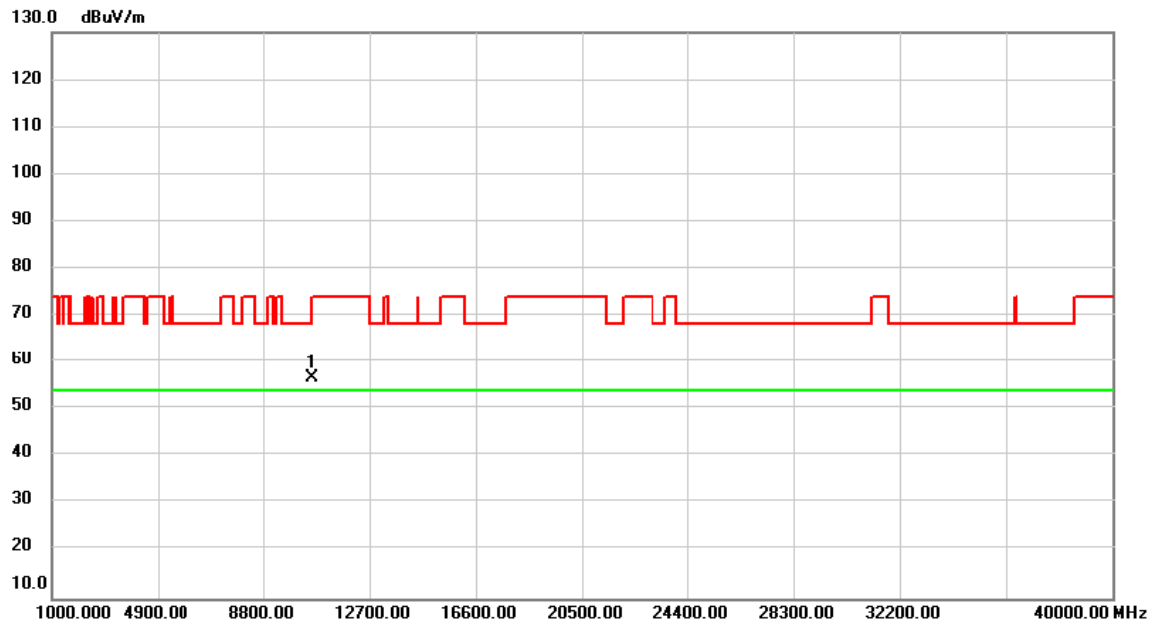


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	44.34	12.44	56.78	68.20	-11.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

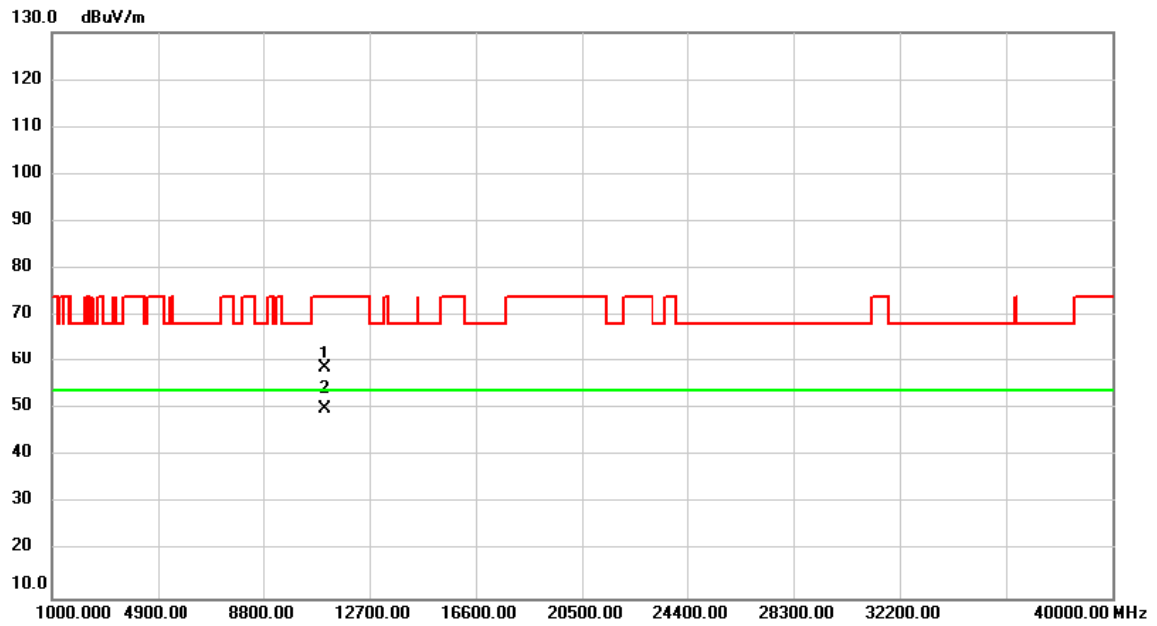


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	45.84	12.83	58.67	74.00	-15.33	peak	
2	*	11060.00	37.34	12.83	50.17	54.00	-3.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Horizontal

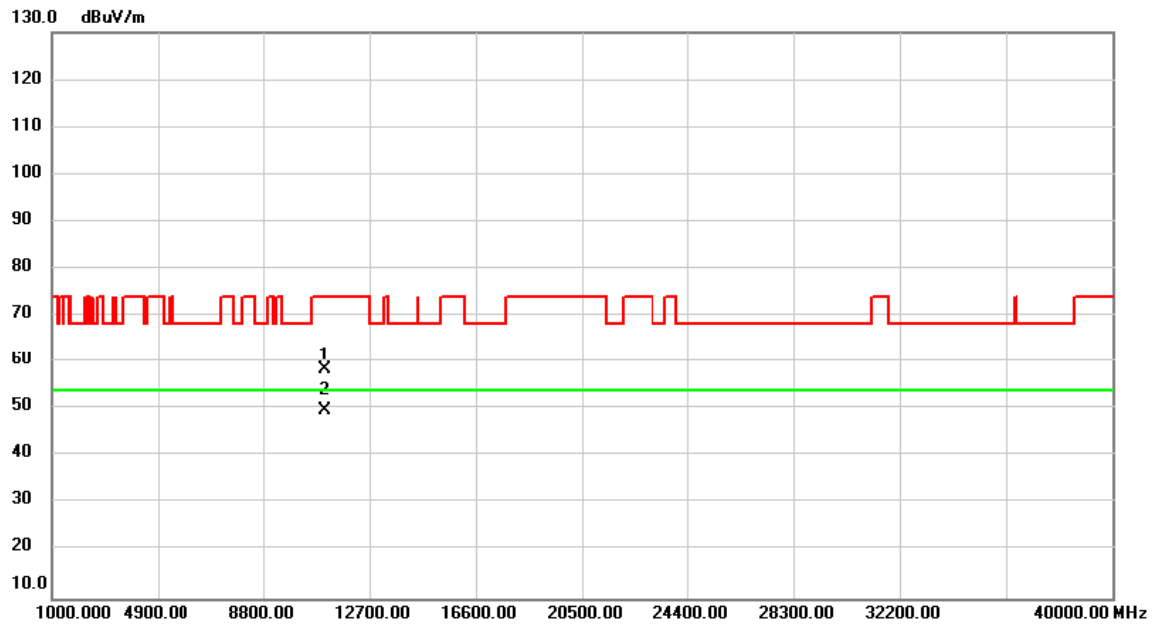


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	45.55	12.83	58.38	74.00	-15.62	peak	
2	*	11060.00	37.05	12.83	49.88	54.00	-4.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

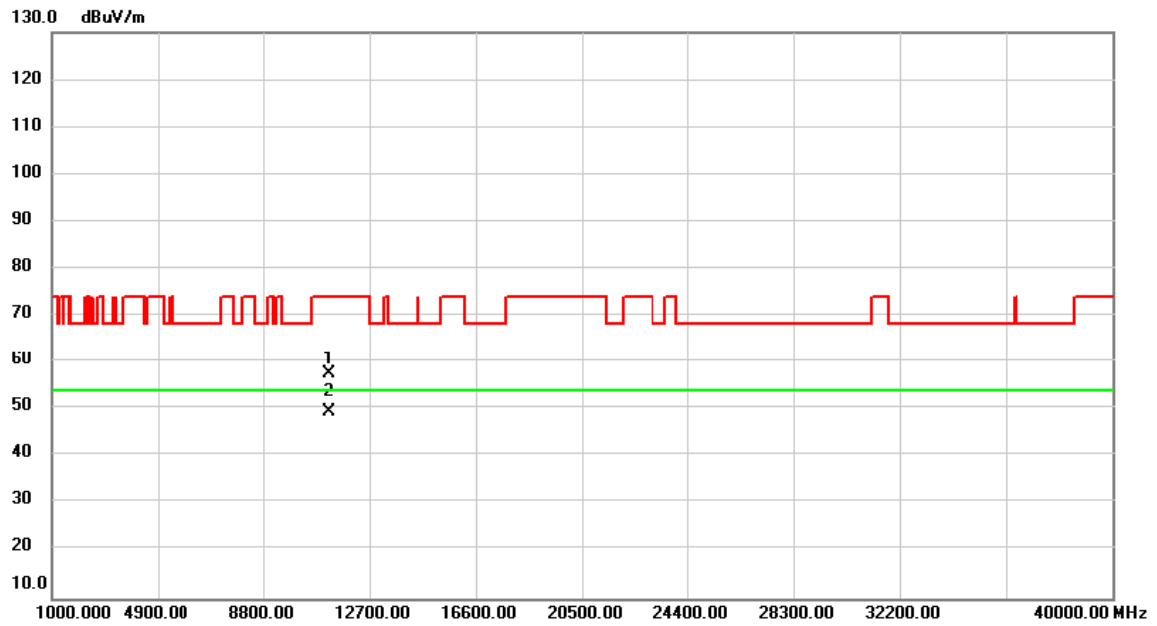


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	44.72	12.94	57.66	74.00	-16.34	peak	
2	*	11220.00	36.66	12.94	49.60	54.00	-4.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Horizontal

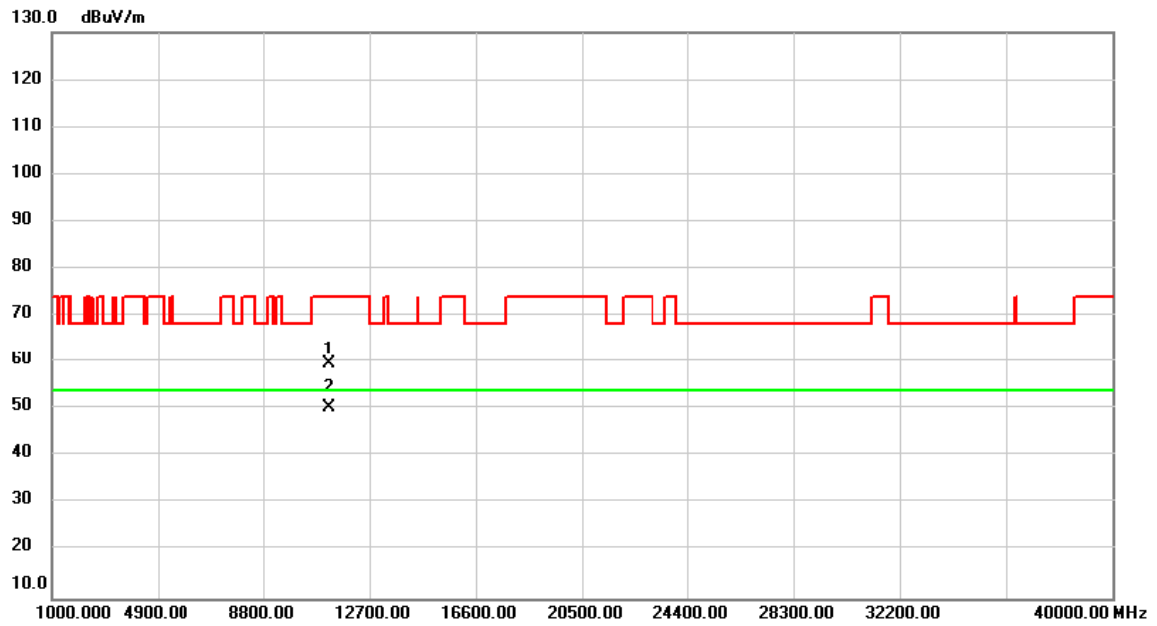


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	46.58	12.94	59.52	74.00	-14.48	peak	
2	*	11220.00	37.31	12.94	50.25	54.00	-3.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

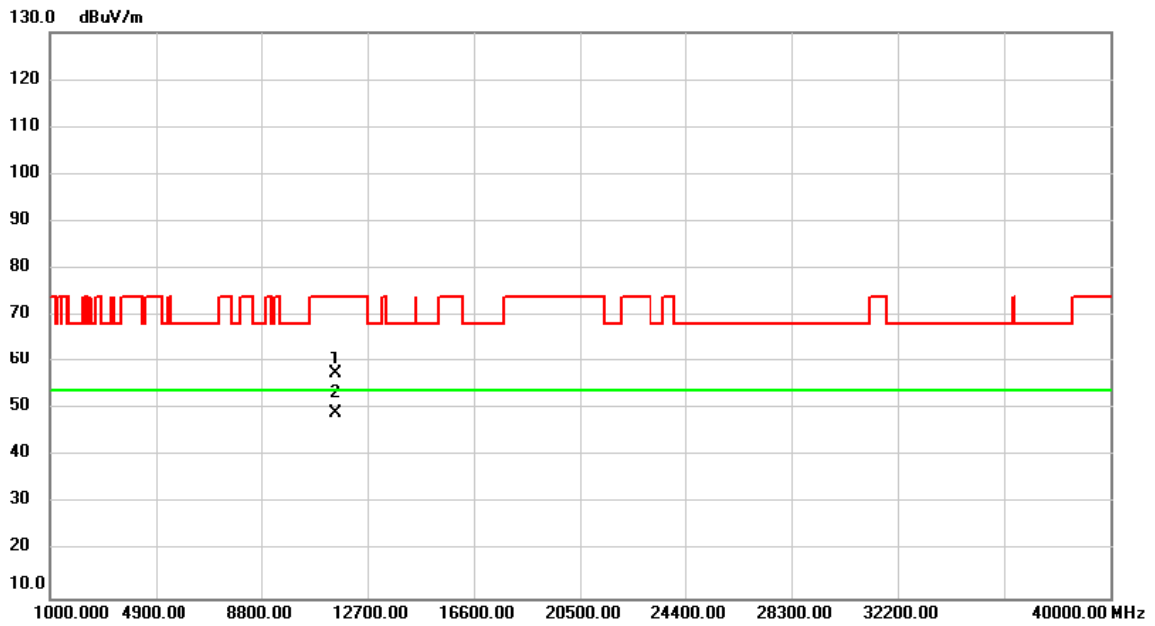


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.26	13.18	57.44	74.00	-16.56	peak	
2	*	11550.00	35.86	13.18	49.04	54.00	-4.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11n (HT80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

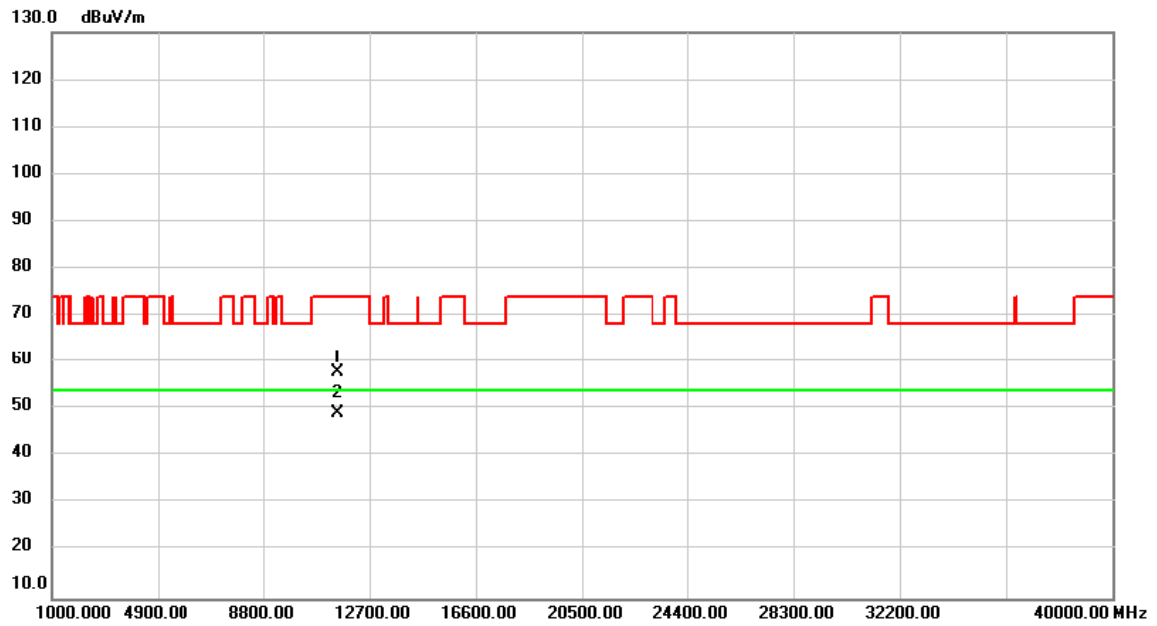


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.64	13.18	57.82	74.00	-16.18	peak	
2	*	11550.00	36.06	13.18	49.24	54.00	-4.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

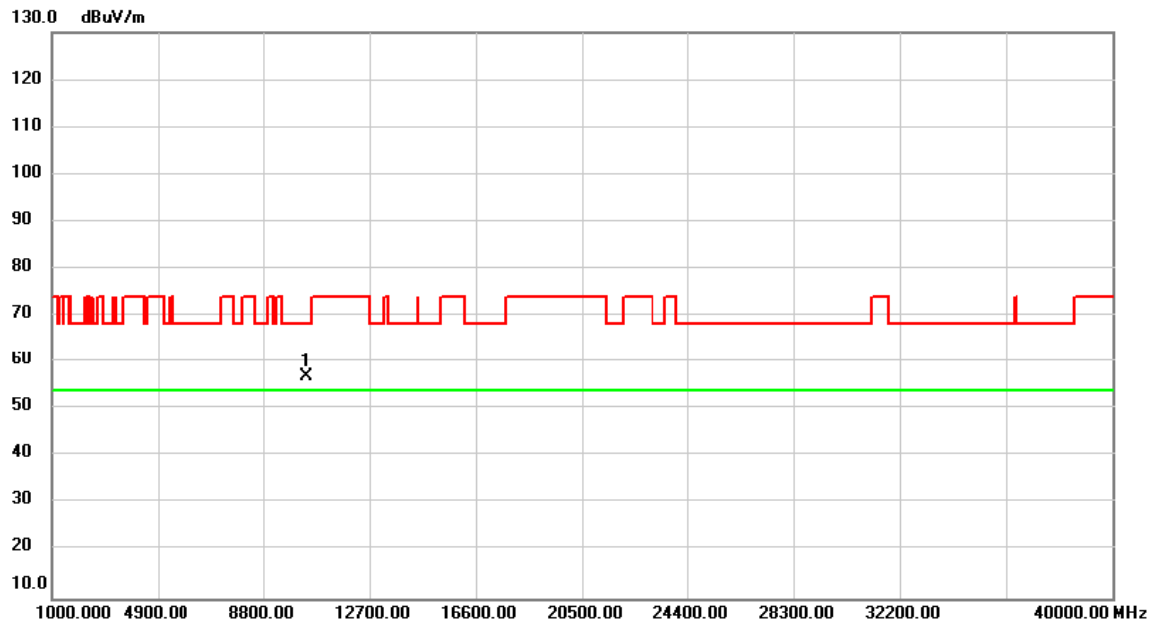


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	44.52	12.29	56.81	68.20	-11.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

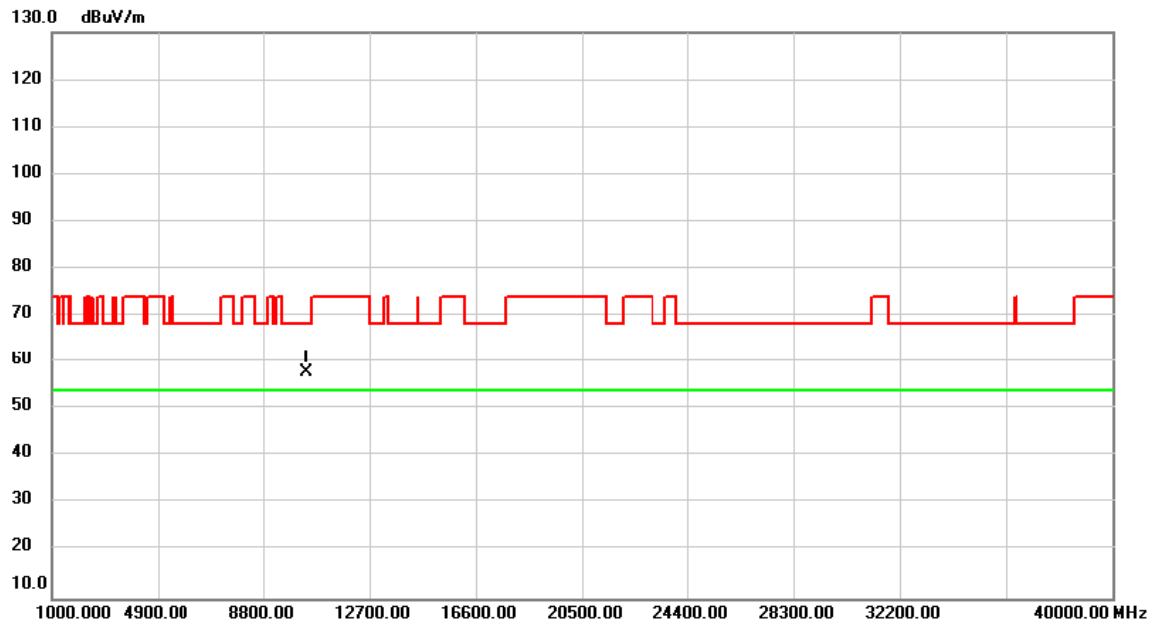


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	45.43	12.29	57.72	68.20	-10.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

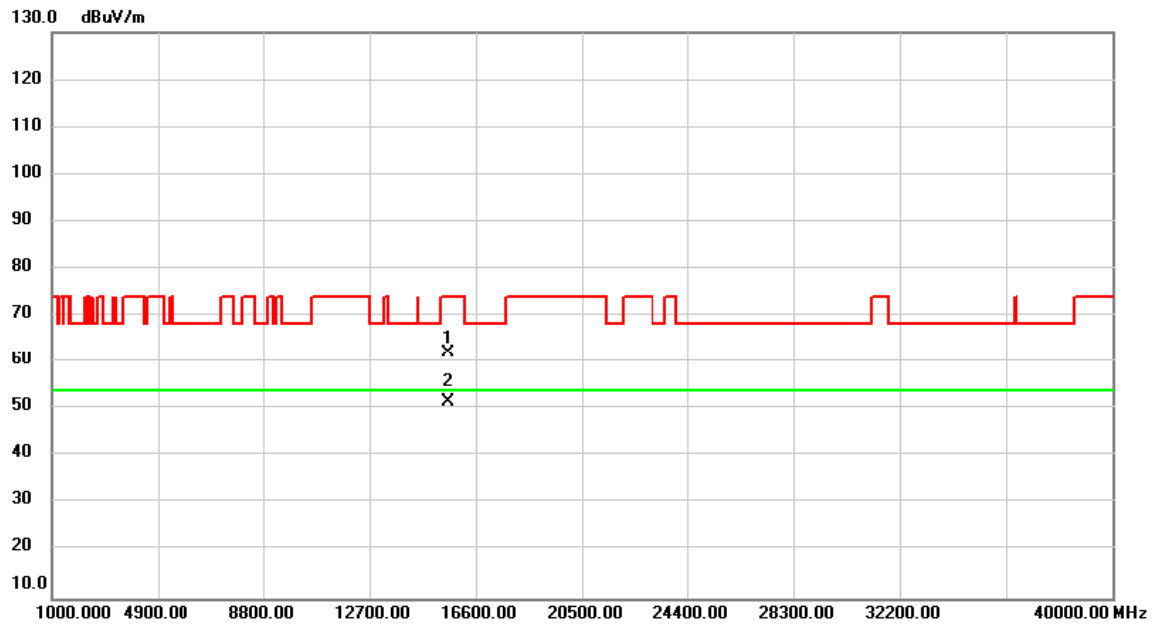


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	46.05	15.88	61.93	74.00	-12.07	peak	
2	*	15600.00	35.74	15.88	51.62	54.00	-2.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

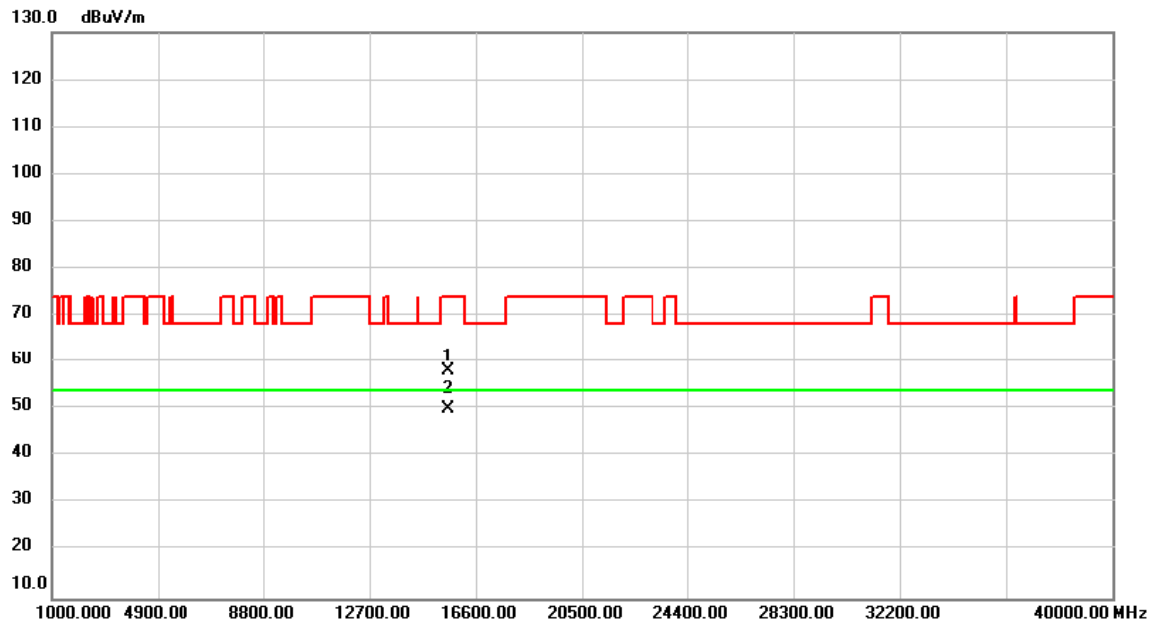


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	42.14	15.88	58.02	74.00	-15.98	peak	
2	*	15600.00	34.11	15.88	49.99	54.00	-4.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

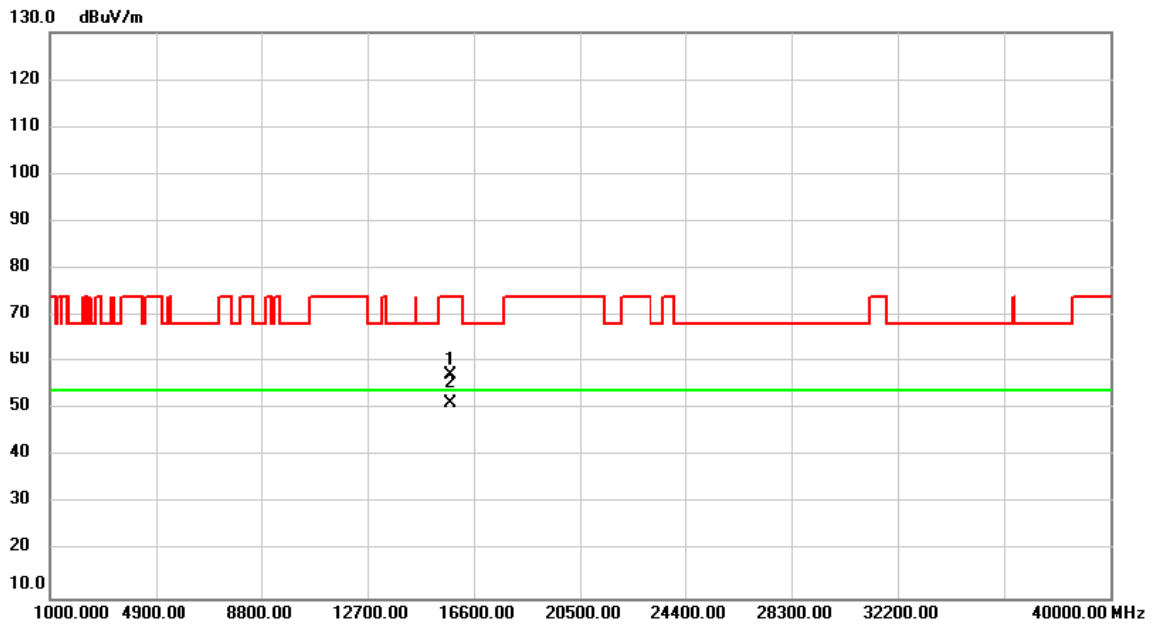


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	41.39	15.94	57.33	74.00	-16.67	peak	
2	*	15720.00	35.22	15.94	51.16	54.00	-2.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

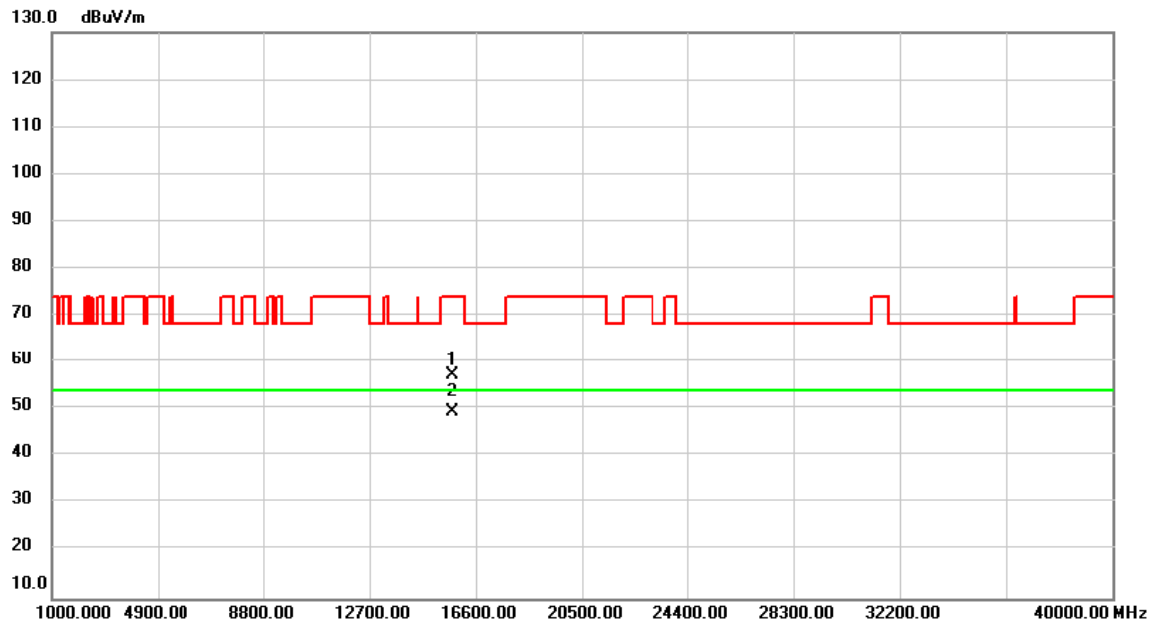


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	41.40	15.94	57.34	74.00	-16.66	peak	
2	*	15720.00	33.58	15.94	49.52	54.00	-4.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Vertical

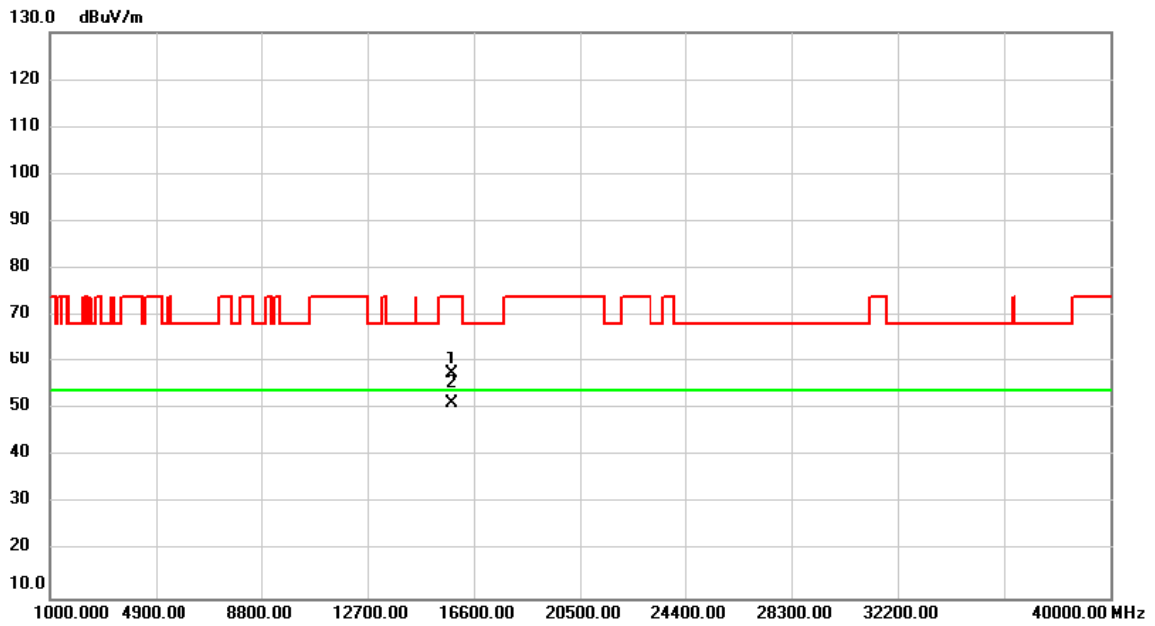


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	41.66	15.99	57.65	74.00	-16.35	peak	
2	*	15780.00	35.25	15.99	51.24	54.00	-2.76	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH52: 5260 MHz	Polarization	Horizontal

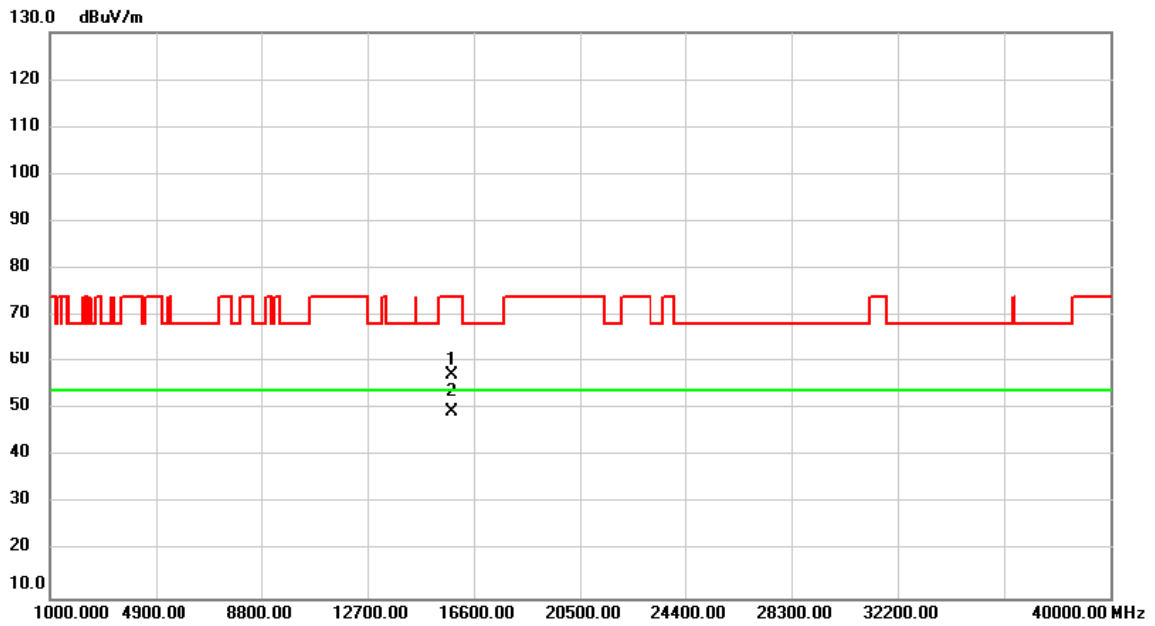


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	41.26	15.99	57.25	74.00	-16.75	peak	
2	*	15780.00	33.54	15.99	49.53	54.00	-4.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Vertical

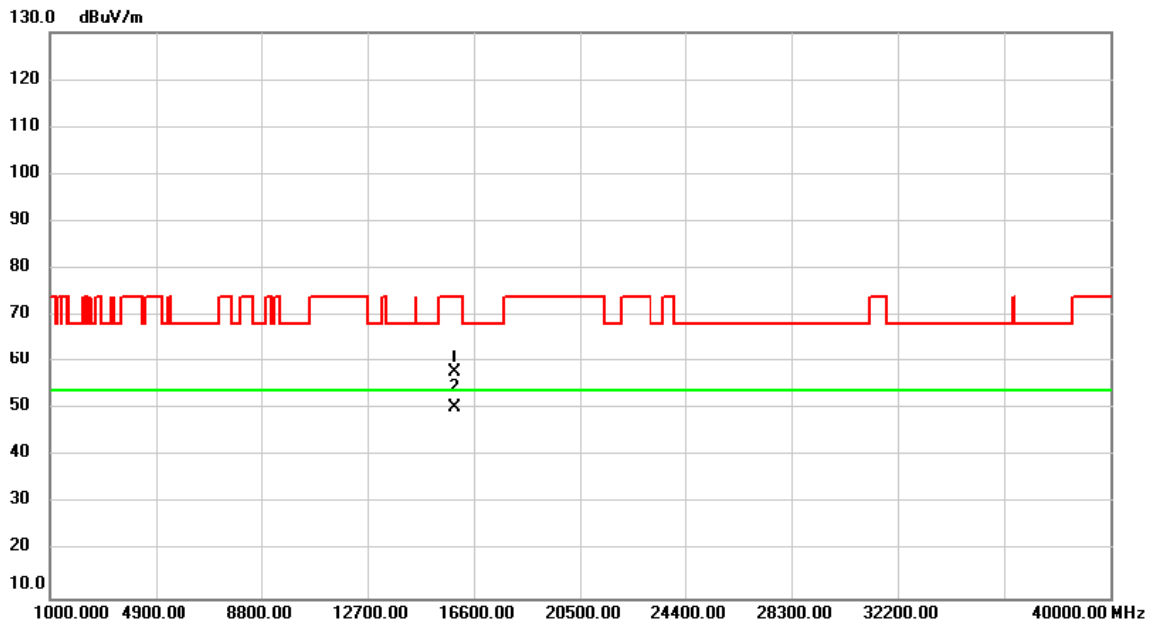


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	41.65	16.05	57.70	74.00	-16.30	peak	
2	*	15900.00	34.42	16.05	50.47	54.00	-3.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH60: 5300 MHz	Polarization	Horizontal

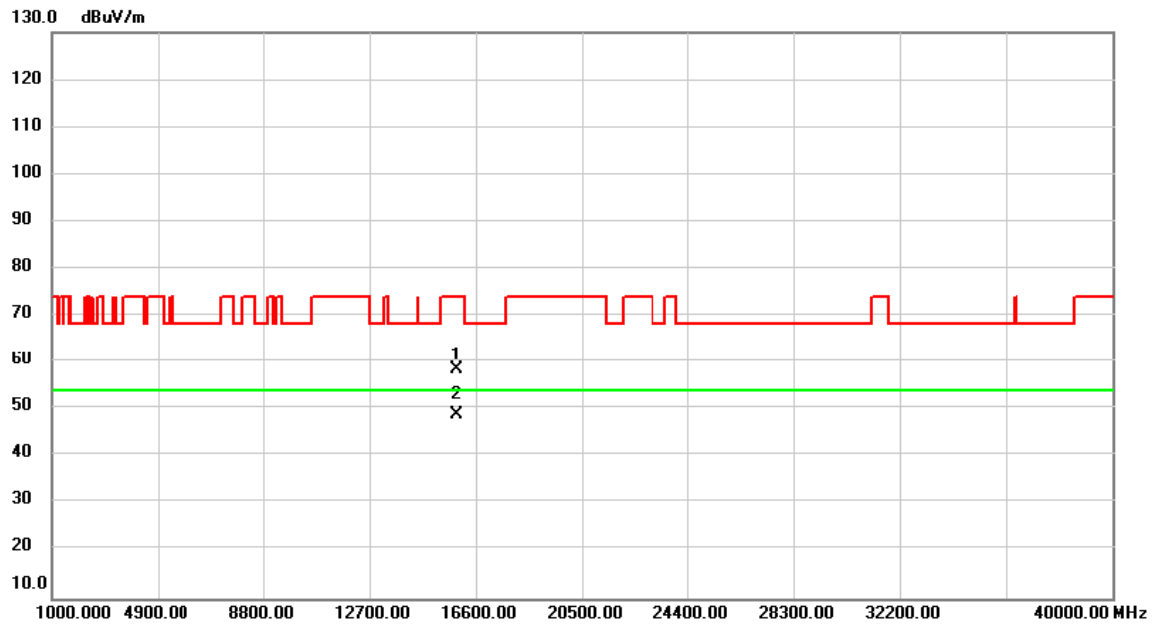


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	42.27	16.05	58.32	74.00	-15.68	peak	
2	*	15900.00	32.87	16.05	48.92	54.00	-5.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Vertical

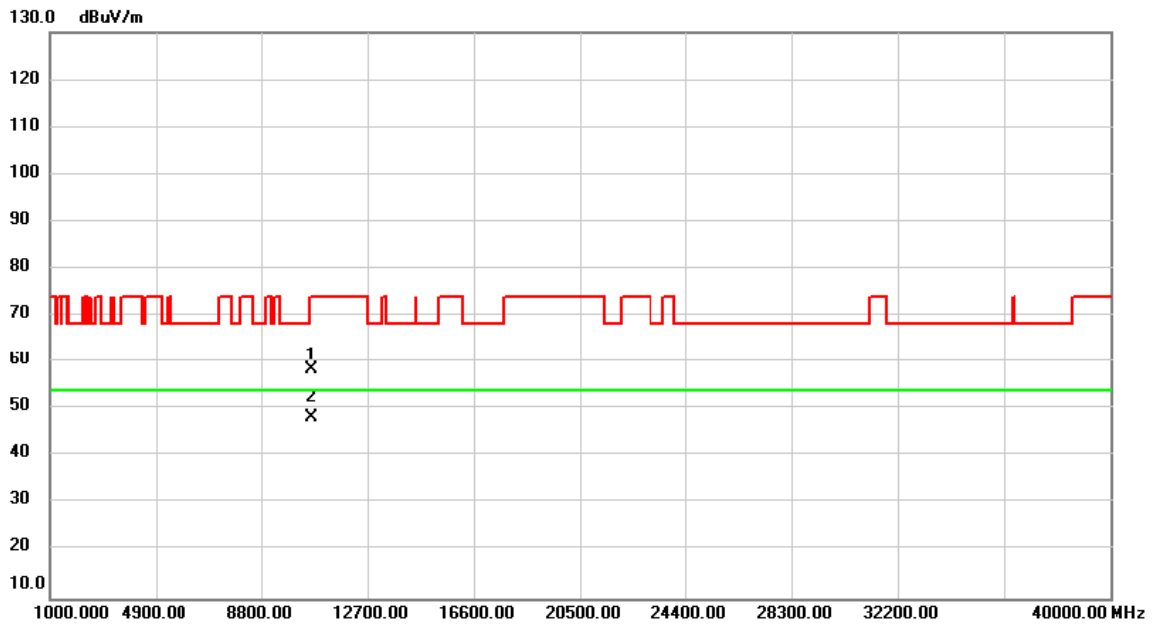


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	46.06	12.49	58.55	74.00	-15.45	peak	
2	*	10640.00	35.72	12.49	48.21	54.00	-5.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH64: 5320 MHz	Polarization	Horizontal

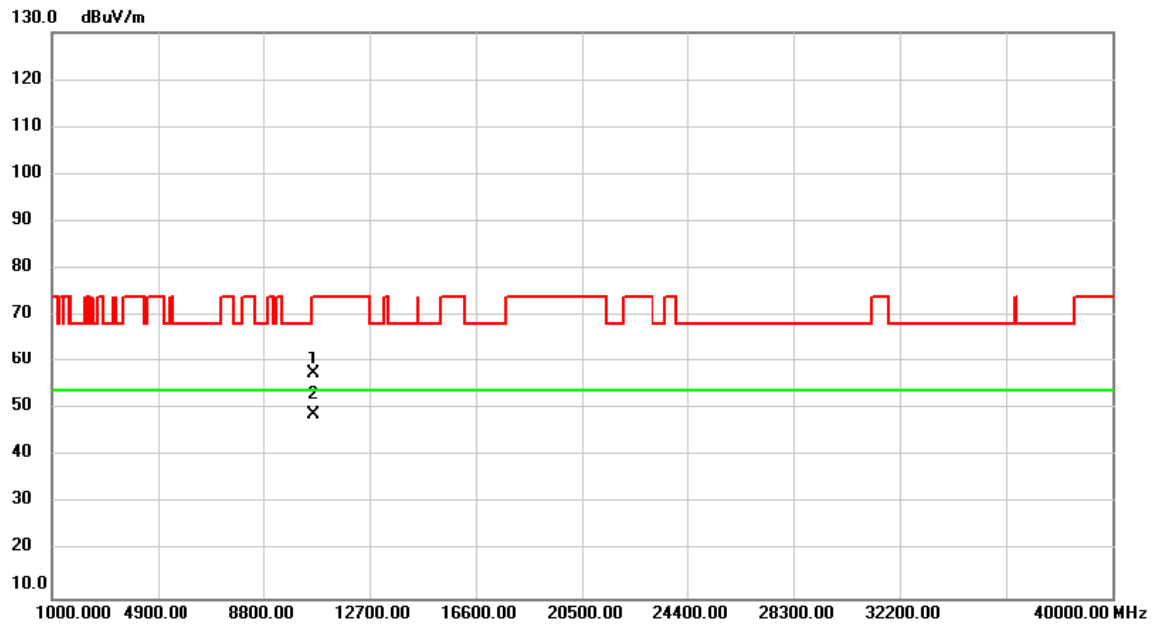


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	44.96	12.49	57.45	74.00	-16.55	peak	
2	*	10640.00	36.46	12.49	48.95	54.00	-5.05	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Vertical

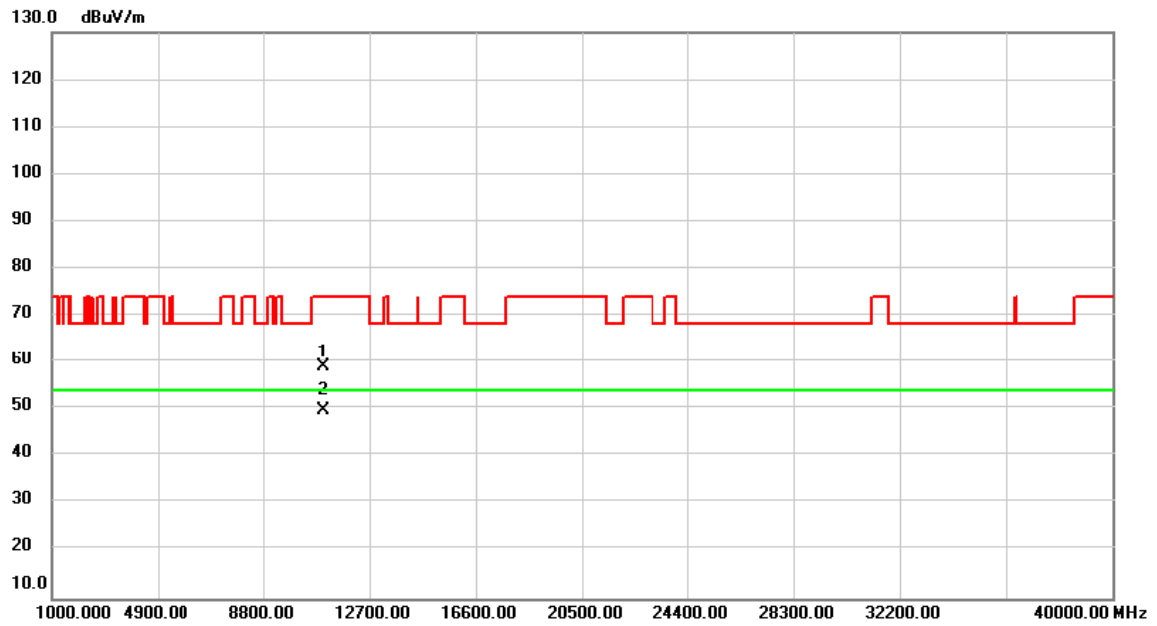


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.33	12.78	59.11	74.00	-14.89	peak	
2	*	11000.00	37.07	12.78	49.85	54.00	-4.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH100: 5500 MHz	Polarization	Horizontal

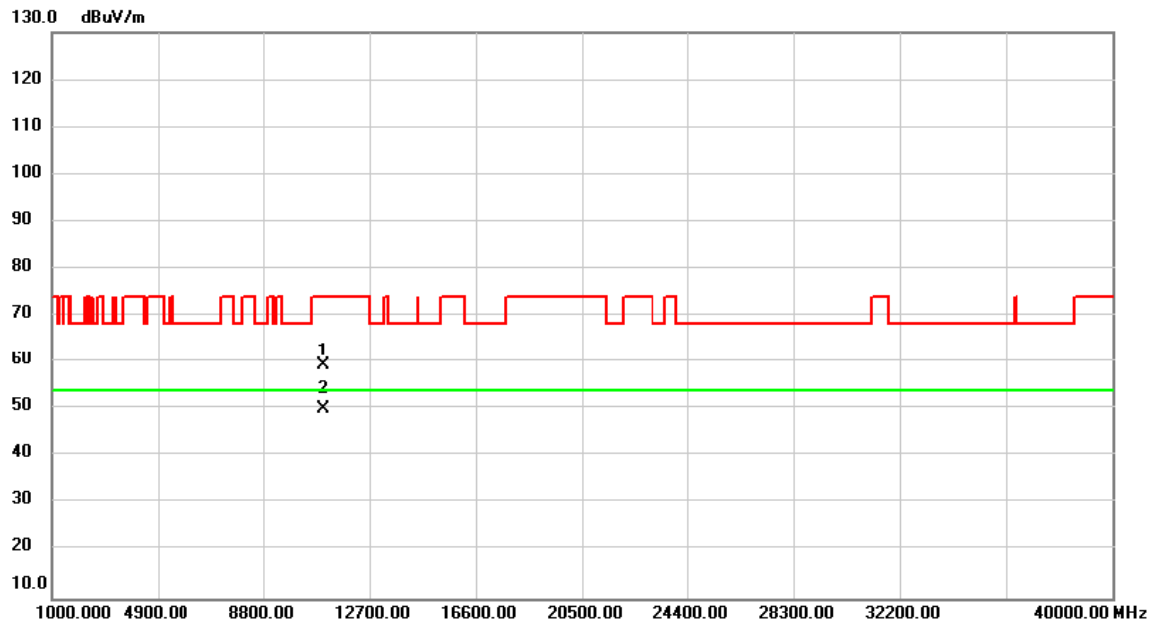


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.64	12.78	59.42	74.00	-14.58	peak	
2	*	11000.00	37.14	12.78	49.92	54.00	-4.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Vertical

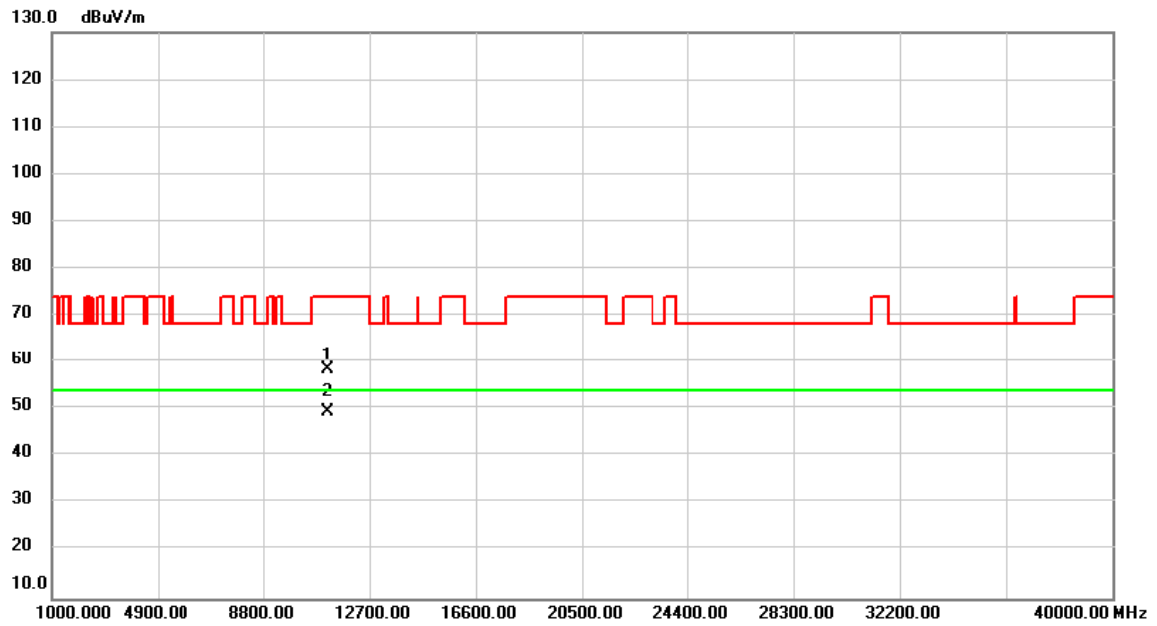


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	45.53	12.90	58.43	74.00	-15.57	peak	
2	*	11160.00	36.54	12.90	49.44	54.00	-4.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH116: 5580 MHz	Polarization	Horizontal

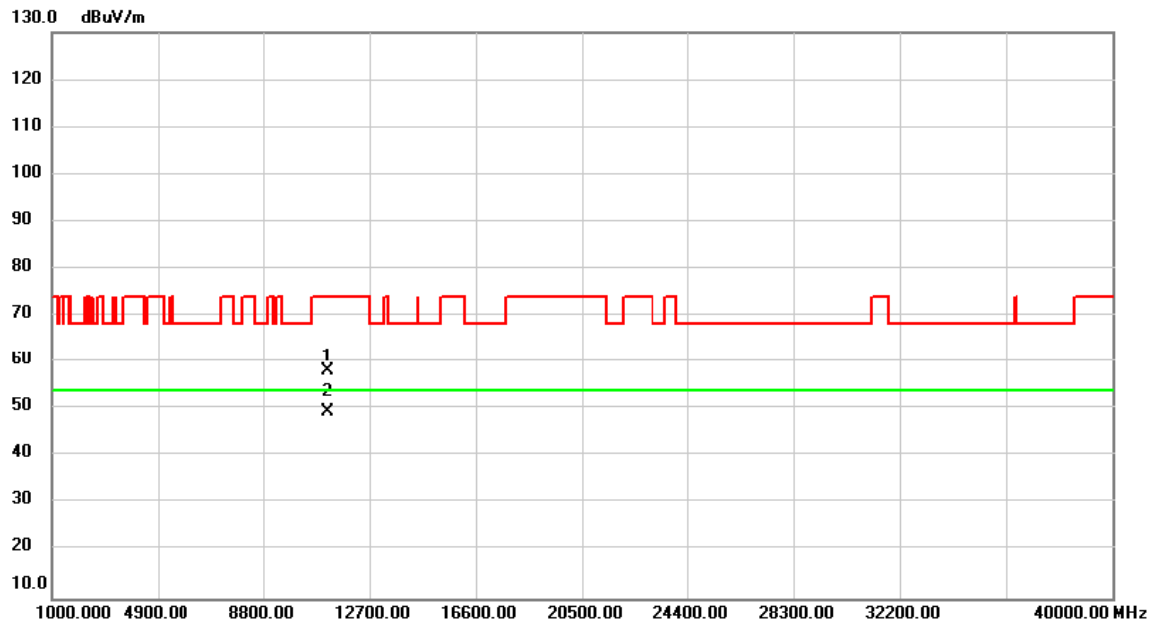


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	45.39	12.90	58.29	74.00	-15.71	peak	
2	*	11160.00	36.47	12.90	49.37	54.00	-4.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Vertical

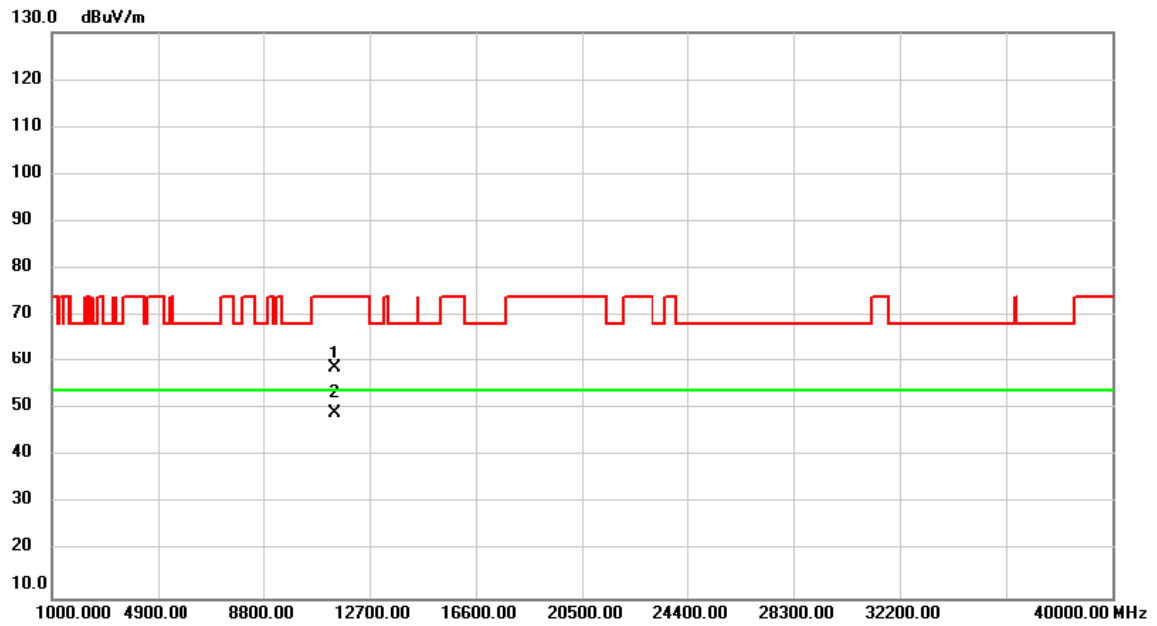


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	45.80	13.08	58.88	74.00	-15.12	peak	
2	*	11400.00	36.02	13.08	49.10	54.00	-4.90	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH140: 5700 MHz	Polarization	Horizontal

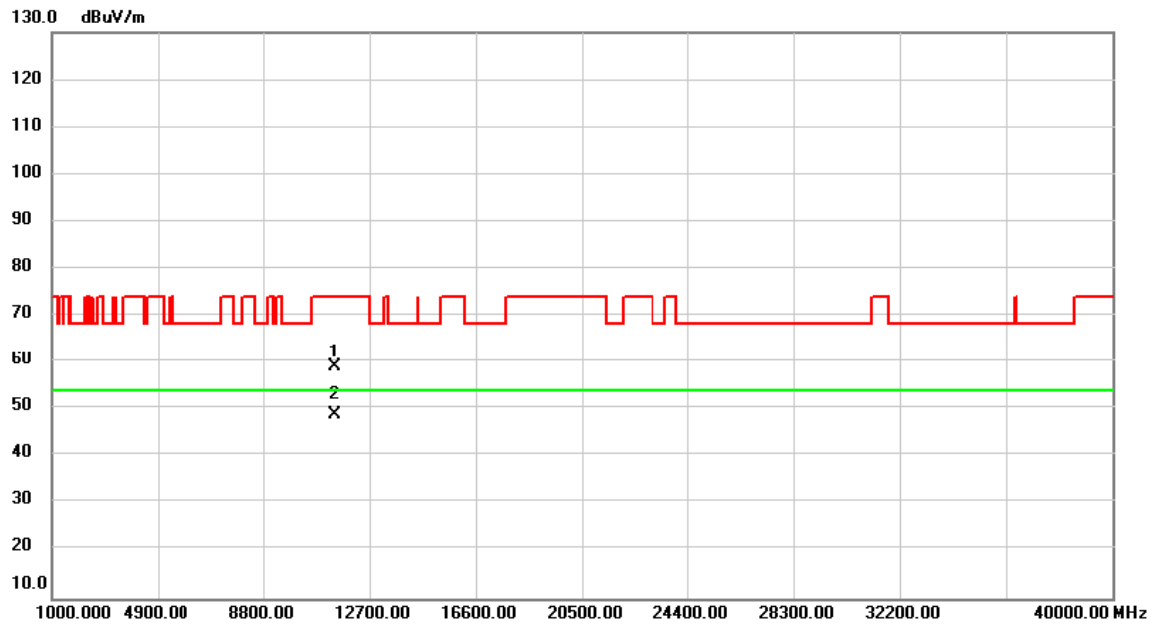


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	45.92	13.08	59.00	74.00	-15.00	peak	
2	*	11400.00	35.80	13.08	48.88	54.00	-5.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

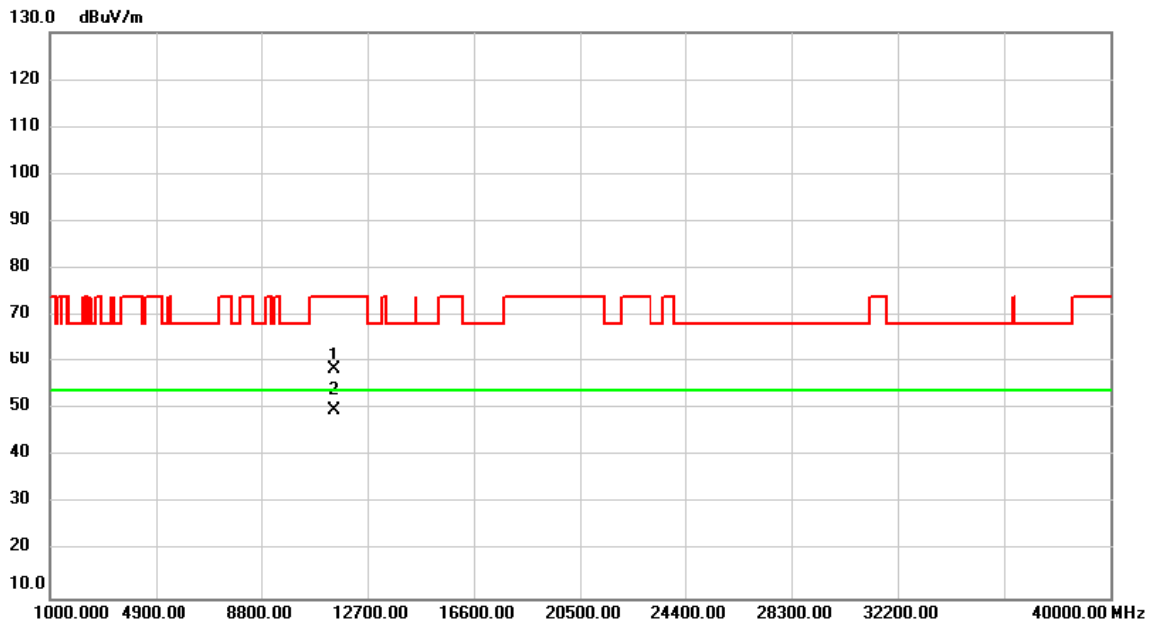


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	45.29	13.14	58.43	74.00	-15.57	peak	
2	*	11490.00	36.51	13.14	49.65	54.00	-4.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

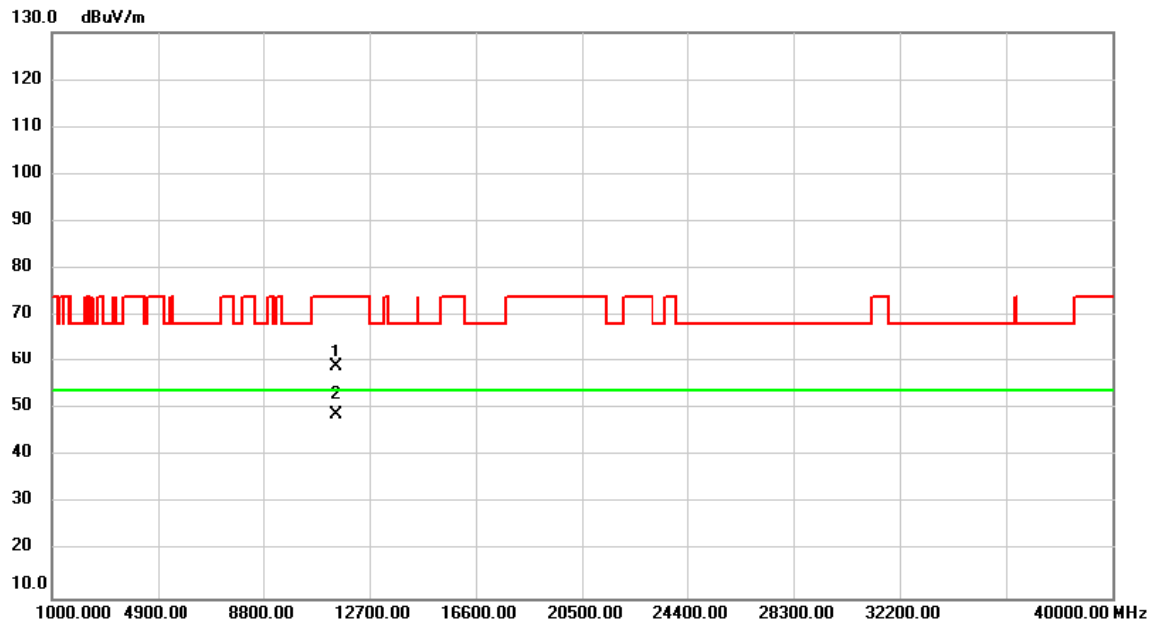


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	45.93	13.14	59.07	74.00	-14.93	peak	
2	*	11490.00	35.61	13.14	48.75	54.00	-5.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

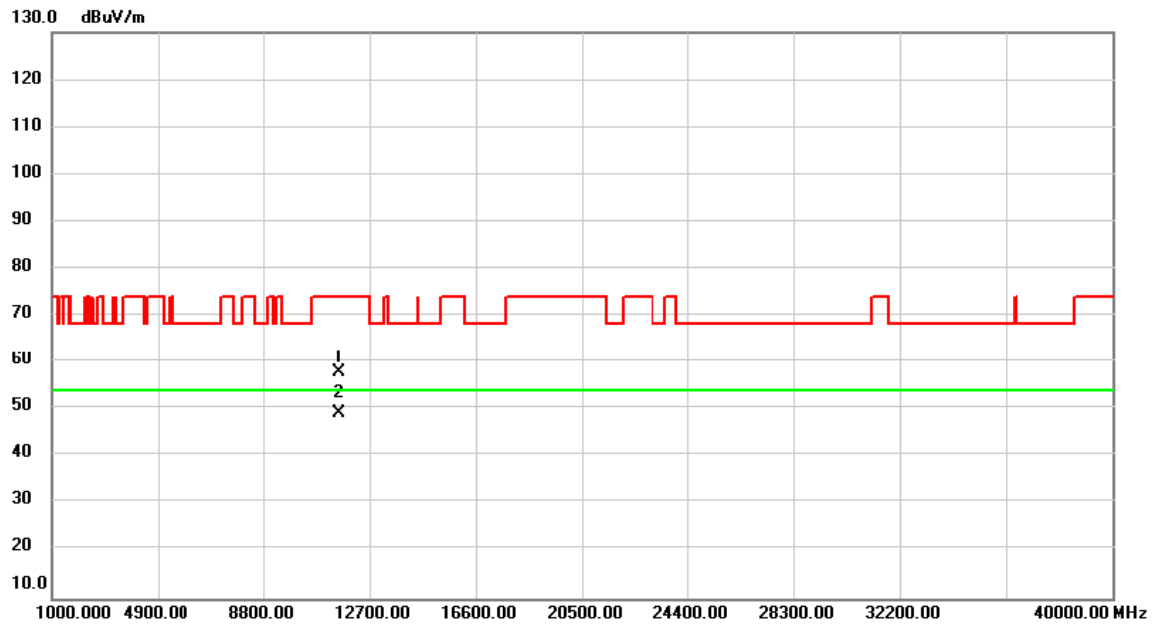


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.52	13.20	57.72	74.00	-16.28	peak	
2	*	11570.00	35.83	13.20	49.03	54.00	-4.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

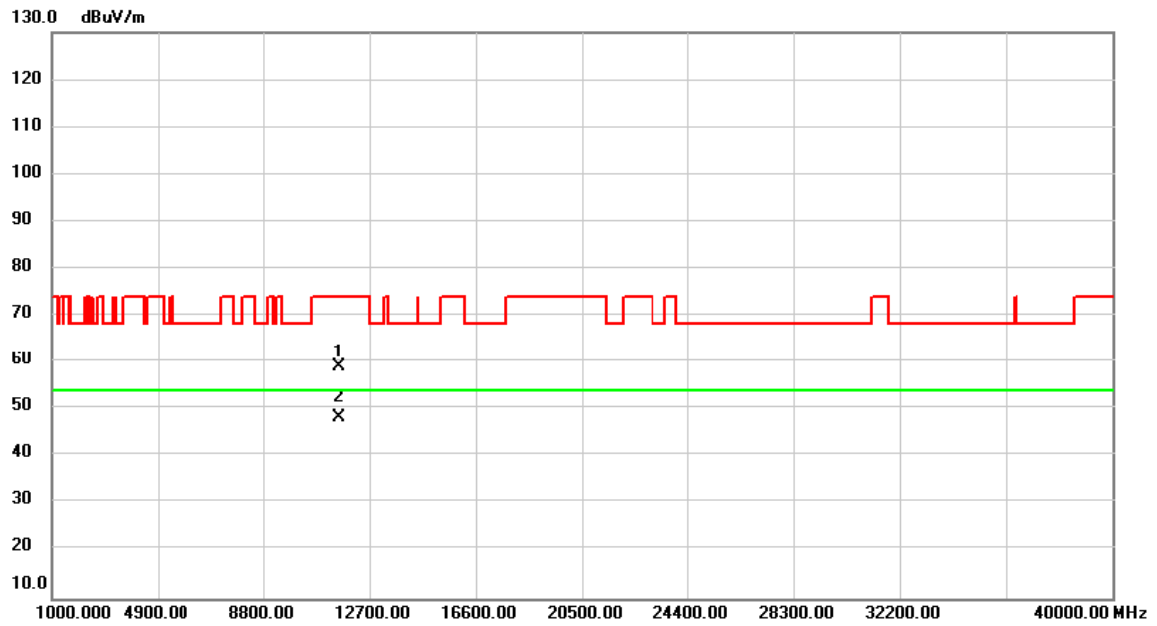


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	45.73	13.20	58.93	74.00	-15.07	peak	
2	*	11570.00	34.96	13.20	48.16	54.00	-5.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

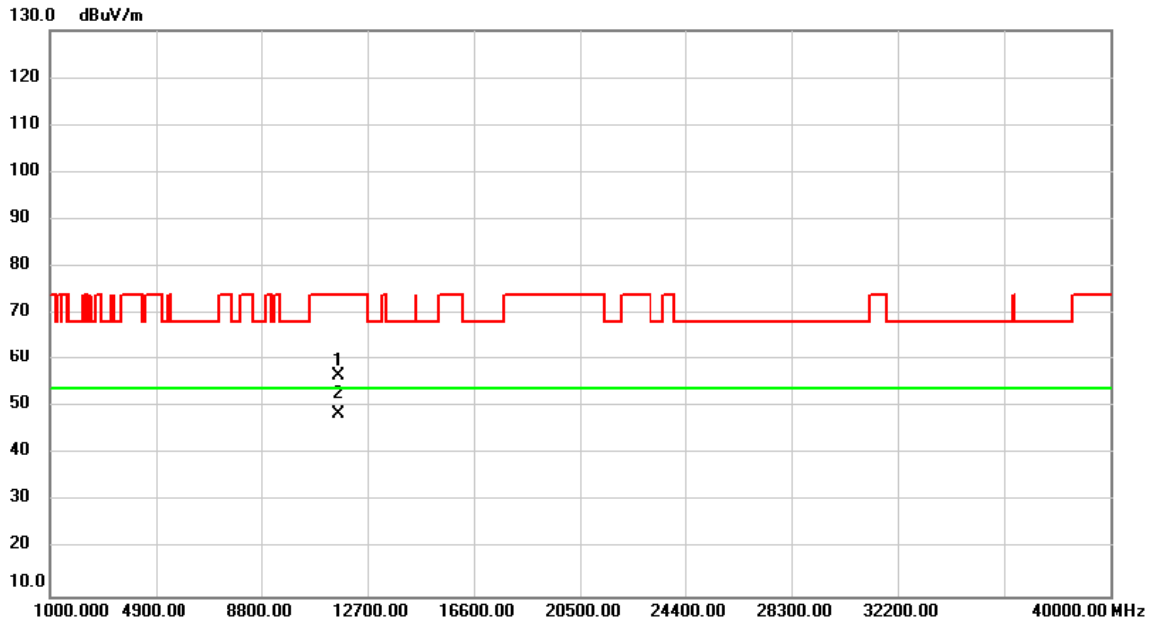


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.30	13.25	56.55	74.00	-17.45	peak	
2	*	11650.00	35.20	13.25	48.45	54.00	-5.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW20)	Test Date	2021/4/26
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

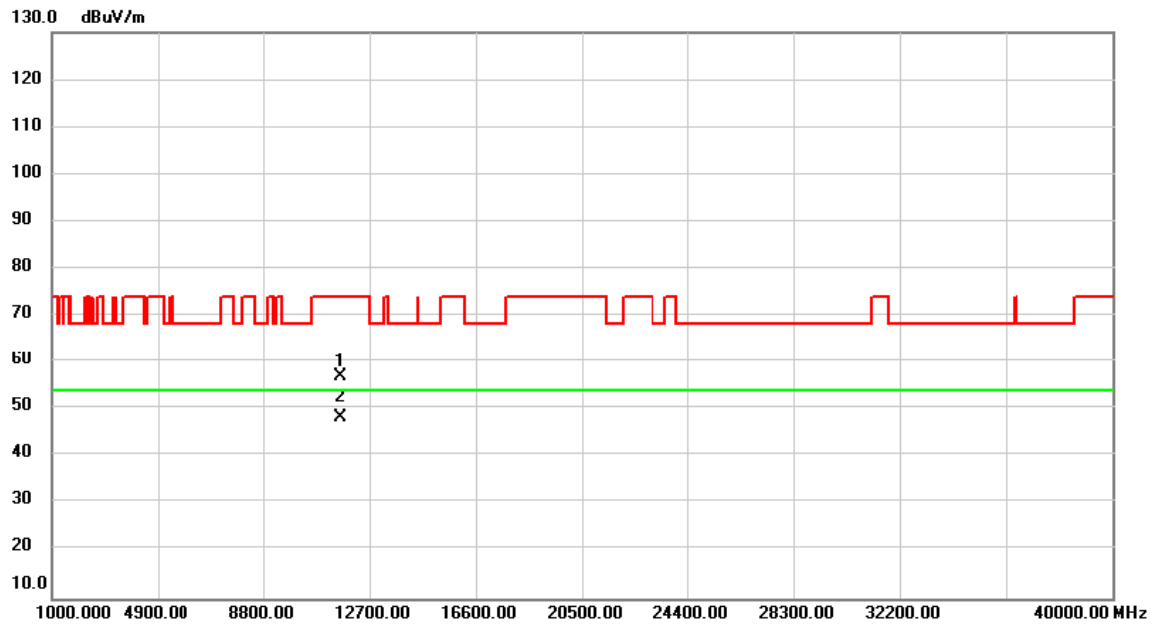


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.65	13.25	56.90	74.00	-17.10	peak	
2	*	11650.00	35.07	13.25	48.32	54.00	-5.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

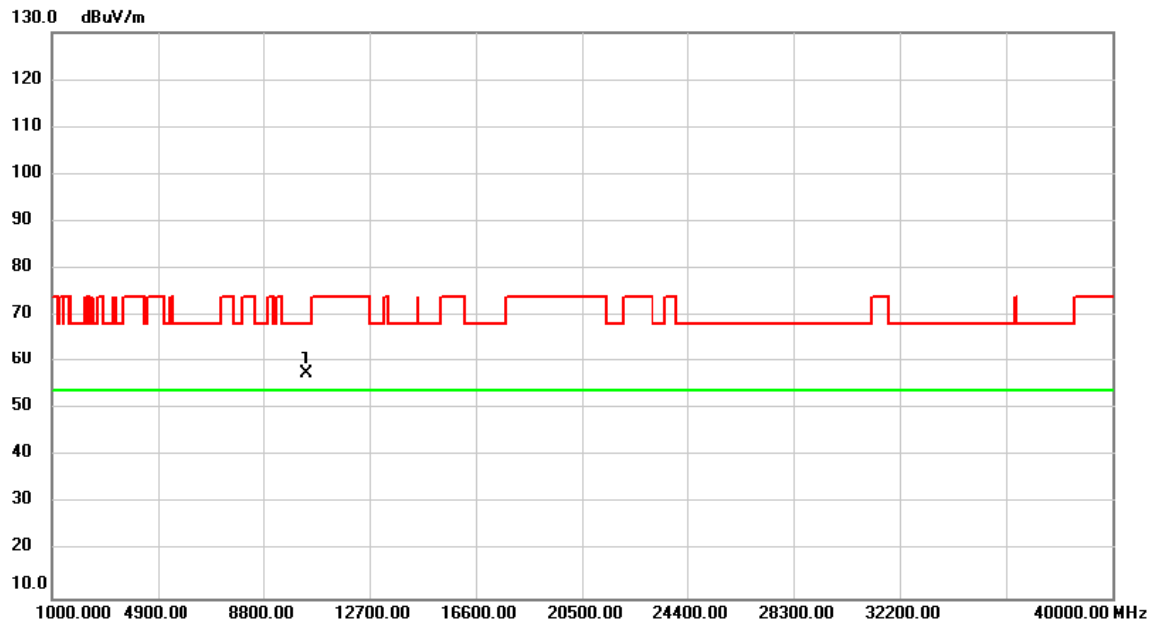


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	45.28	12.30	57.58	68.20	-10.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

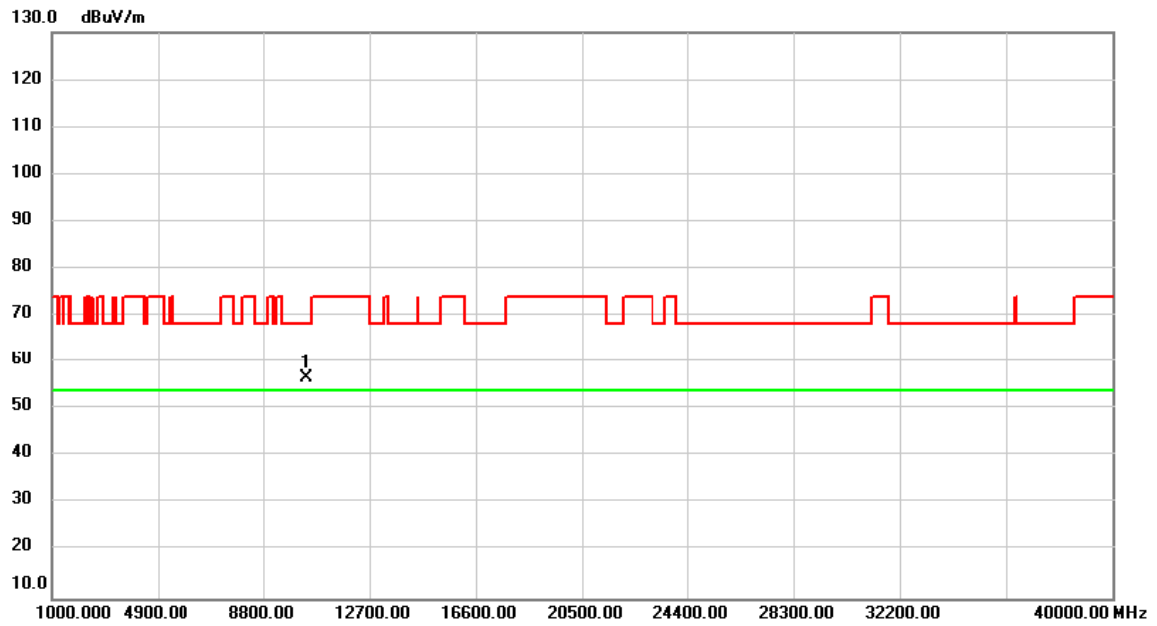


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	44.42	12.30	56.72	68.20	-11.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

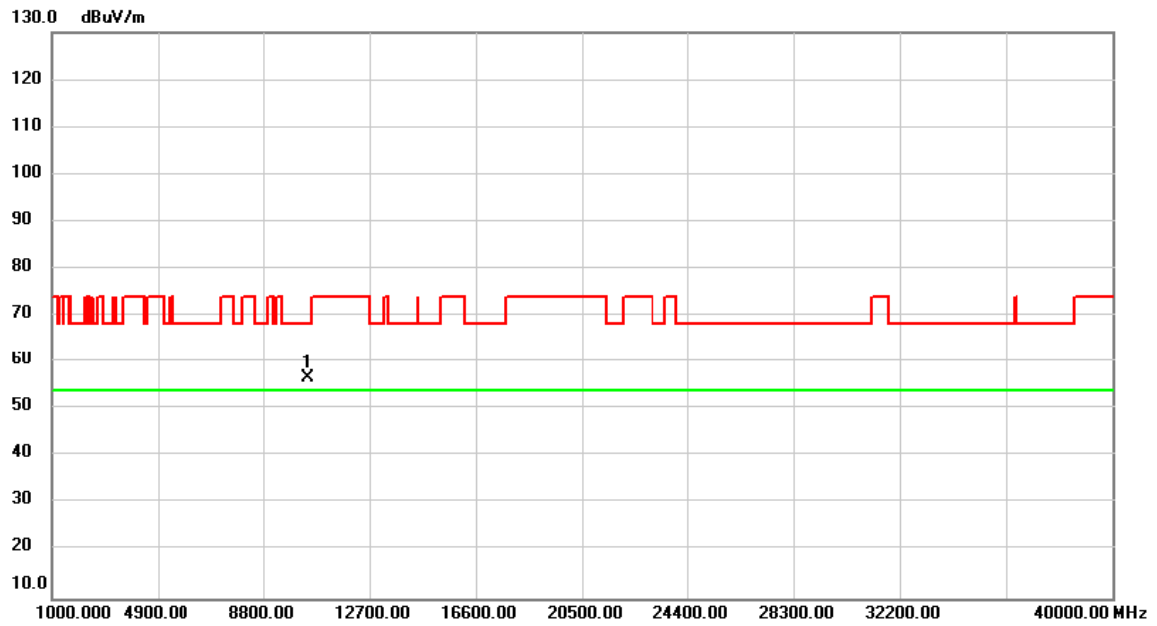


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	44.38	12.35	56.73	68.20	-11.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

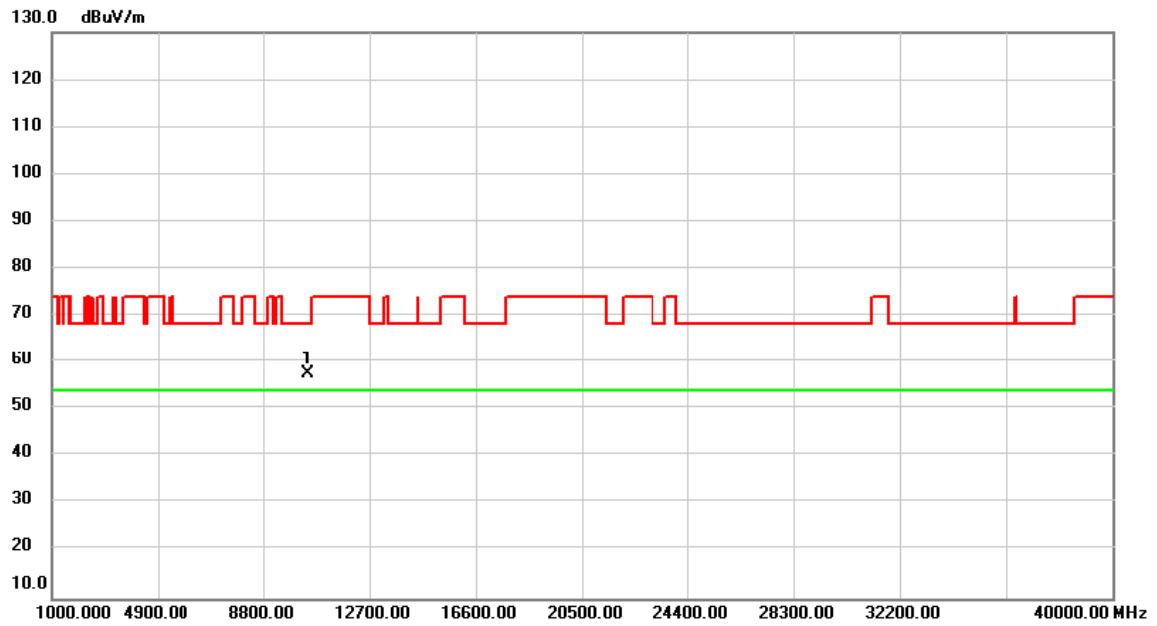


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	45.25	12.35	57.60	68.20	-10.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Vertical

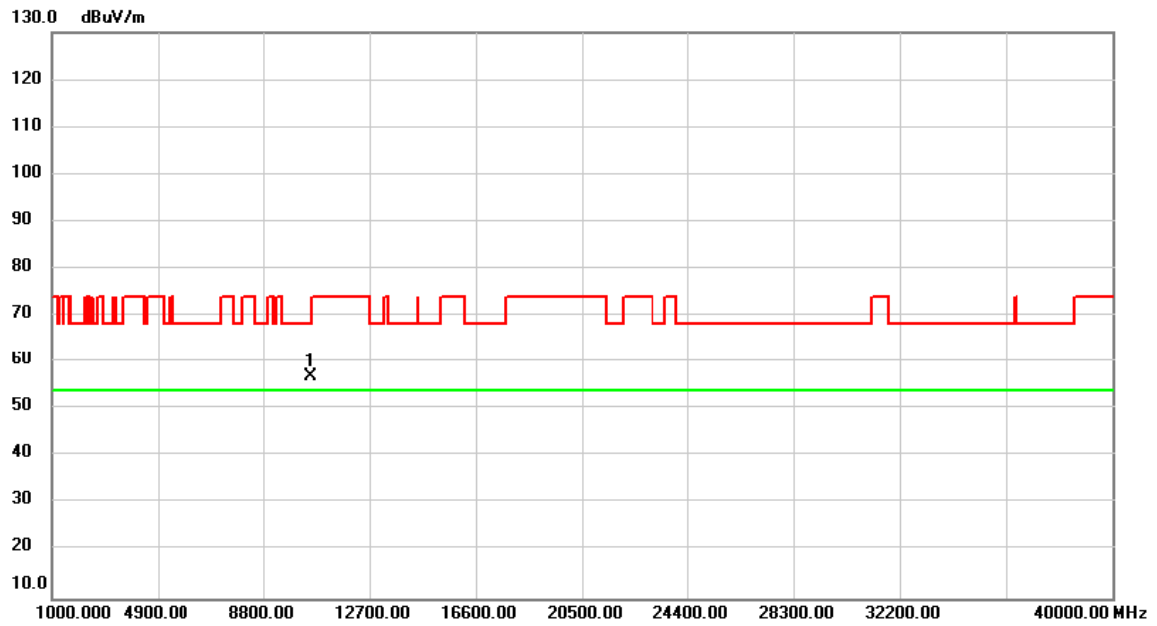


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	44.48	12.41	56.89	68.20	-11.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH54: 5270 MHz	Polarization	Horizontal

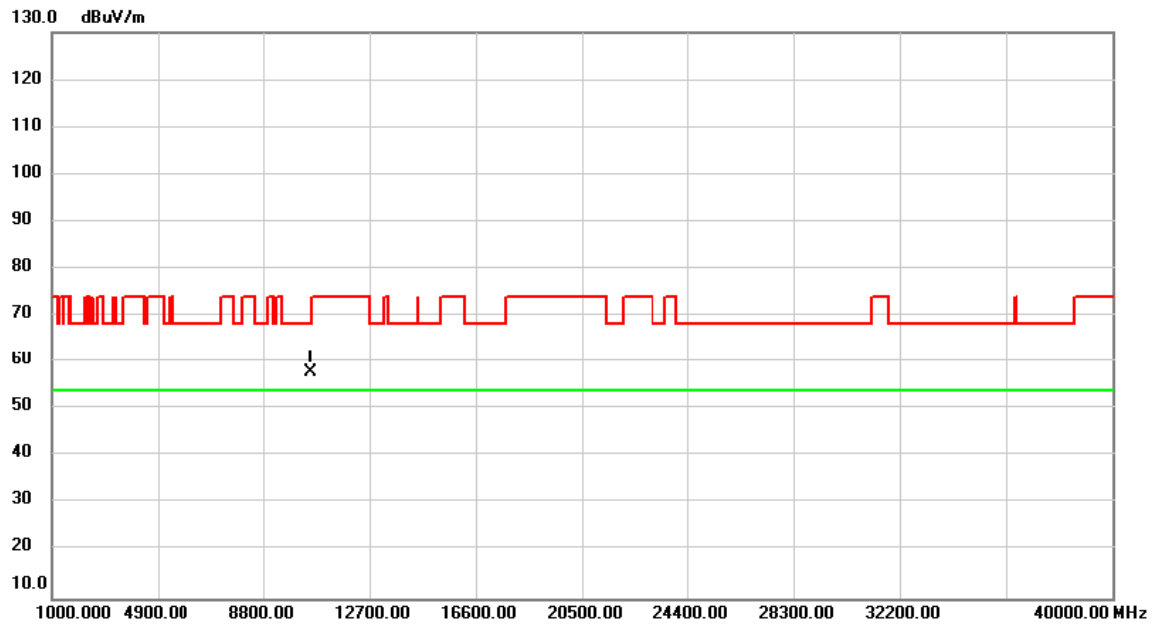


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	45.56	12.41	57.97	68.20	-10.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Vertical

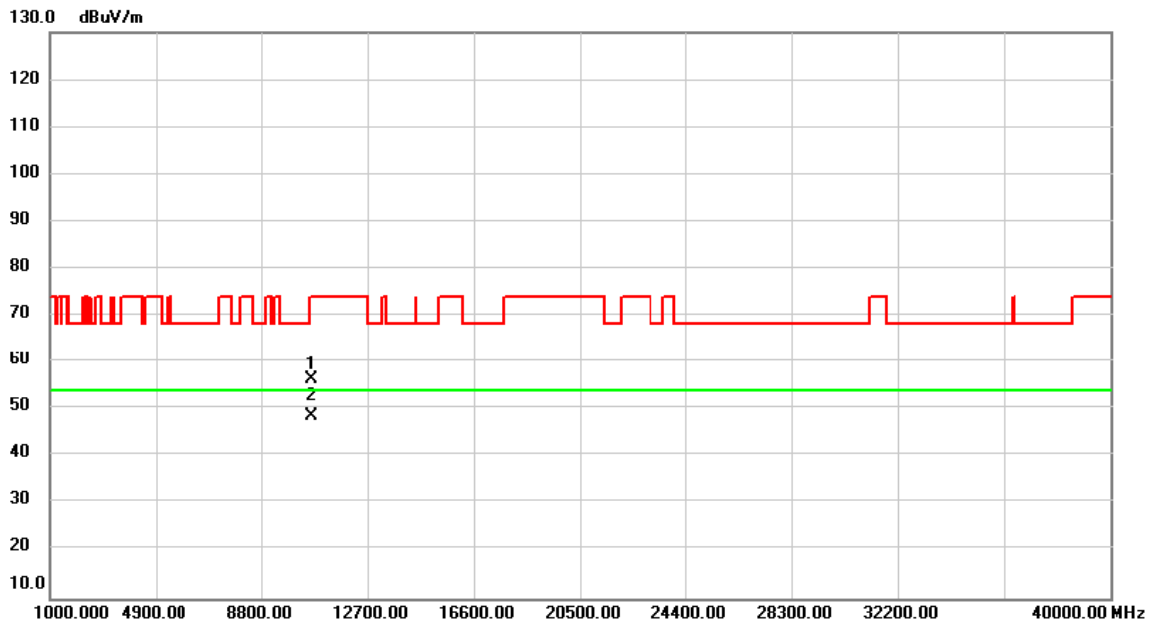


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	43.73	12.47	56.20	74.00	-17.80	peak	
2	*	10620.00	36.13	12.47	48.60	54.00	-5.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH62: 5310 MHz	Polarization	Horizontal

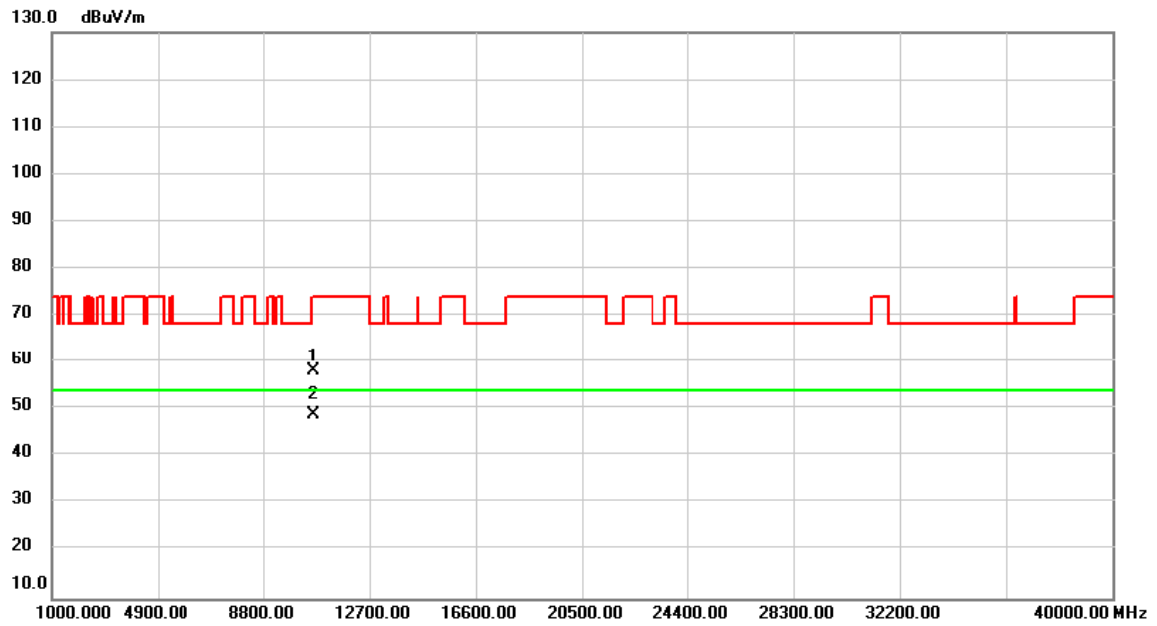


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	45.76	12.47	58.23	74.00	-15.77	peak	
2	*	10620.00	36.24	12.47	48.71	54.00	-5.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Vertical

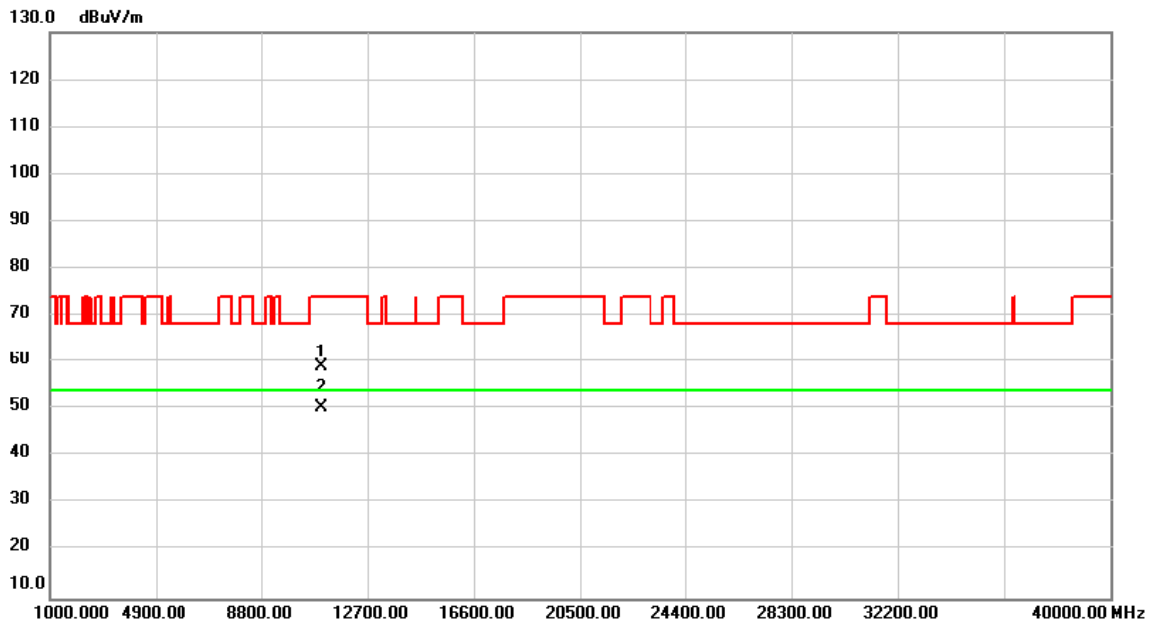


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.26	12.79	59.05	74.00	-14.95	peak	
2	*	11020.00	37.70	12.79	50.49	54.00	-3.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH102: 5510 MHz	Polarization	Horizontal

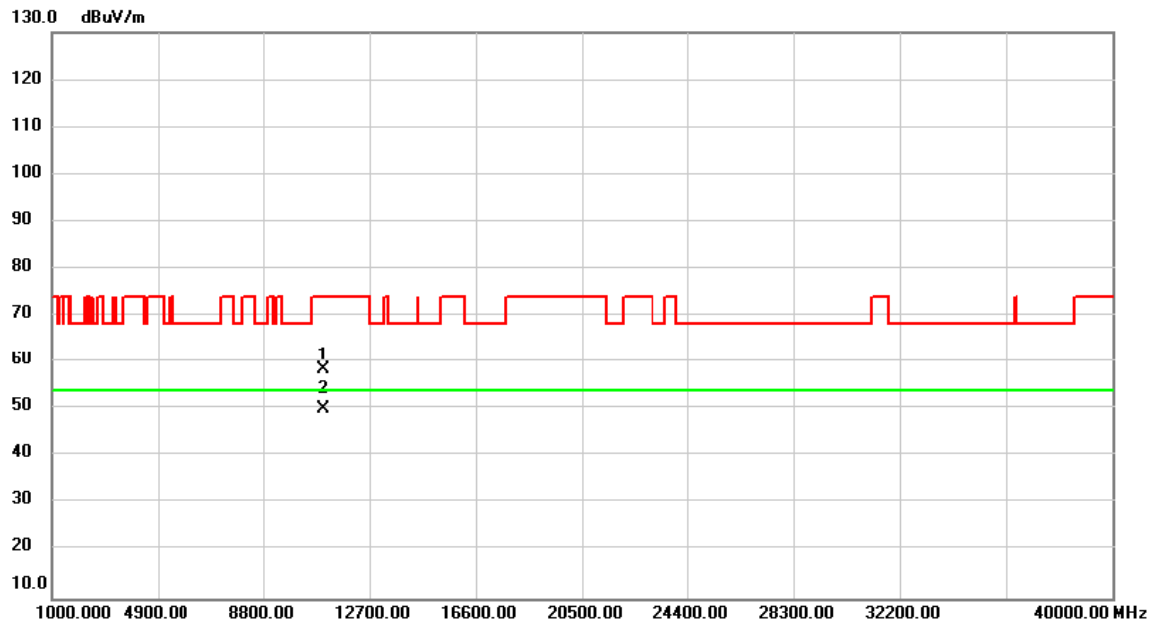


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	45.71	12.79	58.50	74.00	-15.50	peak	
2	*	11020.00	37.25	12.79	50.04	54.00	-3.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Vertical

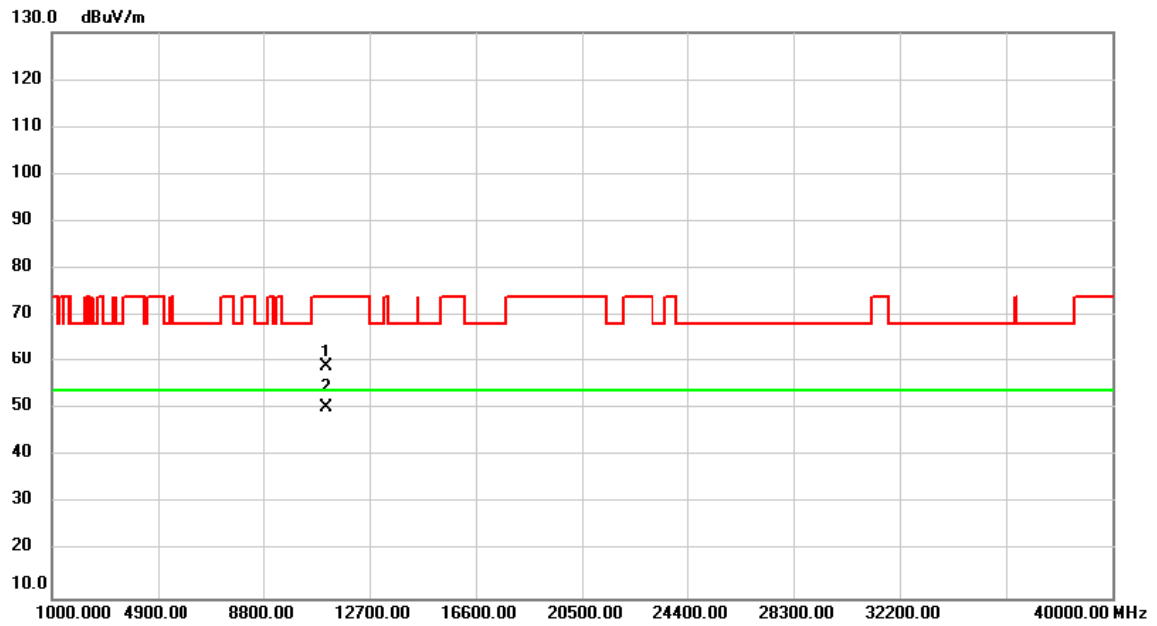


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	46.06	12.85	58.91	74.00	-15.09	peak	
2	*	11100.00	37.40	12.85	50.25	54.00	-3.75	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH110: 5550 MHz	Polarization	Horizontal

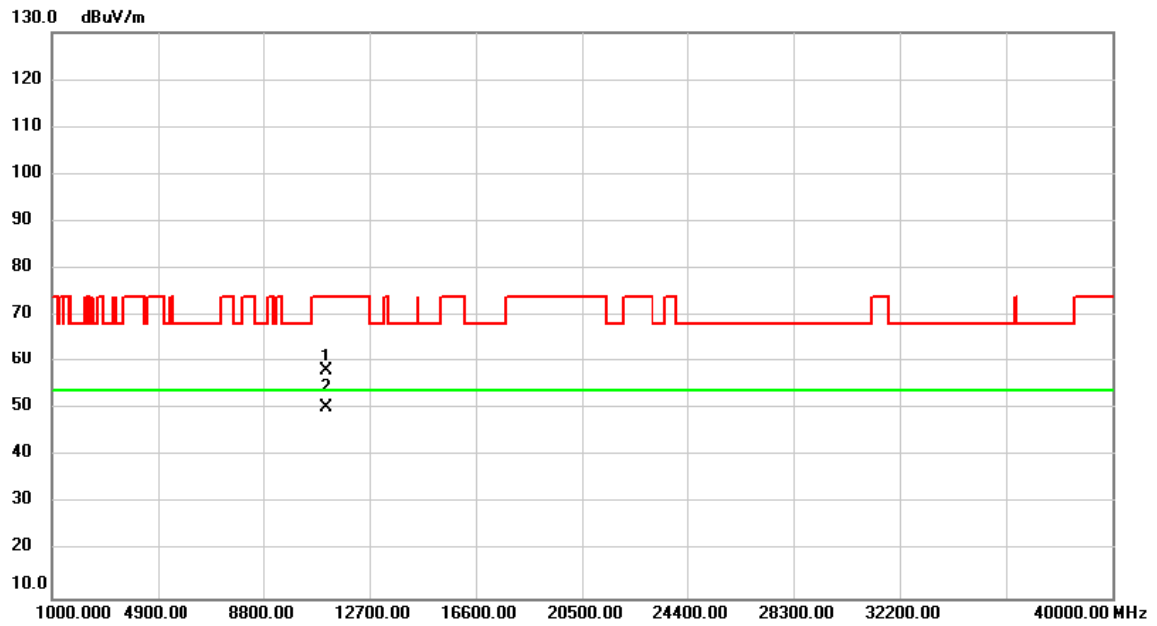


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	45.40	12.85	58.25	74.00	-15.75	peak	
2	*	11100.00	37.52	12.85	50.37	54.00	-3.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Vertical

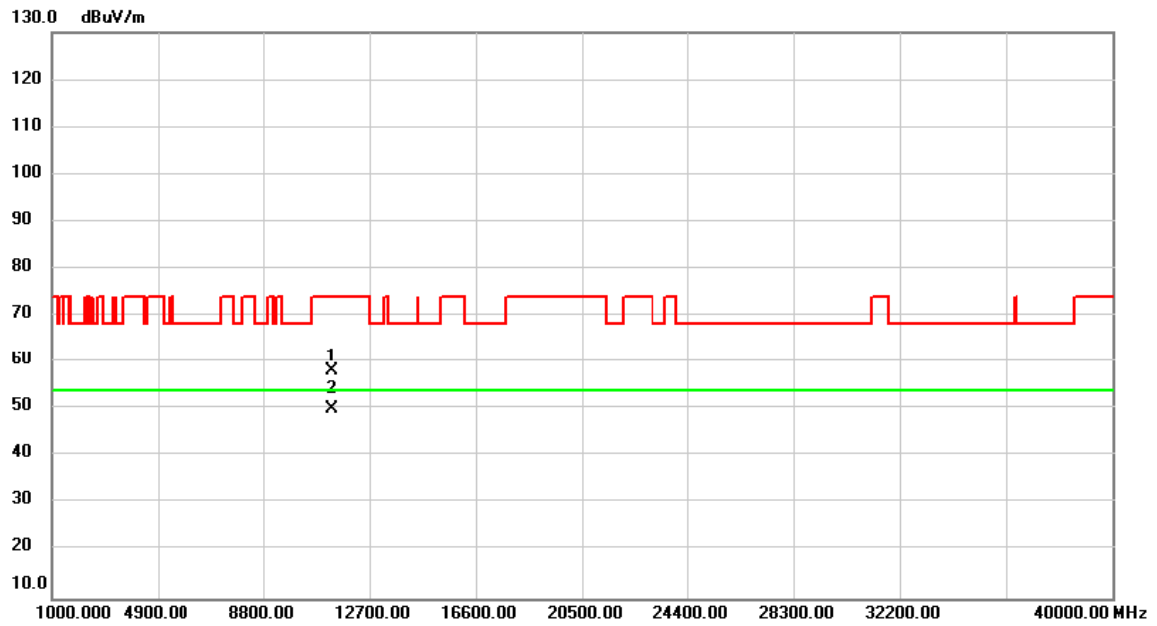


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	45.27	13.03	58.30	74.00	-15.70	peak	
2	*	11340.00	36.93	13.03	49.96	54.00	-4.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH134: 5670 MHz	Polarization	Horizontal

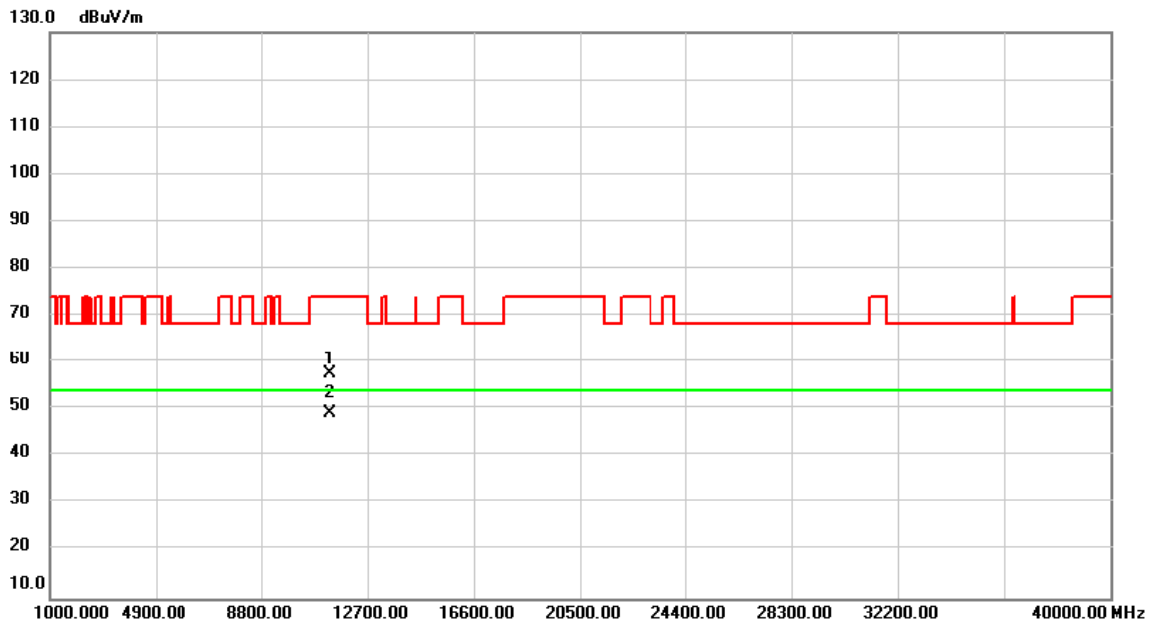


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	44.59	13.03	57.62	74.00	-16.38	peak	
2	*	11340.00	36.13	13.03	49.16	54.00	-4.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

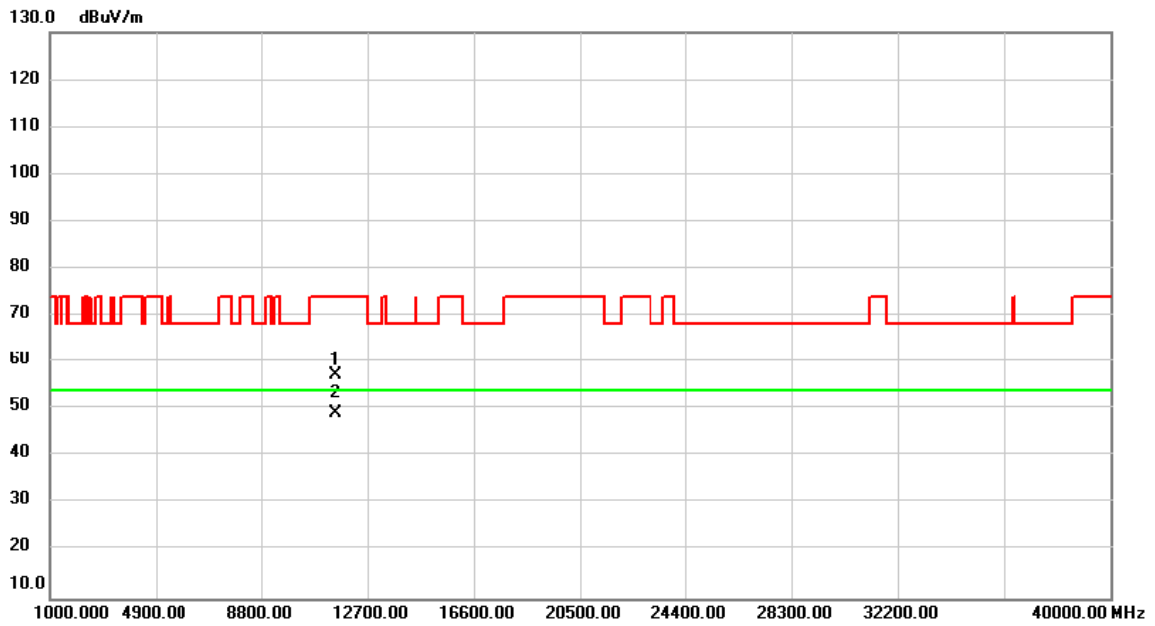


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	44.18	13.17	57.35	74.00	-16.65	peak	
2	*	11510.00	36.13	13.17	49.30	54.00	-4.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_ IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

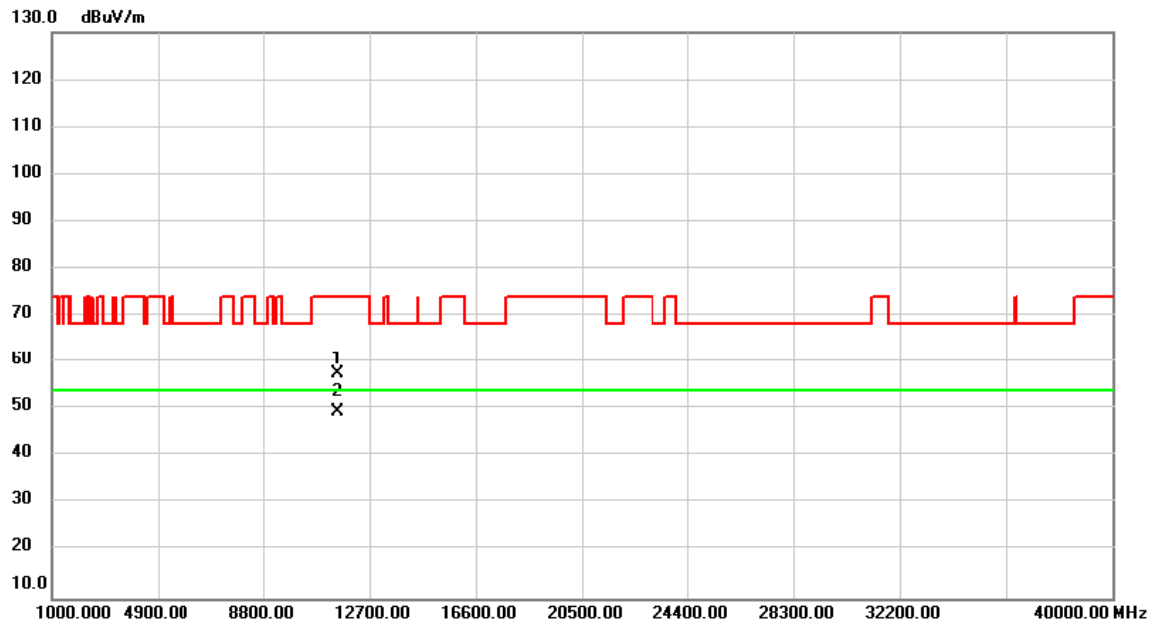


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	44.34	13.17	57.51	74.00	-16.49	peak	
2	*	11510.00	36.34	13.17	49.51	54.00	-4.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

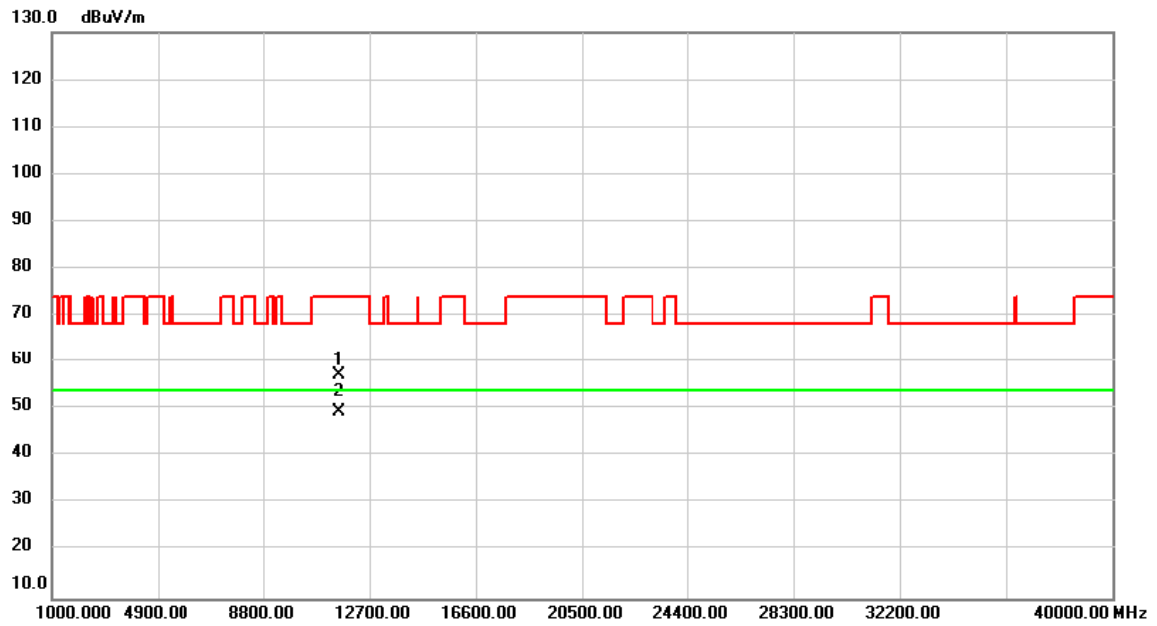


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.09	13.21	57.30	74.00	-16.70	peak	
2	*	11590.00	36.38	13.21	49.59	54.00	-4.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW40)	Test Date	2021/4/26
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

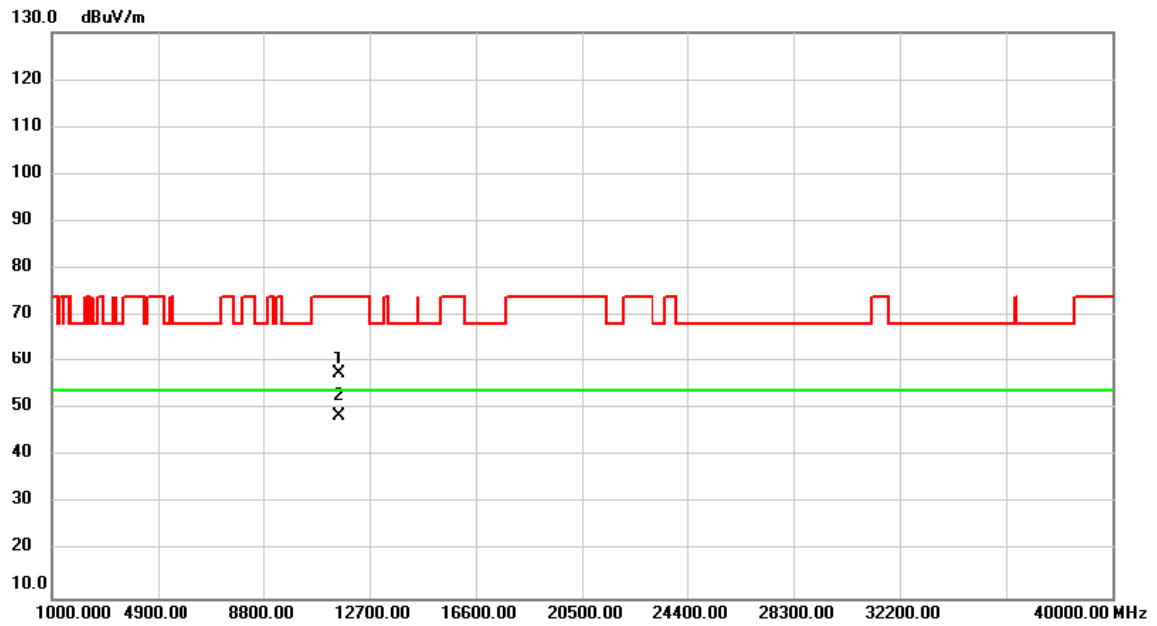


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.45	13.21	57.66	74.00	-16.34	peak	
2	*	11590.00	35.48	13.21	48.69	54.00	-5.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_ IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

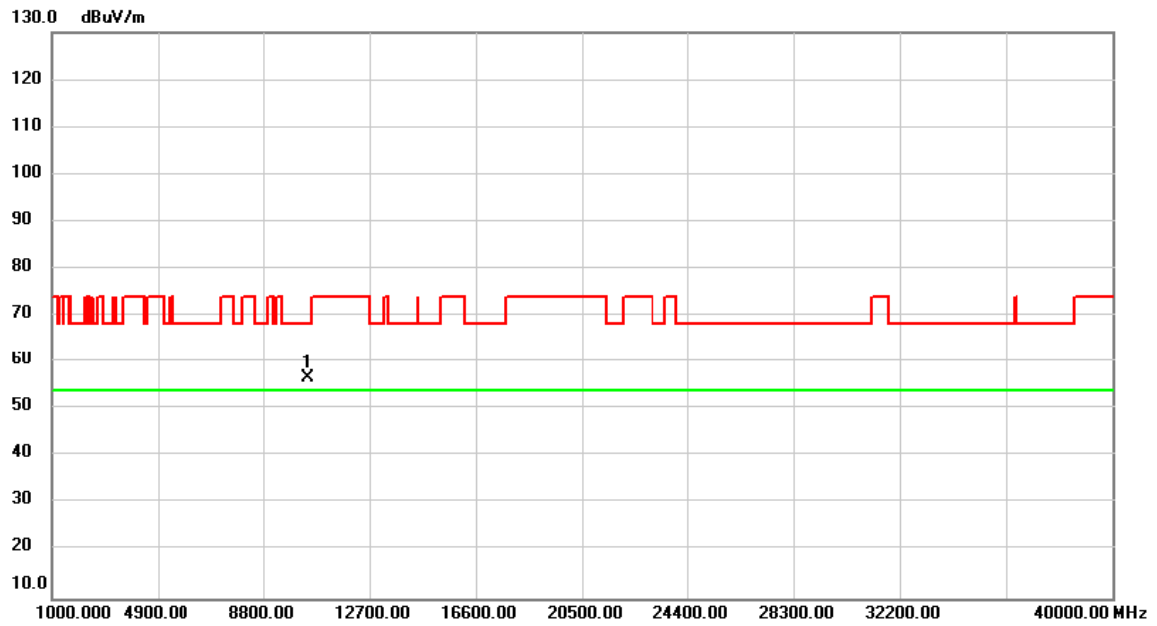


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	44.43	12.32	56.75	68.20	-11.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

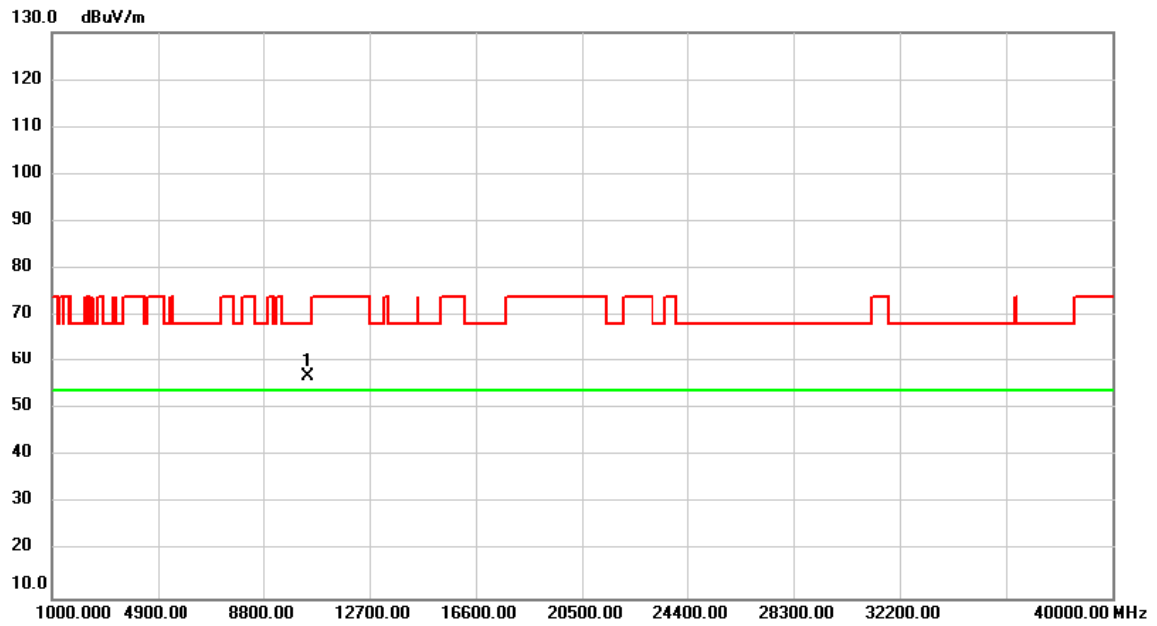


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	44.51	12.32	56.83	68.20	-11.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Vertical

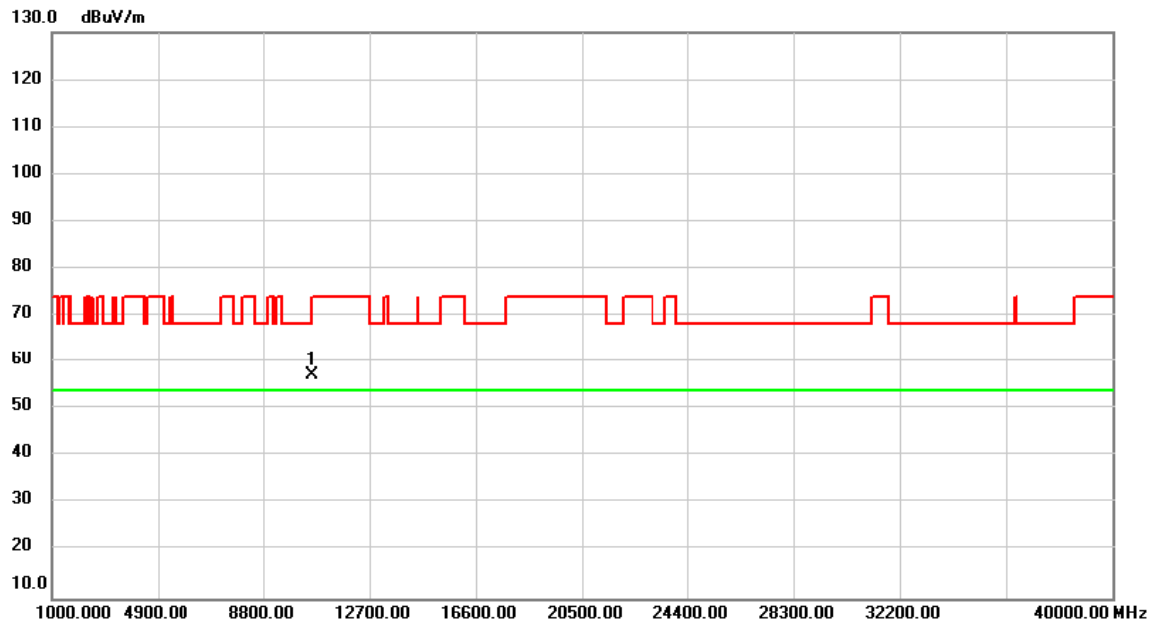


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	44.69	12.44	57.13	68.20	-11.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH58: 5290 MHz	Polarization	Horizontal

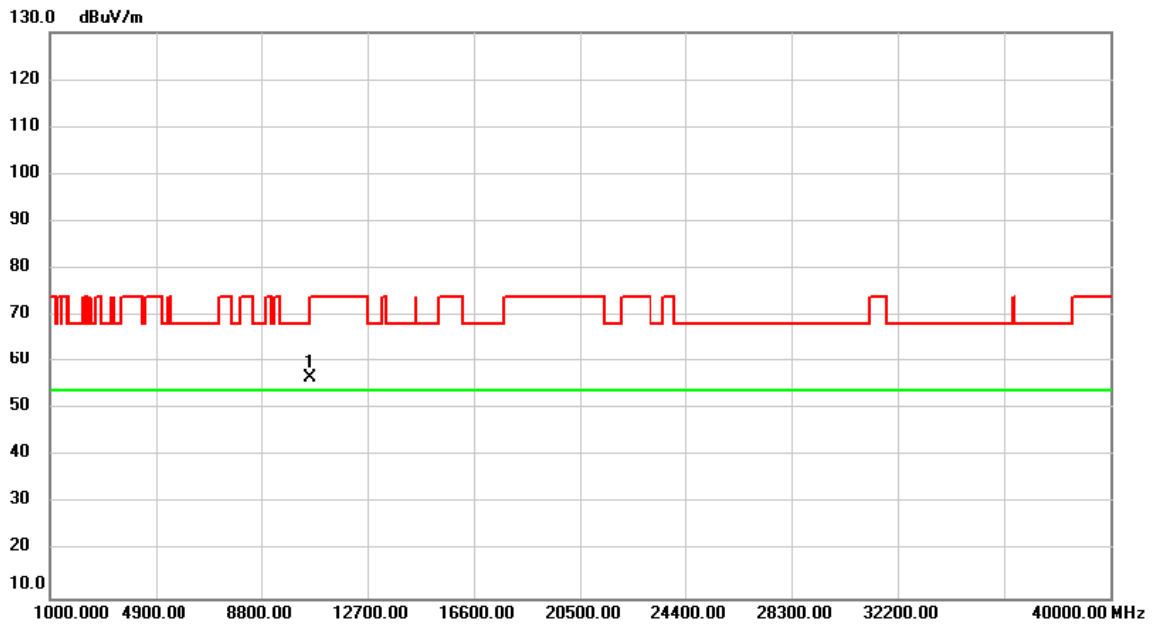


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	44.32	12.44	56.76	68.20	-11.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Vertical

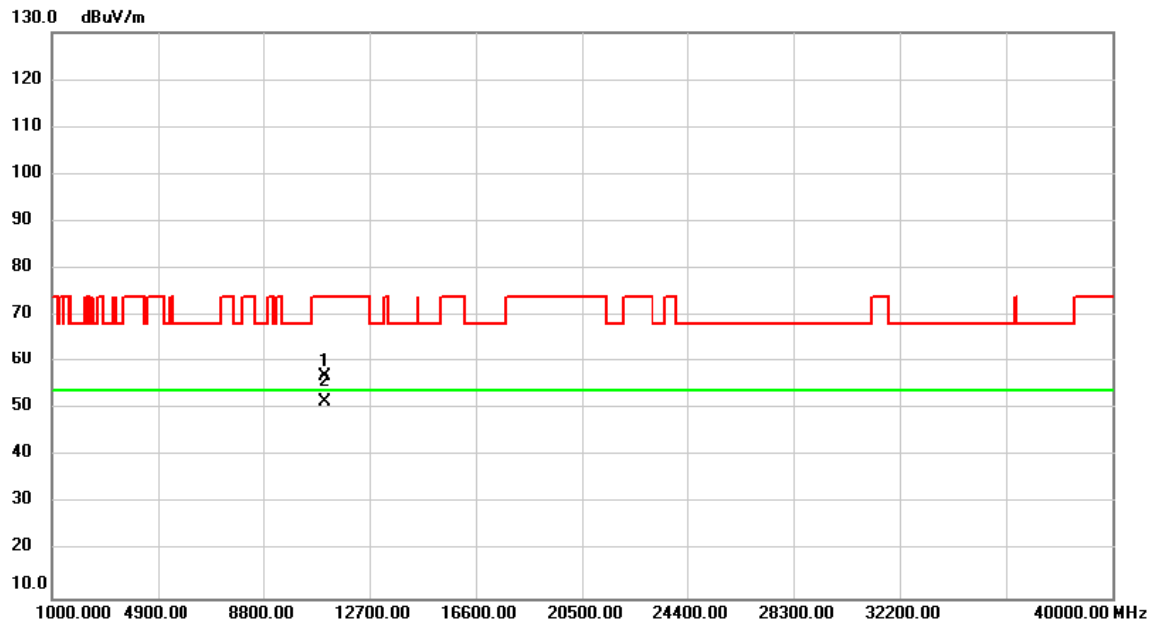


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	44.27	12.83	57.10	74.00	-16.90	peak	
2	*	11060.00	38.69	12.83	51.52	54.00	-2.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH106: 5530 MHz	Polarization	Horizontal

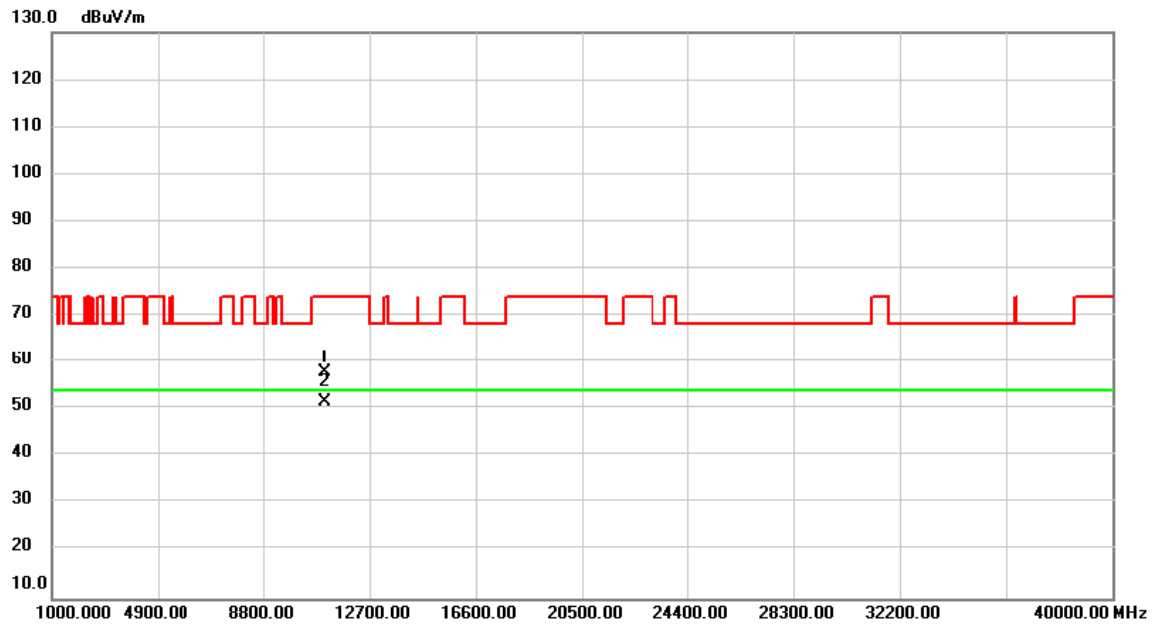


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	45.04	12.83	57.87	74.00	-16.13	peak	
2	*	11060.00	38.74	12.83	51.57	54.00	-2.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Vertical

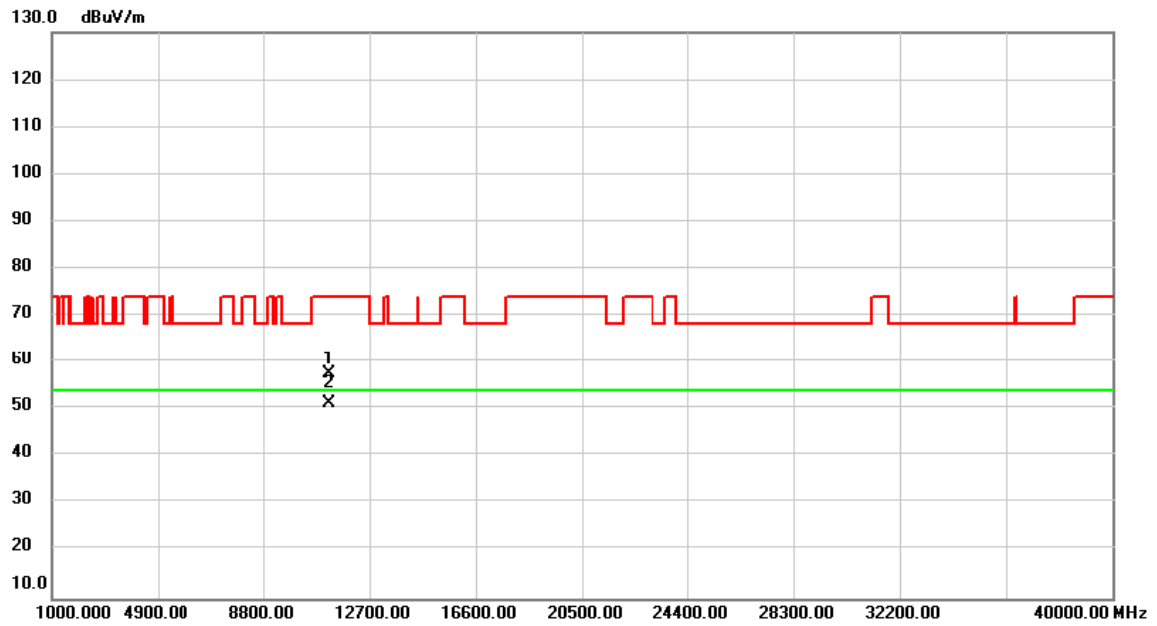


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	44.54	12.94	57.48	74.00	-16.52	peak	
2	*	11220.00	38.44	12.94	51.38	54.00	-2.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH122: 5610 MHz	Polarization	Horizontal

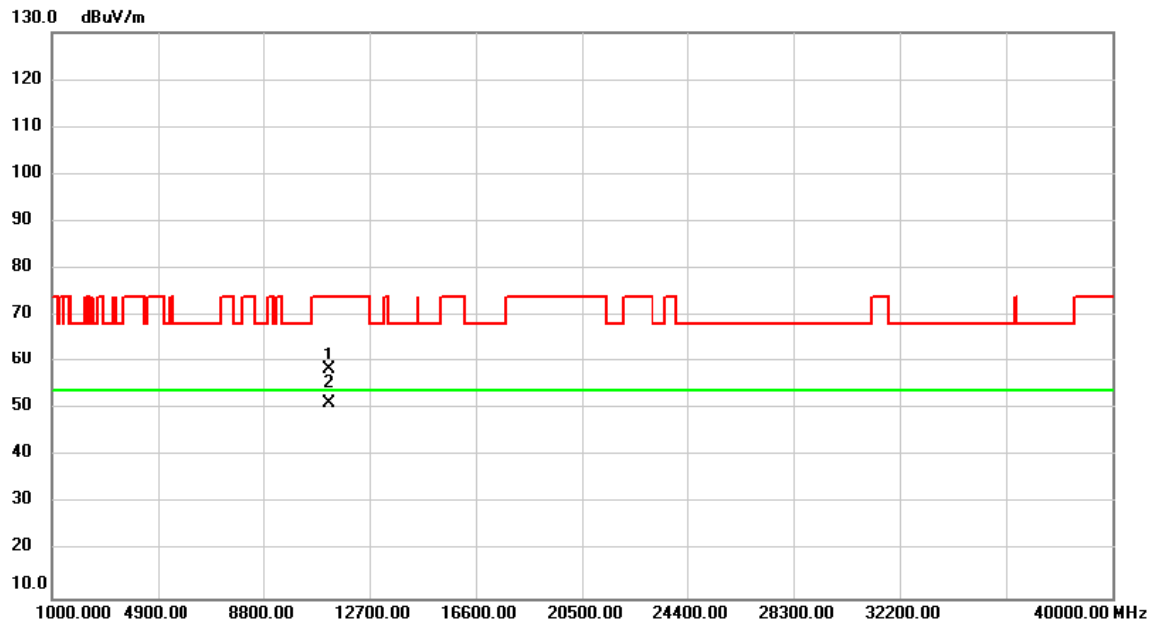


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	45.53	12.94	58.47	74.00	-15.53	peak	
2	*	11220.00	38.35	12.94	51.29	54.00	-2.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

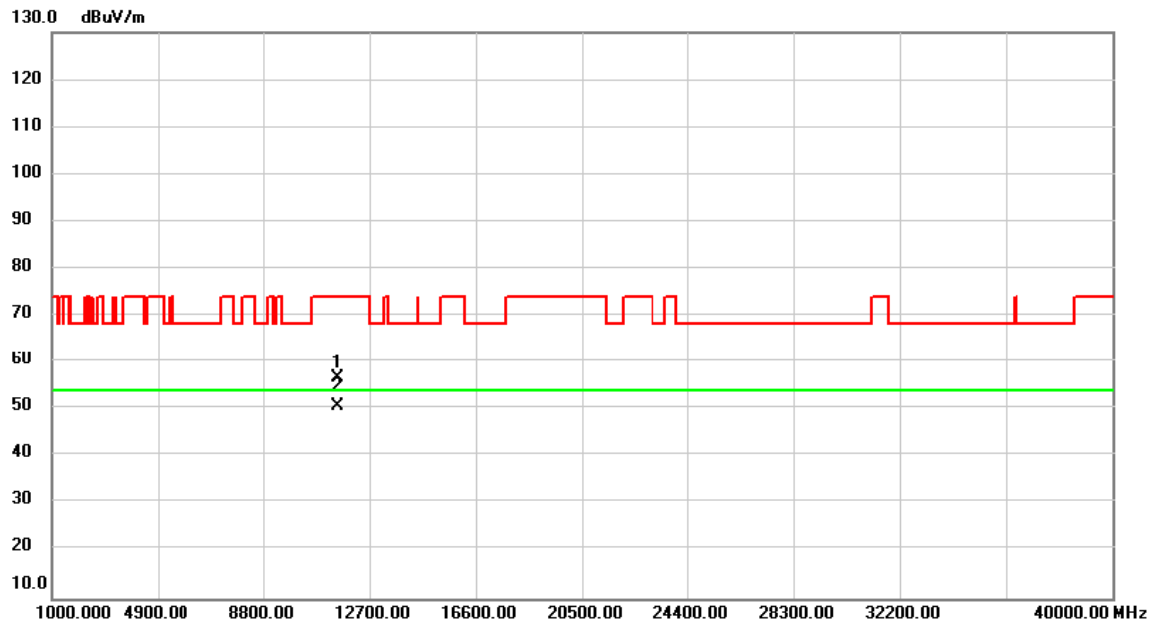


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.45	13.18	56.63	74.00	-17.37	peak	
2	*	11550.00	37.53	13.18	50.71	54.00	-3.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_IEEE 802.11ax (HEW80)	Test Date	2021/4/26
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

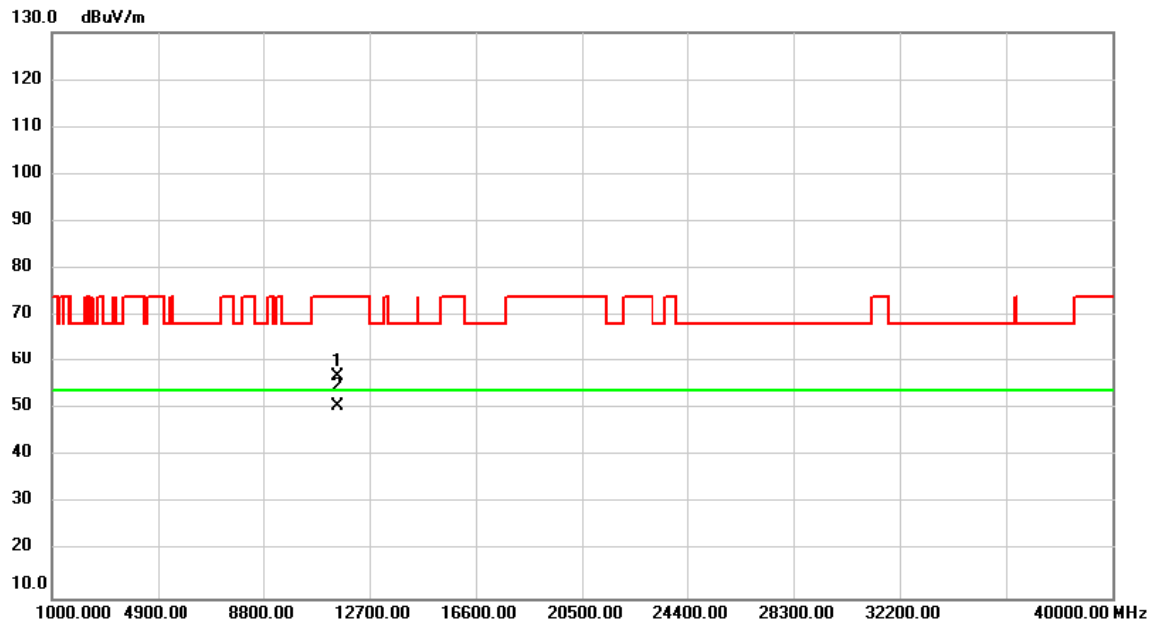

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.88	13.18	57.06	74.00	-16.94	peak	
2	*	11550.00	37.43	13.18	50.61	54.00	-3.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report