



# FCC RADIO TEST REPORT

**FCC ID** : O57FLEX5G14X05  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : Yoga 5G 14Q8CX05\*\*\*\*\*, 81XE\*\*\*\*\*, Lenovo Flex 5G 14Q8CX05\*\*\*\*\*, 82AK\*\*\*\*\* (\* = 0~9, A~Z, a~z, “-“ or blank, for marketing use only, with no impact on RF compliance of the product)  
**Applicant** : Lenovo (Shanghai) Electronics Technology Co., Ltd. Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone, Shanghai  
**Manufacturer** : Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong  
**Standard** : FCC 47 CFR Part 2, 90(R)

Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

The product was received on Nov. 27, 2019 and testing was started from Dec. 17, 2019 and completed on Feb. 07, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



## Table of Contents

**History of this test report.....3**

**Summary of Test Result.....4**

**1 General Description .....5**

    1.1 Product Feature of Equipment Under Test.....5

    1.2 Product Specification of Equipment Under Test.....5

    1.3 Modification of EUT .....6

    1.4 Testing Site .....6

    1.5 Applied Standards .....6

**2 Test Configuration of Equipment Under Test .....7**

    2.1 Test Mode .....7

    2.2 Connection Diagram of Test System.....8

    2.3 Support Unit used in test configuration and system .....8

    2.4 Measurement Results Explanation Example.....8

    2.5 Frequency List of Low/Middle/High Channels .....9

**3 Conducted Test Items.....10**

    3.1 Measuring Instruments .....10

    3.2 Conducted Output Power Measurement and ERP.....11

    3.3 Peak-to-Average Ratio .....12

    3.4 Occupied Bandwidth.....13

    3.5 Conducted Band Edge .....14

    3.6 Emission Mask.....15

    3.7 Conducted Spurious Emission .....16

    3.8 Frequency Stability .....17

**4 Radiated Test Items .....18**

    4.1 Measuring Instruments .....18

    4.2 Radiated Spurious Emission .....19

**5 List of Measuring Equipment.....20**

**6 Uncertainty of Evaluation.....21**

**Appendix A. Test Results of Conducted Test**

**Appendix B. Test Results of ERP and Radiated Test**

**Appendix C. Test Setup Photographs**





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §90.210 (n)	Emission Mask	Pass	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Pass	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 15.11 dB at 1584.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Ruby Zou**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	Yoga 5G 14Q8CX05*****, 81XE*****, Lenovo Flex 5G 14Q8CX05*****, 82AK***** (* = 0~9, A~Z, a~z, "-" or blank, for marketing use only, with no impact on RF compliance of the product)
FCC ID	O57FLEX5G14X05
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/RFID/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

- The above EUT's information was declared by manufacturer.
- Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

Antenna Information			
WWAN	3G&LTE (dBi)		
Notebook Mode	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	AUF6Y-100015 (DC33002DB00)	AUF6Y-100017 (DC33002DB30)
	Peak gain (dbi)	Main Antenna : 2.95	Aux. Antenna : 2.85
Tablet Mode	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	AUF6Y-100015 (DC33002DB00)	AUF6Y-100017 (DC33002DB30)
	Peak gain (dbi)	Main Antenna : 2.02	Aux. Antenna : 0.92

## 1.2 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	LTE Band 14 :790.5 MHz ~ 795.5 MHz
Rx Frequency	LTE Band 14 :760.5 MHz ~ 765.5 MHz
Bandwidth	LTE Band 14 :5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 14 :23.52 dBm
Type of Modulation	QPSK / 16QAM / 64QAM



### 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	
<b>Test Engineer</b>	Jacky Wang	Benjamin Lin
<b>Temperature</b>	22~24°C	20~22°C
<b>Relative Humidity</b>	54~58%	50~54%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH13-HY	
<b>Test Engineer</b>	Jimmy Chung, Karl Hou, and Wilson Wu	
<b>Temperature</b>	17.7~24.9 C	
<b>Relative Humidity</b>	40~66.3%	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels (X, Y, Z) and Notebook type. The worst cases (X plane) were recorded in this report.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	14	-	-		v	-	-	v	v		v		v	v	v	v
26dB and 99% Bandwidth	14	-	-	v	v	-	-	v	v				v	v	v	v
Conducted Band Edge	14	-	-	v	v	-	-	v	v	v	v		v	v		v
Emission Mask	14	-	-	v	v	-	-	v	v	v	v		v	v	v	v
Conducted Spurious Emission	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Frequency Stability	14	-	-		v	-	-	v					v		v	
E.R.P	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Radiated Spurious Emission	14	Worst Case											v	v	v	
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>															

## 2.2 Connection Diagram of Test System

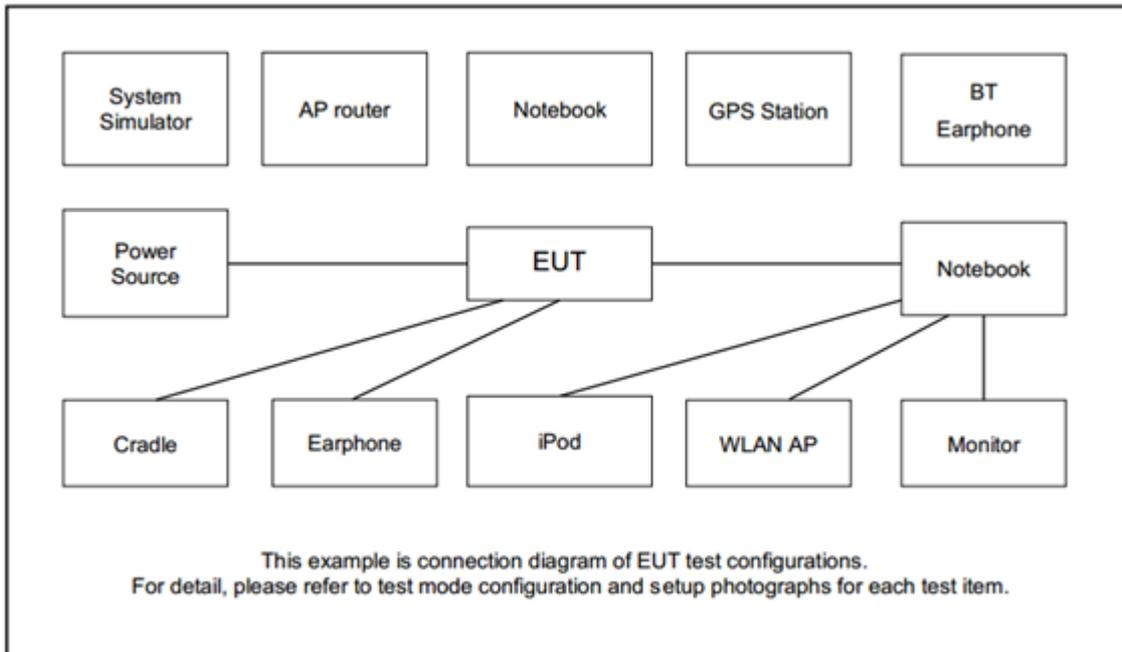

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Zyia	NA	N/A	Unshielded, 1.2m	N/A

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

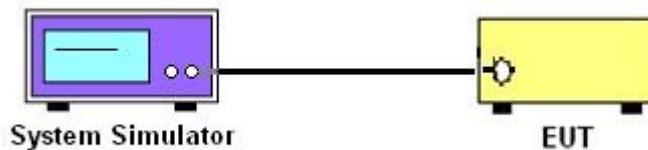

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

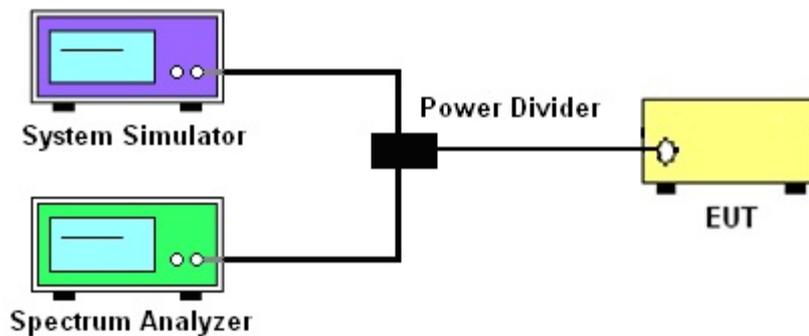

##### 3.1.4 Frequency Stability

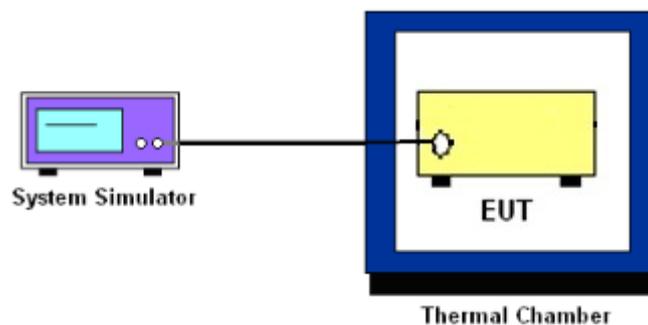

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power Measurement and ERP**

### **3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.5 Conducted Band Edge

### 3.5.1 Description of Conducted Band Edge Measurement

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 3.6 Emission Mask

### 3.6.1 Description of Emissions Mask Measurement

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 3.7 Conducted Spurious Emission

### 3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 3.8 Frequency Stability

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

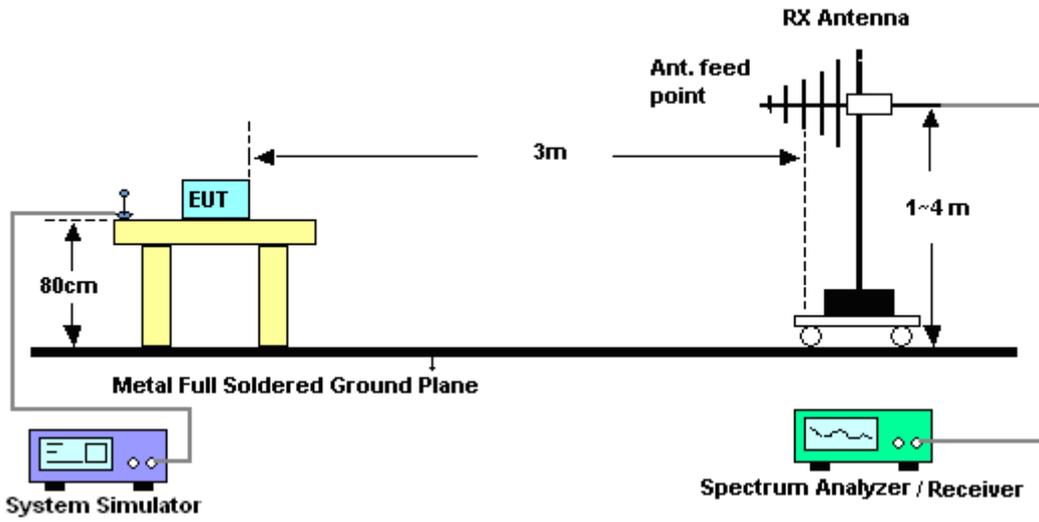

For radiated test above 1GHz

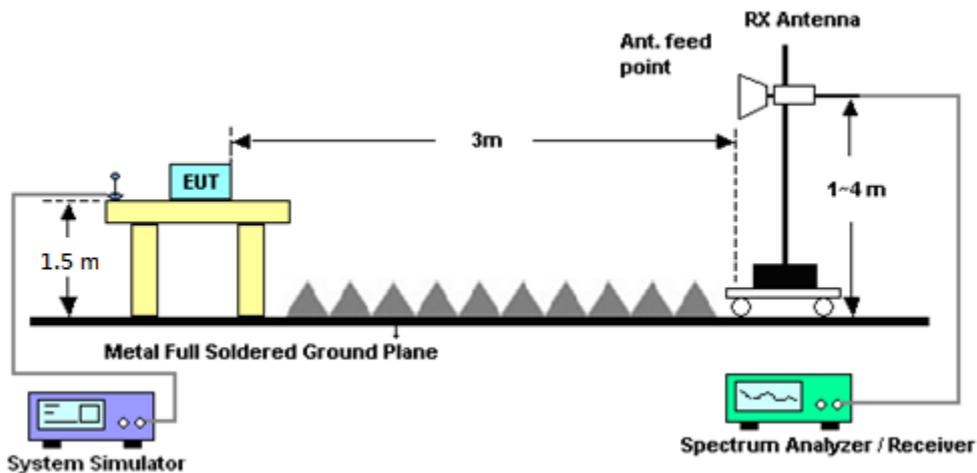

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.



## 4.2 Radiated Spurious Emission

### 4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station(Measure)	Anritsu	MT8820C	6201107507	FDD/TDD/NB-lo T/Cat-M1/SEQ	Jun. 27, 2019	Feb. 07, 2020	Jun. 26, 2020	Conducted (TH05-HY)
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 18, 2019	Dec. 17, 2019~ Jan. 07, 2020	Oct. 17, 2020	Conducted (TH05-HY)
Base Station (Measure)	Anritsu	MT8821C	6201664755	GSM / GPRS /WCDMA / LTE FDD/TDD with 44) /LTE-3CC DLCA,2CC ULCA	Mar. 03, 2019	Dec. 17, 2019~ Jan. 07, 2020	Mar. 02, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	Dec. 17, 2019~ Jan. 07, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 02, 2019	Dec. 17, 2019~ Jan. 07, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	Dec. 17, 2019~ Jan. 07, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 30, 2019	Dec. 17, 2019~ Feb. 03, 2020	Apr. 29, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	54682 & AT-N0603	30MHz~1GHz	Sep. 26, 2019	Dec. 17, 2019~ Feb. 03, 2020	Sep. 25, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 02, 2019	Dec. 17, 2019~ Feb. 03, 2020	Jul. 01, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 14, 2019	Dec. 17, 2019~ Feb. 03, 2020	May 13, 2020	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 76	18GHz~40GHz	May 14, 2019	Dec. 17, 2019~ Feb. 03, 2020	May 13, 2020	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 84	18GHz~40GHz	Dec. 10, 2019	Dec. 17, 2019~ Feb. 03, 2020	Dec. 09, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590074	1GHz~18GHz	May 20, 2019	Dec. 17, 2019~ Feb. 03, 2020	May 19, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY5537052 6	10Hz~44GHz	Mar. 19, 2019	Dec. 17, 2019~ Feb. 03, 2020	Mar. 18, 2020	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 17, 2019~ Feb. 03, 2020	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 17, 2019~ Feb. 03, 2020	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 17, 2019~ Feb. 03, 2020	N/A	Radiation (03CH13-HY)
Software	Audix	E3 6.2009-8-24	RK-000992	N/A	N/A	Dec. 17, 2019~ Feb. 03, 2020	N/A	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP157151	N/A	Jun. 17, 2019	Dec. 17, 2019~ Feb. 03, 2020	Jun. 16, 2020	Radiation (03CH13-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	Dec. 17, 2019~ Feb. 03, 2020	Aug. 26, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SF102/2*11SK2 52	MY4278/2	9kHz~40GHz	May 16, 2019	Dec. 17, 2019~ Feb. 03, 2020	May 15, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30M-18G	Feb. 13, 2019	Dec. 17, 2019~ Feb. 03, 2020	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30M~40GHz	Mar. 13, 2019	Dec. 17, 2019~ Feb. 03, 2020	Mar. 12, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60 SS	SN2	3GHz High Pass Filter	Jul. 14, 2019	Dec. 17, 2019~ Feb. 03, 2020	Jul. 13, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60 SS	SN3	1.2GHz High Pass Filter	Jul. 03, 2019	Dec. 17, 2019~ Feb. 03, 2020	Jul. 02, 2020	Radiation (03CH13-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.21
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.24
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.99
---	------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		<b>23.52</b>	
10	1	25			23.42	
10	1	49			23.36	
10	25	0			22.45	
10	25	12			22.49	
10	25	25			22.53	
10	50	0			22.49	
10	1	0	16-QAM	-	22.82	-
10	1	25			22.84	
10	1	49			22.77	
10	25	0			21.45	
10	25	12			21.47	
10	25	25			21.53	
10	50	0			21.47	
10	1	0	64-QAM		21.64	
10	1	25			21.75	
10	1	49			21.67	
10	25	0			20.50	
10	25	12			20.51	
10	25	25			20.56	
10	50	0			20.51	
5	1	0	QPSK	23.38	23.36	23.37
5	1	12		23.48	23.49	23.51
5	1	24		23.43	23.41	23.39
5	12	0		22.41	22.45	22.44
5	12	7		22.51	22.50	22.51
5	12	13		22.50	22.49	22.48
5	25	0		22.47	22.44	22.41
5	1	0	16-QAM	22.71	22.72	22.72
5	1	12		22.78	22.82	22.80
5	1	24		22.81	22.76	22.72
5	12	0		21.46	21.51	21.49
5	12	7		21.56	21.53	21.57
5	12	13		21.52	21.52	21.47
5	25	0		21.50	21.48	21.43
5	1	0	64-QAM	21.64	21.63	21.68
5	1	12		21.72	21.75	21.68
5	1	24		21.74	21.69	21.65
5	12	0		20.53	20.55	20.51
5	12	7		20.62	20.58	20.62
5	12	13		20.54	20.56	20.53
5	25	0		20.51	20.49	20.44



# LTE Band 14


## Peak-to-Average Ratio

Mode	LTE Band 14 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	3.57	4.99	5.04	5.86	
Highest CH	-	-	-	-	
Mode	LTE Band 14 / 10MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	PASS
Middle CH	6.55	6.43	-	-	
Highest CH	-	-	-	-	




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

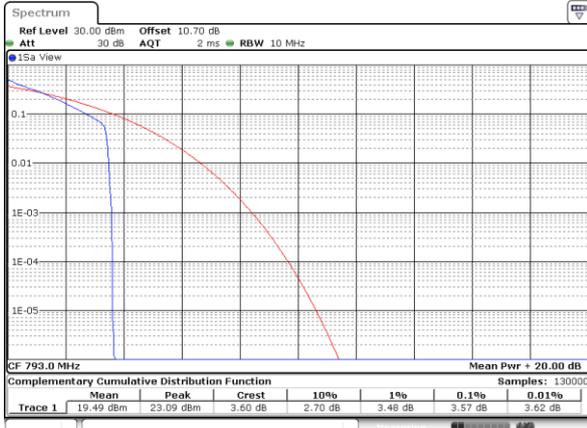

Date: 5 JAN 2020 00:48:11

Middle Channel / Full RB

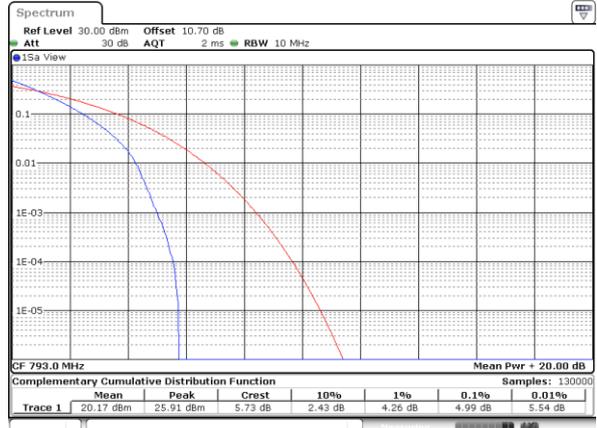

Date: 5 JAN 2020 00:48:21

LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB



Date: 5 JAN 2020 00:47:52

Middle Channel / Full RB



Date: 5 JAN 2020 00:48:01

LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB



Date: 5 JAN 2020 00:47:32

Middle Channel / Full RB



Date: 5 JAN 2020 00:47:42




**26dB Bandwidth**

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.91	5.00	-	-	-	-	-	-
Middle CH	-	-	-	-	4.92	4.92	9.73	9.81	-	-	-	-
Highest CH	-	-	-	-	4.80	4.87	-	-	-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.89	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.88	-	9.65	-	-	-	-	-
Highest CH	-	-	-	-	4.89	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

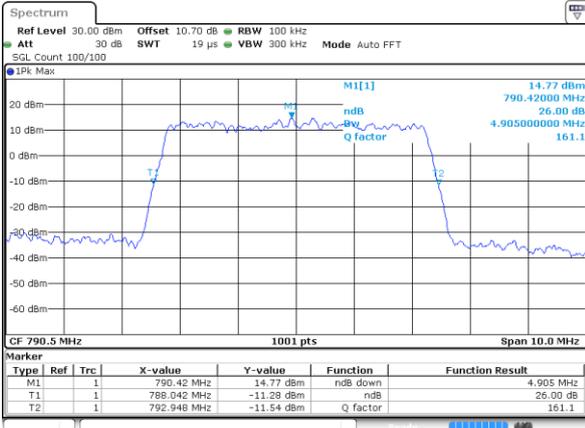


Date: 4 JAN 2020 23:25:45

Lowest Channel / 5MHz / 16QAM

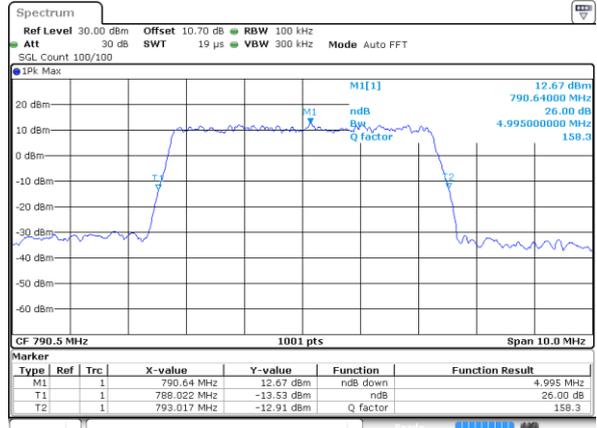


Date: 4 JAN 2020 23:25:33

Middle Channel / 5MHz / QPSK

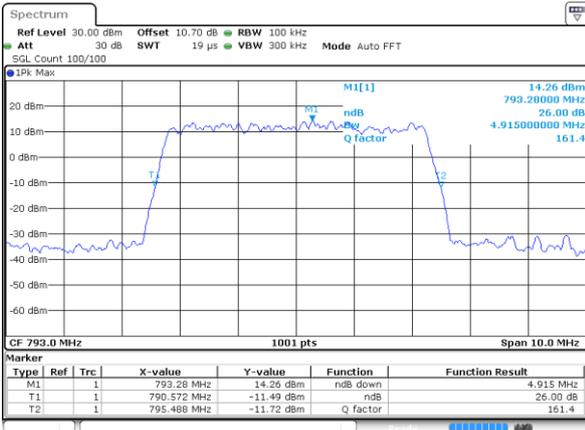


Date: 4 JAN 2020 23:42:41

Middle Channel / 5MHz / 16QAM

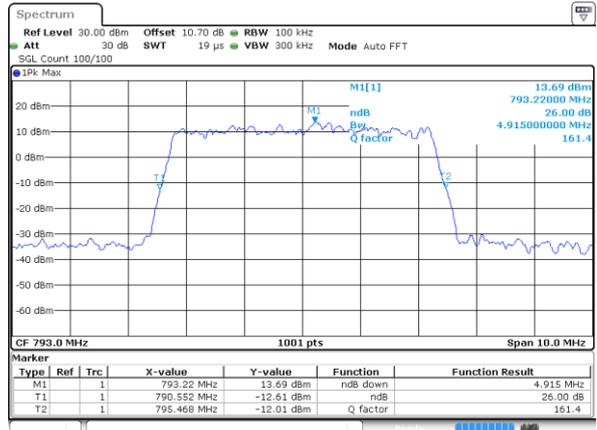


Date: 4 JAN 2020 23:42:53

Highest Channel / 5MHz / QPSK

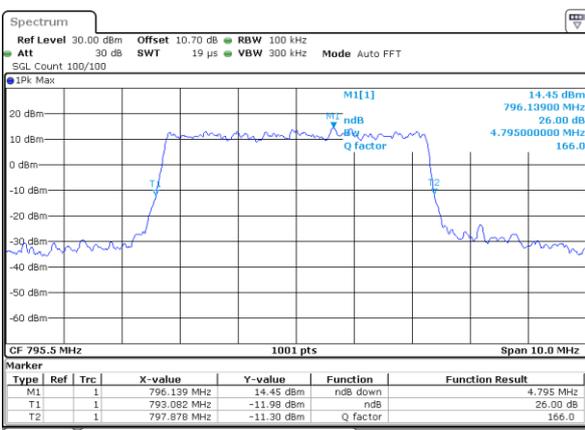

Date: 4 JAN 2020 23:44:05

Highest Channel / 5MHz / 16QAM

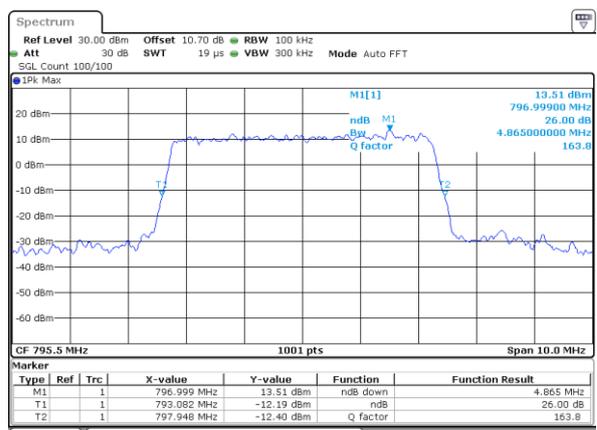


Date: 4 JAN 2020 23:43:53




LTE Band 14

Middle Channel / 10MHz / QPSK

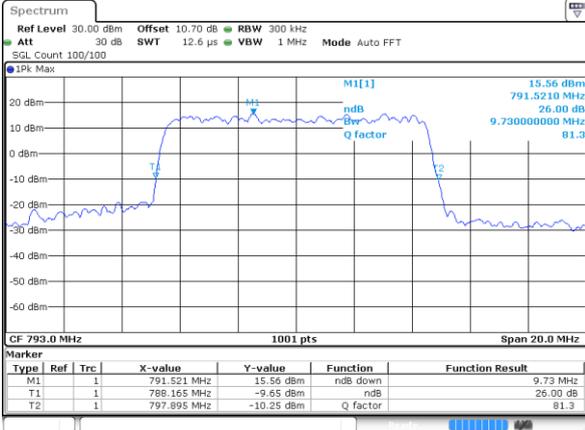

Date: 5 JAN 2020 00:02:51

Middle Channel / 10MHz / 16QAM

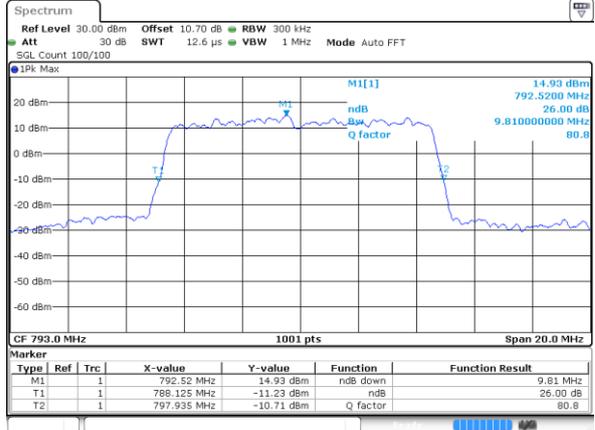


Date: 5 JAN 2020 00:02:39




LTE Band 14

Lowest Channel / 5MHz / 64QAM

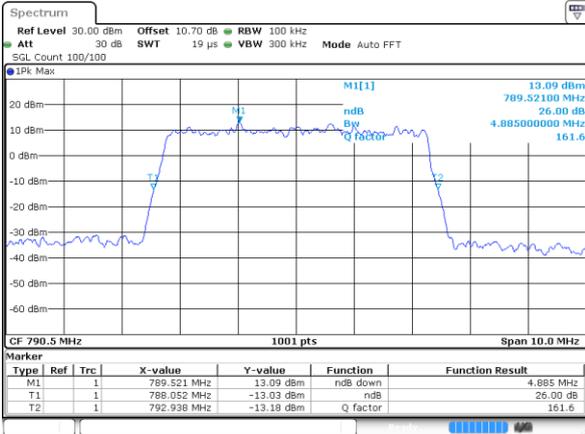


Date: 4 JAN 2020 23:52:33

Middle Channel / 5MHz / 64QAM

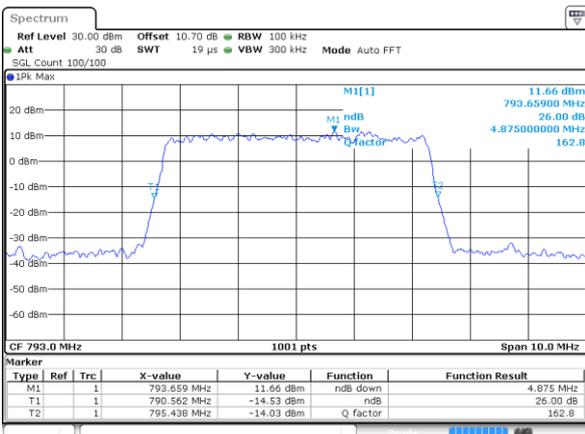


Date: 4 JAN 2020 23:57:26

Middle Channel / 10MHz / 64QAM

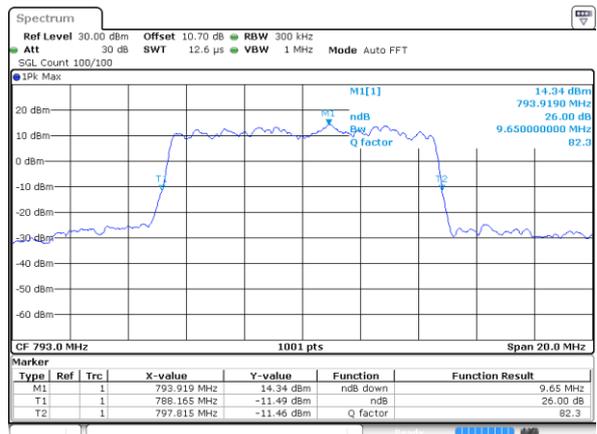

Date: 5 JAN 2020 00:14:34

Highest Channel / 5MHz / 64QAM

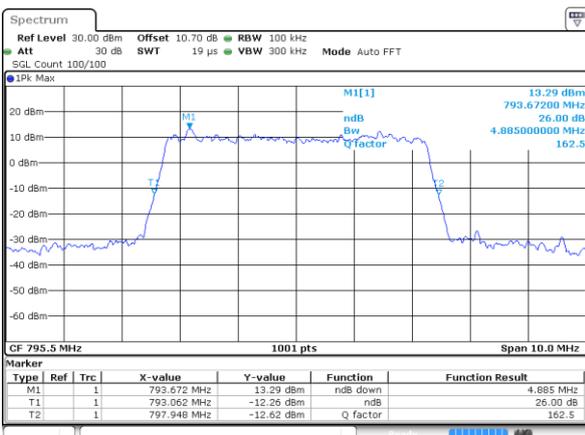

Date: 4 JAN 2020 23:58:02




**Occupied Bandwidth**

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.49	4.49	-	-	-	-	-	-
Middle CH	-	-	-	-	4.48	4.50	9.01	8.99	-	-	-	-
Highest CH	-	-	-	-	4.48	4.52	-	-	-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.49	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.48	-	8.97	-	-	-	-	-
Highest CH	-	-	-	-	4.50	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

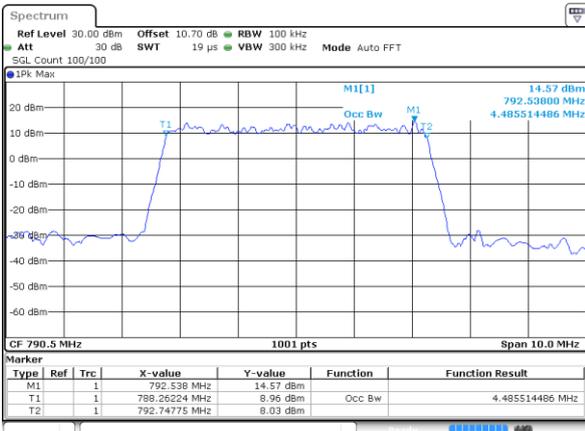


Date: 4 JAN 2020 23:25:09

Lowest Channel / 5MHz / 16QAM

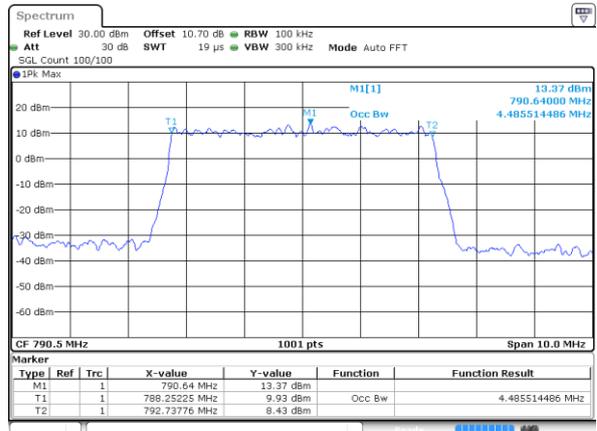


Date: 4 JAN 2020 23:25:21

Middle Channel / 5MHz / QPSK

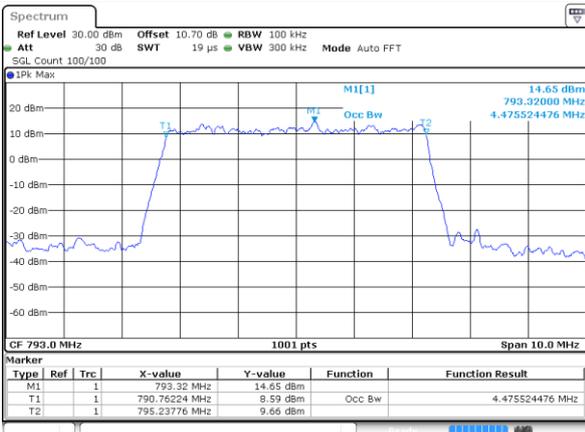


Date: 4 JAN 2020 23:43:16

Middle Channel / 5MHz / 16QAM

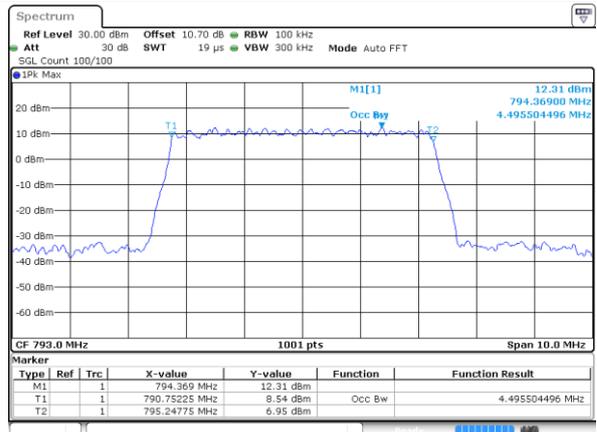


Date: 4 JAN 2020 23:43:05

Highest Channel / 5MHz / QPSK

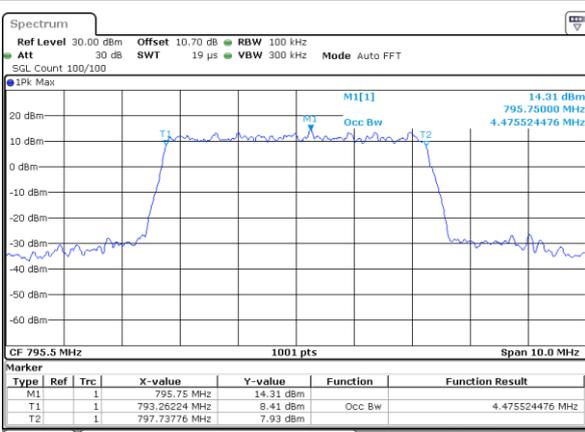

Date: 4 JAN 2020 23:43:28

Highest Channel / 5MHz / 16QAM

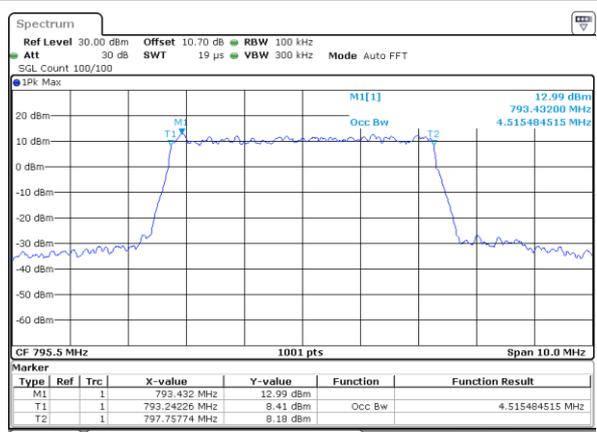


Date: 4 JAN 2020 23:43:41




LTE Band 14

Middle Channel / 10MHz / QPSK

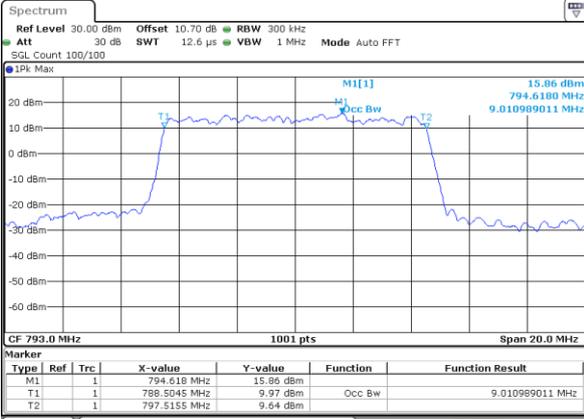

Date: 5 JAN 2020 00:02:16

Middle Channel / 10MHz / 16QAM

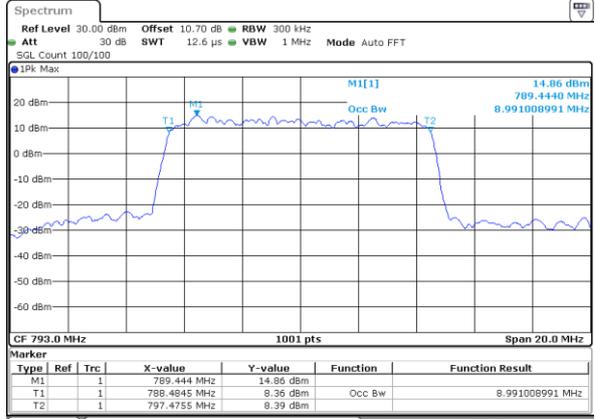


Date: 5 JAN 2020 00:02:28




LTE Band 14

Lowest Channel / 5MHz / 64QAM

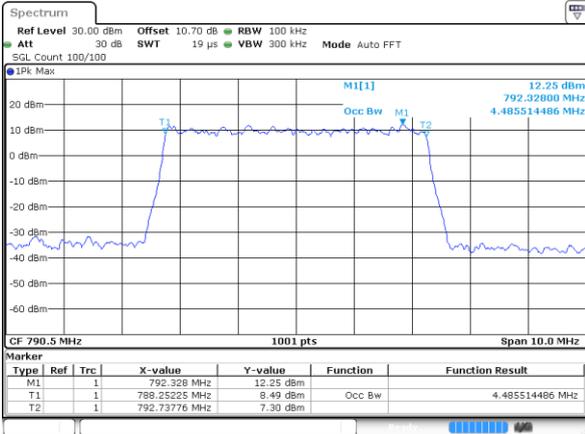


Date: 4 JAN 2020 23:52:21

Middle Channel / 5MHz / 64QAM

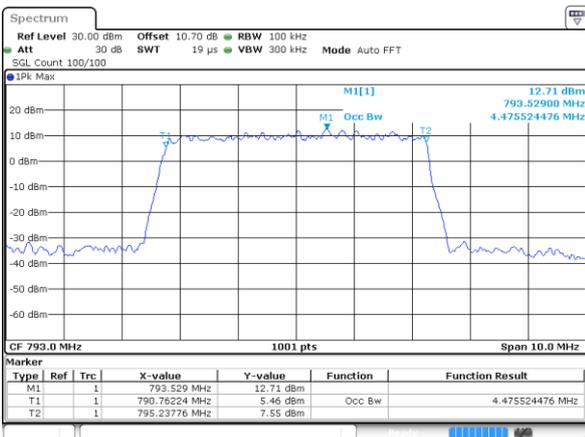


Date: 4 JAN 2020 23:57:38

Middle Channel / 10MHz / 64QAM

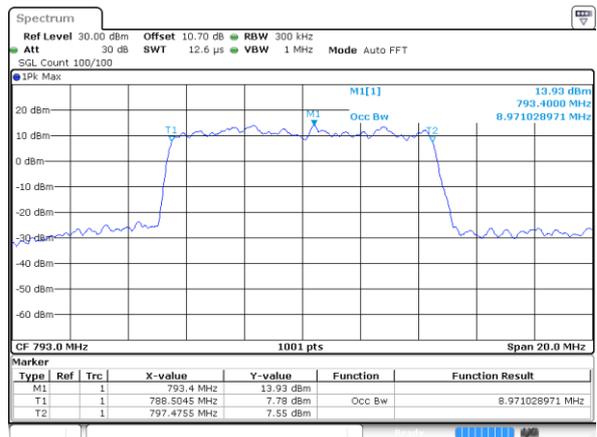

Date: 5 JAN 2020 00:14:23

Highest Channel / 5MHz / 64QAM

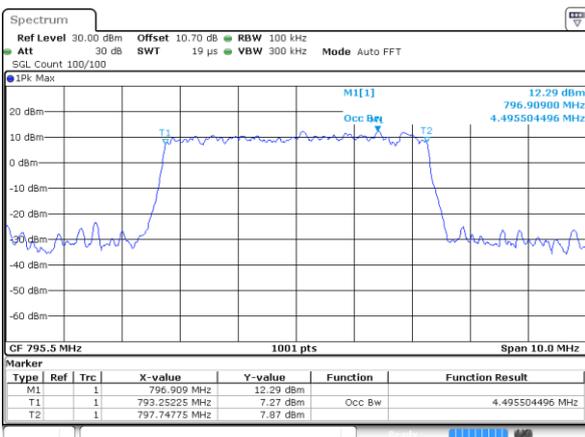

Date: 4 JAN 2020 23:57:49




Conducted Band Edge


LTE Band 14 / 5MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

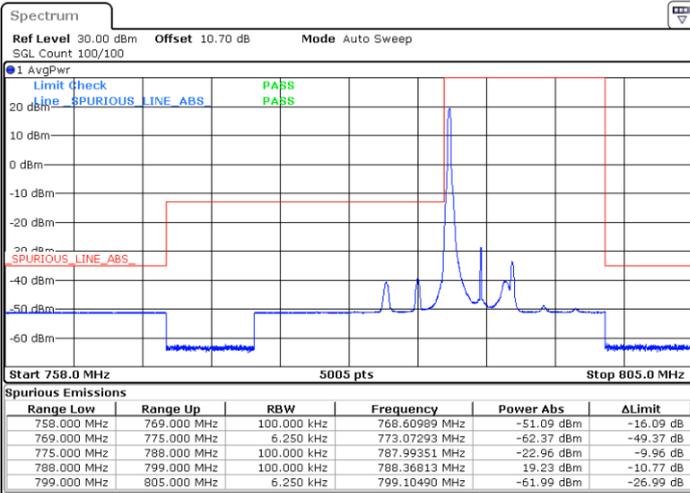


Date: 4 JAN 2020 23:39:50

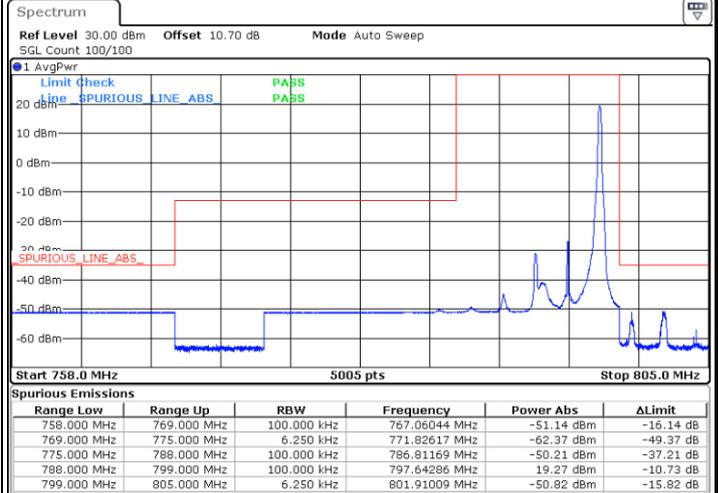


Date: 4 JAN 2020 23:50:48

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

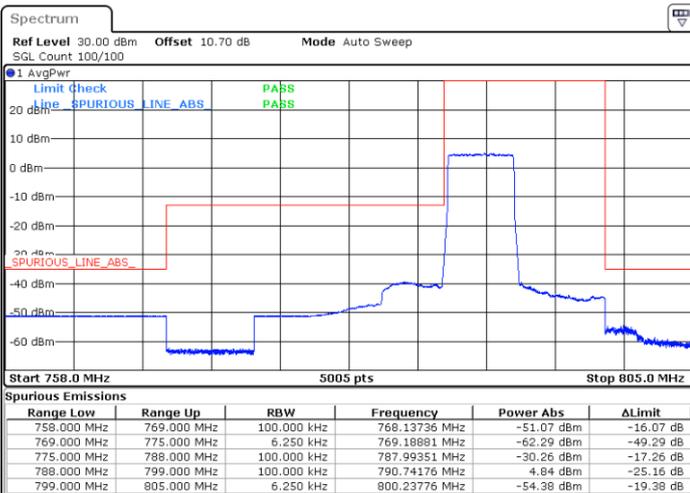

Date: 4 JAN 2020 23:34:48

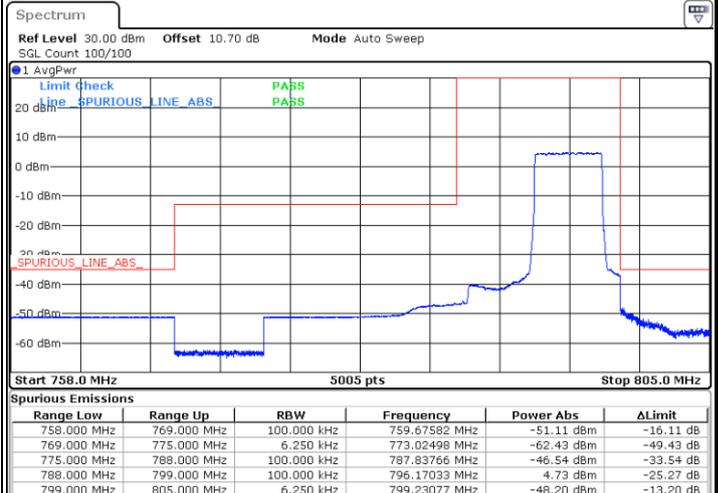


Date: 4 JAN 2020 23:45:46




**LTE Band 14 / 5MHz / 16QAM**

**Lowest Band Edge / 1 RB**

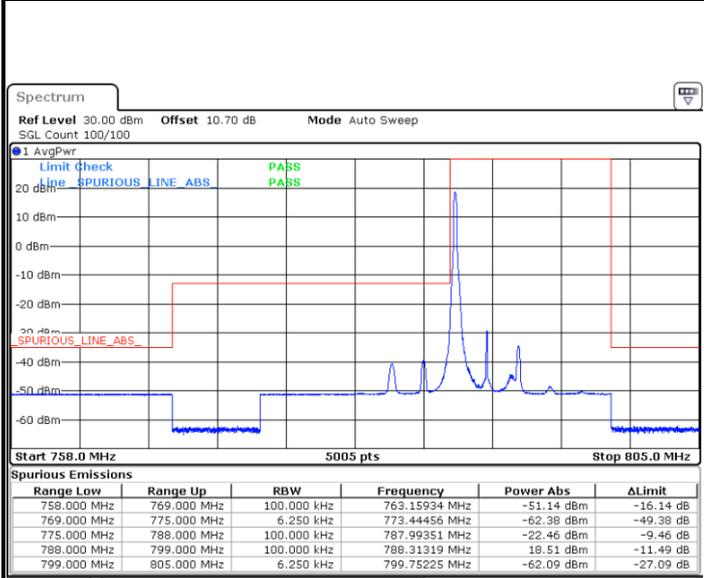


Date: 4 JAN 2020 23:38:09

**Highest Band Edge / 1 RB**

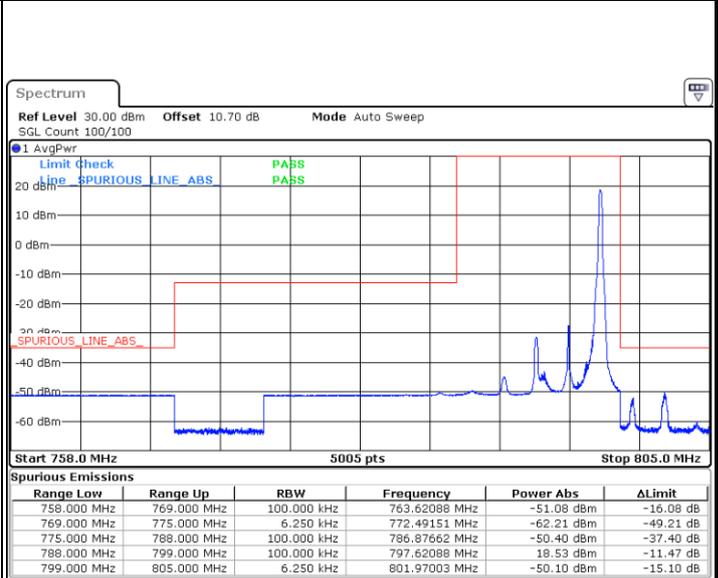


Date: 4 JAN 2020 23:49:07

**Lowest Band Edge / Full RB**

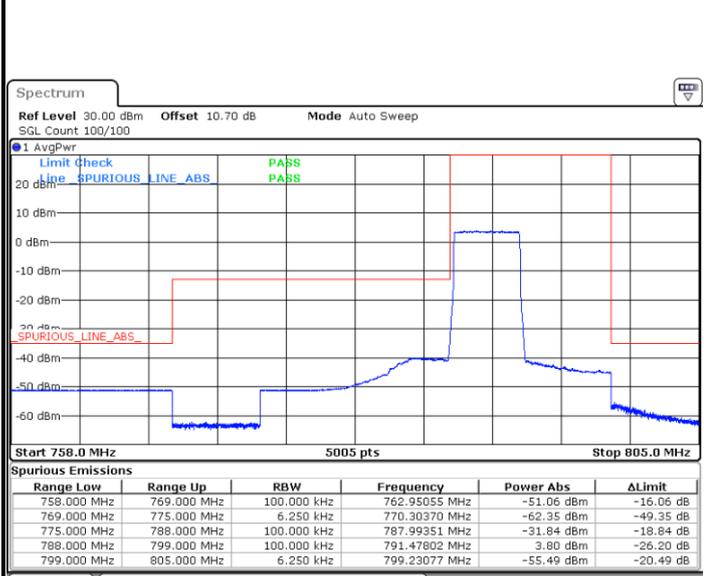

Date: 4 JAN 2020 23:38:28

**Highest Band Edge / Full RB**

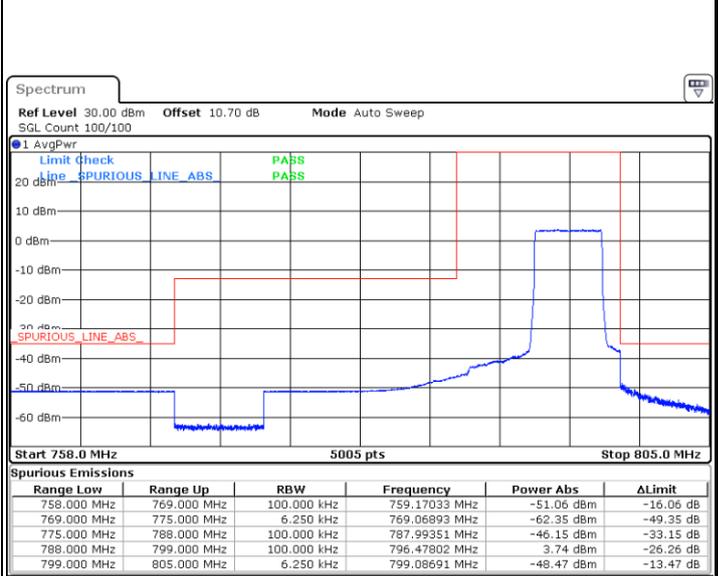


Date: 4 JAN 2020 23:47:27




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

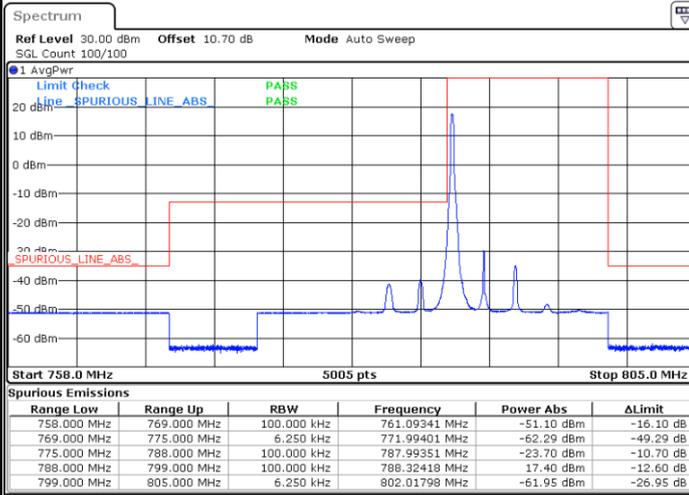


Date: 4 JAN 2020 23:55:54

Highest Band Edge / 1 RB

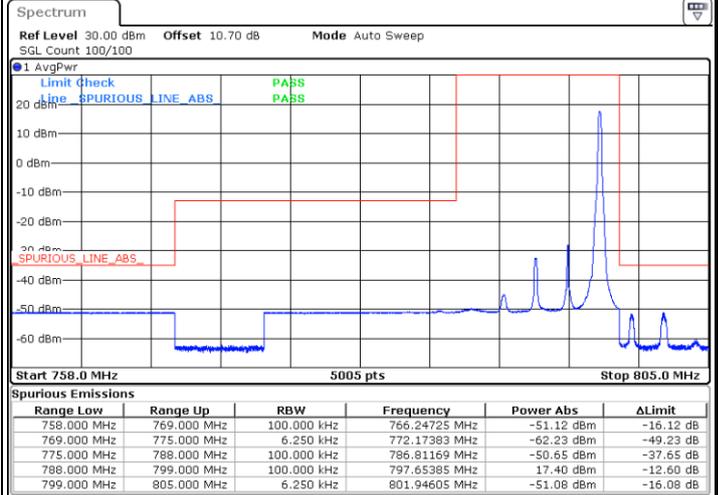


Date: 5 JAN 2020 00:01:24

Lowest Band Edge / Full RB

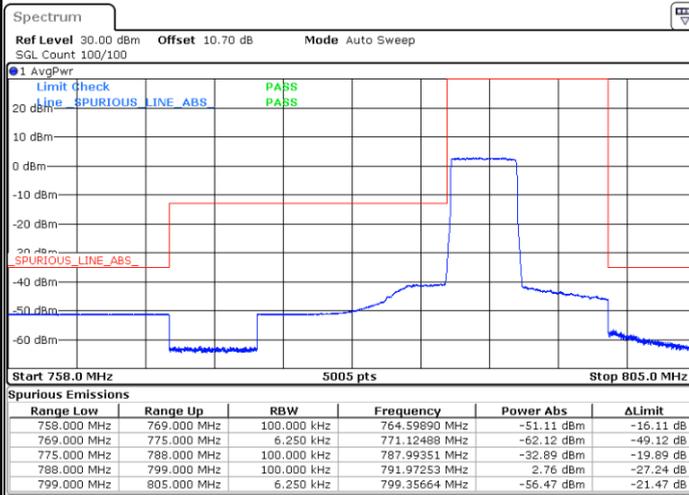

Date: 4 JAN 2020 23:54:14

Highest Band Edge / Full RB

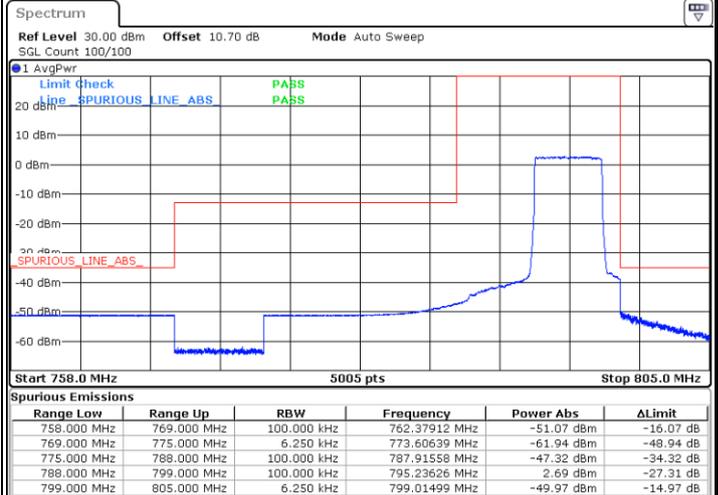


Date: 4 JAN 2020 23:59:43




LTE Band 14 / 10MHz / QPSK

Lowest Band Edge / 1 RB

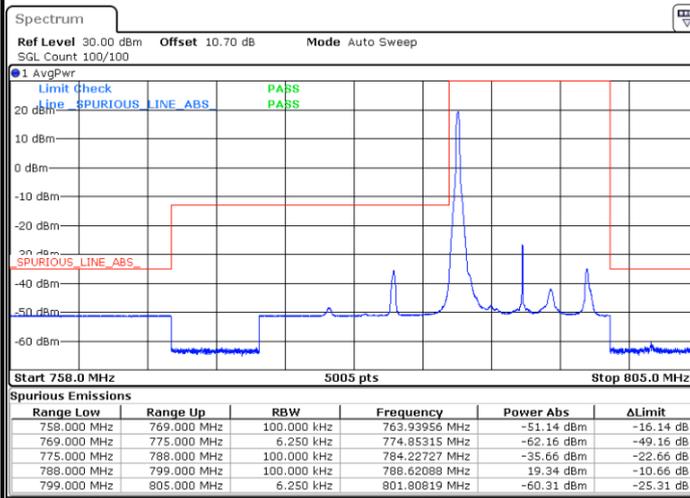


Date: 5 JAN 2020 00:09:32

Highest Band Edge / 1 RB

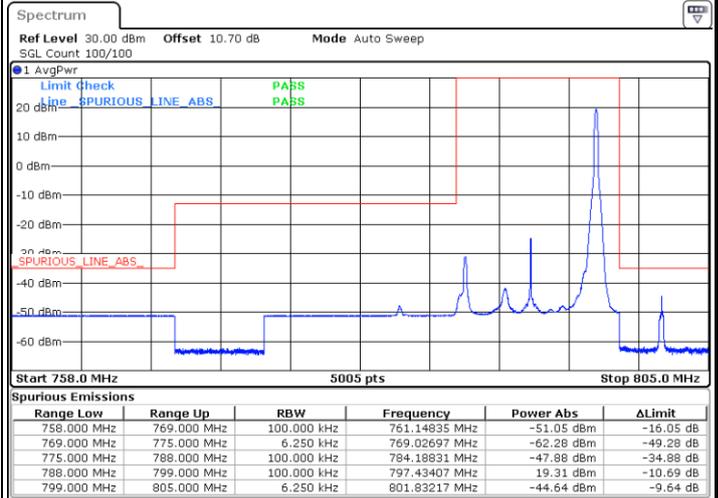

Date: 5 JAN 2020 00:11:12

Band Edge / Full RB

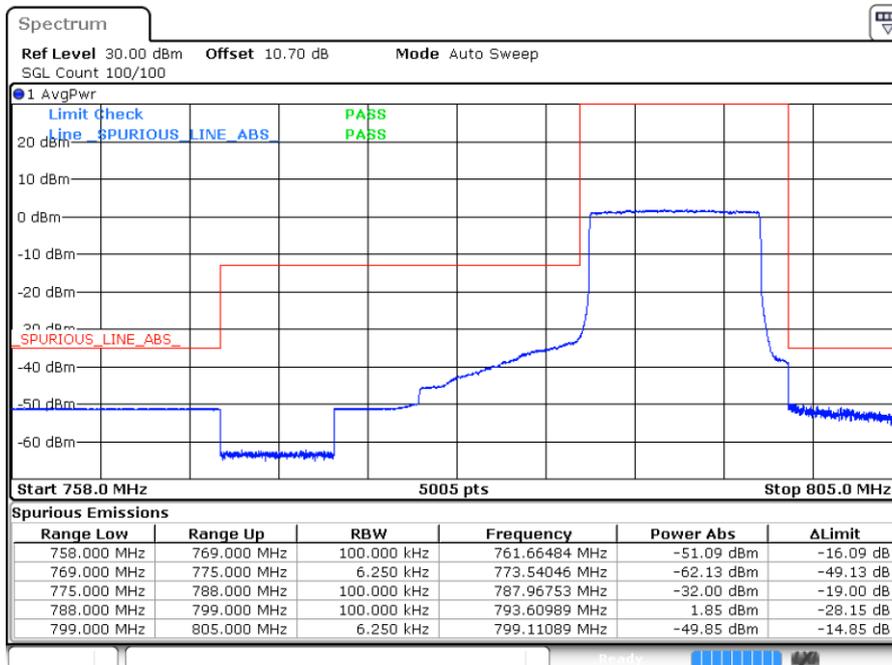


Date: 5 JAN 2020 00:04:31




LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

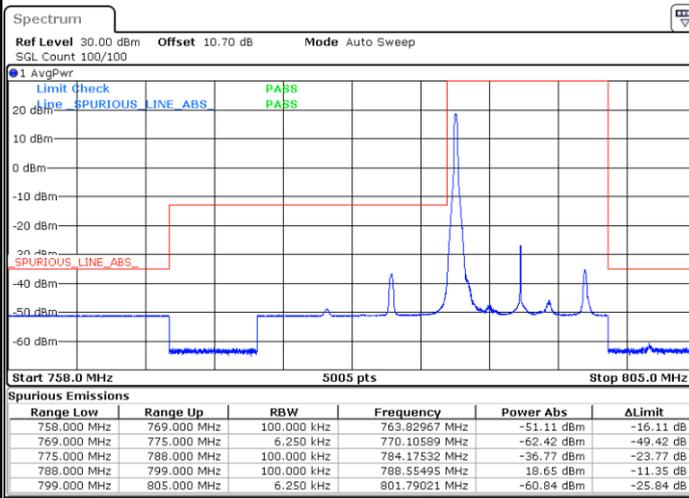


Date: 5 JAN 2020 00:07:52

Highest Band Edge / 1 RB

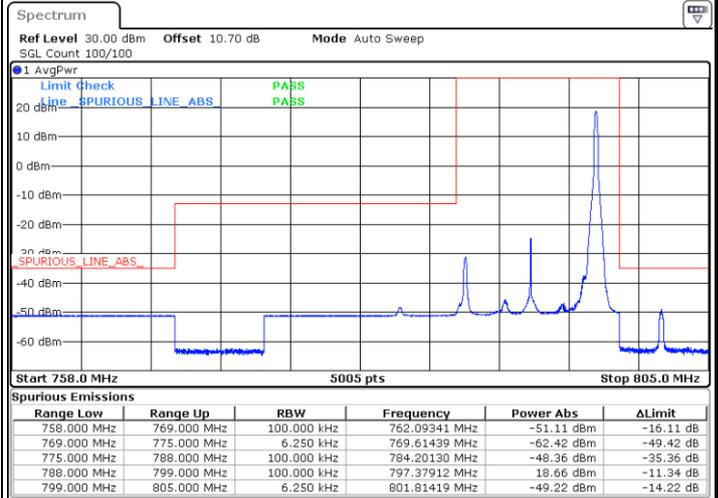

Date: 5 JAN 2020 00:12:52

Band Edge / Full RB

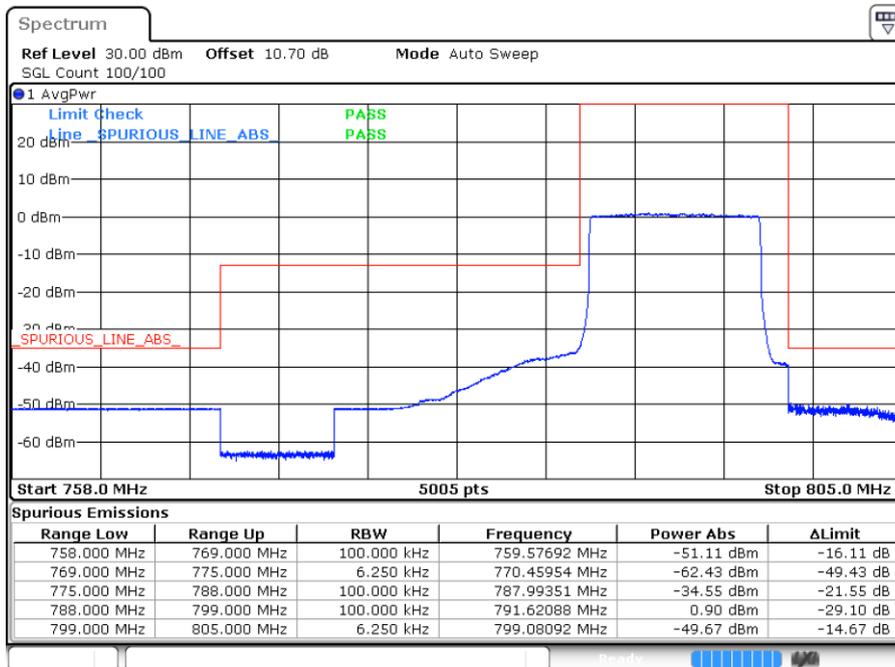


Date: 5 JAN 2020 00:06:11




LTE Band 14 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

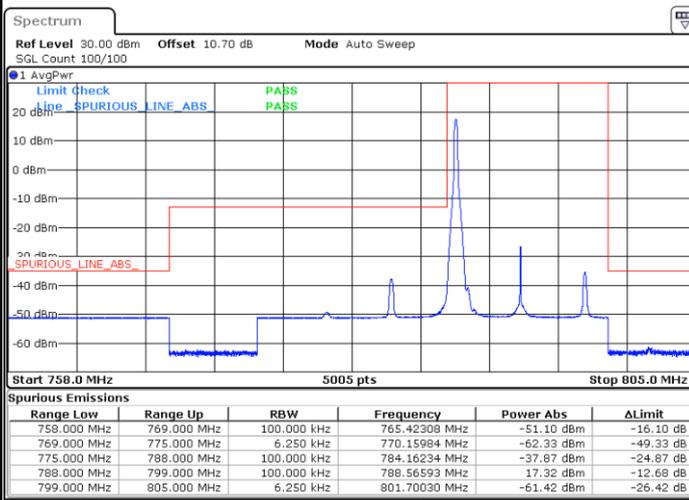


Date: 5 JAN 2020 00:17:55

Highest Band Edge / 1 RB

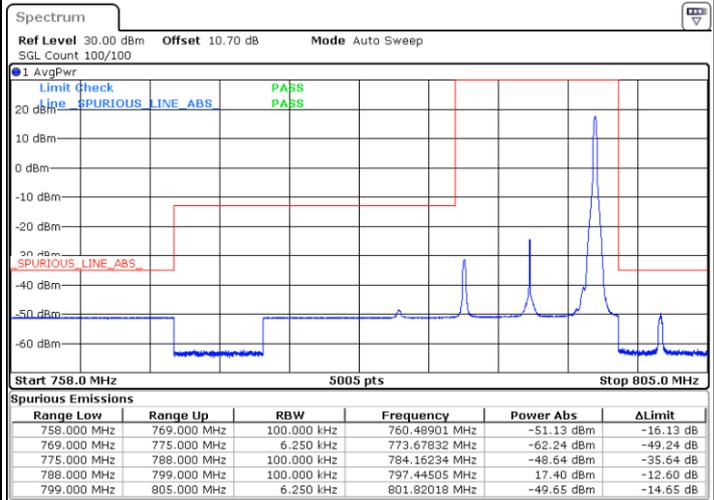

Date: 5 JAN 2020 00:19:35


Band Edge / Full RB

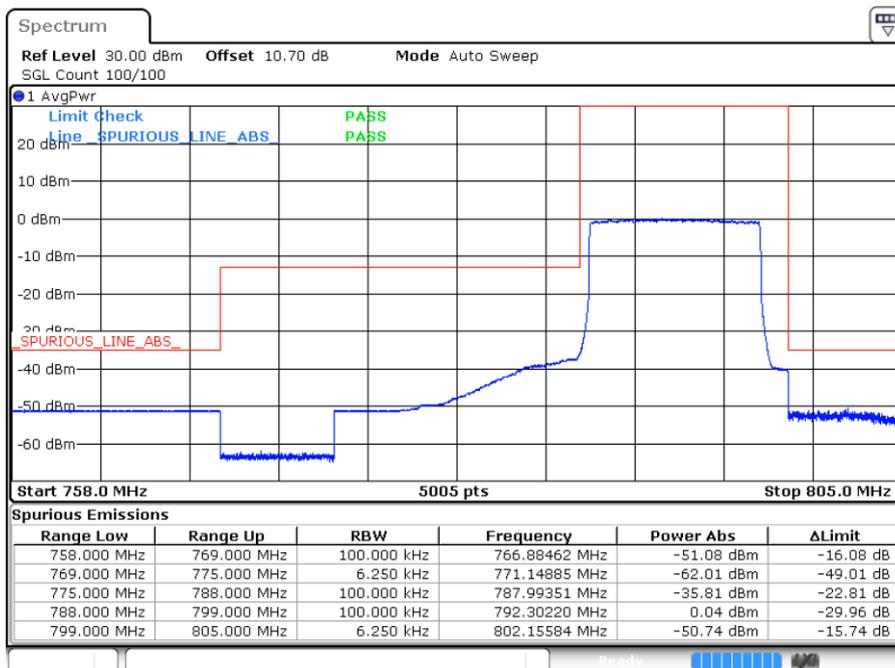

Date: 5 JAN 2020 00:16:15




# Conducted Spurious Emission

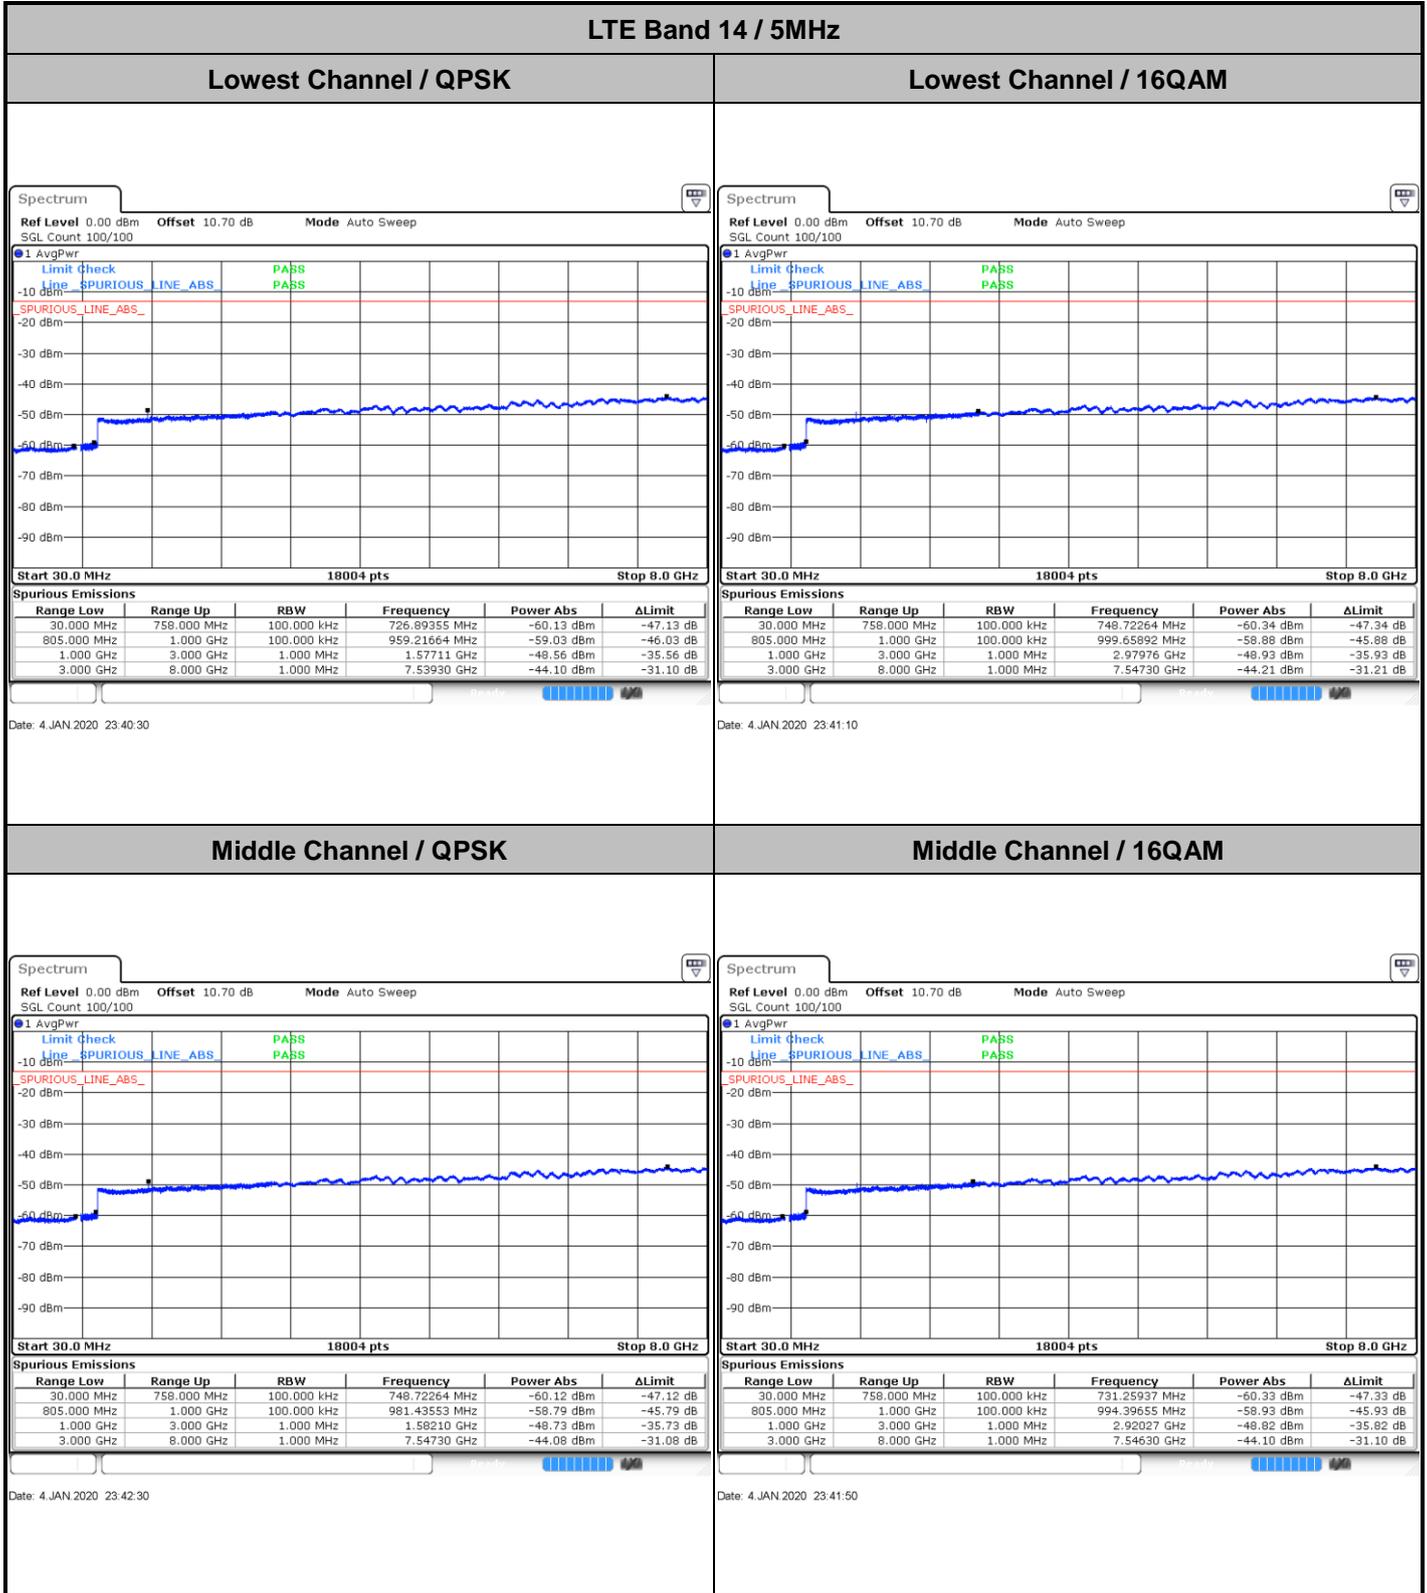




**LTE Band 14 / 5MHz**

**Highest Channel / QPSK**

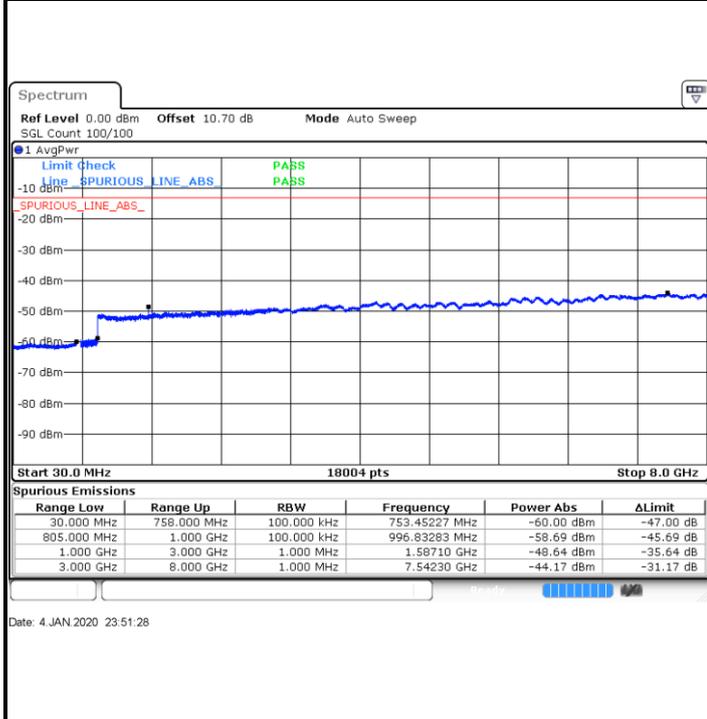


**Highest Channel / 16QAM**

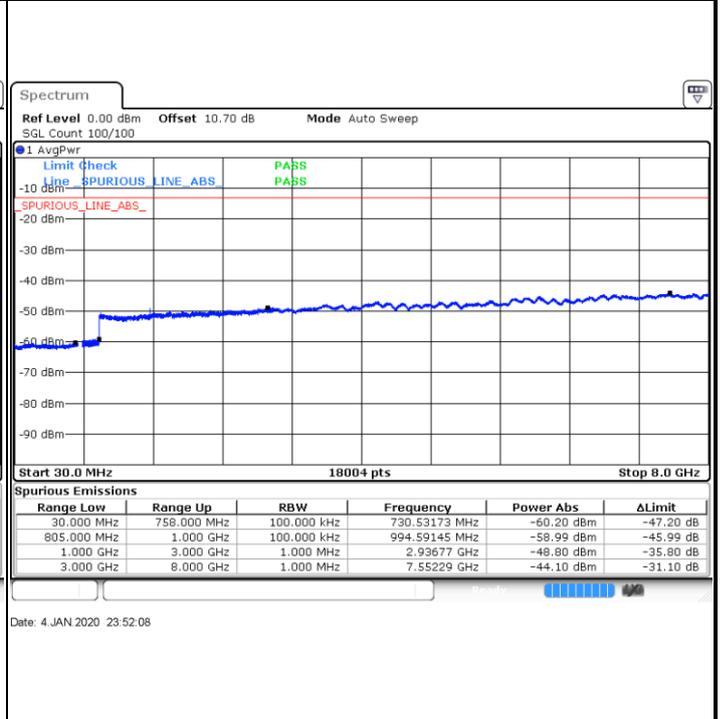


**LTE Band 14 / 10MHz**

**Middle Channel / QPSK**

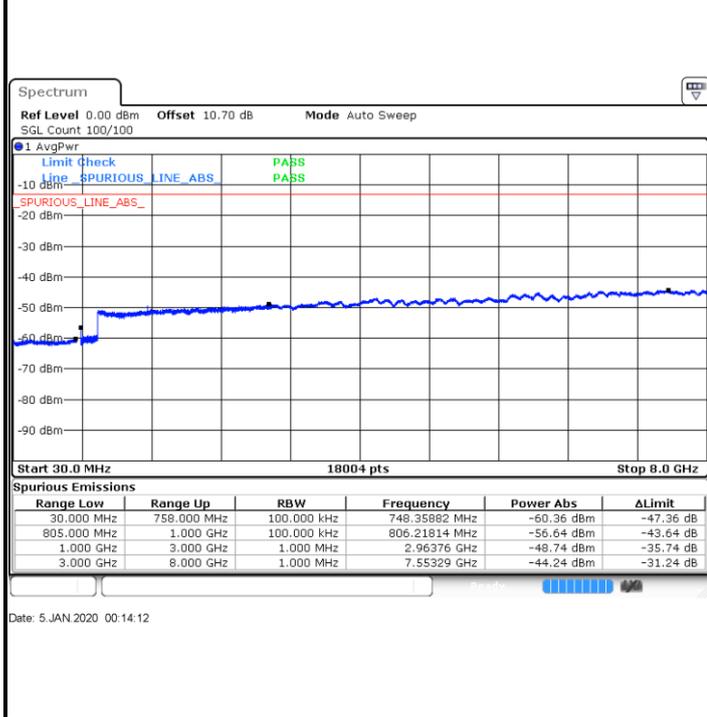

**Middle Channel / 16QAM**

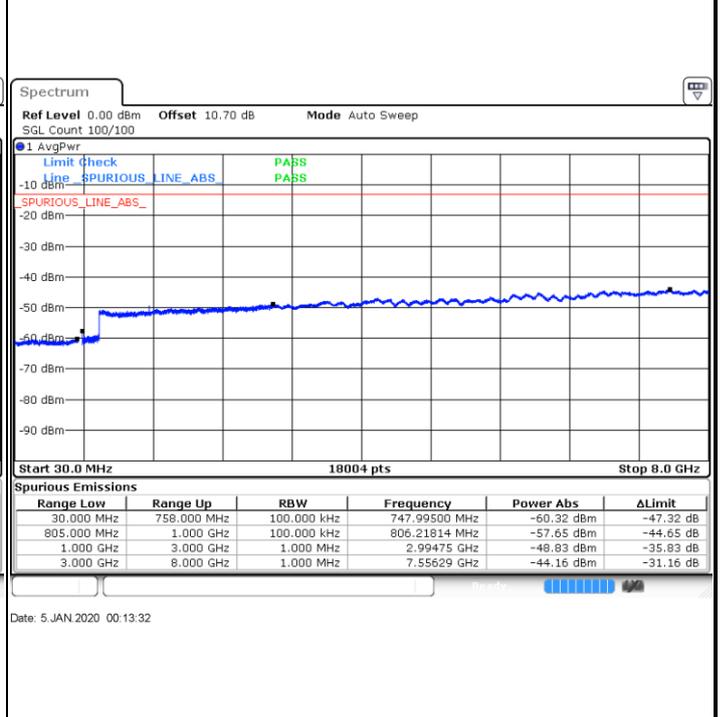





LTE Band 14 / 5MHz

Lowest Channel / 64QAM

Middle Channel / 64QAM

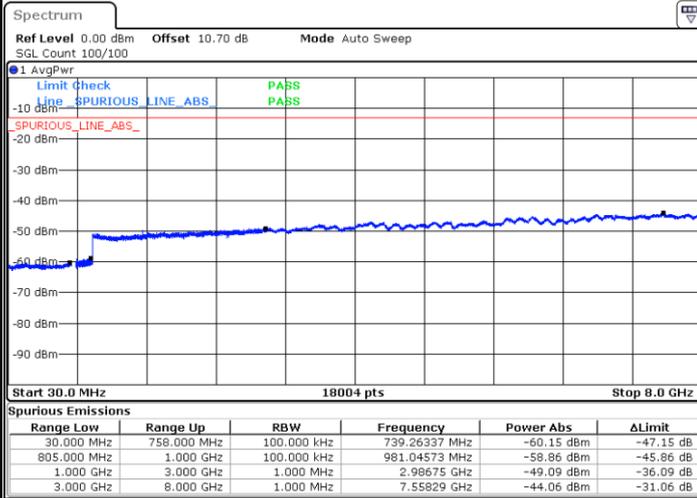


Date: 4 JAN 2020 23:56:35

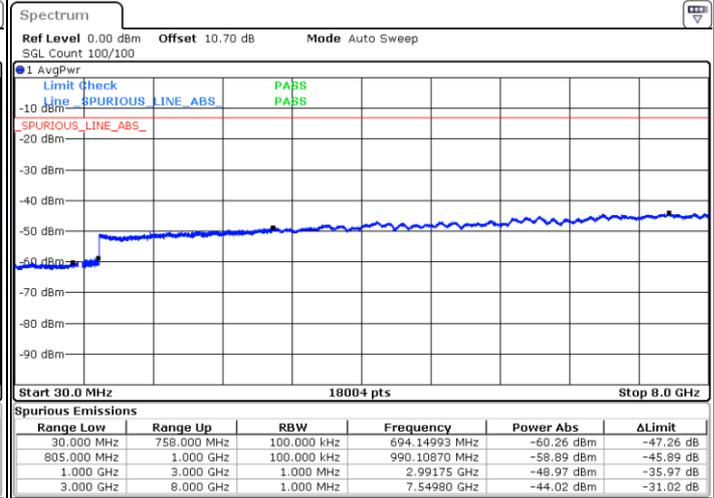

Date: 4 JAN 2020 23:57:15

Highest Channel / 64QAM

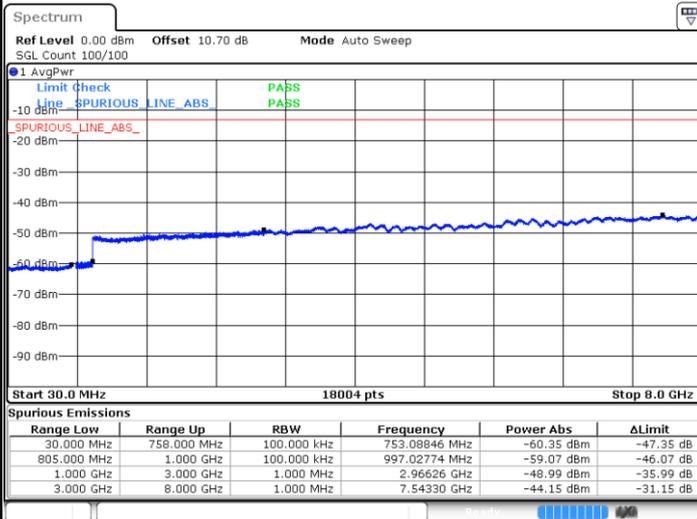


Date: 5 JAN 2020 00:02:04



LTE Band 14 / 10MHz

Middle Channel / 64QAM

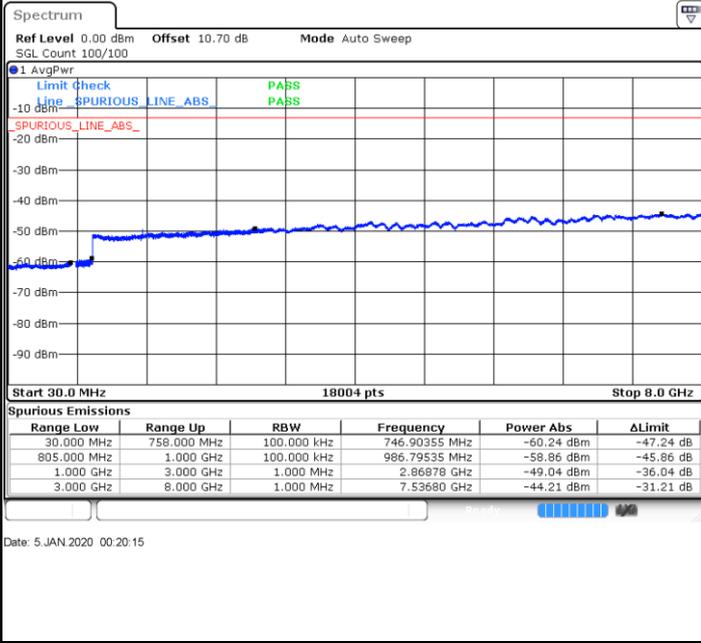





Mask

LTE Band 14 / 5MHz / QPSK

Lowest Channel / 1RB

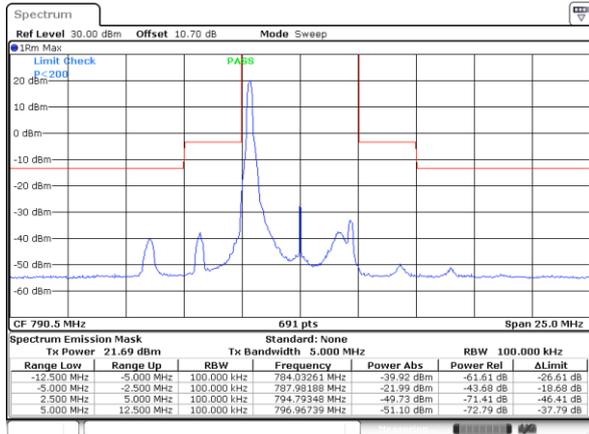


Date: 5 JAN 2020 00:23:16

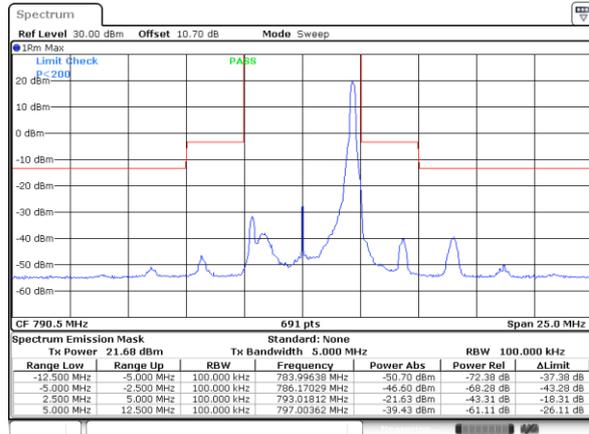

Date: 5 JAN 2020 00:23:46

Lowest Channel / Full RB

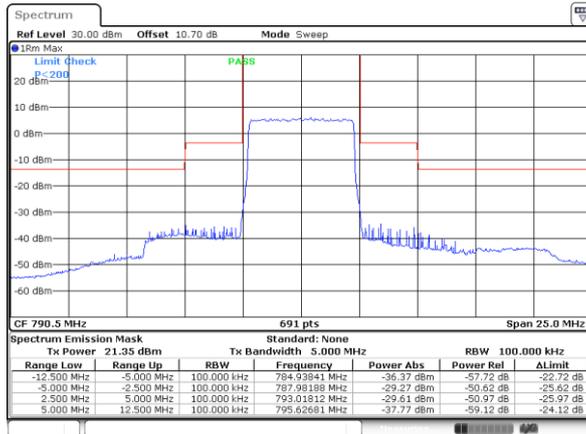


Date: 5 JAN 2020 00:20:46




LTE Band 14 / 5MHz / 16QAM

Lowest Channel / 1RB

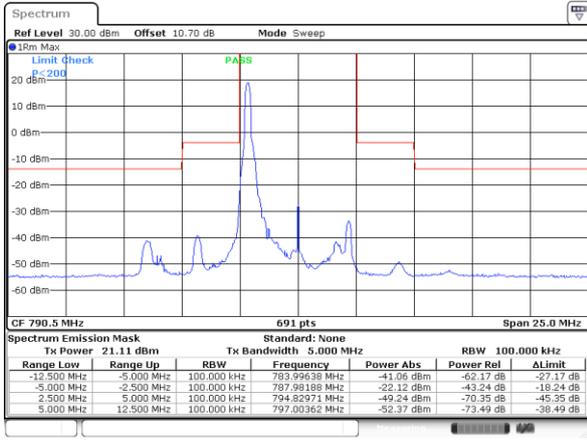


Date: 5 JAN 2020 00:22:46

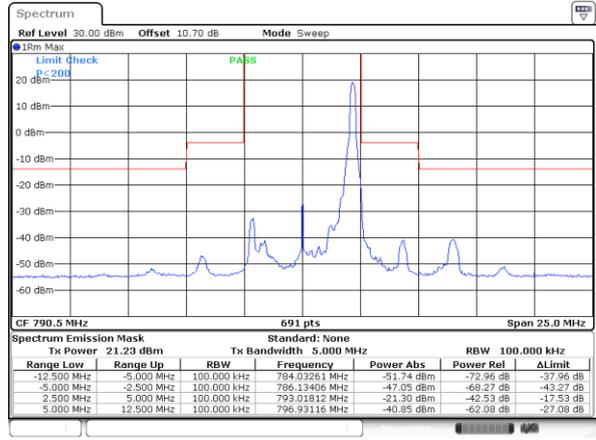

Date: 5 JAN 2020 00:24:16

Lowest Channel / Full RB

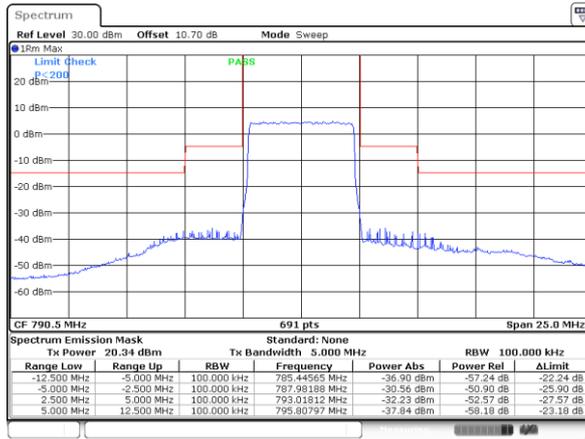


Date: 5 JAN 2020 00:21:15




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

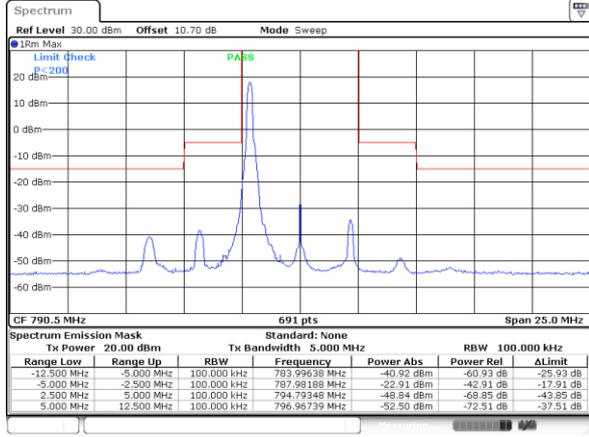


Date: 5 JAN 2020 00:22:15

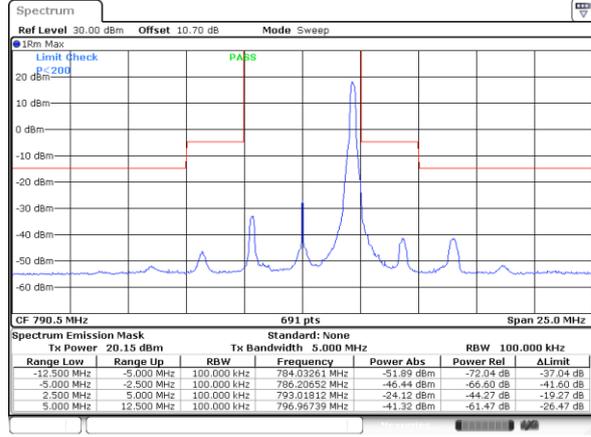

Date: 5 JAN 2020 00:24:46

Lowest Channel / Full RB

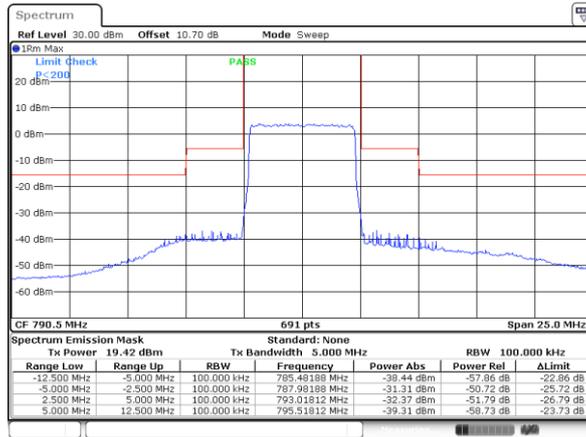


Date: 5 JAN 2020 00:21:45




LTE Band 14 / 5MHz / QPSK

Middle Channel / 1RB

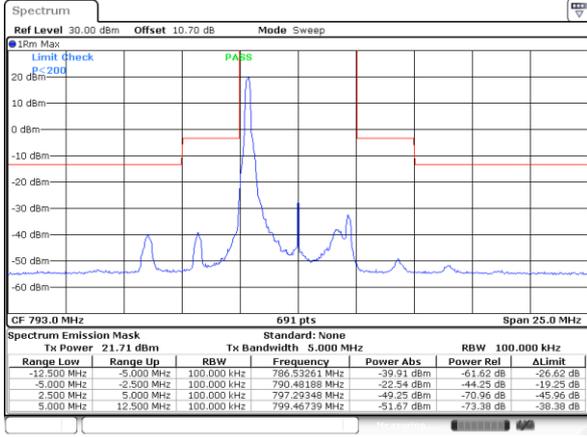


Date: 5 JAN 2020 00:26:45

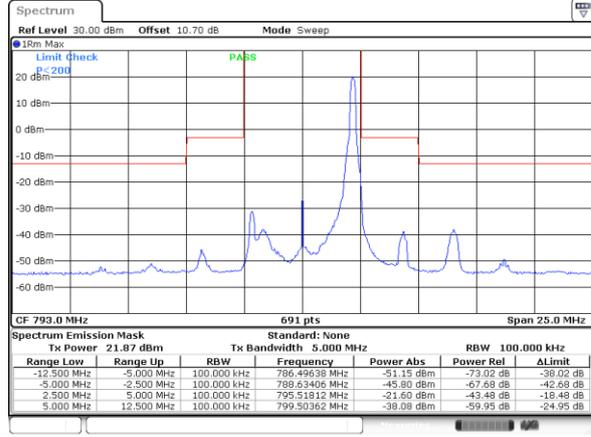

Date: 5 JAN 2020 00:26:15

Middle Channel / Full RB

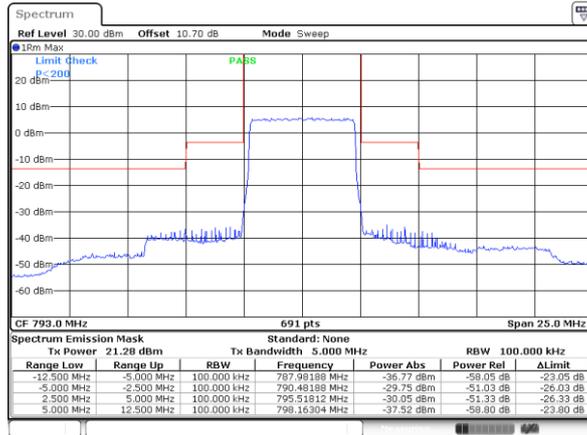


Date: 5 JAN 2020 00:29:14




LTE Band 14 / 5MHz / 16QAM

Middle Channel / 1RB

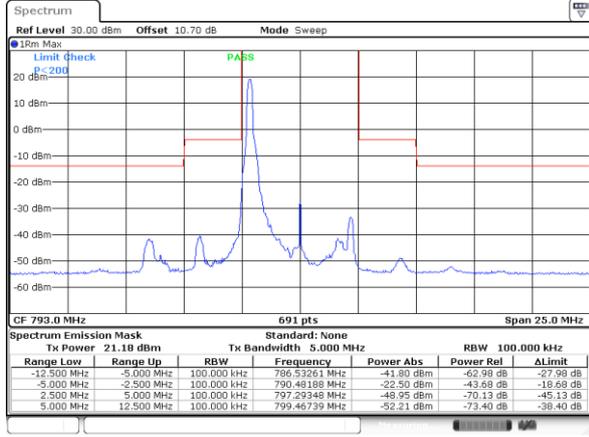


Date: 5 JAN 2020 00:27:15

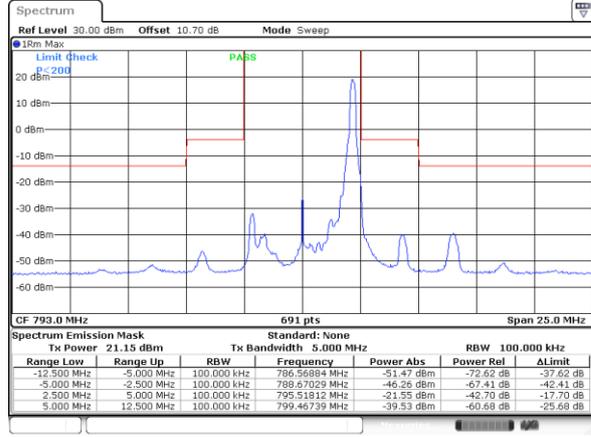

Date: 5 JAN 2020 00:25:46

Middle Channel / Full RB

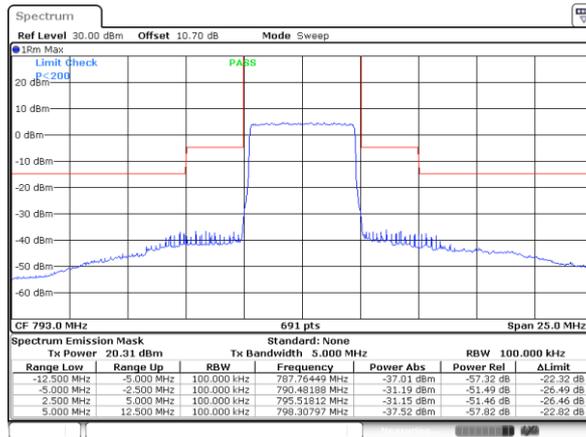


Date: 5 JAN 2020 00:28:44




LTE Band 14 / 5MHz / 64QAM

Middle Channel / 1RB

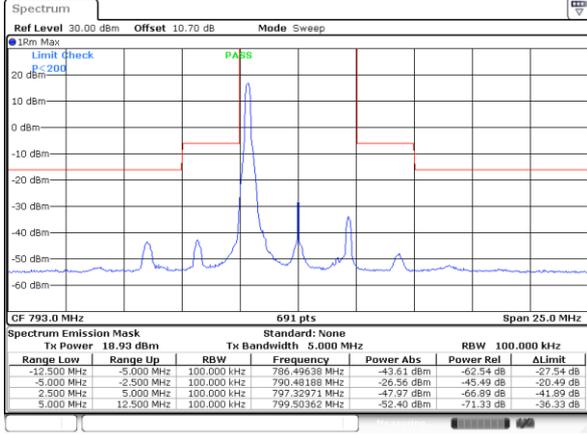


Date: 5 JAN 2020 00:27:45

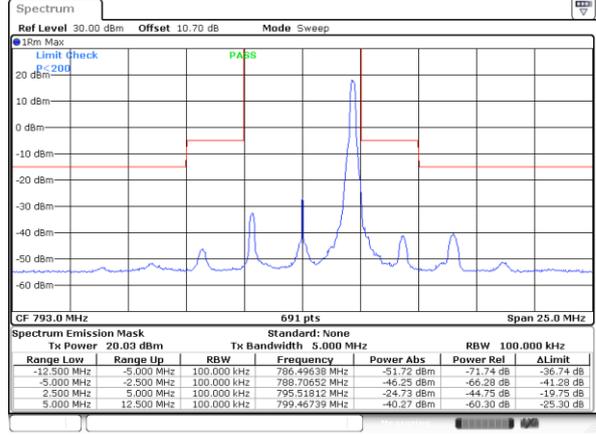

Date: 5 JAN 2020 00:25:16

Middle Channel / Full RB

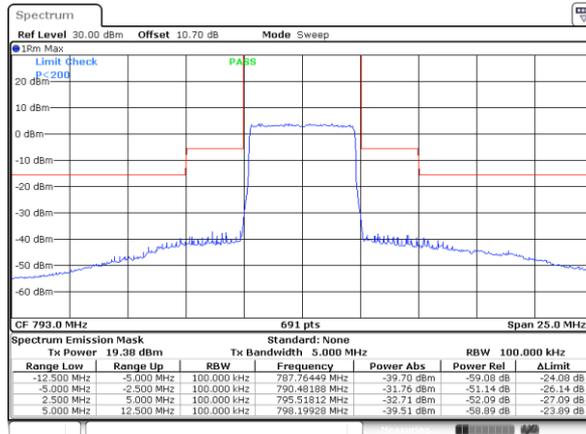


Date: 5 JAN 2020 00:28:14




LTE Band 14 / 5MHz / QPSK

Highest Channel / 1RB

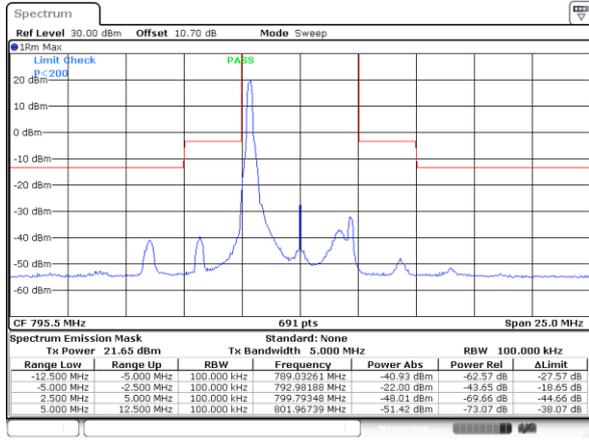


Date: 5 JAN 2020 00:32:14

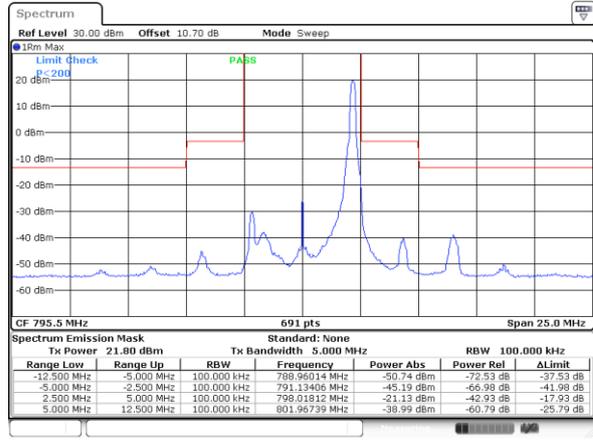

Date: 5 JAN 2020 00:32:44

Highest Channel / Full RB

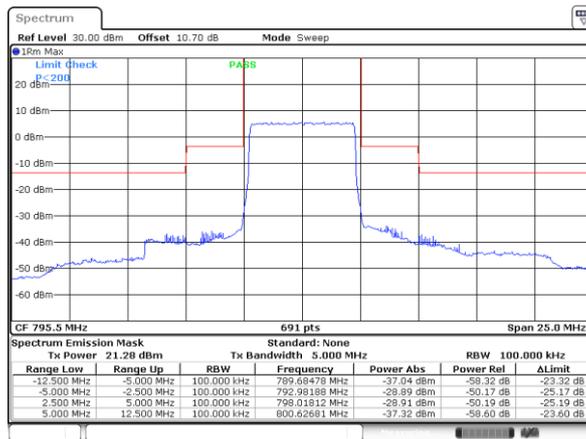


Date: 5 JAN 2020 00:29:44




LTE Band 14 / 5MHz / 16QAM

Highest Channel / 1RB

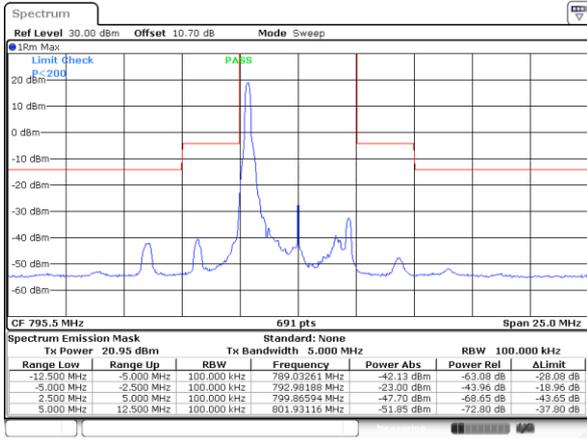


Date: 5 JAN 2020 00:31:44

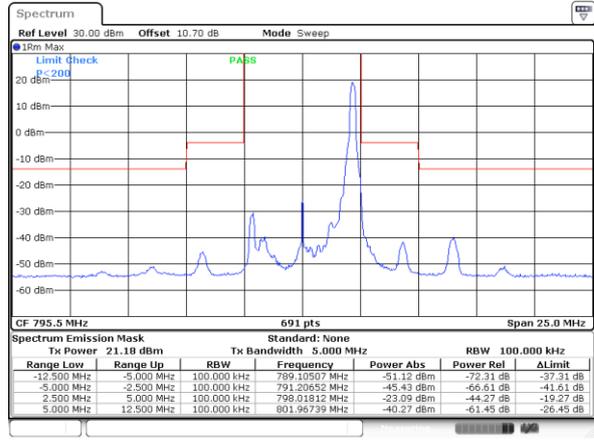

Date: 5 JAN 2020 00:33:14

Highest Channel / Full RB

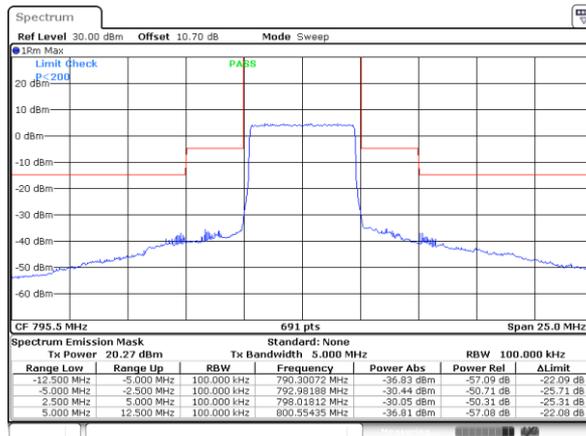


Date: 5 JAN 2020 00:30:14




LTE Band 14 / 5MHz / 64QAM

Highest Channel / 1RB

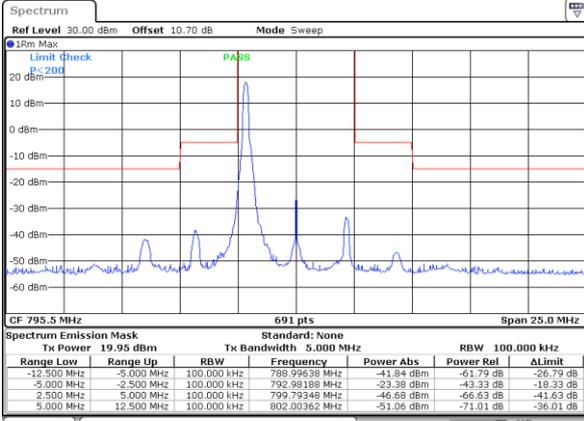


Date: 5 JAN 2020 00:31:14

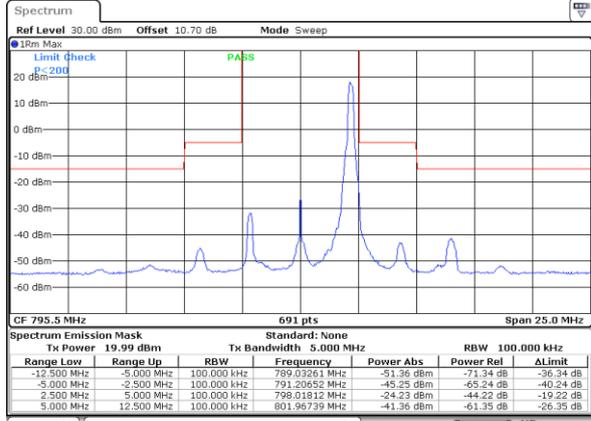

Date: 5 JAN 2020 00:33:45

Highest Channel / Full RB

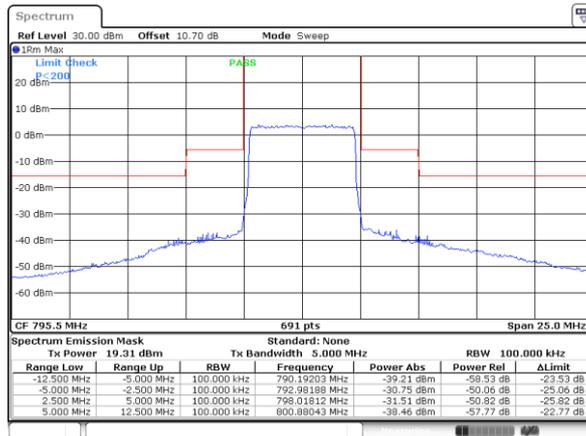


Date: 5 JAN 2020 00:30:44




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

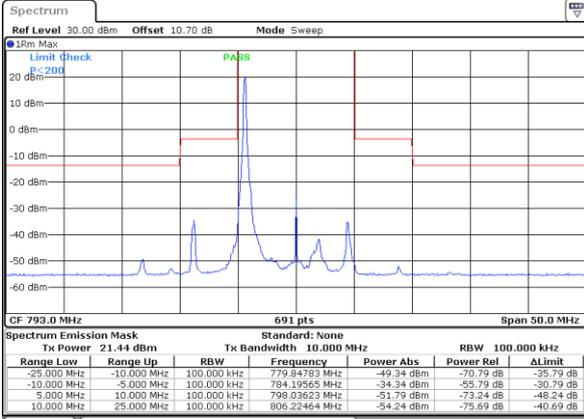


Date: 5 JAN 2020 00:35:44

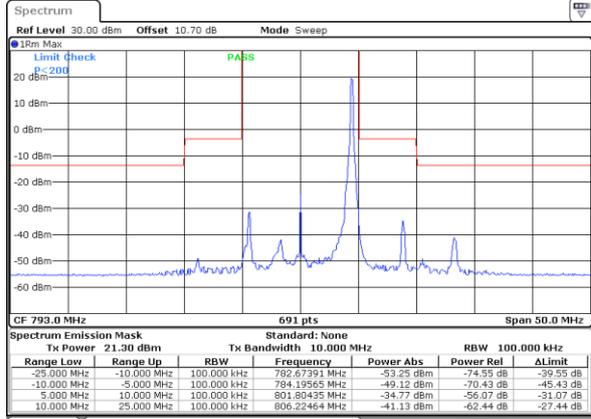

Date: 5 JAN 2020 00:35:14

Middle Channel / Full RB

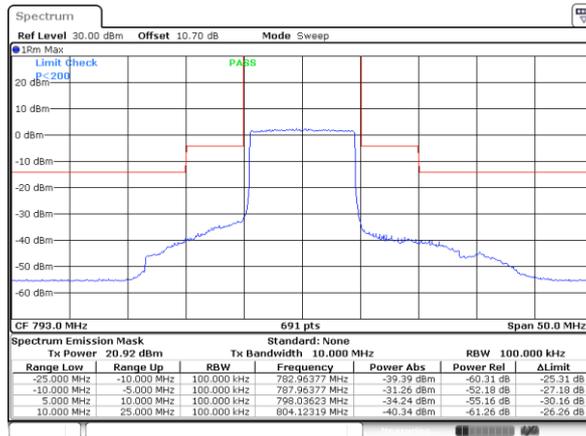


Date: 5 JAN 2020 00:38:13




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

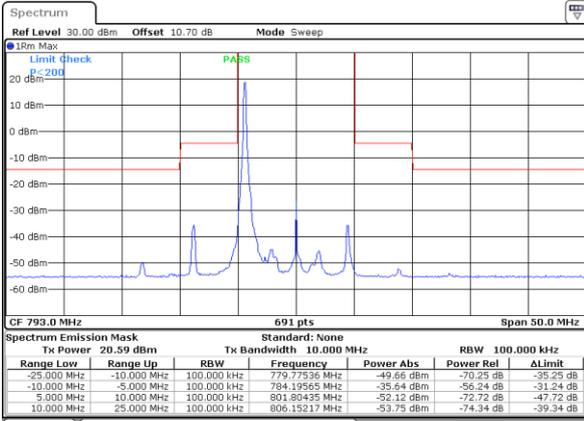


Date: 5 JAN 2020 00:36:13

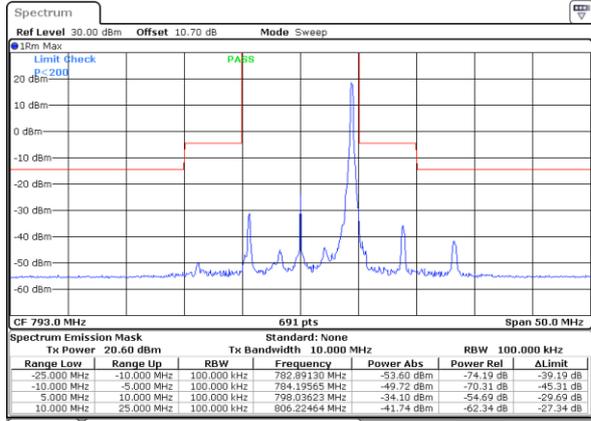

Date: 5 JAN 2020 00:34:45

Middle Channel / Full RB

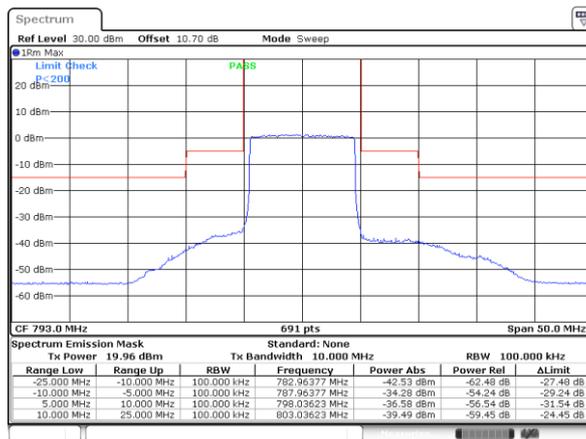


Date: 5 JAN 2020 00:37:43




LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

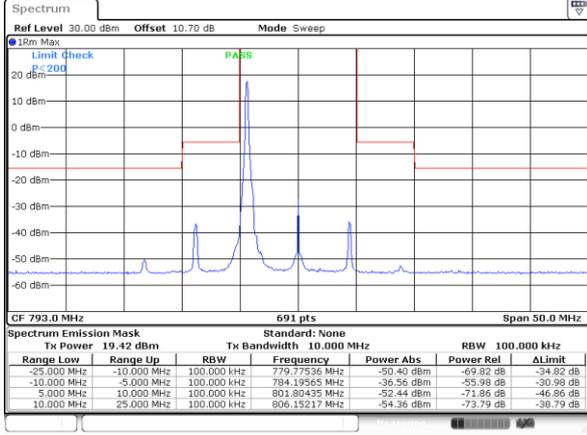


Date: 5 JAN 2020 00:36:43

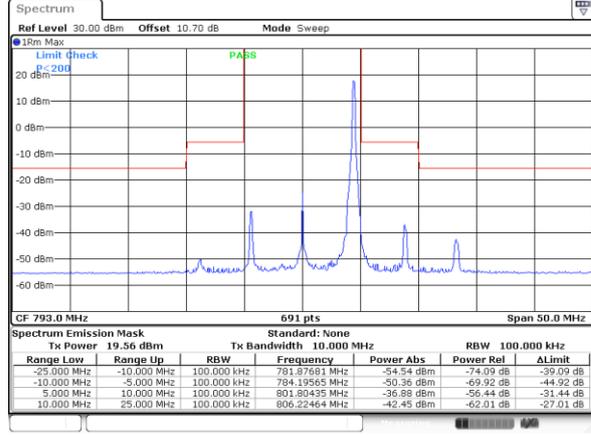

Date: 5 JAN 2020 00:34:15

Middle Channel / Full RB

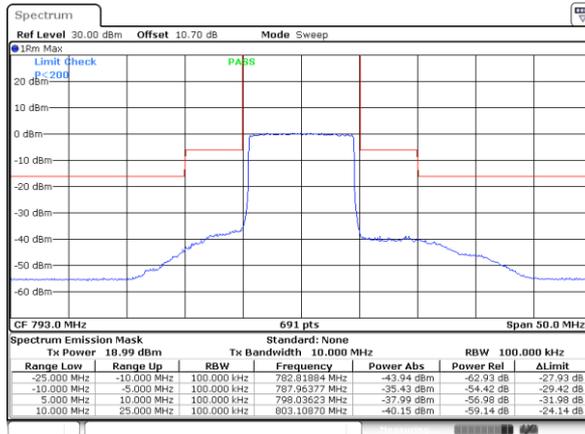

Date: 5 JAN 2020 00:37:12



**Frequency Stability**

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0038	PASS
40	Normal Voltage	0.0100	
30	Normal Voltage	0.0047	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0150	
-10	Normal Voltage	0.0079	
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0192	
20	Maximum Voltage	0.0155	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0193	

**Note:**

1. Normal Voltage =7.7 V. ; Battery End Point (BEP) =6.9 V. ; Maximum Voltage =8.5 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of ERP and Radiated Test

### ERP

LTE Band 14 / 5MHz (Average) (GT - LC = -0.56 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	12	23.48	0.2228	20.77	0.1194
Middle		1	12	23.49	0.2234	20.78	0.1197
Highest		1	12	23.51	0.2244	20.80	0.1202
Lowest	16QAM	1	12	22.78	0.1897	20.07	0.1016
Middle		1	12	22.82	0.1914	20.11	0.1026
Highest		1	12	22.80	0.1905	20.09	0.1021
Lowest	64QAM	1	12	21.72	0.1486	19.01	0.0796
Middle		1	12	21.75	0.1496	19.04	0.0802
Highest		1	12	21.68	0.1472	18.97	0.0789
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = -0.56 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	23.52	0.2249	20.81	0.1205
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	25	22.84	0.1923	20.13	0.1030
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	25	21.75	0.1496	19.04	0.0802
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	



**Radiated Spurious Emission**

**Part 90R LTE Band 14**

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1584	-59.82	-42.15	-17.67	-72.87	-64.99	1.20	8.52	H
	2368	-42.41	-13	-29.41	-59.65	-49.24	1.42	10.39	H
	3162	-56.66	-13	-43.66	-75.66	-64.30	1.59	11.39	H
									H
	1584	-57.26	-42.15	-15.11	-70.12	-62.43	1.20	8.52	V
	2368	-45.05	-13	-32.05	-62.83	-51.88	1.42	10.39	V
	3162	-56.29	-13	-43.29	-75.48	-63.93	1.59	11.39	V
									V
Middle	1586	-61.33	-42.15	-19.18	-74.36	-66.50	1.20	8.53	H
	2376	-43.86	-13	-30.86	-61.04	-50.69	1.42	10.40	H
	3172	-56.77	-13	-43.77	-75.83	-64.43	1.60	11.42	H
									H
	1586	-60.46	-42.15	-18.31	-73.3	-65.63	1.20	8.53	V
	2376	-43.45	-13	-30.45	-61.17	-50.28	1.42	10.40	V
	3172	-56.64	-13	-43.64	-75.89	-64.30	1.60	11.42	V
									V
Highest	1592	-58.20	-42.15	-16.05	-71.18	-63.39	1.20	8.55	H
	2384	-47.79	-13	-34.79	-64.9	-54.63	1.42	10.41	H
	3182	-56.49	-13	-43.49	-75.6	-64.18	1.61	11.45	H
									H
	1592	-58.32	-42.15	-16.17	-71.12	-63.51	1.20	8.55	V
	2384	-46.43	-13	-33.43	-64.09	-53.27	1.42	10.41	V
	3182	-56.48	-13	-43.48	-75.75	-64.17	1.61	11.45	V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1577	-61.31	-42.15	-19.16	-74.44	-66.45	1.20	8.49	H
	2368	-48.99	-13	-35.99	-66.23	-55.82	1.42	10.39	H
	3154	-56.49	-13	-43.49	-75.47	-64.12	1.59	11.36	H
									H
	1577	-60.11	-42.15	-17.96	-73.04	-65.25	1.20	8.49	V
	2368	-49.51	-13	-36.51	-67.29	-56.34	1.42	10.39	V
	3154	-56.50	-13	-43.50	-75.68	-64.13	1.59	11.36	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.