



# FCC RADIO TEST REPORT

**FCC ID** : O57FLEX5G14X05  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : Lenovo Flex 5G 14Q8CX05\*\*\*\*\*, 82AK\*\*\*\*\*, Yoga 5G 14Q8CX05\*\*\*\*\*, 81XE\*\*\*\*\* (\* = 0~9, A~Z, a~z, "-" or blank, for marketing use only, with no impact on RF compliance of the product)  
**Applicant** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone, Shanghai  
**Manufacturer** : Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong  
**Standard** : FCC 47 CFR Part 2, and 90(S)

Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

The product was received on Sep. 23, 2020 and testing was started from Sep. 28, 2020 and completed on Oct. 02, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test .....	5
1.3 Modification of EUT .....	6
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System .....	7
2.3 Support Unit used in test configuration and system.....	8
2.4 Frequency List of Low/Middle/High Channels.....	8
<b>3 Radiation Test Items .....</b>	<b>9</b>
3.1 Field Strength of Spurious Radiation Measurement .....	9
<b>4 List of Measuring Equipment.....</b>	<b>12</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>13</b>
<b>Appendix A. Test Results of Radiated Test</b>	
<b>Appendix B. Test Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Not Required	-
-	-	Peak-to-Average Ratio	Not Required	-
-	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Not Required	-
-	§2.1051 §90.691	Emission masks – In-band emissions	Not Required	-
-	§2.1051 §90.691	Emission masks – Out of band emissions	Not Required	-
-	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Not Required	-
3.1	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	Under limit 36.55 dB at 2440.000 MHz

**Note:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by enable 5G NR FR1 via SW. All the test cases were performed on original report which can be referred to Sporton Report Number FG9N2705D. Based on the original report, the test cases were verified.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Lucy Wu**

# 1 General Description

## 1.1 Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	Lenovo Flex 5G 14Q8CX05*****, 82AK*****, Yoga 5G 14Q8CX05*****, 81XE***** (* = 0~9, A~Z, a~z, "-" or blank, for marketing use only, with no impact on RF compliance of the product)
FCC ID	O57FLEX5G14X05
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

Antenna Information			
WWAN	3G&LTE (dBi)		
Notebook Mode	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	AUF6Y-100015 (DC33002DB00)	AUF6Y-100017 (DC33002DB30)
	Peak gain (dbi)	Main Antenna : 2.95	Aux. Antenna : 2.85
Tablet Mode	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	AUF6Y-100015 (DC33002DB00)	AUF6Y-100017 (DC33002DB30)
	Peak gain (dbi)	Main Antenna : 2.02	Aux. Antenna : 0.92

## 1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	LTE Band 26 : 824.7 MHz ~ 848.3 MHz
Rx Frequency	LTE Band 26 : 869.7 MHz ~ 893.3 MHz
Bandwidth	LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM



### 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	03CH13-HY
Test Engineer	Daniel Lee, Jacky Hong and Wilson Wu
Temperature	21.5~25.5°C
Relative Humidity	49.5~55.5%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 90
- ♦ ANSI / TIA-603-E
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and Notebook Type. The worst cases (Notebook Type) were recorded in this report.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	26			v			-	v			v			v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.															

### 2.2 Connection Diagram of Test System

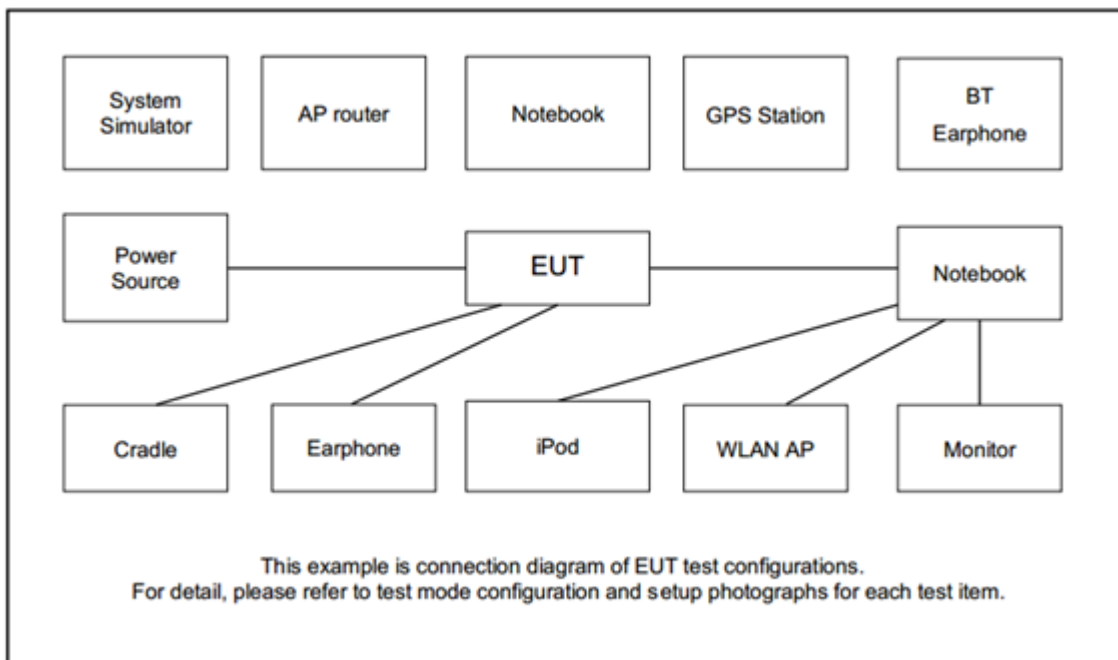



## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Earphone	Sony	MH750	N/A	Unshielded, 1.2 m	N/A
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5





### 3 Radiation Test Items

#### 3.1 Field Strength of Spurious Radiation Measurement

##### 3.1.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43+10\log_{10}(P[\text{Watts}])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

##### 3.1.2 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
12.  $\text{ERP (dBm)} = \text{EIRP} - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

### 3.1.3 Test Setup


For radiated test below 30MHz

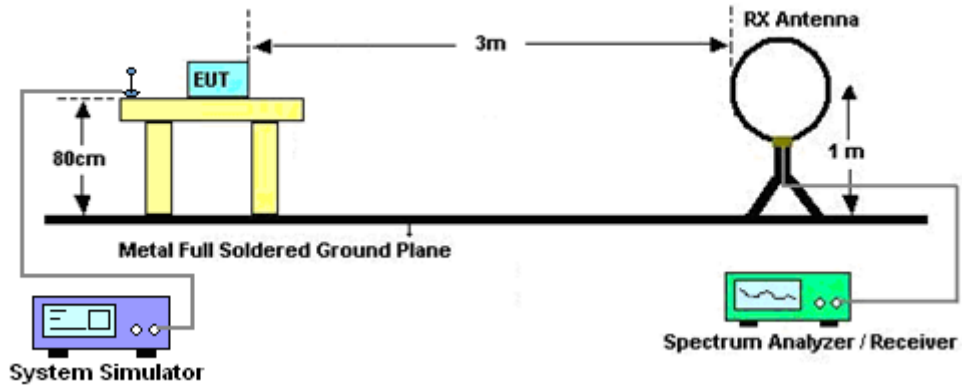

For radiated test from 30MHz to 1GHz

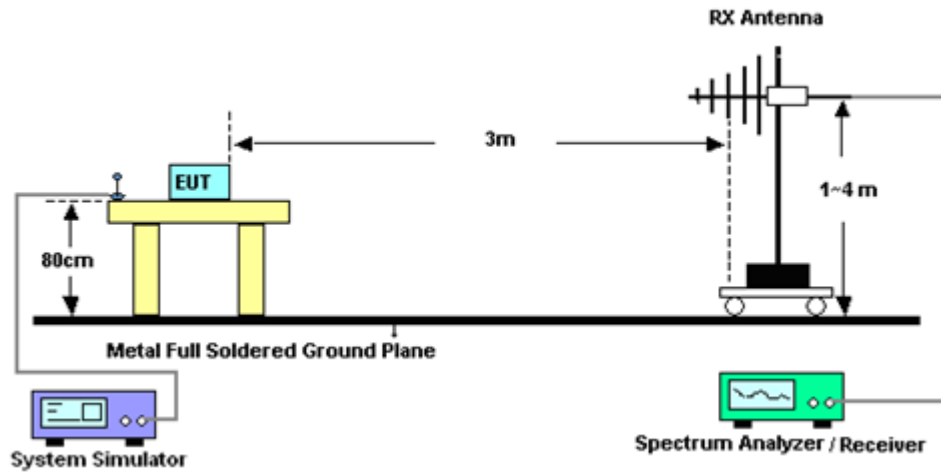

For radiated test above 1GHz

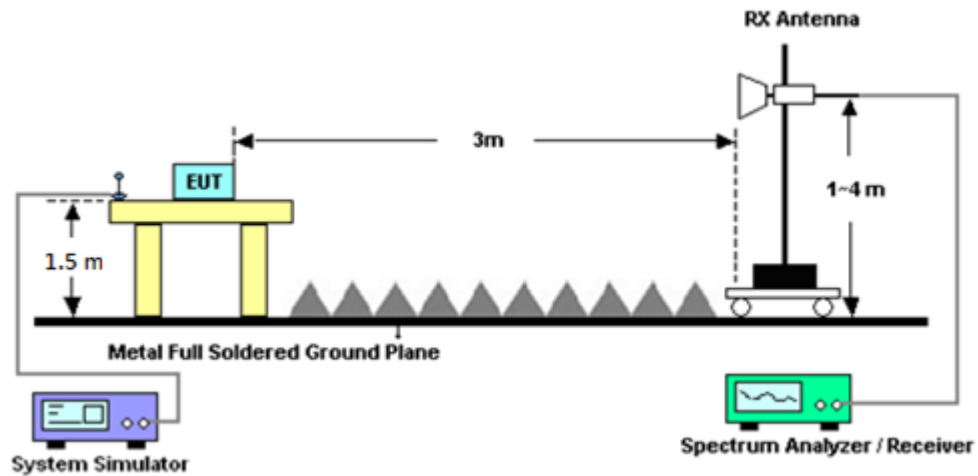

### 3.1.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix A.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Sep. 28, 2020~ Oct. 02, 2020	Jul. 13, 2021	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 17, 2019	Sep. 28, 2020~ Oct. 02, 2020	Dec. 16, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&07	30MHz to 1GHz	Apr. 29, 2020	Sep. 28, 2020~ Oct. 02, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	41912 & 07	30MHz to 1GHz	Apr. 29, 2020	Sep. 28, 2020~ Oct. 02, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-121 2	1GHz ~ 18GHz	May 20, 2020	Sep. 28, 2020~ Oct. 02, 2020	May 19, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-124 1	1GHz ~ 18GHz	Jul. 15, 2020	Sep. 28, 2020~ Oct. 02, 2020	Jul. 14, 2021	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 19, 2020	Sep. 28, 2020~ Oct. 02, 2020	May 18, 2021	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Oct. 28, 2019	Sep. 28, 2020~ Oct. 02, 2020	Oct. 27, 2020	Radiation (03CH13-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Sep. 28, 2020~ Oct. 02, 2020	Feb. 14, 2021	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 20, 2020	Sep. 28, 2020~ Oct. 02, 2020	Mar. 19, 2021	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 28, 2020~ Oct. 02, 2020	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Sep. 28, 2020~ Oct. 02, 2020	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 28, 2020~ Oct. 02, 2020	N/A	Radiation (03CH13-HY)
Software	Audix	E3 6.2009-8-24	RK-00099 2	N/A	N/A	Sep. 28, 2020~ Oct. 02, 2020	N/A	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 12, 2020	Sep. 28, 2020~ Oct. 02, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 12, 2020	Sep. 28, 2020~ Oct. 02, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Sep. 28, 2020~ Oct. 02, 2020	Feb. 24, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30M~40GHz	Mar. 12, 2020	Sep. 28, 2020~ Oct. 02, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30M-18G	Feb. 12, 2020	Sep. 28, 2020~ Oct. 02, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 12, 2020	Sep. 28, 2020~ Oct. 02, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 13, 2020	Sep. 28, 2020~ Oct. 02, 2020	Jul. 12, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60SS	SN3	1.2GHz High Pass Filter	Jul. 02, 2020	Sep. 28, 2020~ Oct. 02, 2020	Jul. 01, 2021	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303A	TP190075	N/A	Apr. 23, 2020	Sep. 28, 2020~ Oct. 02, 2020	Apr. 22, 2021	Radiation (03CH13-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.10
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.12
-------------------------------------------------------------------------	------



Appendix A. Test Results of Radiated Test

LTE Band 26

LTE Band 26 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1628	-62.37	-13	-49.37	-75.25	-67.69	1.22	8.69	H
	2440	-50.40	-13	-37.40	-67.17	-57.27	1.43	10.45	H
	4072	-54.57	-13	-41.57	-74.98	-62.41	2.11	12.10	H
									H
									H
									H
	1628	-60.60	-13	-47.60	-73.34	-65.92	1.22	8.69	V
	2440	-49.55	-13	-36.55	-66.73	-56.42	1.43	10.45	V
	4072	-54.18	-13	-41.18	-75.11	-62.02	2.11	12.10	V
									V
									V
									V
Middle	1632	-60.71	-13	-47.71	-73.61	-66.04	1.22	8.70	H
	2448	-49.72	-13	-36.72	-66.47	-56.60	1.43	10.46	H
	3264	-57.36	-13	-44.36	-76.13	-65.23	1.68	11.69	H
									H
									H
									H
	1632	-60.03	-13	-47.03	-72.79	-65.36	1.22	8.70	V
	2448	-50.03	-13	-37.03	-67.16	-56.91	1.43	10.46	V
	3264	-57.11	-13	-44.11	-76.18	-64.98	1.68	11.69	V
									V
									V
									V



Highest	1640	-59.37	-13	-46.37	-72.29	-64.73	1.22	8.73	H
	2460	-51.36	-13	-38.36	-68.09	-58.24	1.43	10.47	H
	3280	-57.28	-13	-44.28	-75.94	-65.18	1.69	11.74	H
									H
									H
									H
	1640	-59.58	-13	-46.58	-72.37	-64.94	1.22	8.73	V
	2460	-51.38	-13	-38.38	-68.44	-58.26	1.43	10.47	V
	3280	-56.97	-13	-43.97	-75.98	-64.87	1.69	11.74	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.