



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

Notebook Computer

MODEL NUMBER: Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API

**FCC ID: O57IPS540A13
IC: 10407A-IPS540A13**

REPORT NUMBER: 4789547060-8

ISSUE DATE: August 19, 2020

Prepared for

**Lenovo(Shanghai) Electronics Technology Co., Ltd.
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free
Trade Zone, 200131, CHINA**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	08/19/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >> ISED RSS-247 > when <Accuracy Method> decision rule is applied.</p>			

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER</i>	<i>9</i>
5.3. <i>PACKET TYPE CONFIGURATION</i>	<i>10</i>
5.4. <i>CHANNEL LIST.....</i>	<i>10</i>
5.5. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>11</i>
5.7. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>11</i>
5.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>16</i>
7.2. <i>20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>20</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES</i>	<i>22</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>24</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>26</i>
8. RADIATED TEST RESULTS.....	28
8.1. <i>RESTRICTED BANDEDGE.....</i>	<i>34</i>
8.1.1. <i>GFSK MODE</i>	<i>34</i>
8.1.2. <i>8DPSK MODE</i>	<i>40</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz).....</i>	<i>46</i>
8.2.1. <i>GFSK MODE</i>	<i>46</i>
8.2.2. <i>8DPSK MODE</i>	<i>52</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz).....</i>	<i>58</i>



8.3.1.	GFSK MODE	58
8.3.2.	8DPSK MODE	64
8.4.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	70
8.4.1.	GFSK MODE	70
8.5.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	72
8.5.1.	GFSK MODE	72
8.6.	SPURIOUS EMISSIONS BELOW 30 MHz	74
8.6.1.	GFSK MODE	74
9.	AC POWER LINE CONDUCTED EMISSIONS	77
9.1.1.	GFSK MODE	78
10.	ANTENNA REQUIREMENTS	80
	<i>Appendix A: 20dB Bandwidth</i>	<i>81</i>
	Test Result	81
	Test Graphs	82
	<i>Appendix B: Occupied Channel Bandwidth</i>	<i>85</i>
	Test Result	85
	Test Graphs	86
	<i>Appendix C: Maximum Output Power</i>	<i>89</i>
	Test Result	89
	<i>Appendix D: Carrier Frequency Separation</i>	<i>90</i>
	Test Result	90
	Test Graphs	91
	<i>Appendix E: Time of Occupancy</i>	<i>92</i>
	Test Result	92
	Test Graphs	93
	<i>Appendix F: Number of Hopping Channels</i>	<i>96</i>
	Test Result	96
	Test Graphs	97
	<i>Appendix G: Band Edge Measurements</i>	<i>98</i>
	Test Result	98
	Test Graphs	99
	<i>Appendix H: Conducted Spurious Emission</i>	<i>103</i>
	Test Result	103
	Test Graphs	104
	<i>Appendix I: Duty Cycle</i>	<i>113</i>
	Test Result	113
	Test Graphs	114



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address: Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

Manufacturer Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address: Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

EUT Information

EUT Name: Notebook Computer
Model: Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API
Brand: Lenovo
Sample Received Date: June 15, 2020
Sample Status: Normal
Date of Tested: July 3, 2020 ~ August 19, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Port Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
20dB Bandwidth and 99% Occupied Bandwidth	±0.0196 %
Conducted Output Power	±0.686 dB
Conducted Power Spectral Density	±0.743 dB
Carrier Frequency Separation	±1.9 %
Number of Hopping Channel	±1.9 %
Time of Occupancy	±0.028 %
Conducted Band Edge Measurements	±1.328 dB
Conducted Spurious Emissions	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328 dB (1 GHz ~ 26 GHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Notebook Computer		
Model	Lenovo IdeaPad S540-13ARE		
Series Model	Lenovo IdeaPad S540-13API		
Model Difference	Lenovo IdeaPad S540-13API have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with Lenovo IdeaPad S540-13ARE. The difference lies only on the difference AMD platform's CPU and model name. all these changes do not degrade the RF performance of the certified product.		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	π/4-DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1Mbps	2Mbps	3Mbps
Battery	DC 11.55 V/4680 mAh/54 Wh		
FVIN	V1.0		
PMN	Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API		
HVIN	Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API		
EUT Serial Number	1385599200003		

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Maximum AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
GFSK	2402-2480	0-78[79]	9.71	12.08
8DPSK	2402-2480	0-78[79]	5.63	8.00

5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2DH1	54
	2DH3	367
	2DH5	679
8DPSK	3DH1	83
	3DH3	552
	3DH5	1021

5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK	Hopping	2402 MHz ~ 2480 MHz
8DPSK	Hopping	2402 MHz ~ 2480 MHz

**5.6. WORST-CASE CONFIGURATIONS**

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1 Mbit/s	DH5
EDR	FHSS	8DPSK	3 Mbit/s	3DH5

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates. Only GFSK and 8DPSK test data were report in this report.

5.7. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2402 ~ 2480 MHz Band				
Test Software		DRTU, Version 11.1941.0-10270		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	12	12	12
8DPSK	1	12	12	12

5.8. DESCRIPTION OF AVAILABLE ANTENNAS

SPEEDWIRE(SPD) Antenna

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
Tx1	2402 ~ 2480 MHz	PIFA	-0.12
Tx2	2402 ~ 2480 MHz	PIFA	2.37

Test Mode	Transmit and Receive Mode	Description
GFSK	1TX, 1RX	Chain 1 and chain 2 can be used as transmitting/receiving antenna.

ICT Antenna

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
Tx1	2402 ~ 2480 MHz	PIFA	0.73
Tx2	2402 ~ 2480 MHz	PIFA	-1.68

Test Mode	Transmit and Receive Mode	Description
GFSK	1TX, 1RX	Chain 1 and chain 2 can be used as transmitting/receiving antenna.

Note 1: The EUT have two kinds of antennas, one is called SPEEDWIRE antenna and the other one called ICT antenna.

Note 2: The EUT has two antennas, one is Tx1 which is the main antenna and the other one is Tx2 which is the auxiliary (AUX) antenna.

Note 3: BT does not support MIMO mode, only 1 antenna active at any moment in time, all the antennas had been tested, but only the worst data was recorded in the report.

Note 4: The value of the antenna gain was declared by customer.

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	/	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC Input	Type C	/	/	/
2	USB	USB	/	/	/
3	Type C	Type C	/	/	/
4	AUX	AUX	/	/	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC ADAPTER	Lenovo	ADLX95YCC3A	Input: AC 100 ~ 240 V/1.6 A/50 ~ 60 Hz Output: DC 20 V, 4.75 A/ DC 15 V, 3 A/DC 5 V, 3 A

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS



**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00066	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-001- 3000	TRS-302- 00050	Dec.5, 2019	Dec.5, 2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5- 40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10- 2700-3000- 18000-40SS	23	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Cable	/	/	9879/44EA	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Cable	/	/	20160201001	Dec.05,2019	Dec.05,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020A	MY49100060	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY5100022	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Attenuator	Weinschel	3M-10	T9692	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Cable	R&S	/	MY11565/4PE	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Cable	R&S	/	MY11566/4PE	Dec.06,2019	Dec.06,2020
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test Software for RF Conducted Test	Tonscend	JS1120-3 RF Test System		2.6.77.0518	

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only.

PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

TEST SETUP

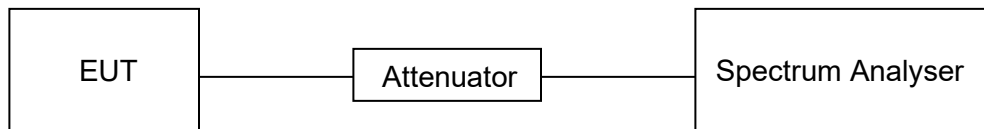

TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix I.

7.2. 20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 2 % to 5 % of the occupied bandwidth For 99 % Occupied Bandwidth: 1.5 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	For 20 dB Bandwidth: 2 to 5 times the 20 dB bandwidth For 99 % Occupied Bandwidth: 1.5 to 5 times the occupied bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP

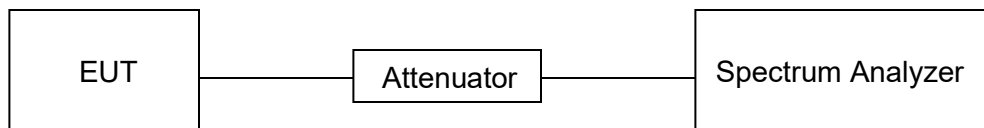



TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix A and B.

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel: 125 mW or 21dBm	2400-2483.5
ISED RSS-247 Clause 5.4 (d)	Equivalent Isotropically Radiated Power	4 watt or 36 dBm	2400-2483.5


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.5.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak/average emission level, the indicated level is the peak/average output power, after any corrections for external attenuators, cables and duty cycle correction factor if need.

TEST SETUP

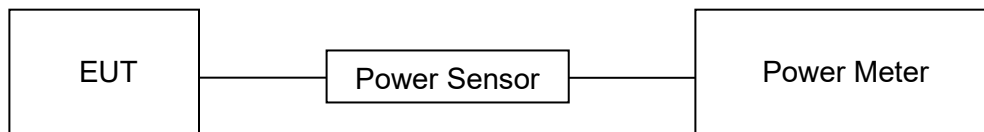

TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	59.9%
Atmosphere Pressure	101kPa	Test Voltage	DC 11.55V

RESULTS

Please refer to appendix C.

7.4. CARRIER FREQUENCY SEPARATION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	\geq RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP

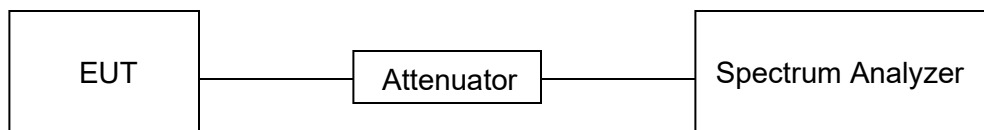



TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to Appendix D.

7.5. NUMBER OF HOPPING FREQUENCIES

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	\geq RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP

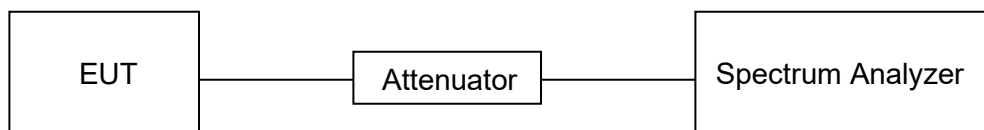



TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix F.

7.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1 Dwell Time: $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3 Dwell Time: $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5 Dwell Time: $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):


DH1 Dwell Time: $\text{Burst Width} * (1600/2) * 8 / (\text{channel number})$

DH3 Dwell Time: $\text{Burst Width} * (1600/4) * 8 / (\text{channel number})$

DH5 Dwell Time: $\text{Burst Width} * (1600/6) * 8 / (\text{channel number})$



TEST SETUP

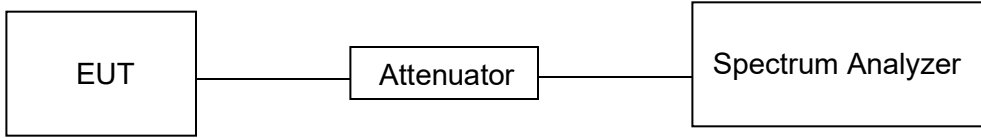

TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix E.



7.7. CONDUCTED BANDEdge AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.



TEST SETUP

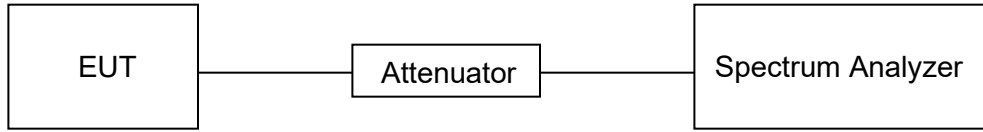

TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix G & H.

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz		
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
		Quasi-Peak
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54
Above 1000	500	Peak
		Average
		74
		54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

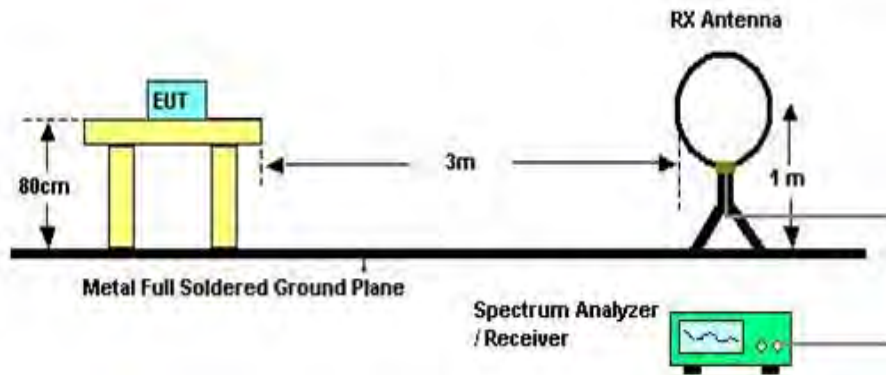


The setting of the spectrum analyser

RBW	200Hz (From 9 kHz to 0.15 MHz)/ 9kHz (From 0.15 MHz to 30 MHz)
VBW	200Hz (From 9 kHz to 0.15 MHz)/ 9kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

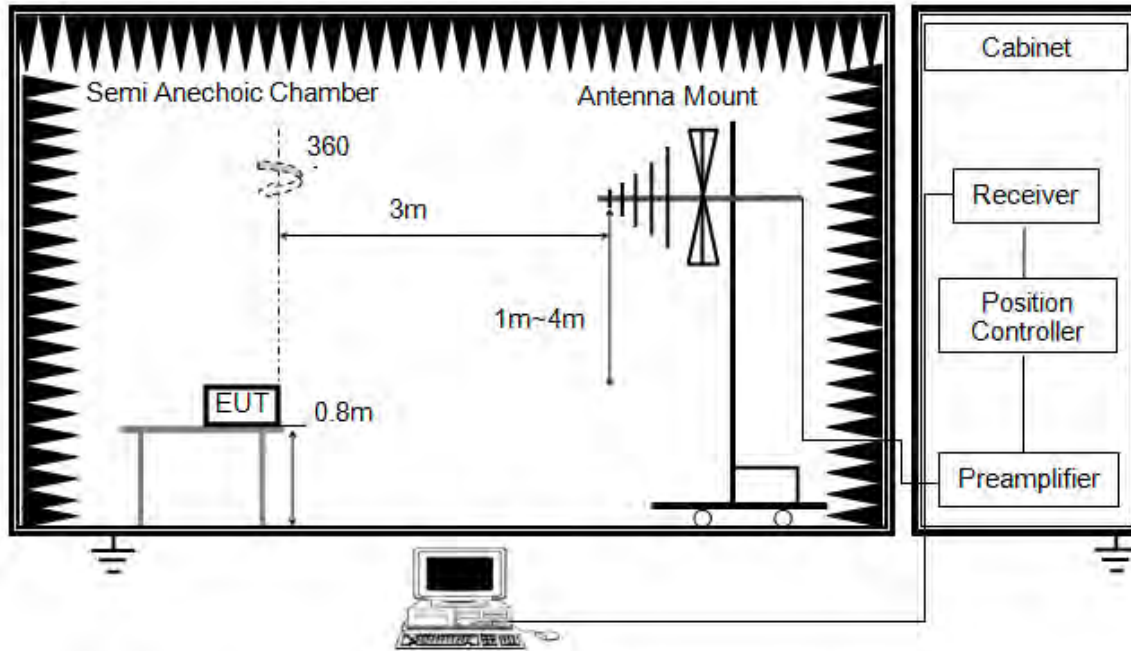


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

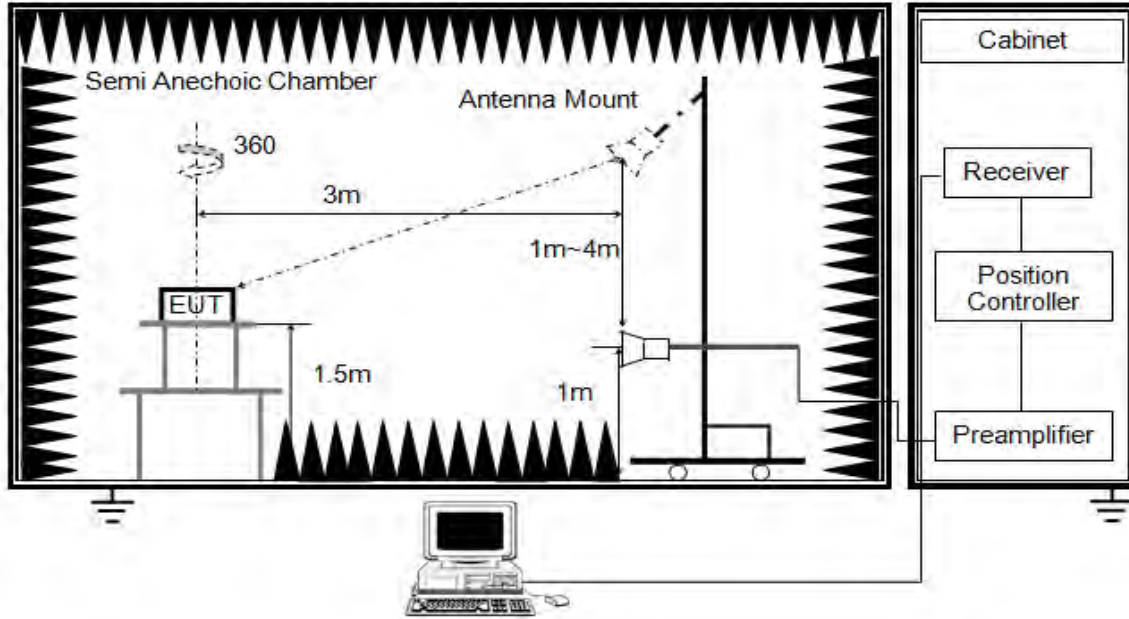


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

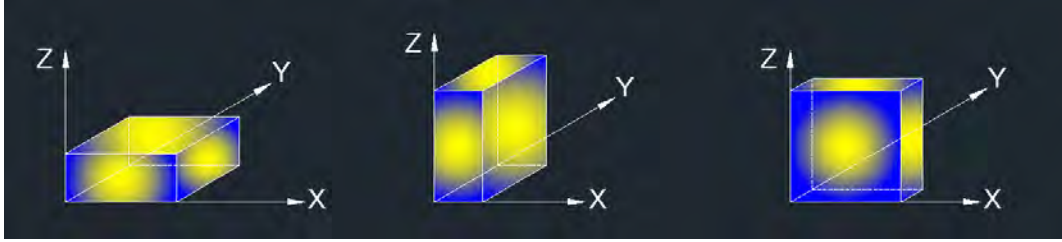

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: Simultaneous transmission had been evaluated with the 2.4 GHz WiFi/5 GHz WiFi and BT/BLE transmitter and has no additional or worse emissions found. Please refer to WiFi test report.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

Note 4: Both SPEEDWIRE(SPD) antenna and ICT antenna were tested, but only the worst data (SPEEDWIRE(SPD) antenna) was recorded in the report.

Note 5: Both antenna 1 and antenna 2 had been tested, only the worst data (antenna 2) was recorded in the report.

TEST ENVIRONMENT


Temperature	24.6 °C	Relative Humidity	54 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

8.1. RESTRICTED BANDEDGE

8.1.1. GFSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

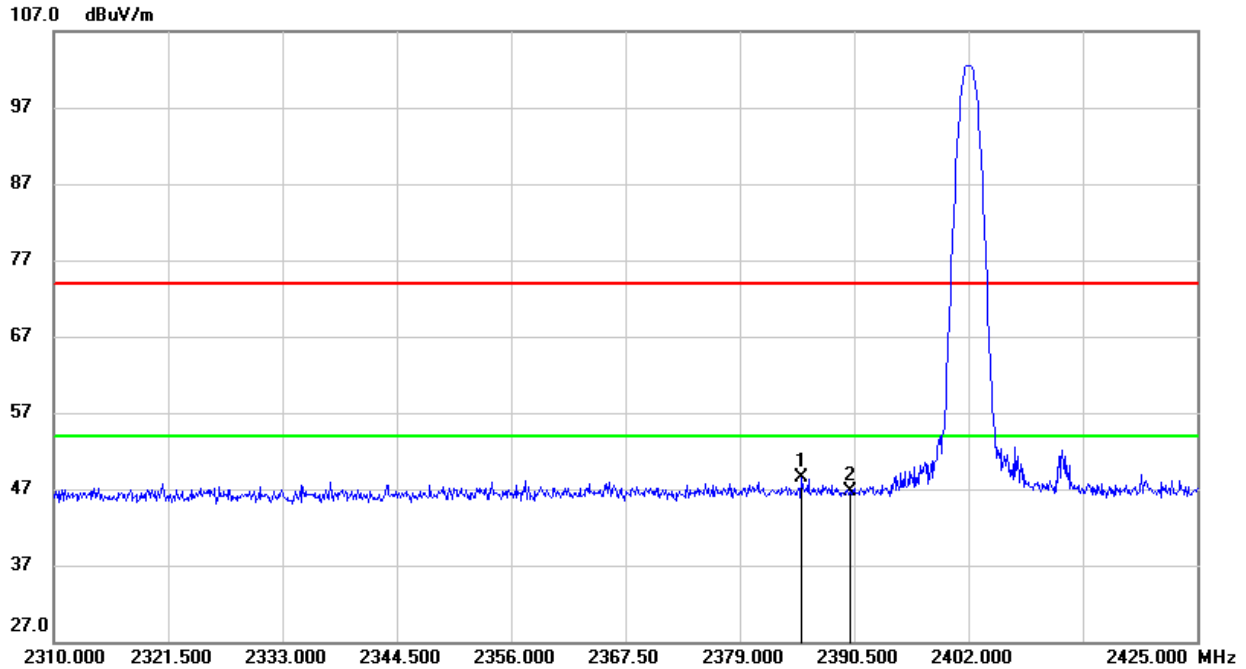


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.210	15.50	32.93	48.43	74.00	-25.57	peak
2	2390.000	13.79	32.94	46.73	74.00	-27.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

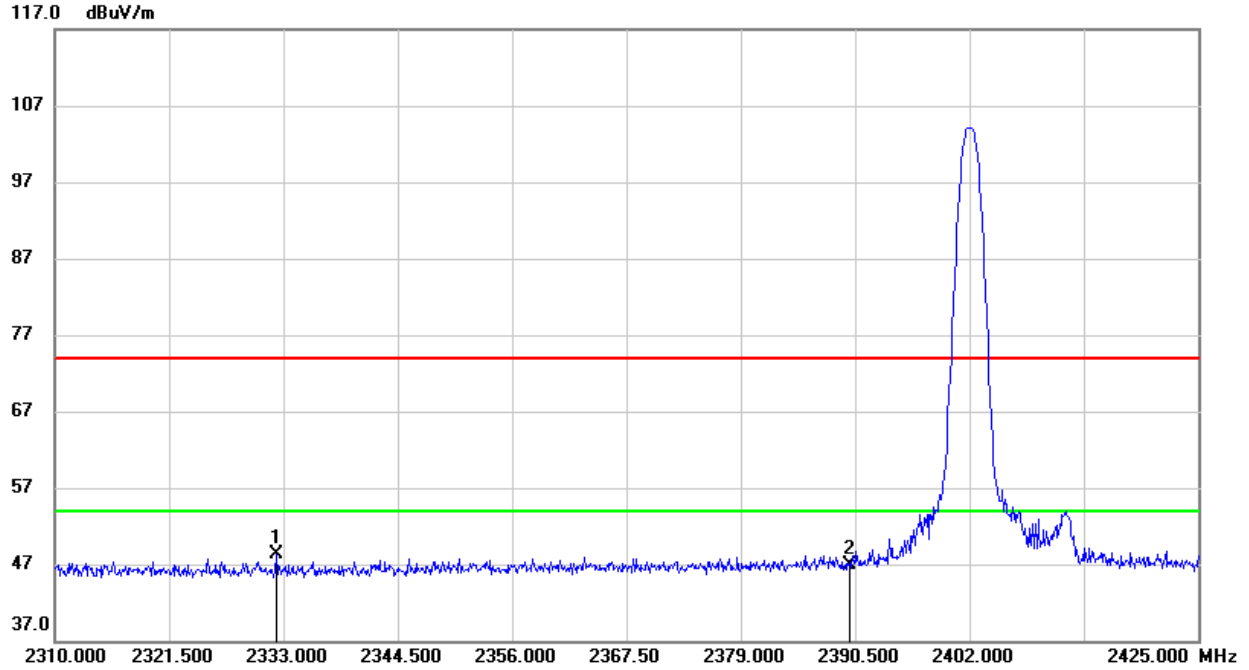

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.310	15.51	32.75	48.26	74.00	-25.74	peak
2	2390.000	14.05	32.94	46.99	74.00	-27.01	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

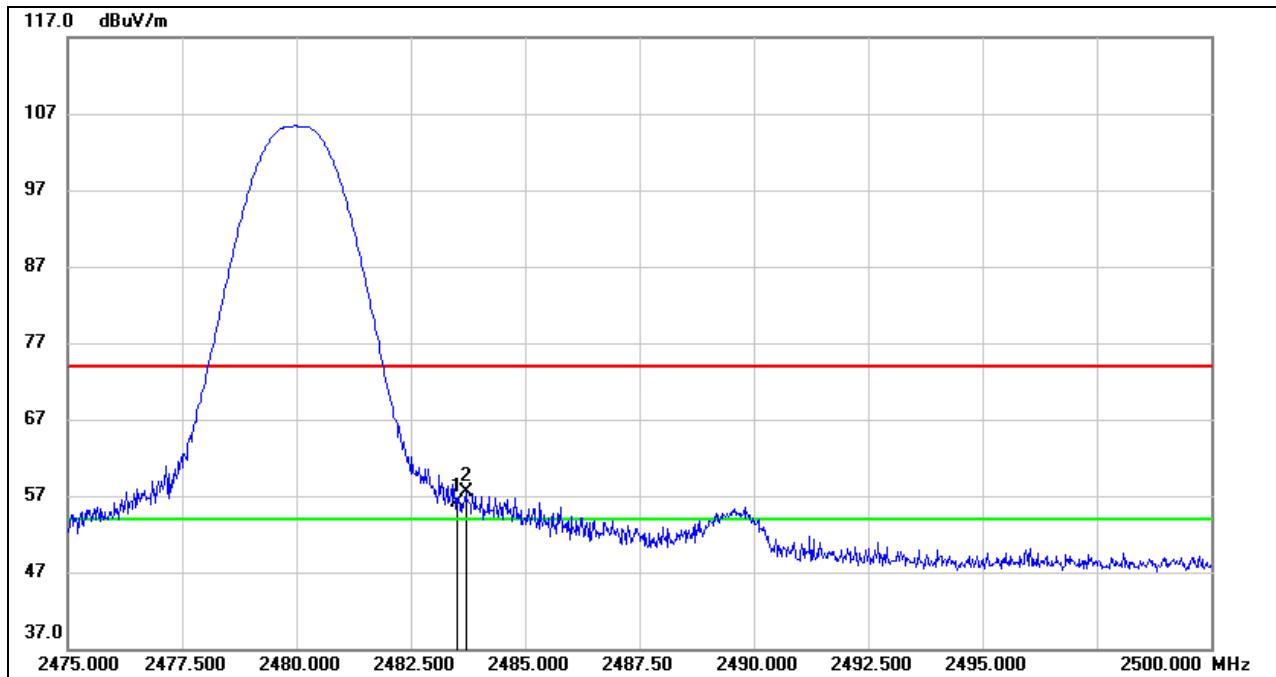RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)
PEAK


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.56	33.58	56.14	74.00	-17.86	peak
2	2483.700	23.83	33.58	57.41	74.00	-16.59	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

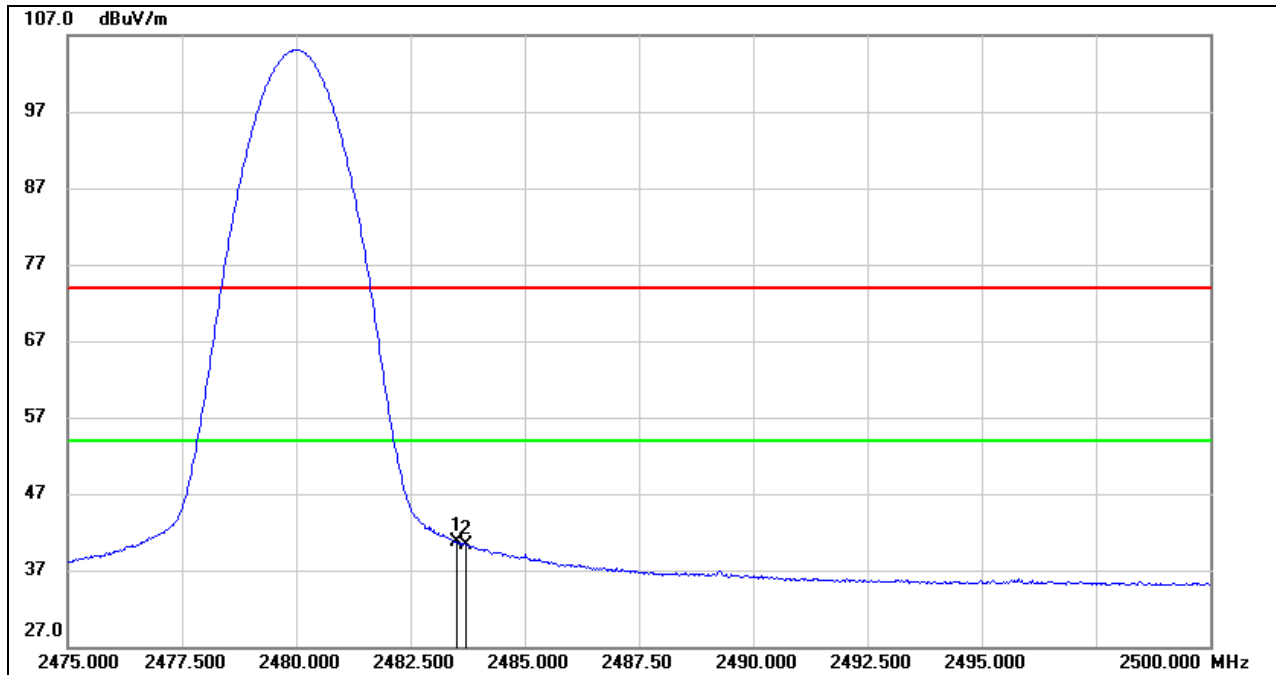


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	7.17	33.58	40.75	54.00	-13.25	AVG
2	2483.700	6.75	33.58	40.33	54.00	-13.67	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)


PEAK

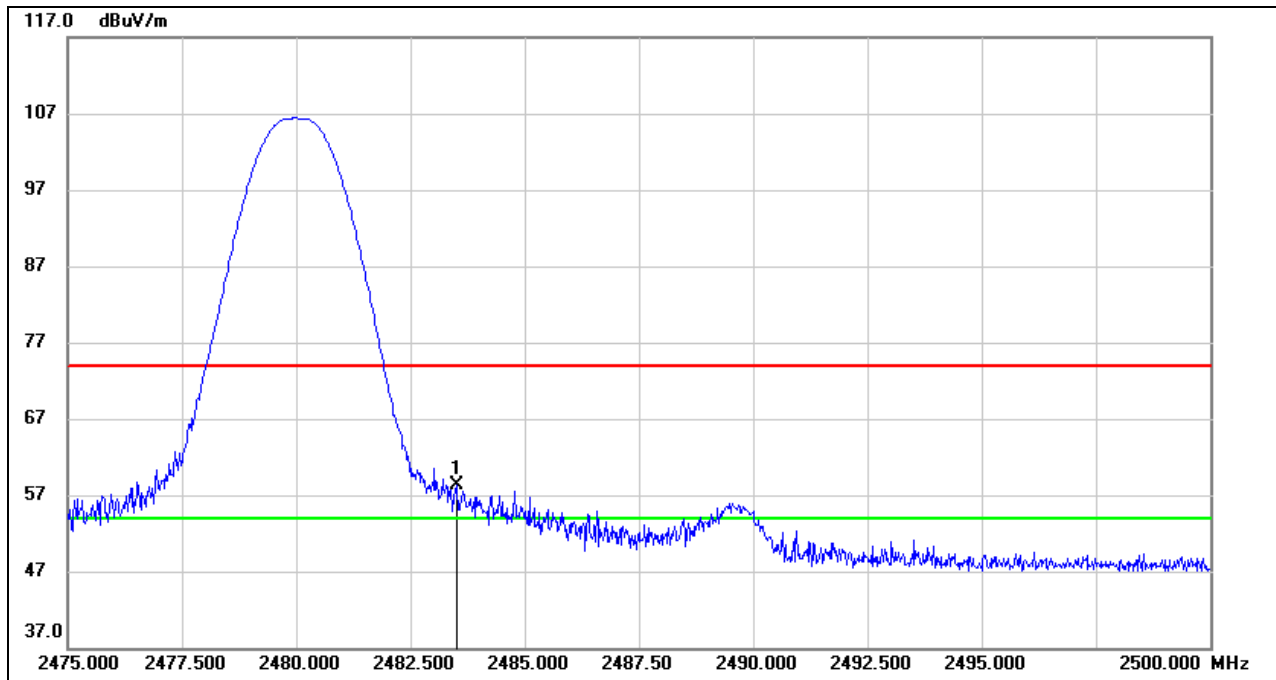

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	24.76	33.58	58.34	74.00	-15.66	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

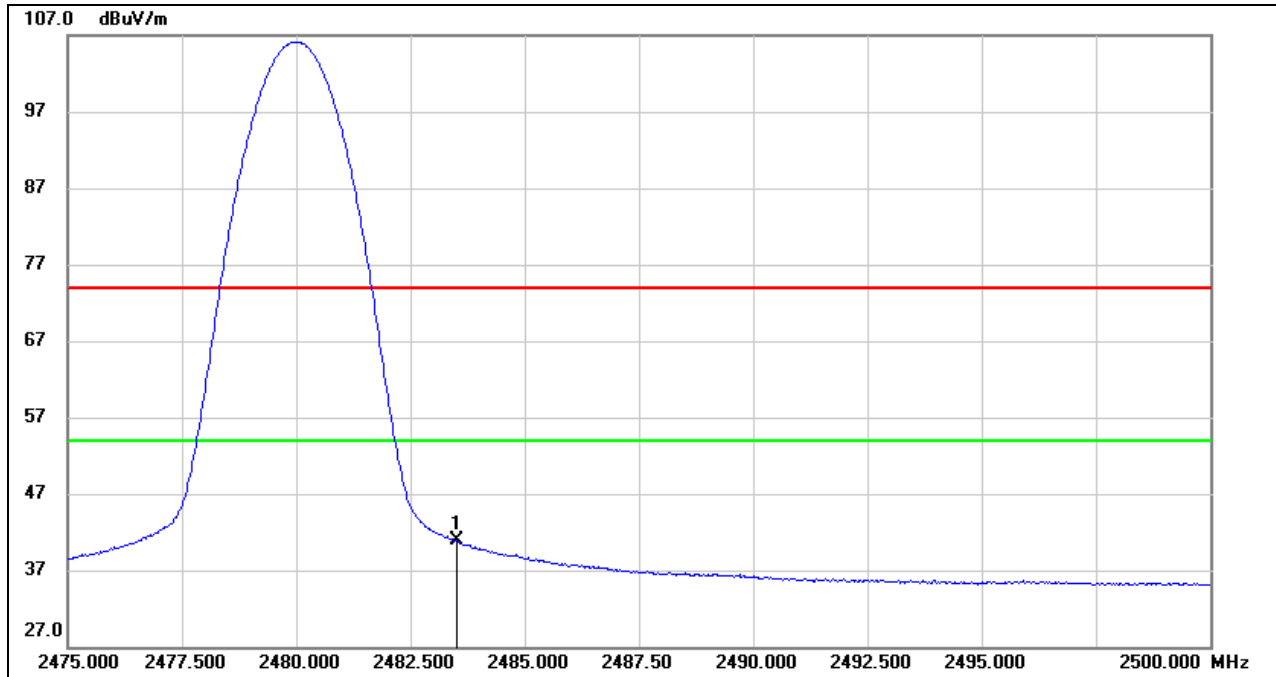


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	7.28	33.58	40.86	54.00	-13.14	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


8.1.2. 8DPSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

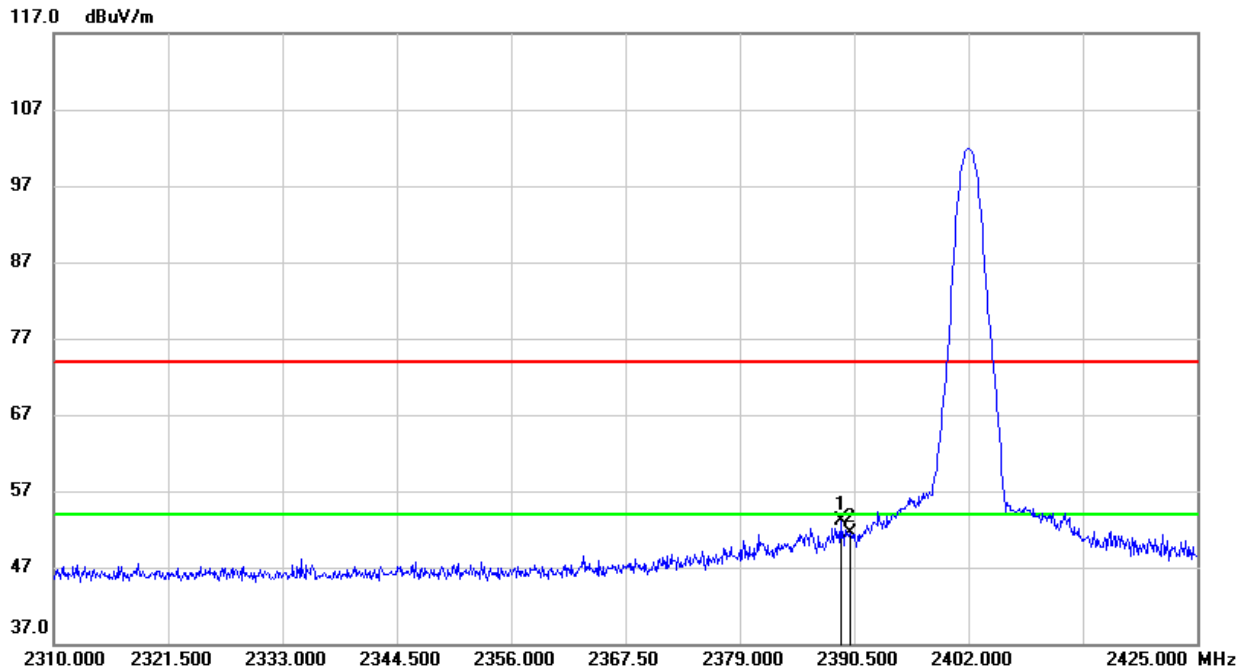


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.120	20.24	32.94	53.18	74.00	-20.82	peak
2	2390.000	18.62	32.94	51.56	74.00	-22.44	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

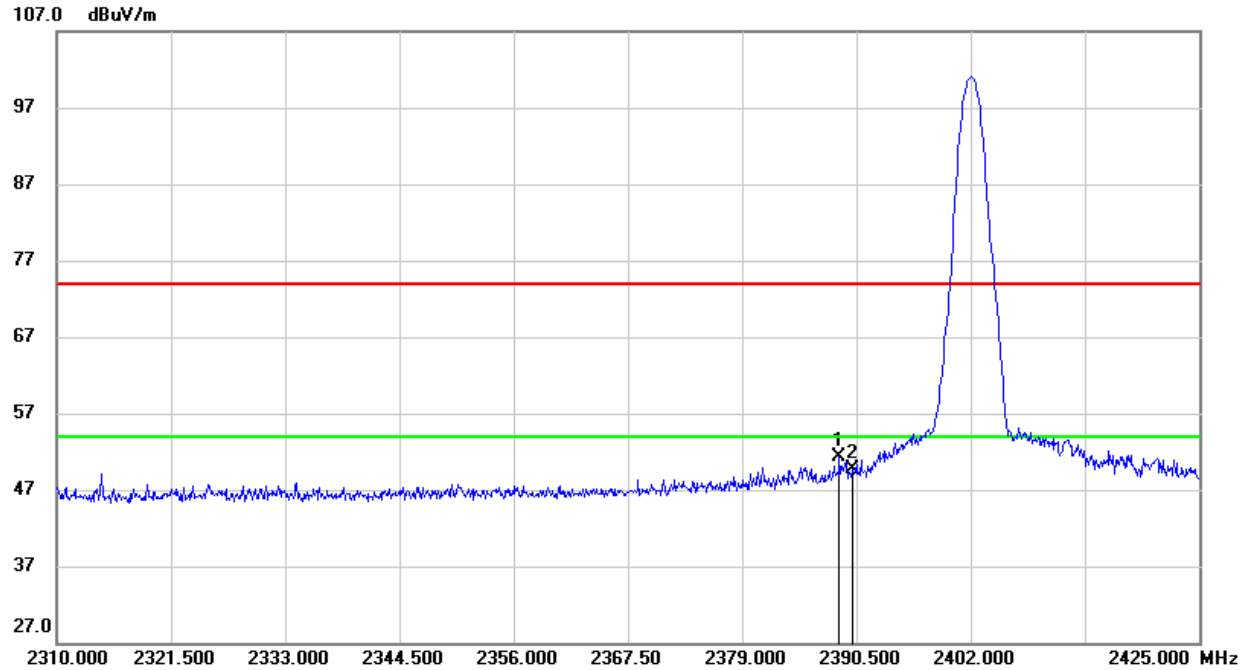**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.775	18.31	32.94	51.25	74.00	-22.75	peak
2	2390.000	16.75	32.94	49.69	74.00	-24.31	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

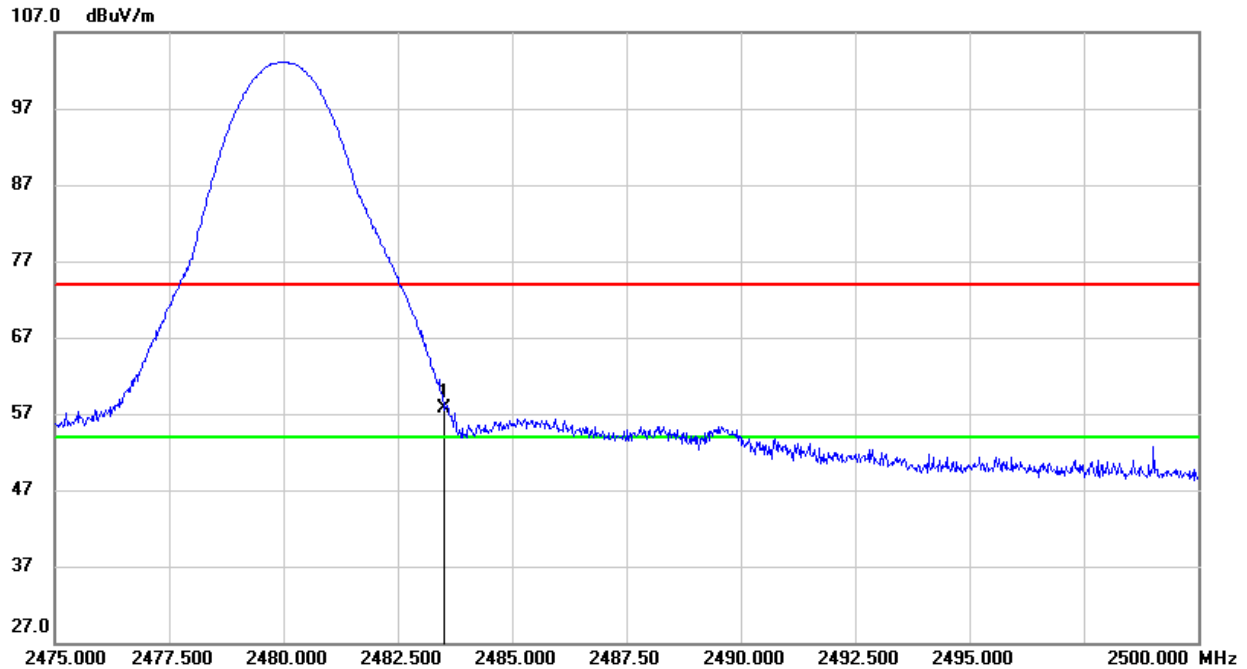**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	24.13	33.58	57.71	74.00	-16.29	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

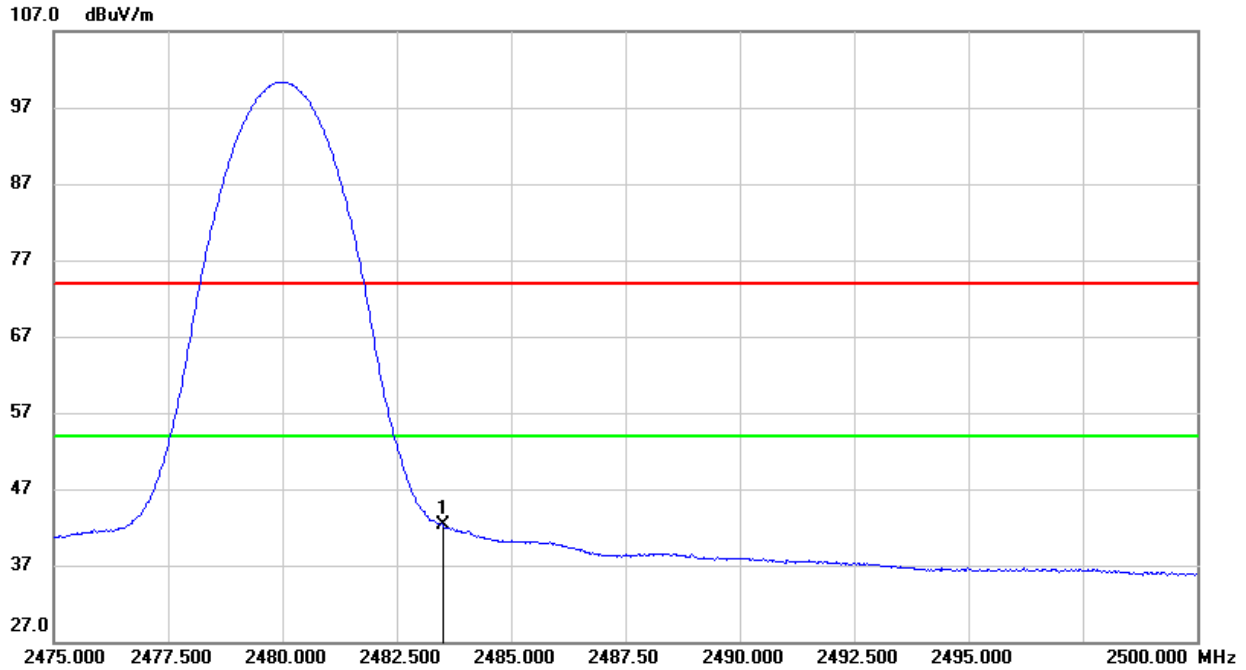

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.63	33.58	42.21	54.00	-11.79	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

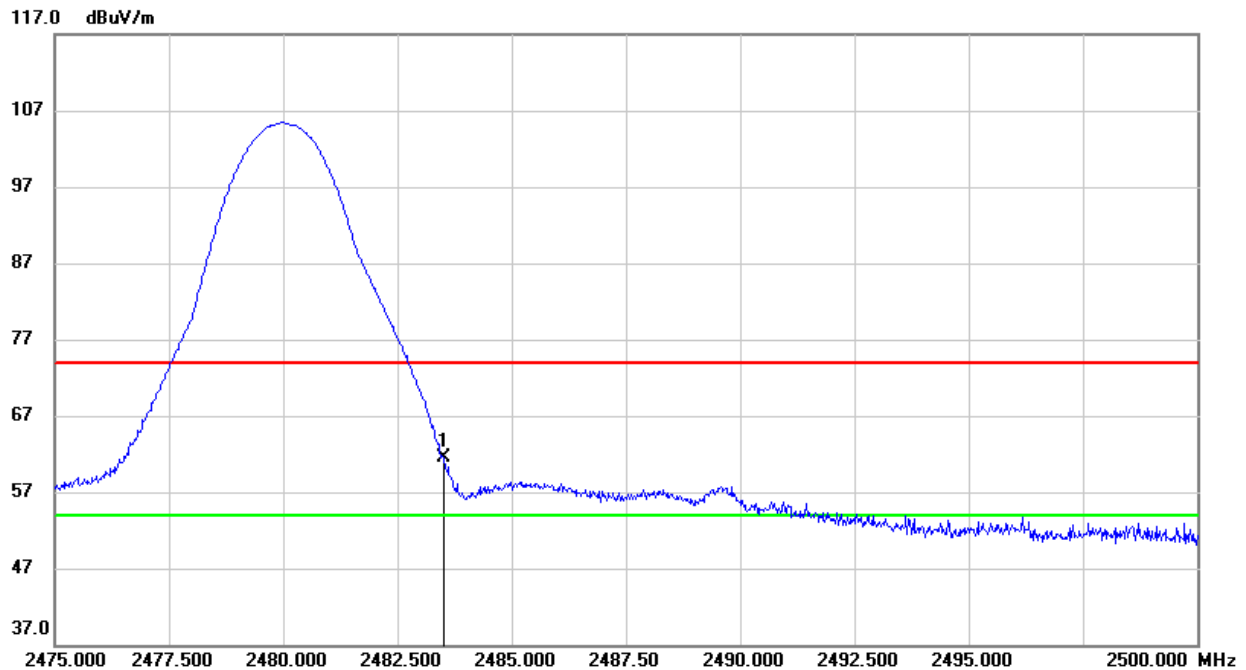RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)
PEAK


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.96	33.58	61.54	74.00	-12.46	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

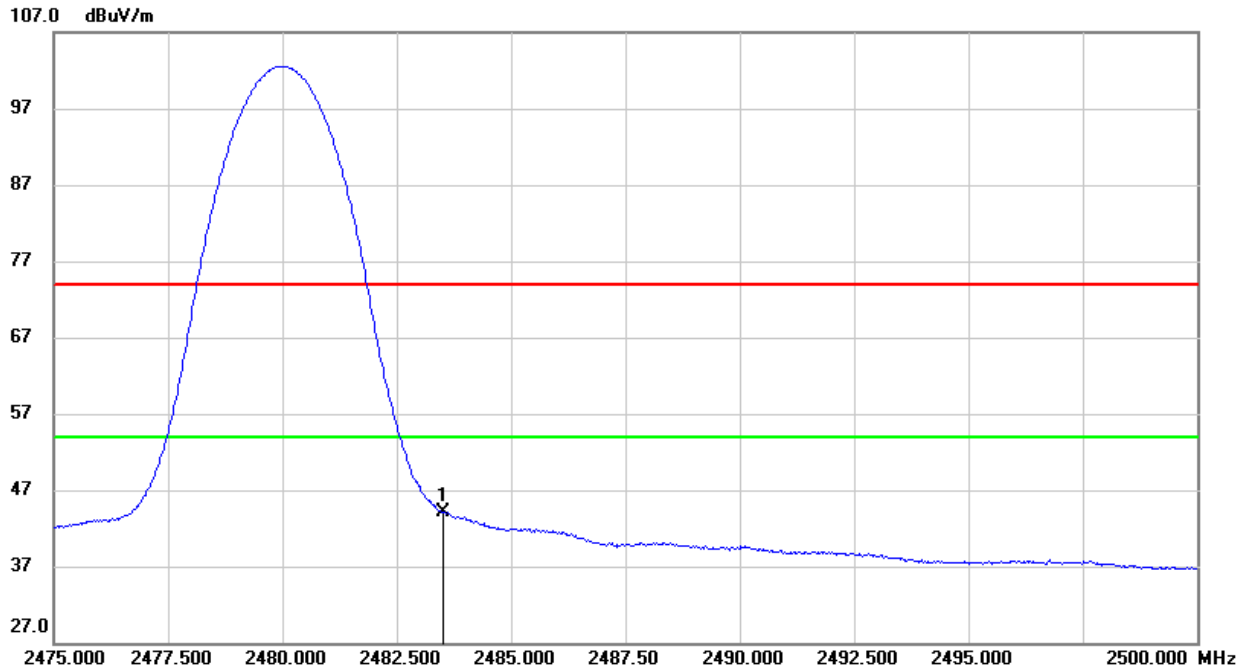


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.46	33.58	44.04	54.00	-9.96	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)


8.2.1. GFSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

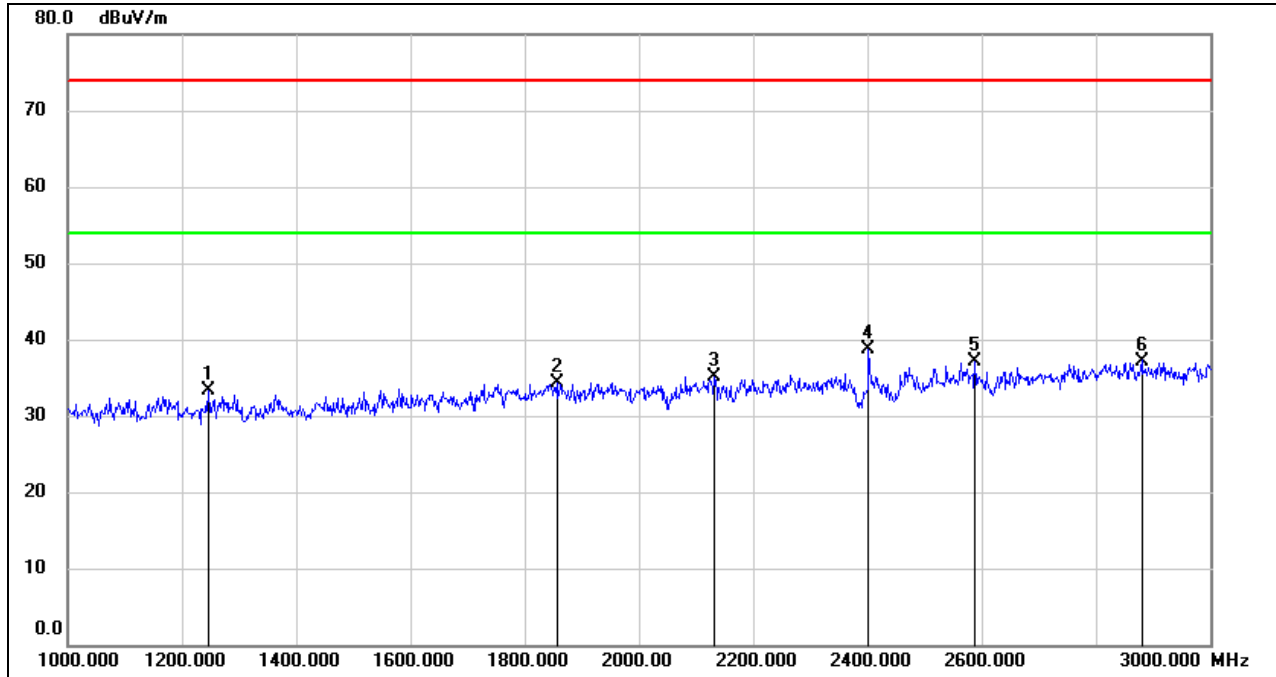


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1246.000	45.84	-12.52	33.32	74.00	-40.68	peak
2	1858.000	44.23	-9.93	34.30	74.00	-39.70	peak
3	2132.000	44.17	-9.00	35.17	74.00	-38.83	peak
4	2402.000	46.51	-7.85	38.66	/	/	fundamental
5	2588.000	44.78	-7.64	37.14	74.00	-36.86	peak
6	2880.000	42.82	-5.62	37.20	74.00	-36.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

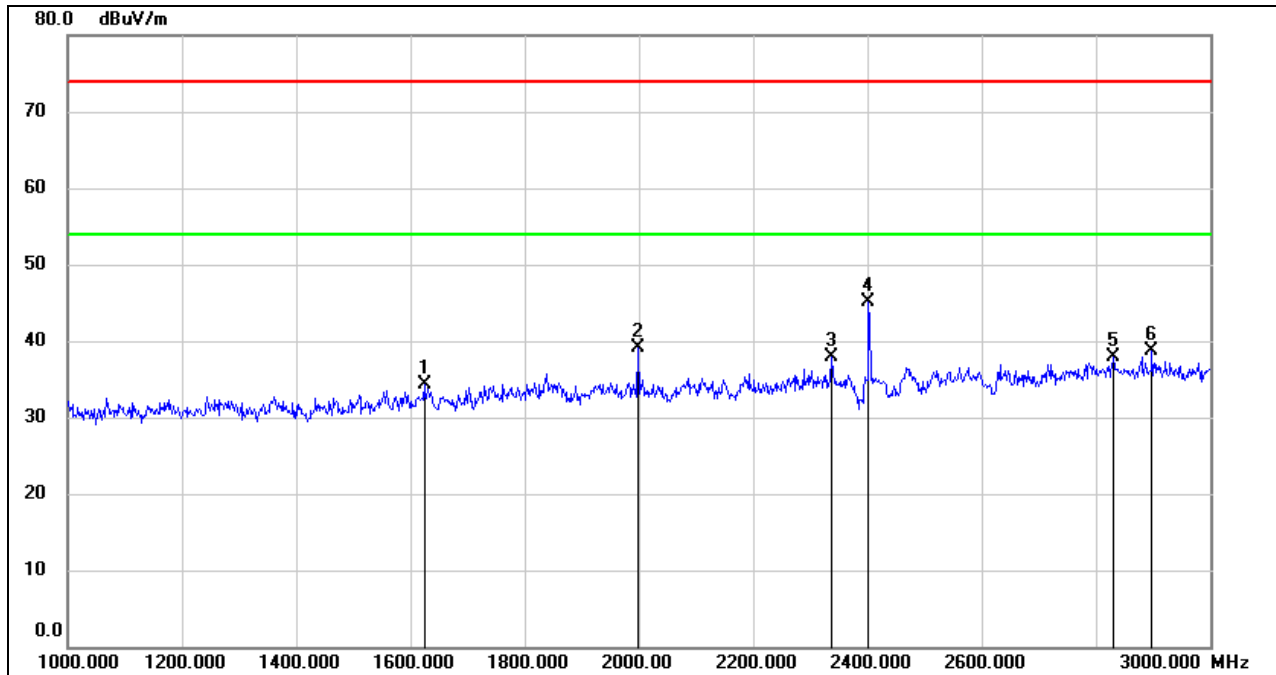HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


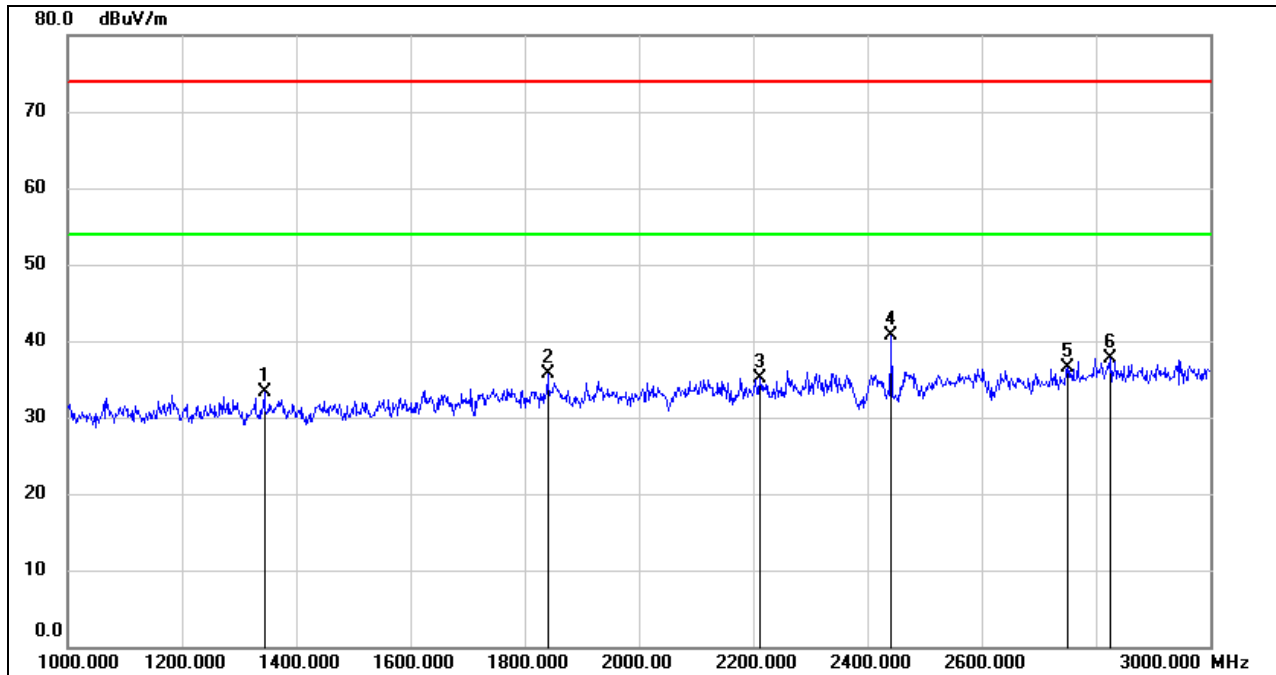
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1624.000	45.57	-11.28	34.29	74.00	-39.71	peak
2	1998.000	48.98	-9.83	39.15	74.00	-34.85	peak
3	2338.000	46.04	-8.06	37.98	74.00	-36.02	peak
4	2402.000	53.05	-7.85	45.20	/	/	fundamental
5	2830.000	43.89	-5.89	38.00	74.00	-36.00	peak
6	2898.000	44.26	-5.53	38.73	74.00	-35.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

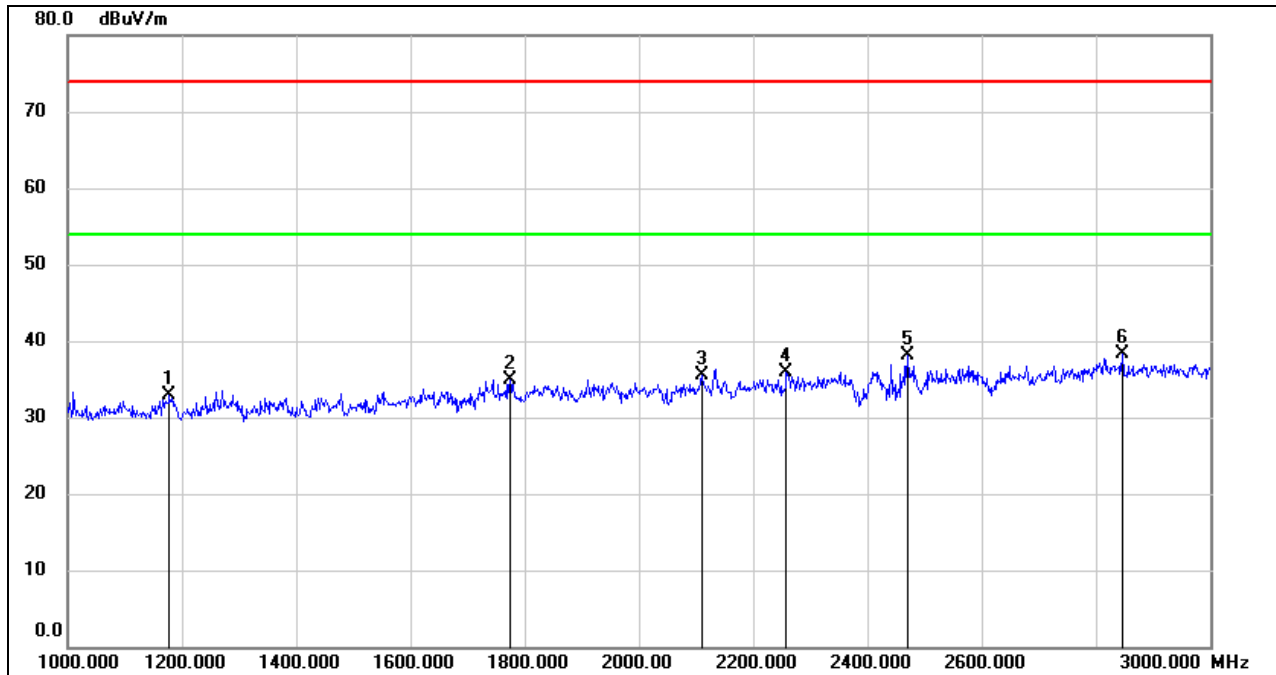HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1178.000	45.78	-12.86	32.92	74.00	-41.08	peak
2	1774.000	45.15	-10.17	34.98	74.00	-39.02	peak
3	2110.000	44.61	-9.10	35.51	74.00	-38.49	peak
4	2258.000	44.24	-8.39	35.85	74.00	-38.15	peak
5	2470.000	45.41	-7.37	38.04	74.00	-35.96	peak
6	2846.000	44.11	-5.80	38.31	74.00	-35.69	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1344.000	45.67	-12.36	33.31	74.00	-40.69	peak
2	1840.000	45.65	-9.93	35.72	74.00	-38.28	peak
3	2212.000	43.71	-8.61	35.10	74.00	-38.90	peak
4	2441.000	48.28	-7.57	40.71	/	/	fundamental
5	2750.000	43.10	-6.59	36.51	74.00	-37.49	peak
6	2826.000	43.68	-5.92	37.76	74.00	-36.24	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

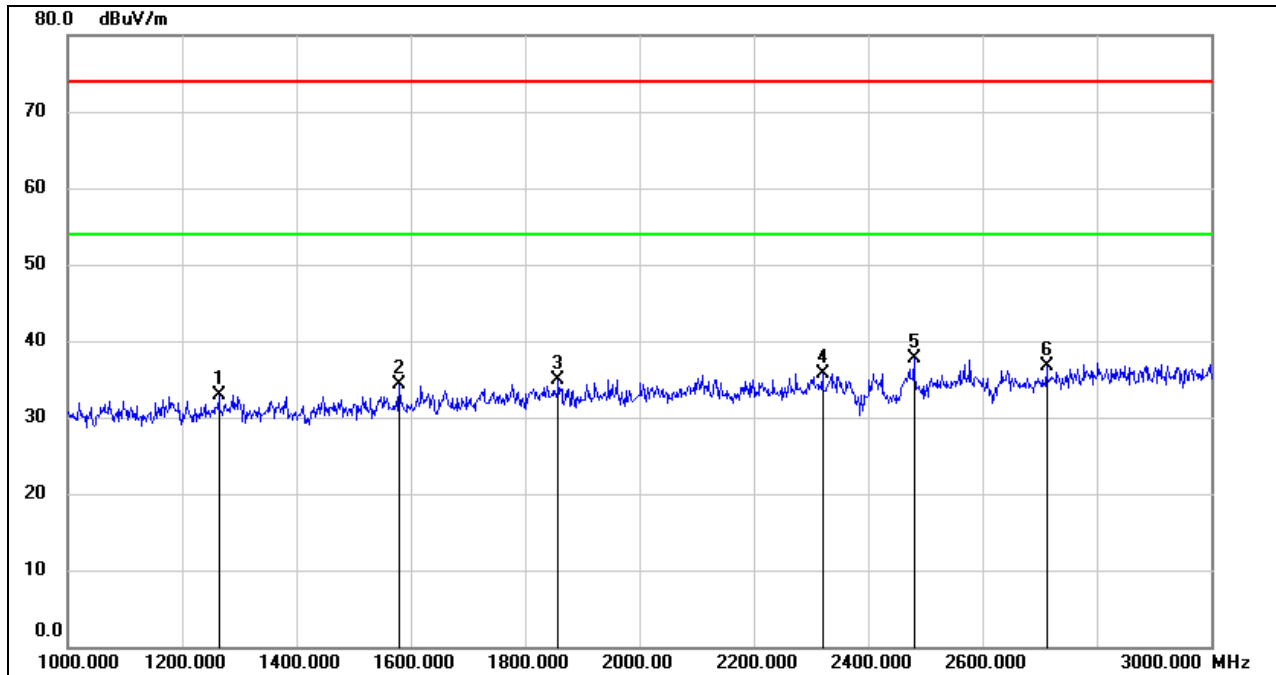HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1264.000	45.45	-12.46	32.99	74.00	-41.01	peak
2	1580.000	45.78	-11.56	34.22	74.00	-39.78	peak
3	1858.000	44.89	-9.93	34.96	74.00	-39.04	peak
4	2320.000	43.80	-8.12	35.68	74.00	-38.32	peak
5	2480.000	44.99	-7.31	37.68	/	/	fundamental
6	2712.000	43.67	-7.00	36.67	74.00	-37.33	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

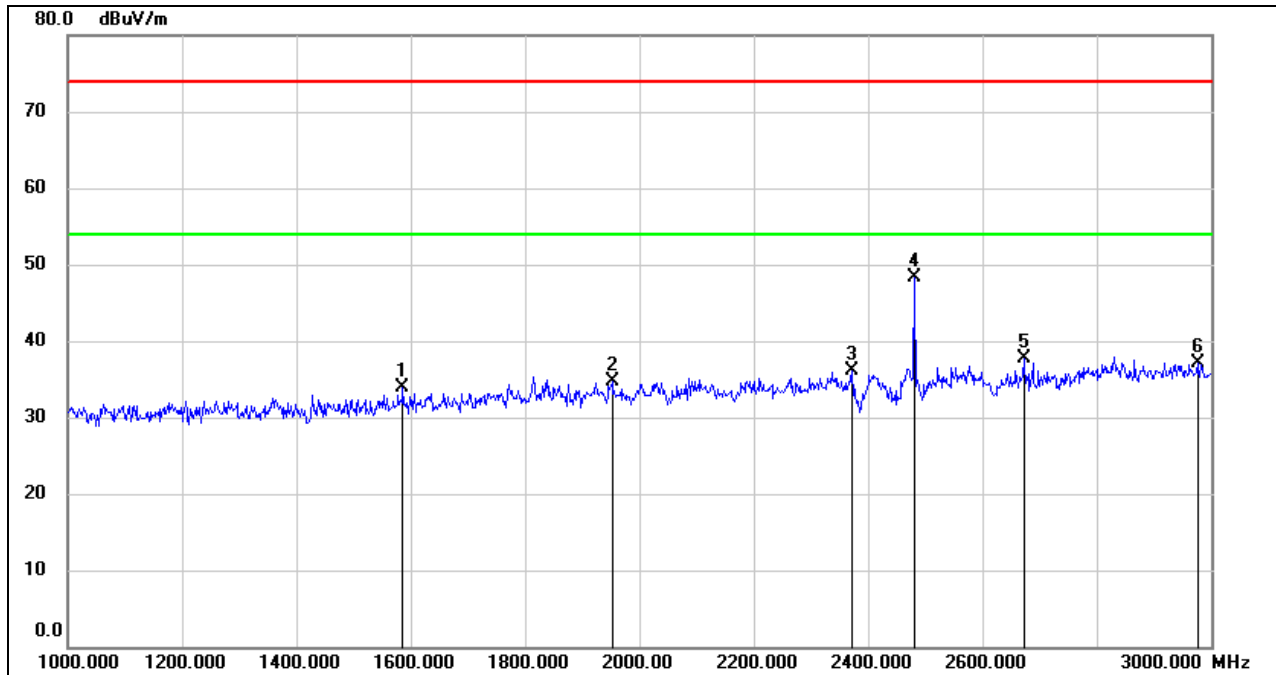
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1586.000	45.41	-11.51	33.90	74.00	-40.10	peak
2	1952.000	44.51	-9.88	34.63	74.00	-39.37	peak
3	2372.000	44.10	-7.95	36.15	74.00	-37.85	peak
4	2480.000	55.61	-7.31	48.30	/	/	fundamental
5	2672.000	44.92	-7.28	37.64	74.00	-36.36	peak
6	2976.000	42.42	-5.35	37.07	74.00	-36.93	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.2.2. 8DPSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

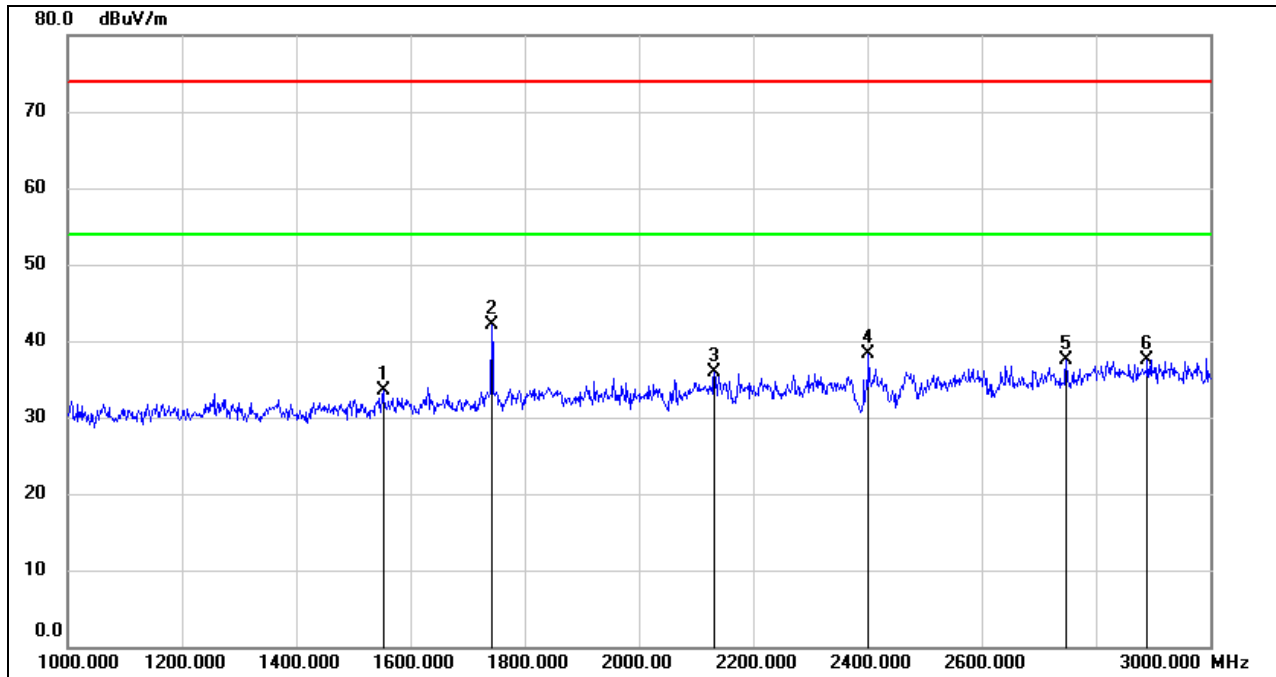

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1552.000	45.38	-11.79	33.59	74.00	-40.41	peak
2	1742.000	52.66	-10.49	42.17	74.00	-31.83	peak
3	2132.000	44.94	-9.00	35.94	74.00	-38.06	peak
4	2402.000	46.23	-7.85	38.38	/	/	fundamental
5	2748.000	44.10	-6.61	37.49	74.00	-36.51	peak
6	2890.000	43.13	-5.58	37.55	74.00	-36.45	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

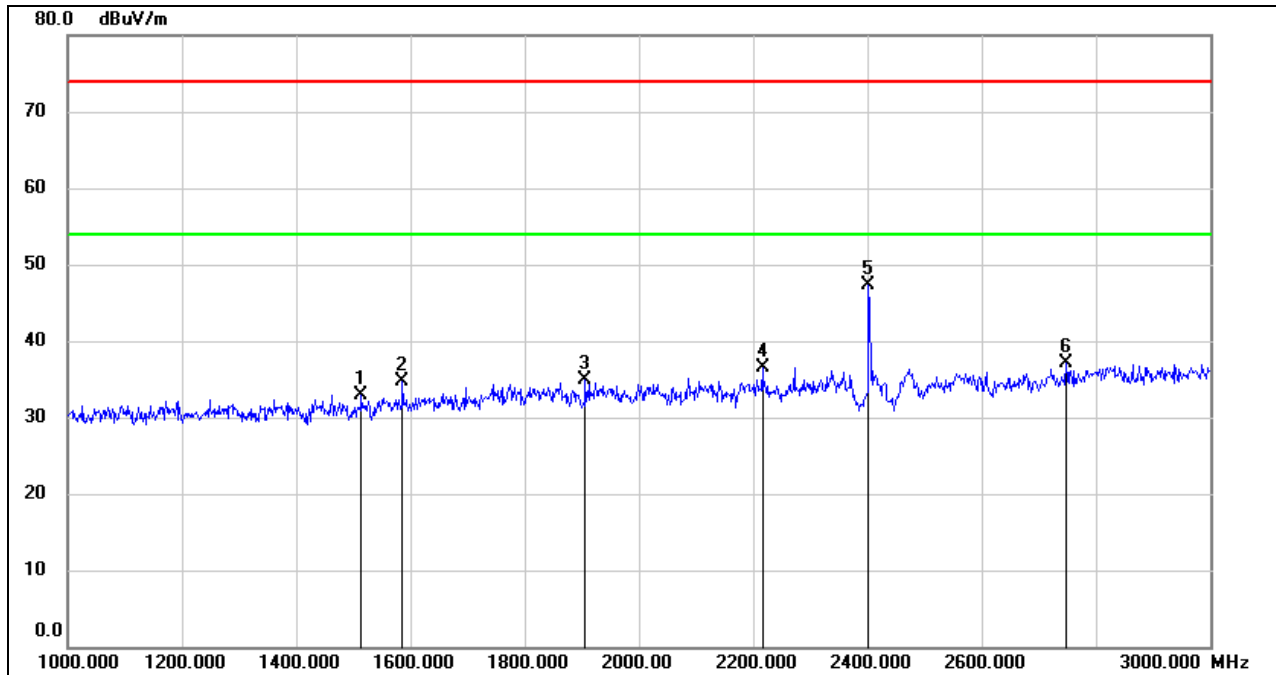HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


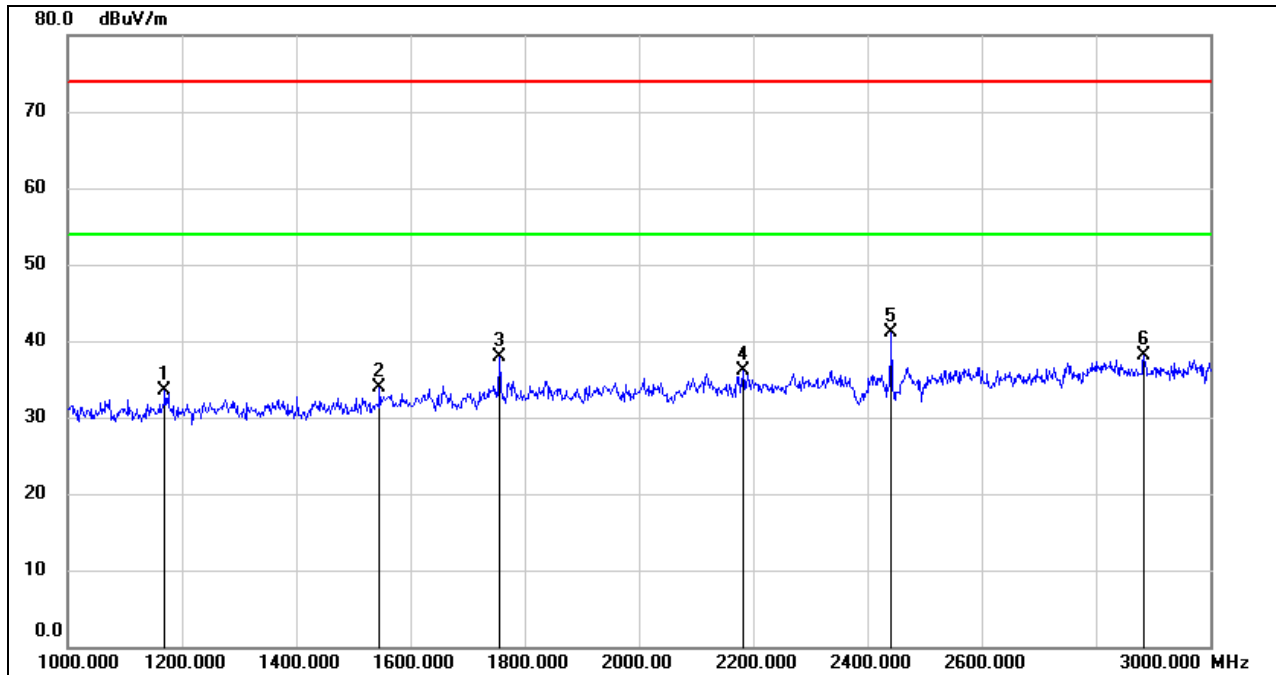
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1514.000	44.97	-12.10	32.87	74.00	-41.13	peak
2	1586.000	46.16	-11.51	34.65	74.00	-39.35	peak
3	1906.000	44.90	-9.94	34.96	74.00	-39.04	peak
4	2216.000	45.15	-8.59	36.56	74.00	-37.44	peak
5	2402.000	55.20	-7.85	47.35	/	/	fundamental
6	2748.000	43.70	-6.61	37.09	74.00	-36.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

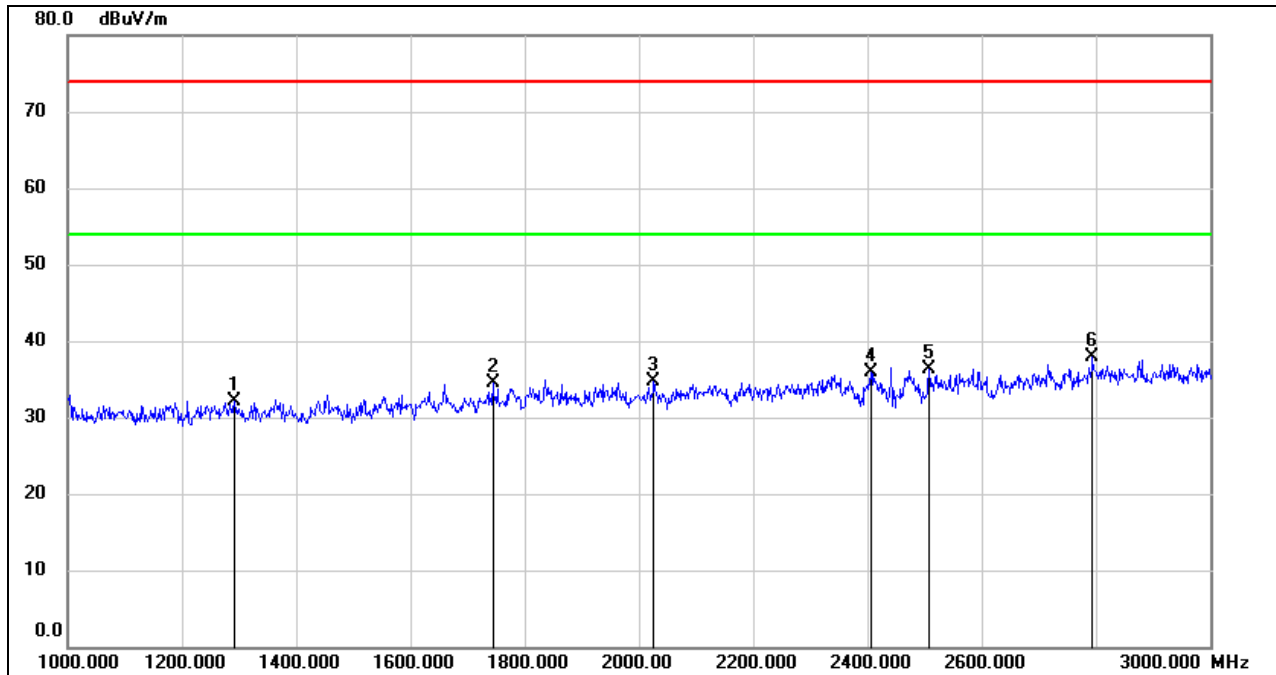HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1292.000	44.45	-12.36	32.09	74.00	-41.91	peak
2	1744.000	44.97	-10.46	34.51	74.00	-39.49	peak
3	2026.000	44.33	-9.65	34.68	74.00	-39.32	peak
4	2406.000	43.70	-7.81	35.89	74.00	-38.11	peak
5	2508.000	43.56	-7.21	36.35	74.00	-37.65	peak
6	2794.000	43.99	-6.12	37.87	74.00	-36.13	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1170.000	46.36	-12.92	33.44	74.00	-40.56	peak
2	1546.000	45.74	-11.84	33.90	74.00	-40.10	peak
3	1756.000	48.22	-10.36	37.86	74.00	-36.14	peak
4	2182.000	44.81	-8.75	36.06	74.00	-37.94	peak
5	2441.000	48.70	-7.57	41.13	/	/	fundamental
6	2884.000	43.68	-5.61	38.07	74.00	-35.93	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

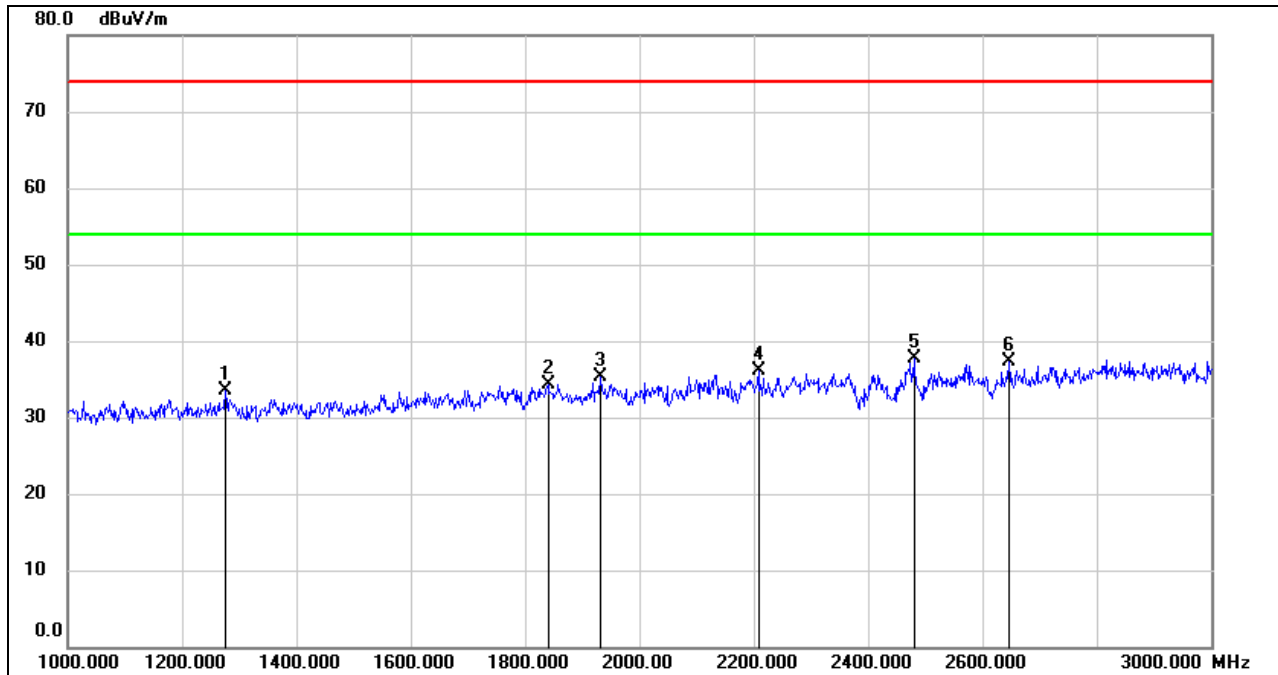

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1276.000	46.01	-12.42	33.59	74.00	-40.41	peak
2	1840.000	44.22	-9.93	34.29	74.00	-39.71	peak
3	1932.000	45.24	-9.91	35.33	74.00	-38.67	peak
4	2208.000	44.69	-8.63	36.06	74.00	-37.94	peak
5	2480.000	44.95	-7.31	37.64	/	/	fundamental
6	2646.000	44.73	-7.44	37.29	74.00	-36.71	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

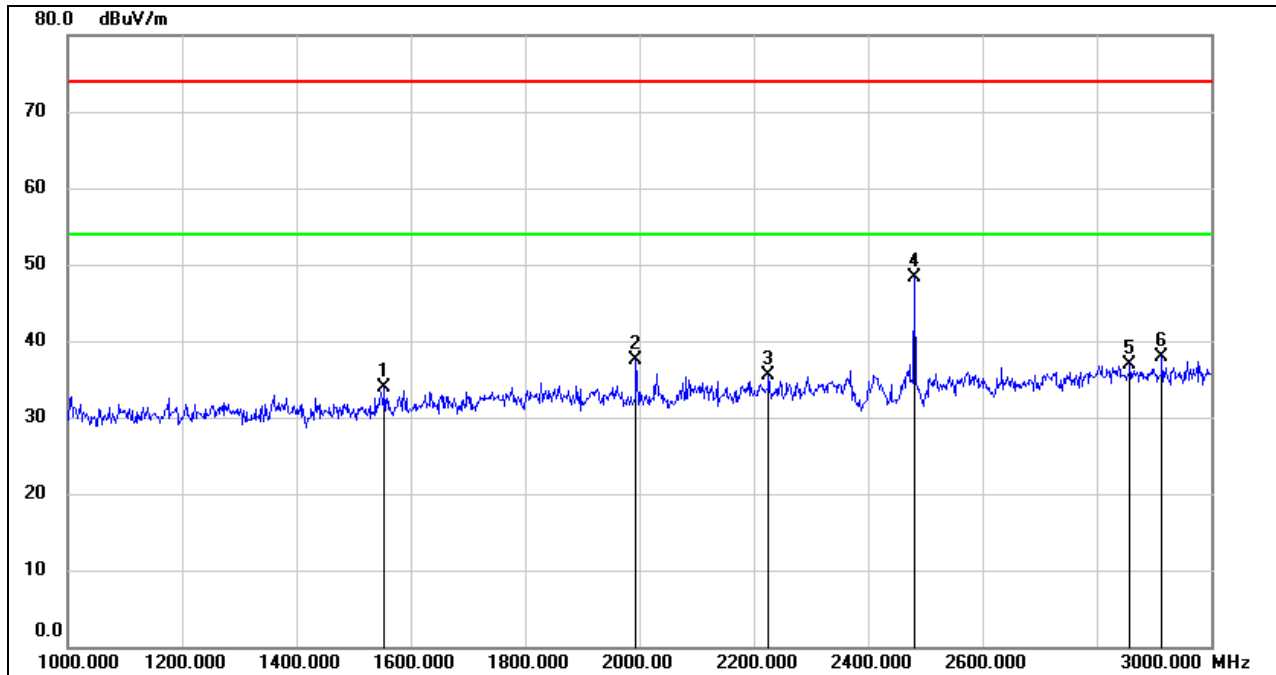HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


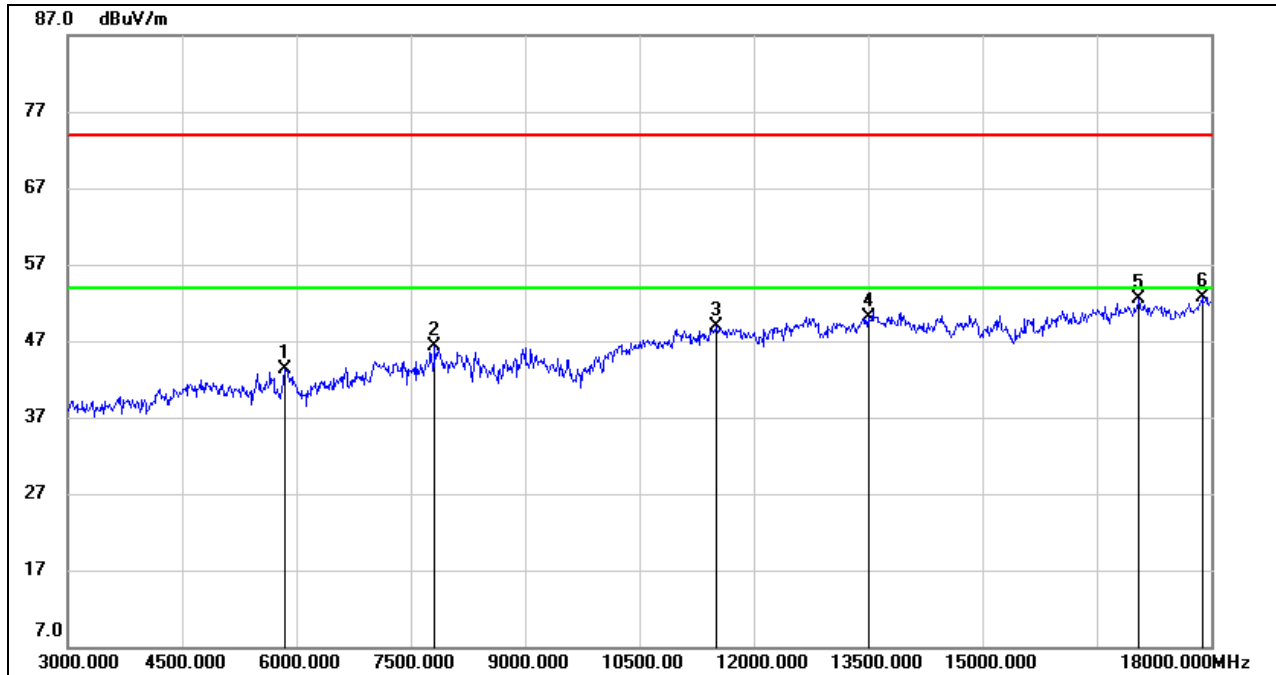
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1554.000	45.70	-11.77	33.93	74.00	-40.07	peak
2	1994.000	47.25	-9.83	37.42	74.00	-36.58	peak
3	2226.000	43.96	-8.54	35.42	74.00	-38.58	peak
4	2480.000	55.57	-7.31	48.26	/	/	fundamental
5	2858.000	42.57	-5.75	36.82	74.00	-37.18	peak
6	2914.000	43.41	-5.50	37.91	74.00	-36.09	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)


8.3.1. GFSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.25	4.02	43.27	74.00	-30.73	peak
2	7815.000	38.49	7.83	46.32	74.00	-27.68	peak
3	11505.000	35.53	13.42	48.95	74.00	-25.05	peak
4	13500.000	34.37	15.77	50.14	74.00	-23.86	peak
5	17055.000	32.02	20.53	52.55	74.00	-21.45	peak
6	17880.000	29.44	23.34	52.78	74.00	-21.22	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

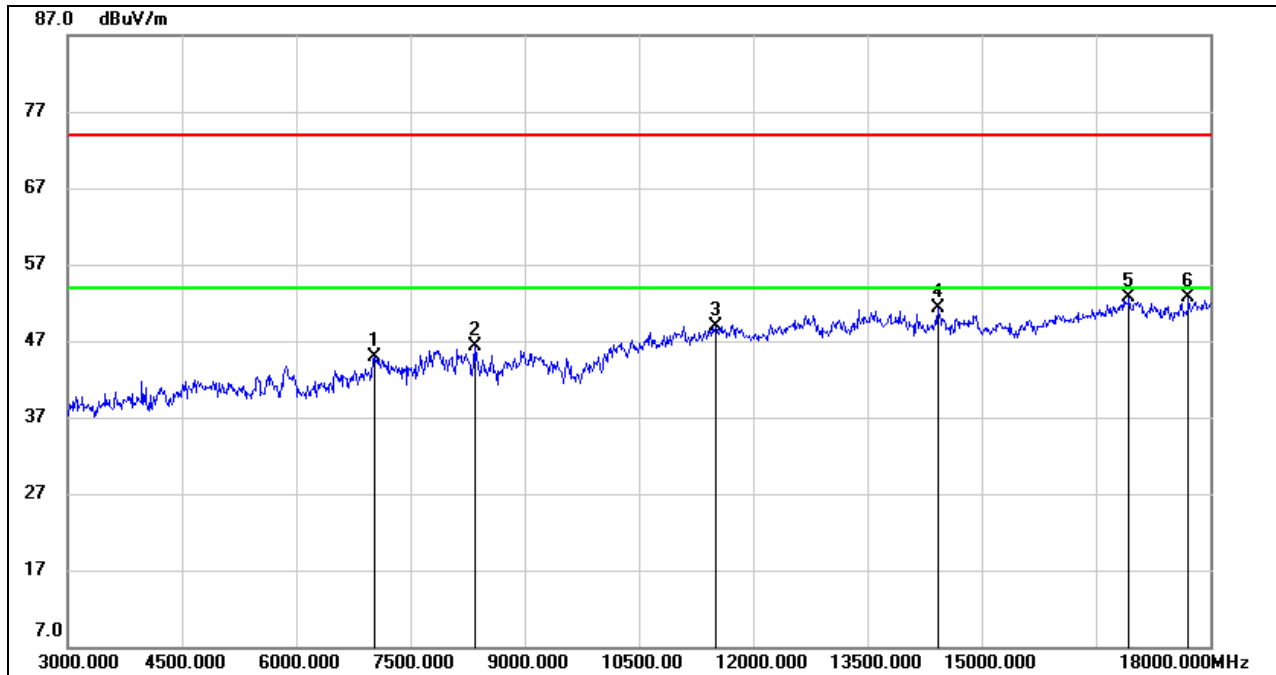HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


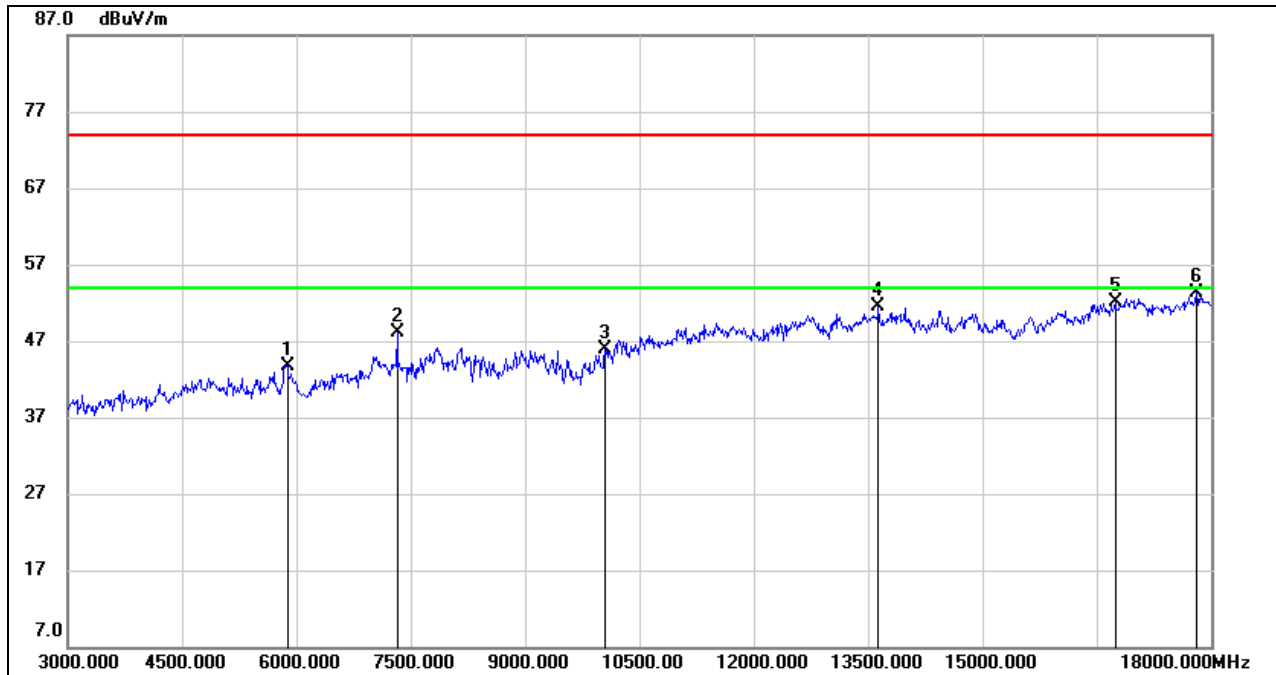
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	39.13	5.81	44.94	74.00	-29.06	peak
2	8340.000	38.81	7.49	46.30	74.00	-27.70	peak
3	11505.000	35.44	13.42	48.86	74.00	-25.14	peak
4	14430.000	34.94	16.35	51.29	74.00	-22.71	peak
5	16935.000	32.67	20.12	52.79	74.00	-21.21	peak
6	17715.000	30.08	22.56	52.64	74.00	-21.36	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

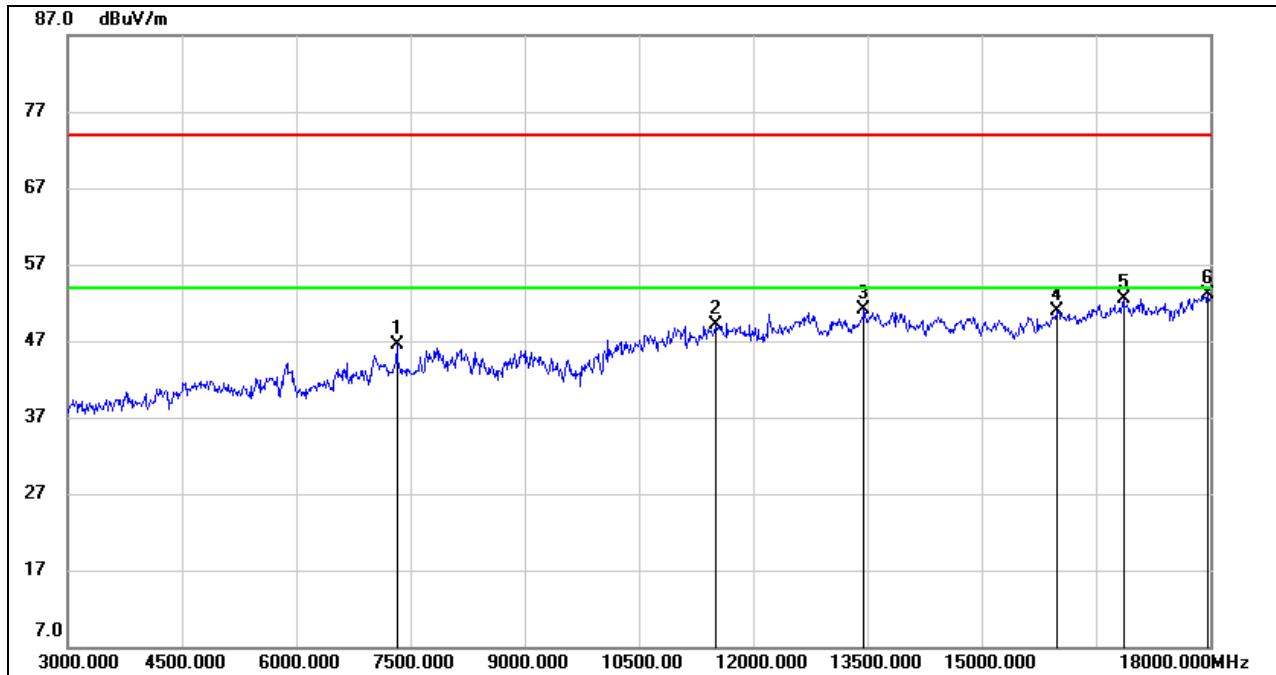HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


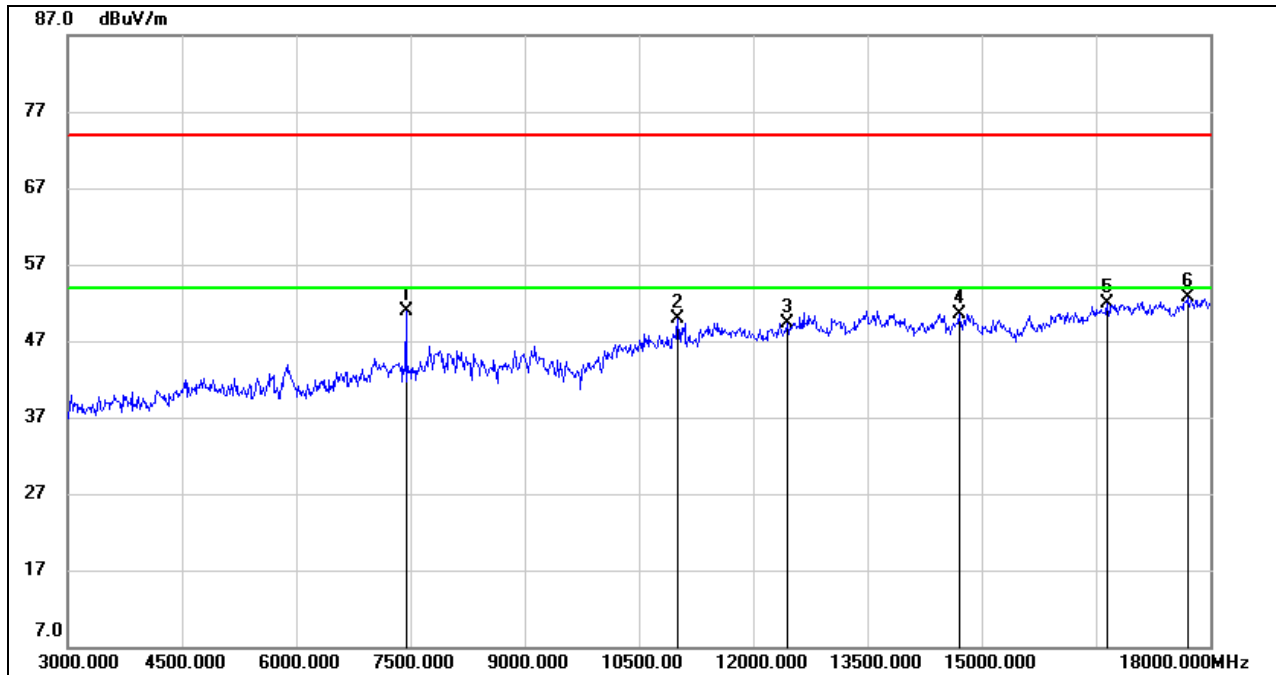
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7320.000	40.27	6.14	46.41	74.00	-27.59	peak
2	11505.000	35.75	13.42	49.17	74.00	-24.83	peak
3	13455.000	35.10	15.93	51.03	74.00	-22.97	peak
4	15990.000	33.29	17.68	50.97	74.00	-23.03	peak
5	16860.000	32.59	19.95	52.54	74.00	-21.46	peak
6	17970.000	29.63	23.42	53.05	74.00	-20.95	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


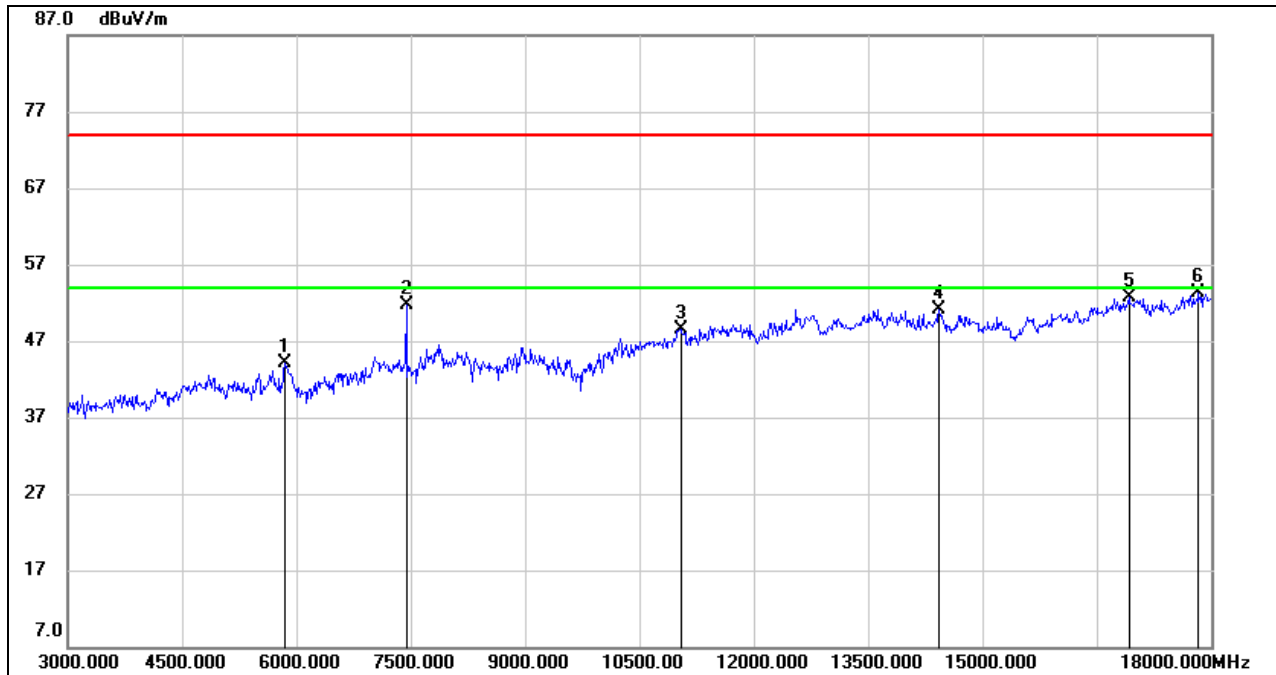
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	39.19	4.59	43.78	74.00	-30.22	peak
2	7320.000	41.87	6.14	48.01	74.00	-25.99	peak
3	10050.000	35.52	10.33	45.85	74.00	-28.15	peak
4	13635.000	35.56	15.97	51.53	74.00	-22.47	peak
5	16740.000	32.22	19.94	52.16	74.00	-21.84	peak
6	17805.000	29.96	23.31	53.27	74.00	-20.73	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7440.000	44.50	6.32	50.82	74.00	-23.18	peak
2	11010.000	37.21	12.63	49.84	74.00	-24.16	peak
3	12450.000	35.11	14.28	49.39	74.00	-24.61	peak
4	14700.000	34.55	16.05	50.60	74.00	-23.40	peak
5	16650.000	32.19	19.70	51.89	74.00	-22.11	peak
6	17700.000	30.22	22.43	52.65	74.00	-21.35	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	40.14	4.02	44.16	74.00	-29.84	peak
2	7440.000	45.40	6.32	51.72	74.00	-22.28	peak
3	11040.000	35.89	12.61	48.50	74.00	-25.50	peak
4	14430.000	34.74	16.35	51.09	74.00	-22.91	peak
5	16920.000	32.59	20.06	52.65	74.00	-21.35	peak
6	17835.000	29.99	23.31	53.30	74.00	-20.70	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.2. 8DPSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

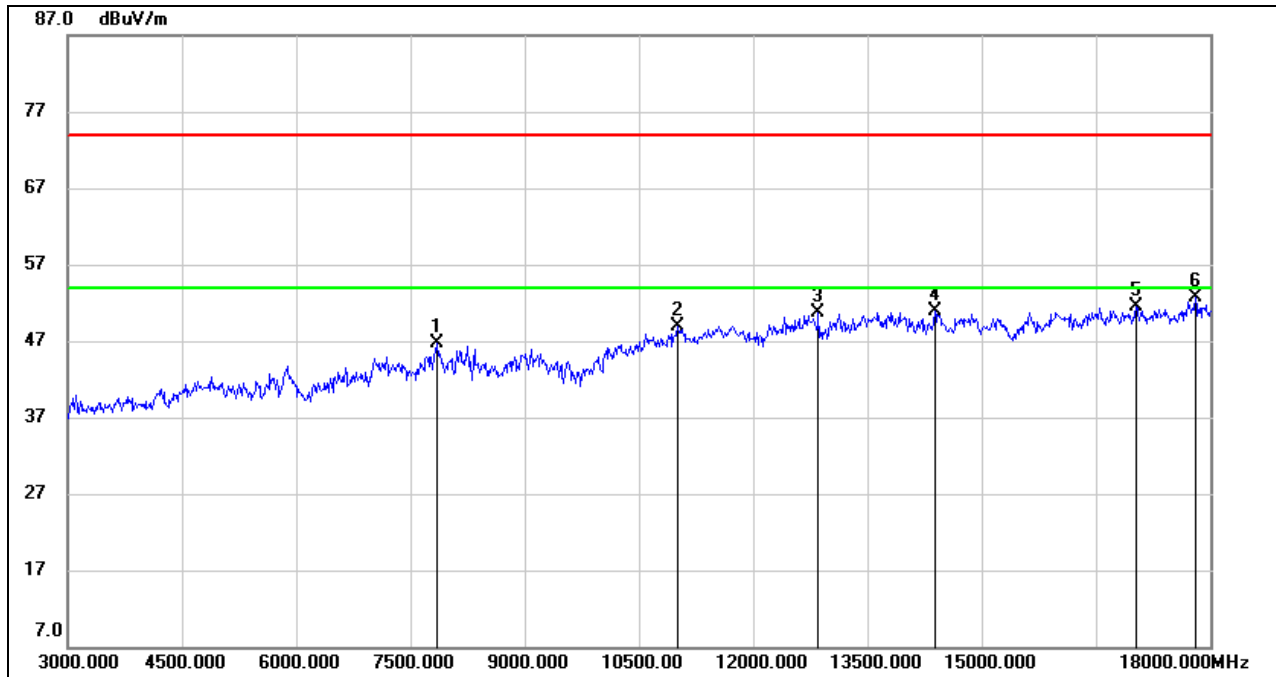

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7845.000	39.08	7.62	46.70	74.00	-27.30	peak
2	11010.000	36.25	12.63	48.88	74.00	-25.12	peak
3	12855.000	35.46	15.23	50.69	74.00	-23.31	peak
4	14385.000	34.54	16.33	50.87	74.00	-23.13	peak
5	17025.000	31.13	20.46	51.59	74.00	-22.41	peak
6	17805.000	29.39	23.31	52.70	74.00	-21.30	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

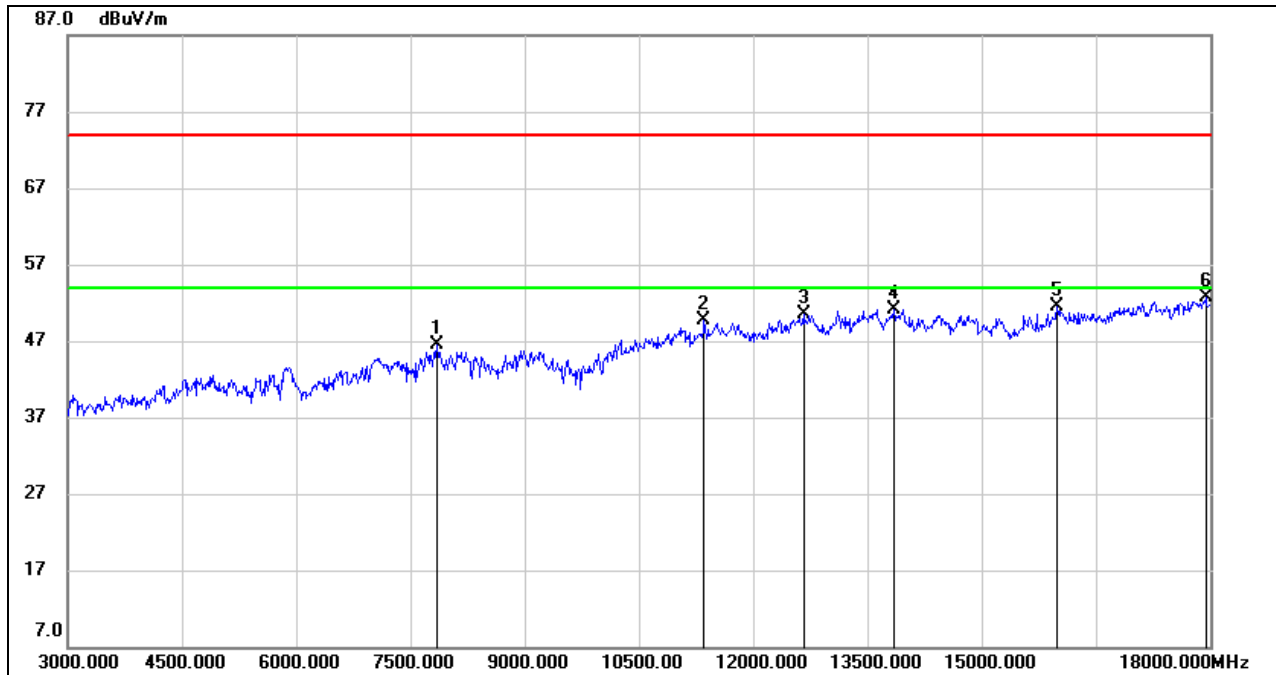**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7845.000	38.91	7.62	46.53	74.00	-27.47	peak
2	11355.000	37.15	12.48	49.63	74.00	-24.37	peak
3	12660.000	36.41	14.18	50.59	74.00	-23.41	peak
4	13845.000	34.49	16.70	51.19	74.00	-22.81	peak
5	15990.000	33.80	17.68	51.48	74.00	-22.52	peak
6	17940.000	29.26	23.39	52.65	74.00	-21.35	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

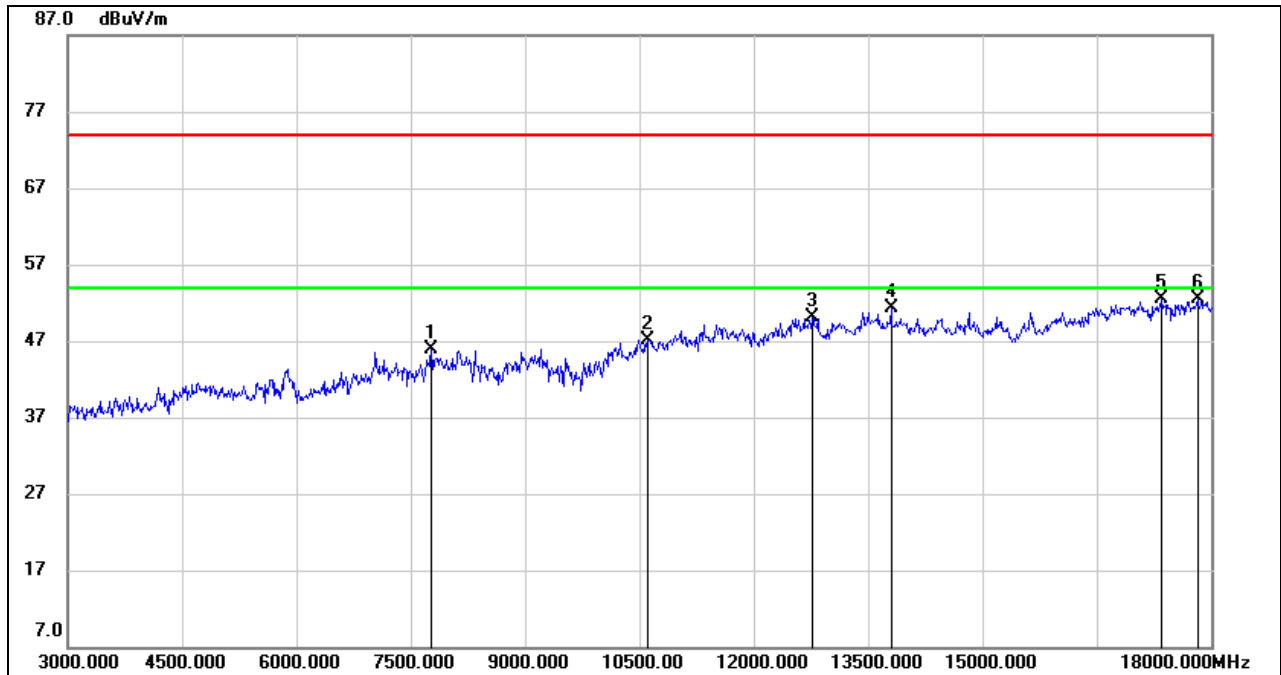HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.34	7.50	45.84	74.00	-28.16	peak
2	10605.000	35.24	11.93	47.17	74.00	-26.83	peak
3	12765.000	34.97	15.18	50.15	74.00	-23.85	peak
4	13800.000	34.13	17.10	51.23	74.00	-22.77	peak
5	17355.000	30.88	21.56	52.44	74.00	-21.56	peak
6	17820.000	29.16	23.30	52.46	74.00	-21.54	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

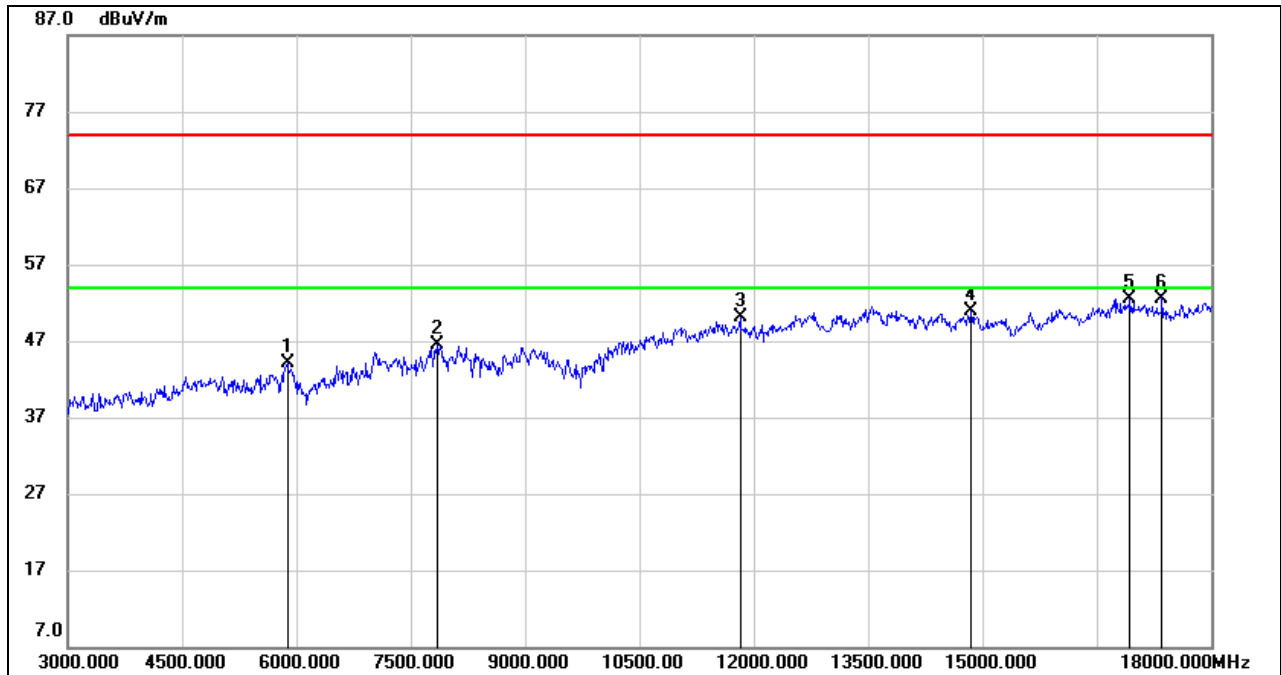HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	39.60	4.59	44.19	74.00	-29.81	peak
2	7845.000	38.91	7.62	46.53	74.00	-27.47	peak
3	11820.000	36.90	13.19	50.09	74.00	-23.91	peak
4	14850.000	35.02	15.97	50.99	74.00	-23.01	peak
5	16935.000	32.35	20.12	52.47	74.00	-21.53	peak
6	17355.000	31.04	21.56	52.60	74.00	-21.40	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

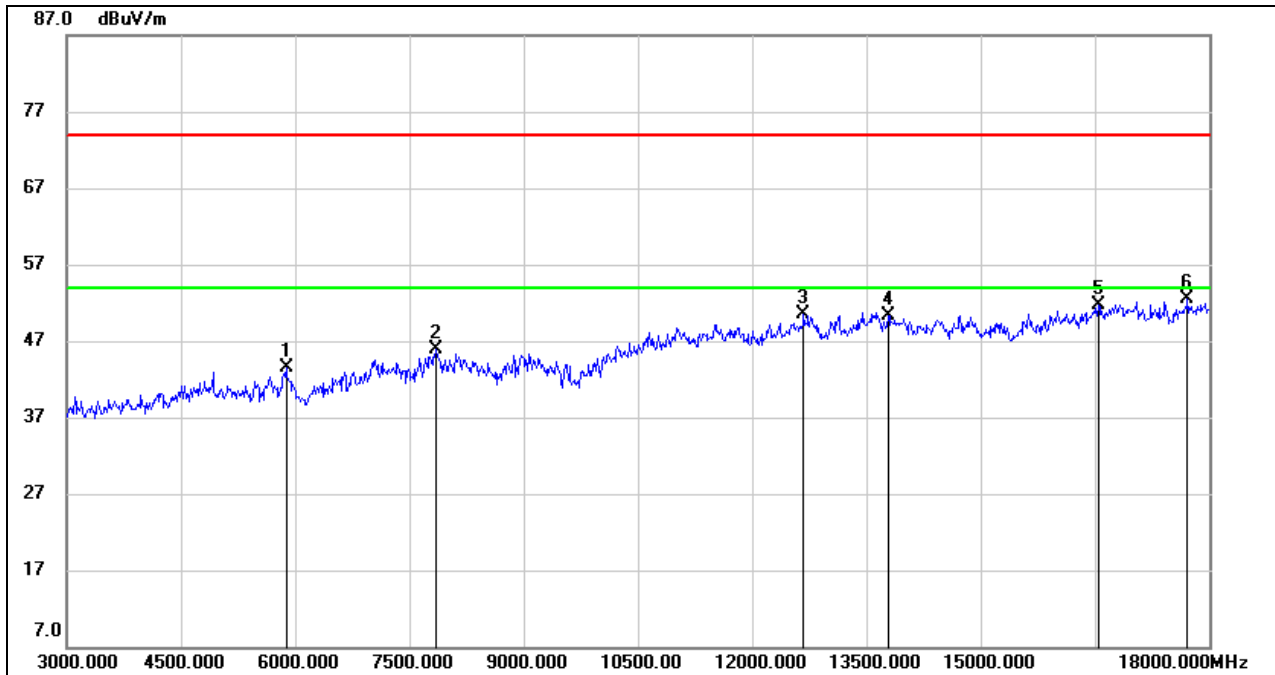

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.87	4.59	43.46	74.00	-30.54	peak
2	7845.000	38.20	7.62	45.82	74.00	-28.18	peak
3	12675.000	36.33	14.21	50.54	74.00	-23.46	peak
4	13785.000	33.41	16.91	50.32	74.00	-23.68	peak
5	16545.000	32.42	19.31	51.73	74.00	-22.27	peak
6	17715.000	29.85	22.56	52.41	74.00	-21.59	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

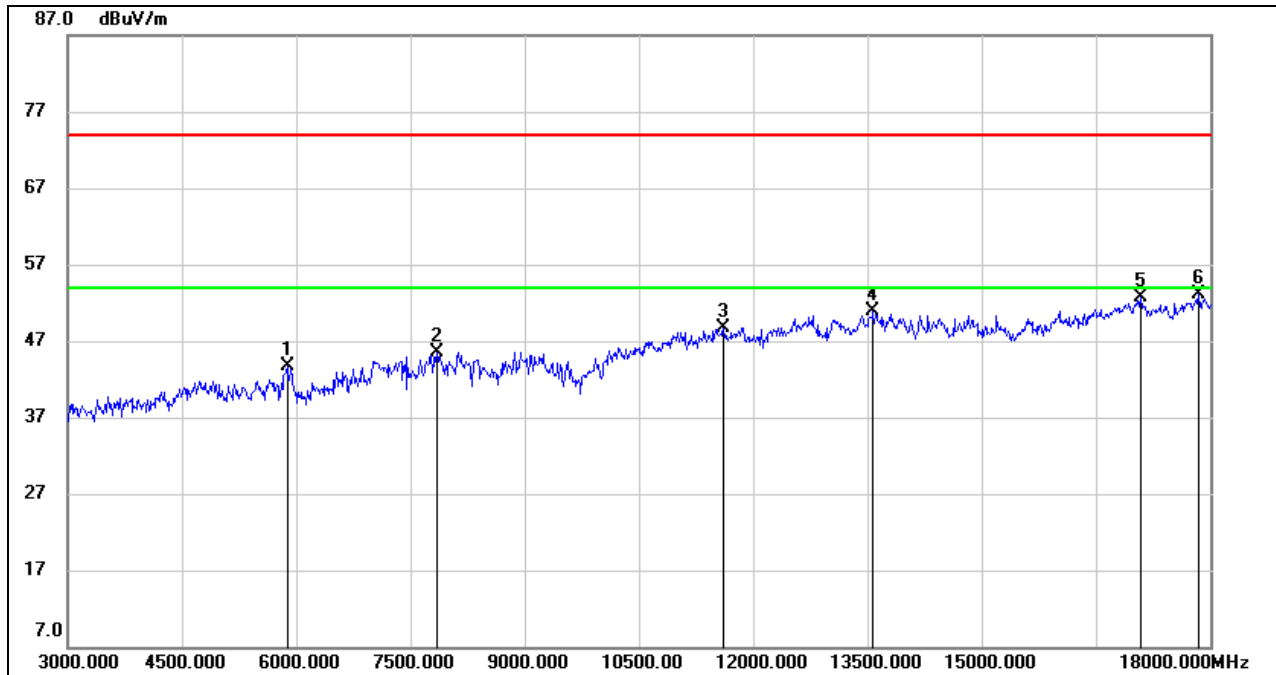HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


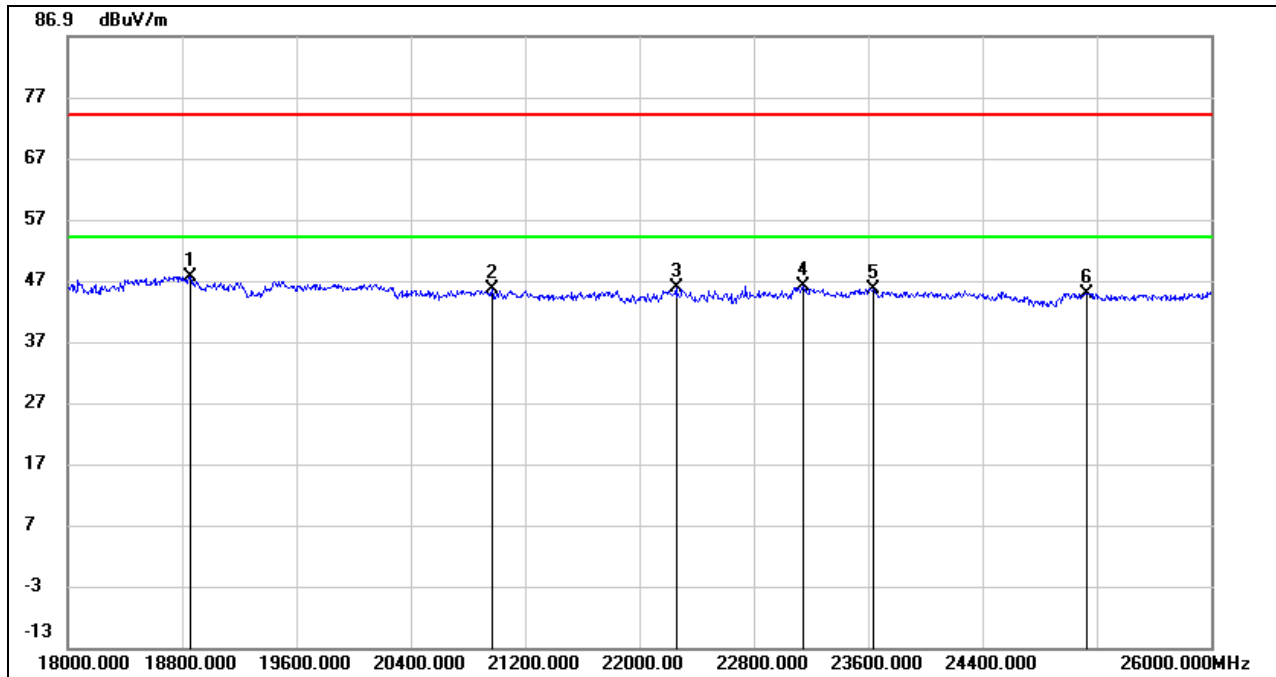
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	39.02	4.59	43.61	74.00	-30.39	peak
2	7845.000	37.96	7.62	45.58	74.00	-28.42	peak
3	11610.000	35.53	13.15	48.68	74.00	-25.32	peak
4	13575.000	34.86	15.97	50.83	74.00	-23.17	peak
5	17085.000	32.15	20.60	52.75	74.00	-21.25	peak
6	17850.000	29.77	23.32	53.09	74.00	-20.91	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.4.1. GFSK MODE

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18856.000	52.49	-4.87	47.62	74.00	-26.38	peak
2	20968.000	50.83	-5.26	45.57	74.00	-28.43	peak
3	22256.000	51.95	-6.06	45.89	74.00	-28.11	peak
4	23144.000	51.37	-5.40	45.97	74.00	-28.03	peak
5	23640.000	50.27	-4.69	45.58	74.00	-28.42	peak
6	25128.000	46.04	-1.14	44.90	74.00	-29.10	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

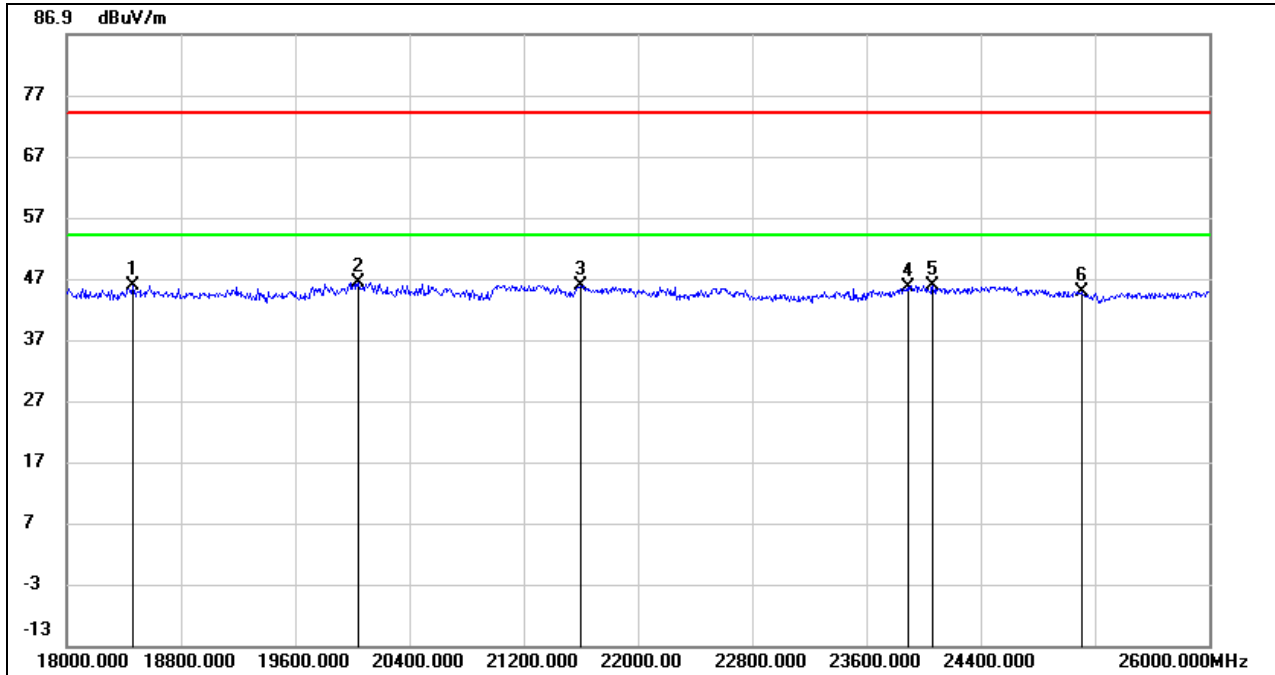

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18464.000	50.20	-4.39	45.81	74.00	-28.19	peak
2	20040.000	50.77	-4.46	46.31	74.00	-27.69	peak
3	21600.000	51.65	-5.76	45.89	74.00	-28.11	peak
4	23888.000	49.80	-4.29	45.51	74.00	-28.49	peak
5	24064.000	49.66	-3.90	45.76	74.00	-28.24	peak
6	25104.000	46.02	-1.12	44.90	74.00	-29.10	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All the modes have been tested, only the worst data was recorded in the report.

8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)


8.5.1. GFSK MODE

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

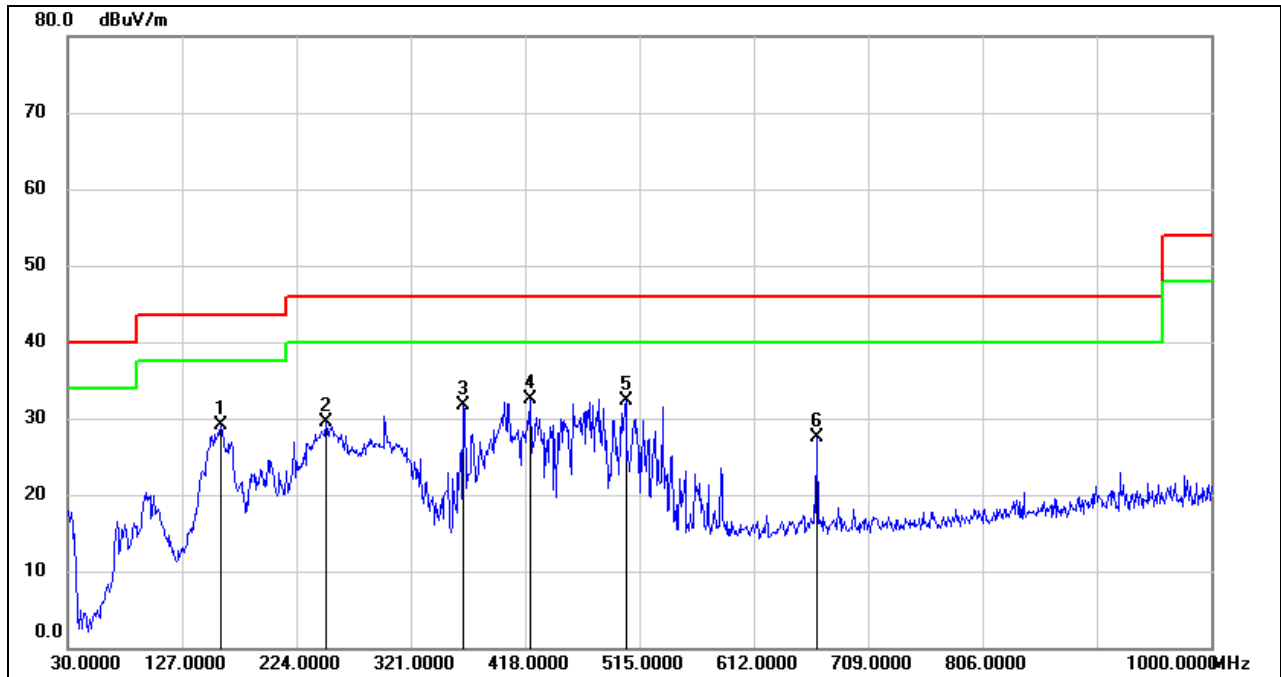

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	47.21	-18.01	29.20	43.50	-14.30	QP
2	249.2200	48.78	-19.23	29.55	46.00	-16.45	QP
3	365.6200	45.88	-14.17	31.71	46.00	-14.29	QP
4	421.8800	45.57	-13.00	32.57	46.00	-13.43	QP
5	503.3600	43.71	-11.44	32.27	46.00	-13.73	QP
6	665.3500	36.67	-9.18	27.49	46.00	-18.51	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

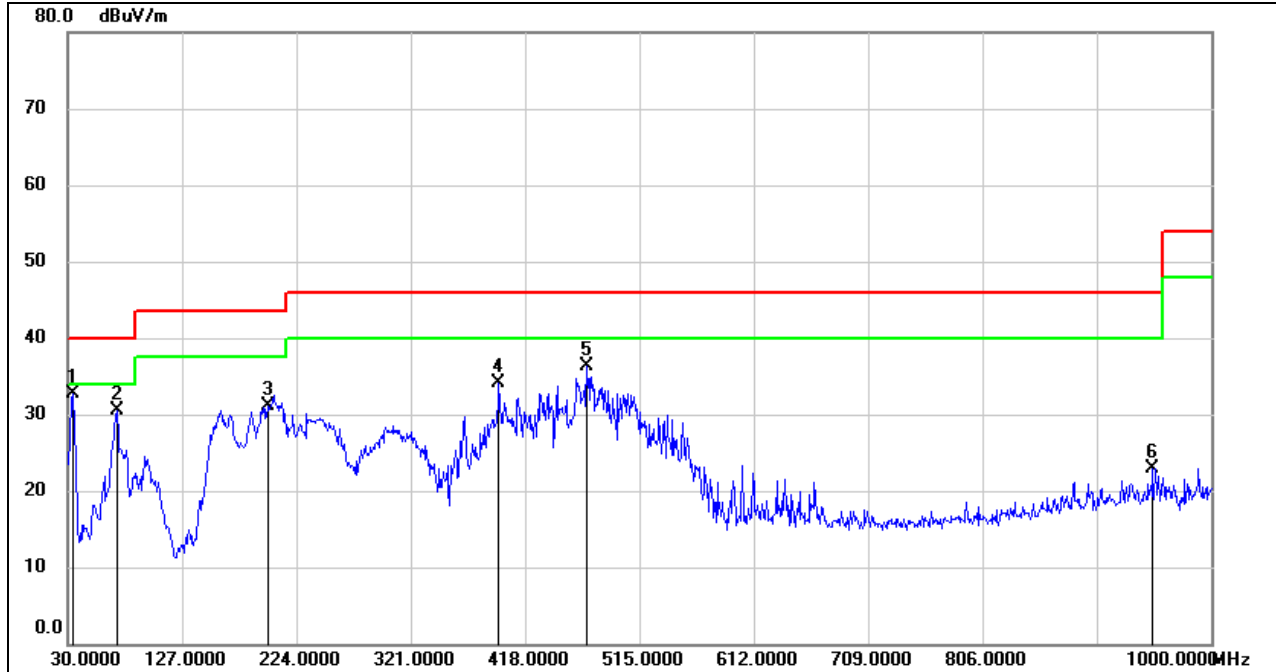**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	52.15	-19.49	32.66	40.00	-7.34	QP
2	71.7100	51.24	-20.78	30.46	40.00	-9.54	QP
3	199.7500	47.64	-16.57	31.07	43.50	-12.43	QP
4	395.6900	47.70	-13.56	34.14	46.00	-11.86	QP
5	470.3800	48.29	-12.03	36.26	46.00	-9.74	QP
6	950.5300	27.99	-5.06	22.93	46.00	-23.07	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes have been tested, only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS BELOW 30 MHz

8.6.1. GFSK MODE

(HIGH CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

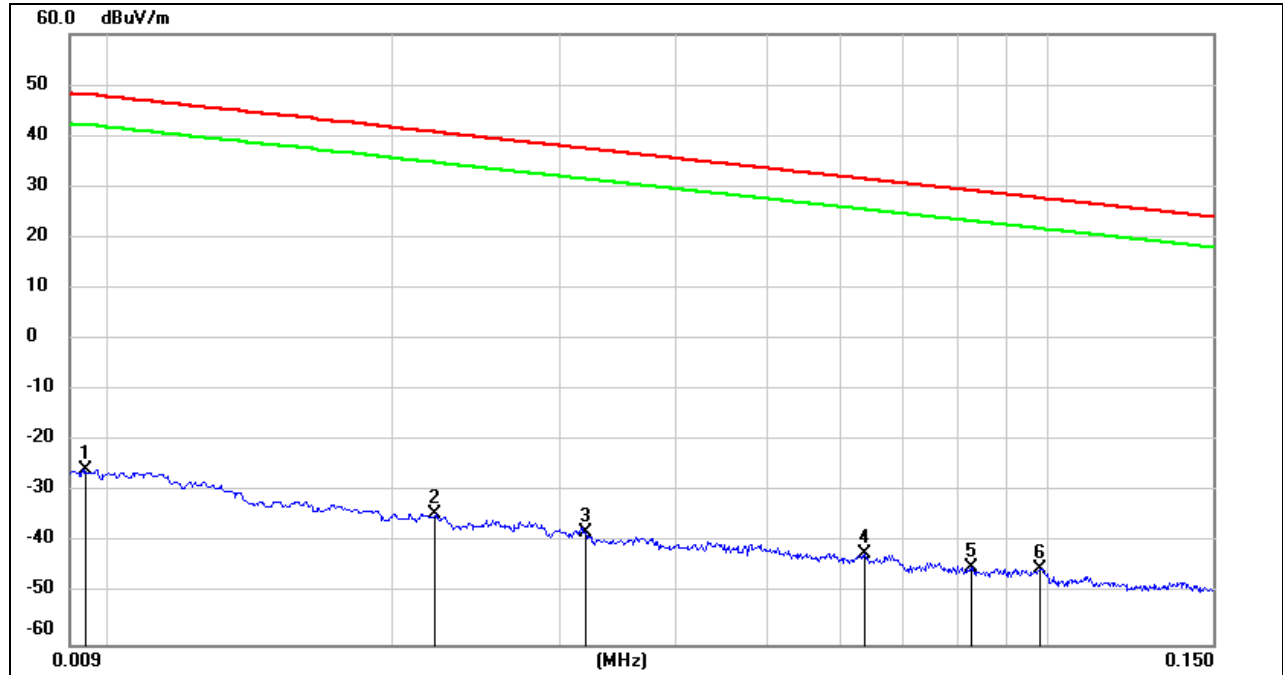


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	75.66	-101.35	-25.69	48.05	-77.19	-3.45	-73.74	peak
2	0.0221	67.13	-101.35	-34.22	40.71	-85.72	-10.79	-74.93	peak
3	0.0320	63.34	-101.40	-38.06	37.50	-89.56	-14.00	-75.56	peak
4	0.0636	59.31	-101.54	-42.23	31.53	-93.73	-19.97	-73.76	peak
5	0.0826	56.82	-101.65	-44.83	29.26	-96.33	-22.24	-74.09	peak
6	0.0981	56.77	-101.78	-45.01	27.77	-96.51	-23.73	-72.78	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150kHz ~ 490kHz

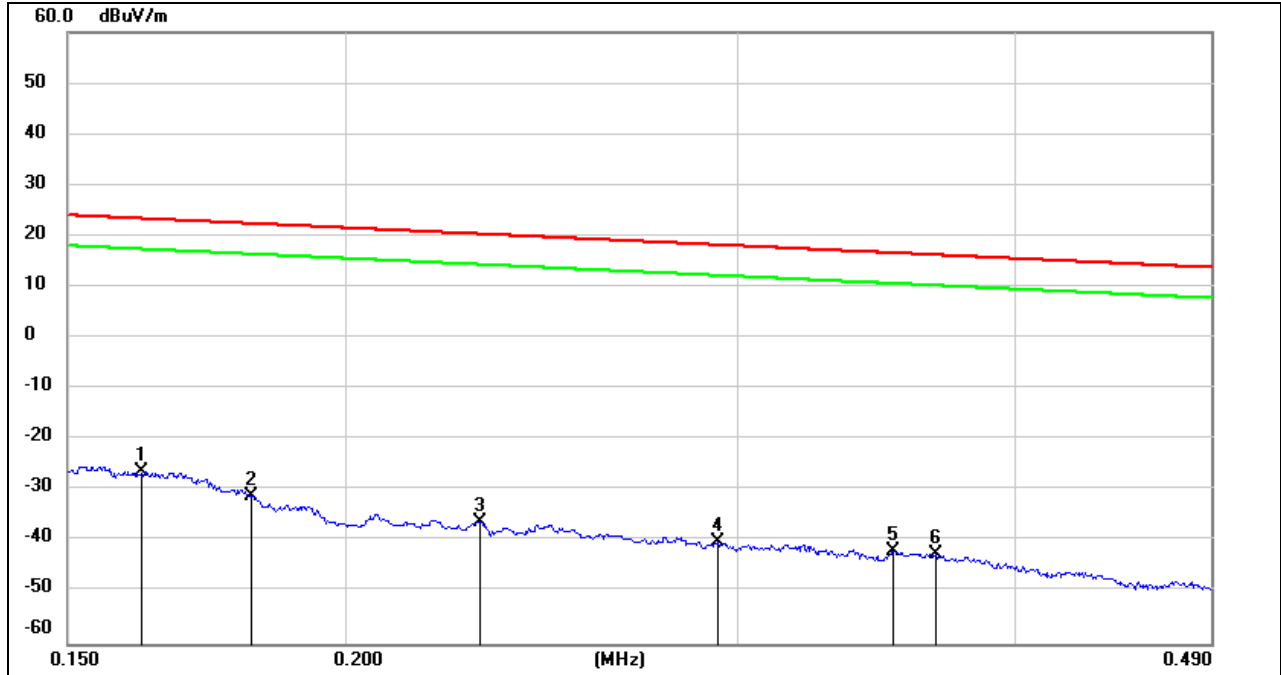


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1621	75.42	-101.65	-26.23	23.41	-77.73	-28.09	-49.64	peak
2	0.1816	70.54	-101.68	-31.14	22.42	-82.64	-29.08	-53.56	peak
3	0.2298	65.55	-101.77	-36.22	20.37	-87.72	-31.13	-56.59	peak
4	0.2942	61.82	-101.85	-40.03	18.23	-91.53	-33.27	-58.26	peak
5	0.3526	60.01	-101.91	-41.90	16.66	-93.40	-34.84	-58.56	peak
6	0.3684	59.48	-101.93	-42.45	16.27	-93.95	-35.23	-58.72	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490kHz ~ 30MHz

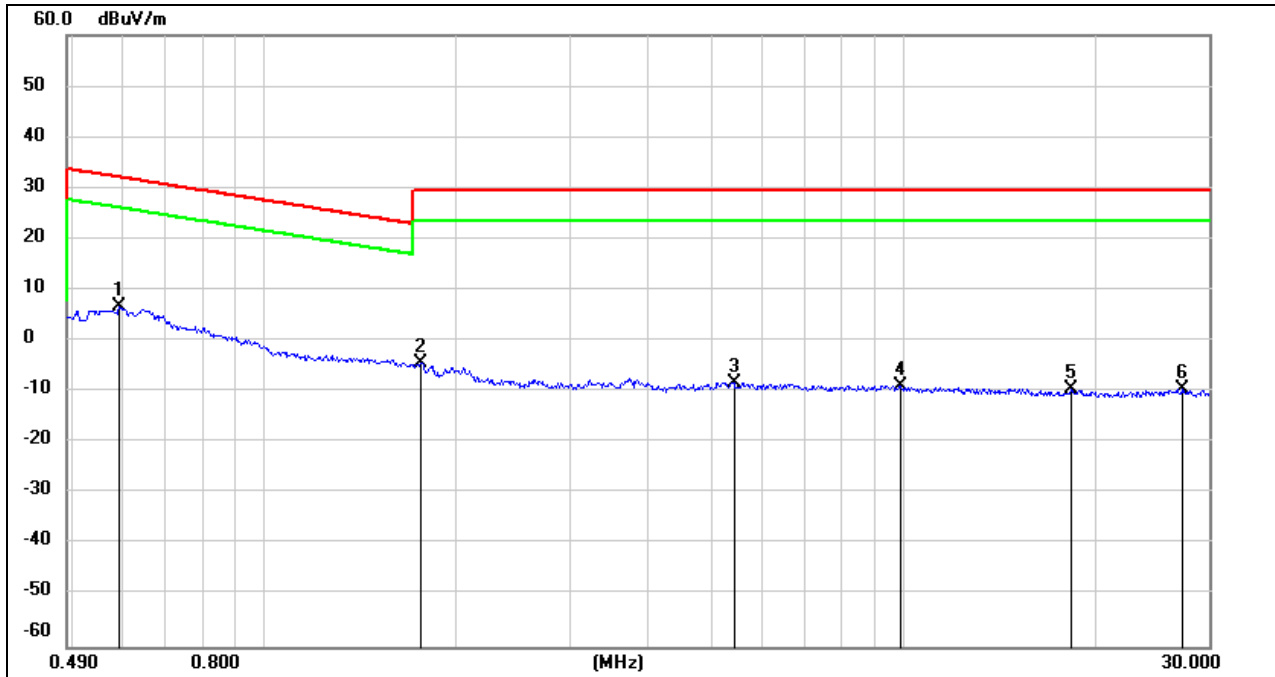

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5917	68.74	-62.08	6.66	32.16	-44.84	-19.34	-25.50	peak
2	1.7580	57.58	-61.93	-4.35	29.54	-55.85	-21.96	-33.89	peak
3	5.4180	53.16	-61.43	-8.27	29.54	-59.77	-21.96	-37.81	peak
4	9.9037	51.94	-60.81	-8.87	29.54	-60.37	-21.96	-38.41	peak
5	18.2545	51.43	-60.90	-9.47	29.54	-60.97	-21.96	-39.01	peak
6	27.1966	50.81	-60.24	-9.43	29.54	-60.93	-21.96	-38.97	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes have been tested, only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

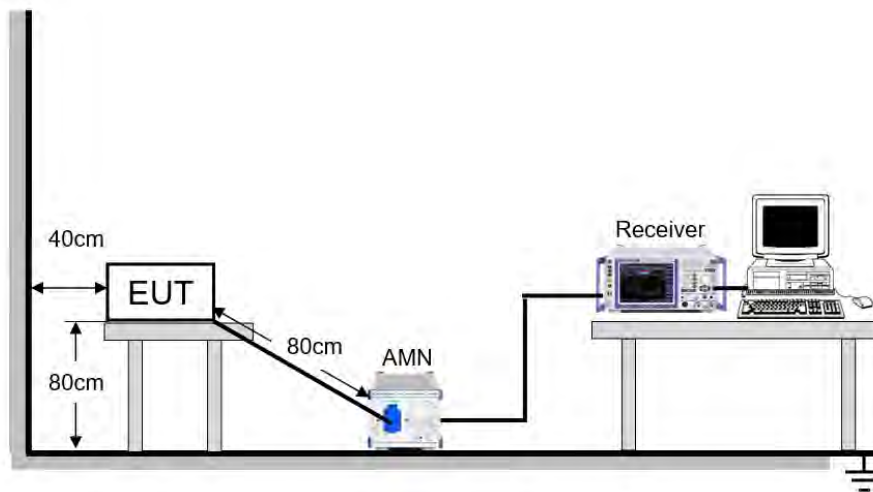

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT


Temperature	24.1 °C	Relative Humidity	51 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V



TEST RESULTS


9.1.1. GFSK MODE

LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)

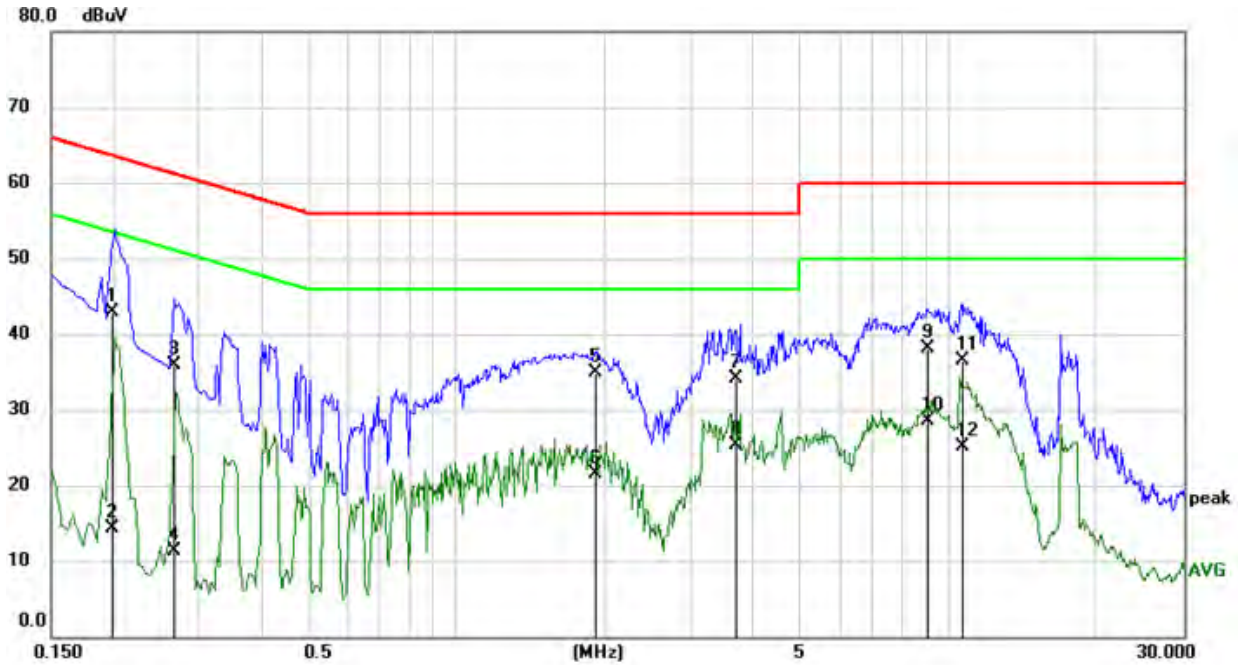

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1996	33.32	9.60	42.92	63.63	-20.71	QP
2	0.1996	4.68	9.60	14.28	53.63	-39.35	AVG
3	0.2686	26.23	9.60	35.83	61.16	-25.33	QP
4	0.2686	1.75	9.60	11.35	51.16	-39.81	AVG
5	1.9152	25.34	9.62	34.96	56.00	-21.04	QP
6	1.9152	11.91	9.62	21.53	46.00	-24.47	AVG
7	3.7168	24.40	9.65	34.05	56.00	-21.95	QP
8	3.7168	15.60	9.65	25.25	46.00	-20.75	AVG
9	9.1162	28.46	9.73	38.19	60.00	-21.81	QP
10	9.1162	18.80	9.73	28.53	50.00	-21.47	AVG
11	10.7221	26.76	9.75	36.51	60.00	-23.49	QP
12	10.7221	15.26	9.75	25.01	50.00	-24.99	AVG

- Note: 1. Result = Reading +Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).
 4. Step size: 80Hz (0.009 MHz-0.15 MHz), 4 kHz (0.15 MHz-30 MHz), Scan time: auto.

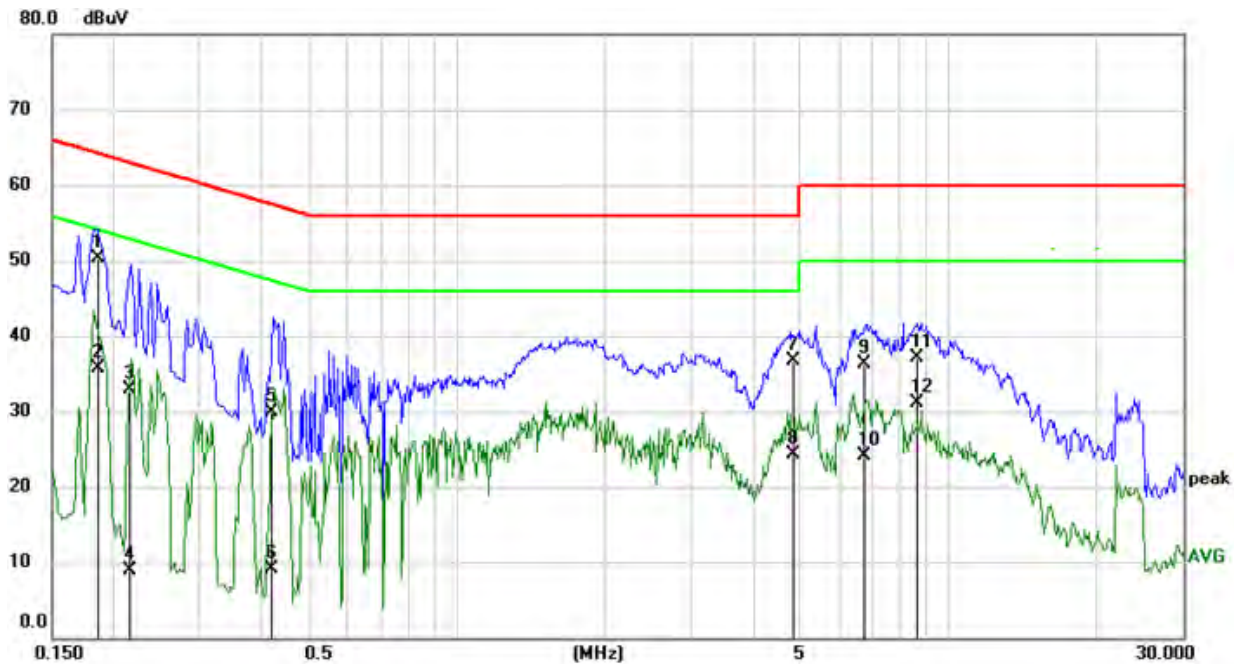**LINE N RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1862	40.68	9.60	50.28	64.20	-13.92	QP
2	0.1862	26.19	9.60	35.79	54.20	-18.41	AVG
3	0.2143	23.38	9.60	32.98	63.04	-30.06	QP
4	0.2143	-0.77	9.60	8.83	53.04	-44.21	AVG
5	0.4185	20.37	9.60	29.97	57.48	-27.51	QP
6	0.4185	-0.44	9.60	9.16	47.48	-38.32	AVG
7	4.8471	27.03	9.67	36.70	56.00	-19.30	QP
8	4.8471	14.57	9.67	24.24	46.00	-21.76	AVG
9	6.7416	26.55	9.71	36.26	60.00	-23.74	QP
10	6.7416	14.43	9.71	24.14	50.00	-25.86	AVG
11	8.7005	27.43	9.74	37.17	60.00	-22.83	QP
12	8.7005	21.43	9.74	31.17	50.00	-18.83	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).

4. Step size: 80Hz (0.009 MHz-0.15 MHz), 4 kHz (0.15 MHz-30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies




Appendix A: 20dB Bandwidth

Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant2	2402	0.945	2401.529	2402.474	---	PASS
		2441	0.945	2440.529	2441.474	---	PASS
		2480	0.942	2479.529	2480.471	---	PASS
3DH5	Ant2	2402	1.491	2401.265	2402.756	---	PASS
		2441	1.515	2440.241	2441.756	---	PASS
		2480	1.485	2479.268	2480.753	---	PASS




Test Graphs

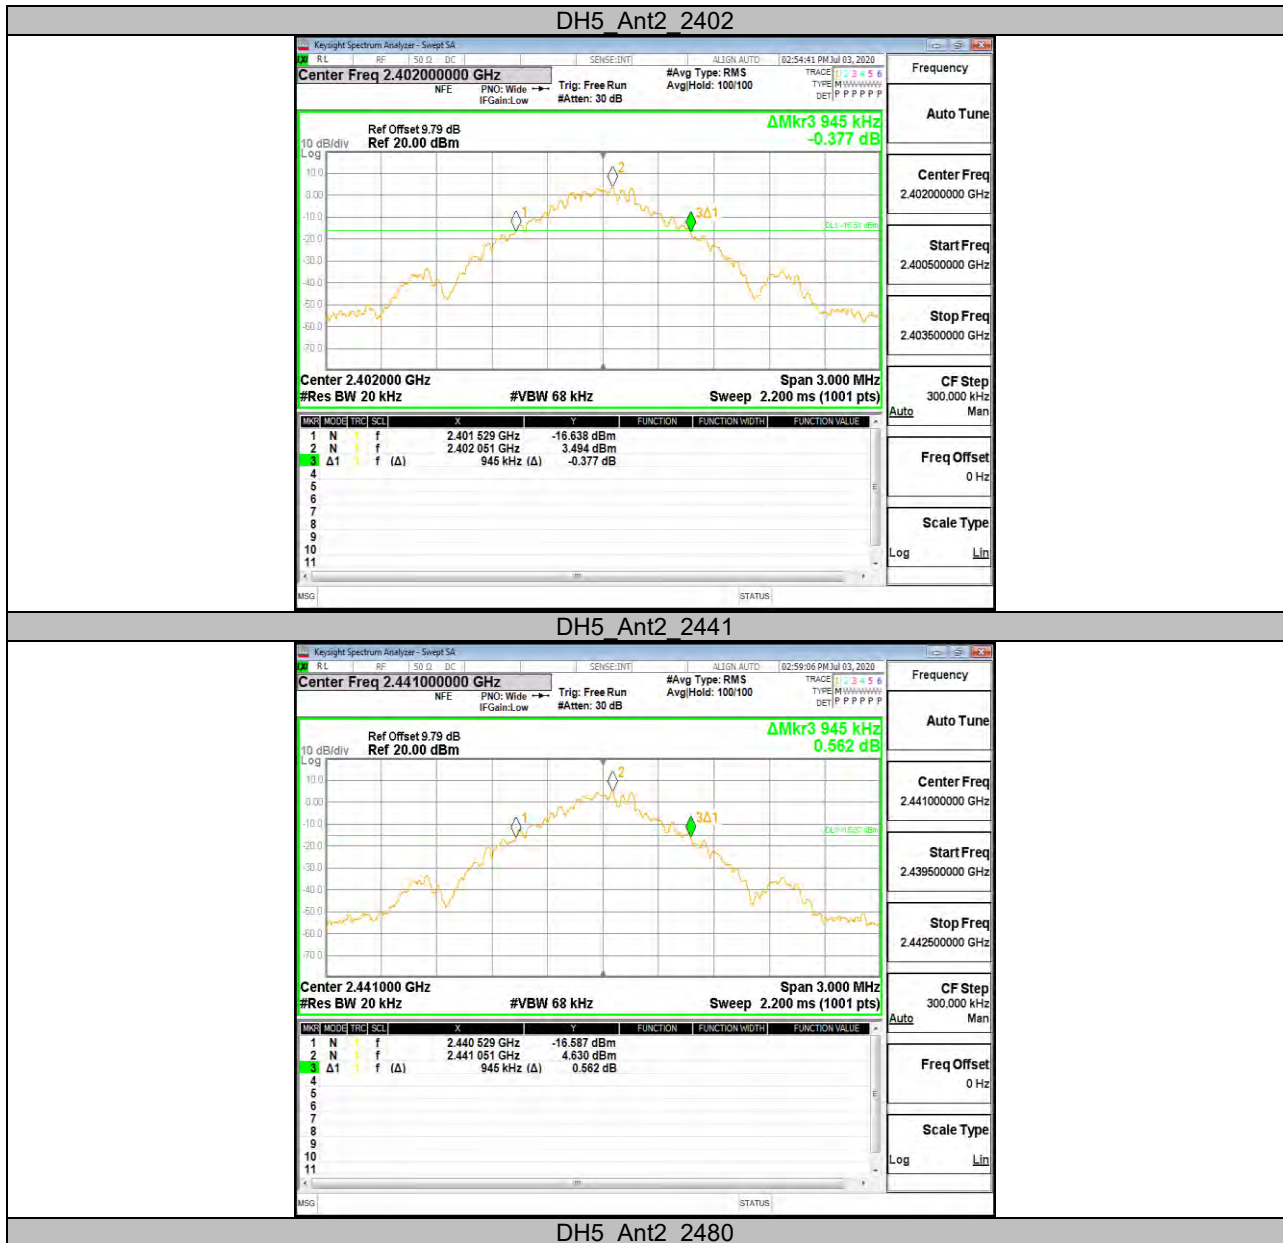





3DH5 Ant2 2402

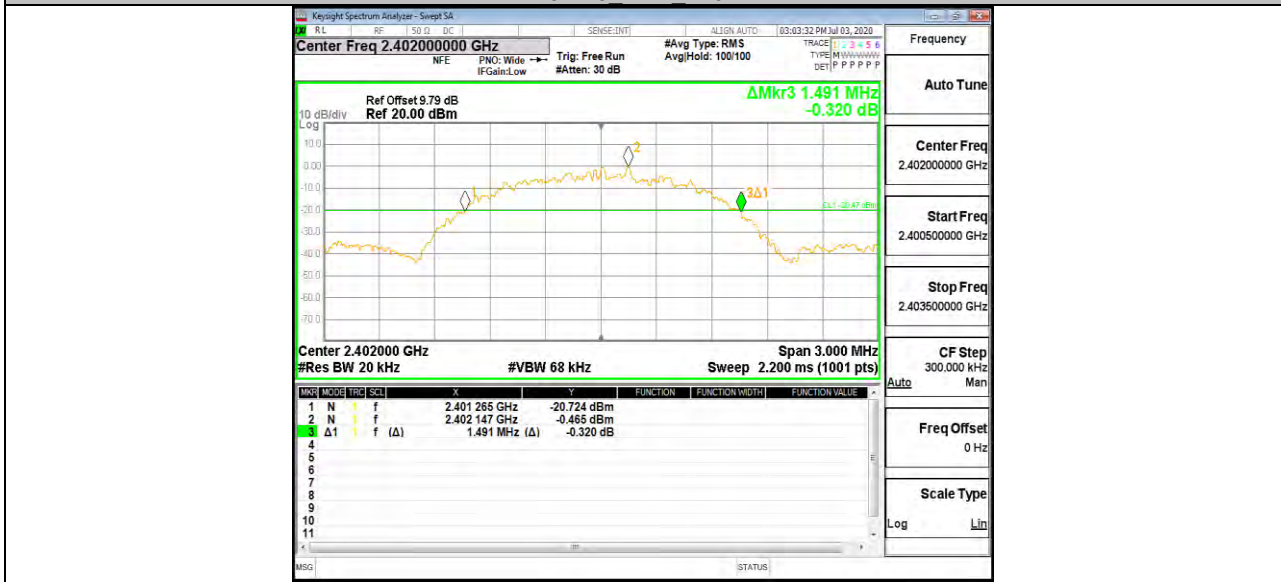

3DH5 Ant2 2441

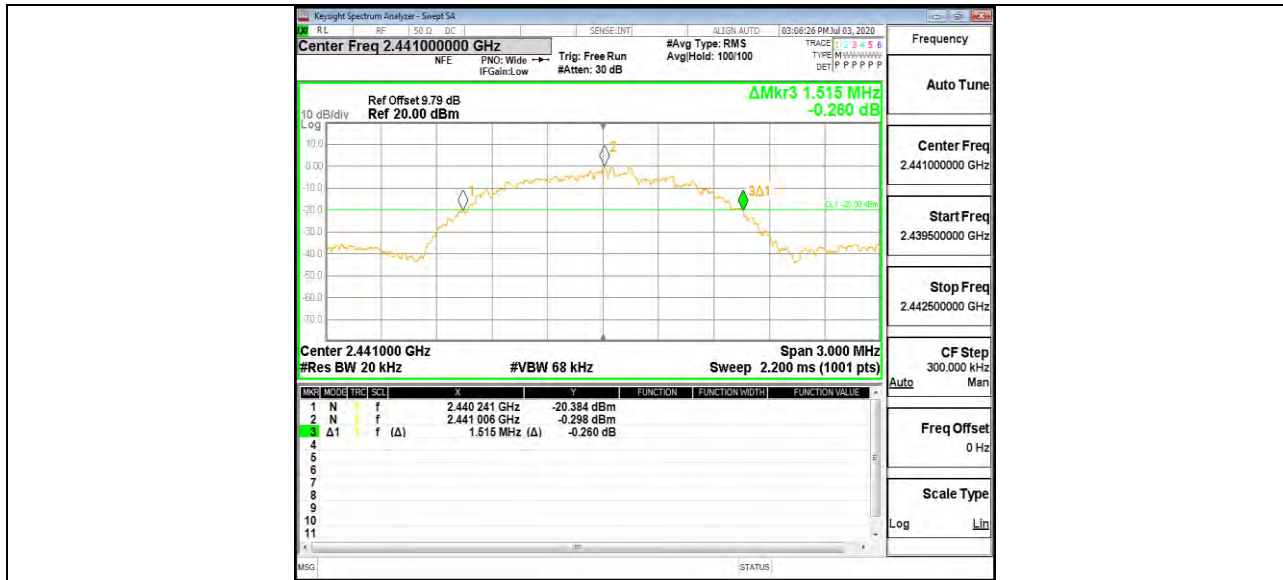

3DH5 Ant2 2480

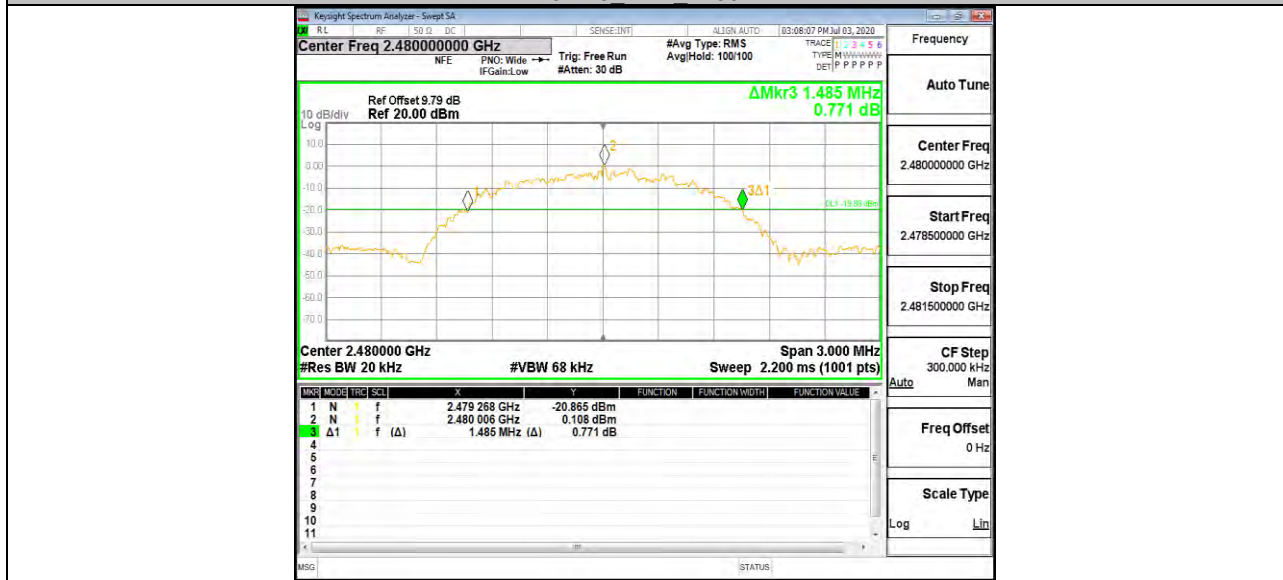




**Appendix B: Occupied Channel Bandwidth****Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant2	2402	0.87724	2401.550	2402.427	---	PASS
		2441	0.87336	2440.549	2441.423	---	PASS
		2480	0.86330	2479.552	2480.415	---	PASS
3DH5	Ant2	2402	1.3603	2401.309	2402.669	---	PASS
		2441	1.3635	2440.307	2441.670	---	PASS
		2480	1.3642	2479.306	2480.670	---	PASS




Test Graphs

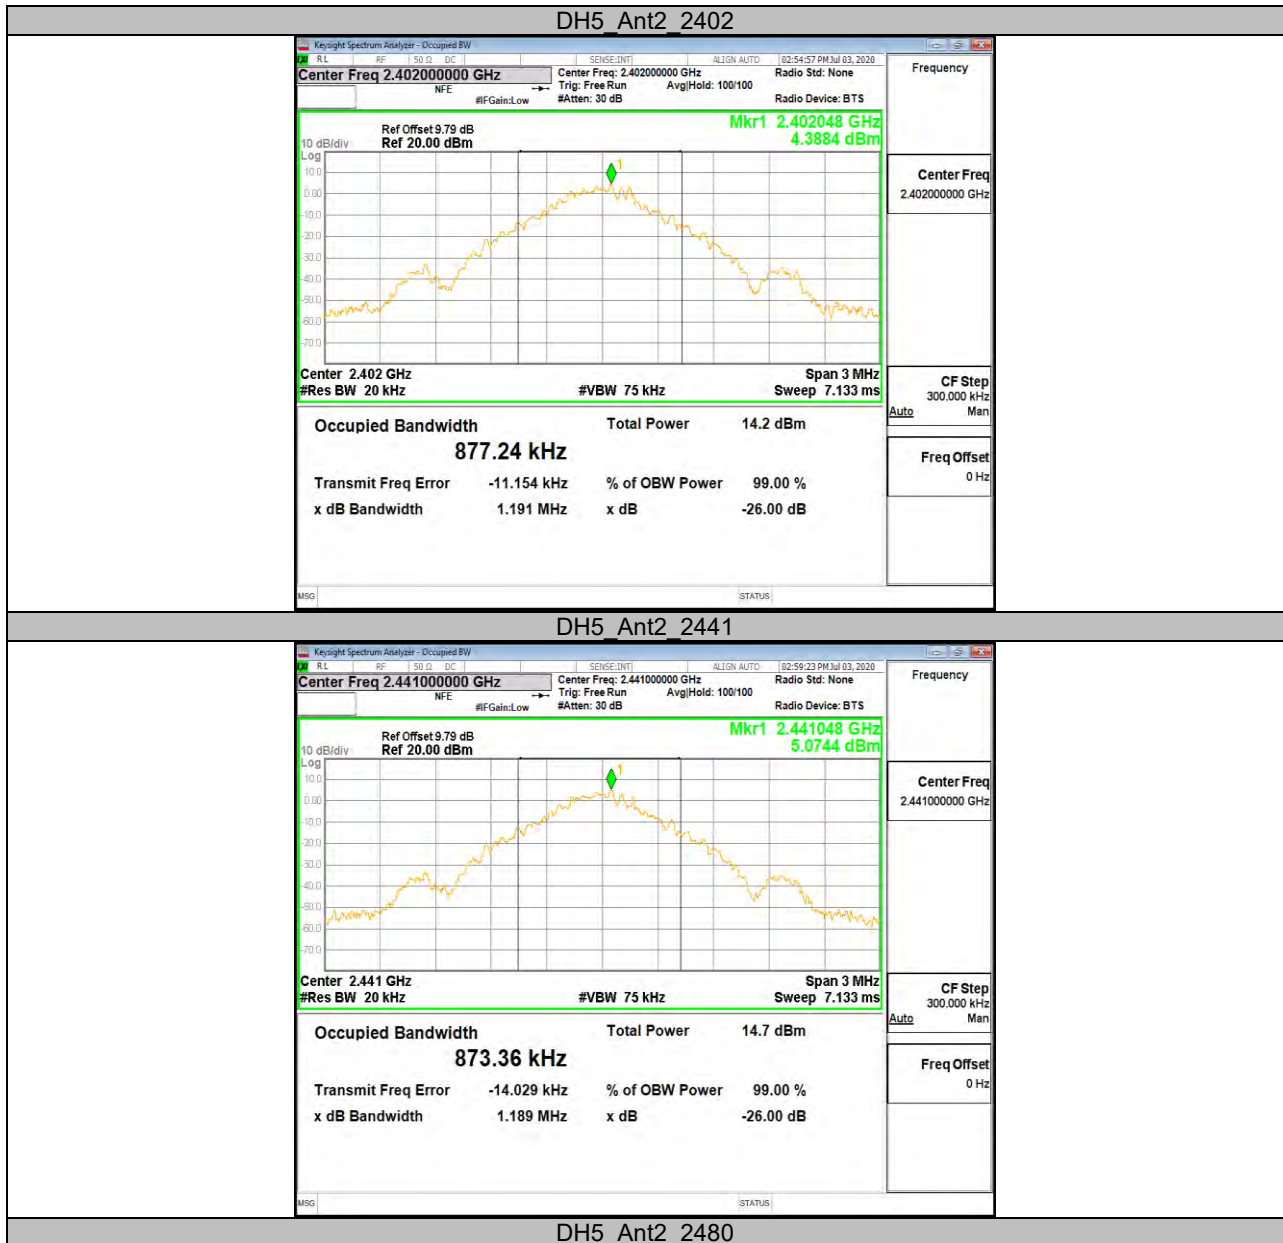

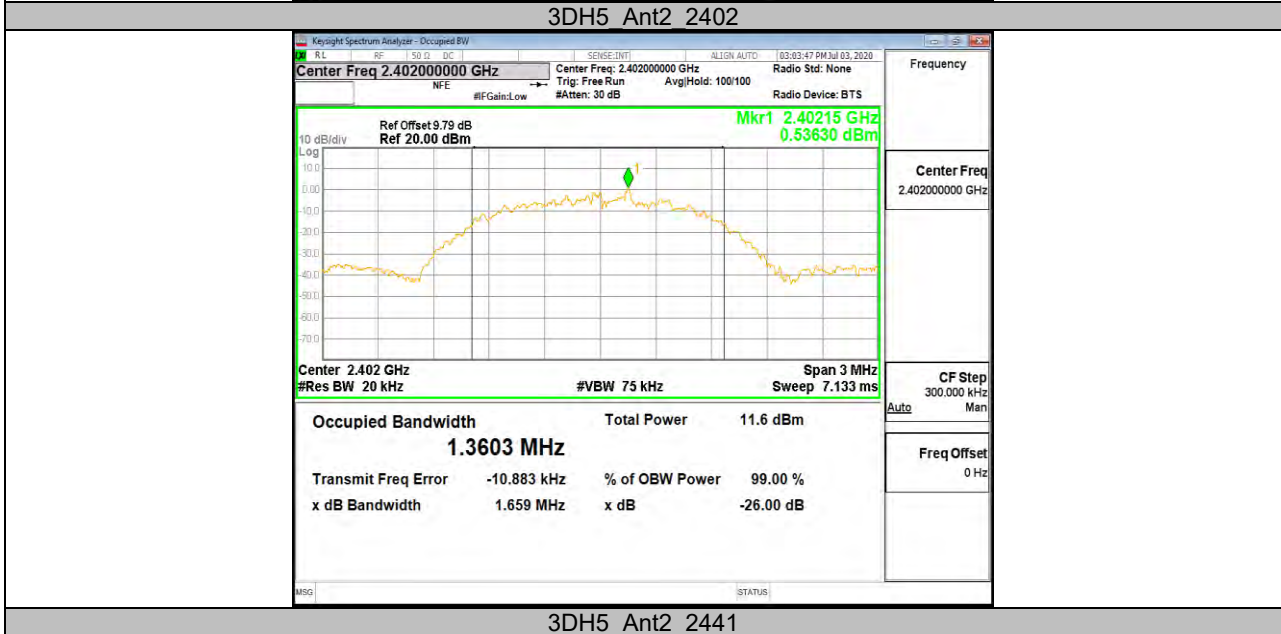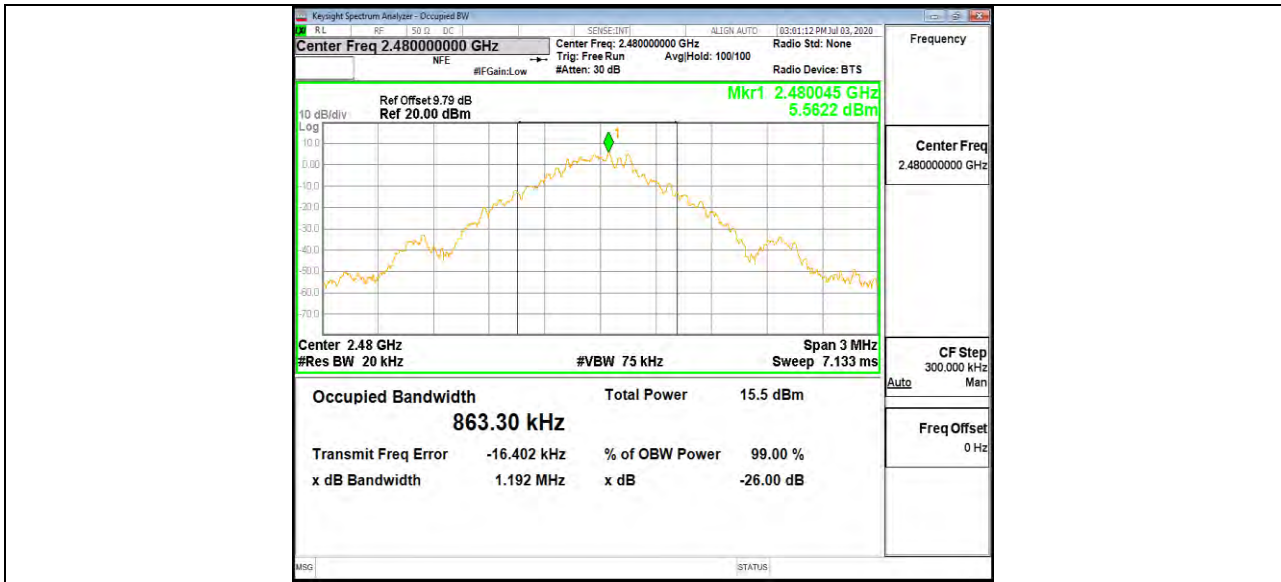

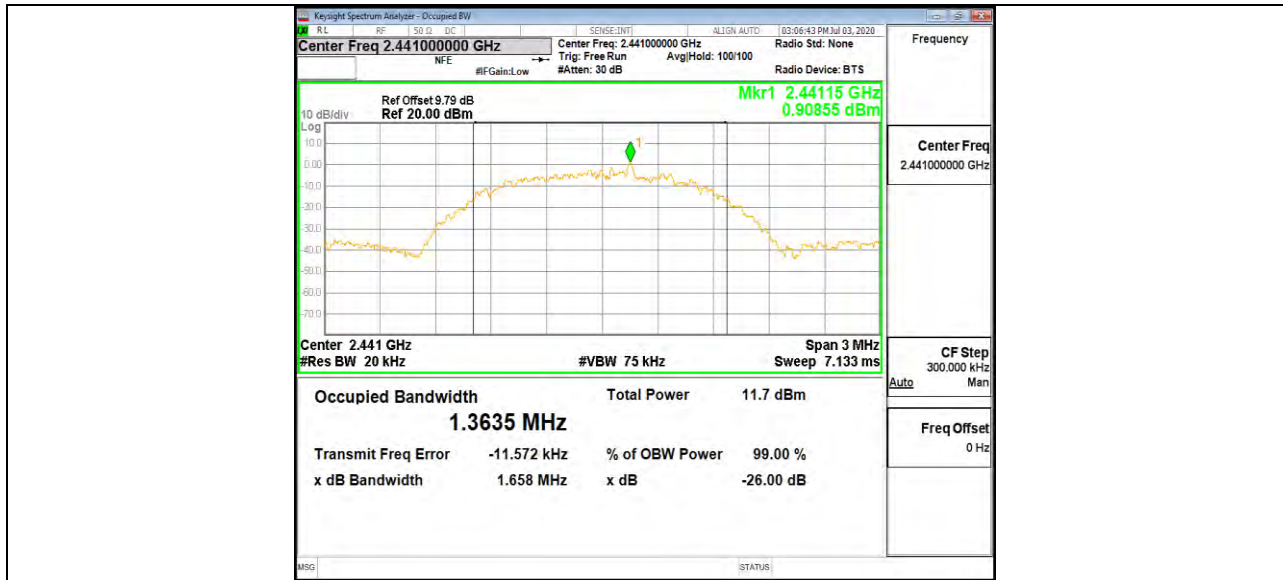

3DH5 Ant2 2480

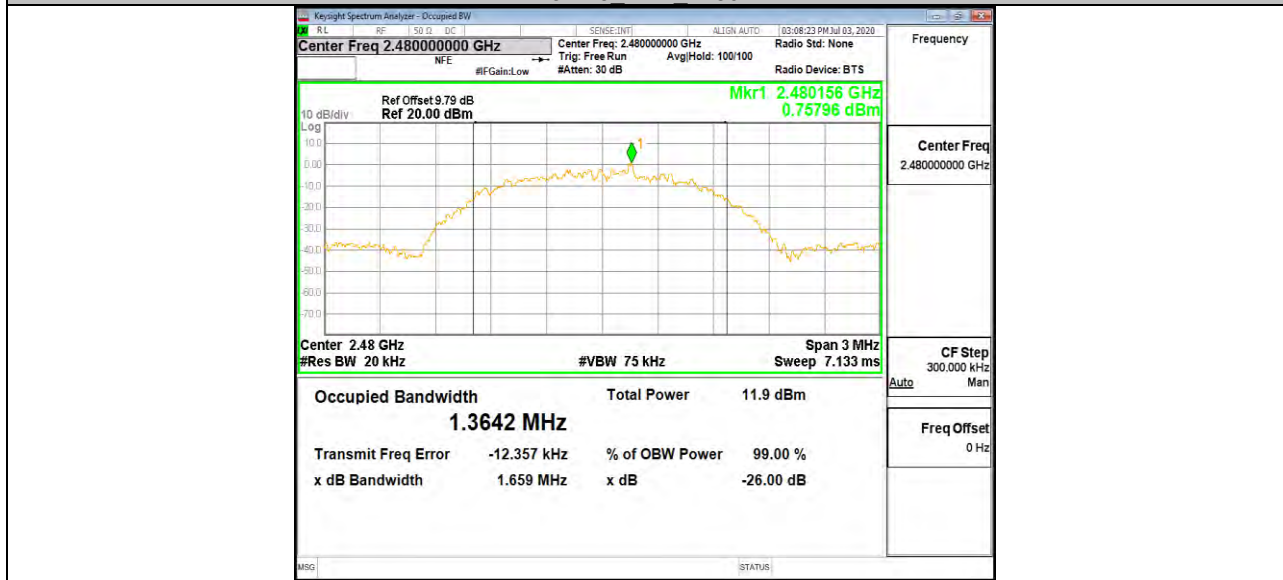



Appendix C: Maximum Output Power

Test Result

Mode	Channel	Peak Conducted Output Power	Average Conducted Output Power	Average EIRP	Conducted Power Limit	ISED EIRP Limit
DH5	0	8.74	8.60	10.97	30	36
	39	9.17	9.04	11.41	30	36
	78	9.83	9.71	12.08	30	36
3DH5	0	7.22	4.79	7.16	21	36
	39	7.63	5.29	7.66	21	36
	78	8.06	5.63	8.00	21	36

Note: 1. Both antenna 1 and antenna 2 had been tested, only the worst data (antenna 2) was recorded in the report.

2. Average EIRP = Average Conducted Output Power + Antenna gain.

3. The test results have already included the duty cycle correction factor. About correction Factor please refer to section 7.1.

4. Only the worst EIRP data was recorded in the report, for more about the antenna gain, please refer to clause 5.8.



Appendix D: Carrier Frequency Separation

Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant2	Hop	1.004	≥ 0.945	PASS
3DH5	Ant2	Hop	1.008	≥ 1.010	PASS



Test Graphs





Appendix E: Time of Occupancy


Test Result

FHSS Mode				
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [ms]	Results
DH1	MCH	0.3787	0.121	PASS
DH3	MCH	1.635	0.262	PASS
DH5	MCH	2.883	0.308	PASS
AFHSS Mode				
DH1	MCH	0.3787	0.061	PASS
DH3	MCH	1.635	0.131	PASS
DH5	MCH	2.883	0.154	PASS

FHSS Mode				
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [ms]	Results
3DH1	MCH	0.3876	0.124	PASS
3DH3	MCH	1.639	0.262	PASS
3DH5	MCH	2.891	0.308	PASS
AFHSS Mode				
3DH1	MCH	0.3876	0.062	PASS
3DH3	MCH	1.639	0.131	PASS
3DH5	MCH	2.891	0.154	PASS



Test Graphs

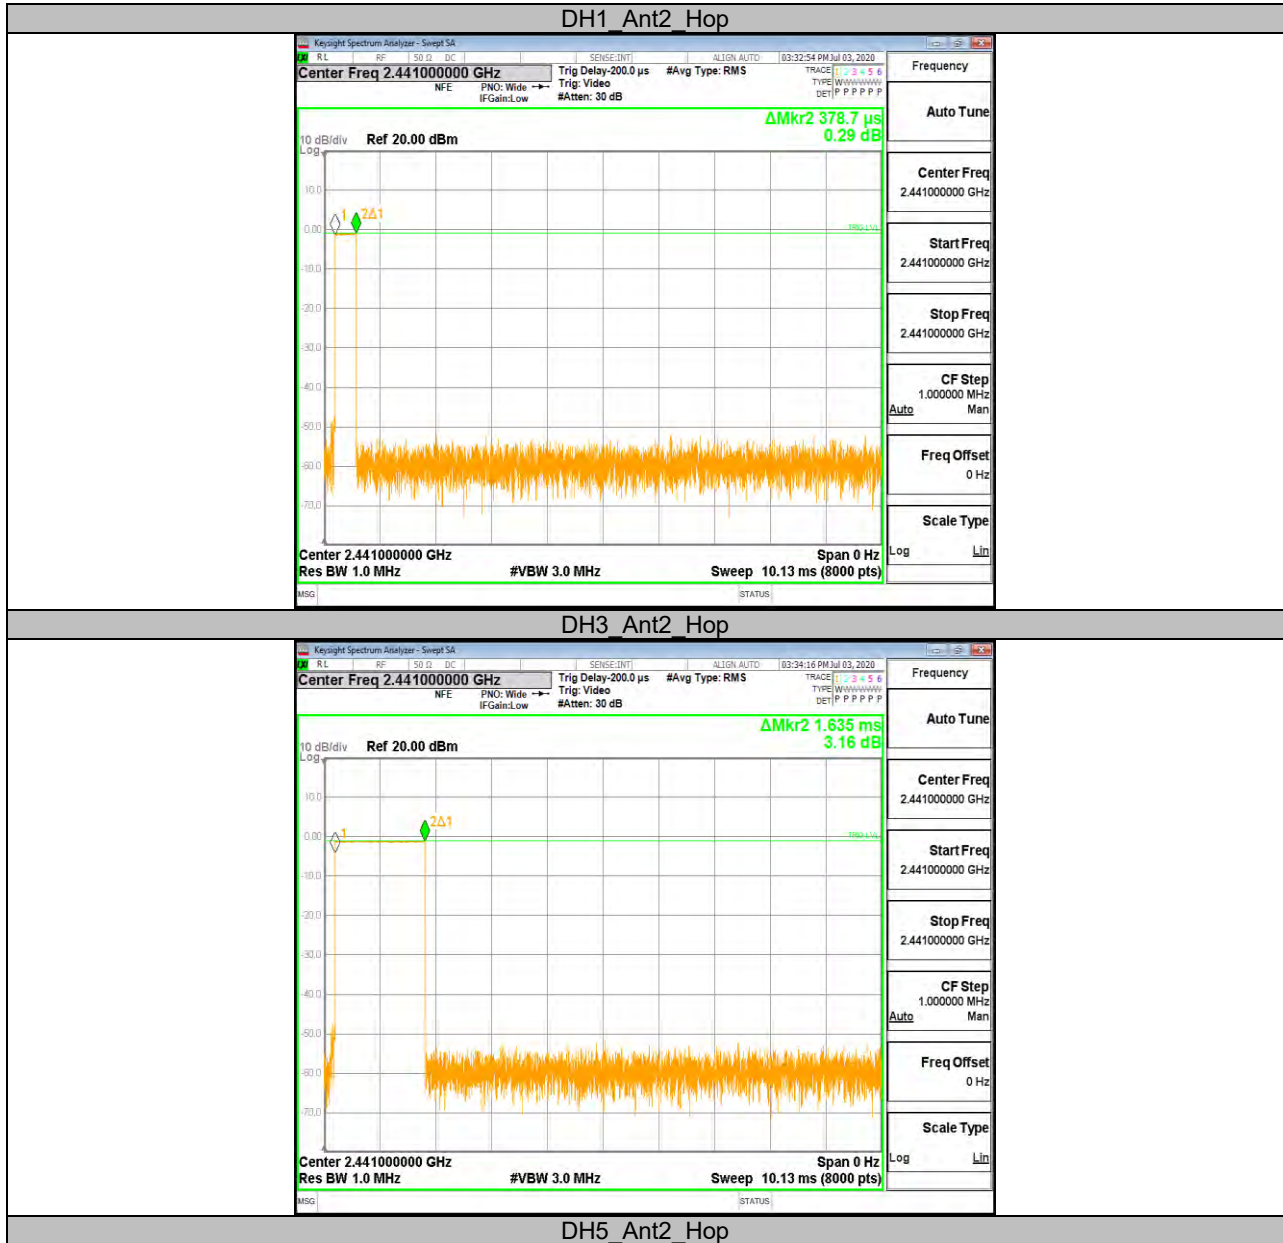





3DH1 Ant2 Hop



3DH3 Ant2 Hop

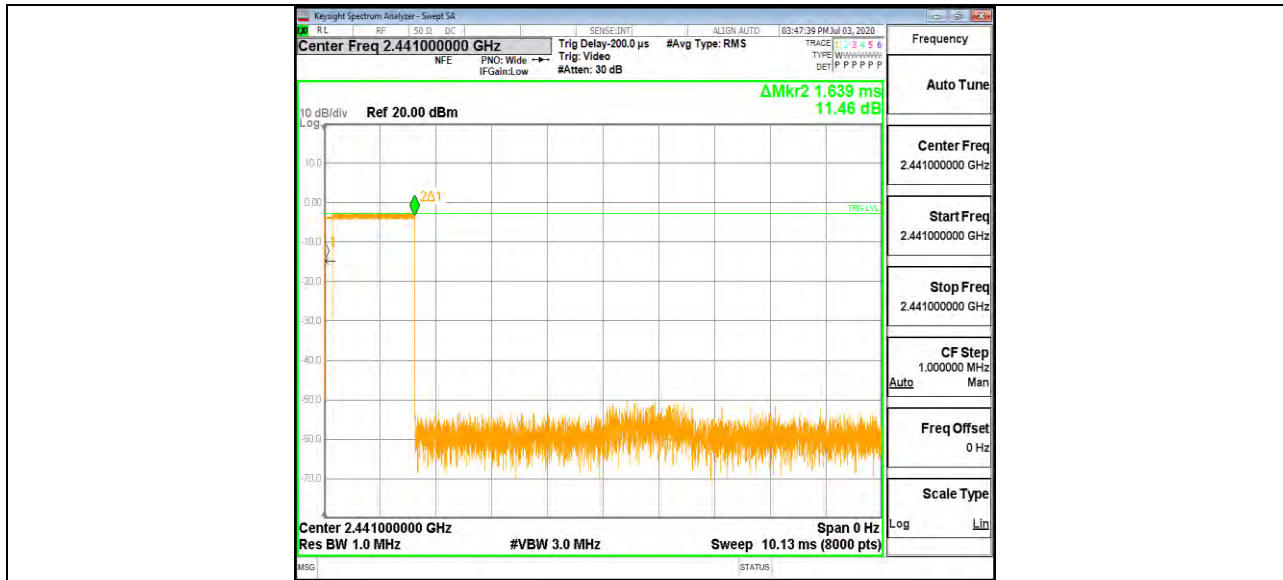

3DH5 Ant2 Hop

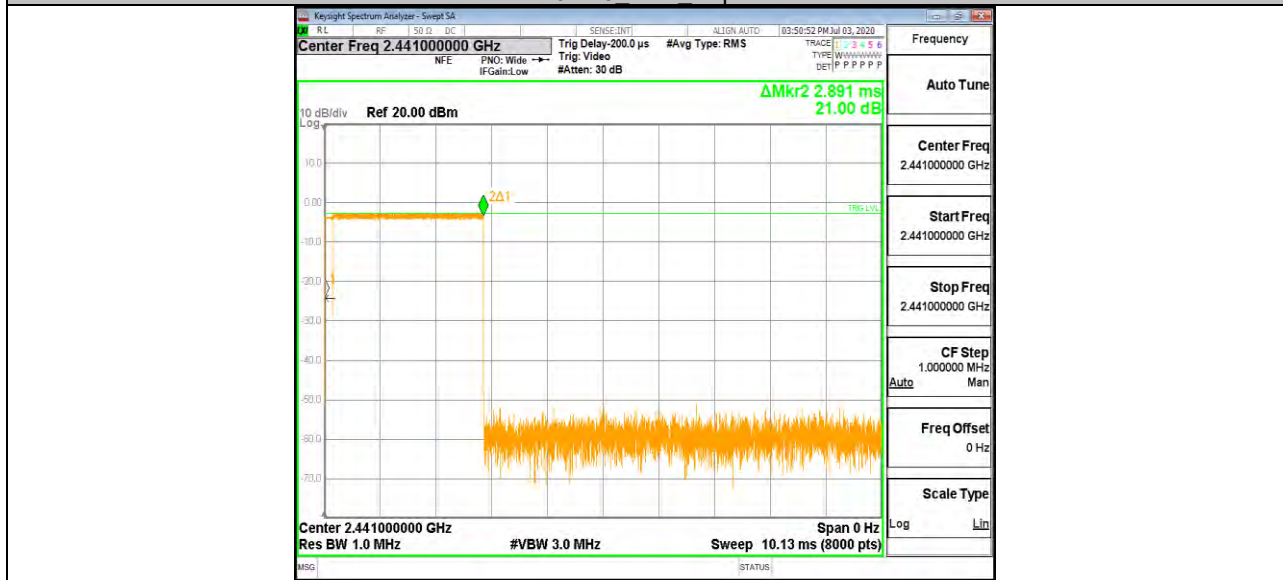




Appendix F: Number of Hopping Channels

Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant2	Hop	79	>=15	PASS
3DH5	Ant2	Hop	79	>=15	PASS

Note: Both antenna 1 and antenna 2 had been tested, only the worst data (antenna 2) was recorded in the report.

Test Graphs

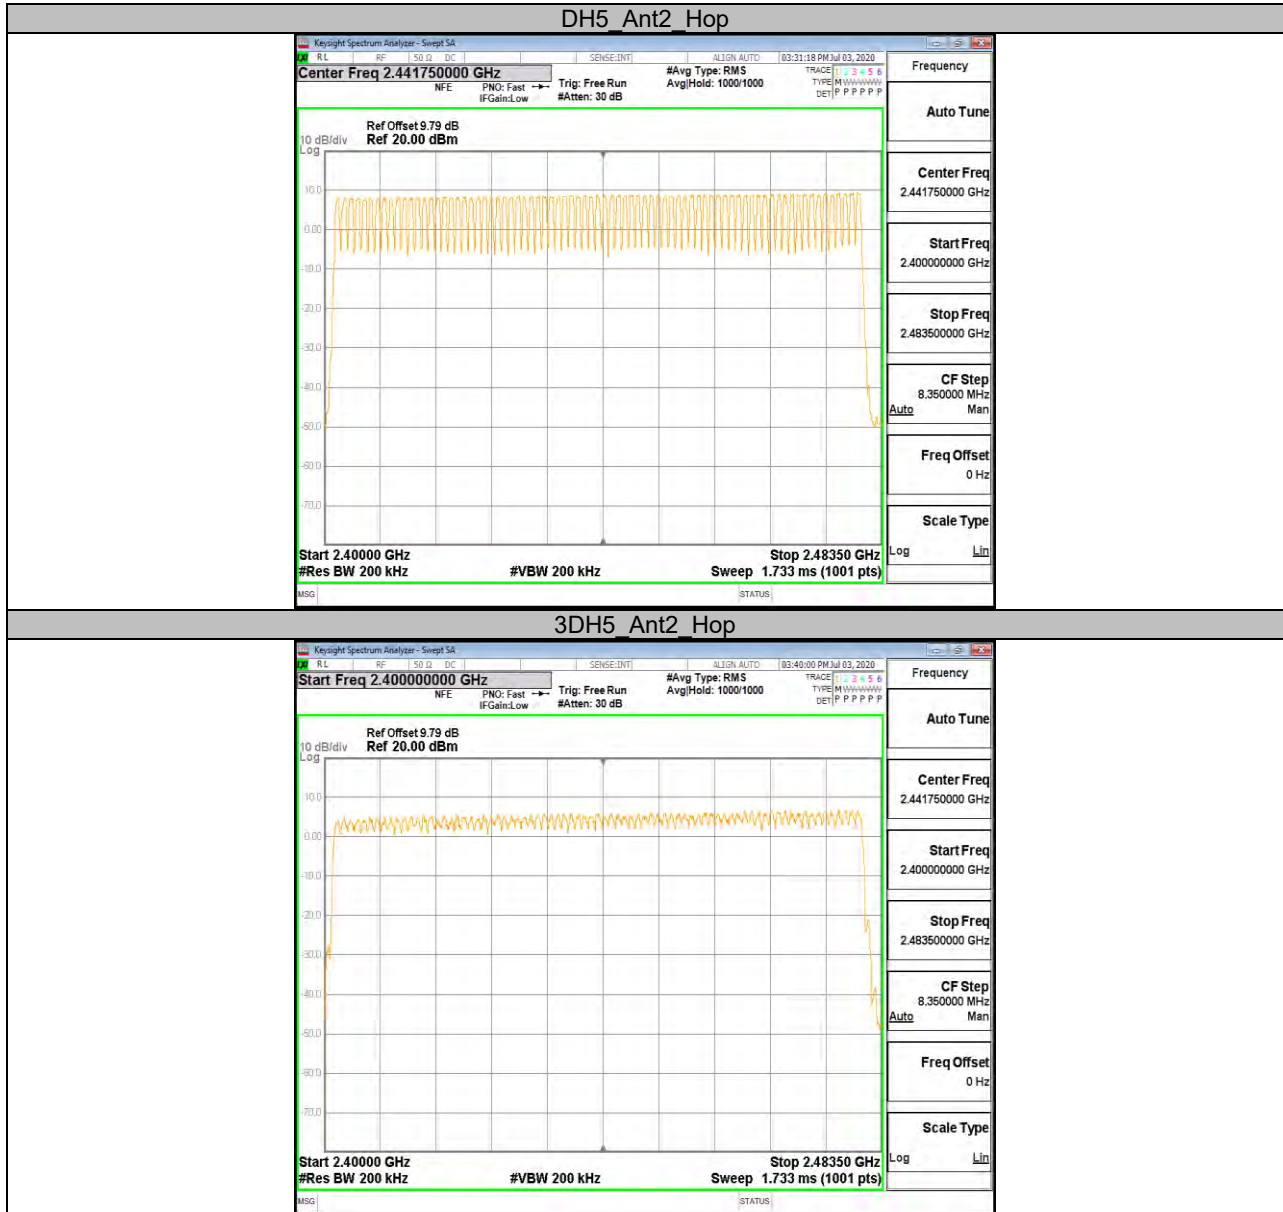



Appendix G: Band Edge Measurements


Test Result

Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant2	Low	2402	7.60	-50.36	<=-12.4	PASS
		High	2480	8.78	-46.53	<=-11.22	PASS
		Low	Hop_2402	7.08	-50.52	-12.92	PASS
		High	Hop_2480	8.62	-48.7	-11.38	PASS
3DH5	Ant2	Low	2402	4.73	-44.9	<=-15.27	PASS
		High	2480	5.15	-48.87	<=-14.85	PASS
		Low	Hop_2402	3.38	-50.47	-16.62	PASS
		High	Hop_2480	4.70	-48.71	-15.3	PASS


Note: Both antenna 1 and antenna 2 had been tested, only the worst data (antenna 2) was recorded in the report.




Test Graphs

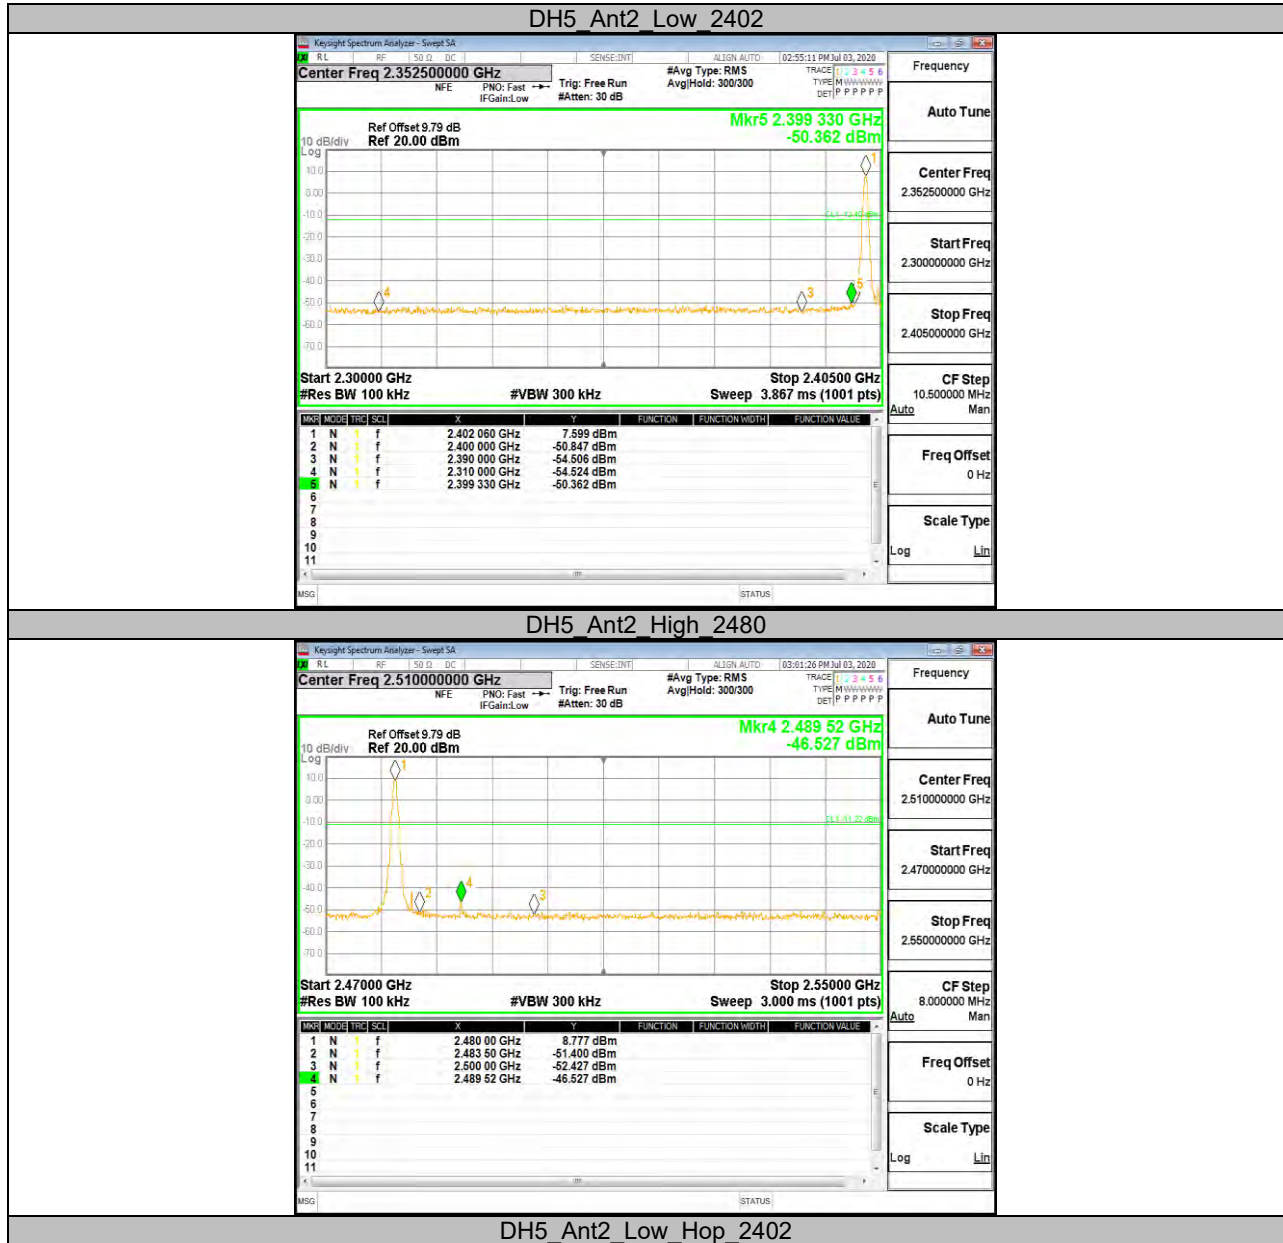


DH5 Ant2 Low Hop 2402

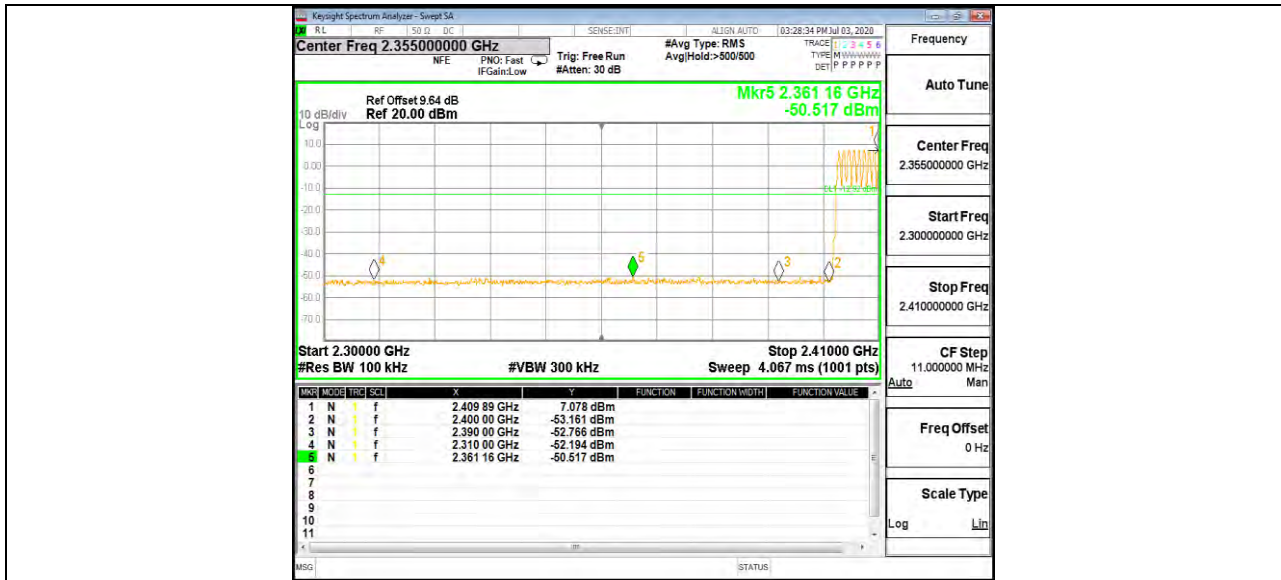


DH5 Ant2 High Hop 2480

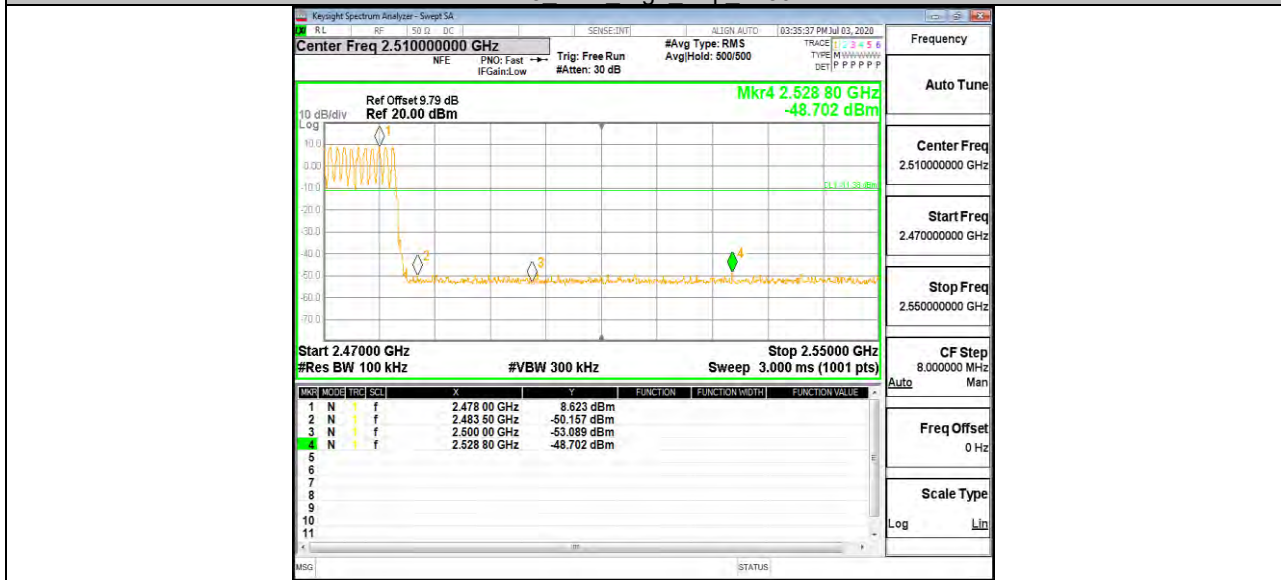


3DH5 Ant2 Low 2402

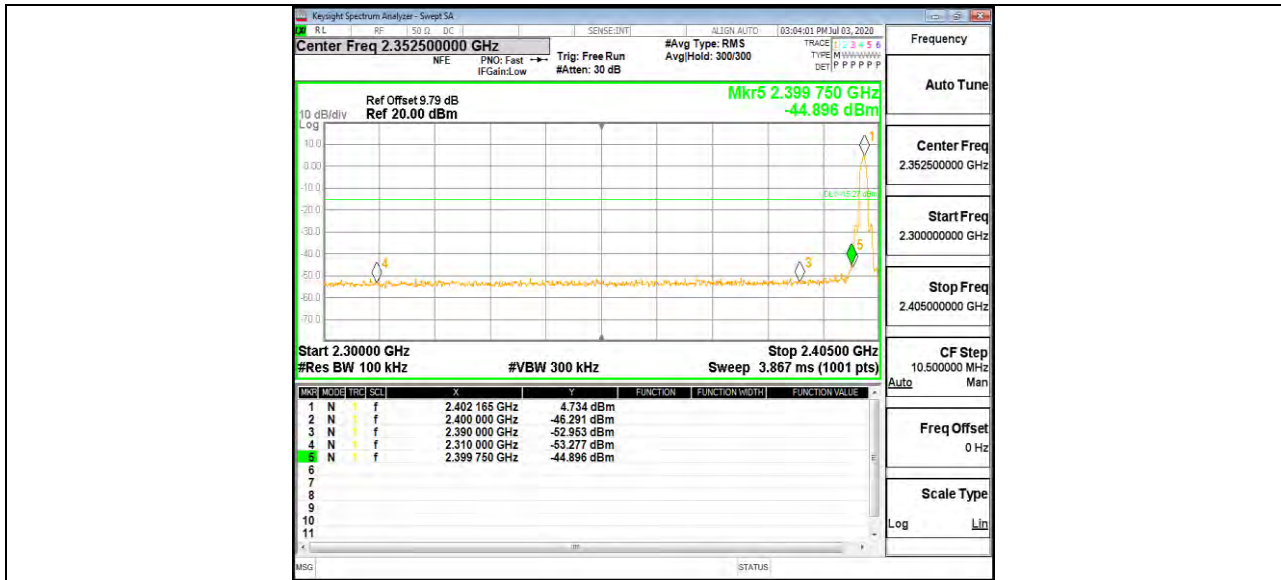


3DH5 Ant2 High 2480

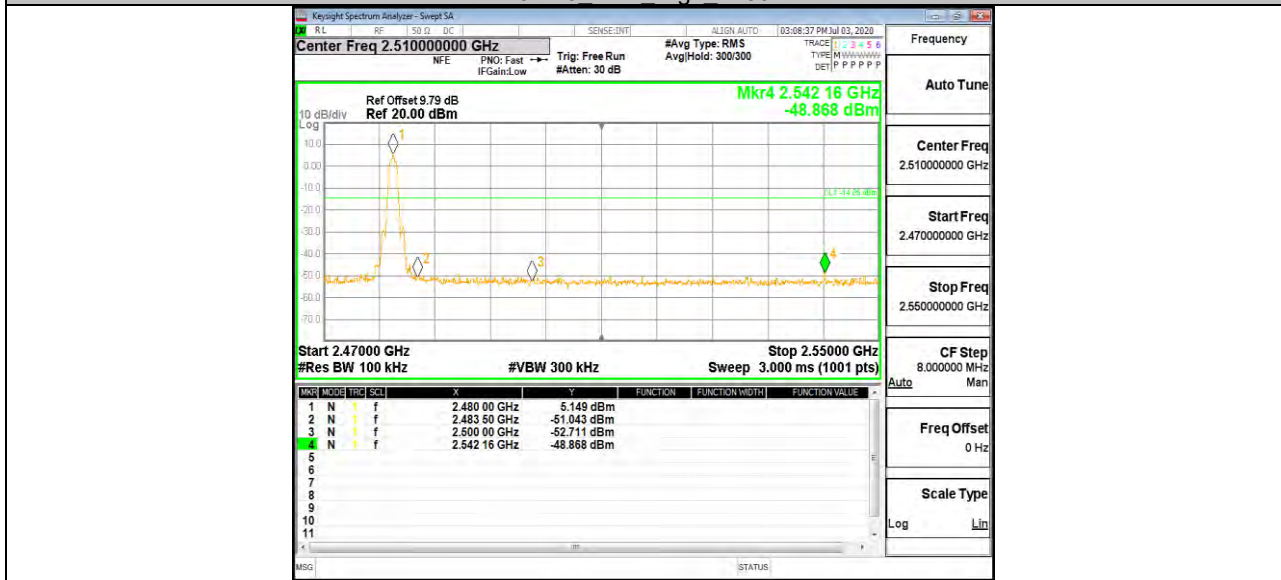

3DH5 Ant2 Low Hop 2402

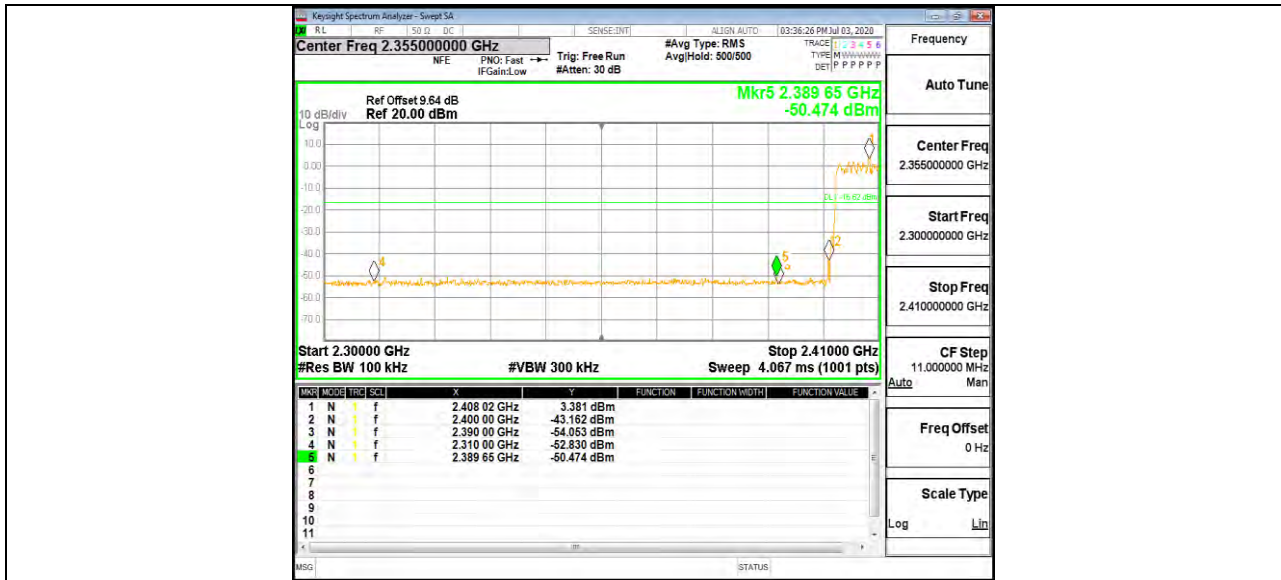

3DH5 Ant2 High Hop 2480

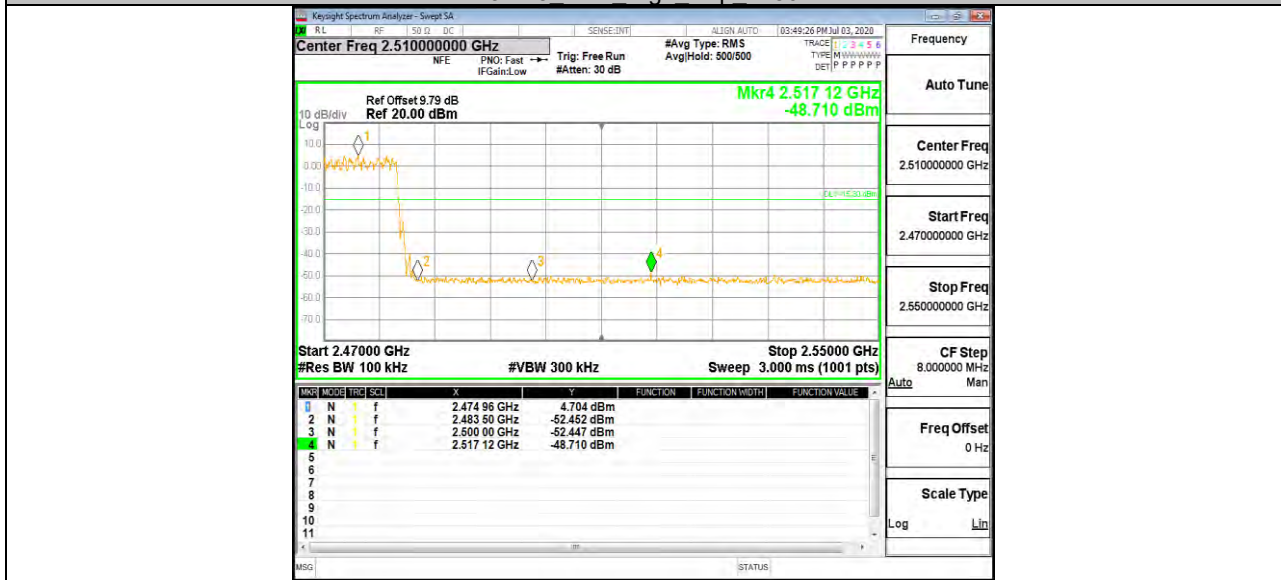



Appendix H: Conducted Spurious Emission


Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant2	2402	Reference	7.60	7.60	---	PASS
			30~1000	30~1000	-73.145	<=-12.4	PASS
			1000~26500	1000~26500	-51.53	<=-12.4	PASS
		2441	Reference	8.35	8.35	---	PASS
			30~1000	30~1000	-73.009	<=-11.646	PASS
			1000~26500	1000~26500	-51.519	<=-11.646	PASS
		2480	Reference	8.39	8.39	---	PASS
			30~1000	30~1000	-73.156	<=-11.61	PASS
			1000~26500	1000~26500	-51.521	<=-11.61	PASS
3DH5	Ant2	2402	Reference	4.69	4.69	---	PASS
			30~1000	30~1000	-72.854	<=-15.309	PASS
			1000~26500	1000~26500	-38.083	<=-15.309	PASS
		2441	Reference	4.72	4.72	---	PASS
			30~1000	30~1000	-72.845	<=-15.282	PASS
			1000~26500	1000~26500	-55.309	<=-15.282	PASS
		2480	Reference	5.20	5.20	---	PASS
			30~1000	30~1000	-72.465	<=-14.801	PASS
			1000~26500	1000~26500	-54.795	<=-14.801	PASS

Note: Both antenna 1 and antenna 2 had been tested, only the worst data (antenna 2) was recorded in the report.




Test Graphs

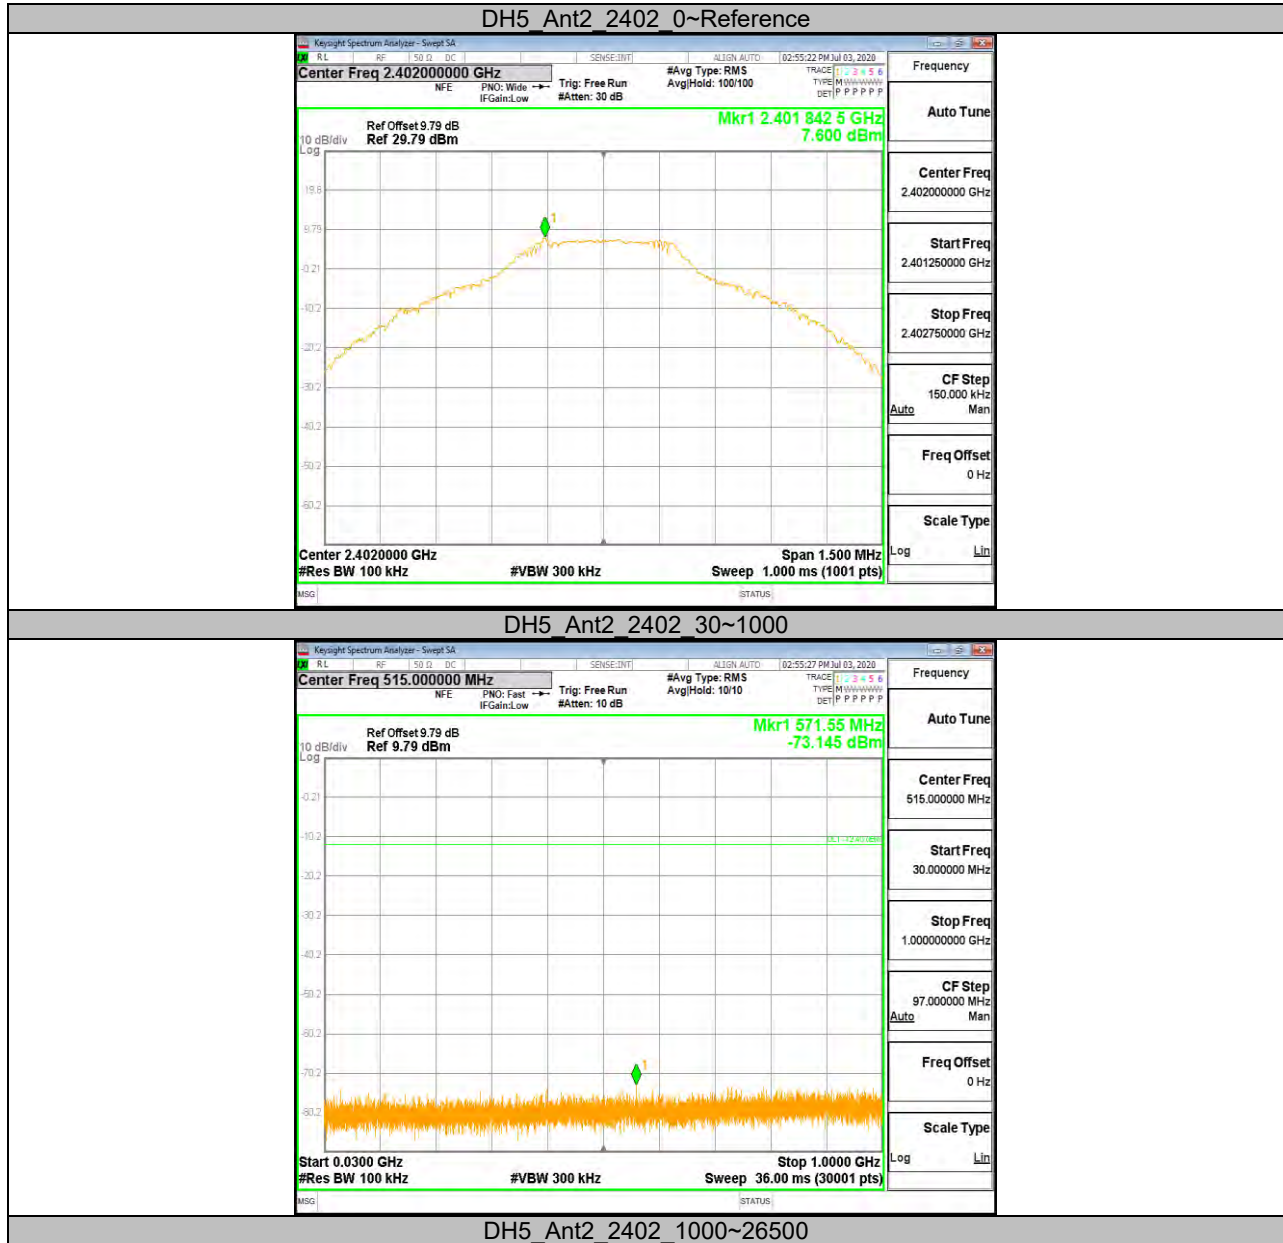


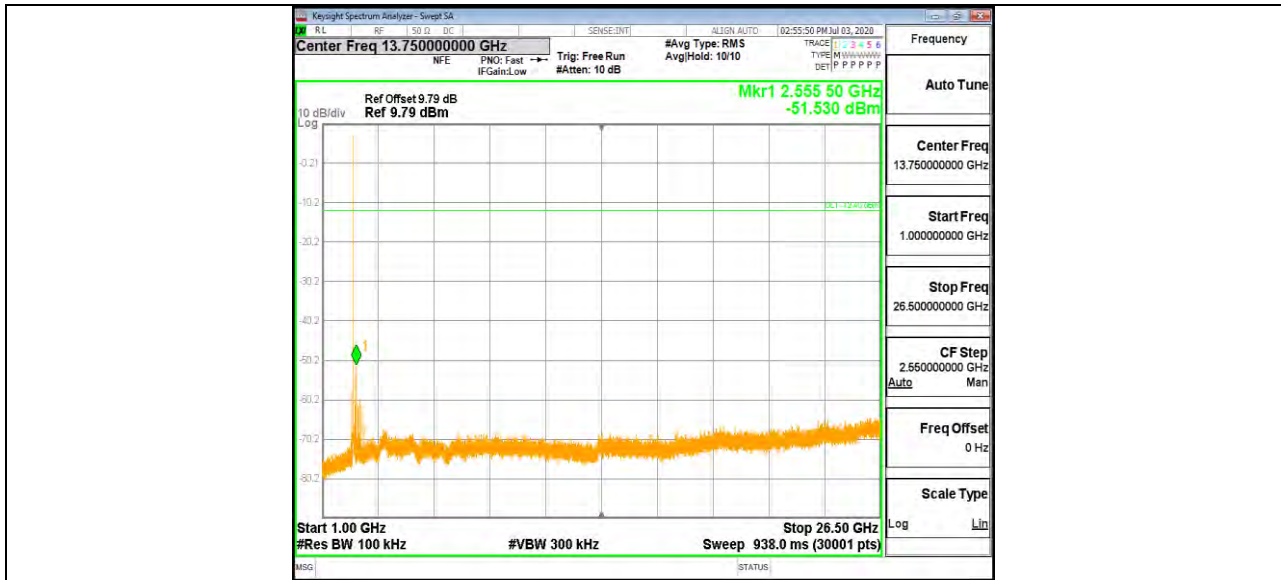


DH5 Ant2 2441 0~Reference

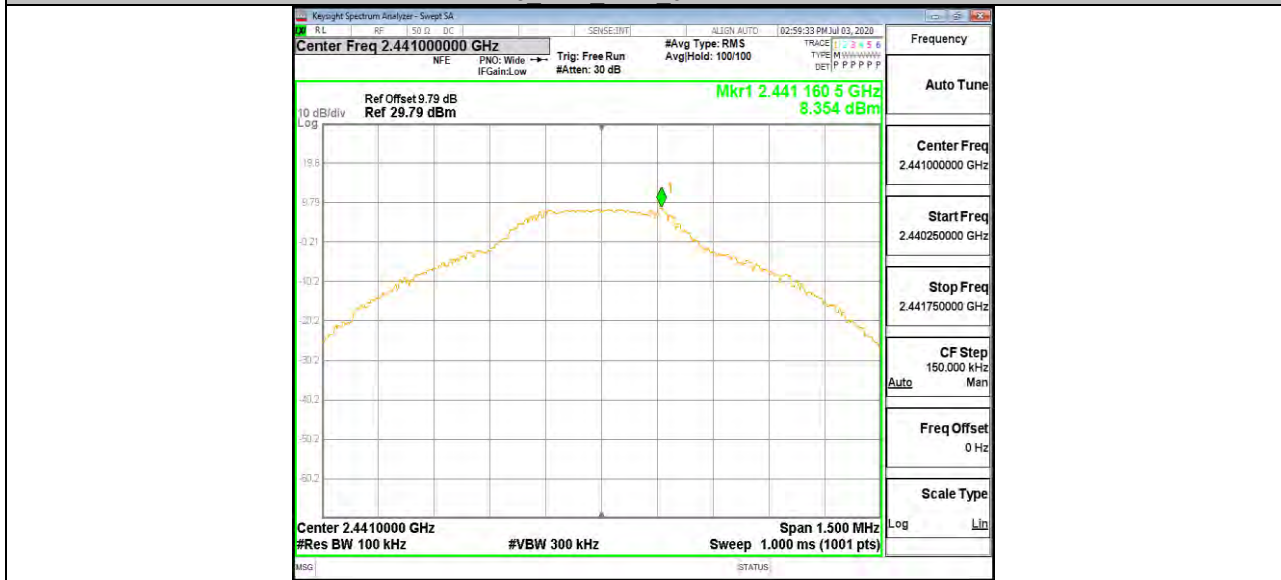


DH5 Ant2 2441 30~1000

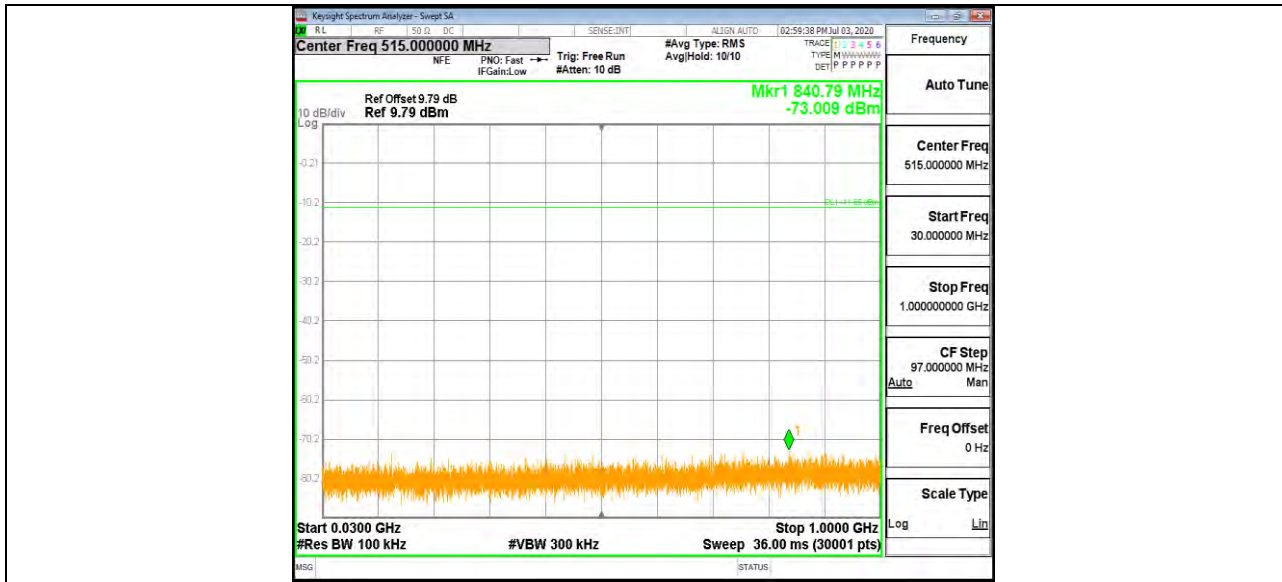


DH5 Ant2 2441 1000~26500

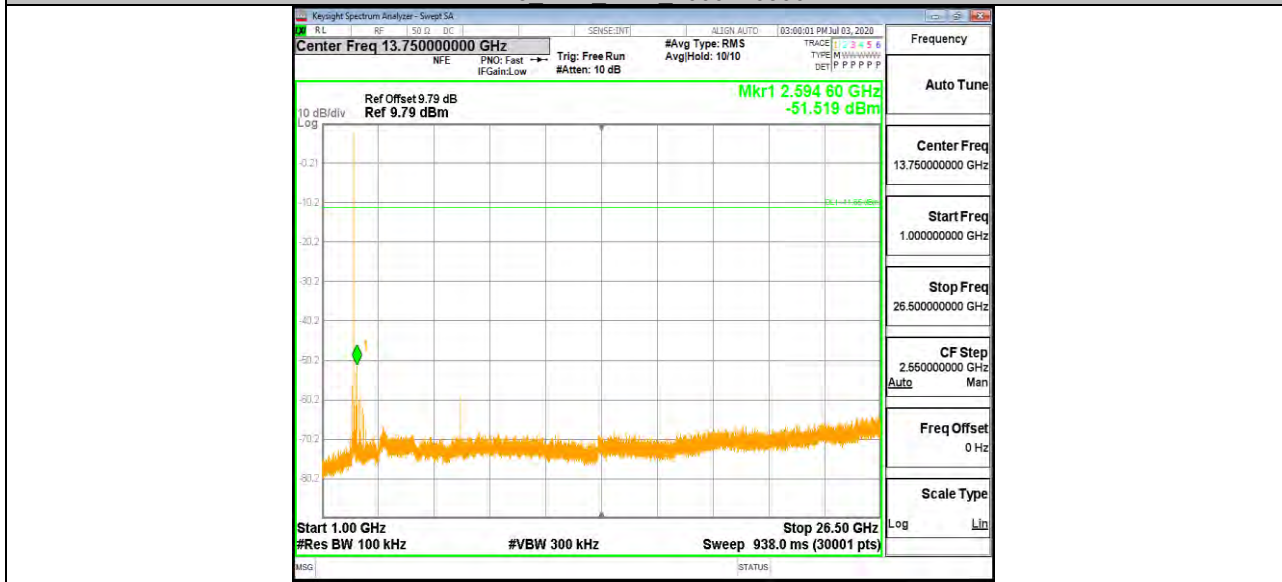


DH5 Ant2 2480 0~Reference

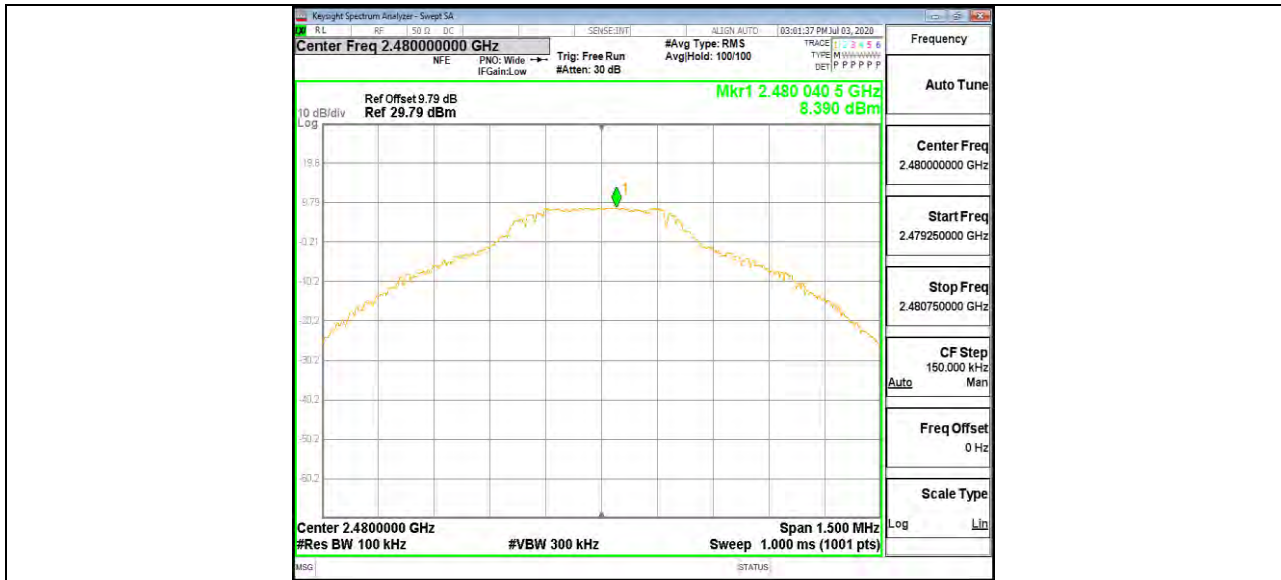


DH5_Ant2_2480_30~1000

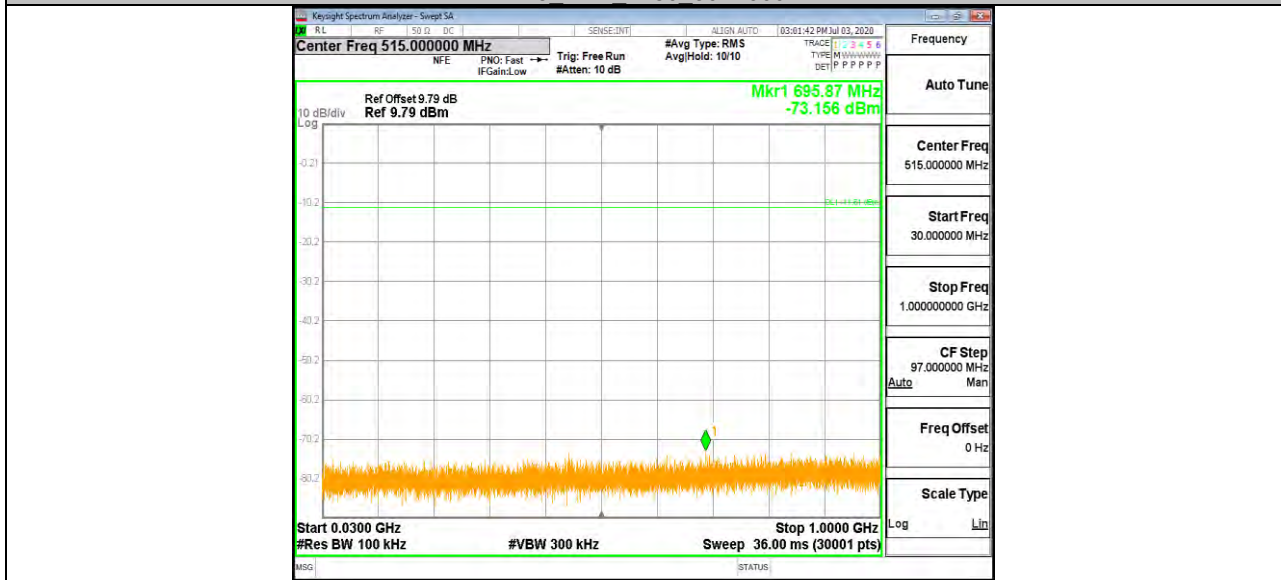


DH5_Ant2_2480_1000~26500

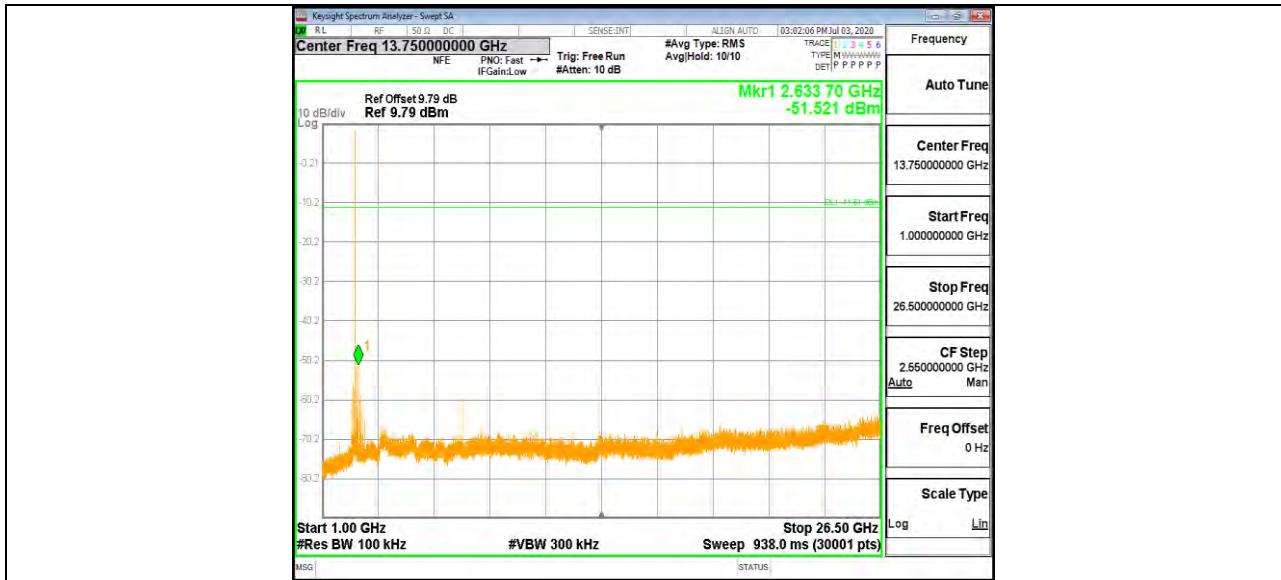


3DH5_Ant2_2402_0~Reference

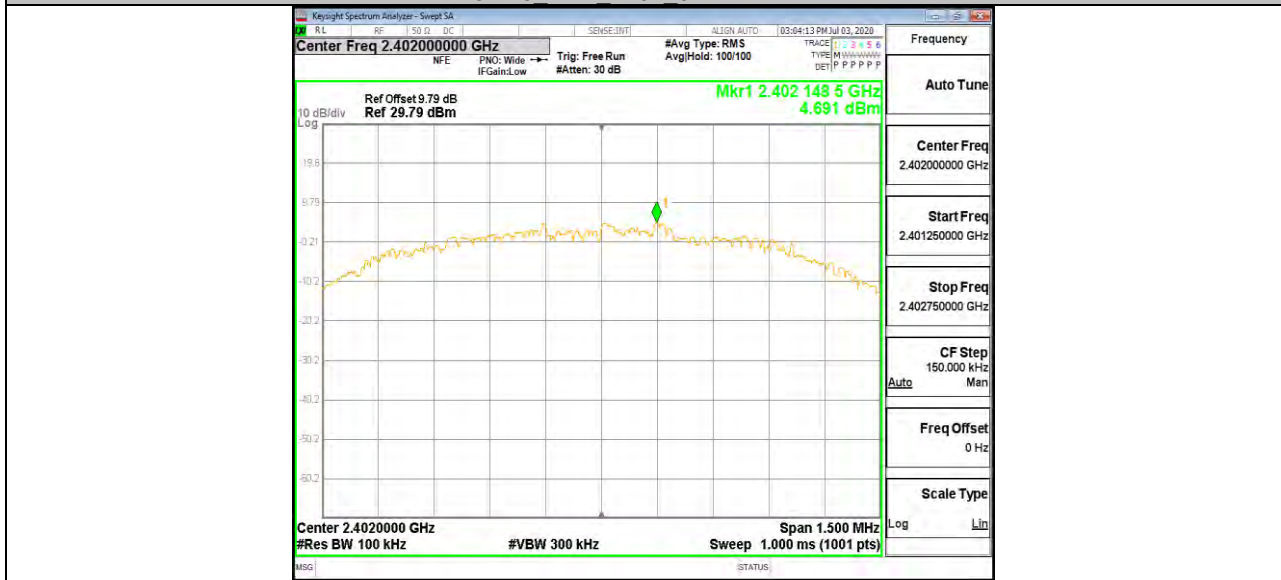


3DH5_Ant2_2402_30~1000

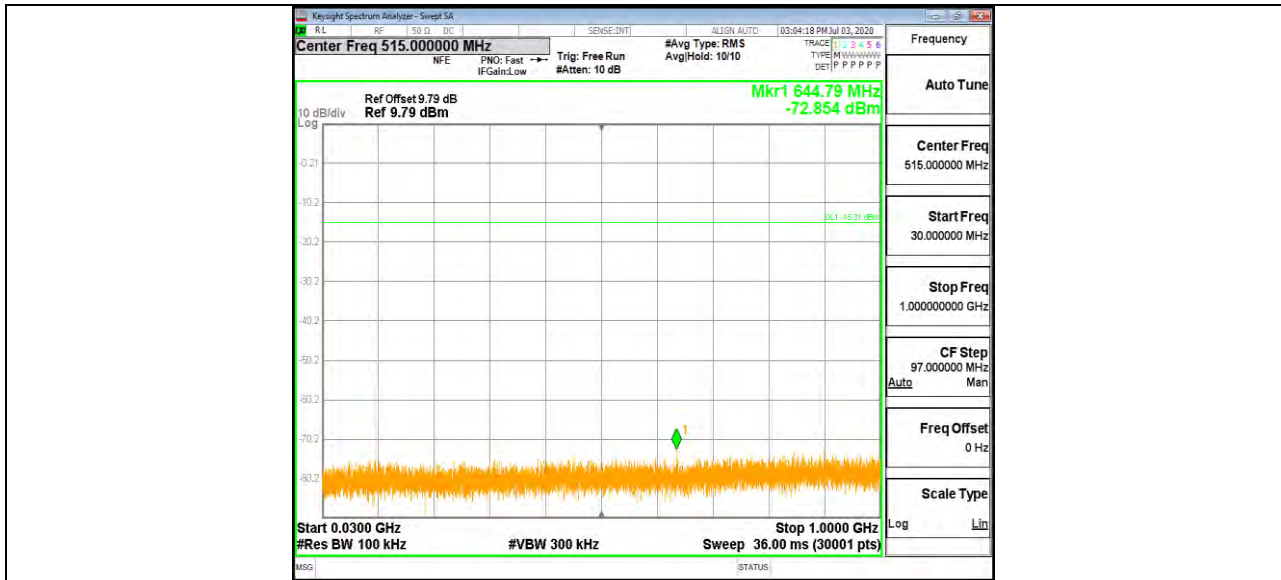


3DH5 Ant2 2402 1000~26500

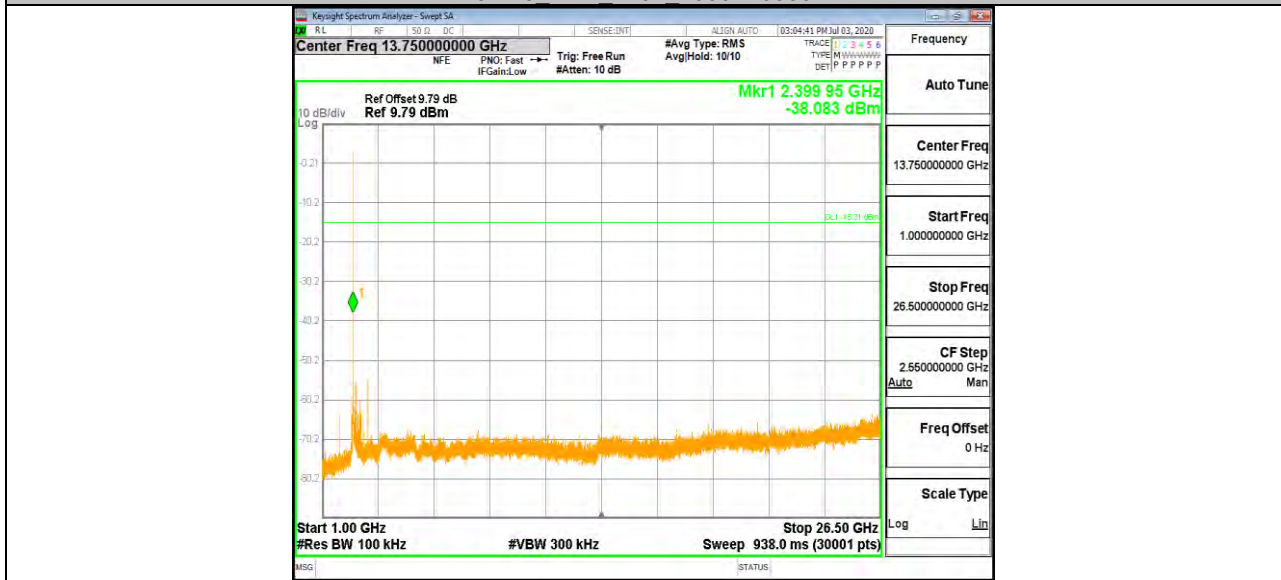


3DH5 Ant2 2441 0~Reference

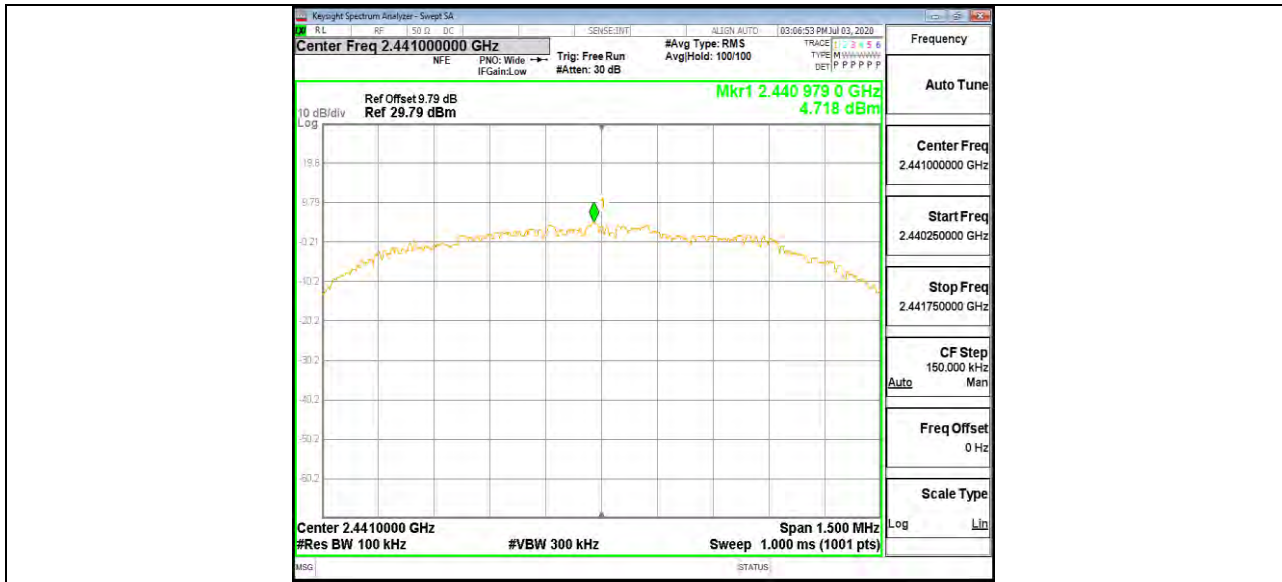


3DH5 Ant2 2441 30~1000

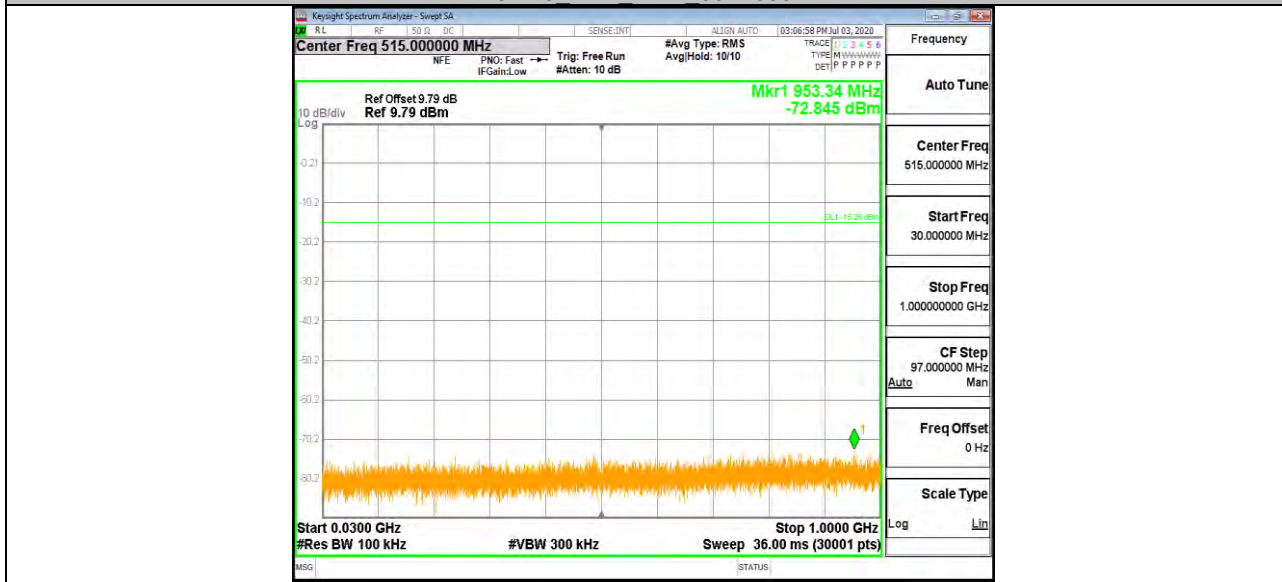


3DH5 Ant2 2441 1000~26500

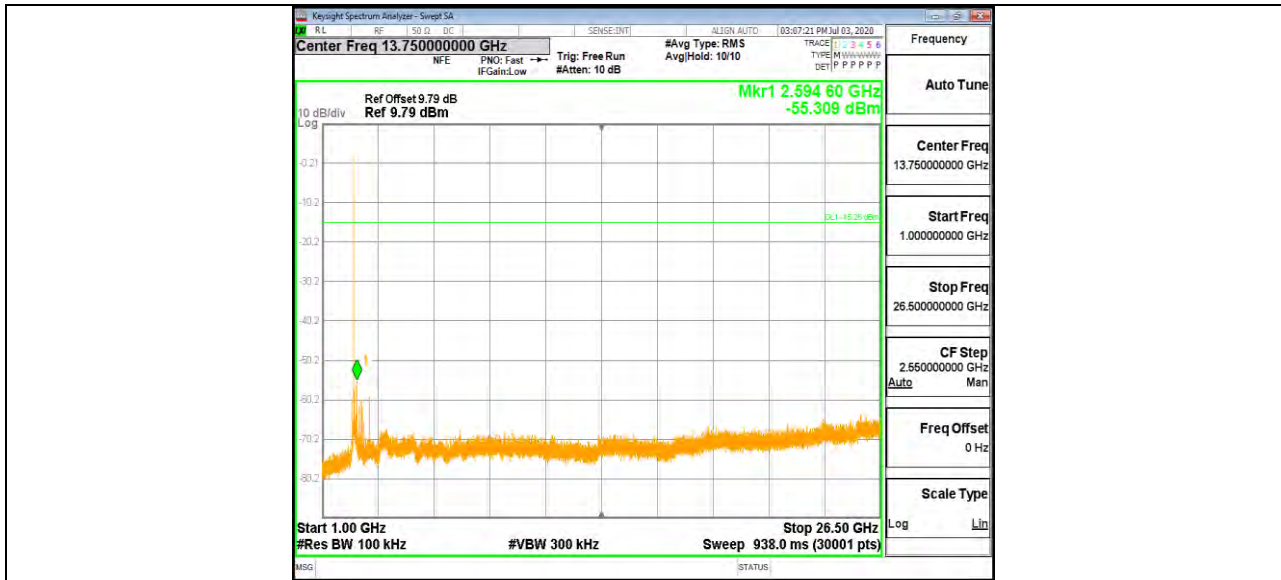

3DH5_Ant2_2480_0~Reference

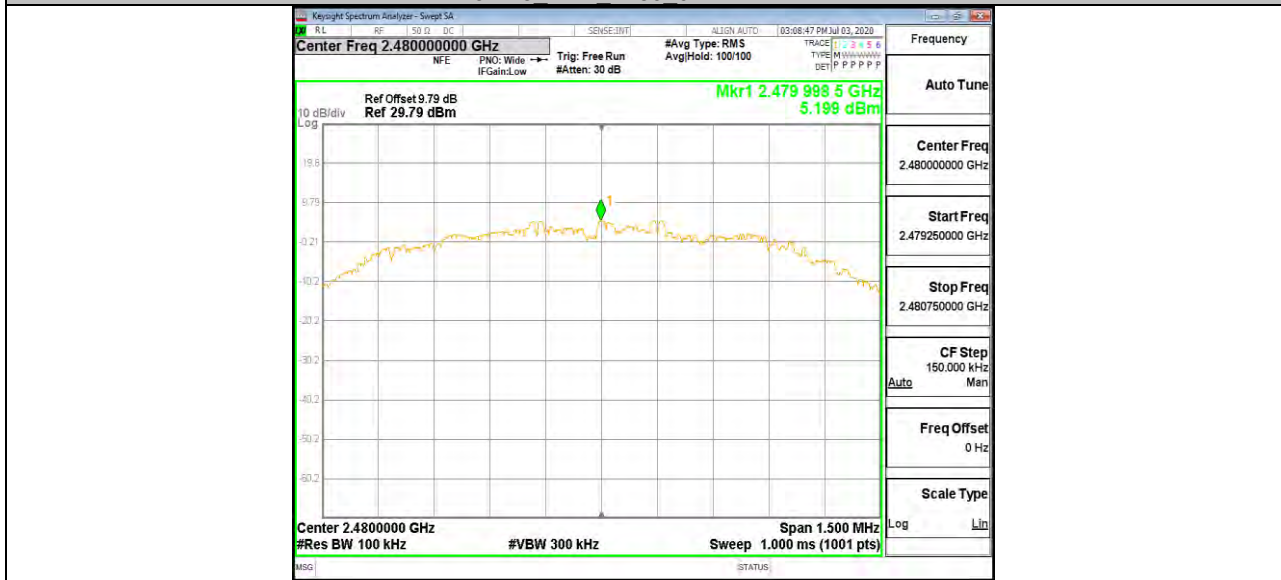

3DH5_Ant2_2480_30~1000

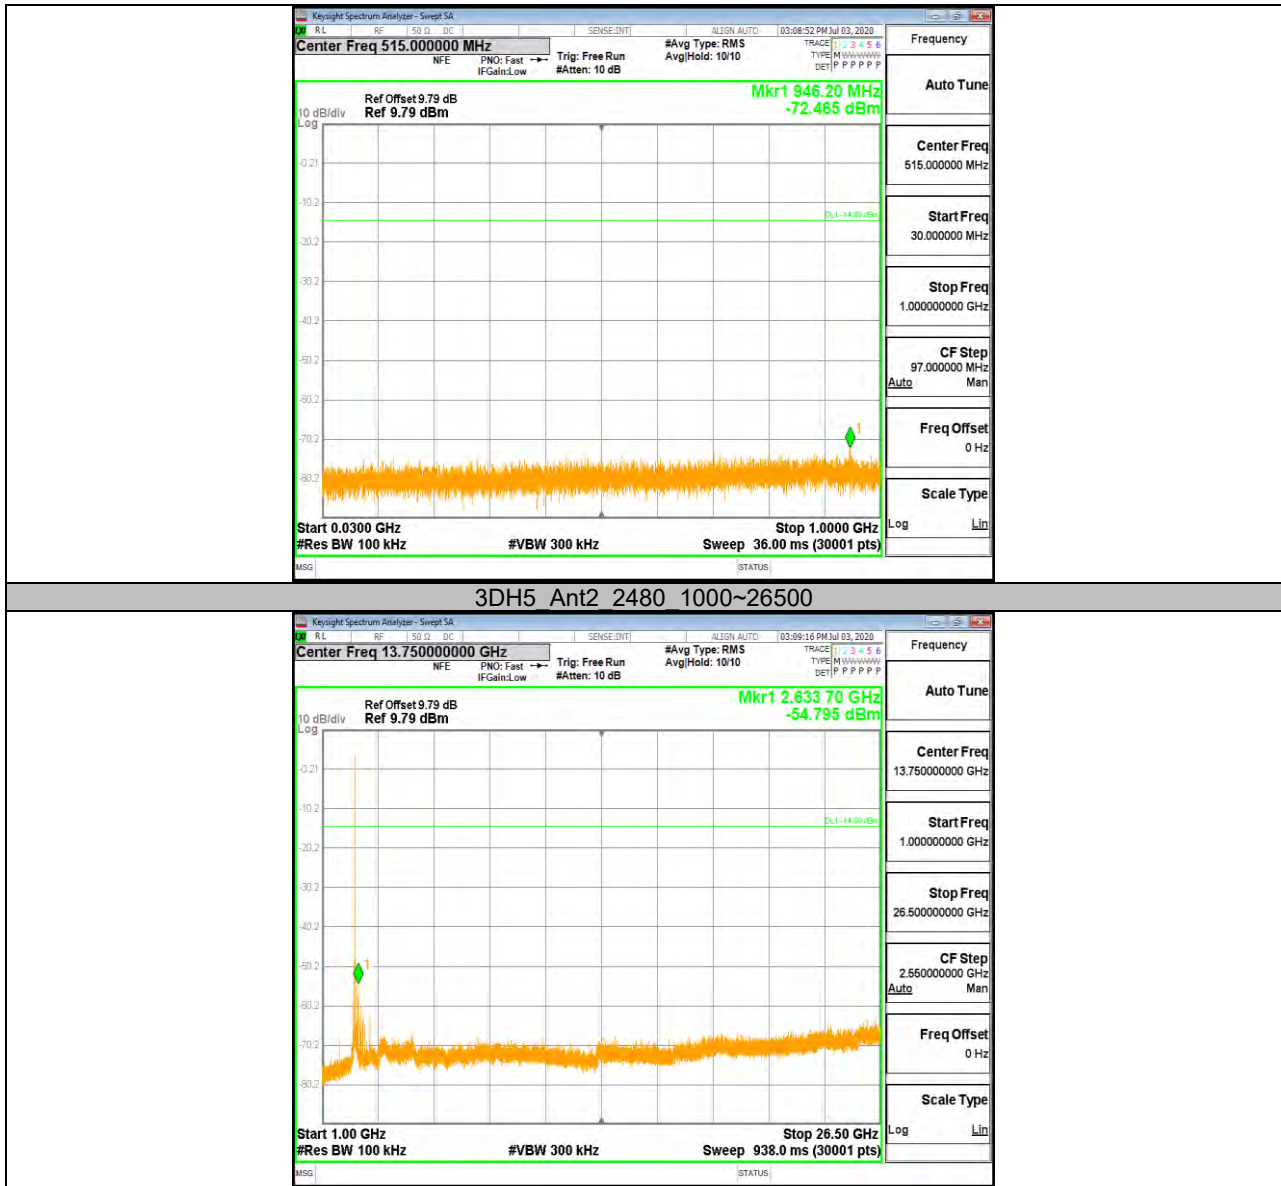



Appendix I: Duty Cycle

Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.883	3.751	0.769	76.9	1.14	1.15	2
3DH5	2.895	3.750	0.772	77.2	1.12	0.15	0.5

Note:

Duty Cycle Correction Factor=10log(1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer then the next higher value should be used.



Test Graphs

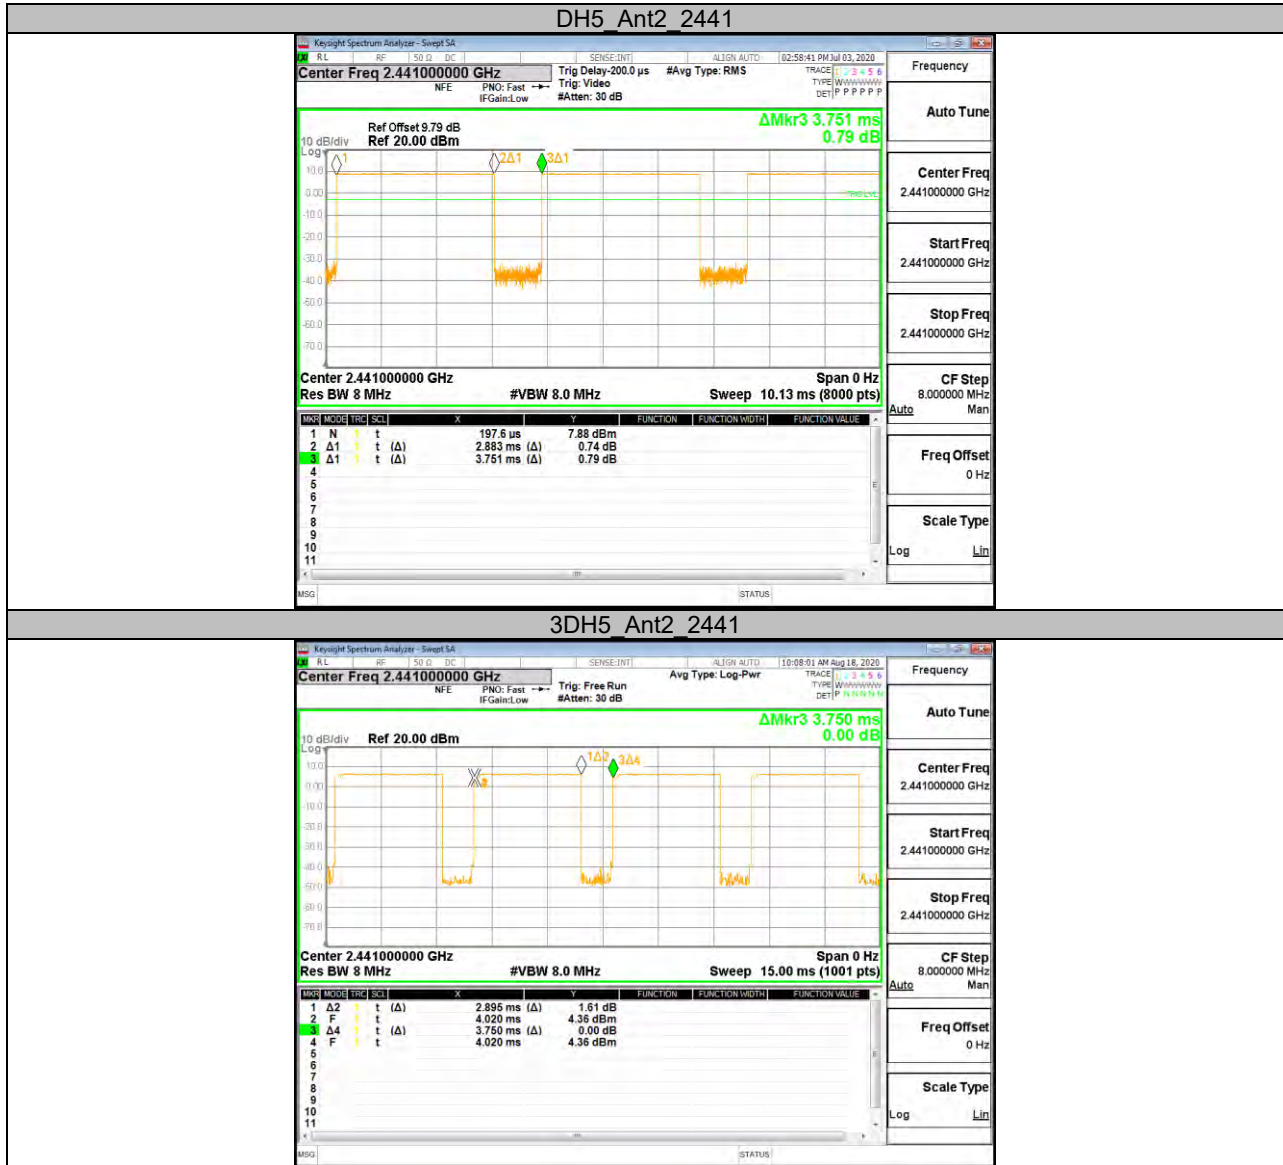

END OF REPORT