



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : lenovo
MODEL NAME : 501LV, 502LV
MARKETING NAME : Lenovo TAB2
FCC ID : O57TAB2A8
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product testing was completed on Jun. 11, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification subjective to this standard 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Component List..... 6

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System..... 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example..... 13

3 TEST RESULT..... 14

 3.1 6dB and 99% Bandwidth Measurement 14

 3.2 Output Power Measurement..... 16

 3.3 Power Spectral Density Measurement 18

 3.4 Conducted Band Edges and Spurious Emission Measurement 20

 3.5 Radiated Band Edges and Spurious Emission Measurement 30

 3.6 AC Conducted Emission Measurement..... 34

 3.7 Antenna Requirements 39

4 LIST OF MEASURING EQUIPMENT 40

5 UNCERTAINTY OF EVALUATION 41

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. SETUP PHOTOGRAPHS

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.31 dB at 154.160 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.81 dB at 0.490 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.
 No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

1.2 Manufacturer

Lenovo PC HK Limited
 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	lenovo
Model Name	501LV, 502LV
Marketing Name	Lenovo TAB2
FCC ID	O57TAB2A8
EUT supports Radios application	GPRS/EGPRS/LTE/ WLAN2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE
HW Version	LenovoPad A8-50F
SW Version	A8-50F_150520
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.03 dBm (0.0505 W) 802.11g : 21.98 dBm (0.1578 W) 802.11n HT20 : 20.59 dBm (0.1146 W)
99% Occupied Bandwidth	802.11b : 12.45MHz 802.11g : 17.40MHz 802.11n HT20 : 18.20MHz
Antenna Type / Gain	PIFA Antenna with gain 1.90 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	
	TH01-KS	CO01-KS

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Component List

Note: There are two types of EUT, the difference between Sample 1 and Sample 2 are for LCM/back camera. The details refer the following table. We only choose sample 1 to perform full tests.

Component	Sample 1	Sample 2
LCM	TFT_8"_1280X800_TTV080WXM-NL0 (BOE)	TFT_8"_1280X800_D0800CS00 (Dongshan)
Back_camera	Camera_500W_AF_L545A00 (O-Film)	Camera_500W-AF_BTBTB_30PIN_FH545AB (Q-tech)



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	17.03	17.00	16.84	16.71

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	21.98	21.59	21.91	21.63	21.72	21.46	21.84	21.92

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	20.59	20.46	20.20	20.03	20.12	20.36	20.47	20.25



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted	Mode 1 : GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 1 + Earphone
Emission	Mode 2 : GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone
Remark: 1. The worst case of conducted emission is mode 2; only the test data of it is reported. 2. For radiated test cases, the tests were performed with adapter 1 and earphone.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

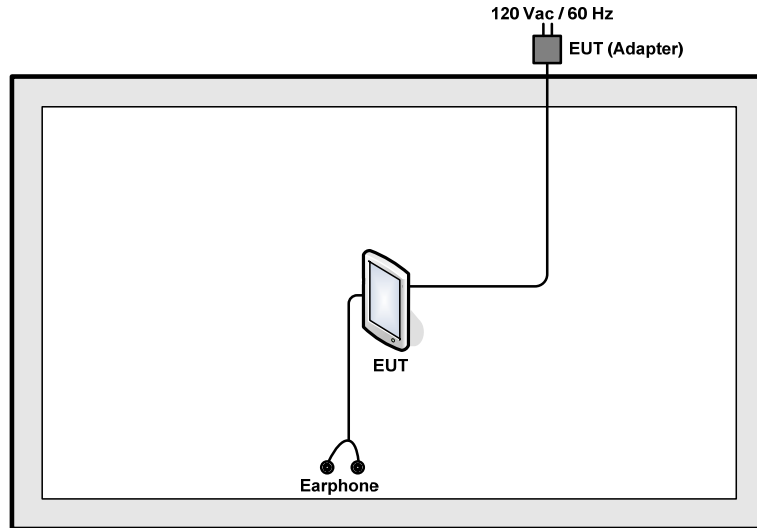

<AC Conducted Emission Mode>

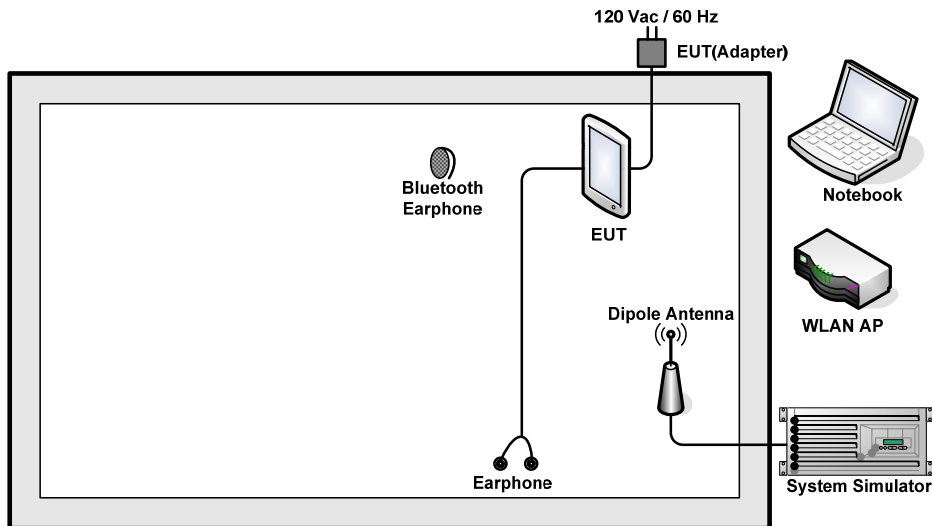

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

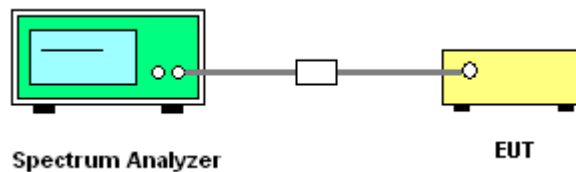



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

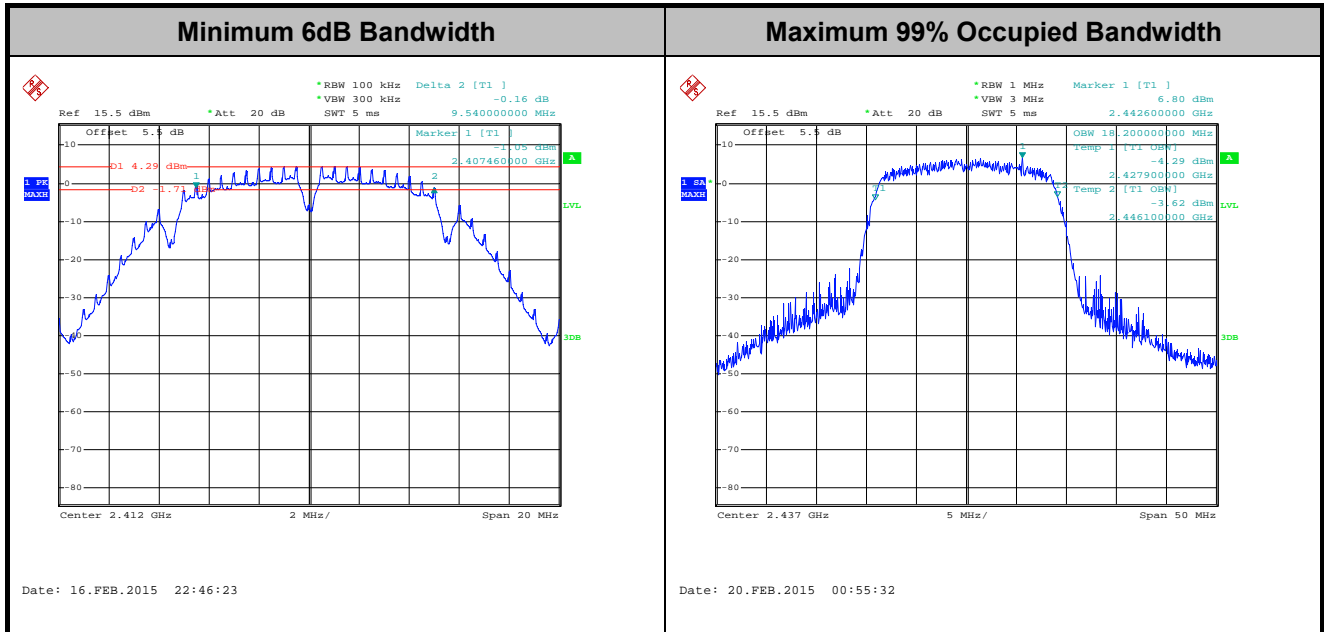

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

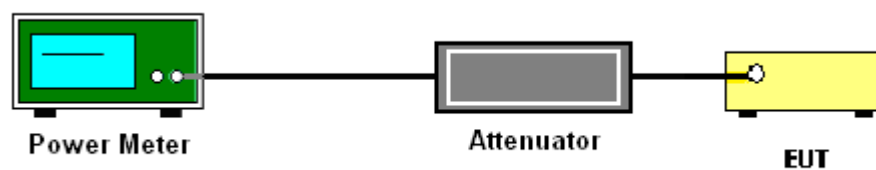



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

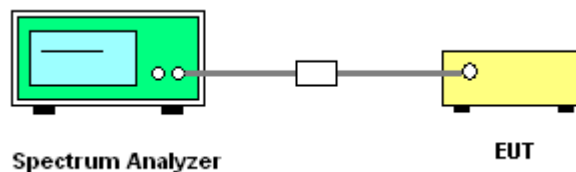



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

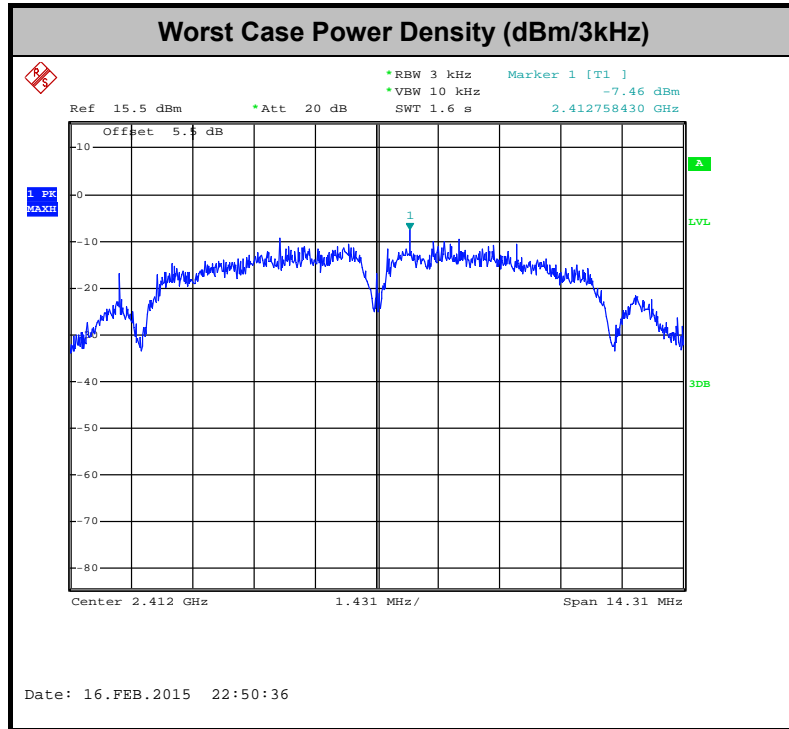

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

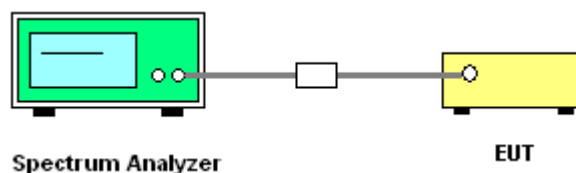





3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11b Channel 01


100kHz PSD reference Level	Low Channel Plot
-----------------------------------	-------------------------

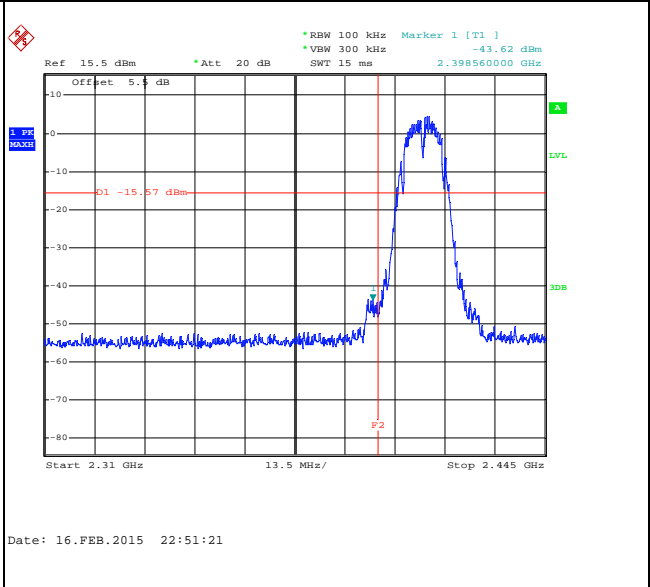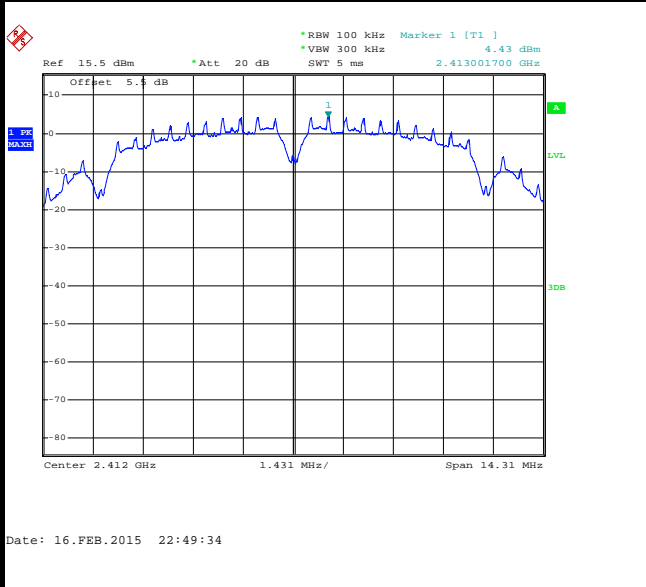

Spurious Emission 30MHz~3GHz

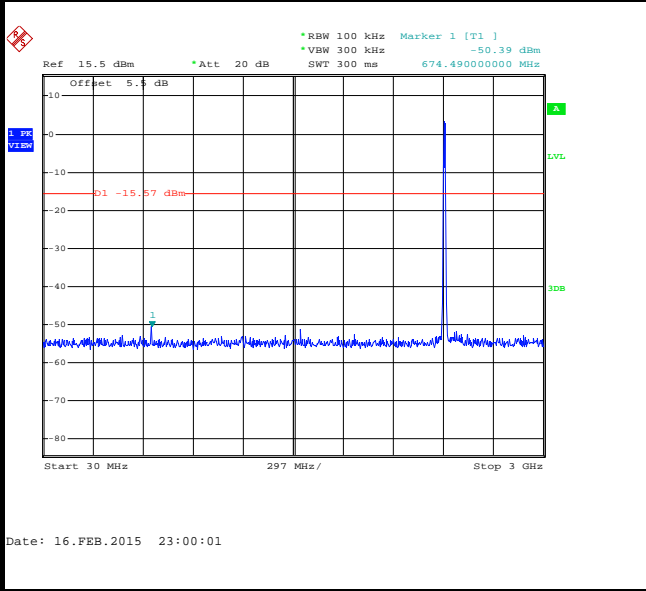

Spurious Emission 2GHz~25GHz

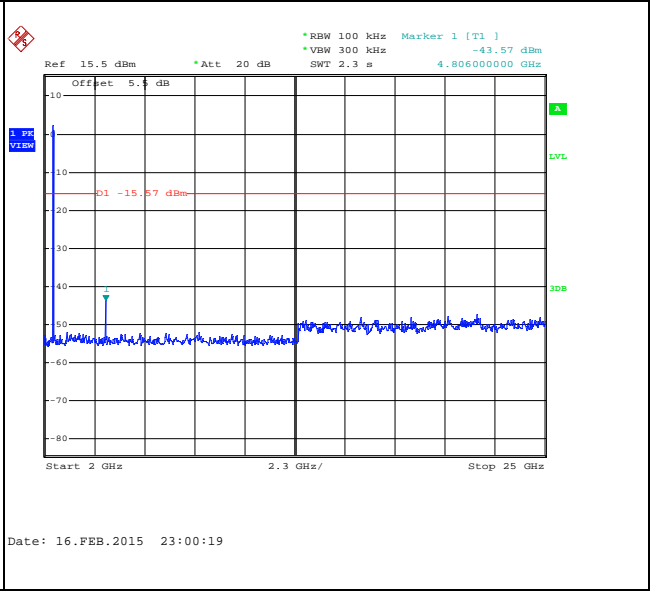




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

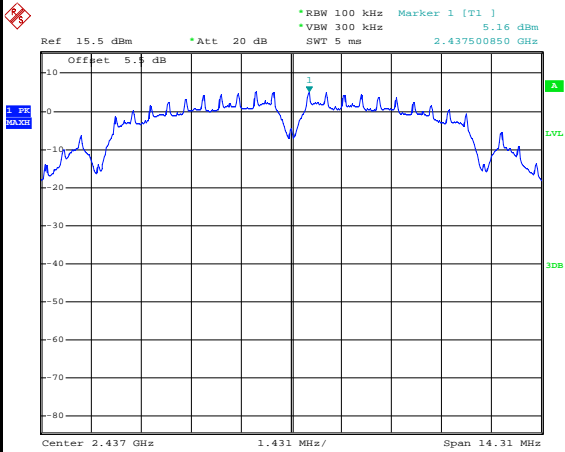


Date: 17.FEB.2015 03:55:33

Spurious Emission 30MHz~3GHz

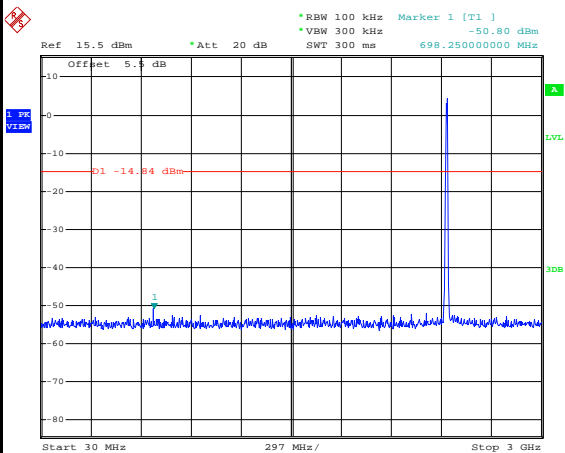

Date: 17.FEB.2015 03:55:55

Spurious Emission 2GHz~25GHz

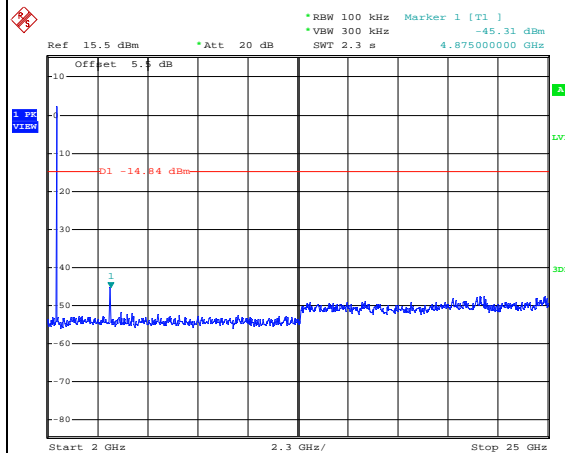


Date: 17.FEB.2015 03:56:13




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11b Channel 11


100kHz PSD reference Level

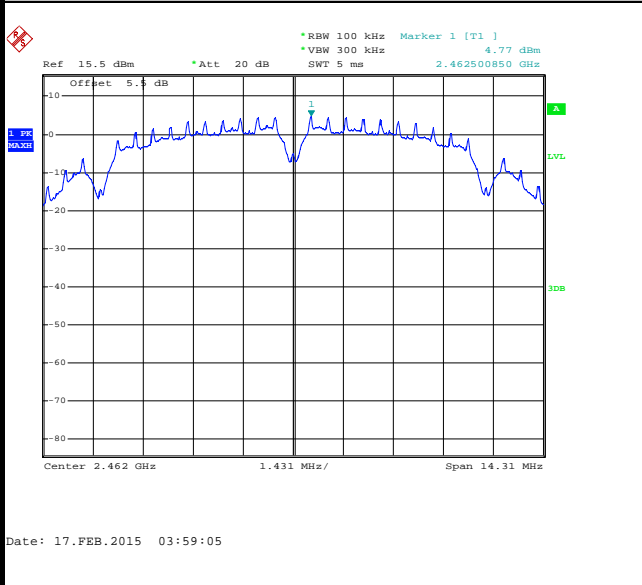


High Channel Plot

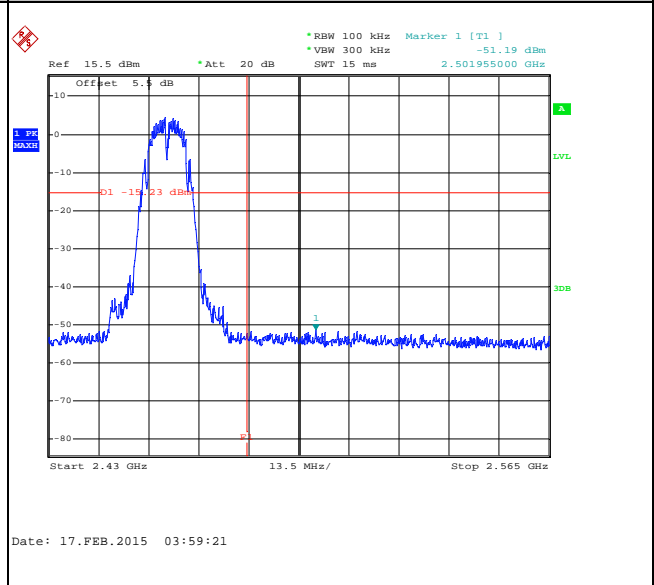

Spurious Emission 30MHz~3GHz

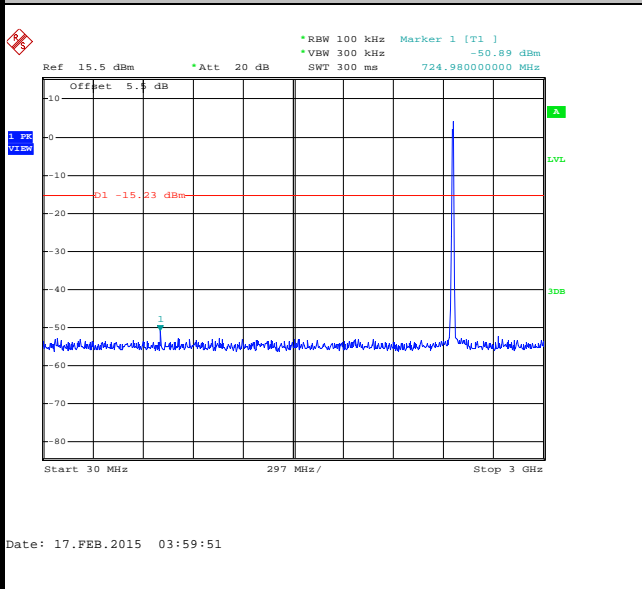

Spurious Emission 2GHz~25GHz

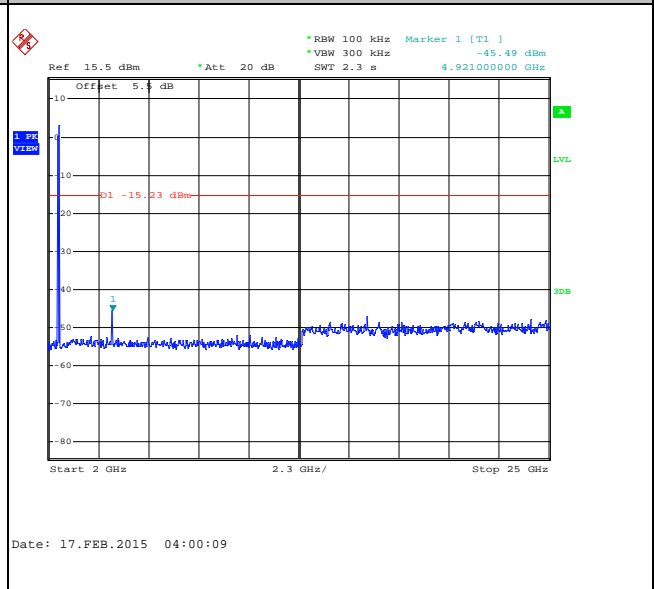




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

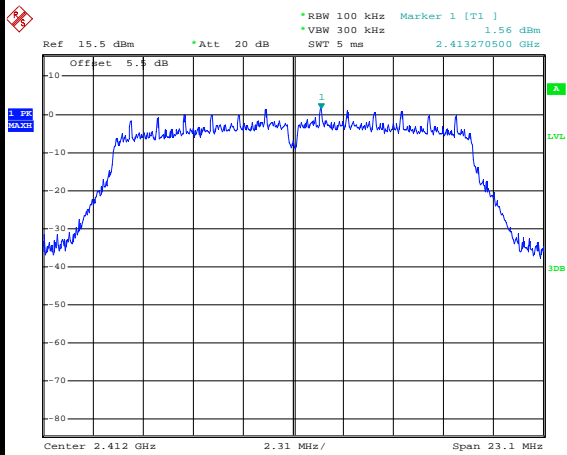


Date: 20.FEB.2015 00:34:10

Low Channel Plot

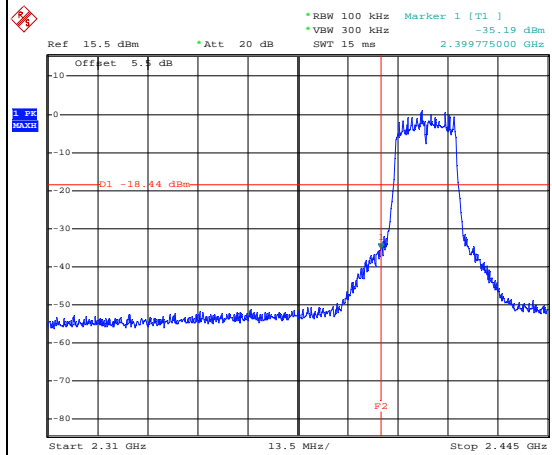


Date: 20.FEB.2015 00:34:54

Spurious Emission 30MHz~3GHz

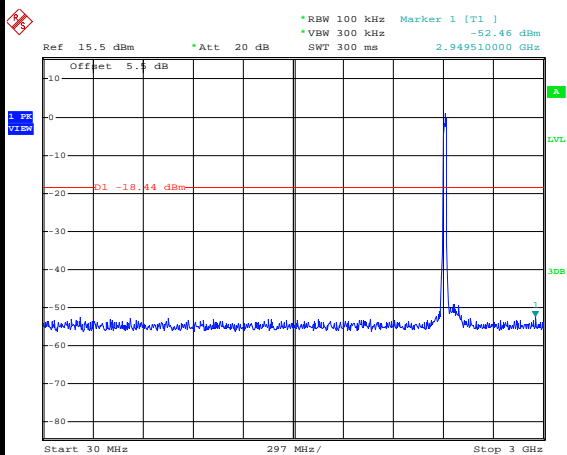

Date: 20.FEB.2015 00:36:39

Spurious Emission 2GHz~25GHz

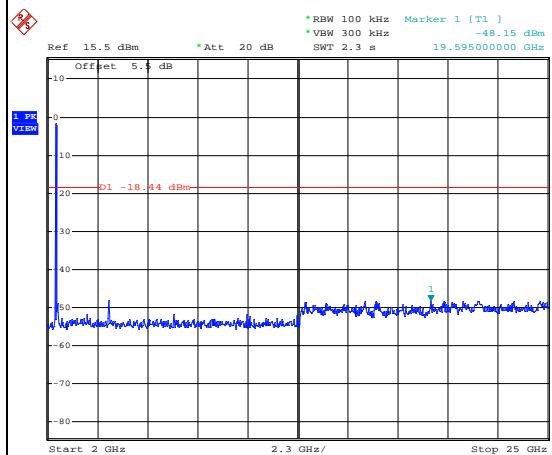


Date: 20.FEB.2015 00:36:57




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11g Channel 06


100kHz PSD reference Level

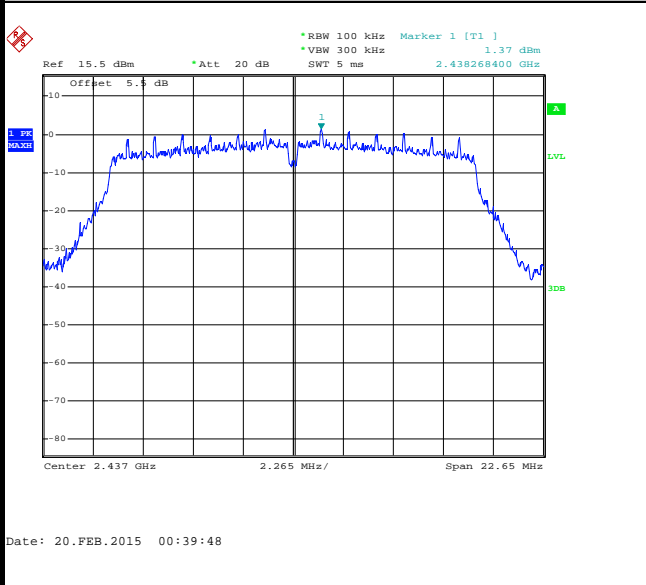

Spurious Emission 30MHz~3GHz

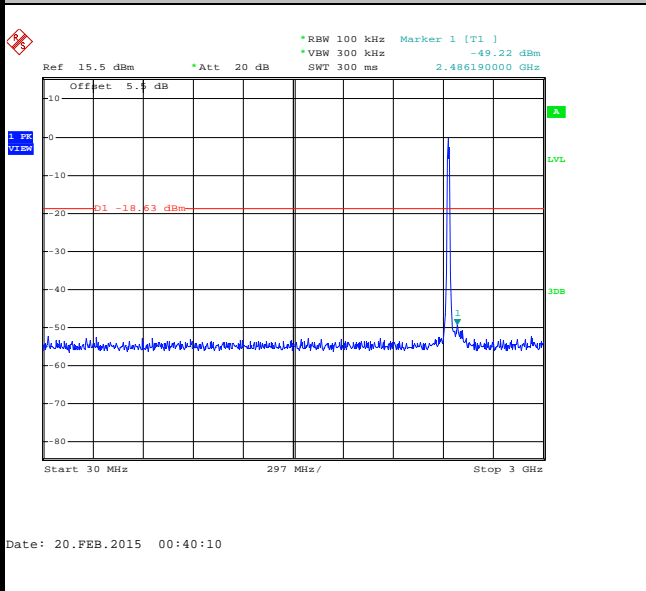

Spurious Emission 2GHz~25GHz

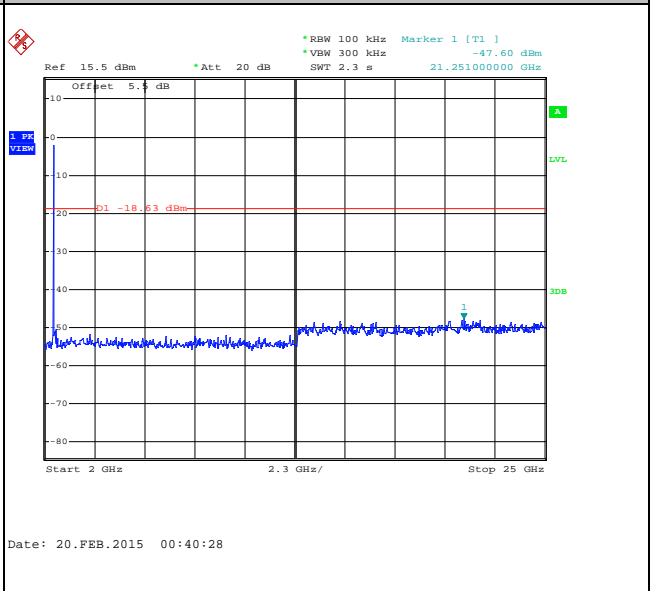





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11g Channel 11


100kHz PSD reference Level

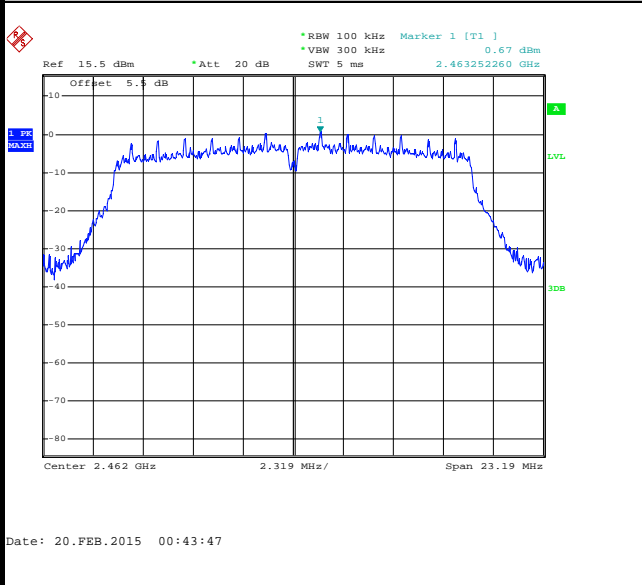


High Channel Plot

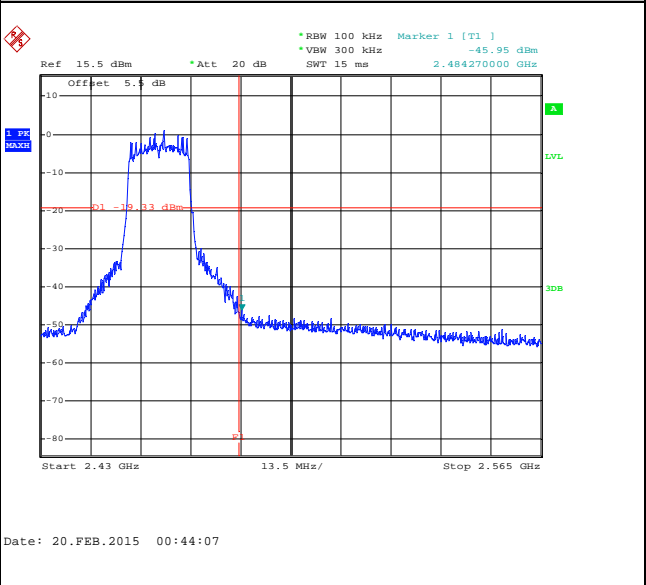

Spurious Emission 30MHz~3GHz

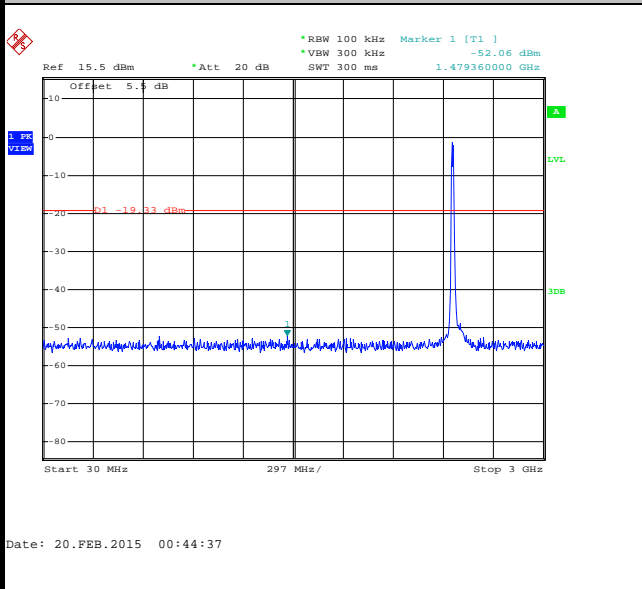

Spurious Emission 2GHz~25GHz

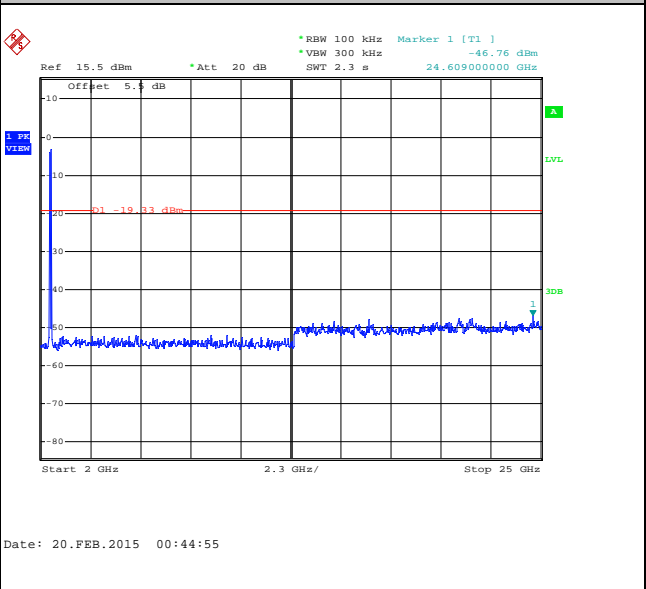





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

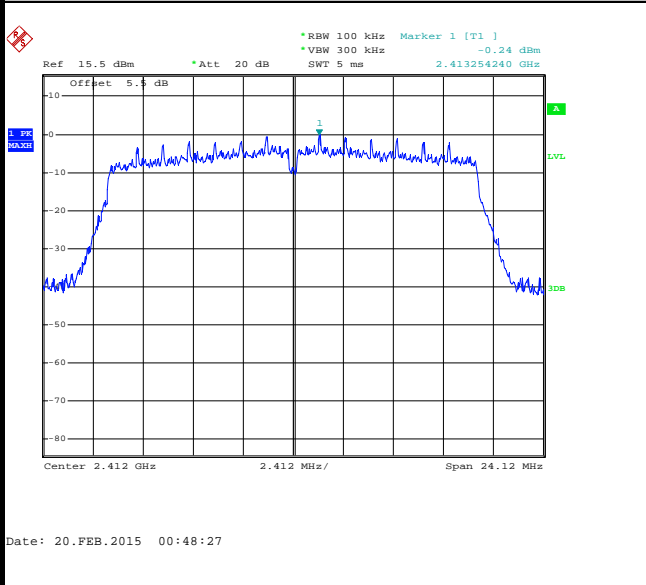


Low Channel Plot

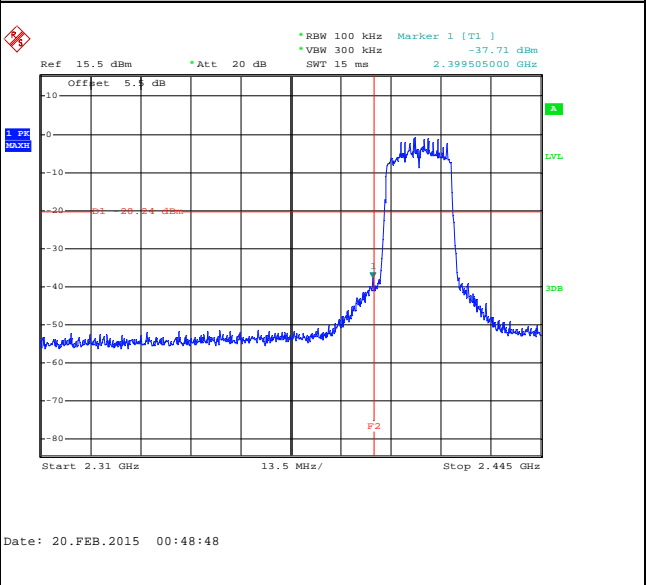

Spurious Emission 30MHz~3GHz

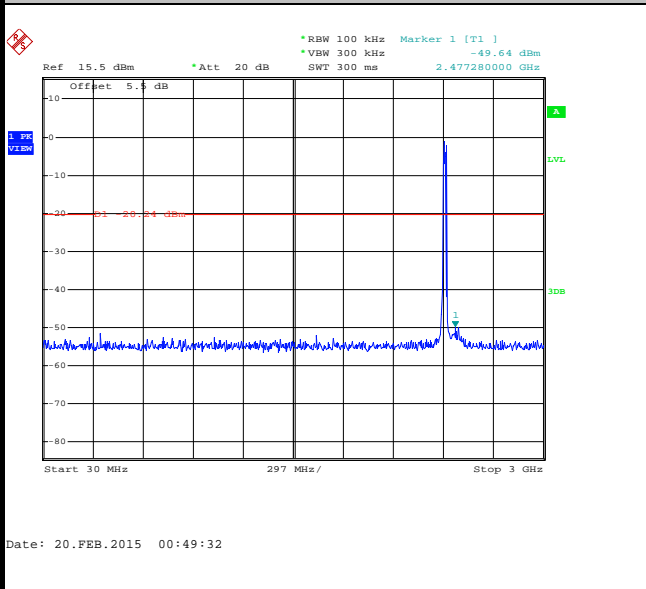

Spurious Emission 2GHz~25GHz

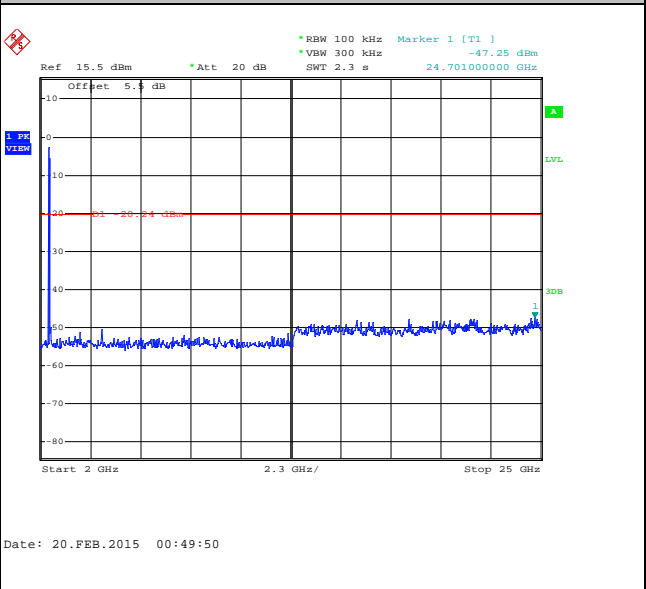





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

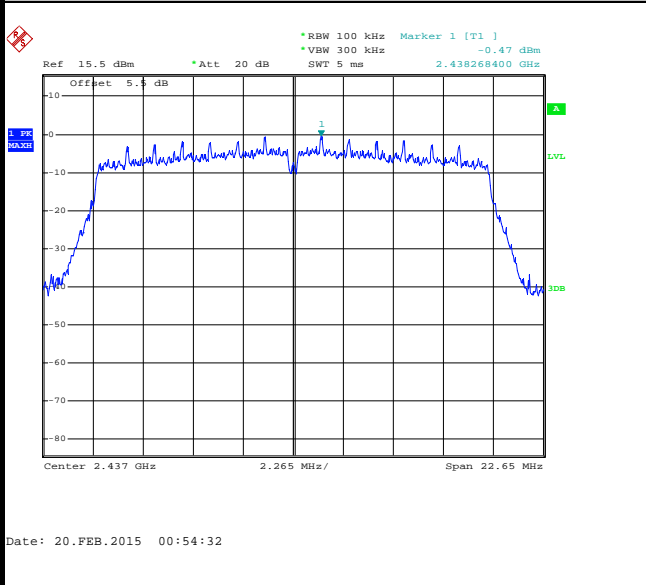

Spurious Emission 30MHz~3GHz

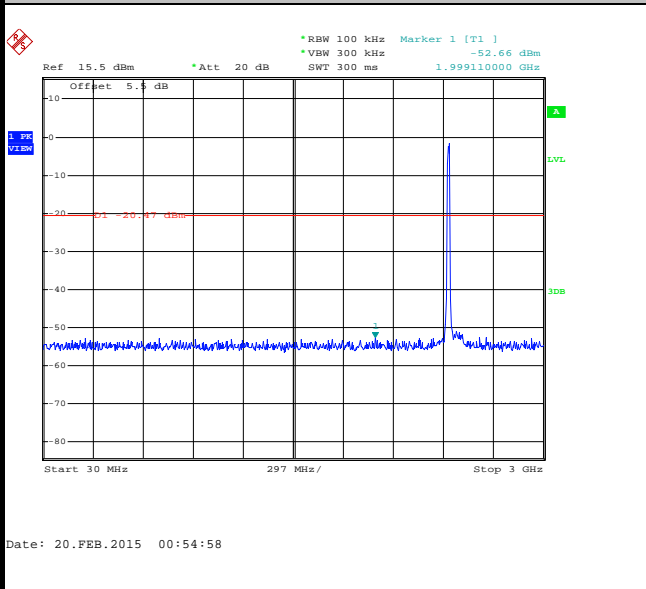

Spurious Emission 2GHz~25GHz

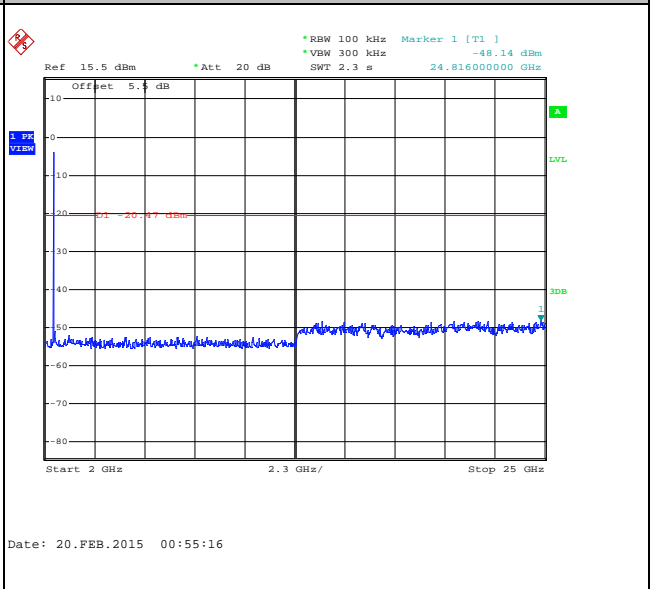





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

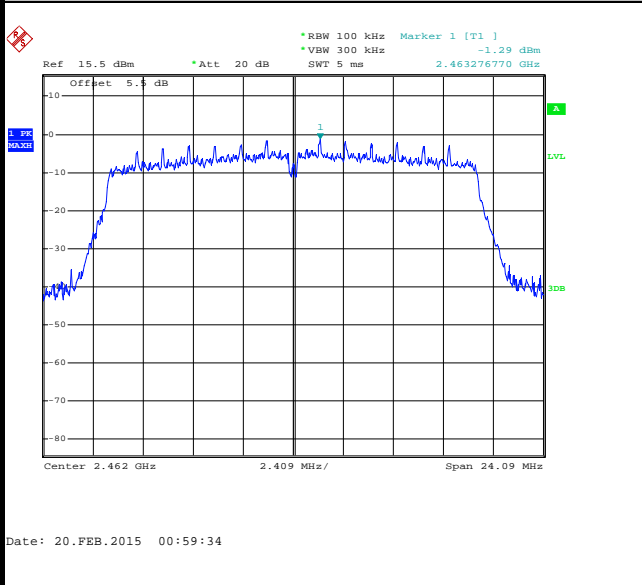


High Channel Plot

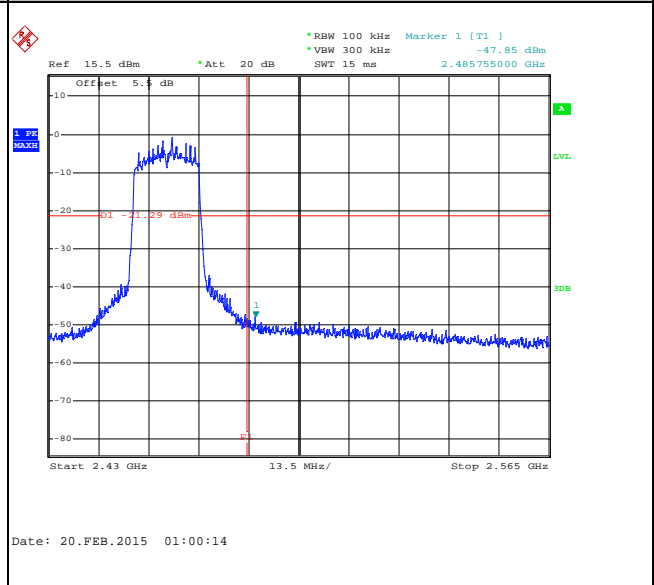

Spurious Emission 30MHz~3GHz

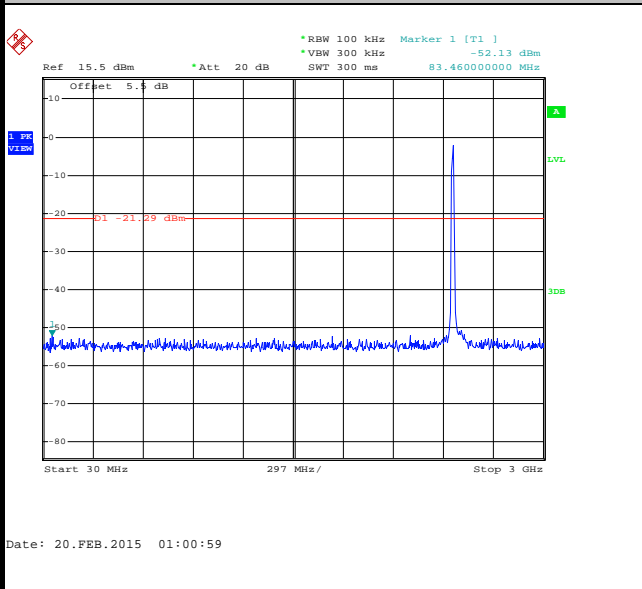

Spurious Emission 2GHz~25GHz

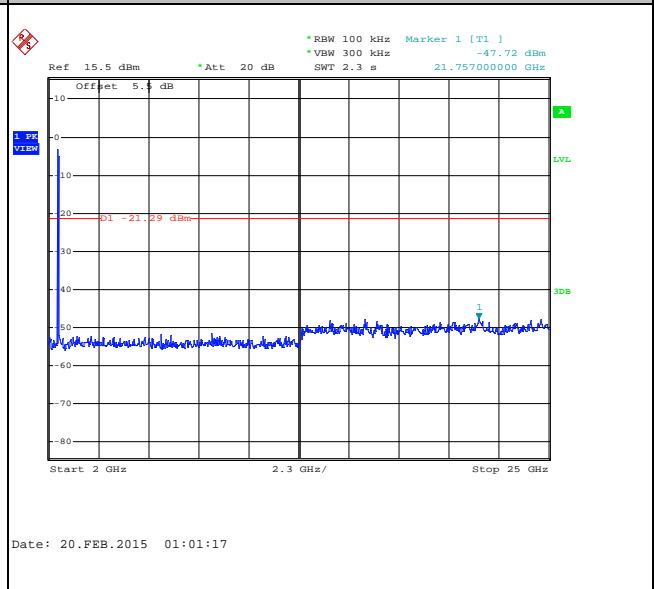



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.


For average measurement:

 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	87.77	1.31	0.77	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

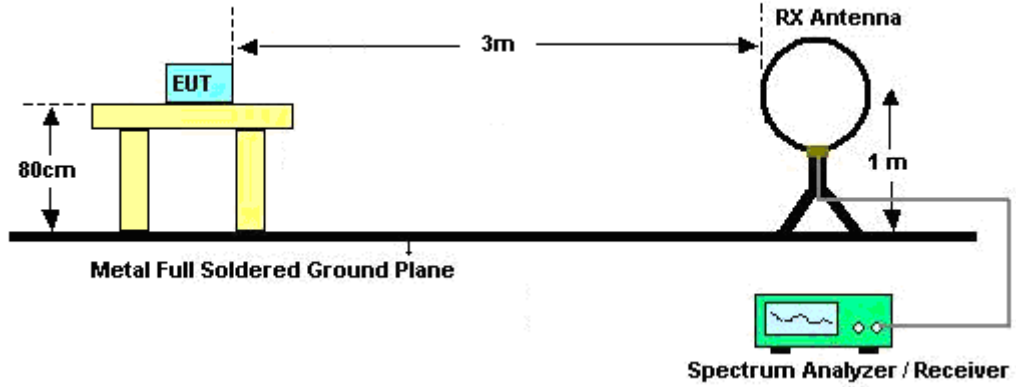

For radiated emissions from 30MHz to 1GHz

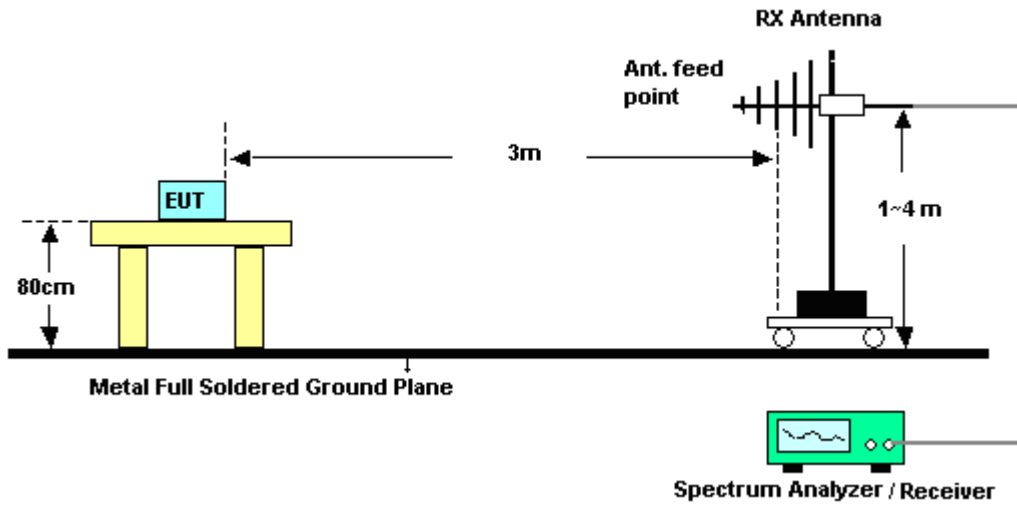

For radiated emissions above 1GHz

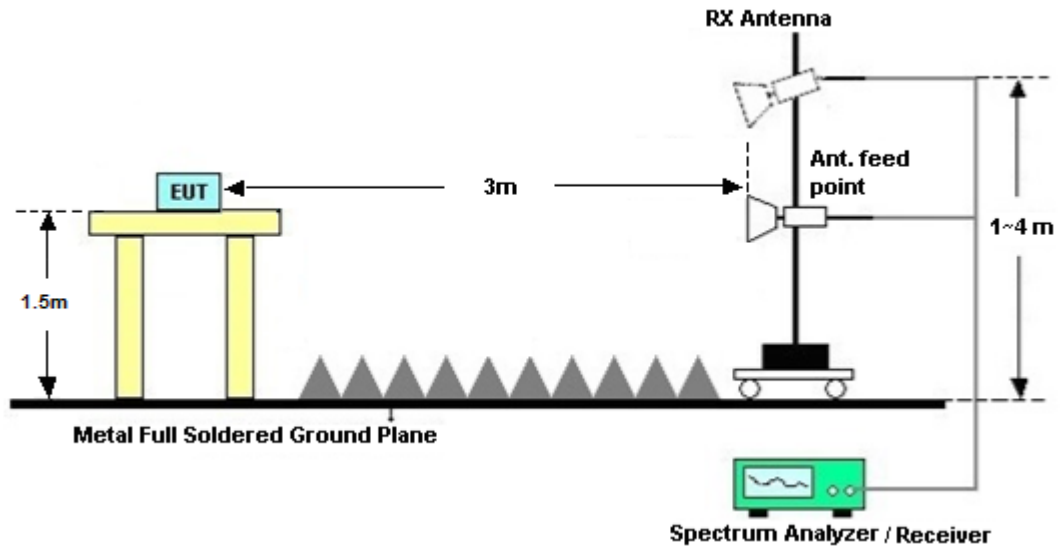

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

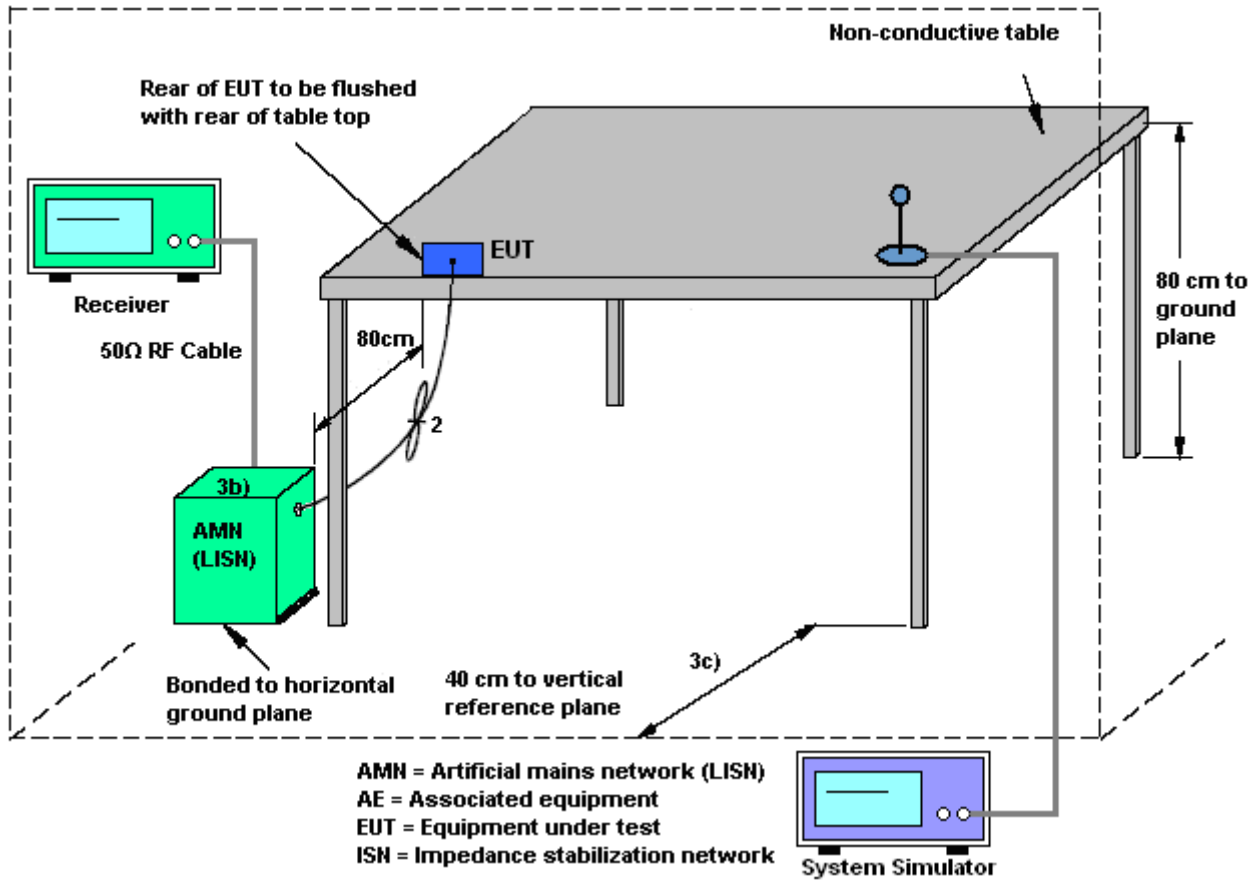



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

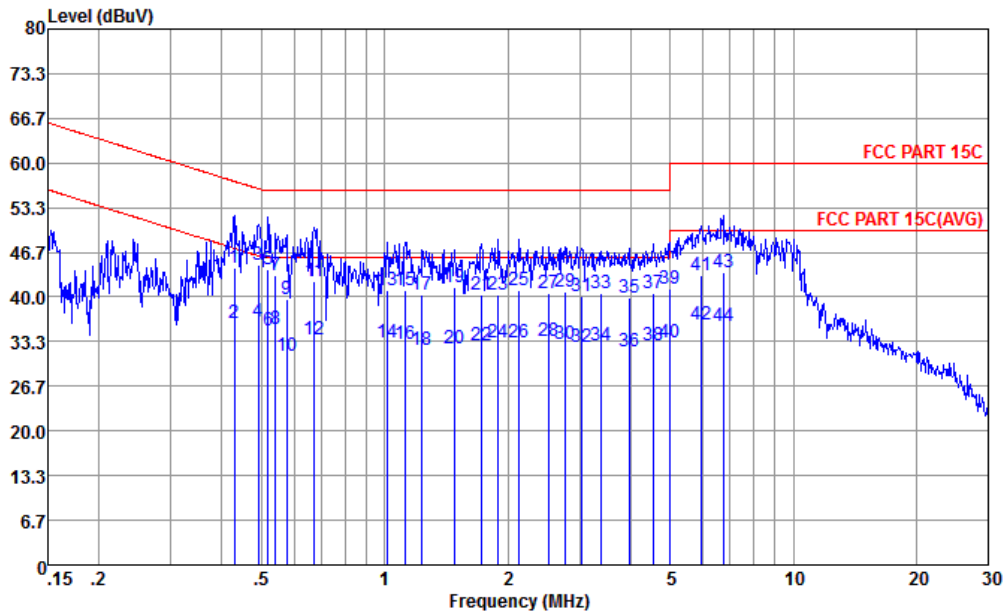


Site : CO01-KS
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.43	44.40	-12.89	57.29	33.50	0.28	10.62	QP
2	0.43	36.20	-11.09	47.29	25.30	0.28	10.62	Average
3	0.49	44.73	-11.41	56.14	33.90	0.21	10.62	QP
4 *	0.49	36.33	-9.81	46.14	25.50	0.21	10.62	Average
5	0.52	44.03	-11.97	56.00	33.20	0.20	10.63	QP
6	0.52	35.03	-10.97	46.00	24.20	0.20	10.63	Average
7	0.54	43.33	-12.67	56.00	32.50	0.20	10.63	QP
8	0.54	35.13	-10.87	46.00	24.30	0.20	10.63	Average
9	0.58	39.73	-16.27	56.00	28.90	0.20	10.63	QP
10	0.58	31.13	-14.87	46.00	20.30	0.20	10.63	Average
11	0.67	42.34	-13.66	56.00	31.50	0.20	10.64	QP
12	0.67	33.64	-12.36	46.00	22.80	0.20	10.64	Average
13	1.02	41.05	-14.95	56.00	30.30	0.10	10.65	QP
14	1.02	33.25	-12.75	46.00	22.50	0.10	10.65	Average
15	1.12	40.96	-15.04	56.00	30.20	0.10	10.66	QP
16	1.12	33.06	-12.94	46.00	22.30	0.10	10.66	Average
17	1.24	40.36	-15.64	56.00	29.60	0.10	10.66	QP
18	1.24	32.16	-13.84	46.00	21.40	0.10	10.66	Average
19	1.48	41.38	-14.62	56.00	30.60	0.10	10.68	QP
20	1.48	32.28	-13.72	46.00	21.50	0.10	10.68	Average
21	1.73	40.39	-15.61	56.00	29.60	0.10	10.69	QP
22	1.73	32.69	-13.31	46.00	21.90	0.10	10.69	Average
23	1.90	40.40	-15.60	56.00	29.60	0.10	10.70	QP
24	1.90	33.30	-12.70	46.00	22.50	0.10	10.70	Average
25	2.13	41.01	-14.99	56.00	30.20	0.10	10.71	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

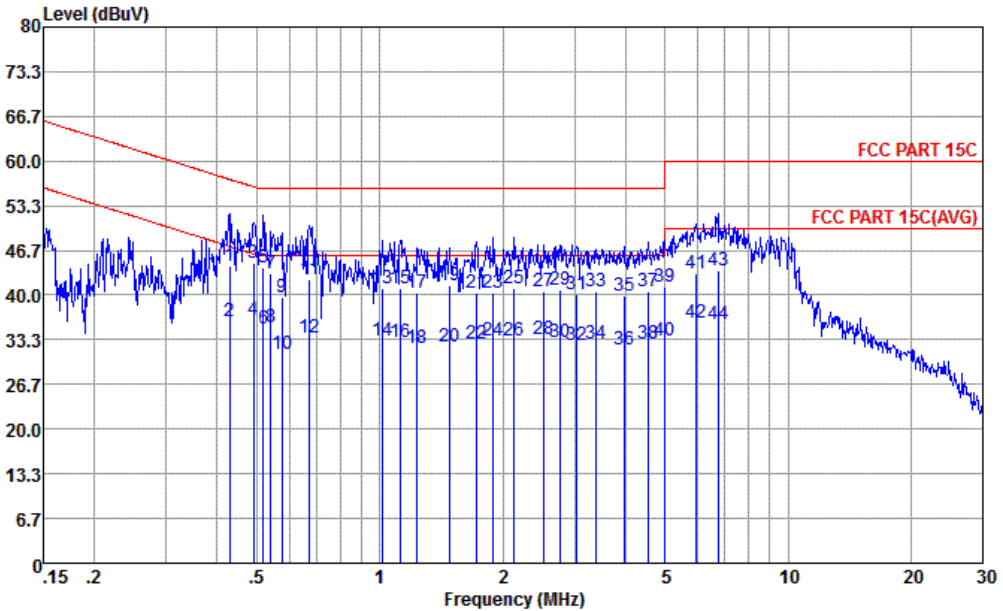


Site : CO01-KS
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
26	2.13	33.11	-12.89	46.00	22.30	0.10	10.71	Average
27	2.53	40.45	-15.55	56.00	29.60	0.12	10.73	QP
28	2.53	33.35	-12.65	46.00	22.50	0.12	10.73	Average
29	2.76	40.78	-15.22	56.00	29.89	0.13	10.76	QP
30	2.76	33.08	-12.92	46.00	22.19	0.13	10.76	Average
31	3.03	40.03	-15.97	56.00	29.10	0.14	10.79	QP
32	3.03	32.53	-13.47	46.00	21.60	0.14	10.79	Average
33	3.38	40.47	-15.53	56.00	29.50	0.16	10.81	QP
34	3.38	32.67	-13.33	46.00	21.70	0.16	10.81	Average
35	3.96	39.81	-16.19	56.00	28.80	0.18	10.83	QP
36	3.96	31.81	-14.19	46.00	20.80	0.18	10.83	Average
37	4.55	40.63	-15.37	56.00	29.60	0.19	10.84	QP
38	4.55	32.83	-13.17	46.00	21.80	0.19	10.84	Average
39	4.98	41.25	-14.75	56.00	30.20	0.20	10.85	QP
40	4.98	33.25	-12.75	46.00	22.20	0.20	10.85	Average
41	5.96	43.28	-16.72	60.00	32.20	0.20	10.88	QP
42	5.96	35.88	-14.12	50.00	24.80	0.20	10.88	Average
43	6.73	43.71	-16.29	60.00	32.60	0.20	10.91	QP
44	6.73	35.61	-14.39	50.00	24.50	0.20	10.91	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

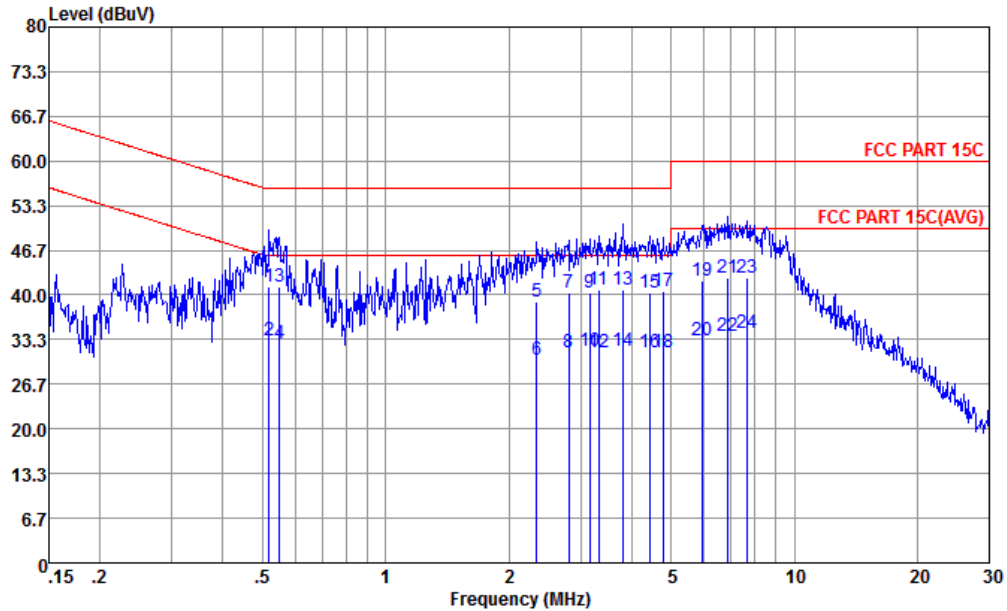

Site : CO01-KS
 Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.52	41.12	-14.88	56.00	30.20	0.29	10.63	QP
2 *	0.52	33.12	-12.88	46.00	22.20	0.29	10.63	Average
3	0.55	41.21	-14.79	56.00	30.30	0.28	10.63	QP
4	0.55	32.71	-13.29	46.00	21.80	0.28	10.63	Average
5	2.35	39.03	-16.97	56.00	28.20	0.11	10.72	QP
6	2.35	30.33	-15.67	46.00	19.50	0.11	10.72	Average
7	2.81	40.39	-15.61	56.00	29.50	0.13	10.76	QP
8	2.81	31.49	-14.51	46.00	20.60	0.13	10.76	Average
9	3.16	40.45	-15.55	56.00	29.50	0.15	10.80	QP
10	3.16	31.55	-14.45	46.00	20.60	0.15	10.80	Average
11	3.33	40.77	-15.23	56.00	29.80	0.16	10.81	QP
12	3.33	31.47	-14.53	46.00	20.50	0.16	10.81	Average
13	3.80	40.80	-15.20	56.00	29.80	0.18	10.82	QP
14	3.80	31.60	-14.40	46.00	20.60	0.18	10.82	Average
15	4.43	40.33	-15.67	56.00	29.30	0.19	10.84	QP
16	4.43	31.33	-14.67	46.00	20.30	0.19	10.84	Average
17	4.77	40.54	-15.46	56.00	29.50	0.20	10.84	QP
18	4.77	31.34	-14.66	46.00	20.30	0.20	10.84	Average
19	5.93	42.18	-17.82	60.00	31.10	0.20	10.88	QP
20	5.93	33.28	-16.72	50.00	22.20	0.20	10.88	Average
21	6.88	42.62	-17.38	60.00	31.50	0.20	10.92	QP
22	6.88	33.92	-16.08	50.00	22.80	0.20	10.92	Average
23	7.65	42.63	-17.37	60.00	31.50	0.20	10.93	QP
24	7.65	34.33	-15.67	50.00	23.20	0.20	10.93	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Feb. 16, 2015~ Feb. 20, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Feb. 16, 2015~ Feb. 20, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Feb. 16, 2015~ Feb. 20, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY522601 85	20Hz~26.5GHz	May 26, 2015	Jun. 11, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Jun. 11, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 06, 2015	Jun. 11, 2015	May 05, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Nov. 07, 2014	Jun. 11, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Jun. 11, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Sep. 04, 2014	Jun. 11, 2015	Sep. 03, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz / 30 dB	Jan. 28, 2015	Jun. 11, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Jun. 11, 2015	May 04, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5G Hz	Jan. 28, 2015	Jun. 11, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 04, 2015	Jun. 02, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9 dB
---	--------



Appendix A. Conducted Test Results

Test Engineer:	Issac Song	Temperature:	21~25	°C
Test Date:	2015/02/16~2015/02/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.45	9.54	0.50	Pass
11b	1Mbps	1	6	2437	12.35	9.54	0.50	Pass
11b	1Mbps	1	11	2462	12.35	9.54	0.50	Pass
11g	6Mbps	1	1	2412	17.40	15.40	0.50	Pass
11g	6Mbps	1	6	2437	17.35	15.10	0.50	Pass
11g	6Mbps	1	11	2462	17.40	15.46	0.50	Pass
HT20	MCS0	1	1	2412	18.10	16.08	0.50	Pass
HT20	MCS0	1	6	2437	18.20	15.10	0.50	Pass
HT20	MCS0	1	11	2462	18.15	16.06	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.47	30.00	1.90	18.37	36.00	Pass
11b	1Mbps	1	6	2437	17.03	30.00	1.90	18.93	36.00	Pass
11b	1Mbps	1	11	2462	16.53	30.00	1.90	18.43	36.00	Pass
11g	6Mbps	1	1	2412	21.59	30.00	1.90	23.49	36.00	Pass
11g	6Mbps	1	6	2437	21.98	30.00	1.90	23.88	36.00	Pass
11g	6Mbps	1	11	2462	21.64	30.00	1.90	23.54	36.00	Pass
HT20	MCS0	1	1	2412	20.19	30.00	1.90	22.09	36.00	Pass
HT20	MCS0	1	6	2437	20.59	30.00	1.90	22.49	36.00	Pass
HT20	MCS0	1	11	2462	20.32	30.00	1.90	22.22	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	13.34
11b	1Mbps	1	6	2437	0.08	13.85
11b	1Mbps	1	11	2462	0.08	13.47
11g	6Mbps	1	1	2412	0.50	12.47
11g	6Mbps	1	6	2437	0.50	12.83
11g	6Mbps	1	11	2462	0.50	12.56
HT20	MCS0	1	1	2412	0.57	10.45
HT20	MCS0	1	6	2437	0.57	10.80
HT20	MCS0	1	11	2462	0.57	10.54

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.46	1.90	8.00	Pass
11b	1Mbps	1	6	2437	-9.93	1.90	8.00	Pass
11b	1Mbps	1	11	2462	-8.29	1.90	8.00	Pass
11g	6Mbps	1	1	2412	-12.27	1.90	8.00	Pass
11g	6Mbps	1	6	2437	-12.63	1.90	8.00	Pass
11g	6Mbps	1	11	2462	-13.52	1.90	8.00	Pass
HT20	MCS0	1	1	2412	-15.13	1.90	8.00	Pass
HT20	MCS0	1	6	2437	-13.94	1.90	8.00	Pass
HT20	MCS0	1	11	2462	-13.87	1.90	8.00	Pass



Appendix B. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2388.48	43.35	-30.65	74	44.01	27.25	9.32	37.23	177	128	P	H
		2389.92	29.92	-24.08	54	30.58	27.25	9.32	37.23	177	128	A	H
	*	2412	104.56	-	-	105.06	27.31	9.43	37.24	177	128	P	H
	*	2412	99.86	-	-	100.36	27.31	9.43	37.24	177	128	A	H
		2343.39	43.56	-30.44	74	44.47	27.07	9.2	37.18	249	95	P	V
		2389.92	29.61	-24.39	54	30.27	27.25	9.32	37.23	249	95	A	V
	*	2412	103.85	-	-	104.35	27.31	9.43	37.24	249	95	P	V
	*	2412	99.13	-	-	99.63	27.31	9.43	37.24	249	95	A	V
802.11b CH 06 2437MHz		2331.96	43.32	-30.68	74	44.27	27.01	9.2	37.16	177	128	P	H
		2374.71	30.91	-23.09	54	31.61	27.19	9.32	37.21	158	107	A	H
	*	2437	104.68	-	-	105.1	27.42	9.43	37.27	177	128	P	H
	*	2437	99.72	-	-	100.14	27.42	9.43	37.27	177	128	A	H
		2484.12	47	-27	74	47.21	27.54	9.55	37.3	177	128	P	H
		2485.12	32.95	-21.05	54	33.16	27.54	9.55	37.3	177	128	A	H
		2368.23	43.21	-30.79	74	44.07	27.13	9.2	37.19	158	107	P	V
		2389.92	29.45	-24.55	54	30.11	27.25	9.32	37.23	158	107	A	V
	*	2437	104.06	-	-	104.48	27.42	9.43	37.27	158	107	P	V
	*	2437	99.17	-	-	99.59	27.42	9.43	37.27	158	107	A	V
		2484.32	47.27	-26.73	74	47.48	27.54	9.55	37.3	158	107	P	V
	2483.76	33	-21	54	33.21	27.54	9.55	37.3	158	107	A	V	



802.11b CH 11 2462MHz	*	2462	105.56	-	-	105.82	27.48	9.55	37.29	177	128	P	H
	*	2462	100.24	-	-	100.5	27.48	9.55	37.29	177	128	A	H
		2486.44	46.98	-27.02	74	47.19	27.54	9.55	37.3	177	128	P	H
		2485.28	34.27	-19.73	54	34.48	27.54	9.55	37.3	177	128	A	H
	*	2462	104.83	-	-	105.09	27.48	9.55	37.29	249	96	P	V
	*	2462	99.7	-	-	99.96	27.48	9.55	37.29	249	96	A	V
		2485.48	47.15	-26.85	74	47.36	27.54	9.55	37.3	249	96	P	V
		2485.28	33.94	-20.06	54	34.15	27.54	9.55	37.3	249	96	A	V

Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line.
--------	---



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	41.83	-32.17	74	33.68	31.26	13.37	36.48	105	198	P	H
		4824	43.12	-30.88	74	34.97	31.26	13.37	36.48	105	198	P	V
802.11b CH 06 2437MHz		4874	42.48	-31.52	74	34.09	31.36	13.48	36.45	145	265	P	H
		7311	47.71	-26.29	74	32.78	35.96	16.59	37.62	174	321	P	H
		4874	43.06	-30.94	74	34.67	31.36	13.48	36.45	145	265	P	V
		7311	48.32	-25.68	74	33.39	35.96	16.59	37.62	174	321	P	V
802.11b CH 11 2462MHz		4924	41.41	-32.59	74	32.78	31.46	13.59	36.42	146	347	P	H
		7386	46.38	-27.62	74	31.27	36.08	16.66	37.63	145	274	P	H
		4924	42.01	-31.99	74	33.38	31.46	13.59	36.42	146	347	P	V
		7386	44.93	-29.07	74	29.82	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.92	51.12	-22.88	74	51.78	27.25	9.32	37.23	168	129	P	H
		2389.92	34.09	-19.91	54	34.75	27.25	9.32	37.23	168	129	A	H
	*	2412	107.08	-	-	107.58	27.31	9.43	37.24	168	129	P	H
	*	2412	97.43	-	-	97.93	27.31	9.43	37.24	168	129	A	H
		2389.83	47.39	-26.61	74	48.05	27.25	9.32	37.23	170	86	P	V
		2389.92	32.86	-21.14	54	33.52	27.25	9.32	37.23	170	86	A	V
	*	2412	105.63	-	-	106.13	27.31	9.43	37.24	170	86	P	V
	*	2412	96.02	-	-	96.52	27.31	9.43	37.24	170	86	A	V
802.11g CH 06 2437MHz		2353.83	43.17	-30.83	74	44.03	27.13	9.2	37.19	169	129	P	H
		2389.92	30.94	-23.06	54	31.6	27.25	9.32	37.23	169	129	A	H
	*	2437	107.33	-	-	107.75	27.42	9.43	37.27	169	129	P	H
	*	2437	96.75	-	-	97.17	27.42	9.43	37.27	169	129	A	H
		2485.6	53.23	-20.77	74	53.44	27.54	9.55	37.3	169	129	P	H
		2484.12	37.4	-16.6	54	37.61	27.54	9.55	37.3	169	129	A	H
		2364.09	43.17	-30.83	74	44.03	27.13	9.2	37.19	250	91	P	V
		2389.92	30.65	-23.35	54	31.31	27.25	9.32	37.23	250	91	A	V
	*	2437	105.84	-	-	106.26	27.42	9.43	37.27	250	91	P	V
	*	2437	95.93	-	-	96.35	27.42	9.43	37.27	250	91	A	V
		2486.12	52.79	-21.21	74	53	27.54	9.55	37.3	250	91	P	V
		2483.76	37.09	-16.91	54	37.3	27.54	9.55	37.3	250	91	A	V



802.11g CH 11 2462MHz	*	2462	108.37	-	-	108.63	27.48	9.55	37.29	150	120	P	H
	*	2462	97.85	-	-	98.11	27.48	9.55	37.29	150	120	A	H
		2484.16	64.64	-9.36	74	64.85	27.54	9.55	37.3	150	120	P	H
		2483.52	45.1	-8.9	54	45.31	27.54	9.55	37.3	150	120	A	H
	*	2462	106.06	-	-	106.32	27.48	9.55	37.29	228	109	P	V
	*	2462	95.67	-	-	95.93	27.48	9.55	37.29	228	109	A	V
		2483.72	64.82	-9.18	74	65.03	27.54	9.55	37.3	228	109	P	V
		2483.52	43.72	-10.28	54	43.93	27.54	9.55	37.3	228	109	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	39.13	-34.87	74	30.98	31.26	13.37	36.48	105	198	P	H
		4824	43.08	-30.92	74	34.93	31.26	13.37	36.48	105	198	P	V
802.11g CH 06 2437MHz		4874	44.81	-29.19	74	36.42	31.36	13.48	36.45	145	265	P	H
		7311	50.79	-23.21	74	35.86	35.96	16.59	37.62	174	321	P	H
		4874	43.35	-30.65	74	34.96	31.36	13.48	36.45	145	265	P	V
		7311	50.13	-23.87	74	35.2	35.96	16.59	37.62	174	321	P	V
802.11g CH 11 2462MHz		4924	43.55	-30.45	74	34.92	31.46	13.59	36.42	146	347	P	H
		7386	46.84	-27.16	74	31.73	36.08	16.66	37.63	145	274	P	H
		4924	42.26	-31.74	74	33.63	31.46	13.59	36.42	146	347	P	V
		7386	46.55	-27.45	74	31.44	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.74	46.87	-27.13	74	47.53	27.25	9.32	37.23	152	130	P	H
		2389.92	32.84	-21.16	54	33.5	27.25	9.32	37.23	152	130	A	H
	*	2412	104.23	-	-	104.73	27.31	9.43	37.24	152	130	P	H
	*	2412	94.26	-	-	94.76	27.31	9.43	37.24	152	130	A	H
		2389.92	45.89	-28.11	74	46.55	27.25	9.32	37.23	248	114	P	V
		2389.92	31.71	-22.29	54	32.37	27.25	9.32	37.23	248	114	A	V
	*	2412	103.65	-	-	104.15	27.31	9.43	37.24	248	114	P	V
	*	2412	93.56	-	-	94.06	27.31	9.43	37.24	248	114	A	V
802.11n HT20 CH 06 2437MHz		2384.97	43.03	-30.97	74	43.73	27.19	9.32	37.21	152	130	P	H
		2389.92	31.01	-22.99	54	31.67	27.25	9.32	37.23	152	130	A	H
	*	2437	105.05	-	-	105.47	27.42	9.43	37.27	152	130	P	H
	*	2437	95.39	-	-	95.81	27.42	9.43	37.27	152	130	A	H
		2483.56	51.64	-22.36	74	51.85	27.54	9.55	37.3	152	130	P	H
		2483.52	37.86	-16.14	54	38.07	27.54	9.55	37.3	152	130	A	H
		2383.17	43.28	-30.72	74	43.98	27.19	9.32	37.21	248	114	P	V
		2389.92	30.55	-23.45	54	31.21	27.25	9.32	37.23	248	114	A	V
	*	2437	104.1	-	-	104.52	27.42	9.43	37.27	248	114	P	V
	*	2437	94.29	-	-	94.71	27.42	9.43	37.27	248	114	A	V
		2485.88	50.56	-23.44	74	50.77	27.54	9.55	37.3	248	114	P	V
	2483.52	36.92	-17.08	54	37.13	27.54	9.55	37.3	248	114	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	105.18	-	-	105.44	27.48	9.55	37.29	150	132	P	H
	*	2462	95.27	-	-	95.53	27.48	9.55	37.29	150	132	A	H
		2483.68	62.16	-11.84	74	62.37	27.54	9.55	37.3	150	132	P	H
		2483.52	42.21	-11.79	54	42.42	27.54	9.55	37.3	150	132	A	H
	*	2462	103.61	-	-	103.87	27.48	9.55	37.29	248	114	P	V
	*	2462	93.61	-	-	93.87	27.48	9.55	37.29	248	114	A	V
		2483.56	60.92	-13.08	74	61.13	27.54	9.55	37.3	248	114	P	V
		2483.52	41.83	-12.17	54	42.04	27.54	9.55	37.3	248	114	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	38.85	-35.15	74	30.7	31.26	13.37	36.48	105	198	P	H
		4824	42.44	-31.56	74	34.29	31.26	13.37	36.48	105	198	P	V
802.11n HT20 CH 06 2437MHz		4874	38.79	-35.21	74	30.4	31.36	13.48	36.45	145	265	P	H
		7311	44.2	-29.8	74	29.27	35.96	16.59	37.62	174	321	P	H
		4874	38.74	-35.26	74	30.35	31.36	13.48	36.45	145	265	P	V
		7311	44.88	-29.12	74	29.95	35.96	16.59	37.62	174	321	P	V
802.11n HT20 CH 11 2462MHz		4924	43.97	-30.03	74	35.34	31.46	13.59	36.42	146	347	P	H
		7386	47.04	-26.96	74	31.93	36.08	16.66	37.63	145	274	P	H
		4924	39.91	-34.09	74	31.28	31.46	13.59	36.42	146	347	P	V
		7386	43.69	-30.31	74	28.58	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		108.57	35.36	-8.14	43.5	55.22	12.11	1.38	33.35	-	-	P	H
		154.16	40.19	-3.31	43.5	60.79	11.1	1.53	33.23	100	360	P	H
		183.26	39.61	-3.89	43.5	60.76	10.46	1.57	33.18	-	-	P	H
		236.61	40.66	-5.34	46	60.5	11.47	1.8	33.11	-	-	P	H
		294.81	36.21	-9.79	46	53.7	13.62	1.94	33.05	-	-	P	H
		355.92	37.18	-8.82	46	52.71	15.32	2.04	32.89	-	-	P	H
		30	35.59	-4.41	40	49.75	18.2	1	33.36	100	250	P	V
		107.6	34.78	-8.72	43.5	54.62	12.13	1.38	33.35	-	-	P	V
		154.16	34.21	-9.29	43.5	54.81	11.1	1.53	33.23	-	-	P	V
		184.23	38.41	-5.09	43.5	59.58	10.44	1.57	33.18	-	-	P	V
		233.7	35.63	-10.37	46	55.59	11.36	1.8	33.12	-	-	P	V
		294.81	37.68	-8.32	46	55.17	13.62	1.94	33.05	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.