

Report No.: SUZR/2021/C002406

Rev.: 01 Page: 1 of 56

# FCC SAR TEST REPORT

Application No.: ZR/2021/C0024

Applicant: Lenovo(Shanghai) Electronics Technology Co., Ltd.

Manufacturer: Lenovo PC HK Limited

Product Name: Portable Tablet Computer

Model No.(EUT): TB125FU
Trade Mark: Lenovo

FCC ID: O57TB125FU

Standards: FCC 47CFR §2.1093

**Date of Receipt:** 2021-12-29

**Date of Test:** 2022-01-17 to 2022-01-20

Date of Issue: 2022-01-25
Test conclusion: PASS \*

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and. for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms.and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on texnerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South M.N. E Flart, N.N. 1, Runsleng Ross, Suthou Mudstrial Part, Suthou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 t (86-512) 62992980 中国 • 苏州 · 中国(江苏)自由贸易试验区苏州上区苏州工业园区园胜路(号的6月)房南部 鄉編:215000 t (86-512) 62992980

sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 2 of 56

### **REVISION HISTORY**

Report Number	Revision	Description	Issue Date
SUZR/2021/C002406	01	Original	2022-01-25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgi t (86–512) 62992980 sgs.china@

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 3 of 56

## **TEST SUMMARY**

Fraguency Bond	Max Report SAR1-g (W/kg)
Frequency Band	Body
WI-FI (2.4GHz)	1.19
WI-FI (5GHz)	1.13
ВТ	0.54
SAR Limited(w/kg)	1.6

Reviewed by
Well Wei

**Prepared by** 

Nature Shen

Nature Shen



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 4 of 56

### **CONTENTS**

1	GENERA	L INFORMATION	6
	1.1 DET/	AILS OF CLIENT	6
	1.2 TEST	F LOCATION	6
	1.3 TEST	r Facility	7
	1.4 GEN	ERAL DESCRIPTION OF EUT	8
		T SPECIFICATION	
	1.6 RF E	EXPOSURE LIMITS	10
2	LABORA	TORY ENVIRONMENT	11
3	SAR ME	ASUREMENTS SYSTEM CONFIGURATION	12
	3.1 THE	SAR MEASUREMENT SYSTEM	12
	3.2 Isot	ROPIC E-FIELD PROBE EX3DV4	13
		A ACQUISITION ELECTRONICS (DAE)	
		// Twin Phantom	
	3.5 ELI	Phantom	15
	3.6 DEVI	ICE HOLDER FOR TRANSMITTERS	16
	3.7 MEA	SUREMENT PROCEDURE	17
	3.7.1 S	canning procedure	17
		ata Storage	
	3.7.3 D	ata Evaluation by SEMCAD	19
4	SAR ME	ASUREMENT VARIABILITY AND UNCERTAINTY	21
	4.1 SAR	R MEASUREMENT VARIABILITY	21
	4.2 SAR	R MEASUREMENT UNCERTAINTY	21
5	DESCRIP	PTION OF TEST POSITION	22
	5.1 THE	Body Test Position	22
	5.1.1 P	Proximity Sensor Triggering Test for body	22
6		TEM VERIFICATION PROCEDURE	
U			
		UE SIMULATE LIQUID Pecipes for Tissue Simulate Liquid	
		leasurement for Tissue Simulate Liquidleasurement for Tissue Simulate Liquid	
		R System Check	
		ustification for Extended SAR Dipole Calibrations	
		rummary System Check Result(s)	
		Detailed System Check Results	
7		NFIGURATION	
		RATION CONFIGURATIONS	
		ViFi Test Configuration	
		PUT Antenna Locations(Front View)	
		UT side for SAR Testing	
8		SULT	
0	ILOIKE	JULI	4J



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 5 of 56

8	.1 N	MEASUREMENT OF RF CONDUCTED POWER	41
		Conducted Power of WIFI	
	8.1.2	Conducted Power of BT	48
8	.2 N	MEASUREMENT OF SAR DATA	49
	8.2.1	SAR Result of WIFI 2.4G	50
	8.2.2	SAR Result of WIFI 5G	51
	8.2.3	SAR Result of BT	53
8	.3 N	MULTIPLE TRANSMITTER EVALUATION	54
	8.3.1	Simultaneous SAR SAR test evaluation	54
9	EQUIF	PMENT LIST	. 55
4.0		RATION CERTIFICATE	
10	CALIE	RATION CERTIFICATE	. 56
11	PHOT	OGRAPHS	56
APF	PENDIX	A: DETAILED SYSTEM CHECK RESULTS	. 56
APF	PENDIX	B: DETAILED TEST RESULTS	. 56
APF	PENDIX	C: CALIBRATION CERTIFICATE	. 56
ΔΡΕ			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.c t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 6 of 56

## 1 General Information

### 1.1 Details of Client

Applicant:	Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone
Manufacturer:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

### 1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Nature Shen, KING-P li





Report No.: SUZR/2021/C002406

Rev.: 01 Page: 7 of 56

### 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number:717327





Report No.: SUZR/2021/C002406

Rev.: 01 Page: 8 of 56

### 1.4 General Description of EUT

Product Name:	Portable Tablet Computer			
Model No.(EUT):	TB125FU			
Trade Mark:	Lenovo			
Product Phase:	production unit			
Device Type:	portable device			
Exposure Category:	uncontrolled environr	ment / general population		
SN:	HA1KXVLP/HA1JVK	ZT/HA1JDYET/HA1L8CX5/HA1L	9V1Z/HA1JE175	
FCC ID:	O57TB125FU			
Hardware Version:	Lenovo TB125FU			
Software Version:	S000011_211216_R0	OW		
Antenna Type:	Inner Antenna			
Device Operating Configura	Device Operating Configurations:			
Modulation Mode:	WIFI: DSSS, OFDM I	BT: GFSK, π/4DQPSK,8DPSK		
	Band	Tx (MHz)	Rx (MHz)	
	WIFI(2.4GHz)	2412-2462	2412-2462	
		5150-5250	5150-5250	
Frequency Bands:	WIFI(5GHz)	5250-5350	5250-5350	
	VVII 1(30112)	5470-5725	5470-5725	
		5725-5850	5725-5850	
	BT	2402-2480	2402-2480	
	Battery Model:	L20D2P32		
Dattam, 4.4 Information.	Nominal Voltage:	3.86V		
Battery 1# Information:	Rated capacity:	7500mAh		
	Manufacture	Lenovo(SCUD)		
	Battery Model:	L20D2P32		
Dotton, Off Information	Nominal Voltage:	3.86V		
Battery 2# Information:	Rated capacity:	7500mAh		
	Manufacture	anufacture Lenovo(SWD)		

Remark: According to the client's difference statement, there are six types of EUT, the sample 1 was used for full test and sample 2/3/4/5/6 to verify the worst case.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 9 of 56

# 1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 616217 D04	SAR for laptop and tablets v01r02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 10 of 56

### 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

#### Notes:

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

<sup>\*</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

<sup>\*\*</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>\*\*\*</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 11 of 56

# 2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in	compliance with requirement of standards.
Reflection of surrounding objects is minimized and in	compliance with requirement of standards.

Table 1: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.d t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 12 of 56

# 3 SAR Measurements System Configuration

## 3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  (|Ei|2)/  $\rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

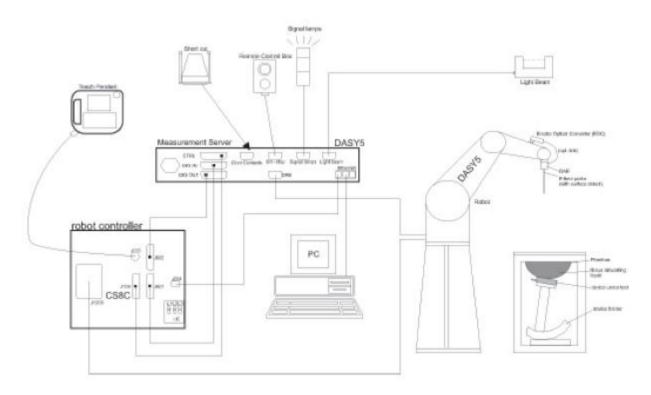

F-1. SAR Measurement System Configuration



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx.and.for.electronic format documents.subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx.attention">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx.attention</a> is defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent or the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sg t (86–512) 62992980 sgs.chir



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 13 of 56

• The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

### 3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 <u>calibration service</u> available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com




Report No.: SUZR/2021/C002406

Rev.: 01

Page: 14 of 56

### 3.3 Data Acquisition Electronics (DAE)

Model	DAE
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
Input Offset Voltage	< 5μV (with auto zero)
Input Bias Current	< 50 f A
Dimensions	60 x 60 x 68 mm



### 3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)			
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)			
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)			
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet			
Filling Volume	approx. 25 liters			
Wooden Support	SPEAG standard phantom table			



The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

15000 t (86–512) 62992

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 15 of 56

### 3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)				
Liquid	Compatible with all SPEAG tissue				
Compatibility	simulating liquids (incl. DGBE type)				
Shell Thickness	2.0 ± 0.2 mm (bottom plate)				
Dimensions	Major axis: 600 mm				
	Minor axis: 400 mm				
Filling Volume	approx. 30 liters				
Wooden Support	SPEAG standard phantom table				



Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 16 of 56

### 3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\varepsilon$ =3 and loss tangent  $\delta$ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration for orgety or fastification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 17 of 56

Page: 1

7 Measurement procedure

## 3.7.1 Scanning procedure

### Step 1: Power reference measurement

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

### Step 3: Zoom scan

Around this point, a volume of 32mm\*32mm\*30mm (f≤2GHz), 30mm\*30mm\*30mm (f for 2-3GHz) and 24mm\*24mm\*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points (f≤2GHz), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 18 of 56

		•				
		≤ 3 GHz	> 3 GHz			
		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm			
Maximum probe angle from probe axis to phantom surface normal at the measurement location			20° ± 1°			
		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm			
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.			
Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>			$3 - 4 \text{ GHz}$ : $\leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}$ : $\leq 4 \text{ mm}^*$			
uniform	grid: $\Delta z_{Z_{\infty m}}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm			
$\begin{array}{c} \Delta z_{Z_{200m}}(1)\text{: between} \\ 1^{\text{st}} \text{ two points closest} \\ \text{to phantom surface} \\ \\ \Delta z_{Z_{200m}}(n > 1)\text{:} \\ \text{between subsequent} \\ \text{points} \end{array}$		≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm			
		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$				
Minimum zoom scan volume x, y, z			3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm			
	patial resolution graded grid	patial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$ patial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$ uniform grid: $\Delta z_{Zoom}(n)$ $\frac{\Delta z_{Zoom}(1): \text{ between } 1^{\text{st}} \text{ two points closest to phantom surface}}{\Delta z_{Zoom}(n>1): \text{ between subsequent points}}$	m closest measurement point obe sensors) to phantom surface from probe axis to phantom measurement location			

### **Step 4: Power reference measurement (drift)**

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm$  5 %



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.t t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 19 of 56 Page:

### 3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

- Conversion factor ConvFi - Diode compression point Dcpi

Device parameters: - Frequency

- Crest factor

Media parameters: - Conductivity 3

- Density

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DCtransmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

Vi = compensated signal of channel i (i = x, y, z) Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_{i} = (V_{i} / Norm_{i} \cdot ConvF)^{1/2}$$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sag.com/en/Terms-and-Conditions.aspx.and.">http://www.sag.com/en/Terms-and-Conditions.aspx.and.</a> for electronic Documents at <a href="http://www.sag.com/en/Terms-en/Conditions/Terms-en/Co

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 20 of 56 Page:

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$
  
With Vi = compensated signal of channel i (i = x, y, z)  
Normi = sensor sensor sensor to channel I (i = x, y, z)

[mV/(V/m)2] for E-field Probes

ConvF = sensitivity enhancement in solution

aij = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$$

SAR = local specific absorption rate in mW/g

Etot = total field strength in V/m

σ= conductivity in [mho/m] or [Siemens/m]

ε= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 2 / 3770_{Or} P_{pwe} = H_{tot}^2 \cdot 37.7$$

Ppwe = equivalent power density of a plane wave in mW/cm2

Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 21 of 56

# 4 SAR measurement variability and uncertainty

### 4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq$  0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq$  1.45 W/kg ( $\sim$  10% from the 1- $\alpha$  SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

### 4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 22 of 56 Page:

#### 5 **Description of Test Position**


### 5.1 The Body Test Position

The overall diagonal dimension of the display section of a tablet is > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary. The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

#### 5.1.1 **Proximity Sensor Triggering Test for body**

### **Proximity sensor triggering distances**

The Proximity sensor triggering was applied to WIFI. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.



Proximity Sensor Triggering Distance(mm)							
Position Back Top							
Minimum	12	17					
Required SAR Test	11	16					

#### Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

sgs.china@sgs.com





Report No.: SUZR/2021/C002406

Rev.: 01

Page: 23 of 56

• DUT Moving Toward (Trigger) the Phantom

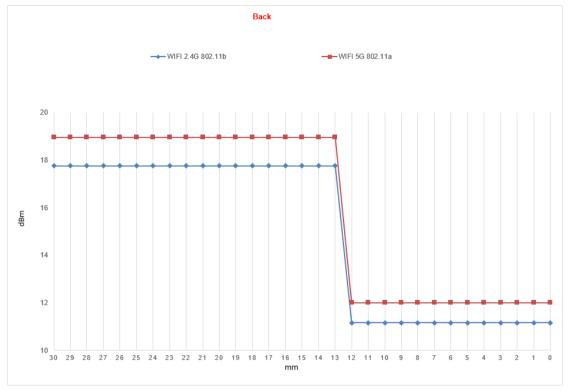

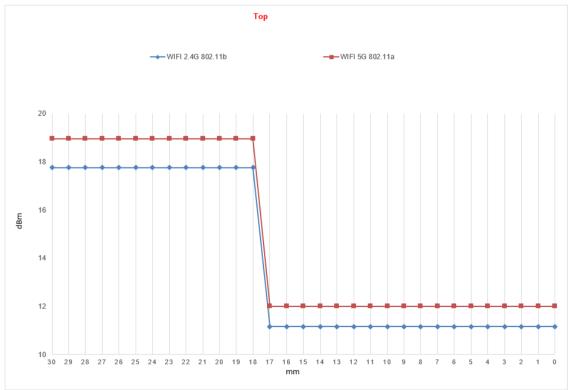



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agox and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions [Terms-en-Document as place]. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com




Report No.: SUZR/2021/C002406

Rev.: 01

Page: 24 of 56

### DUT Moving Away (Release) from the Phantom



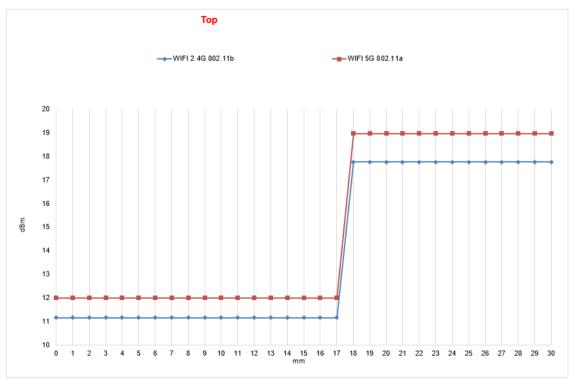



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgs t (86–512) 62992980 sgs.chin



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 25 of 56

### 2) Proximity sensor coverage


If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and "along the direction of maximum antenna and sensor offset".

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

### 3) Device tilt angle influences to proximity sensor triggering

The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom.

Rotating the tablet around the edge next to the phantom in  $\leq 10^{\circ}$  increments until the tablet is  $\pm 45^{\circ}$  from the vertical position at  $0^{\circ}$ , and the maximum output power remains in the reduced mode.



The Sensor Triggering Distance(mm)							
Dogition	Top Side						
Position	WiFi Antenna						
Minimum	17						

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Top Side													
		Minimum trigger	Power Reduction Status										
Band (MHz)	Minimum trigger distance Per KDB616217§6.2	distance at which power reduction was maintained over ±45°	-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
WIFI 2.4GHz	Top side:17mm	Top side:17mm	on	on	on	on	on	on	on	on	on	on	on
WIFI 5GHz	Top side:17mm	Top side:17mm	on	on	on	on	on	on	on	on	on	on	on



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document say that the first of the stream of the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate\_please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 6299298

sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Sucrose: 98+% Pure Sucrose

HEC: Hydroxyethyl Cellulose

Page: 26 of 56

## 6 SAR System Verification Procedure

## 6.1 Tissue Simulate Liquid

### 6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

3 1 3 1 3 1 3 1 3 1 3 1 3 1 3 1 3 1 3 1										
Ingredients	Frequency (MHz)									
(% by weight)	450	700-900	1750-2000	2300-2500	2500-2700					
Water	38.56	40.30	55.24	55.00	54.92					
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23					
Sucrose	56.32	57.90	0	0	0					
HEC	0.98	0.24	0	0	0					
Bactericide	0.19	0.18	0	0	0					
Tween	0	0	44.45	44.80	44.85					

Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ+ resistivity

Tween: Polyoxyethylene (20) sorbitan monolaurate

HSL5GHz is composed of the following ingredients:

Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%

Table 2: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of transaction from exercising all their rights and obligations under the transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) \$307 1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 27 of 56

### 6.1.2 Measurement for Tissue Simulate Liquid

The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured	Target Tissue (±5%)		Measure	d Tissue	Liquid		
	Frequency (MHz)	ε <sub>r</sub>	σ(S/m)	ε <sub>r</sub>	σ(S/m)	Temp.(°C)	Measured Date	
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.507	1.794	22.0	2022/01/17	
5250 Head	5250	35.9 (34.11~37.70)	4.66 (4.47~4.95)	35.575	4.724	22.1	2022/01/20	
5600 Head	5600	35.5 (33.73~37.30)	5.07 (4.82~5.32)	34.903	5.198	22.1	2022/01/20	
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	34.531	5.381	22.1	2022/01/20	

Table 3: Measurement result of Tissue electric parameters



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000




Report No.: SUZR/2021/C002406

Rev.: 01

Page: 28 of 56

## 6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15±0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

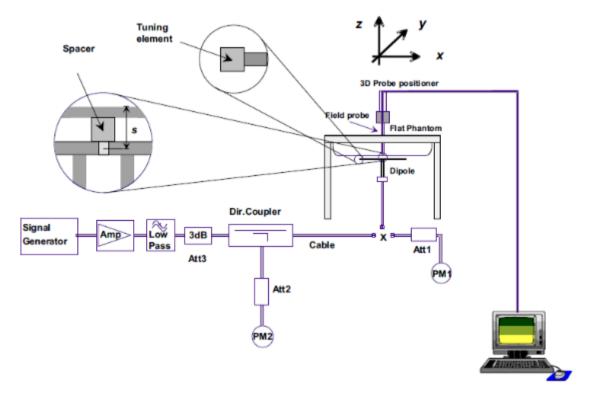

F-3. the microwave circuit arrangement used for SAR system check



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.</a> subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.</a> at the time of its intervention only and within the limits of clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*READ TERMS TO THE SERVICE OF THE SERVICE OF

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 29 of 56

### 6.2.1 Justification for Extended SAR Dipole Calibrations

- 1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 30 of 56

### 6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D2450V2	Head	12.30	5.66	49.20	22.64	52.2 24.5 (46.98~57.42) (22.05~26.95)		22.0	2022/01/17
Validat	Validation Kit		Measured SAR 100mW	(normalized (normalized to		Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date	
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	, ,	
	Head (5.25GHz)	7.03	2.00	70.30	20.00	77.1 (69.39~84.81)	22.2 (19.98~24.42)	22.1	2022/01/20
D5GHzV2	Head (5.6GHz)	7.98	2.25	79.80	22.50	80.2 (72.18~88.22)	23.1 (20.79~25.41)	22.1	2022/01/20
	Head (5.75GHz)	8.31	2.38	83.10	23.80	77.4 (69.66~85.14)	22.1 (19.89~24.31)	22.1	2022/01/20

Table 4: SAR System Check Result

### 6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 31 of 56

# 7 Test Configuration

# 7.1 Operation Configurations


### 7.1.1 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

### 7.1.1.1 Duty cycle

WiFi 2.4G 802.11b:

Duty cycle=8.3332/8.3945=99.27%

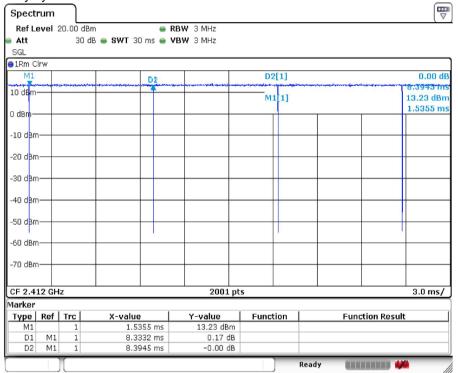



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980 s


www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 32 of 56

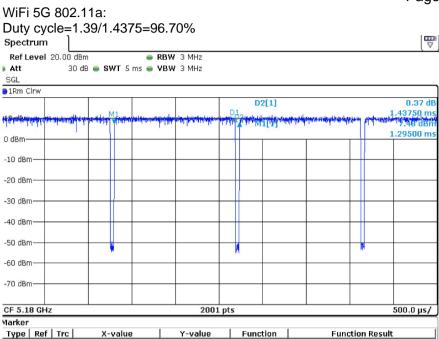

7.48 dBm


2.72 dB

WiFi 5G 802.11ac 80M:

D1

1.295 ms

1.39 ms

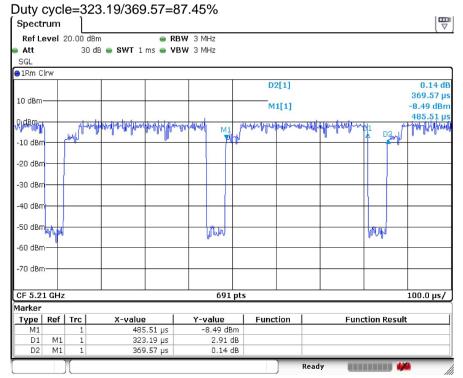



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agox and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions [Terms-en-Document as place]. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (liangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜嘉(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 33 of 56

#### 7.1.1.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

### 7.1.1.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq$  1.2 W/kg or all required channels are tested.

### 7.1.1.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sag.com/en/Terms-and-Conditions.aspx.and.">http://www.sag.com/en/Terms-and-Conditions.aspx.and.</a> for electronic Documents at <a href="http://www.sag.com/en/Terms-en/Conditions/Terms-en/Co

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 34 of 56

2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
  - SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
  - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
  - replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
  - b) replace "initial test configuration" with "all tested higher output power configurations"



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 35 of 56

#### 7.1.1.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

#### • 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

### SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.:

36 of 56 Page:

#### 7.1.1.6 WiFi 5G SAR Test Procedures

#### 7.1.1.6.1 U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s). SAR test reduction is determined according to the following:

- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

#### 7.1.1.6.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements, when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or \$15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 37 of 56

7.1.1.6.3 OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
  - The channel closest to mid-band frequency is selected for SAR measurement.
  - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

#### 7.1.1.6.4 SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 38 of 56

### 7.1.1 DUT Antenna Locations(Front View)



#### Note:

Per KDB 616217, the diagonal length is > 200mm, the device is considered a "tablet" device and needed to test 0mm 1-g body SAR.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 39 of 56

#### 7.1.2 EUT side for SAR Testing

#### · Stand-alone SAR test evaluation

1) Per FCC KDB 447498 D04, SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold *P*th (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). *P*th is given by Formula (B.2).

$$P_{\text{th }}(\text{mW}) = ERP_{\text{20 cm}}(\text{mW}) = \begin{cases} 2040f & 0.3 \text{ GHz} \le f < 1.5 \text{ GHz} \\ \\ 3060 & 1.5 \text{ GHz} \le f \le 6 \text{ GHz} \end{cases}$$
(B. 1)

$$P_{\text{th (mW)}} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \le 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \le 40 \text{ cm} \end{cases}$$
(B. 2)

where

$$x = -\log_{10}\left(\frac{60}{ERP_{20}\operatorname{cm}\sqrt{f}}\right)$$

The 1 mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Comditions/Terms-en/C

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 40 of 56

1) Standalone SAR exclusion calculation (Antenna to adjacent sides<0.5cm)

	Bnad Exposure f		Pmax Pmax		5	separation distance(cm)				Calculated Value				SAR Test (Yes or No)				))	
Bnad	Condition	(GHz)	(dBm)	(m\\/)	Back side	Left side			Bottom side		Left side			Bottom side					Bottom side
WIFI 2.4G	Body 0mm	2.462	19.00	79.43	0.00	>0.5cm	>0.5cm	0.00	>0.5cm	1.00	>0.5cm	>0.5cm	1.00	>0.5cm	Yes	>0.5cm	>0.5cm	Yes	>0.5cm
WIFI 5G	Body 0mm	5.850	19.50	89.13	0.00	>0.5cm	>0.5cm	0.00	>0.5cm	1.00	>0.5cm	>0.5cm	1.00	>0.5cm	Yes	>0.5cm	>0.5cm	Yes	>0.5cm
ВТ	Body 0mm	2.480	10.00	10.00	0.00	>0.5cm	>0.5cm	0.00	>0.5cm	1.00	>0.5cm	>0.5cm	1.00	>0.5cm	Yes	>0.5cm	>0.5cm	Yes	>0.5cm

2) Standalone SAR exclusion calculation (Antenna to adjacent sides>0.5cm)

D	d Exposure f		Pmax	Pmax	se	oaratio	on dis	tance <b>(c</b>	m)		Cald	culated \	/alue		SA	R Te	st (Y	es or N	o)
Bnad	Condition	(GHz)	(dBm)	(mw)	Back side		Right side		Bottom side	Back side	Left side	Right side	Top side	Bottom side	Back side				Bottom side
WIFI 2.4G	Body 0mm	2.462	19.00	79.43										1794.63					
WIFI 5G	Body 0mm	5.850	19.50	89.13	<0.5cm	4.780	16.45	<0.5cm	15.11	<0.5cm	153.41	2033.56	<0.5cm	1702.52	<0.5cm	No	No	<0.5cm	No
ВТ	Body 0mm	2.480	10.00	10.00	<0.5cm	4.780	16.45	<0.5cm	15.11	<0.5cm	200.31	2108.98	<0.5cm	1793.84	<0.5cm	No	No	<0.5cm	No

According to the table above, the standalone test configurations required for this device are as below:

Test configurations	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G	No	Yes	No	No	Yes	No
WiFi 5G	No	Yes	No	No	Yes	No
BT	No	Yes	No	No	Yes	No

When an antenna qualifies for test exemption in single transmitter/antenna mode, its actual SAR value may not be available, because it was not required to be measured, the estimated SAR as below formula:

#### Estimated SAR =1.6 · Pant / Pth [W/kg].

Estimated SAR calculation for the device as below:

- Cumatou Or art care	nated of the editediation for the device as below.									
Bnad	Exposure	f	Pmax			Estimated SAR(W/Kg)				
Dildu	Condition	(GHz)	(dBm)	Back side	Left side	Right side	Top side	Bottom side		
WIFI 2.4G	Body 0mm	2.462	19.00	measure	0.633	0.060	measure	0.071		
WIFI 5G	Body 0mm	5.825	19.50	measure	0.930	0.070	measure	0.084		
BT	Body 0mm	2.480	10.00	measure	0.080	0.008	measure	0.009		

#### Note:

1) \* - maximum possible output power declared by manufacturer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 41 of 56

### 8 Test Result

### 8.1 Measurement of RF conducted Power

### 8.1.1 Conducted Power of WIFI

		WIFI 2.40	G Sensor off			
Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	1	2412		17.64	19.00	No
802.11b	6	2437	1	17.76	19.00	Yes
	11	2462		17.72	19.00	No
	1	2412		17.30	19.00	No
802.11g	6	2437	6	17.21	19.00	No
	11	2462		17.12	19.00	No
000.44	1	2412		16.10	18.00	No
802.11n HT20	6	2437	6.5	16.14	18.00	No
11120	11	2462		16.19	18.00	No
000.44	3	2422		15.73	17.00	No
802.11n HT40	6	2437	13.5	15.48	17.00	No
11140	11	2462		15.51	17.00	No

		WIFI 2.4	G Sensor on			
Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	1	2412		11.14	12.50	Yes
802.11b	6	2437	1	11.16	12.50	Yes
	11	2462		11.05	12.50	Yes
	1	2412		10.87	12.50	No
802.11g	6	2437	6	10.65	12.50	No
	11	2462		10.60	12.50	No
222.44	1	2412		10.87	12.50	No
802.11n HT20	6	2437	6.5	10.74	12.50	No
11120	11	2462		10.72	12.50	No
000.44	3	2422		11.10	12.50	No
802.11n HT40	6	2437	13.5	10.86	12.50	No
11140	11	2462		10.88	12.50	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.occheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 42 of 56

				Page	e: 42 of 8		
			WIFI 5G Sensor off				
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
		36	5180		18.86	19.50	No
	U-NII-1	40	5200		18.84	19.50	No
	O-INII- I	44	5220		18.82	19.50	No
		48	5240		18.95	19.50	No
		52	5260		18.96	19.50	Yes
	U-NII-2A	56	5280		18.91	19.50	No
	U-MII-ZA	60	5300		18.82	19.50	No
		64	5320		18.80	19.50	No
		100	5500		18.75	19.50	No
		104	5520		18.63	19.50	No
		108	5540		18.73	19.50	No
		112	5560		18.59	19.50	No
802.11a		116	5580	6	18.71	19.50	No
	11 NIII 00	120	5600		18.48	19.50	No
	U-NII-2C	124	5620		18.50	19.50	No
		128	5640		18.61	19.50	No
		132	5660		18.68	19.50	No
		136	5680		18.59	19.50	No
		140	5700		18.89	19.50	Yes
		144	5720		18.63	19.50	No
		149	5745		18.51	19.50	No
		153	5765		18.59	19.50	No
	U-NII-3	157	5785		18.67	19.50	Yes
		161	5805		18.55	19.50	No
		165	5825		18.39	19.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
		36	5180		17.71	18.50	No
	U-NII-1	40	5200		17.72	18.50	No
	O-INII- I	44	5220		17.73	18.50	No
		48	5240		17.80	18.50	No
000.44		52	5260		17.71	18.50	No
802.11n- HT20	U-NII-2A	56	5280	MCS0	17.80	18.50	No
11120	U-INII-ZA	60	5300		17.82	18.50	No
		64	5320		17.80	18.50	No
		100	5500		17.71	18.50	No
	U-NII-2C	104	5520		17.73	18.50	No
,	U-NII-2C	108	5540		17.69	18.50	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 43 of 56

				raye	. 45 UI v	50	
		112	5560		17.58	18.50	No
		116	5580		17.62	18.50	No
		120	5600		17.66	18.50	No
		124	5620		17.69	18.50	No
		128	5640		17.50	18.50	No
		132	5660		17.54	18.50	No
		136	5680		17.60	18.50	No
		140	5700		17.73	18.50	No
		144	5720		17.65	18.50	No
		149	5745		17.42	18.50	No
		153	5765		17.40	18.50	No
	U-NII-3	157	5785		17.39	18.50	No
		161	5805		17.38	18.50	No
		165	5825		17.33	18.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	LI NIII 4	38	5190		17.10	18.00	No
	U-NII-1	46	5230		17.23	18.00	No
	LLAULOA	54	5270		17.22	18.00	No
	U-NII-2A	62	5310		17.27	18.00	No
		102	5510		16.78	18.00	No
802.11n-		110	5550	MCCO	17.23	18.00	No
HT40	U-NII-2C	118	5590	MCS0	17.21	18.00	No
	U-MII-2C	126	5630		17.18	18.00	No
		134	5670		17.25	18.00	No
		142	5710		17.16	18.00	No
	LLNULO	151	5755		17.10	18.00	No
	U-NII-3	159	5795		17.03	18.00	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
		36	5180		17.19	18.00	No
	U-NII-1	40	5200		17.14	18.00	No
	O-INII- I	44	5220		17.13	18.00	No
		48	5240		17.23	18.00	No
		52	5260		17.23	18.00	No
802.11ac-	11 111 04	56	5280	MCCC	17.21	18.00	No
20	U-NII-2A	60	5300	MCS0	17.29	18.00	No
		64	5320		17.30	18.00	No
		100	5500		16.87	18.00	No
	11 NIII 00	104	5520		17.18	18.00	No
	U-NII-2C	108	5540		17.16	18.00	No
		112	5560		17.09	18.00	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 44 of 56

				raye	. 44 01 3	00	
		116	5580		17.12	18.00	No
		120	5600		17.02	18.00	No
		124	5620		17.00	18.00	No
		128	5640		17.09	18.00	No
		132	5660		17.11	18.00	No
		136	5680		17.12	18.00	No
		140	5700		17.21	18.00	No
		144	5720		17.17	18.00	No
		149	5745		16.96	18.00	No
		153	5765		16.99	18.00	No
	U-NII-3	157	5785		16.91	18.00	No
		161	5805		16.89	18.00	No
		165	5825		16.89	18.00	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	U-NII-1	38	5190		17.13	18.00	No
	U-INII- I	46	5230		17.21	18.00	No
	U-NII-2A	54	5270		17.23	18.00	No
	U-MII-ZA	62	5310		17.20	18.00	No
		102	5510		16.66	18.00	No
802.11ac-		110	5550	MCS0	17.20	18.00	No
40		118	5590	IVICSU	17.18	18.00	No
	U-NII-2C	126	5630		17.10	18.00	No
		134	5670		17.22	18.00	No
		142	5710		17.11	18.00	No
	11 111 0	151	5755		17.00	18.00	No
	U-NII-3	159	5795		16.91	18.00	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	U-NII-1	42	5210		16.62	18.00	No
	U-NII-2A	58	5290		16.67	18.00	No
802.11ac		106	5530	MCS0	16.50	18.00	No
80M	U-NII-2C	122	5610	IVICSU	17.08	18.00	No
		138	5690		17.01	18.00	No
	U-NII-3	155	5775		16.92	18.00	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 45 of 56

SGHz				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Page	: 45 01 :	<del>.</del>	
SGR2   mode   Channel   Frequency(MHz)   Rate(Mbps)   Power (dBm)   Tune up   SAR test				WIFI 5G Sei		A.,		
U-NII-1	5GHz	mode				Power (dBm)		
BOZ.11a			36	5180		11.80	12.50	No
A44   5220     48   5240     52   5260     11.82   12.50   No     12.00   12.50   No     12.01   12.50   No     11.97   12.50   No     11.99   12.50   No     9.93   10.50   No     9.76   10.50   No     9.69   10.50   No     9.69   10.50   No     9.69   10.50   No     9.76   10.50   No     9.77   10.50   No     9.68   10.50   No     9.68   10.50   No     9.68   10.50   No     9.68   10.50   No     9.69   10.50   No     9.60   10.50   No     9.61   10.50   No     9.62   10.50   No     9.63   10.50   No     9.66   10.50   No     9.67   10.50   No     9.68   10.50   No     9.69   10.50   No     9.61   10.50   No     9.62   10.50   No     9.63   10.50   No     9.64   10.50   No     9.65   10.50   No     9.67   10.50   No     9.68   10.50   No     9.69   10.50   No     9.60   10.50   No     9.61   10.50   No     11.82   12.50   No     11.82   12.50   No     11.83   12.50   No     11.80   12.50   No     11.81   12.50   No     11.82   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.91   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93		I I-NIII-1	40	5200		11.73	12.50	No
No.   12.00   12.50   No.		O IVIII I	44	5220		11.71	12.50	No
No.   12.50   No.   No			48	5240		11.82	12.50	No
BO2.11a			52	5260		12.00	12.50	No
BOZ.11a		LI NIII 2A	56	5280		12.01	12.50	No
B02.11a   B02.		U-INII-ZA	60	5300		11.97	12.50	No
802.11a  802.11a  4			64	5320		11.92	12.50	No
B02.11a			100	5500		9.93	10.50	No
No.			104	5520		9.76	10.50	No
No			108	5540		9.74	10.50	No
BO2.11n-HT20			112	5560		9.69	10.50	No
BOP-NII-2C	802.11a		116	5580	6	9.67	10.50	No
124   5620   9.74   10.50   No   128   5640   9.68   10.50   No   9.64   10.50   No   9.62   10.50   No   9.66   10.50   No   9.67   10.50   No   165   5825   9.86   10.50   No   No   9.68   10.50   No   165   5825   9.67   10.50   No   No   165   5825   9.86   10.50   No   No   165   5825   9.86   10.50   No   11.89   12.50   No   11.89   12.50   No   11.82   12.50   No   11.83   12.50   No   11.94   12.50   No   11.95   12.50   No   11.96   12.50   No   11.96   12.50   No   11.93   12.50   No   11.94   12.50   No   11.95   12.50   No   12.50   No   12.50   No   12.50   No   12.50   No		11 111 00	120	5600		9.76	10.50	No
Harmonia   Harmonia		U-NII-2C	124	5620		9.74	10.50	No
136   5680   9.64   10.50   No     140   5700   9.62   10.50   No     144   5720   9.66   10.50   No     149   5745   9.81   10.50   No     153   5765   9.67   10.50   No     161   5805   9.77   10.50   No     165   5825   9.86   10.50   No     11.89   12.50   No     11.80   12.50   No     11.81   12.50   No     11.82   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.90   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No			128	5640		9.68	10.50	No
140   5700   9.62   10.50   No     144   5720   9.66   10.50   No     149   5745   9.81   10.50   No     153   5765   9.67   10.50   No     155   5785   9.77   10.50   No     161   5805   9.72   10.50   No     165   5825   9.86   10.50   No     105   No     11.89   12.50   No     11.80   12.50   No     11.81   12.50   No     11.82   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.91   12.50   No     11.91   12.50   No     11.92   12.50   No     11.93   12.50   No     11.94   12.50   No     11.95   12.50   No     11.96   12.50   No     11.97   12.50   No     11.98   12.50   No     11.98   12.50   No     11.99   12.50   No     11.90   12.50   No     11.90   12.50   No     11.91   12.50			132	5660		9.68	10.50	No
Harmonia   Harmonia   Harmonia   Harmonia			136	5680		9.64	10.50	No
Harmonia   Harmonia   Harmonia   Harmonia			140	5700		9.62	10.50	No
U-NII-3			144	5720		9.66	10.50	No
U-NII-3			149	5745		9.81	10.50	No
161   5805   9.72   10.50   No     165   5825   9.86   10.50   No     5GHz   mode   Channel   Frequency(MHz)   Data   Rate(Mbps)   Power (dBm)   Tune up   SAR Test			153	5765		9.67	10.50	No
Tune up   SAR Test		U-NII-3	157	5785		9.77	10.50	No
5GHz         mode         Channel         Frequency(MHz)         Data Rate(Mbps)         Average Power (dBm)         Tune up         SAR Test           802.11n-HT20         U-NII-2A         36         5180         11.89         12.50         No           40         5200         11.82         12.50         No           44         5220         11.83         12.50         No           52         5260         11.96         12.50         No           60         5300         11.96         12.50         No           11.93         12.50         No         No           11.93         12.50         No           11.93         12.50         No           11.93         12.50         No           11.82         12.50         No           11.82         12.50         No           11.82         12.50         No           9.78         10.50         No           U-NII-2C         104         5520         9.91         10.50         No			161	5805		9.72	10.50	No
No			165	5825		9.86	10.50	No
B02.11n- HT20         U-NII-2A         40         5200         11.82         12.50         No           44         5220         11.83         12.50         No           52         5260         11.96         12.50         No           60         5300         11.96         12.50         No           11.93         12.50         No         No           11.82         12.50         No           11.93         12.50         No           11.82         12.50         No           11.93         12.50         No           11.82         12.50         No           9.78         10.50         No           100         5520         9.91         10.50         No	5GHz	mode	Channel	Frequency(MHz)			Tune up	SAR Test
802.11n- HT20 U-NII-2A			36	5180		11.89	12.50	No
802.11n- HT20 U-NII-2A		LL-NIII 1	40	5200		11.82	12.50	No
802.11n- HT20 U-NII-2A		O-INII- I	44	5220		11.83	12.50	No
802.11n- HT20         U-NII-2A         56         5280         MCS0         11.90         12.50         No           60         5300         11.93         12.50         No           11.82         12.50         No           100         5500         9.78         10.50         No           U-NII-2C         104         5520         9.91         10.50         No			48	5240		11.77	12.50	No
HT20 U-NII-2A	000.44		52	5260		11.96	12.50	No
60     5300     11.93     12.50     No       64     5320     11.82     12.50     No       100     5500     9.78     10.50     No       U-NII-2C     104     5520     9.91     10.50     No		LINULOA	56	5280	MCS0	11.90	12.50	No
U-NII-2C 104 5520 9.78 10.50 No 9.91 10.50 No	11120	U-NII-ZA	60	5300		11.93	12.50	No
U-NII-2C 104 5520 9.91 10.50 No			64	5320		11.82	12.50	No
			100	5500		9.78	10.50	No
108 5540 9.84 10.50 No		U-NII-2C	104	5520		9.91	10.50	No
			108	5540		9.84	10.50	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 46 of 56

				raye	. 40 UI .	50	
		112	5560		9.83	10.50	No
		116	5580		9.85	10.50	No
		120	5600		9.81	10.50	No
		124	5620		9.79	10.50	No
		128	5640		9.83	10.50	No
		132	5660		9.87	10.50	No
		136	5680	]	9.70	10.50	No
		140	5700	]	9.69	10.50	No
		144	5720	]	9.78	10.50	No
		149	5745	]	9.79	10.50	No
		153	5765		9.69	10.50	No
	U-NII-3	157	5785		9.71	10.50	No
		161	5805	]	9.77	10.50	No
		165	5825	]	9.74	10.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	U-NII-1	38	5190		11.80	12.50	No
	U-INII- I	46	5230		11.83	12.50	No
	LI NIII OA	54	5270		11.82	12.50	No
	U-NII-2A	62	5310		11.79	12.50	No
		102	5510		9.85	10.50	No
802.11n-		110	5550	MCS0	9.82	10.50	No
HT40	U-NII-2C	118	5590	IVICSU	9.88	10.50	No
	U-MII-2C	126	5630		9.91	10.50	No
		134	5670		9.85	10.50	No
		142	5710		9.81	10.50	No
	U-NII-3	151	5755		9.70	10.50	No
	U-INII-3	159	5795		9.68	10.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
		36	5180		11.78	12.50	No
	U-NII-1	40	5200		11.80	12.50	No
	O-IVII-1	44	5220		11.76	12.50	No
		48	5240		11.74	12.50	No
		52	5260		11.93	12.50	No
802.11ac-	U-NII-2A	56	5280	MCS0	11.91	12.50	No
20	U-INII-ZA	60	5300	IVICOU	11.89	12.50	No
		64	5320		11.85	12.50	No
		100	5500		9.79	10.50	No
	U-NII-2C	104	5520		9.81	10.50	No
	U-MII-ZC	108	5540		9.82	10.50	No
		112	5560		9.80	10.50	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exoretion and the expension of the expension of

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 47 of 56

				raye	. 47 OI (	00	
		116	5580		9.83	10.50	No
		120	5600		9.81	10.50	No
		124	5620		9.79	10.50	No
		128	5640		9.76	10.50	No
		132	5660		9.82	10.50	No
		136	5680		9.70	10.50	No
		140	5700		9.66	10.50	No
		144	5720		9.71	10.50	No
		149	5745		9.73	10.50	No
		153	5765		9.64	10.50	No
	U-NII-3	157	5785		9.67	10.50	No
		161	5805		9.74	10.50	No
		165	5825		9.71	10.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	U-NII-1	38	5190		11.81	12.50	No
	U-INII- I	46	5230		11.82	12.50	No
	U-NII-2A	54	5270		11.87	12.50	No
	U-MII-ZA	62	5310		11.79	12.50	No
		102	5510		9.80	10.50	No
802.11ac-		110	5550	MCS0	9.77	10.50	No
40		118	5590	IVICSU	9.83	10.50	No
	U-NII-2C	126	5630		9.91	10.50	No
		134	5670		9.85	10.50	No
		142	5710		9.77	10.50	No
	LLNIILO	151	5755		9.62	10.50	No
	U-NII-3	159	5795		9.66	10.50	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	Tune up	SAR Test
	U-NII-1	42	5210		12.21	12.50	No
	U-NII-2A	58	5290		12.25	12.50	Yes
802.11ac		106	5530	MCS0	9.78	10.50	Yes
80M	U-NII-2C	122	5610	IVICSU	9.75	10.50	No
		138	5690		9.82	10.50	Yes
	U-NII-3	155	5775		9.71	10.50	Yes



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000


t (86-512) 62992980 sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 48 of 56

#### 8.1.2 Conducted Power of BT

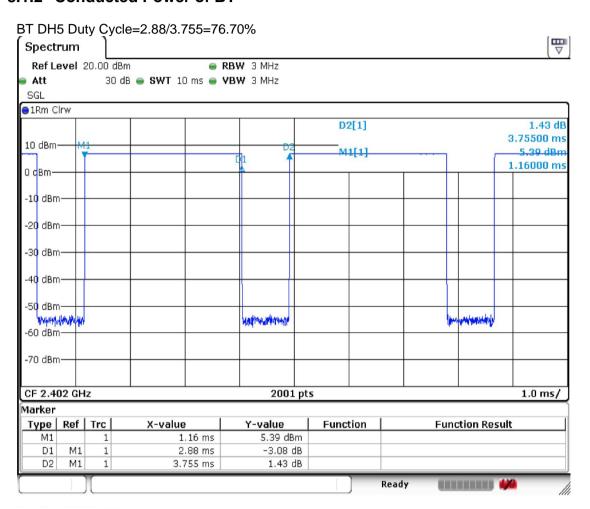

	BT	Average Conducted Power(dBm)					
Band	Channel	0	39	78	Tune up		
	GFSK	9.90	9.91	9.41	10.00		
BT	π/4DQPSK	6.19	6.44	6.40	7.00		
	8DPSK	6.16	6.41	6.43	7.00		
Band	Channel	0	19	39	Tune up		
BLE	1M	-1.59	-1.85	-1.70	-2.00		
BLE	2M	-1.30	-1.70	-1.58	-2.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 49 of 56

#### 8.2 Measurement of SAR Data

#### Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 50 of 56

#### 8.2.1 SAR Result of WIFI 2.4G

Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
	Body Test data Sensor on (Separate 0mm)										
Back side	802.11b	6/2437	99.27%	1.007	0.601	0.08	11.16	12.50	1.361	0.824	22.0
Top side	802.11b	6/2437	99.27%	1.007	0.241	-0.02	11.16	12.50	1.361	0.331	22.0
Back side	802.11b	1/2412	99.27%	1.007	0.548	0.09	11.14	12.50	1.368	0.755	22.0
Back side	802.11b	11/2462	99.27%	1.007	0.563	0.08	11.05	12.50	1.396	0.792	22.0
				Body Test da	ata Sensor	off					
Back side-11mm	802.11b	6/2437	99.27%	1.007	0.290	0.19	17.76	19.00	1.330	0.389	22.0
Top side-16mm	802.11b	6/2437	99.27%	1.007	0.108	0.01	17.76	19.00	1.330	0.145	22.0
			Body Test	data at wor	st case (Sep	oarate 0m	m)				
Back side Sample 2	802.11b	6/2437	99.27%	1.007	0.543	0.00	11.16	12.50	1.361	0.745	22.0
			Body Test	data at wor	st case (Sep	parate 0m	m)				
Back side Sample 3	802.11b	6/2437	99.27%	1.007	0.711	0.04	11.16	12.50	1.361	0.975	22.0
•	•		Body Test	data at wors	st case (Sep	parate 0m	m)	•		•	•
Back side Sample 4	802.11b	6/2437	99.27%	1.007	0.568	0.06	11.16	12.50	1.361	0.779	22.0
			Body Test	data at wor	st case (Sep	oarate 0m	m)				
Back side Sample 5	802.11b	6/2437	99.27%	1.007	0.864	0.06	11.16	12.50	1.361	1.185	22.0
Back side-Repeat Sample 5	802.11b	6/2437	99.27%	1.007	0.855	0.01	11.16	12.50	1.361	1.173	22.0
			Body Test	data at wors	st case (Sep	parate 0m	m)				
Back side Sample 6	802.11b	6/2437	99.27%	1.007	0.571	0.07	11.16	12.50	1.361	0.783	22.0

Table 5: SAR of WIFI 2.4G for Body.

Mode	Tune-up (dBm)	Tune-up (mw)	Hightest Reported SAR1-g(W/kg)	Adjusted SAR1-g(W/kg)	SAR test
			Body		
802.11b	12.50	17.78	1.185	/	Yes
802.11g	12.50	17.78	/	1.185	No
802.1n 20M	12.50	17.78	/	1.185	No
802.1n 40M	12.50	17.78	/	1.185	No

Test Position	Channel/ Frequency	Measured	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)	SAR (1g)	SAR (1g)		SAR (1g)	SAR (1g)
Back side Sample 5	6/2437	0.864	0.855	1.011	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com

<sup>2)</sup> A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

<sup>3)</sup> A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq$  1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

<sup>4)</sup> Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 51 of 56

### 8.2.2 SAR Result of WIFI 5G

Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
	Body Test data of U-NII-2A Sensor on (Separate 0mm)										
Back side	802.11ac (80M)	58/5290	87.45%	1.144	0.929	0.09	12.25	12.50	1.059	1.125	22.1
Back side-Repeat	802.11ac (80M)	58/5290	87.45%	1.144	0.910	0.02	12.25	12.50	1.059	1.102	22.1
Top side	802.11ac (80M)	58/5290	87.45%	1.144	0.518	-0.09	12.25	12.50	1.059	0.627	22.1
		Во	dy Test c	lata of U-NII-	2C Senso	r on (Sep	arate 0mm)				
Back side	802.11ac (80M)	138/5690	87.45%	1.144	0.818	0.00	9.82	10.50	1.169	1.094	22.1
Back side	802.11ac (80M)	106/5530	87.45%	1.144	0.722	0.02	9.78	10.50	1.180	0.974	22.1
Top side	802.11ac (80M)	138/5690	87.45%	1.144	0.429	0.04	9.82	10.50	1.169	0.574	22.1
		В	ody Test	data of U-NII	-3 Sensor	on (Sepa	arate 0mm)				
Back side	802.11ac (80M)	155/5775	87.45%	1.144	0.816	0.00	9.71	10.50	1.199	1.119	22.1
Top side	802.11ac (80M)	155/5775	87.45%	1.144	0.446	0.12	9.71	10.50	1.199	0.612	22.1
			Boo	dy Test data	of U-NII-2	A Sensor	Off				
Back side-11mm	802.11a	52/5260	96.70%	1.034	0.602	-0.14	18.96	19.50	1.132	0.705	22.1
Top side-16mm	802.11a	52/5260	96.70%	1.034	0.533	-0.18	18.96	19.50	1.132	0.624	22.1
			Boo	dy Test data	of U-NII-2	C Sensor	off				
Back side-11mm	802.11a	140/5700	96.70%	1.034	0.667	0.05	18.89	19.50	1.151	0.794	22.1
Top side-16mm	802.11a	140/5700	96.70%	1.034	0.395	0.03	18.89	19.50	1.151	0.470	22.1
			Вс	dy Test data	of U-NII-3	3 Sensor	off				
Back side-11mm	802.11a	157/5785	96.70%	1.034	0.633	0.03	18.67	19.50	1.211	0.792	22.1
Top side-16mm	802.11a	157/5785	96.70%	1.034	0.354	0.00	18.67	19.50	1.211	0.443	22.1
			Body T	est data at w	orst case	(Separate	e 0mm)				
Back side Sample 2	802.11ac (80M)	58/5290	87.45%	1.144	0.817	0.00	12.25	12.50	1.059	0.990	22.1
			Body T	est data at w	orst case	(Separate	e 0mm)				
Back side Sample 3	802.11ac (80M)	58/5290	87.45%	1.144	0.790	0.00	12.25	12.50	1.059	0.957	22.1
	Body Test data at worst case (Separate 0mm)										
Back side Sample 4	802.11ac (80M)	58/5290	87.45%	1.144	0.915	0.01	12.25	12.50	1.059	1.108	22.1
	Body Test data at worst case (Separate 0mm)										
Back side Sample 5	802.11ac (80M)	58/5290	87.45%	1.144	0.843	0.02	12.25	12.50	1.059	1.021	22.1
			Body T	est data at w	orst case	(Separate	e 0mm)				
Back side Sample 6	802.11ac (80M)	58/5290	87.45%	1.144	0.889	0.00	12.25	12.50	1.059	1.077	22.1

Table 6: SAR of WIFI 5G for Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions appx and conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 52 of 56

Mode	Tune-up (dBm)	Tune-up (mw)	Hightest Reported SAR1-g(W/kg)	Adjusted SAR1-g(W/kg)	SAR test
		Body			
802.11ac 80M (U-NII-2A)	12.50	17.78	1.125	/	Yes
802.11ac 80M (U-NII-1)	12.50	17.78	/	1.125	No

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)	(19)	SAR (1g)		SAR (1g)	SAR (1g)
Back side Main Supply(4+128)	58/5290	0.929	0.910	1.021	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

<sup>2)</sup> A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

<sup>3)</sup> A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\ge$  1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

<sup>4)</sup> Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 53 of 56

### 8.2.3 SAR Result of BT

Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
	Body Test data (Separate 0mm)										
Back side	DH5	39/2441	76.70%	1.304	0.299	0.03	9.91	10.00	1.021	0.398	22.0
Top side	DH5	39/2441	76.70%	1.304	0.089	0.05	9.91	10.00	1.021	0.119	22.0
Back side	DH5	0/2402	76.70%	1.304	0.280	0.00	9.90	10.00	1.023	0.374	22.0
Back side	DH5	78/2480	76.70%	1.304	0.244	0.00	9.41	10.00	1.146	0.364	22.0
			Body	Test data at	worst ca	se (Separa	te 0mm)				
Back side Sample 2	DH5	39/2441	76.70%	1.304	0.374	0.09	9.91	10.00	1.021	0.498	22.0
			Body	Test data at	worst ca	se (Separa	te 0mm)				
Back side Sample 3	DH5	39/2441	76.70%	1.304	0.406	0.00	9.91	10.00	1.021	0.540	22.0
			Body	Test data at	worst ca	se (Separa	te 0mm)				
Back side Sample 4	DH5	39/2441	76.70%	1.304	0.353	0.08	9.91	10.00	1.021	0.470	22.0
			Body	Test data at	worst ca	se (Separa	te 0mm)				
Back side Sample 5	DH5	39/2441	76.70%	1.304	0.363	0.03	9.91	10.00	1.021	0.483	22.0
			Body	Test data at	worst ca	se (Separa	te 0mm)			·	
Back side Sample 6	DH5	39/2441	76.70%	1.304	0.379	0.00	9.91	10.00	1.021	0.504	22.0

Table 7: SAR of BT for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions appx and conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 54 of 56

## 8.3 Multiple Transmitter Evaluation

### 8.3.1 Simultaneous SAR SAR test evaluation

• Simultaneous Transmission Possibilities

NO	Simultaneous TX Combination	Body
1	WIFI 2.4G +BT	Ν
2	WIFI 5G +BT	N
3	WIFI 2.4G +BT	N



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/C002406

Rev.: 01 Page: 55 of 56

## 9 Equipment list

	9 Equipment	เเอเ				
	Test Platform	SPEAG DASY5	Professional			
	Description	SAR Test System	ո (Frequency rang	ge 300MHz-6GHz)		
	Software Reference	DASY52 52.10.4	(1527); SEMCAD	X 14.6.14(7483)		
		Н	ardware Referer	ıce		
	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
$\boxtimes$	Twin Phantom	SPEAG	SAM 2	1563	NCR	NCR
$\boxtimes$	Twin Phantom	SPEAG	SAM 3	1770	NCR	NCR
$\boxtimes$	DAE	SPEAG	DAE4	1428	2021-04-09	2022-04-08
$\boxtimes$	DAE	SPEAG	DAE4	1324	2021-06-22	2022-06-21
$\boxtimes$	E-Field Probe	SPEAG	EX3DV4	3962	2021-04-26	2022-04-25
$\boxtimes$	E-Field Probe	SPEAG	EX3DV4	3982	2021-12-29	2022-12-28
$\boxtimes$	Validation Kits	SPEAG	D2450V2	1038	2020-04-08	2023-04-07
$\boxtimes$	Validation Kits	SPEAG	D5GHzV2	1174	2020-08-27	2023-08-26
$\boxtimes$	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2021-02-24	2022-02-23
$\boxtimes$	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	0050920	2021-03-02	2022-03-01
$\boxtimes$	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
$\boxtimes$	Signal Generator	R&S	SMB100A	182393	2021-02-20	2022-02-19
$\boxtimes$	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
$\boxtimes$	Power Meter	Aglient	E4419B	6843318103	2021-06-08	2022-06-07
$\boxtimes$	Power Sensor	Aglient	E9301A	MY41496508	2021-09-09	2022-09-08
$\boxtimes$	Power Sensor	Aglient	E9301H	MY41495605	2021-06-08	2022-06-07
$\boxtimes$	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
$\boxtimes$	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
$\boxtimes$	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
$\boxtimes$	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
$\boxtimes$	Speed reading thermometer	LKM	DTM3000	SUW201-30-01	2021-10-09	2022-10-08
$\boxtimes$	Humidity and Temperature Indicator	MingGao	MingGao	NA	2021-06-16	2022-06-15

Note: All the equipments are within the valid period when the tests are performed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/C002406

Rev.: 01

Page: 56 of 56

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

**Appendix A: Detailed System Check Results** 

**Appendix B: Detailed Test Results** 

**Appendix C: Calibration certificate** 

**Appendix D: Photographs** 



