

01_Bluetooth_DH5 1Mbps_Bottom Face_0mm_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.303
 Medium: HSL_2450_220930 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.03, 8.03, 8.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 0.953 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 2.136 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.172 W/kg
 Maximum value of SAR (measured) = 1.07 W/kg

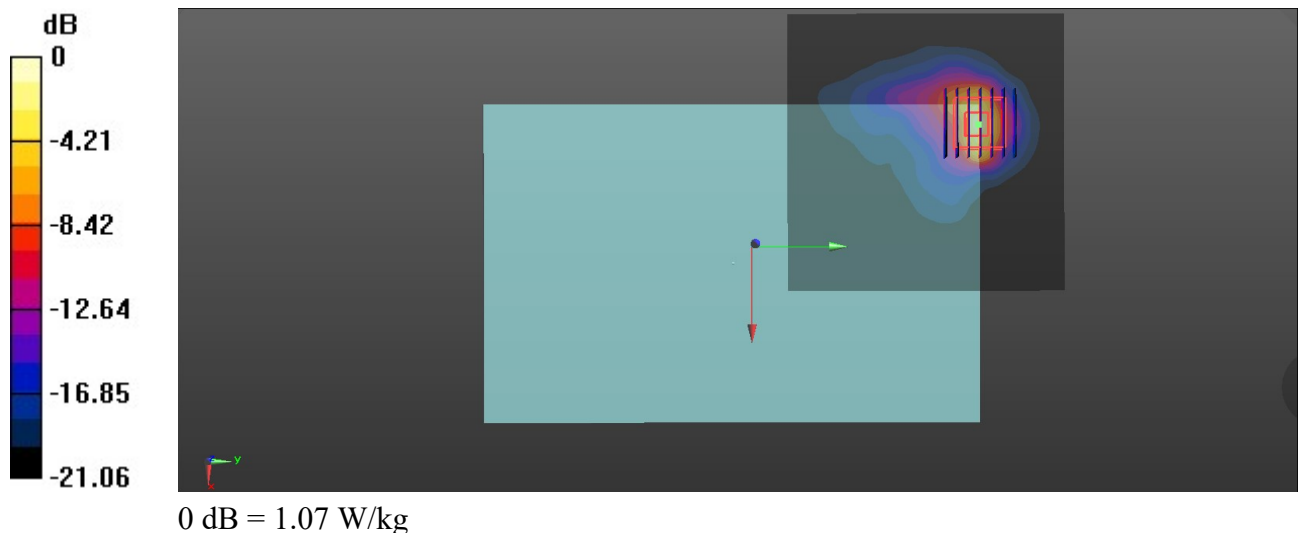

02_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch1

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_220930 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 39.724$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.03, 8.03, 8.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.43 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.238 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

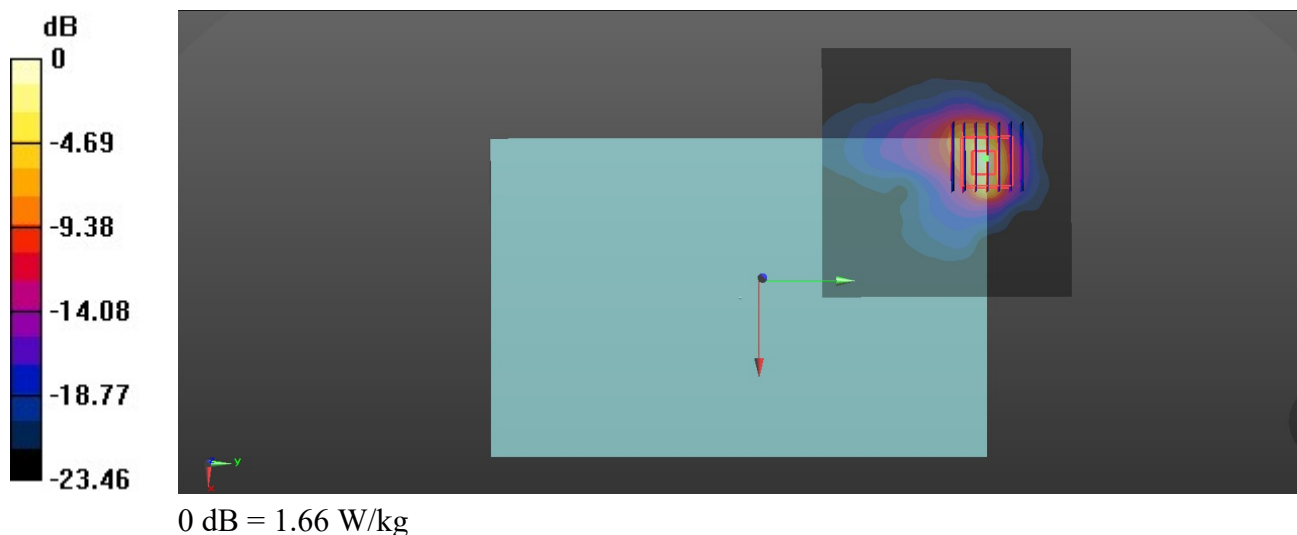

03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch42


Communication System: UID 0, WIFI (0); Frequency: 5210 MHz; Duty Cycle: 1:1.134
Medium: HSL_5250_221001 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.716$ S/m; $\epsilon_r = 37.062$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.4, 5.4, 5.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch42/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.59 W/kg

Ch42/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.181 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.44 W/kg
SAR(1 g) = 0.660 W/kg; SAR(10 g) = 0.232 W/kg
Maximum value of SAR (measured) = 2.11 W/kg

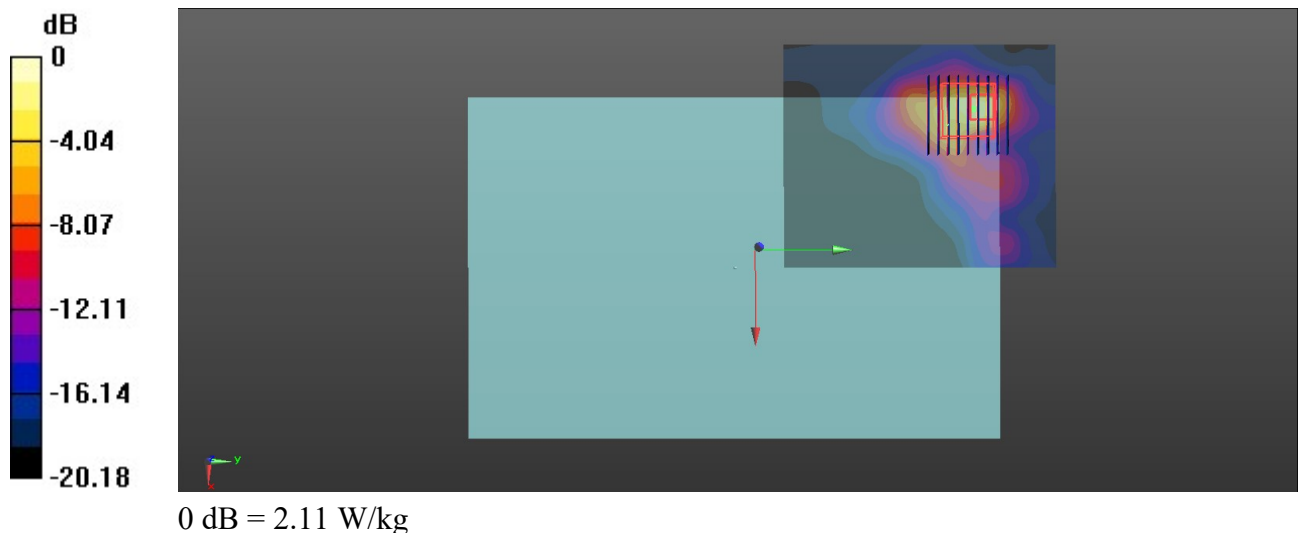

04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch58


Communication System: UID 0, WIFI (0); Frequency: 5290 MHz; Duty Cycle: 1:1.134
Medium: HSL_5250_221001 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.817$ S/m; $\epsilon_r = 36.904$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.4, 5.4, 5.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch58/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.88 W/kg

Ch58/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.108 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 3.21 W/kg
SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.230 W/kg
Maximum value of SAR (measured) = 2.10 W/kg

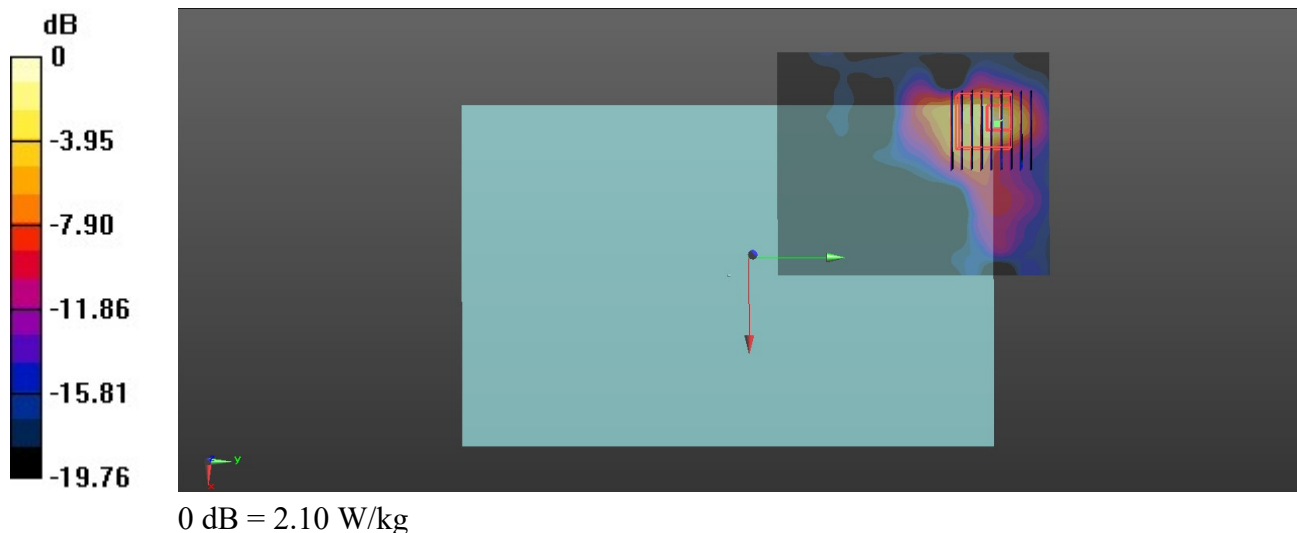

05_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch122

Communication System: UID 0, WIFI (0); Frequency: 5610 MHz; Duty Cycle: 1:1.134
 Medium: HSL_5600_221002 Medium parameters used: $f = 5610$ MHz; $\sigma = 4.857$ S/m; $\epsilon_r = 35.753$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(4.82, 4.82, 4.82); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch122/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.76 W/kg

Ch122/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 2.056 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 4.07 W/kg
SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.214 W/kg
 Maximum value of SAR (measured) = 1.93 W/kg

Ch122/Zoom Scan (9x9x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 2.056 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 4.00 W/kg
SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.198 W/kg
 Maximum value of SAR (measured) = 1.96 W/kg

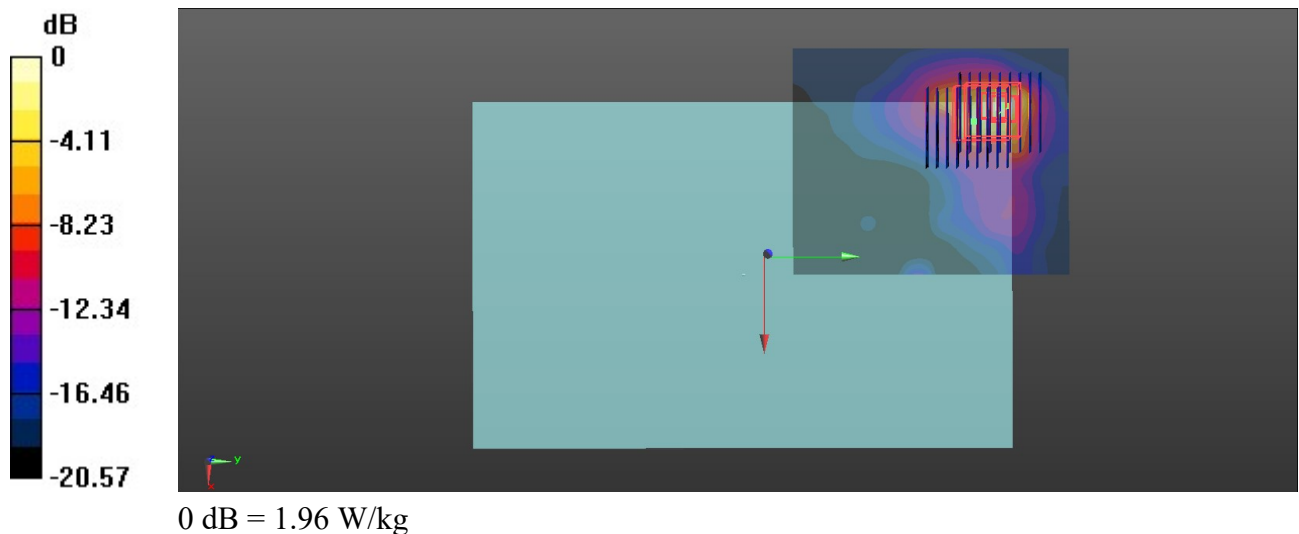

06_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch155

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.134

Medium: HSL_5750_221003 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.034$ S/m; $\epsilon_r = 35.54$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.03, 5.03, 5.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch155/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.77 W/kg

Ch155/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.527 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 1.99 W/kg

