



FCC Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB310XU
FCC ID : O57TB310XU
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Oct. 24, 2022 ~ Oct. 25, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 11

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 22

5. UNCERTAINTY OF EVALUATION 23

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC291508-01	Rev. 01	Initial issue of report	Nov. 02, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.10 dB at 0.15 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.01 dB at 47.46 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2. Manufacturer

Lenovo PC HK Limited
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB310XU
FCC ID	O57TB310XU
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS
IMEI Code	Conduction: 862947060006771 for Sample 1 862947060008009 for Sample 2 862947060010120 for Sample 3 862947060011557 for Sample 4 862947060012720 for Sample 5 862947060012605 for Sample 6 Radiation: 862947060006342 for Sample 1 862947060008066 for Sample 2 862947060010070 for Sample 3 862947060011821 for Sample 4 862947060012779 for Sample 5 862947060012696 for Sample 6
HW Version	Lenovo Tablet TB310XU
SW Version	TB310XU_RF01_220920
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are six samples under test, the detailed differences could be referred to the



TB310XU_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, sample 1 perform full test and sample 2/3/4/5/6 verify the USB data link mode for the difference.

1.4. Product Specification of Equipment Under Test

Table with 2 columns: Specification Category and Standards-related Product Specification. Rows include Tx Frequency, Rx Frequency, Antenna Type, and Type of Modulation.



	WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK
--	---

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1 : GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter1) for Sample1
	Mode 2 : WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable2 (Charging from Adapter2) for Sample1
	Mode 3 : LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 EUT (eMMC) USB Data Link to PC/NB
	Mode 4 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 PC/NB USB Data Link to EUT (eMMC)
	Mode 5 : LTE Band 7 Rx Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 EUT (SD) USB Data Link to PC/NB
	Mode 6 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) for Sample1 PC/NB USB Data Link to EUT (SD)
	Mode 7 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) for Sample1 (PC/NB USB Data Link to EUT (eMMC))
	Mode 8 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 2 + USB Cable 2(Data Link with Notebook) for Sample 2 (PC/NB USB Data Link to EUT (eMMC))
	Mode 9 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) for Sample 2 PC/NB USB Data Link to EUT (eMMC)
	Mode 10 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable 1(Data Link with Notebook) for Sample 3 PC/NB USB Data Link to EUT (eMMC)
	Mode 11 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable 1(Data Link with Notebook) for Sample 4 PC/NB USB Data Link to EUT (eMMC)
	Mode 12 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable 1(Data Link with Notebook) for Sample 5 PC/NB USB Data Link to EUT (eMMC)
	Mode 13 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable 1(Data Link with Notebook) for Sample 6 PC/NB USB Data Link to EUT (eMMC)



Radiated Emissions	<p>Mode 1 : GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter1) for Sample1</p> <p>Mode 2 : WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable2 (Charging from Adapter2) for Sample1</p> <p>Mode 3 : LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 EUT (eMMC) USB Data Link to PC/NB</p> <p>Mode 4 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 5 : LTE Band 7 Rx Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable1 (Data Link with Notebook) for Sample1 EUT (SD) USB Data Link to PC/NB</p> <p>Mode 6 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) for Sample1 PC/NB USB Data Link to EUT (SD)</p> <p>Mode 7 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) for Sample1 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 8 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 2 + USB Cable2 (Charging from Adapter2) for Sample 2</p> <p>Mode 9 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable1 (Data Link with Notebook) for Sample 2 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 10 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable1 (Data Link with Notebook) for Sample 3 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 11 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable1 (Data Link with Notebook) for Sample 4 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 12 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable1 (Data Link with Notebook) for Sample 5 PC/NB USB Data Link to EUT (eMMC)</p> <p>Mode 13 : LTE Band 5 Rx(High) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + USB Cable1 (Data Link with Notebook) for Sample 6 PC/NB USB Data Link to EUT (eMMC)</p>
Remark:	
<ol style="list-style-type: none"> 1. The worst case of AC is mode 4; only the test data of this mode is reported. 2. The worst case of RE is mode 4; only the test data of this mode is reported. 3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC. 4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 5/26, the worst channel was recorded in this report. 	

2.2. Connection Diagram of Test System

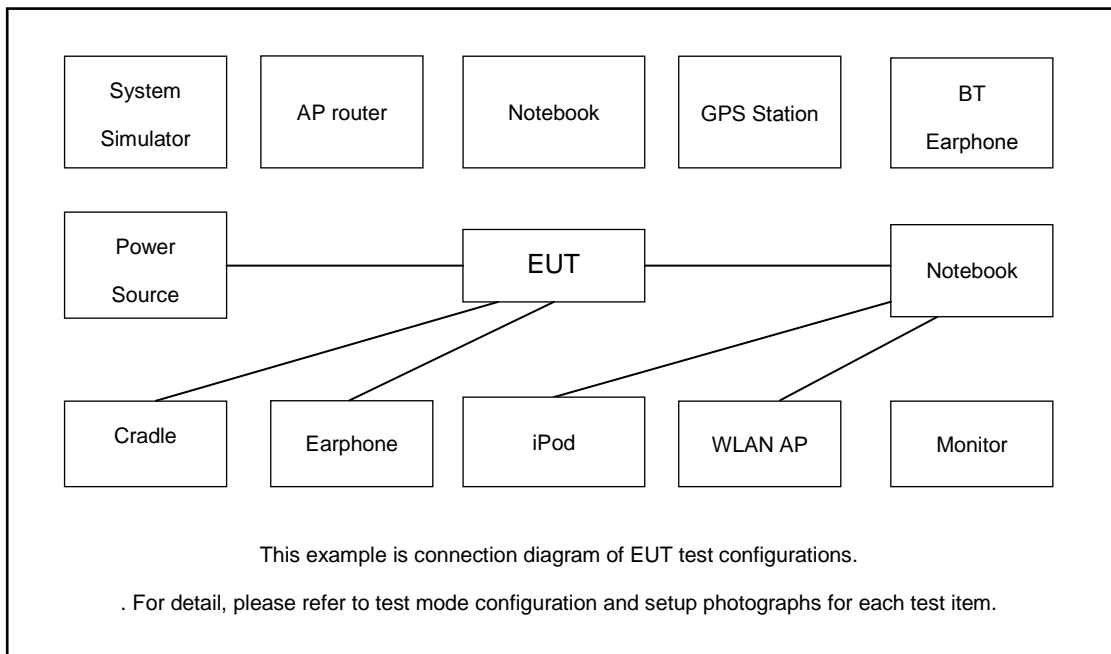

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Vector Signal Generator(BS)	R&S	SMBV100A	N/A	N/A	Unshielded, 1.8m
3.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8m
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
6.	Notebook	DELL	Latitude 3400	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Notebook	DELL	Inspiron 15-7570	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
9.	iPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
10.	Adapter	N/A	N/A	N/A	N/A	N/A
11.	Earphone	N/A	N/A	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Yuki Tang	Temperature :	20~23°C
		Relative Humidity :	41~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

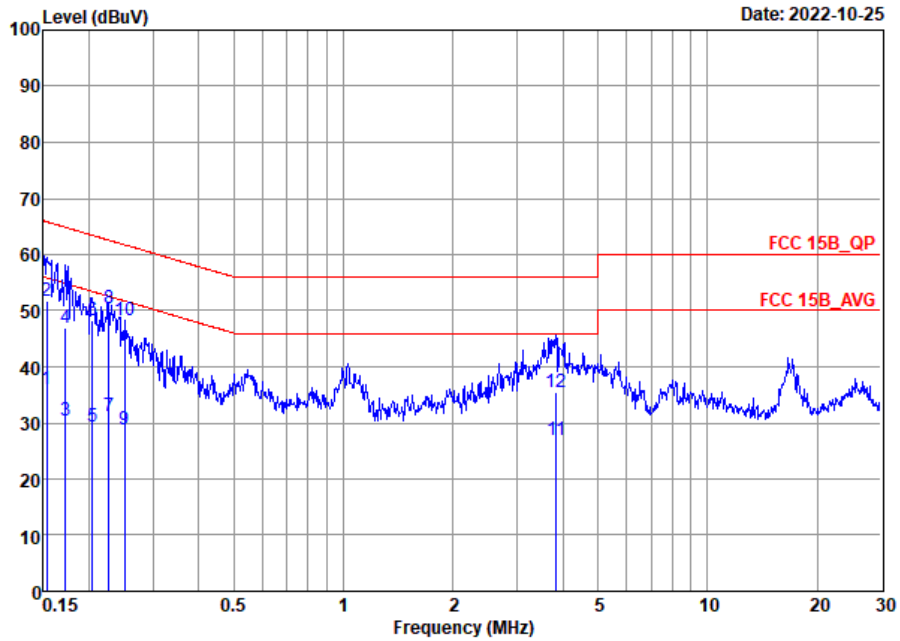


Site : C001-SZ
 Condition: FCC 15B_QP LISN_20220811_ L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	36.11	-19.71	55.82	15.10	10.20	10.81	Average
2	0.15	51.61	-14.21	65.82	30.60	10.20	10.81	QP
3	0.17	30.31	-24.55	54.86	9.60	10.20	10.51	Average
4	0.17	47.01	-17.85	64.86	26.30	10.20	10.51	QP
5	0.20	29.39	-24.06	53.45	8.99	10.20	10.20	Average
6	0.20	48.39	-15.06	63.45	27.99	10.20	10.20	QP
7	0.23	31.08	-21.49	52.57	10.50	10.19	10.39	Average
8 *	0.23	50.38	-12.19	62.57	29.80	10.19	10.39	QP
9	0.25	28.85	-22.88	51.73	8.10	10.18	10.57	Average
10	0.25	48.15	-13.58	61.73	27.40	10.18	10.57	QP
11	3.84	27.05	-18.95	46.00	6.80	10.01	10.24	Average
12	3.84	35.45	-20.55	56.00	15.20	10.01	10.24	QP



Test Engineer :	Yuki Tang	Temperature :	20~23°C
		Relative Humidity :	41~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

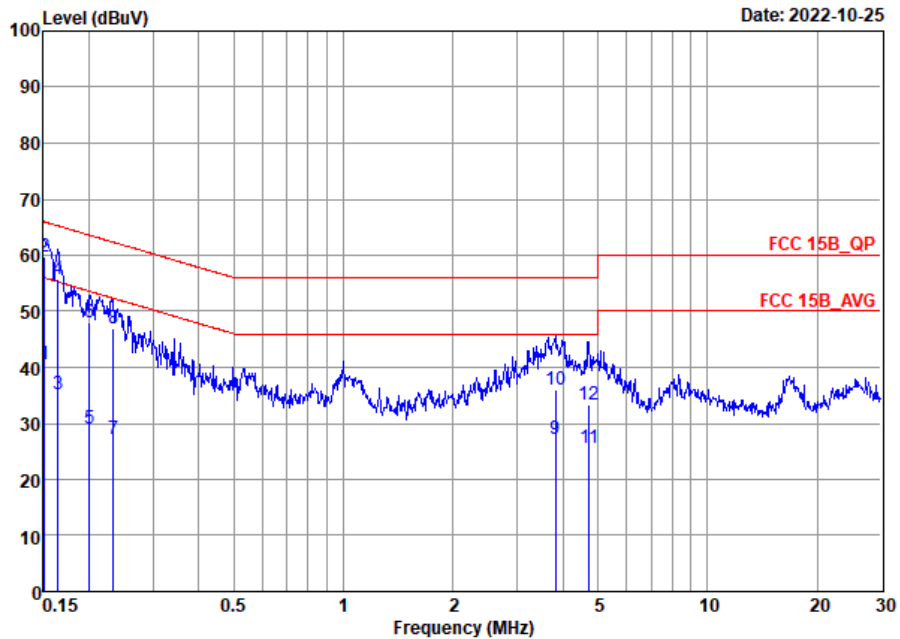

Site : CO01-SZ
 Condition: FCC 15B QP LISN 20220811 N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	40.66	-15.30	55.96	19.50	10.31	10.85	Average
2 *	0.15	59.86	-6.10	65.96	38.70	10.31	10.85	QP
3	0.16	35.24	-20.01	55.25	14.30	10.31	10.63	Average
4	0.16	55.74	-9.51	65.25	34.80	10.31	10.63	QP
5	0.20	28.94	-24.64	53.58	8.49	10.28	10.17	Average
6	0.20	47.94	-15.64	63.58	27.49	10.28	10.17	QP
7	0.23	27.20	-25.15	52.35	6.50	10.26	10.44	Average
8	0.23	46.90	-15.45	62.35	26.20	10.26	10.44	QP
9	3.82	27.29	-18.71	46.00	6.90	10.15	10.24	Average
10	3.82	36.09	-19.91	56.00	15.70	10.15	10.24	QP
11	4.72	25.68	-20.32	46.00	5.30	10.14	10.24	Average
12	4.72	33.28	-22.72	56.00	12.90	10.14	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

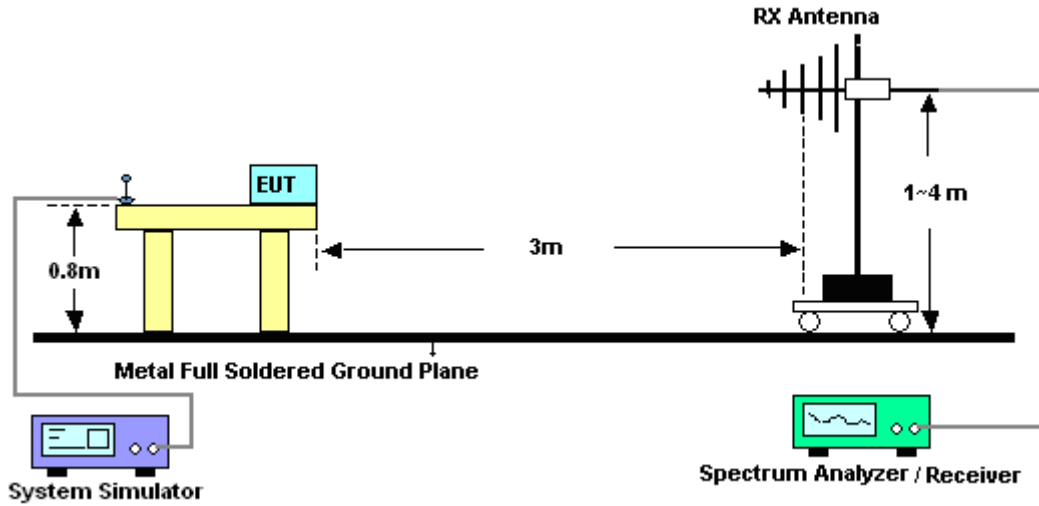


For radiated emissions above 1GHz

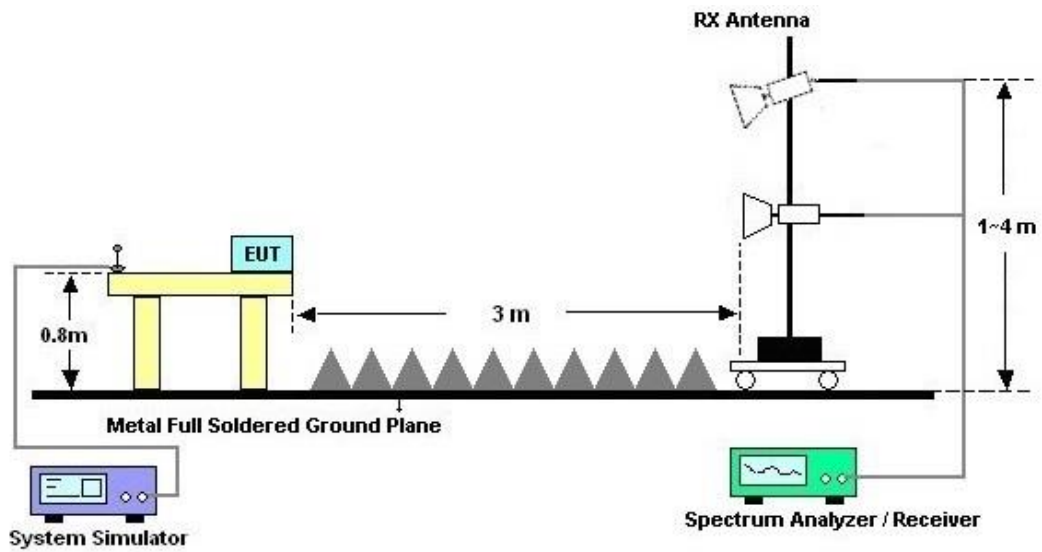



3.2.5. Test Result of Radiated Emission

Test Engineer :	Liu ZhanSheng	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored. #10 is RF signal which comes from WLAN Access Point used to connect the EUT, and which can be ignored.		

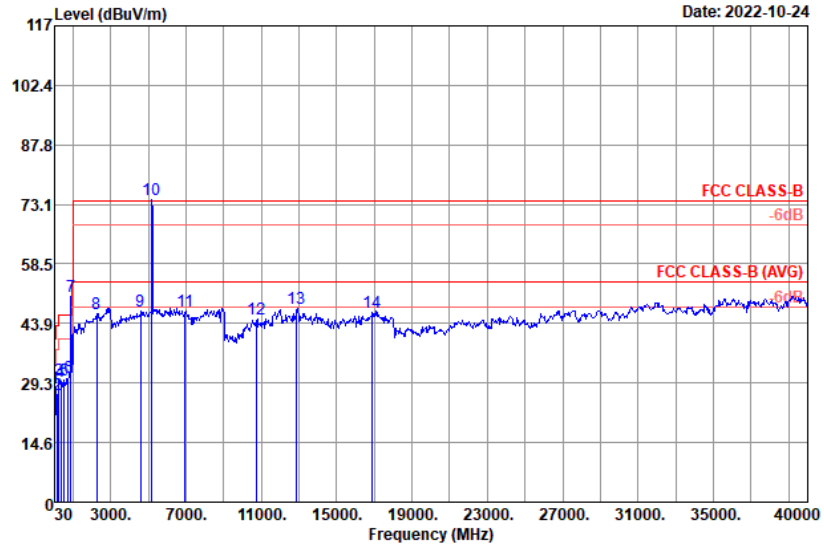


Site : 03CH05-SZ
Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL

Plane : Y

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	47.46	27.92	-12.08	40.00	40.98	20.27	1.64	34.97	---	---	Peak
2	179.38	26.40	-17.10	43.50	40.56	18.06	2.48	34.70	---	---	Peak
3	276.38	30.13	-15.87	46.00	42.67	19.18	2.93	34.65	---	---	Peak
4	369.50	29.70	-16.30	46.00	39.63	21.36	3.27	34.56	---	---	Peak
5	531.49	30.02	-15.98	46.00	36.30	24.43	3.79	34.50	---	---	Peak
6	769.14	30.65	-15.35	46.00	32.61	27.99	4.41	34.36	---	---	Peak
7 *	889.00	50.37			50.99	28.98	4.70	34.30	---	---	Peak
8	2256.00	46.30	-27.70	74.00	58.11	31.80	6.74	50.35	---	---	Peak
9	4611.00	46.88	-27.12	74.00	53.04	33.92	9.50	49.58	---	---	Peak
10 *	5180.00	74.21			79.95	34.12	9.53	49.39	---	---	Peak
11	6948.00	46.88	-27.12	74.00	50.37	35.69	10.88	50.06	---	---	Peak
12	10773.00	45.05	-28.95	74.00	41.48	37.66	14.09	48.18	---	---	Peak
13	12894.00	47.45	-26.55	74.00	38.68	39.14	16.31	46.68	---	---	Peak
14	16863.00	46.49	-27.51	74.00	38.98	41.88	17.11	51.48	---	---	Peak



Test Engineer :	Liu ZhanSheng	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored. #10 is RF signal which comes from WLAN Access Point used to connect the EUT, and which can be ignored.		

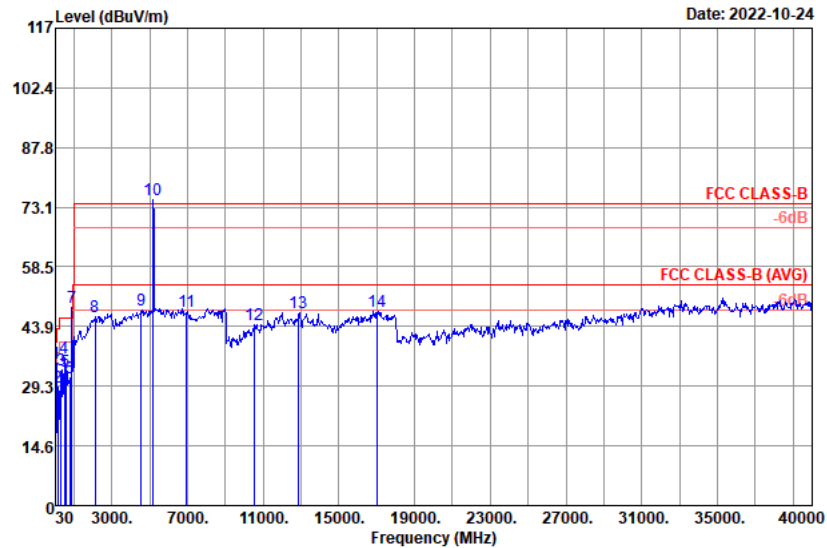

Site : 03CH05-SZ
 Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL
 Project : 291508-01

: NB TO EUT

	Freq	Level	Limit	lit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	Line	Level	Loss	Factor	cm	deg	
1	47.46	34.99	-5.01	40.00	48.05	20.27	1.64	34.97	---	Peak
2	160.95	28.94	-14.56	43.50	41.87	19.32	2.45	34.70	---	Peak
3	332.64	33.33	-12.67	46.00	44.15	20.63	3.15	34.60	---	Peak
4	497.54	36.30	-9.70	46.00	43.34	23.79	3.67	34.50	---	Peak
5	584.84	33.00	-13.00	46.00	38.07	25.50	4.00	34.57	---	Peak
6	772.05	31.25	-14.75	46.00	33.20	28.00	4.41	34.36	---	Peak
7 *	889.00	48.46			49.08	28.98	4.70	34.30	---	Peak
8	2142.00	46.27	-27.73	74.00	58.39	31.58	6.59	50.29	---	Peak
9	4548.00	47.83	-26.17	74.00	54.03	33.90	9.49	49.59	---	Peak
10 *	5180.00	75.01			80.75	34.12	9.53	49.39	---	Peak
11	6966.00	47.49	-26.51	74.00	51.03	35.69	10.88	50.11	---	Peak
12	10527.00	44.40	-29.60	74.00	41.35	37.52	13.91	48.38	---	Peak
13	12870.00	47.13	-26.87	74.00	38.40	39.12	16.31	46.70	---	Peak
14	17043.00	47.54	-26.46	74.00	39.85	42.06	17.12	51.49	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	May 20, 2022	Oct. 24, 2022	May 19, 2023	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 06, 2022	Oct. 24, 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Mar. 24, 2022	Oct. 24, 2022	May 23, 2023	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 10, 2022	Oct. 24, 2022	Apr. 09, 2023	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 10, 2022	Oct. 24, 2022	Apr. 09, 2023	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 06, 2022	Oct. 24, 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr. 06, 2022	Oct. 24, 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 06, 2022	Oct. 24, 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	NCR	Oct. 24, 2022	NCR	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Oct. 24, 2022	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Oct. 24, 2022	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Oct. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Oct. 25, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 29, 2021	Oct. 25, 2022	Oct. 28, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Oct. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.1dB
---	-------

———— THE END ————