



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 10.19.2021

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1176

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7517; ConvF(8.22, 8.22, 8.22) @ 1750 MHz; Calibrated: 2021-02-03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2021-01-15
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 97.37 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.83 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 14.4 W/kg

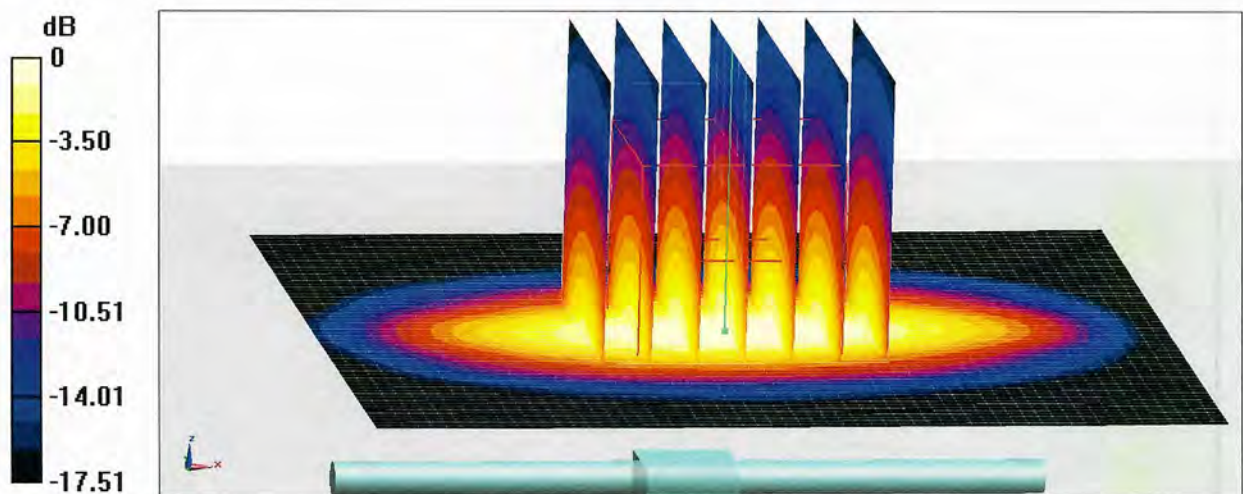


0 dB = 14.4 W/kg = 11.58 dBW/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

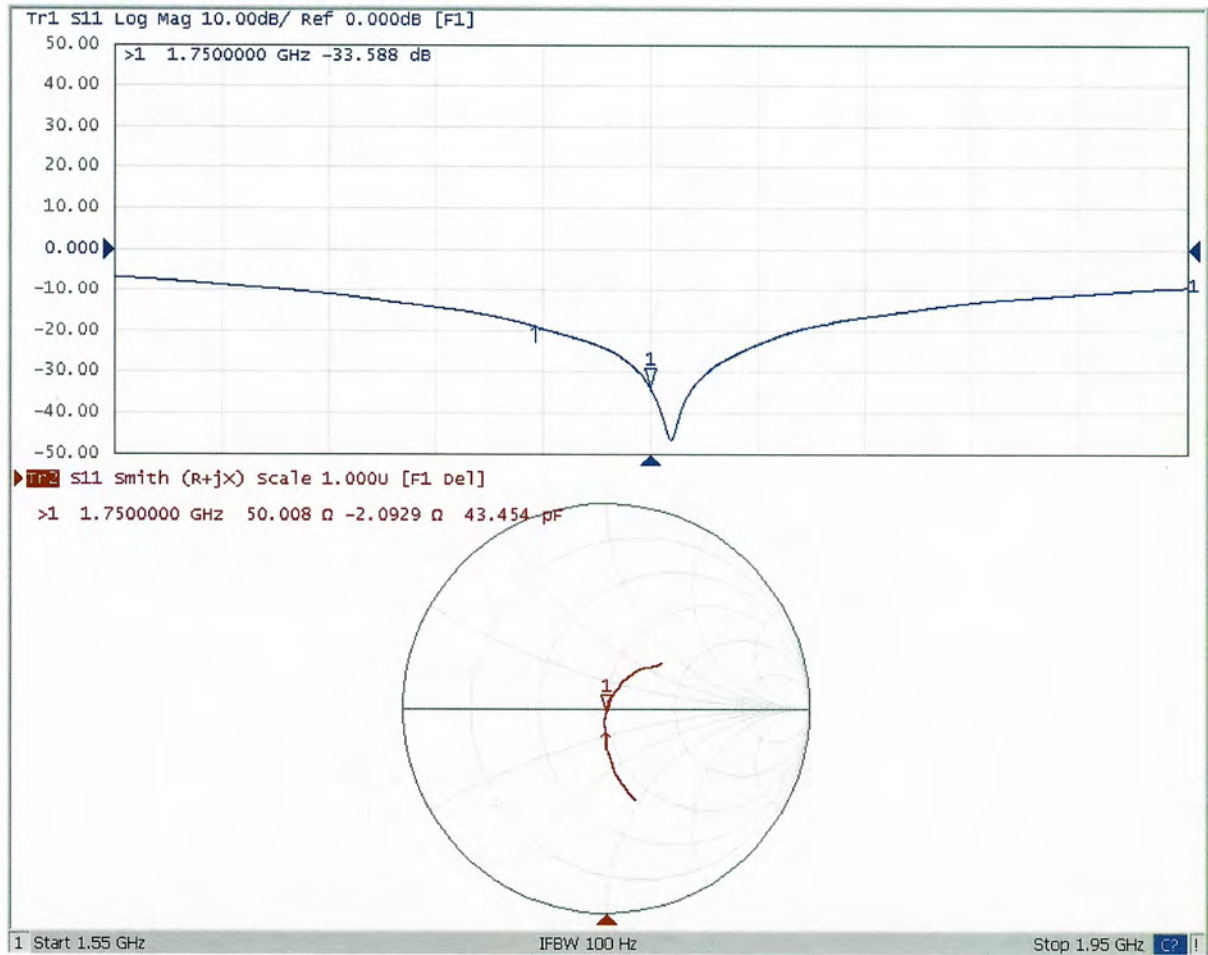

D1750V2 - SN: 1176 Extended Dipole Calibrations

Referring to KDB 865664 D01, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


D1750V2 - SN: 1176						
1750MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.19.2021	-33.6		50		-2.09	
10.18.2022	-30.93	-7.94	47.22	-2.78	-0.31	1.78
10.17.2023	-30.44	-9.41	47.85	-2.15	1.96	4.05

<Justification of the extended calibration>

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data>

Head 1750MHz _2022.10.18

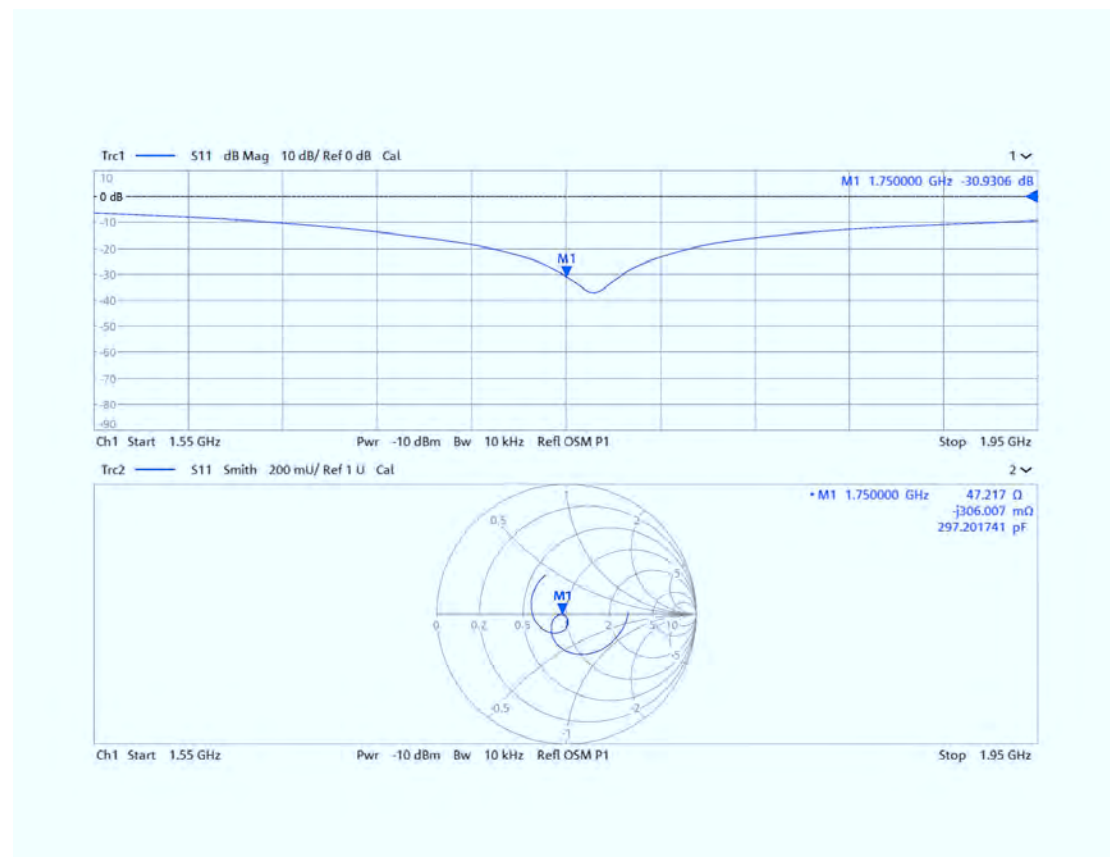


<Dipole Verification Data>

Head 1750MHz _2023.10.17

Trc1 — S11 dB Mag 10 dB/ Ref 0 dB Cal

1

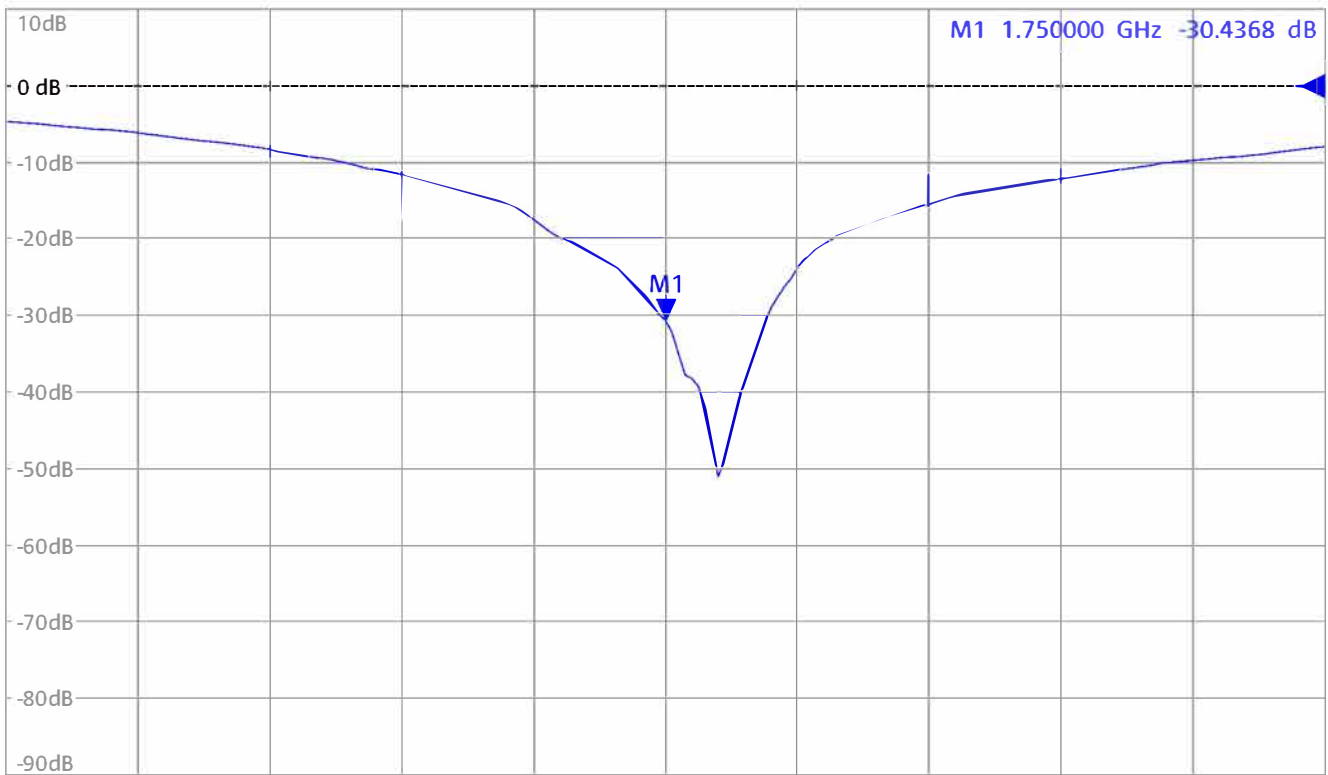


Ch1 Start 1.55 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 1.95 GHz

Trc2 — S11 Smith 200 mU/ Ref 1 U Cal

2

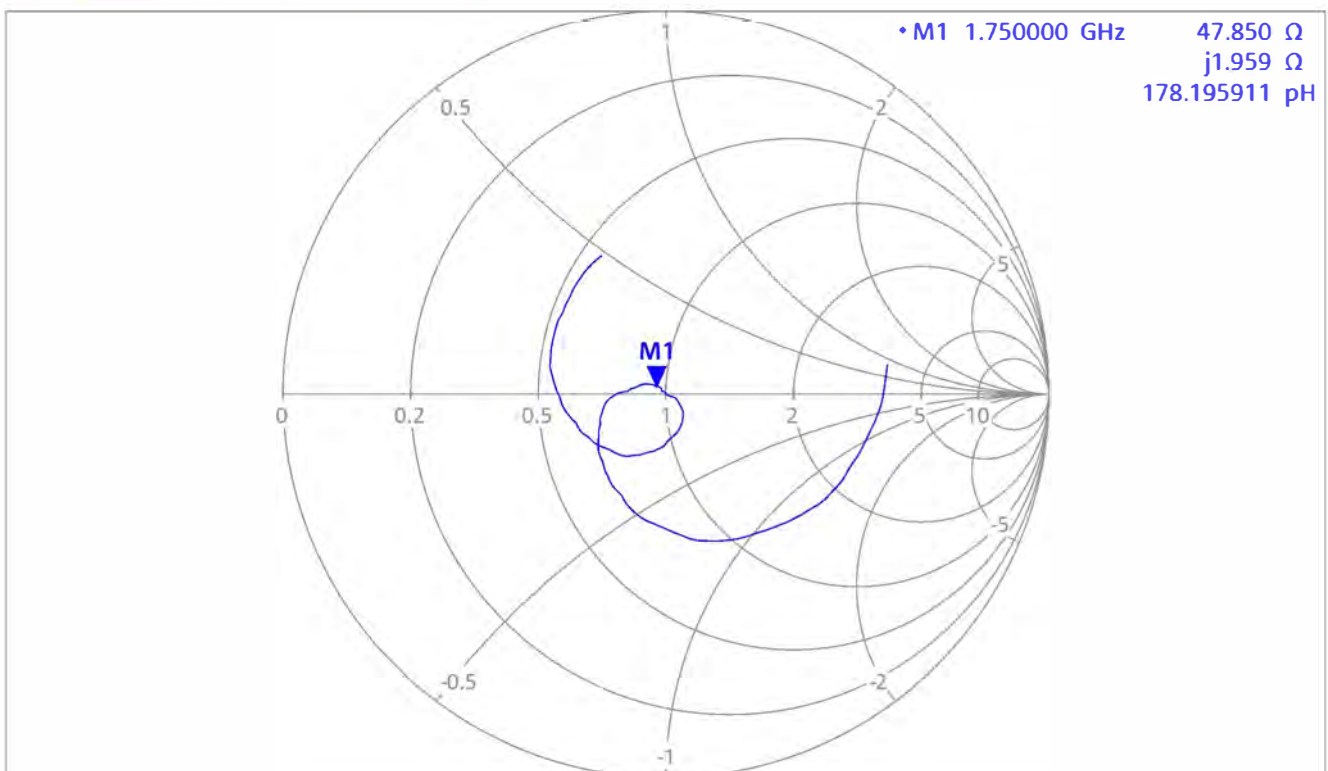

Ch1 Start 1.55 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 1.95 GHz



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, Chi
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **7layers**

Certificate No: **Z21-60423**

CALIBRATION CERTIFICATE

Object **D1950V3 - SN: 1229**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **October 28, 2021**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22\pm3)^{\circ}\text{C}$ and humidity $<70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7517	03-Feb-21(CTTL-SPEAG,No.Z21-60001)	Feb-22
DAE4	SN 1556	15-Jan-21(SPEAG,No.DAE4-1556_Jan21)	Jan-22
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-21 (CTTL, No.J21X00593)	Jan-22
NetworkAnalyzer E5071C	MY46110673	14-Jan-21 (CTTL, No.J21X00232)	Jan-22

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: October 31, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1950 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.9 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.3 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.3 W/kg $\pm$ 18.7 % (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.5\Omega + 2.19j\Omega$
Return Loss	- 33.0dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.102 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 10.28.2021

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1950 MHz; Type: D1950V3; Serial: D1950V3 - SN: 1229

Communication System: UID 0, CW; Frequency: 1950 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.86$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7517; ConvF(7.81, 7.81, 7.81) @ 1950 MHz; Calibrated: 2021-02-03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2021-01-15
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 103.9 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 20.0 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.08 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 16.3 W/kg

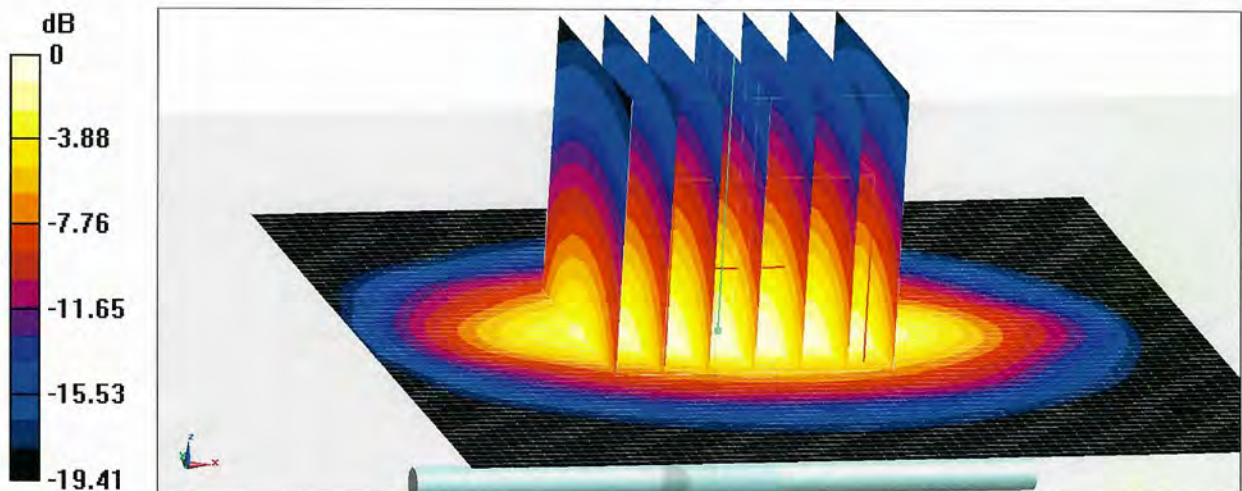

0 dB = 16.3 W/kg = 12.12 dBW/kg




In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

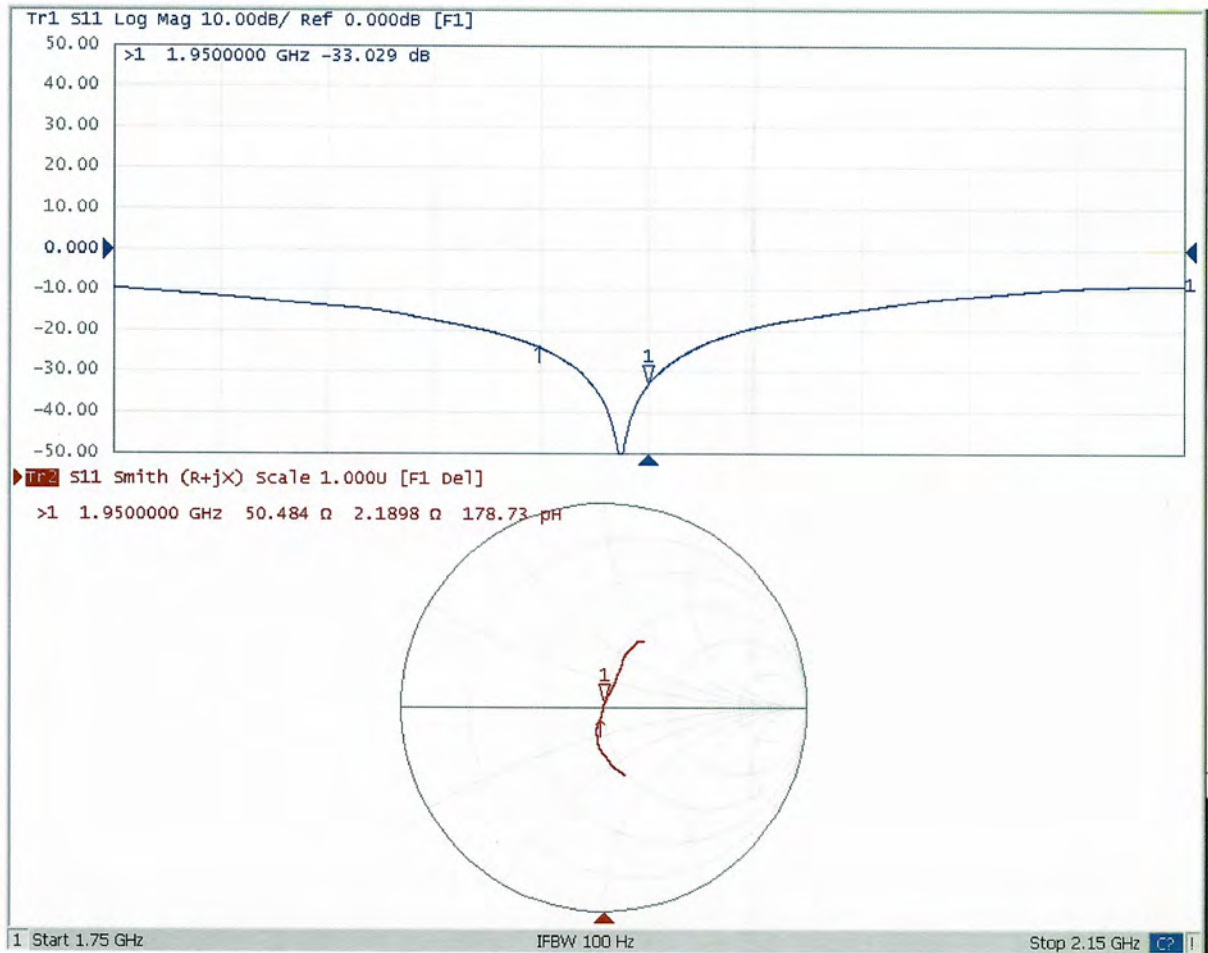

D1950V3 - SN: 1229 Extended Dipole Calibrations

Referring to KDB 865664 D01, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


D1950V3 - SN: 1229						
1950MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.28.2021	-33		50.5		2.19	
10.27.2022	-29.58	-10.36	46.95	-3.55	-1.08	-3.27
10.26.2023	-28.50	-13.63	46.77	-3.73	3.33	1.14

<Justification of the extended calibration>

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data>

Head 1950MHz _2022.10.27

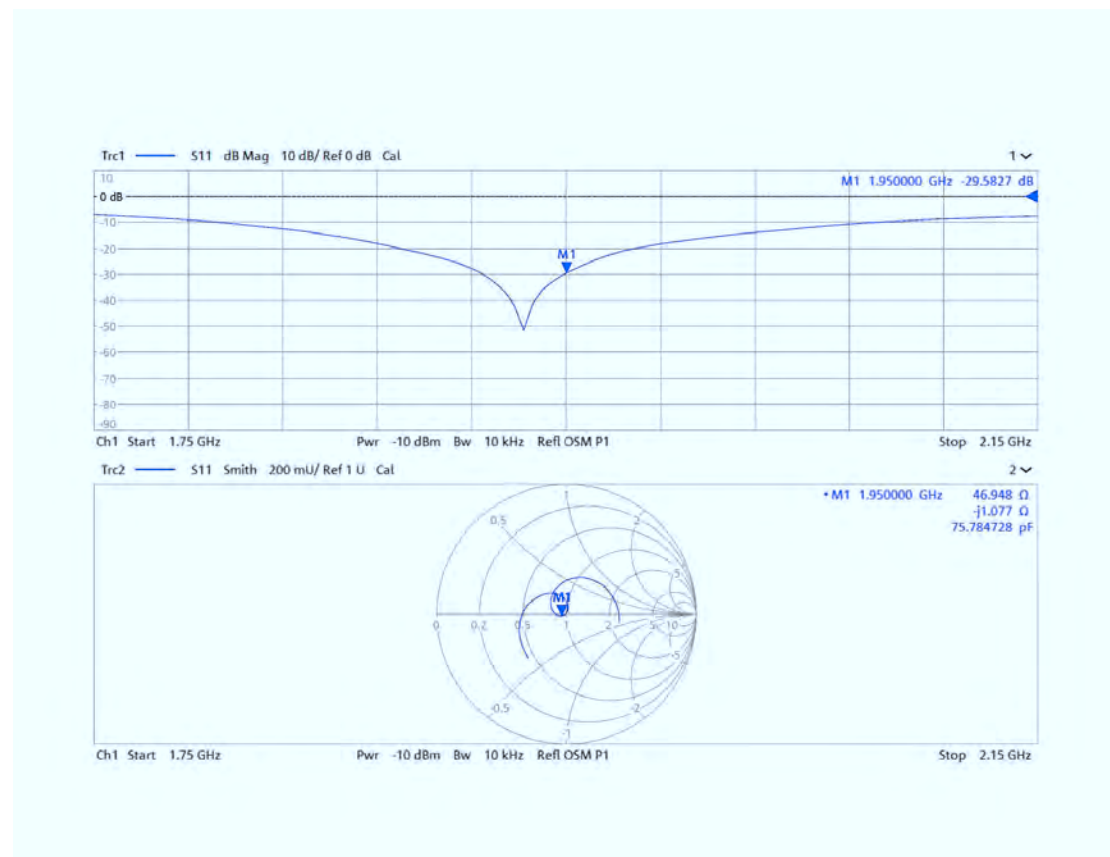


<Dipole Verification Data>

Head 1950MHz _2023.10.26

Trc1 — S11 dB Mag 10 dB/ Ref 0 dB Cal

1

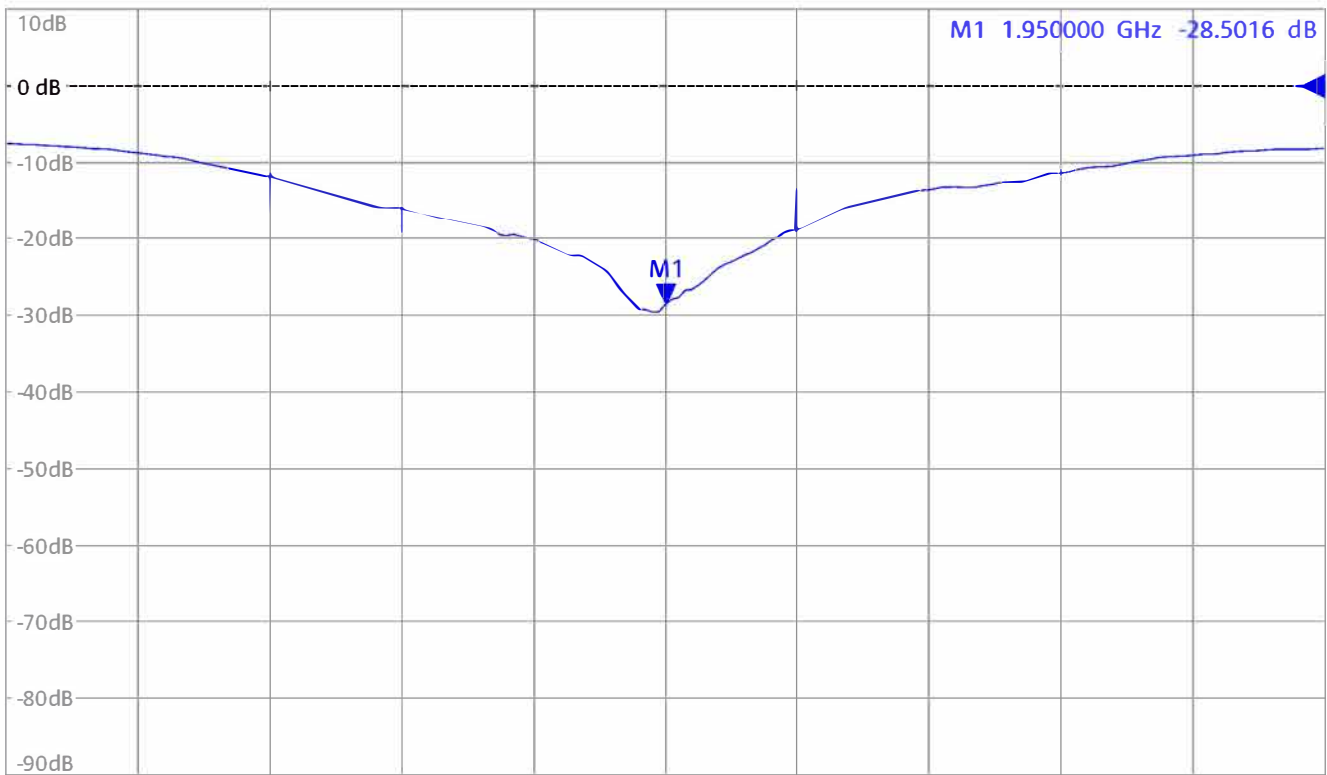


Ch1 Start 1.75 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 2.15 GHz

Trc2 — S11 Smith 200 mU/ Ref 1 U Cal

2

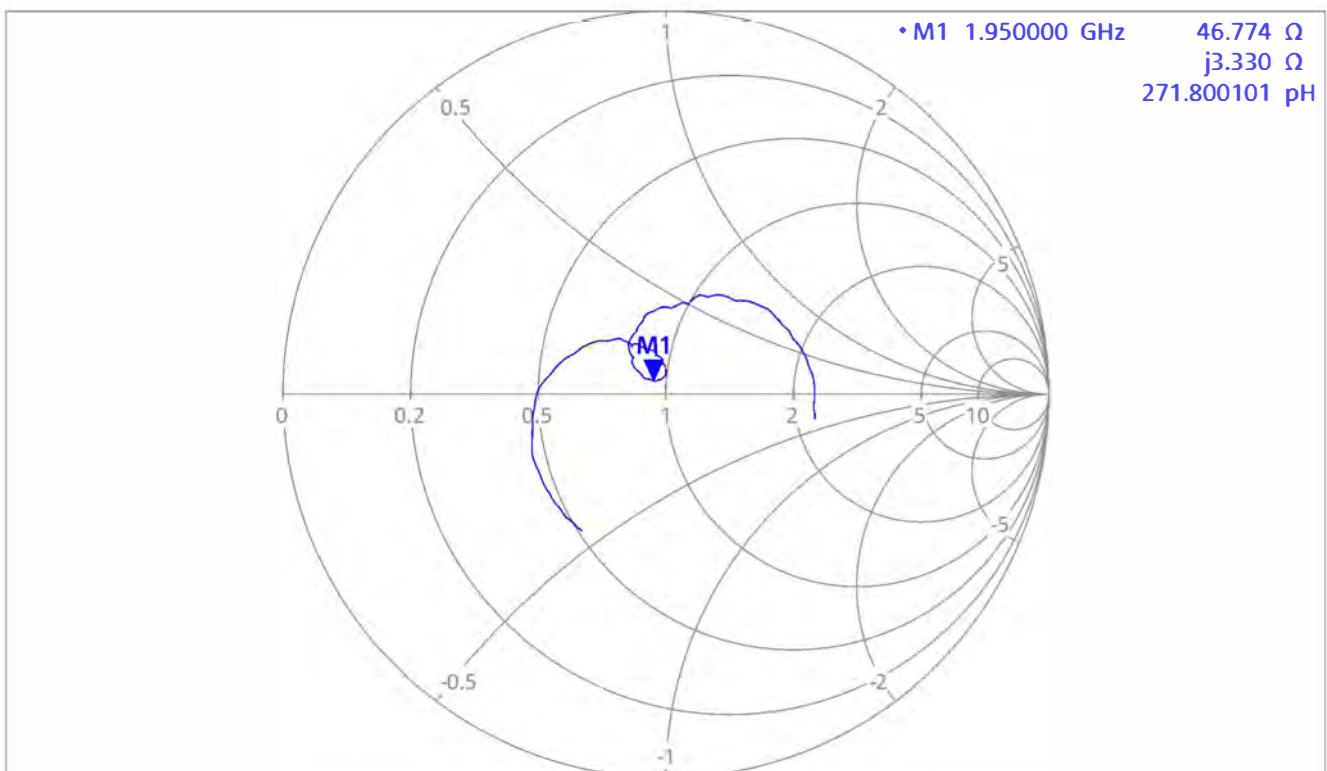

Ch1 Start 1.75 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 2.15 GHz



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, Chi
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

7layers

Certificate No: Z21-60425

CALIBRATION CERTIFICATE

Object D2450V2 - SN: 1048

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits

Calibration date: October 21, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22\pm3)^{\circ}\text{C}$ and humidity $<70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7517	03-Feb-21(CTTL-SPEAG,No.Z21-60001)	Feb-22
DAE4	SN 1556	15-Jan-21(SPEAG,No.DAE4-1556_Jan21)	Jan-22
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-21 (CTTL, No.J21X00593)	Jan-22
NetworkAnalyzer E5071C	MY46110673	14-Jan-21 (CTTL, No.J21X00232)	Jan-22

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: October 27, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.5 $\pm$ 6 %	1.81 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.8 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 18.7 % (k=2)



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.6Ω+ 8.39jΩ
Return Loss	- 21.6dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.057 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 10.21.2021

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 1048

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7517; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2021-02-03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2021-01-15
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.6 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.05 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 22.5 W/kg

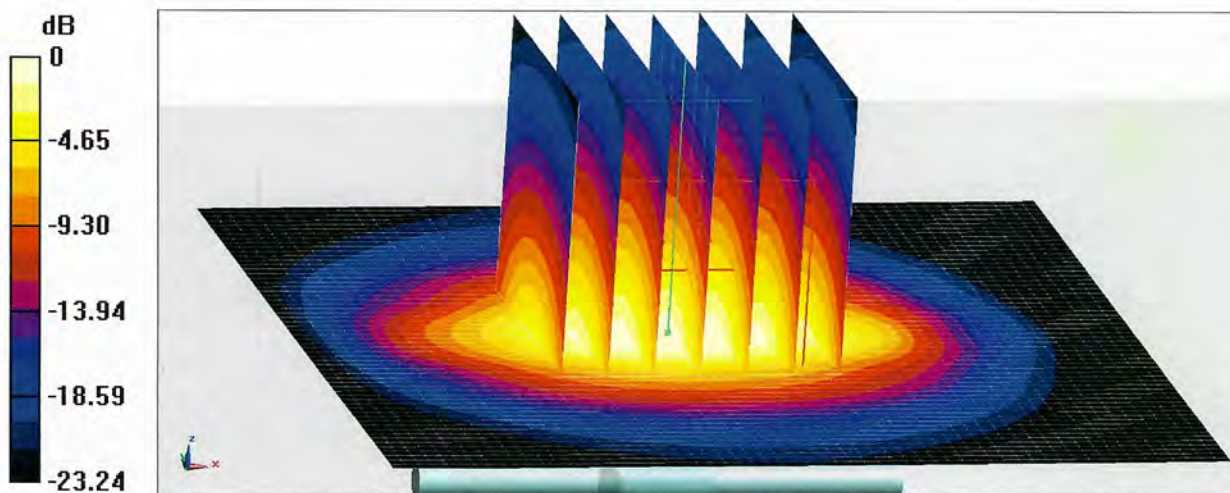

0 dB = 22.5 W/kg = 13.52 dBW/kg



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

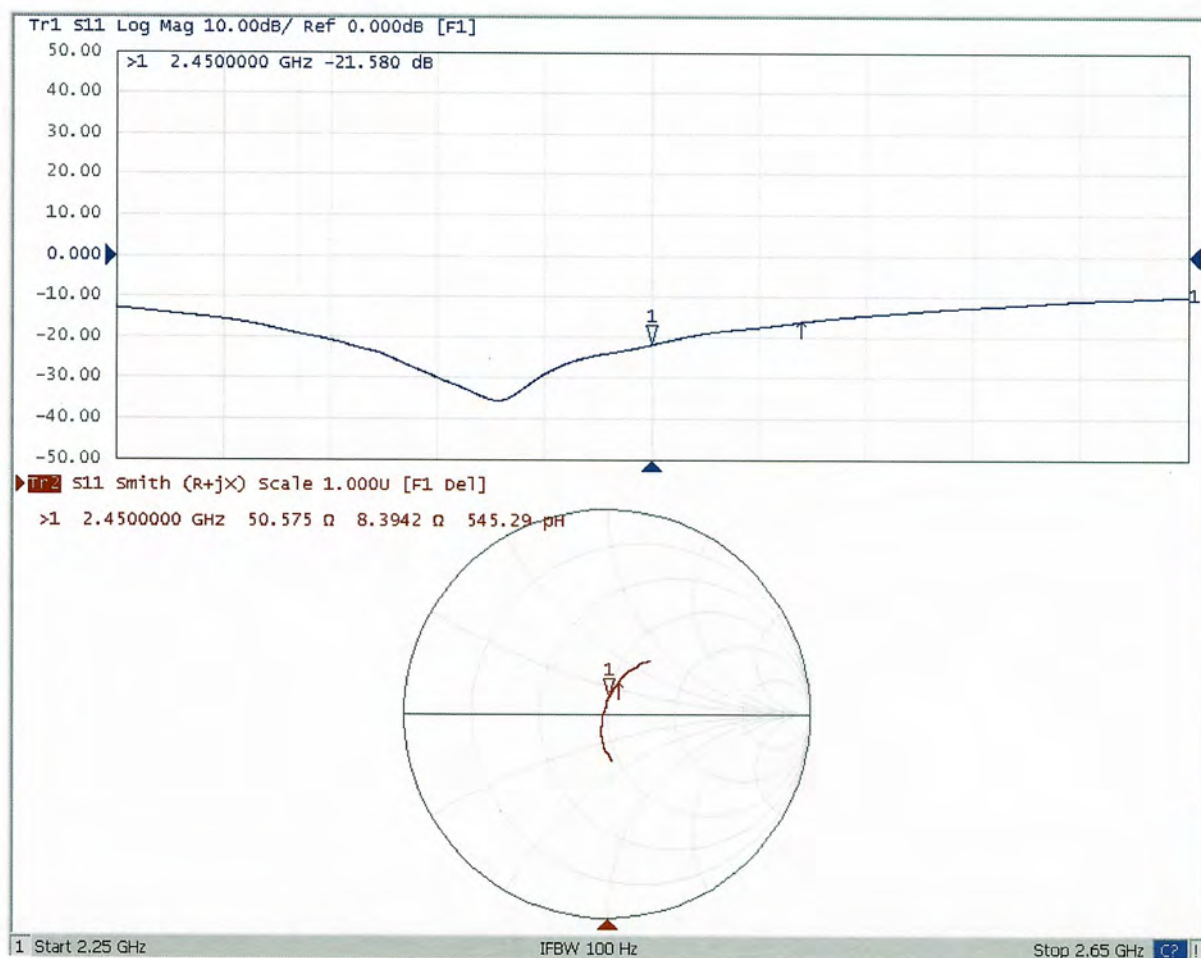

D2450V2 - SN: 1048 Extended Dipole Calibrations

Referring to KDB 865664 D01, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


D2450V2 - SN: 1048						
2450MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.21.2021	-21.6		50.6		8.39	
10.20.2022	-22.45	3.94	51.32	0.72	7.49	-0.90
10.19.2023	-24.13	11.71	47.08	-3.52	5.46	-2.93

<Justification of the extended calibration>

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data>

Head 2450MHz _2022.10.20

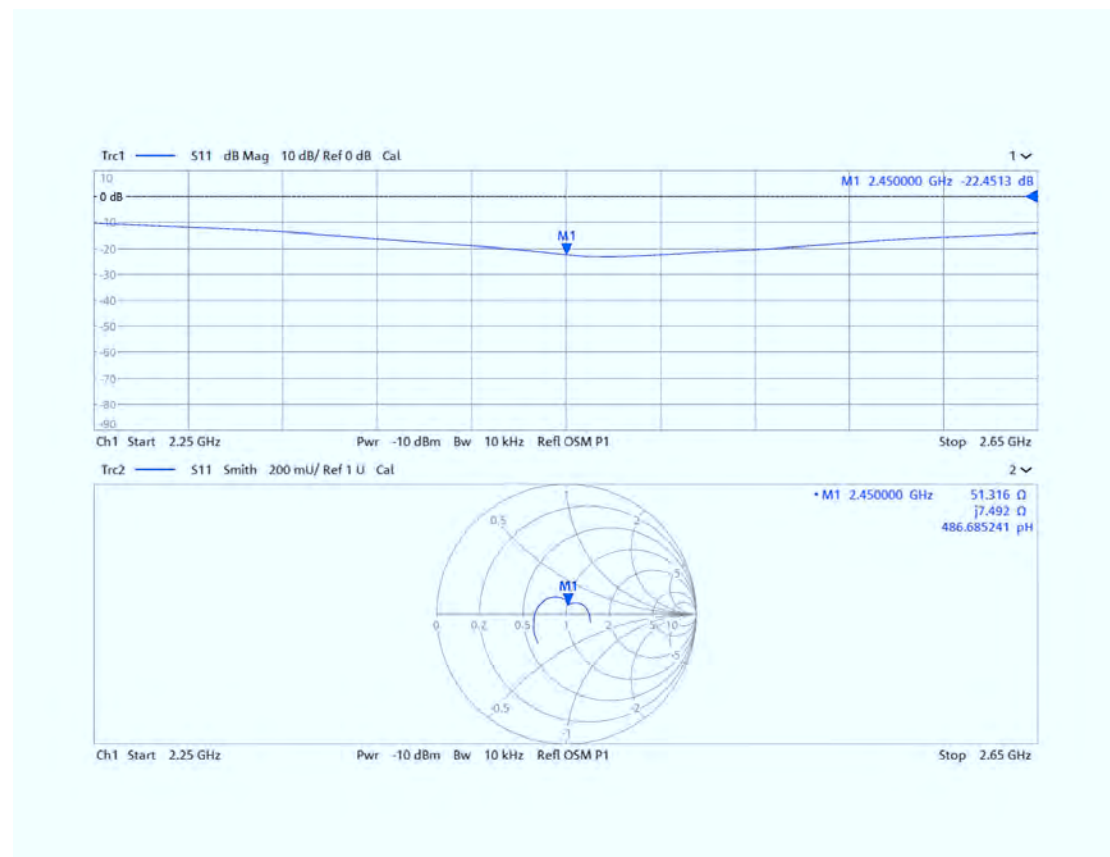


<Dipole Verification Data>

Head 2450MHz _2023.10.19

Trc1 — S11 dB Mag 10 dB/ Ref 0 dB Cal

1

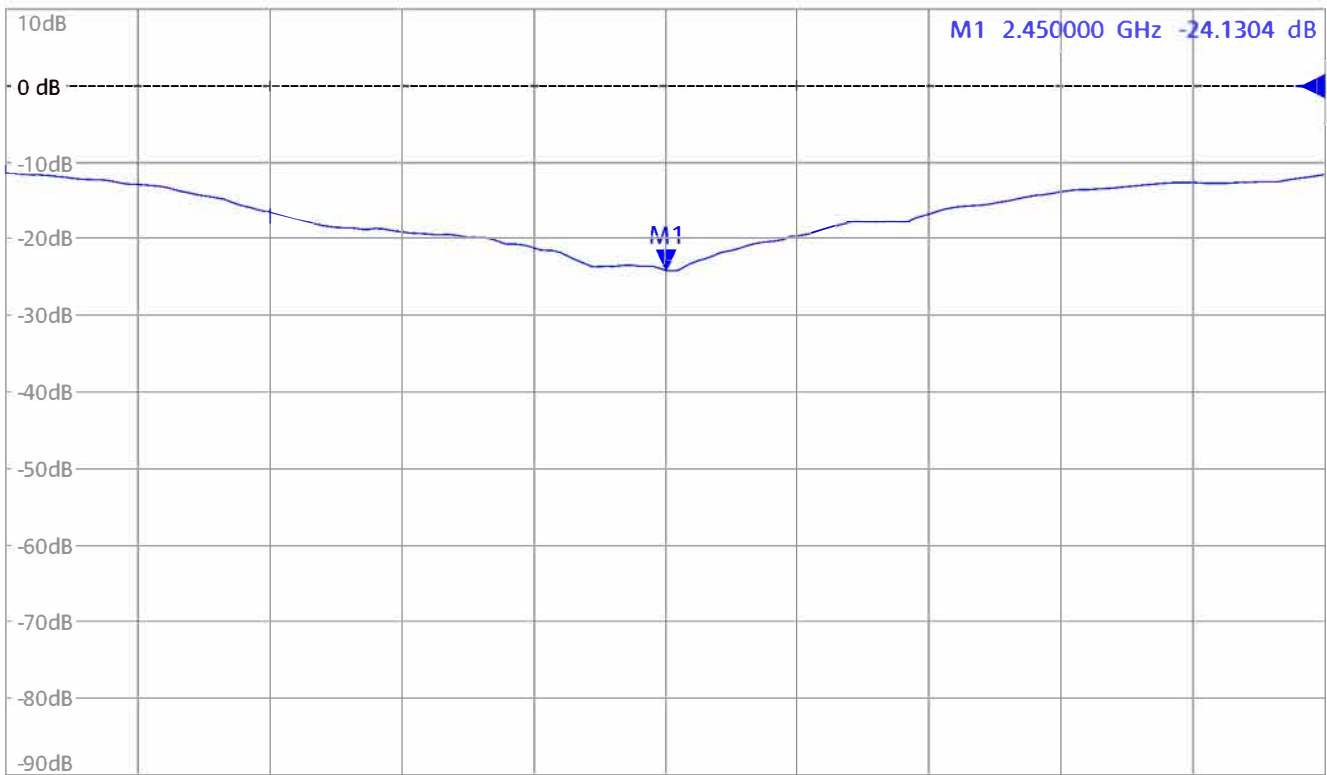


Ch1 Start 2.25 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 2.65 GHz

Trc2 — S11 Smith 200 mU/ Ref 1 U Cal

2

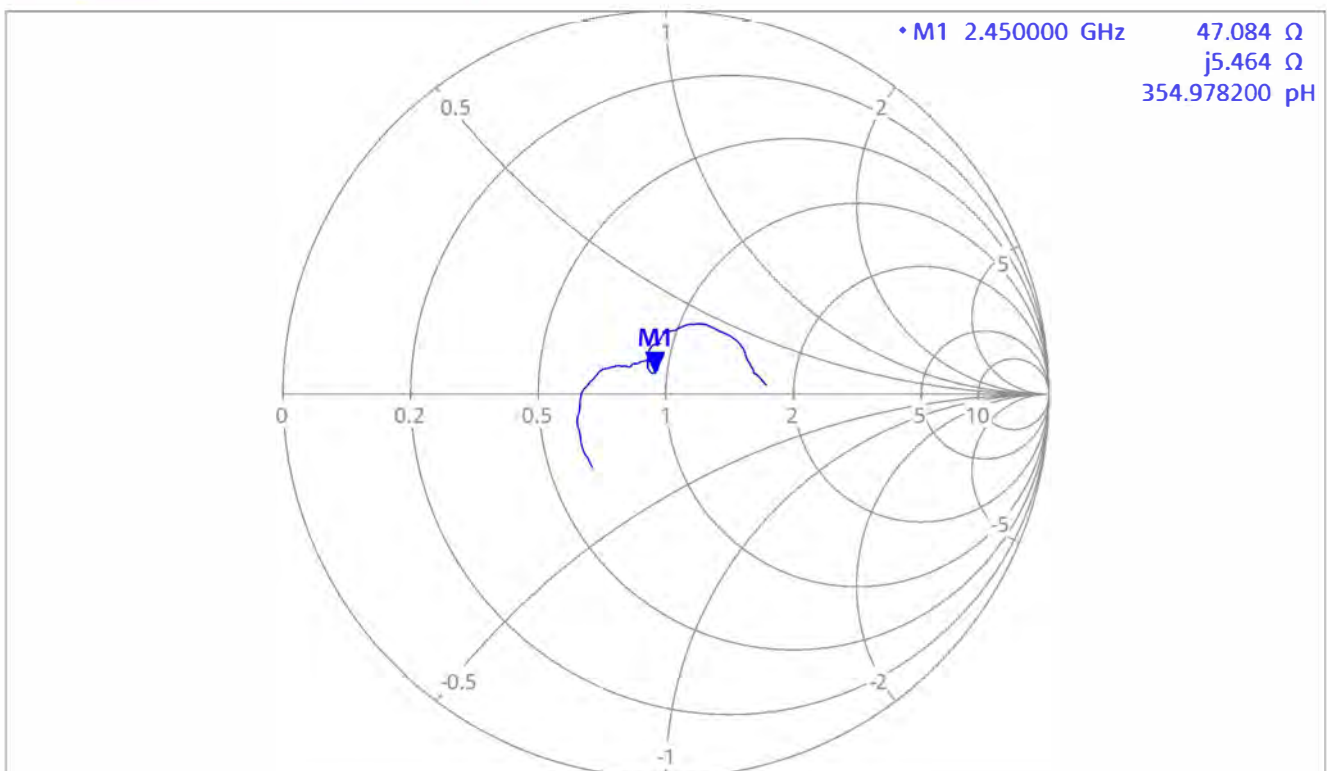

Ch1 Start 2.25 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 2.65 GHz



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **7-Layers (Auden)**

Certificate No: **D2550V2-1022_Sep22**

CALIBRATION CERTIFICATE

Object **D2550V2 - SN:1022**

Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **September 22, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 601	31-Aug-22 (No. DAE4-601_Aug22)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Sven Kühn	Technical Manager	

Issued: September 23, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2550 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.1	1.91 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.4 $\pm$ 6 %	1.95 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.0 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.0 Ω - 4.0 j Ω
Return Loss	- 27.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 22.09.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2550 MHz; Type: D2550V2; Serial: D2550V2 - SN:1022

Communication System: UID 0 - CW; Frequency: 2550 MHz

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.85, 7.85, 7.85) @ 2550 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 31.08.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.1 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.13 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 22.6 W/kg

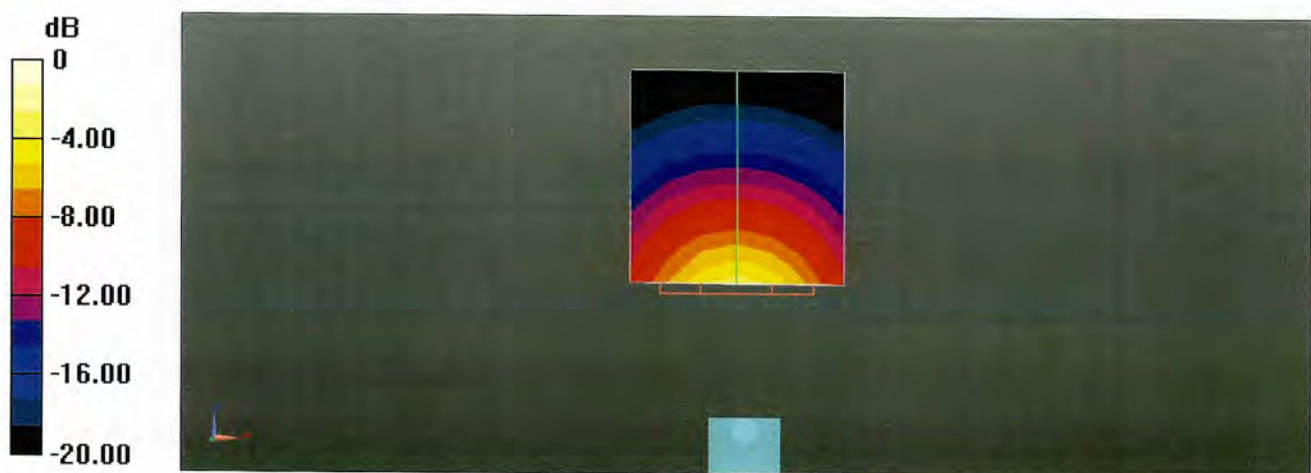

0 dB = 22.6 W/kg = 13.54 dBW/kg

Impedance Measurement Plot for Head TSL

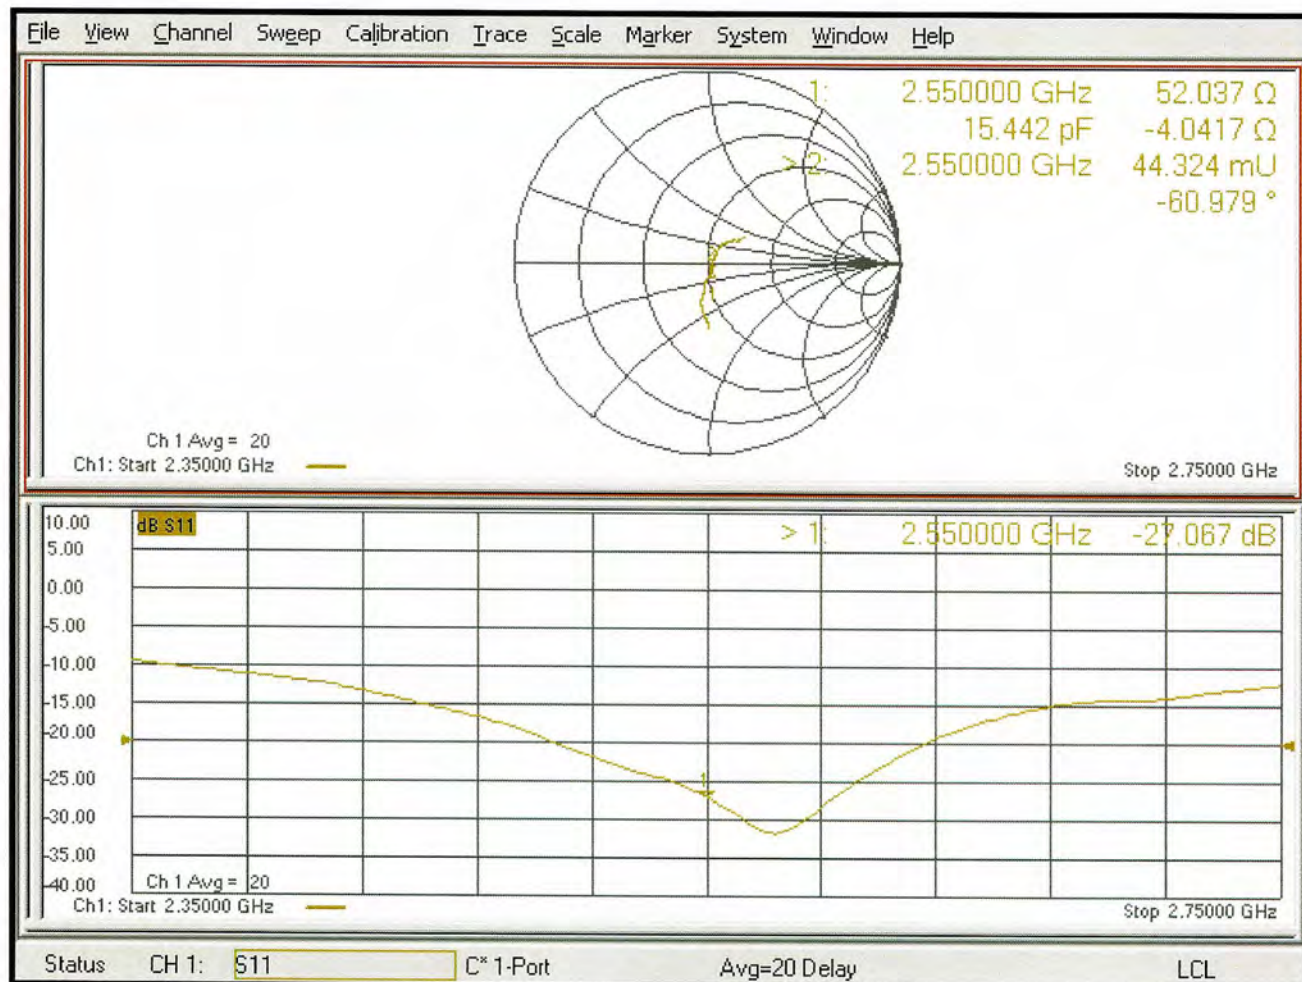

D2550V2 - SN: 1022 Extended Dipole Calibrations

Referring to KDB 865664 D01, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.



D2550V2 - SN: 1022						
2550MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
9.22.2022	-27.1		52		-4	
9.21.2023	-23.13	-14.66	54.77	2.77	-5.52	-1.52

<Justification of the extended calibration>

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data>

Head 2550MHz _2023.09.21

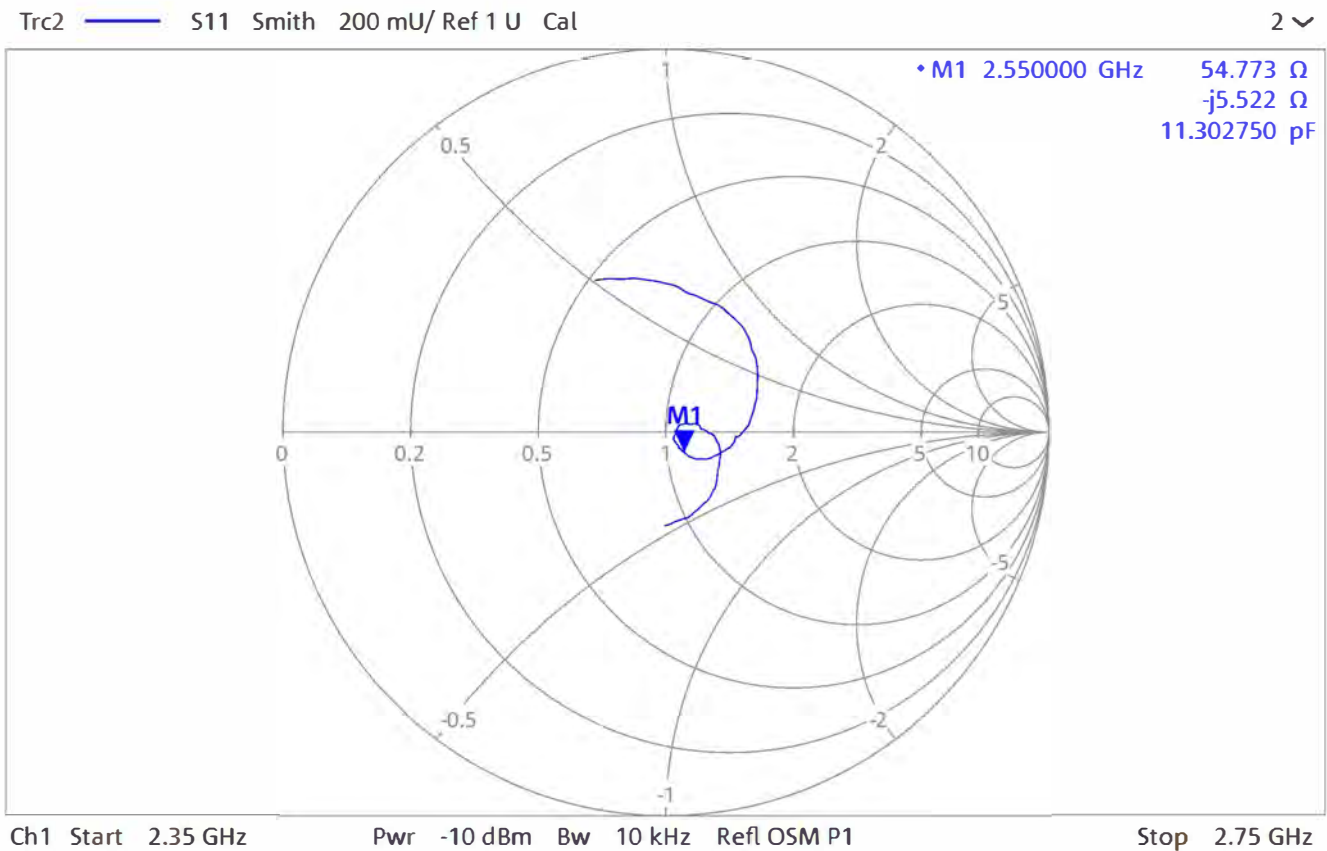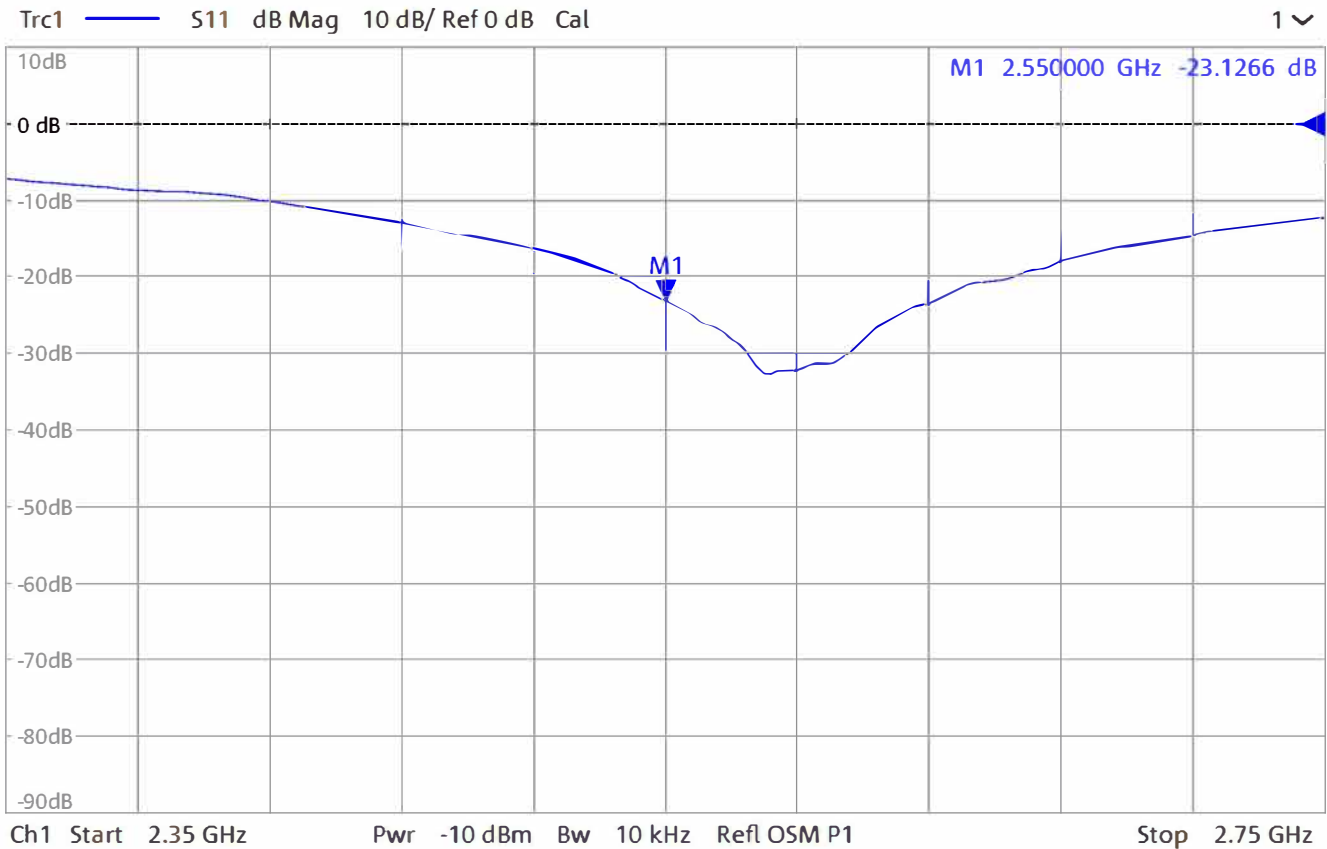

Client

7layers

Certificate No: Z21-60431

CALIBRATION CERTIFICATE

Object D5GHzV2 - SN: 1315

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits


Calibration date: October 22, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22\pm3)^{\circ}\text{C}$ and humidity $<70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
ReferenceProbe EX3DV4	SN 7517	03-Feb-21(CTTL-SPEAG,No.Z21-60001)	Feb-22
DAE4	SN 1556	15-Jan-21(SPEAG,No.DAE4-1556_Jan21)	Jan-22
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-21 (CTTL, No.J21X00593)	Jan-22
NetworkAnalyzerE5071C	MY46110673	14-Jan-21 (CTTL, No.J21X00232)	Jan-22

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: October 27, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.6 $\pm$ 6 %	4.70 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.9 W/kg $\pm$ 24.4 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg $\pm$ 24.2 % (k=2)



Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	5.08 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.9 W/kg ± 24.4 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 24.2 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.8 ± 6 %	5.25 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.1 W/kg ± 24.4 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.7 W/kg ± 24.2 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	$50.5\Omega - 3.27j\Omega$
Return Loss	- 29.7dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	$54.2\Omega + 0.81j\Omega$
Return Loss	- 27.8dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	$49.4\Omega + 1.99j\Omega$
Return Loss	- 33.6dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.098 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 10.22.2021

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1315

Communication System: CW; Frequency: 5250 MHz, Frequency: 5600 MHz,
Frequency: 5750 MHz,

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.704$ S/m; $\epsilon_r = 36.62$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.084$ S/m; $\epsilon_r = 36$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.248$ S/m; $\epsilon_r = 35.78$; $\rho = 1000$ kg/m³,

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7517; ConvF(5.42, 5.42, 5.42) @ 5250 MHz; ConvF(4.75, 4.75, 4.75) @ 5600 MHz; ConvF(4.82, 4.82, 4.82) @ 5750 MHz; Calibrated: 2021-02-03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2021-01-15
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Dipole Calibration /Pin=100mW, d=10mm, f=5250 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.32 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 18.2 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.09 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 19.9 W/kg




In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Dipole Calibration /Pin=100mW, d=10mm, f=5750 MHz/Zoom Scan,
dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 67.72 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 33.5 W/kg
SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.16 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 18.6 W/kg

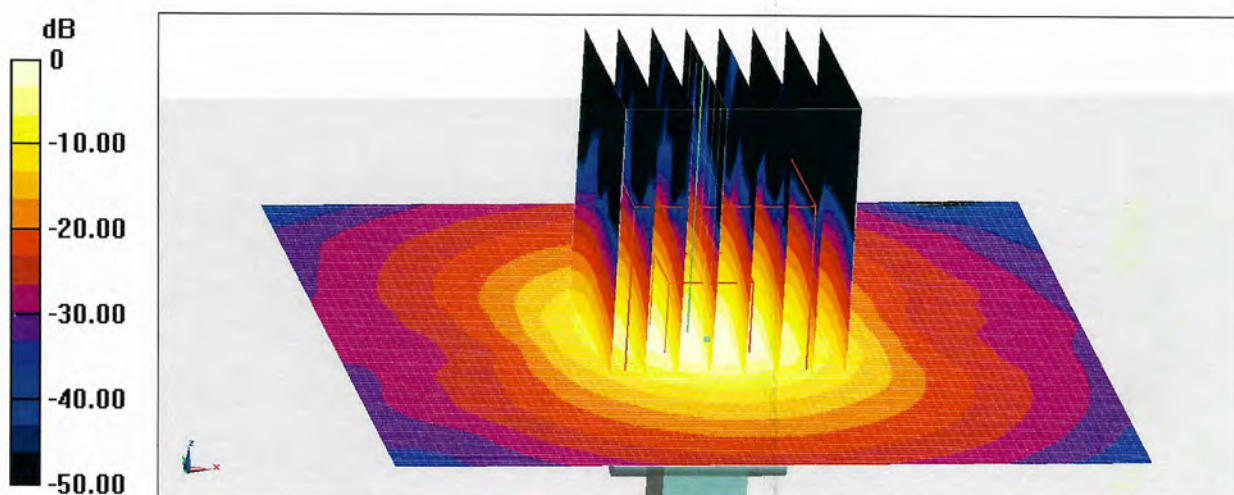




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

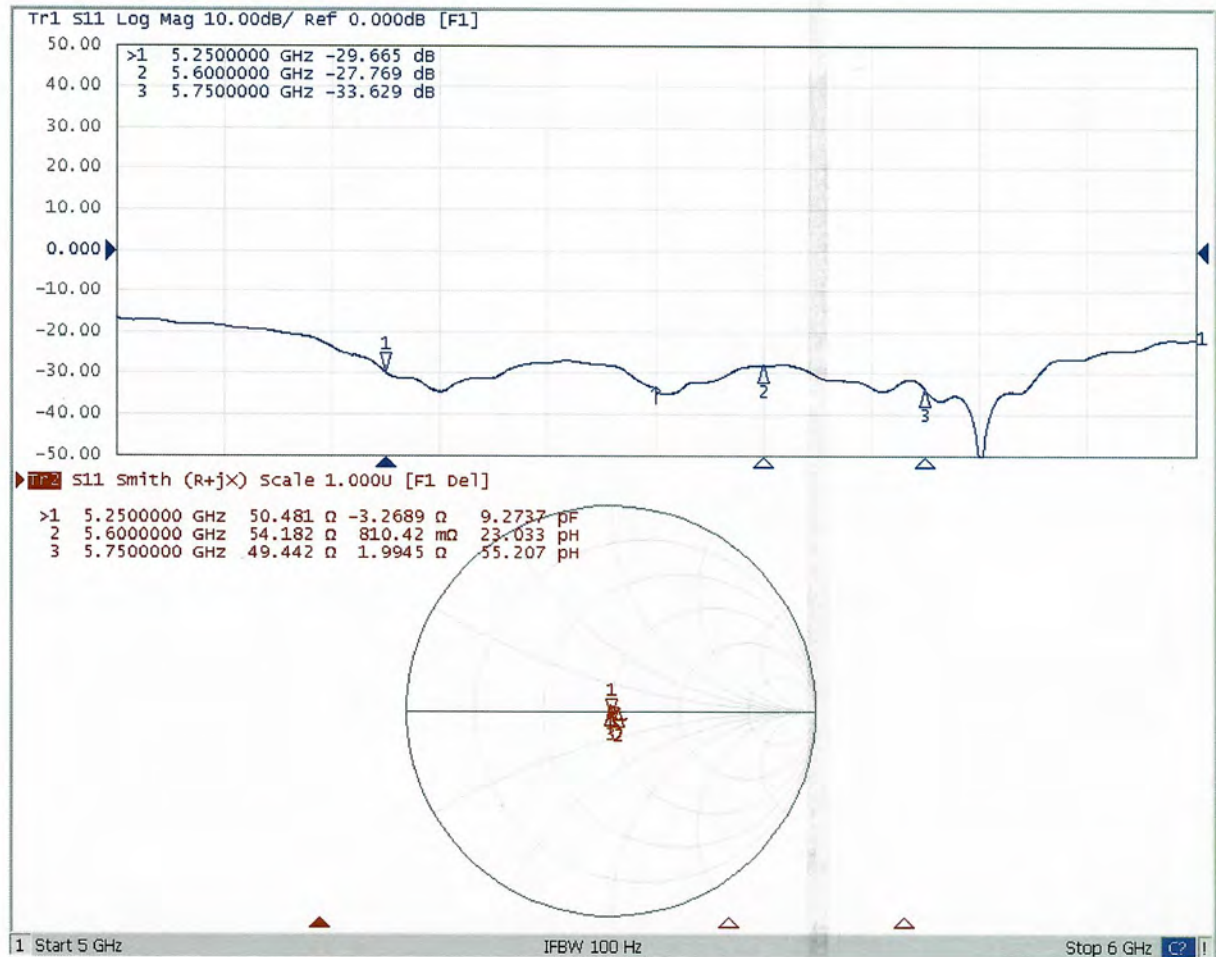

D5GHzV2 - SN: 1315 Extended Dipole Calibrations

Referring to KDB 865664 D01, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

D5GHzV2 - SN: 1315						
5250MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2021	-29.7		50.5		-3.27	
10.21.2022	-34.53	16.26	51.16	0.66	1.56	4.83
10.20.2023	-25.84	-12.98	54.50	4.00	-2.96	0.31


D5GHzV2 - SN: 1315						
5600MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2021	-27.8		54.2		0.81	
10.21.2022	-31.03	11.63	49.59	-4.61	-2.79	-3.60
10.20.2023	-26.15	-5.95	54.92	0.71	-1.82	-2.63

D5GHzV2 - SN: 1315						
5750MHz Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2021	-33.6		49.4		1.99	
10.21.2022	-32.49	-3.31	47.72	-1.68	0.55	-1.44
10.20.2023	-36.43	8.41	50.87	1.47	1.34	-0.65

<Justification of the extended calibration>

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data>
Head 5250-5750MHz _2022.10.21

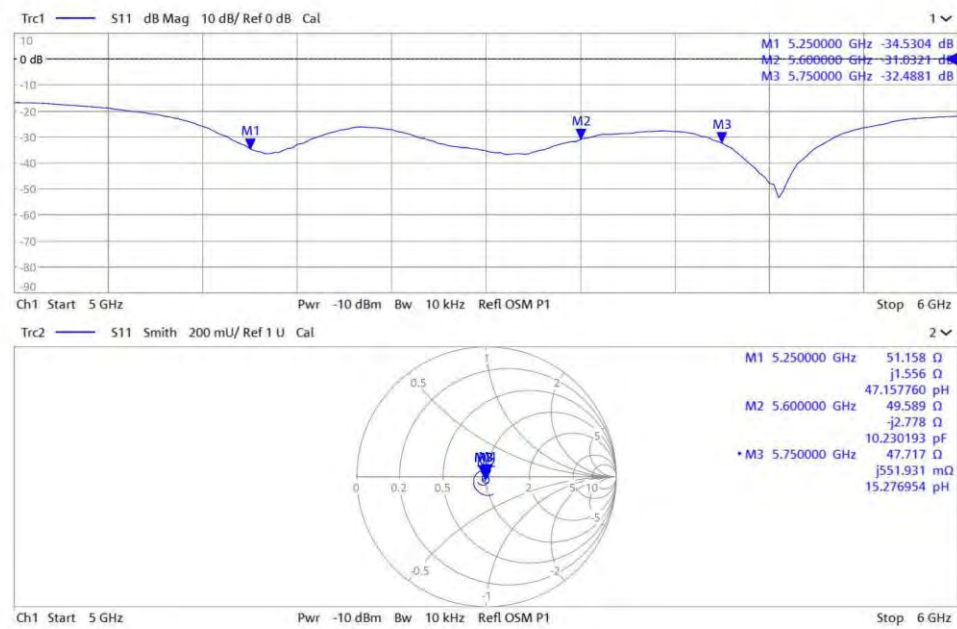


<Dipole Verification Data>

Head 5250-5750MHz _2023.10.20

Trc1 — S11 dB Mag 10 dB/ Ref 0 dB Cal

1

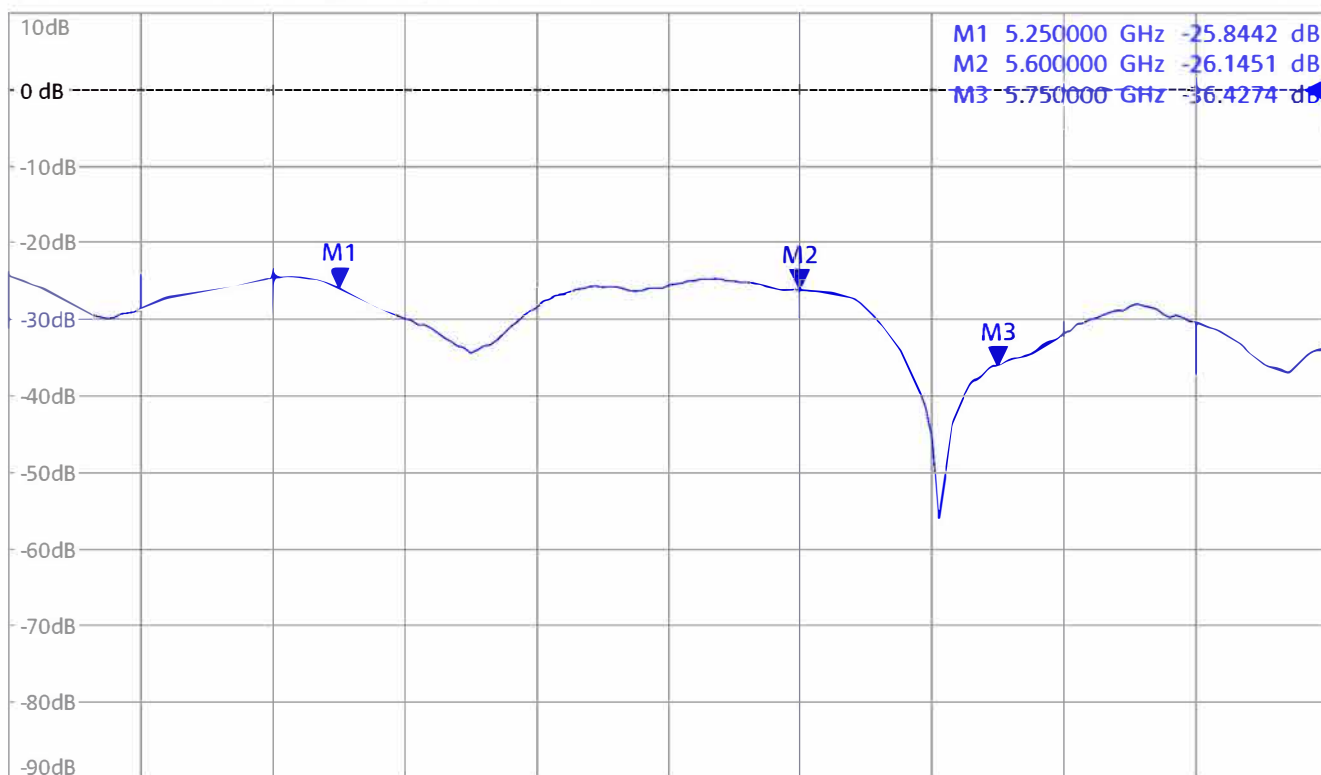


Ch1 Start 5 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 6 GHz

Trc2 — S11 Smith 200 mU/ Ref 1 U Cal

2

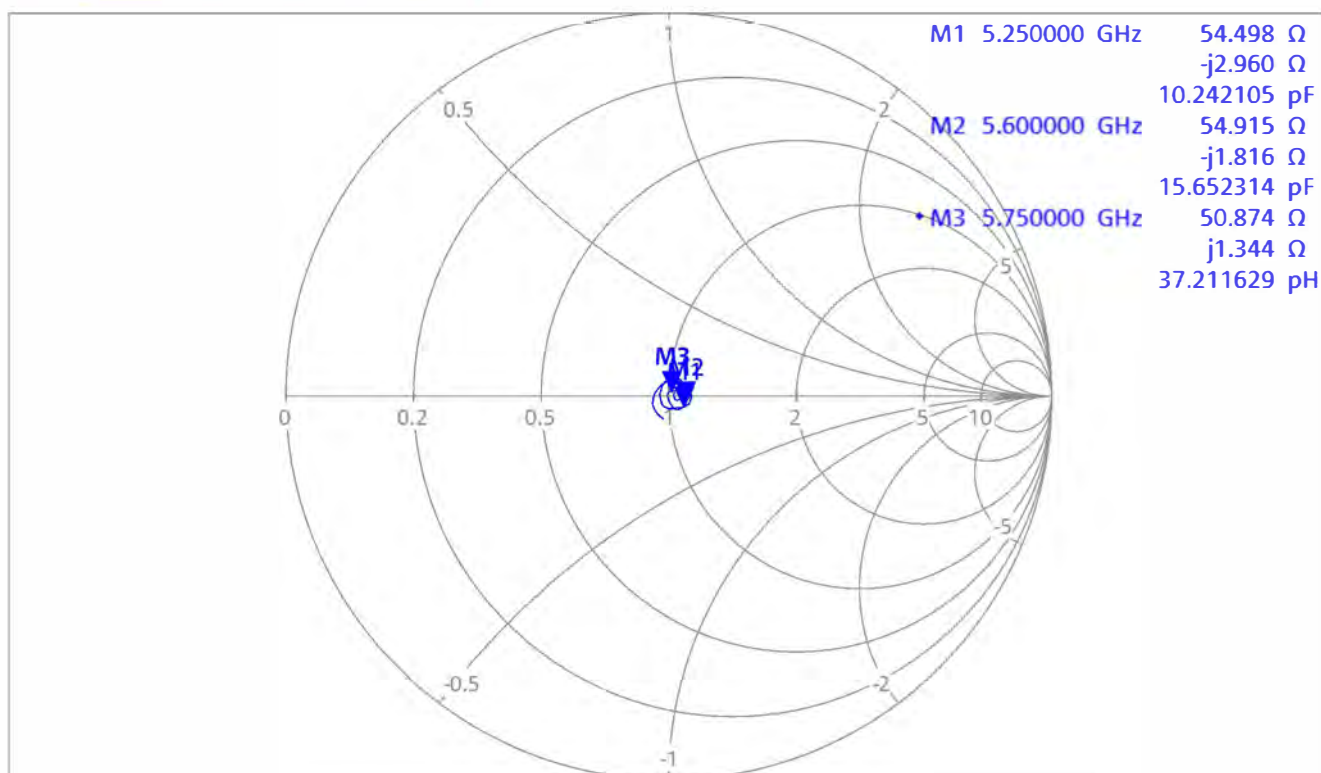

Ch1 Start 5 GHz Pwr -10 dBm Bw 10 kHz Refl OSM P1

Stop 6 GHz



Appendix D. Conducted Power Result

Full Power

Band	GSM850				GSM1900			
Channel	128	189	251	Max. Tune-up Power	512	661	810	Max. Tune-up Power
Frequency	824.2	836.4	848.8		1850.2	1880	1909.8	
GSM	32.61	32.56	32.52	34.00	29.39	29.49	29.58	31.00
GPRS 1Tx Slot	32.62	32.55	32.51	34.00	29.38	29.47	29.60	31.00
GPRS 2Tx Slot	31.74	31.73	31.79	33.00	28.72	28.82	28.97	30.00
GPRS 3Tx Slot	29.82	29.88	29.91	31.00	26.66	26.89	27.05	28.00
GPRS 4Tx Slot	28.59	28.70	28.74	30.00	25.61	25.76	25.89	27.00
EDGE 1Tx Slot	27.13	27.27	27.35	28.50	26.01	25.96	26.07	27.50
EDGE 2Tx Slot	25.87	26.07	26.13	27.50	25.05	24.86	25.06	26.50
EDGE 3Tx Slot	23.65	23.71	23.87	25.50	22.84	22.74	22.87	24.50
EDGE 4Tx Slot	22.55	22.58	22.69	24.50	21.63	21.58	21.61	23.50

Band	WCDMA II			WCDMA II	WCDMA IV			WCDMA IV	WCDMA V			WCDMA V
TX Channel	9262	9400	9538	Max. Tune-up Power	1312	1413	1513	Max. Tune-up Power	4132	4182	4233	Max. Tune-up Power
Rx Channel	9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency	1852.4	1880	1907.6	25.00	1712.4	1732.6	1752.6	25.00	826.4	836.4	846.6	25.00
RMC 12.2K	23.98	23.86	24.14		24.35	24.62	24.45		24.33	24.36	24.31	
HSDPA Subtest-1	23.40	23.28	23.56	24.00	23.65	23.84	23.77	24.00	23.78	23.65	23.73	24.00
HSDPA Subtest-2	23.39	23.27	23.55	24.00	23.76	23.83	23.82	24.00	23.77	23.64	23.72	24.00
HSDPA Subtest-3	22.88	22.76	23.04	24.00	23.25	23.52	23.35	24.00	23.26	23.13	23.21	24.00
HSDPA Subtest-4	22.87	22.75	23.03	24.00	23.24	23.51	23.34	24.00	23.25	23.12	23.20	24.00
DC-HSDPA Subtest-1	23.32	23.22	23.48	24.00	23.69	23.78	23.79	24.00	23.70	23.59	23.65	24.00
DC-HSDPA Subtest-2	23.31	23.21	23.47	24.00	23.68	23.77	23.78	24.00	23.69	23.58	23.64	24.00
DC-HSDPA Subtest-3	22.89	22.70	22.98	24.00	23.26	23.46	23.29	24.00	23.27	23.07	23.15	24.00
DC-HSDPA Subtest-4	22.88	22.69	22.97	24.00	23.25	23.45	23.28	24.00	23.26	23.06	23.14	24.00
HSUPA Subtest-1	23.36	23.24	23.52	24.00	23.73	23.80	23.83	24.00	23.74	23.61	23.69	24.00
HSUPA Subtest-2	22.35	22.23	22.51	24.00	22.72	22.99	22.82	24.00	22.73	22.60	22.68	24.00
HSUPA Subtest-3	22.83	22.72	23.00	24.00	23.20	23.48	23.31	24.00	23.21	23.09	23.17	24.00
HSUPA Subtest-4	22.32	22.21	22.49	24.00	22.69	22.97	22.80	24.00	22.70	22.58	22.66	24.00
HSUPA Subtest-5	23.31	23.20	23.48	24.00	23.68	23.81	23.79	24.00	23.69	23.57	23.65	24.00
HSPA+ Subtest-1	22.87	22.77	23.05	24.00	23.24	23.53	23.36	24.00	23.25	23.14	23.22	24.00

Reduce Power

Band	GSM850				GSM1900			
Channel	128	189	251	Max. Tune-up Power	512	661	810	Max. Tune-up Power
Frequency	824.2	836.4	848.8		1850.2	1880	1909.8	
GSM	22.25	22.59	22.52	23.00	20.27	20.55	20.64	21.00
GPRS 1Tx Slot	22.14	22.60	22.51	23.00	20.26	20.54	20.63	21.00
GPRS 2Tx Slot	21.03	21.36	21.39	22.00	19.34	19.52	19.64	20.00
GPRS 3Tx Slot	18.85	19.14	19.12	20.00	17.29	17.45	17.63	18.00
GPRS 4Tx Slot	17.73	18.02	18.00	19.00	16.15	16.28	16.52	17.00
EDGE 1Tx Slot	15.50	15.78	15.71	17.00	17.08	17.16	17.30	17.50
EDGE 2Tx Slot	15.11	15.45	15.31	16.00	15.82	16.00	16.05	17.00
EDGE 3Tx Slot	14.28	14.42	14.37	15.00	13.98	14.02	14.28	15.00
EDGE 4Tx Slot	12.68	13.00	12.87	13.50	12.53	12.65	12.83	13.50

Band	WCDMA II			WCDMA II	WCDMA IV			WCDMA IV	WCDMA V			WCDMA V
TX Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel	9662	9800	9938	Max. Tune-up Power	1537	1638	1738	Max. Tune-up Power	4357	4407	4458	Max. Tune-up Power
Frequency	1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
RMC 12.2K	12.49	12.42	12.55	13.50	14.45	14.59	14.41	15.00	16.13	16.25	16.22	17.00
HSDPA Subtest-1	11.91	11.84	11.97	12.50	13.87	13.91	13.83	14.00	15.55	15.67	15.64	16.00
HSDPA Subtest-2	11.90	11.83	11.96	12.50	13.86	13.90	13.82	14.00	15.54	15.66	15.63	16.00
HSDPA Subtest-3	11.39	11.32	11.45	12.50	13.35	13.49	13.31	14.00	15.03	15.15	15.12	16.00
HSDPA Subtest-4	11.38	11.31	11.44	12.50	13.34	13.48	13.30	14.00	15.02	15.14	15.11	16.00
DC-HSDPA Subtest-1	11.83	11.78	11.89	12.50	13.79	13.95	13.75	14.00	15.47	15.61	15.56	16.00
DC-HSDPA Subtest-2	11.82	11.77	11.88	12.50	13.78	13.94	13.74	14.00	15.46	15.60	15.55	16.00
DC-HSDPA Subtest-3	11.40	11.26	11.39	12.50	13.36	13.43	13.25	14.00	15.04	15.09	15.06	16.00
DC-HSDPA Subtest-4	11.39	11.25	11.38	12.50	13.35	13.42	13.24	14.00	15.03	15.08	15.05	16.00
HSUPA Subtest-1	11.87	11.80	11.93	12.50	13.83	13.97	13.79	14.00	15.51	15.63	15.60	16.00
HSUPA Subtest-2	10.86	10.79	10.92	12.50	12.82	12.96	12.78	14.00	14.50	14.62	14.59	16.00
HSUPA Subtest-3	11.34	11.28	11.41	12.50	13.30	13.45	13.27	14.00	14.98	15.11	15.08	16.00
HSUPA Subtest-4	10.83	10.77	10.90	12.50	12.79	12.94	12.76	14.00	14.47	14.60	14.57	16.00
HSUPA Subtest-5	11.82	11.76	11.89	12.50	13.78	13.93	13.75	14.00	15.46	15.59	15.56	16.00
HSPA+ Subtest-1	11.38	11.33	11.46	12.50	13.34	13.50	13.32	14.00	15.02	15.16	15.13	16.00

Full Power

LTE Band 2									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High			
		Channel		18750	18900	19100	Max. Tune-up		
20M									
QPSK	16QAM	1	0	22.90	22.97	22.99	24		
		1	50	23.24	23.38	23.29	24		
		1	99	22.85	22.95	23.12	24		
		50	0	22.16	22.10	22.22	23		
		50	25	22.25	22.26	22.23	23		
		50	50	22.14	22.02	22.09	23		
		100	0	22.11	22.17	22.13	23		
		1	0	22.36	22.27	22.28	23		
		1	50	22.53	22.41	22.36	23		
		1	99	22.23	22.21	22.20	23		
16QAM	64QAM	50	0	21.16	21.14	21.17	22		
		50	25	21.17	21.18	21.20	22		
		50	50	21.08	21.09	21.11	22		
		100	0	21.05	21.09	21.08	22		
		1	0	21.13	21.15	20.17	22		
		1	50	21.38	21.42	21.47	22		
		1	99	21.21	21.25	20.27	22		
		50	0	20.12	20.14	20.15	21		
		50	25	20.18	20.20	20.22	21		
		50	50	20.09	20.09	20.11	21		
100	0	20.11	20.10	20.09	21				
15M									
QPSK	16QAM	Channel <th>18650</th> <th>18800</th> <th>19100</th> <th>Max. Tune-up</th>	18650	18800	19100	Max. Tune-up			
		Frequency (MHz)	1857.5	1880	1902.5				
		1	0	22.85	22.91	22.86	24		
		1	37	23.19	23.24	23.26	24		
		1	74	22.79	22.94	23.09	24		
		36	0	22.13	21.98	22.11	23		
		36	19	22.17	22.21	22.08	23		
		36	39	22.10	21.89	22.03	23		
		75	0	22.01	22.11	22.01	23		
		1	0	22.27	22.16	22.13	23		
16QAM	64QAM	1	37	22.41	22.36	22.21	23		
		1	74	22.22	22.19	22.09	23		
		36	0	21.15	21.10	21.12	22		
		36	19	21.05	21.09	21.08	22		
		36	39	21.01	21.08	21.03	22		
		75	0	20.95	20.95	21.04	22		
		1	0	21.14	21.14	20.02	22		
		1	37	21.28	21.34	21.33	22		
		1	74	21.09	21.14	20.22	22		
		36	0	20.08	20.08	20.06	21		
36	19	20.14	20.05	20.12	21				
36	39	20.06	20.06	20.07	21				
75	0	20.03	19.95	19.94	21				
10M									
QPSK	16QAM	Channel <th>18650</th> <th>18900</th> <th>19100</th> <th>Max. Tune-up</th>	18650	18900	19100	Max. Tune-up			
		Frequency (MHz)	1855	1880	1905				
		1	0	22.79	22.88	22.96	24		
		1	24	23.15	23.26	23.15	24		
		1	49	22.72	22.86	23.05	24		
		25	0	22.07	22.09	22.20	23		
		25	12	22.19	22.18	22.14	23		
		25	25	22.12	21.95	22.04	23		
		50	0	22.09	22.07	22.07	23		
		1	0	22.28	22.21	22.12	23		
16QAM	64QAM	1	24	22.46	22.30	22.24	23		
		1	49	22.17	22.17	22.12	23		
		25	0	21.10	21.04	21.05	22		
		25	12	21.02	21.07	21.08	22		
		25	25	21.03	20.97	20.97	22		
		50	0	20.98	21.02	21.00	22		
		1	0	21.10	21.02	20.14	22		
		1	24	21.27	21.38	21.41	22		
		1	49	21.12	21.21	20.23	22		
		25	0	19.99	20.11	20.10	21		
25	12	20.09	20.10	20.13	21				
25	25	20.03	20.07	20.00	21				
50	0	20.02	20.05	19.95	21				
5M									
QPSK	16QAM	Channel <th>1862.5</th> <th>1880</th> <th>1907.5</th> <th>Max. Tune-up</th>	1862.5	1880	1907.5	Max. Tune-up			
		Frequency (MHz)	1852.5	1880	1907.5				
		1	0	22.87	22.85	22.87	24		
		1	12	23.15	23.29	23.27	24		
		1	24	22.83	22.94	23.10	24		
		12	0	22.07	22.08	22.16	23		
		12	6	22.21	22.23	22.13	23		
		12	13	22.06	21.96	22.03	23		
		25	0	21.96	22.06	21.99	23		
		1	0	22.25	22.13	22.14	23		
16QAM	64QAM	1	12	22.41	22.31	22.28	23		
		1	24	22.09	22.08	22.06	23		
		12	0	21.08	21.08	21.16	22		
		12	6	21.10	21.10	21.17	22		
		12	13	20.98	21.08	21.02	22		
		25	0	20.90	20.99	21.05	22		
		1	0	21.04	21.11	20.04	22		
		1	12	21.23	21.32	21.30	22		
		1	24	21.11	21.20	20.25	22		
		12	0	20.10	20.06	20.04	21		
12	13	20.05	20.00	20.06	21				
12	25	20.04	20.04	20.08	21				
3M									
QPSK	16QAM	Channel <th>1861.5</th> <th>1890</th> <th>1909.5</th> <th>Max. Tune-up</th>	1861.5	1890	1909.5	Max. Tune-up			
		Frequency (MHz)	1851.5	1880	1909.5				
		1	0	22.75	22.82	22.95	24		
		1	7	23.14	23.29	23.25	24		
		1	14	22.83	22.93	23.10	24		
		8	0	22.06	22.05	22.19	23		
		8	3	22.15	22.05	22.05	23		
		8	7	22.08	21.94	22.02	23		
		15	0	21.98	22.15	22.05	23		
		1	0	22.30	22.26	22.19	23		
16QAM	64QAM	1	7	22.52	22.26	22.30	23		
		1	14	22.08	22.07	22.13	23		
		8	0	21.07	21.13	21.03	22		
		8	3	21.16	21.10	21.18	22		
		8	7	21.07	21.06	21.10	22		
		15	0	20.93	21.01	21.07	22		
		1	0	21.05	21.11	20.04	22		
		1	7	21.28	21.29	21.41	22		
		1	14	21.18	21.20	20.24	22		
		8	0	19.99	20.01	20.09	21		
1.4M									
QPSK	16QAM	Channel <th>1860.7</th> <th>1890</th> <th>1909.3</th> <th>Max. Tune-up</th>	1860.7	1890	1909.3	Max. Tune-up			
		Frequency (MHz)	1850.7	1880	1909.3				
		1	0	22.86	22.91	22.97	24		
		1	2	23.14	23.27	23.23	24		
		1	5	22.75	22.86	23.11	24		
		3	1	23.14	22.99	23.14	24		
		3	1	23.16	23.21	23.09	24		
		3	3	23.02	22.97	23.02	24		
		6	0	22.04	22.16	21.99	23		
		1	0	22.27	22.22	22.25	23		
16QAM	64QAM	1	2	22.50	22.36	22.36	23		
		1	5	22.09	22.13	22.17	23		
		3	0	22.13	22.02	22.06	23		
		3	1	22.05	22.14	22.10	23		
		3	3	21.98	21.97	22.04	23		
		6	0	20.94	21.03	20.99	22		
		1	0	21.06	21.07	20.95	22		
		1	2	21.29	21.33	21.32	22		
		1	5	21.08	21.21	20.15	22		
		3	0	21.07	21.03	21.05	22		

LTE Band 7							
BW	Modulation	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.02	23.13	23.24	24
		1	50	23.19	23.36	23.34	24
		1	99	22.97	23.07	23.07	24
		50	0	22.18	22.33	22.29	23
		50	25	22.21	22.37	22.32	23
		50	50	22.13	22.22	22.21	23
		100	0	22.15	22.27	22.25	23
		1	0	22.19	22.37	22.49	23
		1	50	22.39	22.66	22.53	23
		1	99	22.25	22.38	22.16	23
		50	0	21.12	21.30	21.28	22
		50	25	21.15	21.31	21.07	22
	16QAM	50	50	21.11	21.18	21.22	22
		100	0	21.09	21.23	21.24	22
		1	0	21.16	21.22	21.33	22
		1	50	21.30	21.46	21.50	22
		1	99	21.11	21.18	21.11	22
		50	0	20.13	20.30	20.32	21
		50	25	20.18	20.31	20.28	21
		50	50	20.11	20.18	20.22	21
		100	0	20.12	20.24	20.26	21
		Channel		20850	21100	21350	Max. Tune-up (dBm)
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	22.90	22.98	23.15	24
		1	37	23.05	23.29	23.32	24
		1	74	22.92	22.95	22.94	24
		36	0	22.07	22.30	22.22	23
		36	19	22.08	22.31	22.19	23
		36	39	22.08	22.14	22.10	23
		75	0	22.05	22.23	22.22	23
		1	0	22.09	22.35	22.45	23
		1	37	22.07	22.63	22.44	23
		1	74	22.19	22.36	22.13	23
		36	0	21.00	21.21	21.14	22
		36	19	21.00	21.18	21.16	22
	16QAM	36	39	21.02	21.11	21.13	22
		75	0	20.95	21.15	21.18	22
		1	0	21.08	21.11	21.23	22
		1	37	21.20	21.40	21.45	22
		1	74	20.99	21.10	21.08	22
		36	0	20.10	20.16	20.23	21
		36	19	20.14	20.24	20.15	21
		36	39	20.09	20.04	20.21	21
		75	0	20.11	20.15	20.15	21
		Channel		20800	21100	21400	Max. Tune-up (dBm)
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.01	23.11	23.17	24
		1	24	23.11	23.27	23.26	24
		1	49	22.94	22.99	23.01	24
		25	0	22.17	22.32	22.16	23
		25	12	22.17	22.26	22.25	23
		25	25	21.99	22.20	22.11	23
		50	0	22.07	22.26	22.13	23
		1	0	22.15	22.28	22.40	23
		1	24	22.38	22.63	22.51	23
		1	49	22.21	22.31	22.07	23
		25	0	21.03	21.26	21.23	22
		25	12	21.11	21.28	21.24	22
	16QAM	25	25	21.01	21.17	21.21	22
		50	0	21.01	21.17	21.15	22
		1	0	21.15	21.20	21.21	22
		1	24	21.25	21.42	21.44	22
		1	49	21.02	21.03	20.97	22
		25	0	20.02	20.16	20.18	21
		25	12	20.13	20.26	20.23	21
		25	25	19.98	20.12	20.10	21
		50	0	20.06	20.14	20.16	21
		Channel		20775	21100	21425	Max. Tune-up (dBm)
		Frequency (MHz)		2502.5	2530	2567.5	
5M	QPSK	1	0	23.07	23.05	23.19	24
		1	12	23.07	23.30	23.22	24
		1	24	22.93	22.98	22.99	24
		12	0	22.10	22.30	22.28	23
		12	6	22.19	22.33	22.17	23
		12	13	22.05	22.15	22.18	23
		25	0	22.11	22.12	22.12	23
		1	0	22.05	22.29	22.36	23
		1	12	22.30	22.52	22.52	23
		1	24	22.20	22.31	22.08	23
		12	0	21.00	21.29	21.14	22
		12	6	21.02	21.18	21.25	22
	16QAM	12	13	21.09	21.13	21.20	22
		25	0	21.07	21.13	21.10	22
		1	0	21.12	21.16	21.22	22
		1	12	21.23	21.39	21.35	22
		1	24	21.07	21.05	20.96	22
		12	0	20.02	20.16	20.20	21
		12	6	20.05	20.30	20.24	21
		12	13	19.99	20.08	20.15	21
		25	0	20.02	20.09	20.14	21
		Channel		20775	21100	21425	Max. Tune-up (dBm)
		Frequency (MHz)		2502.5	2530	2567.5	

LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)
		Channel		23060	23095	23130	
QPSK		Frequency (MHz)		704	707.5	711	
		1	0	23.31	23.20	23.28	24
		1	24	23.38	23.30	23.33	24
		1	49	23.20	23.13	23.18	24
		25	0	22.27	22.25	22.23	23
		25	12	22.26	22.22	22.21	23
		25	25	22.23	22.23	22.22	23
		50	0	22.29	22.28	22.25	23
		1	0	22.55	22.35	22.56	23
		1	24	22.70	22.69	22.63	23
		1	49	22.49	22.41	22.38	23
		25	0	21.38	21.35	21.32	22
16QAM		25	12	21.38	21.33	21.31	22
		25	25	21.36	21.32	21.30	22
		50	0	21.41	21.35	21.32	22
		1	0	21.54	21.44	21.48	22
		1	24	21.58	21.59	21.60	22
		1	49	21.41	21.34	21.37	22
		25	0	20.33	20.31	20.35	21
		25	12	20.32	20.33	20.34	21
		25	25	20.30	20.30	20.32	21
		50	0	20.31	20.32	20.33	21
		Channel		23055	23095	23185	
		Frequency (MHz)		701.5	707.5	713.5	
QPSK		1	0	23.18	23.17	23.22	24
		1	12	23.27	23.24	23.23	24
		1	24	23.09	23.09	23.11	24
		12	0	22.30	22.11	22.15	23
		12	6	22.11	22.20	22.10	23
		12	13	22.11	22.08	22.09	23
		25	0	22.21	22.20	22.15	23
		1	0	22.51	22.21	22.50	23
		1	12	22.55	22.64	22.52	23
		1	24	22.46	22.35	22.34	23
		12	0	21.29	21.27	21.25	22
		12	6	21.37	21.23	21.16	22
16QAM		12	13	21.29	21.17	21.20	22
		25	0	21.26	21.30	21.28	22
		1	0	21.51	21.38	21.39	22
		1	12	21.45	21.48	21.48	22
		1	24	21.28	21.30	21.28	22
		12	0	20.25	20.20	20.21	21
		12	6	20.24	20.31	20.25	21
		12	13	20.19	20.16	20.25	21
		25	0	20.18	20.28	20.25	21
		Channel		23025	23095	23165	
		Frequency (MHz)		706.5	707.5	714.5	
		QPSK		1	0	23.27	23.15
1	7			23.25	23.21	23.20	24
1	14			23.14	23.01	23.07	24
8	0			22.25	22.14	22.19	23
8	3			22.12	22.08	22.15	23
8	7			22.15	22.17	22.11	23
15	0			22.17	22.19	22.13	23
1	0			22.47	22.20	22.54	23
1	7			22.69	22.56	22.56	23
1	14			22.44	22.28	22.31	23
8	0			21.29	21.21	21.23	22
8	3			21.32	21.28	21.22	22
16QAM		8	7	21.30	21.29	21.19	22
		15	0	21.37	21.23	21.30	22
		1	0	21.44	21.43	21.46	22
		1	7	21.57	21.55	21.54	22
		1	14	21.34	21.23	21.27	22
		8	0	20.30	20.27	20.29	21
		8	3	20.27	20.25	20.26	21
		8	7	20.17	20.15	20.28	21
		15	0	20.28	20.21	20.26	21
		Channel		23017	23095	23173	
		Frequency (MHz)		699.7	707.5	715.3	
		QPSK		1	0	23.22	23.07
1	5			23.24	23.19	23.27	24
1	10			23.09	23.09	23.05	24
3	14			23.14	23.12	23.22	24
3	1			23.12	23.20	23.12	24
3	3			23.15	23.14	23.09	24
6	0			22.24	22.16	22.21	23
1	0			22.47	22.20	22.55	23
1	1			22.21	22.27	22.59	23
1	5			23.28	23.37	23.31	23
3	0			22.29	22.25	22.24	23
3	1			22.34	22.23	22.16	23
16QAM		3	3	22.21	22.22	22.27	23
		6	0	21.28	21.30	21.28	22
		1	0	21.44	21.38	21.43	22
		1	2	21.45	21.46	21.49	22
		1	5	21.35	21.29	21.36	22
		3	0	21.21	21.18	21.22	22
		3	1	21.18	21.19	21.30	22
		3	3	21.24	21.26	21.28	22
		6	0	20.18	20.26	20.19	21
		Channel		23017	23095	23173	
		Frequency (MHz)		699.7	707.5	715.3	
		QPSK		1	0	23.22	23.07
1	5			23.24	23.19	23.27	24
1	10			23.09	23.09	23.05	24
3	14			23.14	23.12	23.22	24
3	1			23.12	23.20	23.12	24
3	3			23.15	23.14	23.09	24
6	0			22.24	22.16	22.21	23
1	0			22.47	22.20	22.55	23
1	1			22.21	22.27	22.59	23
1	5			23.28	23.37	23.31	23
3	0			22.29	22.25	22.24	23
3	1			22.34	22.23	22.16	23
16QAM		3	3	22.21	22.22	22.27	23
		6	0	21.28	21.30	21.28	22
		1	0	21.44	21.38	21.43	22
		1	2	21.45	21.46	21.49	22
		1	5	21.35	21.29	21.36	22
		3	0	21.21	21.18	21.22	22
		3	1	21.18	21.19	21.30	22
		3	3	21.24	21.26	21.28	22
		6	0	20.18	20.26	20.19	21
		Channel		23017	23095	23173	
		Frequency (MHz)		699.7	707.5	715.3	

LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)
		Channel		23760	23790	23800	
		Frequency (MHz)	709	710	711		
10M	QPSK	1	0	23.19	23.22	23.11	24
		1	24	23.27	23.33	23.21	24
		1	49	23.08	23.09	22.98	24
		25	0	22.29	22.30	22.21	23
		25	12	22.22	22.26	22.10	23
		25	25	22.23	22.27	22.06	23
	16QAM	50	0	22.25	22.31	22.12	23
		1	0	22.45	22.49	22.39	23
		1	24	22.63	22.63	22.52	23
		1	49	22.29	22.31	22.02	23
		25	0	21.22	21.34	21.02	22
		25	12	21.23	21.33	21.19	22
	64QAM	25	25	21.23	21.29	21.16	22
		50	0	21.18	21.34	21.13	22
		1	0	21.27	21.44	21.21	22
		1	24	21.41	21.52	21.25	22
		1	49	21.21	21.36	21.03	22
		25	0	20.16	20.31	20.04	21
5M	QPSK	25	12	20.15	20.29	20.14	21
		25	25	20.08	20.30	20.11	21
		50	0	20.17	20.32	20.15	21
	16QAM	Channel		23766	23790	23803	Max. Tune-up
		Frequency (MHz)	706.5	710	713.5		
		1	0	23.14	23.14	22.99	24
		1	12	23.23	23.31	23.07	24
		1	24	22.93	22.94	22.97	24
		12	0	22.28	22.20	22.06	23
	64QAM	12	6	22.15	22.18	22.06	23
		12	13	22.17	22.21	22.00	23
		25	0	22.24	22.19	22.07	23
		1	0	22.44	22.41	22.25	23
		1	12	22.57	22.49	22.48	23
		1	24	22.20	22.25	21.87	23
10M	QPSK	12	0	21.07	21.32	20.90	22
		12	6	21.15	21.25	21.08	22
		12	13	21.18	21.21	21.11	22
		25	0	21.16	21.26	21.11	22
		1	0	21.17	21.33	21.19	22
		1	12	21.38	21.42	21.10	22
	16QAM	1	24	21.17	21.21	20.99	22
		12	0	20.08	20.24	19.95	21
		12	6	20.07	20.23	20.04	21
		12	13	20.04	20.26	20.08	21
		25	0	20.03	20.20	20.02	21
		25	0	20.03	20.20	20.02	21

LTE Band 25								
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)	
		Channel		26140	26240	26360		
20M	QPSK	1	0	22.93	23.02	23.01	24	
		1	50	23.11	23.17	23.16	24	
		1	99	22.92	23.01	23.09	24	
		50	0	22.21	22.26	22.23	23	
		50	25	22.16	22.18	22.20	23	
		50	50	22.08	22.02	22.01	23	
	16QAM	100	0	22.11	22.14	22.07	23	
		1	0	22.12	22.27	22.34	23	
		1	50	22.22	22.23	22.36	23	
		1	99	22.28	22.24	22.26	23	
		50	0	21.23	21.08	21.05	22	
		50	25	21.15	21.16	21.18	22	
	64QAM	50	50	21.06	21.06	21.05	22	
		100	0	21.13	21.03	21.06	22	
		1	0	21.17	21.11	21.24	22	
		1	50	21.43	21.38	21.37	22	
		1	99	21.28	21.21	21.23	22	
		50	0	20.27	20.16	20.26	21	
15M	QPSK	50	25	20.17	20.21	20.27	21	
		50	50	20.13	20.09	20.03	21	
		100	0	20.20	20.11	20.13	21	
	16QAM	Channel		26115	26240	26315	Max. Tune-up	
		Frequency (MHz)		1857.5	1880	1907.5		
		1	0	22.92	22.90	22.88	24	
		1	37	23.04	23.05	23.03	24	
		1	74	22.91	22.99	23.08	24	
		36	0	22.13	22.25	22.19	23	
	64QAM	36	19	22.07	22.13	22.05	23	
		36	39	21.95	22.01	21.93	23	
		75	0	22.08	22.02	21.96	23	
		1	0	22.08	22.15	22.24	23	
		1	37	22.11	22.12	22.28	23	
		1	74	22.26	22.11	22.18	23	
10M	QPSK	36	0	21.11	21.05	20.90	22	
		36	19	21.08	21.14	21.14	22	
		36	39	21.05	21.01	20.99	22	
		75	0	21.10	20.92	20.96	22	
		1	0	21.12	21.07	21.11	22	
		1	37	21.31	21.28	21.34	22	
	16QAM	1	74	21.18	21.15	21.16	22	
		36	0	20.26	20.06	20.16	21	
		36	19	20.03	20.20	20.24	21	
		36	39	19.99	19.95	19.91	21	
		75	0	20.13	20.02	20.01	21	
		75	0	20.13	20.09	19.98	21	
5M	QPSK	Channel		26090	26240	26360	Max. Tune-up	
		Frequency (MHz)		1855	1880	1910		
		1	0	22.81	22.95	22.99	24	
		1	24	23.01	23.03	23.08	24	
		1	49	22.86	22.87	22.96	24	
		25	0	22.18	22.15	22.12	23	
	16QAM	25	12	22.09	22.12	22.19	23	
		25	25	22.02	21.92	21.92	23	
		50	0	21.99	22.01	21.97	23	
		1	0	22.04	22.12	22.22	23	
		1	24	22.17	22.14	22.35	23	
		1	49	22.19	22.23	22.21	23	
10M	QPSK	25	0	21.20	21.06	21.00	22	
		25	12	21.00	21.01	21.08	22	
		25	25	20.93	20.88	21.00	22	
		50	0	21.08	20.91	21.03	22	
		1	0	21.04	21.08	21.20	22	
		1	24	21.31	21.27	21.28	22	
	16QAM	1	49	21.19	21.18	21.17	22	
		25	0	20.21	20.02	20.19	21	
		25	12	20.06	20.17	20.25	21	
		25	25	19.98	20.05	20.02	21	
		50	0	20.13	20.09	19.98	21	
		50	0	20.13	20.09	19.98	21	
5M	QPSK	Channel		26065	26240	26365	Max. Tune-up	
		Frequency (MHz)		1862.5	1880	1912.5		
		1	0	22.90	22.97	22.99	24	
		1	12	22.97	23.03	23.05	24	
		1	24	22.79	23.00	22.94	24	
		12	0	22.19	22.15	22.22	23	
	16QAM	12	6	22.01	22.16	22.15	23	
		12	13	21.95	21.97	21.98	23	
		25	0	22.09	22.03	22.05	23	
		1	0	22.03	22.12	22.30	23	
		1	12	22.07	22.13	22.23	23	
		1	24	22.18	22.10	22.13	23	
10M	QPSK	12	6	21.12	21.00	20.99	22	
		12	6	21.13	21.11	21.08	22	
		12	13	20.99	20.99	21.02	22	
		25	0	21.07	20.88	20.96	22	
		1	0	21.08	21.03	21.22	22	
		1	12	21.31	21.26	21.27	22	
	16QAM	1	24	21.14	21.17	21.15	22	
		12	0	20.19	20.12	20.18	21	
		12	6	20.04	20.13	20.19	21	
		12	13	20.05	20.05	20.02	21	
		25	0	20.10	20.02	20.04	21	
		25	0	20.10	20.02	20.04	21	
3M	QPSK	Channel		26055	26240	26375	Max. Tune-up	
		Frequency (MHz)		1851.5	1880	1913.5		
		1	0	22.81	22.92	22.88	24	
		1	7	23.06	23.08	23.07	24	
		1	14	22.89	22.86	23.03	24	
		8	0	22.07	22.12	22.12	23	
	16QAM	8	3	22.05	22.05	22.05	23	
		8	7	22.04	21.94	21.89	23	
		15	0	22.03	22.05	21.94	23	
		1	0	21.98	22.23	22.19	23	
		1	7	22.18	22.20	22.32	23	
		1	14	22.15	22.19	22.25	23	
1.4M	QPSK	8	0	21.20	21.03	21.04	22	
		8	3	21.10	21.12	21.17	22	
		8	7	20.92	20.94	21.04	22	
		15	0	21.07	20.91	20.92	22	
		1	0	21.06	21.04	21.12	22	
		1	7	21.34	21.28	21.29	22	
	64QAM	1	14	21.21	21.20	21.17	22	
		8	0	20.18	20.13	20.25	21	
		8	3	20.05	20.11	20.22	21	
		8	7	19.98	20.04	19.97	21	
		15	0	20.08	20.02	20.01	21	
		15	0	20.08	20.02	20.01	21	
BW	MCS Index	Channel		26047	26240	26383	Max. Tune-up	
		Frequency (MHz)		1850.7	1880	1914.3		
	QPSK	1	0	22.92	22.88	22.97	24	
		1	2	23.01	23.09	23.14	24	
		1	5	22.84	22.90	22.94	24	
		3	0	22.17	22.16	22.22	24	
		3	1	23.12	23.09	23.05	24	
		3	3	23.01	22.97	22.98	24	
	1.4M	QPSK	6	0	22.10	21.99	21.93	23
			1	0	22.04	22.23	22.25	23
			1	2	22.21	22.21	22.28	23
			1	5	22.27	22.09	22.17	23
3			0	22.22	21.98	21.92	23	
3			1	22.08	22.09	22.09	23	
64QAM		6	0	21.02	20.91	20.95	22	
		3	3	21.94	22.02	21.99	23	
		1	0	21.04	21.04	21.04	22	
		1	2	21.13	21.07	21.21	22	
		1	5	21.25	21.06	21.16	22	
		3	0	21.16	21.06	21.14	22	
1.4M	64QAM	3	1	21.16	21.08	21.18	22	
		3	3	21.03	21.01	20.93	22	
		6	0	20.14	20.05	20.11	21	
		6	0	20.14	20.05	20.11	21	
		6	0	20.14	20.05	20.11	21	
		6	0	20.14	20.05	20.11	21	

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)
		Channel		37850	38000	38150	
20M	QPSK		Frequency (MHz)	2580	2595	2610	
		1	0	22.82	22.93	22.86	24
		1	50	22.99	23.01	23.00	24
		1	99	22.75	22.77	22.78	24
		50	0	21.88	22.05	22.03	23
		50	25	21.82	21.88	21.86	23
	16QAM	50	50	21.74	21.80	21.80	23
		100	0	21.78	21.86	21.85	23
		1	0	22.05	21.90	21.97	23
		1	50	22.09	22.03	22.06	23
		1	99	21.73	21.75	21.79	23
		50	0	20.94	20.99	21.12	22
64QAM	50	25	20.90	20.95	20.96	22	
	50	50	20.85	20.84	20.86	22	
	100	0	20.90	20.82	20.92	22	
	1	0	20.57	20.50	20.55	22	
	1	50	20.61	20.66	20.65	22	
	1	99	20.30	20.34	20.40	22	
BW	Modulation	Channel		37850	38000	38150	Max. Tune-up (dBm)
		Frequency (MHz)		2577.5	2595	2612.5	
	QPSK	1	0	22.90	22.67	22.74	24
		1	37	22.87	22.84	22.86	24
		1	74	22.74	22.74	22.75	24
		36	0	21.98	21.73	21.97	23
		36	19	21.86	21.73	21.77	23
		36	39	21.75	21.60	21.77	23
		75	0	21.73	21.73	21.71	23
		1	0	22.02	21.85	21.88	23
		1	37	22.08	21.97	21.91	23
		1	74	21.59	21.63	21.77	23
		36	0	20.86	20.90	20.99	22
		36	19	20.88	20.80	20.94	22
	16QAM	36	39	20.81	20.80	20.76	22
		75	0	20.82	20.76	20.76	22
		1	0	20.46	20.38	20.45	22
		1	37	20.50	20.55	20.55	22
		1	74	20.23	20.25	20.33	22
		36	0	19.93	19.88	20.07	21
		36	19	19.90	19.89	19.86	21
		36	39	19.81	19.68	19.77	21
		75	0	19.82	19.81	19.93	21
		64QAM	Channel		37850	38000	38200
Frequency (MHz)				2575	2595	2615	
1			0	22.88	22.72	22.75	24
1	24		22.88	22.94	22.94	24	
1	49		22.71	22.73	22.65	24	
25	0		21.99	21.80	21.88	23	
25	12		21.85	21.80	21.75	23	
25	25		21.75	21.63	21.66	23	
50	0		21.85	21.69	21.81	23	
1	0		21.94	21.80	21.86	23	
1	24		22.04	21.90	22.05	23	
10M	QPSK		1	49	21.60	21.66	21.78
		25	0	20.82	20.88	20.97	22
		25	12	20.86	20.81	20.91	22
		25	25	20.83	20.81	20.82	22
		50	0	20.81	20.78	20.77	22
		1	0	20.51	20.46	20.41	22
	16QAM	1	24	20.51	20.55	20.52	22
		1	49	20.15	20.28	20.26	22
		25	0	19.85	19.88	19.97	21
		25	12	19.87	19.84	19.95	21
		25	25	19.85	19.68	19.69	21
		50	0	19.87	19.73	19.82	21
BW	Modulation	Channel		37775	38000	38225	Max. Tune-up (dBm)
		Frequency (MHz)		2572.5	2595	2617.5	
	QPSK	1	0	22.87	22.73	22.74	24
		1	12	22.91	22.85	22.90	24
		1	24	22.62	22.65	22.67	24
		12	0	21.98	21.78	21.94	23
		12	6	21.85	21.67	21.82	23
		12	13	21.79	21.60	21.78	23
		25	0	21.75	21.74	21.77	23
		1	0	22.00	21.84	21.89	23
		1	12	22.03	21.97	22.05	23
		1	24	21.80	21.69	21.66	23
		12	0	20.84	20.93	21.03	22
		12	6	20.75	20.84	20.85	22
	16QAM	12	13	20.72	20.79	20.71	22
		25	0	20.79	20.76	20.81	22
		1	0	20.52	20.39	20.50	22
		1	12	20.50	20.61	20.57	22
		1	24	20.28	20.30	20.28	22
		12	0	19.95	19.82	20.05	21
		12	6	19.83	19.84	19.82	21
		12	13	19.85	19.79	19.78	21
		25	0	19.84	19.81	19.84	21
		64QAM	Channel		37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5	
1			0	22.86	22.91	22.87	24
1	12		22.99	23.16	22.96	24	
1	24		22.74	22.84	22.75	24	
12	0		21.81	21.93	21.84	23	
12	6		21.82	21.69	21.60	23	
12	13		21.82	21.78	21.59	23	
25	0		21.86	21.94	21.58	23	
1	0		21.90	22.12	21.76	23	

LTE Band 66								
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dBm)	
		Channel		13207.2	13232.2	13267.2		
Frequency (MHz)								
20M	QPSK	1	0	22.86	22.92	22.99	24	
		1	50	23.12	23.31	23.09	24	
		1	99	22.99	23.04	22.95	24	
		50	0	22.11	22.29	22.13	23	
		50	25	22.08	22.27	22.04	23	
		50	50	22.09	22.22	22.11	23	
	16QAM	100	0	22.01	22.25	22.11	23	
		1	0	22.16	22.19	22.14	23	
		1	50	22.32	22.43	22.31	23	
		1	99	22.24	22.34	22.33	23	
		50	0	21.55	21.36	21.11	22	
		50	25	21.11	21.37	21.05	22	
	64QAM	50	50	21.12	21.35	21.22	22	
		100	0	21.09	21.38	21.13	22	
		1	0	21.02	21.24	21.45	22	
		1	50	21.46	21.56	21.34	22	
		1	99	21.29	21.43	21.27	22	
		50	0	20.09	20.34	20.11	21	
	BW	MCS Index	50	25	20.10	20.43	20.09	21
			50	50	20.18	20.33	20.24	21
		100	0	20.06	20.35	20.16	21	
Channel			13204.7	13232.2	13267.2	Max. Tune-up		
Frequency (MHz)			1712.5	1745	1772.5			
QPSK		1	0	22.75	22.88		22.96	24
		1	37	23.04	23.27		23.08	24
		1	74	22.88	22.94		22.87	24
		36	0	21.98	22.14		22.10	23
		36	19	22.00	22.20		22.01	23
		36	39	21.95	22.16		22.10	23
		75	0	21.95	22.11		22.02	23
16QAM		1	0	22.05	22.16		22.13	23
		1	37	22.26	22.36		22.21	23
		1	74	22.15	22.24		22.19	23
	36	0	21.51	21.35	21.10		22	
	36	19	21.04	21.31	20.91		22	
	36	39	21.00	21.29	21.18		22	
	75	0	21.02	21.26	21.05		22	
64QAM	1	0	21.07	21.27	21.38		22	
	1	37	21.31	21.45	21.26		22	
	1	74	21.15	21.35	21.16		22	
	36	0	20.00	20.22	20.02		21	
	36	19	20.04	20.29	20.08		21	
	36	39	20.12	20.21	20.14		21	
	75	0	19.99	20.29	20.05		21	
	BW	MCS Index	Channel		13202.2	13232.2	13262.2	Max. Tune-up
			Frequency (MHz)		1715	1745	1775	
QPSK		1	0	22.73	22.89	22.89	24	
		1	24	23.11	23.16	23.02	24	
		1	49	22.92	22.93	22.81	24	
		25	0	22.09	22.28	22.12	23	
		25	12	21.98	22.23	21.90	23	
		25	25	21.94	22.14	22.00	23	
		50	0	21.95	22.18	22.06	23	
16QAM		1	0	22.11	22.09	22.04	23	
		1	24	22.24	22.37	22.17	23	
		1	49	22.14	22.31	22.29	23	
		25	0	21.56	21.29	21.01	22	
		25	12	21.01	21.34	20.99	22	
		25	25	21.01	21.34	21.16	22	
	50	0	21.05	21.36	21.08	22		
64QAM	1	0	20.95	21.14	21.39	22		
	1	24	21.37	21.54	21.24	22		
	1	49	21.27	21.29	21.14	22		
	25	0	20.00	20.19	20.00	21		
	25	12	20.03	20.31	20.00	21		
	25	25	20.08	20.22	20.13	21		
	50	0	20.00	20.30	20.12	21		
	BW	MCS Index	Channel		13199.7	13232.2	13264.7	Max. Tune-up
			Frequency (MHz)		1712.3	1745	1772.3	
QPSK		1	0	22.72	22.79	22.92	24	
		1	12	23.00	23.24	23.04	24	
		1	24	22.92	22.90	22.85	24	
		12	0	22.05	22.28	22.03	23	
		12	6	22.00	22.12	21.99	23	
		12	13	22.06	22.16	22.08	23	
		25	0	21.92	22.19	21.99	23	
16QAM		1	0	22.08	22.12	21.99	23	
		1	12	22.22	22.40	22.28	23	
		1	24	22.21	22.30	22.28	23	
		12	0	21.47	21.25	21.00	22	
		12	6	21.03	21.26	20.91	22	
		12	13	20.99	21.24	21.15	22	
	25	0	21.08	21.25	21.05	22		
64QAM	1	0	20.98	21.17	21.38	22		
	1	12	21.36	21.50	21.21	22		
	1	24	21.26	21.34	21.21	22		
	12	0	20.05	20.19	20.06	21		
	12	6	20.05	20.34	19.96	21		
	12	13	20.16	20.29	20.17	21		
	25	0	20.01	20.20	20.11	21		
	BW	MCS Index	Channel		13196.7	13232.2	13266.7	Max. Tune-up
			Frequency (MHz)		1711.5	1745	1778.5	
QPSK		1	0	22.76	22.85	22.98	24	
		1	7	23.07	23.25	22.94	24	
		1	14	22.86	23.01	22.89	24	
		8	0	22.00	22.22	22.08	23	
		8	3	21.85	22.13	21.90	23	
		8	7	22.06	22.12	22.09	23	
		15	0	21.95	22.21	21.97	23	
16QAM		1	0	22.03	22.05	22.06	23	
		1	7	22.19	22.34	22.27	23	
		1	14	22.21	22.32	22.19	23	
		8	0	21.52	21.23	21.06	22	
		8	3	21.06	21.26	20.93	22	
		8	7	20.97	21.22	21.10	22	
	15	0	21.07	21.23	21.00	22		
64QAM	1	0	20.91	21.11	21.41	22		
	1	7	21.42	21.41	21.32	22		
	1	14	21.28	21.35	21.14	22		
	8	0	19.94	20.29	20.00	21		
	8	3	20.04	20.35	19.94	21		
	8	7	20.04	20.26	20.18	21		
	15	0	19.97	20.25	20.14	21		
	BW	MCS Index	Channel		13197.9	13232.2	13266.5	Max. Tune-up
			Frequency (MHz)		1716.7	1745	1779.3	
QPSK		1	0	22.83	22.89	22.86	24	
		1	2	23.02	23.21	22.97	24	
		1	5	22.95	23.03	22.92	24	
		3	0	23.07	23.15	23.06	24	
		3	1	22.99	23.26	22.97	24	
		3	3	23.07	23.15	23.10	24	
		6	0	21.96	22.18	22.00	23	
16QAM		1	0	22.05	22.10	22.07	23	
		1	2	22.19	22.28	22.19	23	
		1	5	22.10	22.32	22.30	23	
		3	0	22.57	22.28	22.06	23	
		3	1	22.08	22.31	21.96	23	
		3	3	22.08	22.24	22.12	23	
	6	0	21.06	21.35	20.99	22		
64QAM	1	2	21.39	21.45	21.32	22		
	1	5	21.22	21.39	21.24	22		
	3	0	21.05	21.21	21.01	22		
	3	1	21.04	21.34	20.97	22		
	3	3	21.10	21.24	21.14	22		
	6	0	19.92	20.25	20.01	21		

Reduce Power

LTE Band 2										
BW	MCS Index	RB Size	RB Offset	Low	Mid	High				
		Channel		1870	1890	1910				
		Frequency (MHz)		1860	1880	1900	Max. Tune-up (GHz)			
20M	QPSK	1	0	10.82	10.96	10.91	12			
		1	50	11.19	11.39	11.17	12			
		1	99	10.88	10.87	11.09	12			
		50	0	11.09	11.25	11.18	12			
		50	25	11.01	11.07	11.04	12			
		50	50	10.82	10.86	11.02	12			
	16QAM	100	0	10.97	11.18	10.95	12			
		1	0	10.76	10.91	10.90	12			
		1	50	11.15	11.35	11.11	12			
		1	99	10.86	10.85	10.98	12			
		50	0	10.65	10.89	10.83	12			
		50	25	10.95	11.16	11.10	12			
	64QAM	50	50	10.80	10.78	11.01	12			
		100	0	10.64	10.73	10.70	12			
		1	0	10.69	10.84	10.76	12			
		1	50	11.17	11.38	11.10	12			
		1	99	10.83	10.82	11.07	12			
		50	0	10.57	10.84	10.76	12			
	BW	MCS Index	50	25	11.03	11.17	11.05	12		
			50	50	10.80	10.79	10.88	12		
			100	0	10.65	10.82	10.80	12		
Channel			18675	18900	19125	Max. Tune-up				
Frequency (MHz)			1857.5	1880	1892.5					
15M	QPSK	1	0	10.67	10.82	10.90	12			
		1	37	11.15	11.30	11.10	12			
		1	74	10.79	10.83	11.07	12			
		36	0	10.66	10.81	10.83	12			
		36	19	11.08	11.13	11.09	12			
		36	39	10.71	10.83	10.93	12			
	16QAM	75	0	10.57	10.83	10.73	12			
		1	0	10.68	10.89	10.82	12			
		1	37	11.00	11.25	11.02	12			
		1	74	10.83	10.74	10.83	12			
		36	0	10.55	10.75	10.80	12			
		36	19	10.81	11.09	11.09	12			
	64QAM	36	39	10.65	10.63	11.00	12			
		75	0	10.61	10.60	10.64	12			
		1	0	10.70	10.59	10.70	12			
		1	37	11.02	11.25	10.96	12			
		1	74	10.75	10.72	11.03	12			
		36	0	10.47	10.74	10.75	12			
	BW	MCS Index	36	19	10.88	11.09	10.94	12		
			36	39	10.68	10.64	10.76	12		
			75	0	10.50	10.76	10.68	12		
Channel			18650	18900	19150	Max. Tune-up				
Frequency (MHz)			1865	1890	1905					
10M	QPSK	1	0	10.71	10.94	10.93	12			
		1	24	11.12	11.36	11.03	12			
		1	49	10.76	10.79	10.99	12			
		25	0	10.58	10.89	10.70	12			
		25	12	11.06	11.18	11.05	12			
		25	25	10.74	10.71	10.93	12			
	16QAM	50	0	10.62	10.78	10.84	12			
		1	0	10.73	10.84	10.85	12			
		1	24	11.02	11.27	11.04	12			
		1	49	10.75	10.70	10.93	12			
		25	0	10.55	10.78	10.74	12			
		25	12	10.93	11.07	11.01	12			
	64QAM	25	25	10.76	10.76	10.88	12			
		50	0	10.58	10.63	10.63	12			
		1	0	10.65	10.74	10.61	12			
		1	24	11.10	11.34	11.00	12			
		1	49	10.68	10.80	10.98	12			
		25	0	10.45	10.81	10.66	12			
	BW	MCS Index	25	12	10.95	11.03	11.01	12		
			25	25	10.73	10.75	10.85	12		
			50	0	10.53	10.78	10.68	12		
Channel			18625	18900	19175	Max. Tune-up				
Frequency (MHz)			1862.5	1885	1907.5					
5M	QPSK	1	0	10.74	10.85	10.85	12			
		1	12	11.13	11.25	11.05	12			
		1	24	10.80	10.78	11.06	12			
		12	0	10.61	10.83	10.82	12			
		12	6	11.01	11.11	11.11	12			
		12	13	10.68	10.81	10.95	12			
	16QAM	25	0	10.66	10.73	10.81	12			
		1	0	10.72	10.87	10.90	12			
		1	12	11.00	11.22	11.04	12			
		1	24	10.77	10.79	10.90	12			
		12	0	10.58	10.77	10.78	12			
		12	6	10.93	11.08	11.06	12			
	64QAM	12	13	10.78	10.84	10.94	12			
		25	0	10.54	10.70	10.55	12			
		1	0	10.59	10.74	10.75	12			
		1	12	11.12	11.29	11.02	12			
		1	24	10.69	10.74	11.01	12			
		12	0	10.56	10.78	10.74	12			
	BW	MCS Index	12	6	10.88	11.05	11.03	12		
			12	13	10.78	10.78	11.03	12		
			25	0	10.59	10.79	10.66	12		
Channel			18615	18900	19195	Max. Tune-up				
Frequency (MHz)			1851.5	1880	1908.5					
3M	QPSK	1	0	10.72	10.90	10.79	12			
		1	7	11.09	11.26	11.16	12			
		1	14	10.79	10.74	11.02	12			
		8	0	10.60	10.83	10.77	12			
		8	3	11.06	11.23	11.16	12			
		8	7	10.70	10.85	10.89	12			
	16QAM	15	0	10.53	10.77	10.74	12			
		1	0	10.68	10.83	10.89	12			
		1	7	11.12	11.33	10.96	12			
		1	14	10.77	10.79	10.85	12			
		8	0	10.59	10.81	10.73	12			
		8	3	10.89	11.05	10.95	12			
	64QAM	8	7	10.79	10.73	10.93	12			
		15	0	10.59	10.63	10.67	12			
		1	0	10.55	10.73	10.75	12			
		1	7	11.03	11.30	10.99	12			
		1	14	10.80	10.77	10.97	12			
		8	0	10.45	10.74	10.66	12			
	BW	MCS Index	8	3	10.98	11.04	10.95	12		
			8	7	10.68	10.68	10.83	12		
			15	0	10.62	10.90	10.79	12		
Channel			18607	18900	19193	Max. Tune-up				
Frequency (MHz)			1857.7	1880	1909.3					
1.4M	QPSK	1	0	10.76	10.85	10.90	12			
		1	2	11.07	11.25	11.08	12			
		1	5	10.77	10.81	11.05	12			
		3	0	10.63	10.84	10.79	12			
		3	1	11.06	11.13	11.10	12			
		3	3	10.79	10.73	10.91	12			
	16QAM	6	0	10.57	10.75	10.76	12			
		1	0	10.67	10.90	10.89	12			
		1	2	11.07	11.26	11.07	12			
		1	5	10.77	10.78	10.94	12			
		3	0	10.56	10.83	10.79	12			
		3	1	10.91	11.14	10.95	12			
	64QAM	3	3	10.70	10.66	11.00	12			
		6	0	10.61	10.84	10.56	12			
		1	0	10.65	10.70	10.88	12			
		1	2	11.08	11.33	11.07	12			
		1	5	10.78	10.69	10.94	12			
		3	0	10.55	10.72	10.62	12			

LTE Band 7									
BW	Modulation	RB Size		Low	Mid	High	Max. Tune-up (dBm)		
		Channel	Frequency (MHz)						
		20M	16QAM	1	0	10.87			
	QPSK	1 <td>50</td> <td>11.04</td> <td>11.21</td> <td>11.19</td> <td>12</td> <td></td> <td></td>	50	11.04	11.21	11.19	12		
		1 <td>99</td> <td>10.82</td> <td>10.92</td> <td>10.92</td> <td>12</td> <td></td> <td></td>	99	10.82	10.92	10.92	12		
		50	0	10.81	10.89	11.02	12		
		50	25	10.92	11.16	11.15	12		
		50	50	10.72	10.81	10.79	12		
		100	0	10.74	10.96	10.95	12		
	16QAM	1 <td>0</td> <td>10.74</td> <td>10.97</td> <td>11.01</td> <td>12</td> <td></td> <td></td>	0	10.74	10.97	11.01	12		
		1 <td>50</td> <td>11.03</td> <td>11.11</td> <td>11.17</td> <td>12</td> <td></td> <td></td>	50	11.03	11.11	11.17	12		
		1 <td>99</td> <td>10.79</td> <td>10.85</td> <td>10.86</td> <td>12</td> <td></td> <td></td>	99	10.79	10.85	10.86	12		
		50	0	10.71	10.76	10.89	12		
		50	25	10.77	11.09	11.13	12		
		50	50	10.64	10.67	10.75	12		
64QAM	100	0	10.66	10.88	10.83	12			
	1 <td>0</td> <td>10.74</td> <td>10.88</td> <td>10.95</td> <td>12</td> <td></td> <td></td>	0	10.74	10.88	10.95	12			
	1 <td>50</td> <td>10.90</td> <td>11.19</td> <td>11.04</td> <td>12</td> <td></td> <td></td>	50	10.90	11.19	11.04	12			
	1 <td>99</td> <td>10.70</td> <td>10.86</td> <td>10.85</td> <td>12</td> <td></td> <td></td>	99	10.70	10.86	10.85	12			
	50	0	10.78	10.84	10.93	12			
	50	25	10.87	11.12	11.01	12			
	50	50	10.60	10.80	10.72	12			
	100	0	10.63	10.95	10.85	12			
BW	Modulation	Channel	20825	21100	21375	21650	Max. Tune-up (dBm)		
		Frequency (MHz)	20825	20825	20825	20825			
		QPSK	1 <td>0</td> <td>10.86</td> <td>10.87</td> <td>11.01</td> <td>12</td> <td></td> <td></td>	0	10.86	10.87	11.01	12	
1 <td>37</td> <td>10.96</td> <td>11.18</td> <td>11.05</td> <td>12</td> <td></td> <td></td>			37	10.96	11.18	11.05	12		
1 <td>74</td> <td>10.72</td> <td>10.90</td> <td>10.78</td> <td>12</td> <td></td> <td></td>			74	10.72	10.90	10.78	12		
36			0	10.70	10.87	10.96	12		
36			19	10.82	11.03	11.03	12		
36			39	10.68	10.66	10.67	12		
16QAM		75	0	10.72	10.94	10.89	12		
		1 <td>0</td> <td>10.69</td> <td>10.93</td> <td>10.99</td> <td>12</td> <td></td> <td></td>	0	10.69	10.93	10.99	12		
		1 <td>37</td> <td>10.96</td> <td>11.03</td> <td>11.13</td> <td>12</td> <td></td> <td></td>	37	10.96	11.03	11.13	12		
		1 <td>74</td> <td>10.65</td> <td>10.81</td> <td>10.80</td> <td>12</td> <td></td> <td></td>	74	10.65	10.81	10.80	12		
		36	0	10.63	10.64	10.74	12		
		36	19	10.66	11.00	11.04	12		
64QAM	36	39	10.57	10.63	10.69	12			
	75	0	10.62	10.80	10.80	12			
	1 <td>0</td> <td>10.69</td> <td>10.87</td> <td>10.80</td> <td>12</td> <td></td> <td></td>	0	10.69	10.87	10.80	12			
	1 <td>37</td> <td>10.81</td> <td>11.06</td> <td>10.99</td> <td>12</td> <td></td> <td></td>	37	10.81	11.06	10.99	12			
	1 <td>74</td> <td>10.65</td> <td>10.75</td> <td>10.82</td> <td>12</td> <td></td> <td></td>	74	10.65	10.75	10.82	12			
	36	0	10.68	10.74	10.81	12			
	36	19	10.86	11.07	10.92	12			
	36	39	10.51	10.68	10.62	12			
	75	0	10.48	10.85	10.73	12			
	Channel	20800	21100	21400	21650	Max. Tune-up (dBm)			
BW	Modulation	Channel	20800	21100	21400	21650	Max. Tune-up (dBm)		
		Frequency (MHz)	20800	20800	20800	20800			
		QPSK	1 <td>0</td> <td>10.78</td> <td>10.92</td> <td>10.95</td> <td>12</td> <td></td> <td></td>	0	10.78	10.92	10.95	12	
1 <td>24</td> <td>10.92</td> <td>11.13</td> <td>11.04</td> <td>12</td> <td></td> <td></td>			24	10.92	11.13	11.04	12		
1 <td>49</td> <td>10.81</td> <td>10.91</td> <td>10.77</td> <td>12</td> <td></td> <td></td>			49	10.81	10.91	10.77	12		
25			0	10.74	10.82	10.89	12		
25			12	10.86	11.04	11.13	12		
25			25	10.70	10.68	10.72	12		
16QAM		50	0	10.67	10.89	10.86	12		
		1 <td>0</td> <td>10.59</td> <td>10.84</td> <td>10.97</td> <td>12</td> <td></td> <td></td>	0	10.59	10.84	10.97	12		
		1 <td>24</td> <td>10.94</td> <td>11.08</td> <td>11.06</td> <td>12</td> <td></td> <td></td>	24	10.94	11.08	11.06	12		
		1 <td>49</td> <td>10.68</td> <td>10.72</td> <td>10.78</td> <td>12</td> <td></td> <td></td>	49	10.68	10.72	10.78	12		
		25	0	10.67	10.72	10.76	12		
		25	12	10.67	10.98	10.99	12		
64QAM	25	25	10.63	10.62	10.66	12			
	50	0	10.55	10.80	10.68	12			
	1 <td>0</td> <td>10.69</td> <td>10.97</td> <td>10.88</td> <td>12</td> <td></td> <td></td>	0	10.69	10.97	10.88	12			
	1 <td>24</td> <td>10.89</td> <td>11.13</td> <td>10.91</td> <td>12</td> <td></td> <td></td>	24	10.89	11.13	10.91	12			
	1 <td>49</td> <td>10.68</td> <td>10.83</td> <td>10.75</td> <td>12</td> <td></td> <td></td>	49	10.68	10.83	10.75	12			
	25	0	10.63	10.72	10.86	12			
	25	12	10.76	10.99	10.90	12			
	25	25	10.53	10.67	10.62	12			
	50	0	10.51	10.93	10.78	12			
	Channel	20775	21100	21425	21650	Max. Tune-up (dBm)			
BW	Modulation	Channel	20775	21100	21425	21650	Max. Tune-up (dBm)		
		Frequency (MHz)	20775	20775	20775	20775			
		QPSK	1 <td>0</td> <td>10.83</td> <td>10.83</td> <td>11.08</td> <td>12</td> <td></td> <td></td>	0	10.83	10.83	11.08	12	
1 <td>12</td> <td>11.01</td> <td>11.19</td> <td>11.07</td> <td>12</td> <td></td> <td></td>			12	11.01	11.19	11.07	12		
1 <td>24</td> <td>10.67</td> <td>10.89</td> <td>10.90</td> <td>12</td> <td></td> <td></td>			24	10.67	10.89	10.90	12		
12			0	10.67	10.86	10.91	12		
12			6	10.85	11.04	11.02	12		
12			13	10.59	10.73	10.75	12		
16QAM		25	0	10.61	10.91	10.90	12		
		1 <td>0</td> <td>10.70</td> <td>10.94</td> <td>10.96</td> <td>12</td> <td></td> <td></td>	0	10.70	10.94	10.96	12		
		1 <td>12</td> <td>10.99</td> <td>11.00</td> <td>11.04</td> <td>12</td> <td></td> <td></td>	12	10.99	11.00	11.04	12		
		1 <td>24</td> <td>10.74</td> <td>10.79</td> <td>10.84</td> <td>12</td> <td></td> <td></td>	24	10.74	10.79	10.84	12		
		12	0	10.59	10.69	10.86	12		
		12	6	10.63	11.05	11.00	12		
64QAM	12	13	10.62	10.54	10.69	12			
	25	0	10.54	10.87	10.71	12			
	1 <td>0</td> <td>10.69</td> <td>10.87</td> <td>10.86</td> <td>12</td> <td></td> <td></td>	0	10.69	10.87	10.86	12			
	1 <td>12</td> <td>10.83</td> <td>11.11</td> <td>10.93</td> <td>12</td> <td></td> <td></td>	12	10.83	11.11	10.93	12			
	1 <td>24</td> <td>10.68</td> <td>10.80</td> <td>10.82</td> <td>12</td> <td></td> <td></td>	24	10.68	10.80	10.82	12			
	12	0	10.70	10.76	10.85	12			
	12	6	10.75	11.05	10.94	12			
	12	13	10.53	10.79	10.65	12			
	25	0	10.57	10.89	10.73	12			

LTE Band 12									
BW	MCS Index	RB Size					Max. Tune-up (dBm)		
		Channel	Low	Mid	High				
		Frequency (MHz)	768	23095	23130	768			
QPSK	10M	1	0	17.18	17.17	17.28	18		
		1	24	17.33	17.28	17.31	18		
		1	49	17.18	17.11	17.16	18		
		25	0	17.27	17.17	17.22	18		
		25	12	17.18	17.14	17.19	18		
		25	25	17.03	17.09	17.14	18		
		50	0	17.25	17.12	17.22	18		
		1	0	17.16	17.15	17.24	18		
		1	24	17.19	17.19	17.27	18		
		1	49	17.12	17.05	17.14	18		
		25	0	17.22	17.13	17.20	18		
		25	12	17.03	17.08	17.12	18		
16QAM	10M	25	25	16.98	17.02	17.07	18		
		50	0	17.15	17.08	17.13	18		
		1	0	17.28	17.08	17.11	18		
		1	24	17.31	17.26	17.19	18		
		1	49	17.06	16.99	17.12	18		
		25	0	17.26	17.04	17.07	18		
		25	12	17.03	17.06	17.17	18		
		25	25	16.95	16.96	17.00	18		
		50	0	17.14	17.10	17.08	18		
		QPSK	5M	Channel	23035	23095	23155	Max. Tune-up	
				Frequency (MHz)	768.5	767.5	763.5		
				1	0	17.14	17.16	17.16	18
1	12			17.24	17.15	17.22	18		
1	24			17.03	16.97	17.12	18		
12	0			17.22	17.09	17.08	18		
12	6			17.15	17.05	17.06	18		
12	13			16.98	16.97	17.11	18		
25	0			17.18	17.11	17.18	18		
1	0			17.14	17.12	17.20	18		
1	12			17.13	17.18	17.12	18		
1	24			17.11	17.03	17.04	18		
16QAM	5M	12	0	17.16	16.98	17.08	18		
		12	6	17.02	17.04	17.08	18		
		12	13	16.92	16.96	16.92	18		
		25	0	17.14	16.97	17.00	18		
		1	0	17.21	16.99	17.02	18		
		1	12	17.26	17.25	17.04	18		
		1	24	16.97	16.95	17.00	18		
		12	0	17.23	17.00	16.96	18		
		12	6	17.02	16.88	17.12	18		
		12	13	16.90	16.85	16.96	18		
		25	0	17.03	17.09	16.95	18		
		QPSK	3M	Channel	23025	23095	23155	Max. Tune-up	
Frequency (MHz)	768.5			767.5	763.5				
1	0			17.25	17.03	17.17	18		
1	7			17.23	17.26	17.19	18		
1	14			17.10	17.04	17.02	18		
8	0			17.16	17.09	17.08	18		
8	3			17.05	17.08	17.08	18		
8	7			16.90	17.00	17.04	18		
15	0			17.14	16.98	17.18	18		
1	0			17.12	17.00	17.23	18		
1	7			17.18	17.11	17.21	18		
1	14			17.03	16.97	17.12	18		
16QAM	3M	0	17.13	17.07	17.08	18			
		8	3	17.00	17.07	17.09	18		
		8	7	16.97	16.92	17.06	18		
		15	0	17.05	17.00	16.99	18		
		1	0	17.13	16.96	17.05	18		
		1	7	17.23	17.13	17.12	18		
		1	14	16.92	16.96	16.96	18		
		8	0	17.18	16.93	17.03	18		
		8	3	17.01	16.87	17.09	18		
		8	7	16.88	16.88	16.86	18		
		15	0	17.03	16.95	16.96	18		
		QPSK	BW	Channel	23047	23095	23173	Max. Tune-up	
Frequency (MHz)	698.7			707.5	743.3				
1	0			17.22	17.09	17.11	18		
1	2			17.25	17.14	17.16	18		
1	5			17.10	17.07	17.01	18		
3	0			17.15	17.14	17.08	18		
3	1			17.08	17.01	17.18	18		
3	3			16.93	17.05	17.12	18		
6	0			17.19	17.10	17.12	18		
1	0			17.04	17.01	17.22	18		
1	14			17.14	17.00	17.04	18		
3	0			17.10	17.04	17.04	18		
16QAM	1.4M	3	0	17.13	17.11	17.18	18		
		3	1	16.98	16.96	17.03	18		
		3	3	16.94	16.96	16.93	18		
		6	0	17.10	17.03	17.06	18		
		0	17.13	17.04	16.96	18			
		1	2	17.20	17.14	17.04	18		
		1	5	16.96	16.95	17.09	18		
		3	0	17.22	16.90	17.06	18		
		3	1	16.97	16.86	17.11	18		
		3	3	16.94	16.93	16.95	18		
		6	0	17.02	17.07	17.07	18		

LTE Band 17						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel Frequency (MHz)		2376 769	2379 710	2380 711
10M	QPSK	1	0	17.21	17.15	17.24
		1	24	17.23	17.29	17.26
		1	49	17.13	16.96	17.14
		25	0	17.25	17.29	17.06
		25	12	17.17	17.01	17.07
		25	25	16.91	17.01	17.02
		50	0	17.21	17.22	17.15
		1	0	17.05	17.06	17.11
		1	24	17.17	17.16	17.20
		1	49	17.08	16.91	17.07
	16QAM	25	0	17.09	17.08	17.13
		25	12	16.89	17.04	17.11
		25	25	16.97	16.94	16.99
		50	0	17.05	16.97	17.03
		1	0	17.19	17.03	17.06
		1	24	17.26	17.21	17.07
		1	49	17.02	16.88	17.10
		25	0	17.21	17.00	16.93
		25	12	16.99	16.94	17.16
		25	25	16.81	16.85	16.89
5M	QPSK	50	0	17.06	17.07	16.99
		1	0	17.11	17.12	17.20
		1	12	17.22	17.16	17.23
		1	24	17.07	16.95	17.01
		12	0	17.21	17.23	17.07
		12	6	17.12	16.93	16.93
		12	13	16.88	16.94	16.89
		25	0	17.06	17.08	17.05
		1	0	16.91	16.87	17.02
		1	12	17.02	17.14	17.11
	16QAM	1	24	17.00	16.89	16.95
		12	0	17.07	17.01	17.06
		12	6	16.74	16.92	17.02
		12	13	16.88	16.84	16.90
		25	0	16.91	16.89	16.96
		1	0	17.09	16.97	17.01
		1	12	17.21	17.17	17.00
		1	24	16.97	16.75	17.08
		12	0	17.19	16.89	16.89
		12	6	16.98	16.85	17.14
		12	13	16.72	16.76	16.80
		25	0	16.99	16.94	16.89
BW	MCS Index	Channel Frequency (MHz)		2376 769.5	2379 710	2380 713.5
						Max. Tune-up (dBm)

LTE Band 25								
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up (dB)	
		Channel Frequency (MHz)		2616 1860	2618 1860	2620 1865		
20M	QPSK	1	0	10.95	10.91	10.90	12	
		1	50	11.09	11.31	11.16	12	
		1	99	10.92	10.81	11.00	12	
		50	0	11.03	11.21	11.06	12	
		50	25	10.94	11.02	11.01	12	
		50	50	10.88	10.83	10.97	12	
		100	0	10.96	11.08	10.91	12	
		16QAM	1	0	10.69	10.81	10.85	12
			1	50	11.06	11.31	10.98	12
			1	99	10.76	10.70	10.84	12
	50		0	10.69	10.84	10.74	12	
	50		25	10.80	11.03	11.08	12	
	100		0	10.78	10.67	10.89	12	
	64QAM	1	0	10.61	10.62	10.68	12	
		1	0	10.57	10.79	10.63	12	
		1	50	11.15	11.32	11.00	12	
		1	99	10.77	10.75	10.92	12	
		50	0	10.45	10.76	10.64	12	
		50	25	10.69	11.08	11.03	12	
	BW	MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up
	15M	QPSK	1	0	10.79	10.83	10.72	12
1			37	11.08	11.24	11.07	12	
1			74	10.79	10.69	10.90	12	
36			0	10.60	10.67	10.71	12	
36			19	10.99	11.07	10.94	12	
36			39	10.66	10.79	10.93	12	
75			0	10.57	10.77	10.58	12	
1			0	10.68	10.73	10.75	12	
1			37	11.04	11.23	10.86	12	
1			74	10.61	10.65	10.70	12	
16QAM		36	0	10.49	10.81	10.66	12	
		36	19	10.68	10.95	10.99	12	
		36	39	10.65	10.57	10.82	12	
		75	0	10.51	10.61	10.58	12	
		1	0	10.55	10.76	10.48	12	
		1	37	11.13	11.23	10.91	12	
64QAM		1	74	10.71	10.62	10.71	12	
		36	0	10.38	10.67	10.54	12	
		36	19	10.93	10.95	10.92	12	
		36	39	10.56	10.59	10.67	12	
		75	0	10.46	10.56	10.64	12	
	BW	MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up
10M	QPSK	1	0	10.73	10.87	10.70	12	
		1	24	10.95	11.25	11.14	12	
		1	49	10.72	10.72	10.93	12	
		25	0	10.55	10.71	10.76	12	
		25	12	10.97	11.18	11.05	12	
		25	25	10.66	10.79	10.88	12	
		50	0	10.58	10.79	10.66	12	
		1	0	10.58	10.66	10.75	12	
		1	24	10.96	11.30	10.91	12	
		1	49	10.64	10.69	10.73	12	
	16QAM	25	0	10.51	10.70	10.69	12	
		25	12	10.70	10.96	11.02	12	
		25	25	10.76	10.65	10.75	12	
		50	0	10.46	10.59	10.55	12	
		1	0	10.43	10.65	10.62	12	
		1	24	11.08	11.29	10.98	12	
	64QAM	1	49	10.64	10.64	10.82	12	
		25	0	10.45	10.75	10.56	12	
		25	12	10.98	11.00	10.95	12	
		25	25	10.62	10.58	10.62	12	
		50	0	10.43	10.63	10.59	12	
BW		MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up
5M	QPSK	1	0	10.72	10.90	10.85	12	
		1	12	11.04	11.27	11.02	12	
		1	24	10.72	10.74	10.89	12	
		12	0	10.59	10.73	10.74	12	
		12	6	10.94	11.20	10.94	12	
		12	13	10.57	10.72	10.90	12	
		25	0	10.59	10.72	10.59	12	
		1	0	10.67	10.66	10.80	12	
		1	12	10.95	11.21	10.89	12	
		1	24	10.67	10.62	10.75	12	
	16QAM	12	0	10.49	10.77	10.63	12	
		12	6	10.78	10.90	11.02	12	
		12	13	10.63	10.66	10.86	12	
		25	0	10.47	10.57	10.61	12	
		1	0	10.43	10.74	10.56	12	
		1	12	11.10	11.27	10.98	12	
	64QAM	1	24	10.66	10.68	10.81	12	
		12	0	10.44	10.67	10.57	12	
		12	6	10.89	10.93	10.92	12	
		12	13	10.60	10.64	10.62	12	
		25	0	10.53	10.56	10.62	12	
BW		MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up
3M	QPSK	1	0	10.73	10.81	10.74	12	
		1	7	10.94	11.23	11.13	12	
		1	14	10.67	10.76	10.90	12	
		8	0	10.55	10.63	10.72	12	
		8	3	10.89	11.12	11.00	12	
		8	7	10.60	10.69	10.96	12	
		15	0	10.58	10.77	10.57	12	
		1	0	10.54	10.74	10.75	12	
		1	7	10.99	11.20	10.86	12	
		1	14	10.67	10.57	10.70	12	
	16QAM	8	0	10.50	10.73	10.61	12	
		8	3	10.69	10.93	11.06	12	
		8	7	10.68	10.54	10.75	12	
		15	0	10.60	10.49	10.54	12	
		1	0	10.46	10.78	10.55	12	
		1	7	11.07	11.30	10.91	12	
	64QAM	1	14	10.68	10.67	10.87	12	
		8	0	10.43	10.68	10.52	12	
		8	3	10.93	10.94	11.01	12	
		8	7	10.65	10.59	10.65	12	
		15	0	10.47	10.65	10.60	12	
BW		MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up
1.4M	QPSK	1	0	10.72	10.87	10.68	12	
		1	2	10.97	11.20	11.08	12	
		1	5	10.73	10.76	10.91	12	
		3	0	10.50	10.75	10.71	12	
		3	1	11.01	11.14	11.04	12	
		3	3	10.65	10.72	10.86	12	
		6	0	10.60	10.83	10.57	12	
		1	0	10.66	10.72	10.75	12	
		1	2	11.05	11.17	10.91	12	
		1	5	10.63	10.68	10.77	12	
	16QAM	3	0	10.58	10.77	10.63	12	
		3	1	10.70	10.94	10.99	12	
		3	3	10.70	10.63	10.79	12	
		6	0	10.51	10.59	10.61	12	
		1	0	10.46	10.78	10.59	12	
		1	2	11.02	11.19	10.88	12	
	64QAM	1	5	10.68	10.63	10.81	12	
		3	0	10.33	10.67	10.50	12	
		3	1	10.96	10.93	10.92	12	
		3	3	10.66	10.66	10.61	12	
		6	0	10.43	10.62	10.64	12	
BW		MCS Index	Channel Frequency (MHz)		2616 1860.5	2618 1860.5	2620 1865	Max. Tune-up

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low	Mid	High	Max. Turn-up (dBm)
		Channel Frequency (MHz)		3765 2580	3800 2595	3815 2610	
				2580	2595	2610	
20M	QPSK	1	0	13.56	13.67	13.60	14.5
		1	50	13.73	13.79	13.74	14.5
		1	99	13.49	13.51	13.52	14.5
		50	0	13.69	13.73	13.66	14.5
		50	25	13.65	13.70	13.65	14.5
		50	50	13.38	13.46	13.38	14.5
		100	0	13.51	13.65	13.47	14.5
		1	0	13.42	13.54	13.56	14.5
		1	50	13.70	13.62	13.68	14.5
		1	99	13.48	13.45	13.40	14.5
	16QAM	50	0	13.62	13.70	13.65	14.5
		50	25	13.61	13.66	13.63	14.5
		50	50	13.33	13.39	13.30	14.5
		100	0	13.45	13.61	13.46	14.5
		1	0	13.48	13.57	13.36	14.5
		1	50	13.64	13.63	13.61	14.5
		1	99	13.42	13.42	13.37	14.5
		50	0	13.63	13.66	13.62	14.5
		50	25	13.55	13.56	13.53	14.5
		50	50	13.32	13.37	13.25	14.5
		100	0	13.42	13.55	13.38	14.5
15M	QPSK	Channel Frequency (MHz)		37625 2577.5	38000 2595	38175 2612.5	Max. Turn-up (dBm)
				2577.5	2595	2612.5	
		1	0	13.49	13.52	13.55	14.5
		1	37	13.58	13.73	13.68	14.5
		1	74	13.43	13.50	13.42	14.5
		36	0	13.55	13.65	13.57	14.5
		36	19	13.59	13.55	13.61	14.5
		36	39	13.31	13.41	13.27	14.5
		75	0	13.40	13.59	13.42	14.5
		1	0	13.32	13.44	13.46	14.5
	16QAM	1	37	13.60	13.51	13.66	14.5
		1	74	13.33	13.32	13.26	14.5
		36	0	13.53	13.59	13.57	14.5
		36	19	13.50	13.56	13.59	14.5
		36	39	13.28	13.37	13.18	14.5
		75	0	13.40	13.56	13.32	14.5
		1	0	13.36	13.56	13.36	14.5
		1	37	13.52	13.50	13.58	14.5
		1	74	13.35	13.35	13.28	14.5
		36	0	13.57	13.63	13.56	14.5
10M	QPSK	Channel Frequency (MHz)		37700 2577.5	38000 2595	38200 2612.5	Max. Turn-up (dBm)
				2577.5	2595	2612.5	
		1	0	13.50	13.63	13.49	14.5
		1	24	13.70	13.71	13.71	14.5
		1	49	13.35	13.49	13.46	14.5
		25	0	13.67	13.70	13.55	14.5
		25	12	13.67	13.68	13.59	14.5
		25	25	13.31	13.41	13.27	14.5
		50	0	13.36	13.53	13.35	14.5
		1	0	13.28	13.50	13.53	14.5
	16QAM	1	24	13.60	13.49	13.53	14.5
		1	49	13.37	13.30	13.32	14.5
		25	0	13.47	13.66	13.63	14.5
		25	12	13.48	13.65	13.51	14.5
		25	25	13.31	13.36	13.21	14.5
		50	0	13.43	13.56	13.28	14.5
		1	0	13.37	13.54	13.34	14.5
		1	24	13.59	13.50	13.46	14.5
		1	49	13.41	13.37	13.32	14.5
		25	0	13.60	13.51	13.50	14.5
5M	QPSK	Channel Frequency (MHz)		37775 2577.5	38000 2595	38225 2612.5	Max. Turn-up (dBm)
				2577.5	2595	2612.5	
		1	0	13.46	13.57	13.45	14.5
		1	12	13.70	13.69	13.67	14.5
		1	24	13.42	13.45	13.41	14.5
		12	0	13.68	13.66	13.63	14.5
		12	6	13.59	13.60	13.55	14.5
		12	13	13.31	13.39	13.26	14.5
		25	0	13.49	13.58	13.39	14.5
		1	0	13.32	13.42	13.43	14.5
	16QAM	1	12	13.63	13.57	13.56	14.5
		1	24	13.39	13.36	13.39	14.5
		12	0	13.50	13.65	13.59	14.5
		12	6	13.48	13.51	13.49	14.5
		12	13	13.32	13.31	13.22	14.5
		25	0	13.33	13.42	13.25	14.5
		1	0	13.40	13.57	13.42	14.5
		1	12	13.56	13.52	13.46	14.5
		1	24	13.41	13.31	13.28	14.5
		12	0	13.62	13.59	13.48	14.5
4QAM	4QAM	12	6	13.40	13.50	13.40	14.5
		12	13	13.27	13.34	13.24	14.5
		25	0	13.33	13.46	13.28	14.5

FCC LTE Band 41 (2496 ~ 2690MHz)									
BW	MCS Index	RB Size	RB Offset	Low	Low Mid	Mid	High Mid	High	Max. Turn-up
		Channel		38750	40165	40620	41055	41480	
		Frequency (MHz)		2591	2584.5	2593	2636.5	2685	
20M	QPSK	1	0	13.65	13.77	13.38	13.53	13.24	14.5
		1	50	13.81	13.87	13.71	13.56	13.54	14.5
		1	99	13.47	13.57	13.45	13.30	13.39	14.5
		50	0	13.76	13.78	13.72	13.58	13.50	14.5
		50	25	13.75	13.76	13.66	13.46	13.47	14.5
		50	50	13.45	13.48	13.43	13.15	13.35	14.5
	16QAM	100	0	13.61	13.75	13.37	13.52	13.32	14.5
		1	0	13.63	13.74	13.26	13.45	13.21	14.5
		1	50	13.75	13.84	13.63	13.43	13.50	14.5
		1	99	13.36	13.51	13.40	13.18	13.29	14.5
		50	0	13.72	13.73	13.59	13.57	13.35	14.5
		50	25	13.66	13.75	13.51	13.33	13.39	14.5
64QAM	50	50	13.34	13.44	13.35	13.09	13.20	14.5	
	100	0	13.56	13.60	13.28	13.47	13.25	14.5	
	1	0	13.62	13.67	13.37	13.43	13.14	14.5	
	1	50	13.67	13.74	13.56	13.44	13.53	14.5	
	1	99	13.39	13.43	13.31	13.16	13.29	14.5	
	50	0	13.64	13.65	13.62	13.48	13.38	14.5	
15M	QPSK	50	25	13.73	13.64	13.56	13.37	13.44	14.5
		50	50	13.32	13.46	13.35	13.14	13.31	14.5
		100	0	13.57	13.72	13.30	13.45	13.30	14.5
		1	0	13.52	13.64	13.32	13.47	13.25	14.5
		1	37	13.63	13.71	13.48	13.29	13.45	14.5
		1	74	13.31	13.38	13.19	13.04	13.21	14.5
	16QAM	36	0	13.57	13.56	13.50	13.47	13.35	14.5
		36	19	13.62	13.53	13.49	13.23	13.37	14.5
		36	39	13.17	13.38	13.23	13.05	13.17	14.5
		75	0	13.45	13.60	13.23	13.34	13.17	14.5
		1	0	13.53	13.62	13.30	13.41	13.15	14.5
		1	37	13.63	13.71	13.48	13.29	13.45	14.5
10M	QPSK	1	74	13.31	13.38	13.19	13.04	13.21	14.5
		36	0	13.57	13.56	13.50	13.47	13.35	14.5
		36	19	13.62	13.53	13.49	13.23	13.37	14.5
		36	39	13.17	13.38	13.23	13.05	13.17	14.5
		75	0	13.45	13.60	13.23	13.34	13.17	14.5
		1	0	13.53	13.62	13.30	13.41	13.15	14.5
	16QAM	1	37	13.63	13.71	13.48	13.29	13.45	14.5
		1	74	13.31	13.38	13.19	13.04	13.21	14.5
		36	0	13.57	13.56	13.50	13.47	13.35	14.5
		36	19	13.62	13.53	13.49	13.23	13.37	14.5
		36	39	13.17	13.38	13.23	13.05	13.17	14.5
		75	0	13.45	13.60	13.23	13.34	13.17	14.5
5M	QPSK	Channel		38760	40168	40628	41080	41548	Max. Turn-up
		Frequency (MHz)		2591	2584.7	2593	2639	2685	
		1	0	13.55	13.69	13.36	13.52	13.21	14.5
		1	24	13.80	13.73	13.64	13.51	13.47	14.5
		1	49	13.44	13.46	13.34	13.21	13.30	14.5
		25	0	13.73	13.69	13.70	13.52	13.39	14.5
	16QAM	25	12	13.72	13.67	13.58	13.43	13.40	14.5
		25	25	13.34	13.33	13.37	13.00	13.22	14.5
		50	0	13.53	13.61	13.28	13.49	13.22	14.5
		1	0	13.61	13.72	13.13	13.38	13.09	14.5
		1	24	13.63	13.79	13.50	13.31	13.44	14.5
		1	49	13.22	13.42	13.35	13.12	13.17	14.5
64QAM	25	0	13.60	13.58	13.55	13.49	13.31	14.5	
	25	12	13.68	13.66	13.50	13.23	13.37	14.5	
	25	25	13.30	13.39	13.30	12.98	13.15	14.5	
	50	0	13.53	13.48	13.26	13.39	13.12	14.5	
	1	0	13.49	13.52	13.33	13.40	12.99	14.5	
	1	24	13.59	13.66	13.51	13.35	13.42	14.5	
BW	MCS Index	Channel	38674	40167	40625	41076	41546	Max. Turn-up	
			Frequency (MHz)		2591	2584.6	2593		2640.3
		1	0	13.64	13.70	13.24	13.38	13.16	14.5
		1	12	13.68	13.83	13.57	13.43	13.46	14.5
		1	24	13.33	13.56	13.40	13.25	13.25	14.5
		12	6	13.70	13.75	13.71	13.47	13.47	14.5
	16QAM	12	6	13.68	13.73	13.57	13.42	13.45	14.5
		12	13	13.33	13.45	13.30	13.04	13.30	14.5
		25	0	13.55	13.64	13.34	13.45	13.25	14.5
		1	0	13.49	13.68	13.13	13.36	13.06	14.5
		1	12	13.69	13.71	13.55	13.35	13.42	14.5
		25	24	13.32	13.47	13.26	13.10	13.21	14.5
64QAM	12	0	13.60	13.60	13.50	13.48	13.31	14.5	
	12	6	13.55	13.60	13.39	13.19	13.37	14.5	
	12	13	13.33	13.38	13.30	13.04	13.18	14.5	
	25	0	13.45	13.49	13.25	13.32	13.17	14.5	
	1	0	13.51	13.57	13.30	13.26	13.00	14.5	
	1	12	13.65	13.59	13.45	13.31	13.52	14.5	
16QAM	1	24	13.30	13.41	13.16	13.04	13.25	14.5	
	12	0	13.53	13.61	13.47	13.33	13.25	14.5	
	12	6	13.71	13.54	13.50	13.26	13.46	14.5	
	12	13	13.24	13.33	13.29	13.13	13.20	14.5	
	25	0	13.49	13.69	13.17	13.41	13.28	14.5	

LTE Band 66									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	Max. Tune-up		
		Channel	132872	133322	132872				
Frequency (MHz)				1726	1746	1776			
20M	QPSK	1	0	12.18	12.15	12.21	13		
		1	50	12.24	12.43	12.27	13		
		1	99	12.25	12.16	12.17	13		
		50	0	12.19	12.36	12.26	13		
		50	25	12.15	12.34	12.25	13		
		50	50	12.15	12.14	12.15	13		
	16QAM	100	0	12.10	12.23	12.12	13		
		1	50	12.11	12.42	12.21	13		
		1	99	12.24	12.15	12.03	13		
		50	0	12.08	12.34	12.21	13		
		50	25	12.10	12.23	12.17	13		
		50	50	12.05	12.03	12.11	13		
64QAM	100	0	12.10	12.29	12.09	13			
	1	0	12.17	12.13	12.09	13			
	1	50	12.09	12.32	12.17	13			
	1	99	12.06	12.22	12.16	13			
	50	25	12.00	12.28	12.13	13			
	50	50	12.08	11.99	12.06	13			
Channel <td>133047<td>133547<td>132847<th colspan="3">Max. Tune-up</th></td></td></td>				133047 <td>133547<td>132847<th colspan="3">Max. Tune-up</th></td></td>	133547 <td>132847<th colspan="3">Max. Tune-up</th></td>	132847 <th colspan="3">Max. Tune-up</th>	Max. Tune-up		
Frequency (MHz)				1717.5	1746	1772.5			
15M	QPSK	1	0	12.12	12.11	12.06	13		
		1	37	12.16	12.41	12.20	13		
		1	74	12.17	12.12	12.06	13		
		36	0	12.11	12.30	12.14	13		
		36	19	12.00	12.24	12.20	13		
		36	39	12.06	12.06	12.12	13		
	16QAM	75	0	12.11	12.20	12.02	13		
		1	0	11.95	12.18	11.97	13		
		1	37	12.10	12.35	12.19	13		
		1	74	12.19	12.03	11.90	13		
		36	0	12.03	12.25	12.14	13		
		36	19	11.98	12.21	12.11	13		
64QAM	36	39	11.90	11.97	11.96	13			
	75	0	12.05	12.19	12.01	13			
	1	0	12.12	12.07	12.08	13			
	1	37	11.95	12.17	12.15	13			
	1	74	12.14	12.06	12.00	13			
	36	0	11.95	12.12	12.06	13			
Channel <td>133047<td>133232<td>132847<th colspan="3">Max. Tune-up</th></td></td></td>				133047 <td>133232<td>132847<th colspan="3">Max. Tune-up</th></td></td>	133232 <td>132847<th colspan="3">Max. Tune-up</th></td>	132847 <th colspan="3">Max. Tune-up</th>	Max. Tune-up		
Frequency (MHz)				1716	1746	1775			
10M	QPSK	1	0	12.16	12.13	12.17	13		
		1	24	12.22	12.42	12.20	13		
		1	49	12.14	12.13	12.07	13		
		25	0	12.11	12.25	12.12	13		
		25	12	12.14	12.21	12.18	13		
		25	25	12.02	12.06	12.05	13		
	16QAM	50	0	12.07	12.21	12.14	13		
		1	0	12.07	12.13	12.00	13		
		1	24	12.08	12.33	12.17	13		
		1	49	12.19	12.12	11.92	13		
		25	0	11.96	12.23	12.19	13		
		25	12	12.09	12.15	12.15	13		
64QAM	25	25	12.04	12.02	12.02	13			
	50	0	12.04	12.27	12.01	13			
	1	0	12.12	12.08	12.05	13			
	1	24	11.96	12.30	12.11	13			
	1	49	12.08	12.06	11.92	13			
	25	0	11.99	12.17	12.08	13			
Channel <td>131997<td>132322<td>132647<th colspan="3">Max. Tune-up</th></td></td></td>				131997 <td>132322<td>132647<th colspan="3">Max. Tune-up</th></td></td>	132322 <td>132647<th colspan="3">Max. Tune-up</th></td>	132647 <th colspan="3">Max. Tune-up</th>	Max. Tune-up		
Frequency (MHz)				1715.5 <td>1746<td>1777.5<th colspan="3"></th></td></td>	1746 <td>1777.5<th colspan="3"></th></td>	1777.5 <th colspan="3"></th>			
5M	QPSK	1	0	12.03	12.15	12.08	13		
		1	12	12.16	12.31	12.25	13		
		1	24	12.11	12.06	12.10	13		
		12	0	12.04	12.23	12.19	13		
		12	6	12.13	12.28	12.24	13		
		12	13	12.12	12.03	12.03	13		
	16QAM	25	0	12.10	12.28	12.11	13		
		1	0	11.98	12.10	12.03	13		
		1	12	11.98	12.40	12.18	13		
		1	24	12.23	12.08	11.99	13		
		12	0	12.00	12.23	12.11	13		
		12	6	12.02	12.09	12.10	13		
64QAM	12	13	11.96	12.06	12.03	13			
	25	0	12.07	12.26	12.03	13			
	1	0	12.10	12.05	12.05	13			
	1	12	11.99	12.30	12.16	13			
	1	24	12.13	12.05	11.91	13			
	12	0	11.99	12.13	12.02	13			
Channel <td>131987<td>132322<td>132667<th colspan="3">Max. Tune-up</th></td></td></td>				131987 <td>132322<td>132667<th colspan="3">Max. Tune-up</th></td></td>	132322 <td>132667<th colspan="3">Max. Tune-up</th></td>	132667 <th colspan="3">Max. Tune-up</th>	Max. Tune-up		
Frequency (MHz)				1715.5 <td>1746<td>1778.5<th colspan="3"></th></td></td>	1746 <td>1778.5<th colspan="3"></th></td>	1778.5 <th colspan="3"></th>			
3M	QPSK	1	0	12.04	12.13	12.13	13		
		1	7	12.21	12.33	12.20	13		
		1	14	12.14	12.08	12.05	13		
		8	0	12.07	12.31	12.11	13		
		8	3	12.13	12.24	12.14	13		
		8	7	12.05	12.01	12.04	13		
	16QAM	15	0	12.09	12.29	12.10	13		
		1	0	12.08	12.11	12.05	13		
		1	7	11.98	12.31	12.17	13		
		1	14	12.09	12.01	11.92	13		
		8	0	12.07	12.20	12.14	13		
		8	3	12.07	12.21	12.13	13		
64QAM	8	7	12.01	11.97	12.10	13			
	15	0	11.99	12.27	11.97	13			
	1	0	12.13	12.00	12.00	13			
	1	7	11.94	12.28	12.16	13			
	1	14	12.13	12.03	11.96	13			
	8	0	11.92	12.16	12.03	13			
Channel <td>131979<td>132322<td>132669<th colspan="3">Max. Tune-up</th></td></td></td>				131979 <td>132322<td>132669<th colspan="3">Max. Tune-up</th></td></td>	132322 <td>132669<th colspan="3">Max. Tune-up</th></td>	132669 <th colspan="3">Max. Tune-up</th>	Max. Tune-up		
Frequency (MHz)				1716.5 <td>1746<td>1779.5<th colspan="3"></th></td></td>	1746 <td>1779.5<th colspan="3"></th></td>	1779.5 <th colspan="3"></th>			
1.4M	QPSK	1	0	12.10	12.21	12.06	13		
		1	2	12.11	12.35	12.25	13		
		1	5	12.21	12.08	12.05	13		
		3	0	12.13	12.24	12.24	13		
		3	1	12.06	12.22	12.22	13		
		3	3	12.14	12.11	12.06	13		
	16QAM	6	0	12.14	12.21	12.08	13		
		1	0	11.99	12.21	12.10	13		
		1	2	12.07	12.29	12.06	13		
		1	5	12.20	12.05	11.90	13		
		3	0	11.96	12.33	12.13	13		
		3	1	12.01	12.08	12.15	13		
64QAM	3	3	11.98	12.00	12.05	13			
	6	0	11.96	12.06	12.12	13			
	1	0	12.11	12.07	12.07	13			
	1	2	11.96	12.25	12.16	13			
	1	5	12.04	11.94	11.94	13			
	0	0	12.02	12.20	12.14	13			

Full Power

CA_7C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
20850	2510	21048	2529.8	QPSK	1	99	1	0	22.76	24
				16QAM	1	99	1	0	22.10	23
				64QAM	1	99	1	0	20.20	22
21001	2525.1	21199	2544.9	QPSK	1	99	1	0	22.87	24
				16QAM	1	99	1	0	22.18	23
				64QAM	1	99	1	0	20.31	22
21152	2540.2	21350	2560	QPSK	1	99	1	0	22.71	24
				16QAM	1	99	1	0	22.08	23
				64QAM	1	99	1	0	20.23	22

CA_38C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
37850	2580	38048	2599.8	QPSK	1	99	1	0	22.37	24
				16QAM	1	99	1	0	21.51	23
				64QAM	1	99	1	0	20.29	22
37901	2585.1	38099	2604.9	QPSK	1	99	1	0	22.45	24
				16QAM	1	99	1	0	21.55	23
				64QAM	1	99	1	0	20.25	22
37952	2590.2	38150	2610	QPSK	1	99	1	0	22.39	24
				16QAM	1	99	1	0	21.52	23
				64QAM	1	99	1	0	20.19	22

CA_41C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
39750	2506	39948	2525.8	QPSK	1	99	1	0	22.67	24
				16QAM	1	99	1	0	21.74	23
				64QAM	1	99	1	0	20.23	22
40521	2583.1	40719	2602.9	QPSK	1	99	1	0	22.75	24
				16QAM	1	99	1	0	21.64	23
				64QAM	1	99	1	0	20.19	22
41292	2660.2	41490	2680	QPSK	1	99	1	0	22.51	24
				16QAM	1	99	1	0	21.66	23
				64QAM	1	99	1	0	20.21	22

Reduce Power

CA_7C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
20850	2510	21048	2529.8	QPSK	1	99	1	0	11.10	12
				16QAM	1	99	1	0	11.00	12
				64QAM	1	99	1	0	10.82	12
21001	2525.1	21199	2544.9	QPSK	1	99	1	0	11.19	12
				16QAM	1	99	1	0	11.05	12
				64QAM	1	99	1	0	11.01	12
21152	2540.2	21350	2560	QPSK	1	99	1	0	11.08	12
				16QAM	1	99	1	0	10.97	12
				64QAM	1	99	1	0	10.90	12

CA_38C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
37850	2580	38048	2599.8	QPSK	1	99	1	0	13.68	14.5
				16QAM	1	99	1	0	13.52	14.5
				64QAM	1	99	1	0	13.51	14.5
37901	2585.1	38099	2604.9	QPSK	1	99	1	0	13.72	14.5
				16QAM	1	99	1	0	13.64	14.5
				64QAM	1	99	1	0	13.56	14.5
37952	2590.2	38150	2610	QPSK	1	99	1	0	13.66	14.5
				16QAM	1	99	1	0	13.51	14.5
				64QAM	1	99	1	0	13.52	14.5

CA_41C Ant0										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	PCC Frequency (MHz)	SCC Channel	SCC Frequency (MHz)	Modulation	PCC		SCC		Measured Power (dBm)	Max Tune-up (dBm)
					RB Size	RB offset	RB Size	RB offset		
39750	2506	39948	2525.8	QPSK	1	99	1	0	13.76	14.5
				16QAM	1	99	1	0	13.60	14.5
				64QAM	1	99	1	0	13.54	14.5
40521	2583.1	40719	2602.9	QPSK	1	99	1	0	13.80	14.5
				16QAM	1	99	1	0	13.72	14.5
				64QAM	1	99	1	0	13.64	14.5
41292	2660.2	41490	2680	QPSK	1	99	1	0	13.76	14.5
				16QAM	1	99	1	0	13.60	14.5
				64QAM	1	99	1	0	13.53	14.5

Full Power

2.4GHz WLAN		Ant 4				
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11b 1Mbps	1	2412	17.83	19.00	18.50
		6	2437	18.33	19.00	18.50
		11	2462	18.72	19.00	18.50
	802.11g 6Mbps	1	2412	17.30	18.50	18.00
		6	2437	17.61	18.50	18.00
		11	2462	18.22	18.50	18.00
	802.11n-HT20 MCS0	1	2412	14.43	16.00	15.00
		6	2437	14.73	16.00	15.00
		11	2462	15.20	16.00	15.00
	802.11n-HT40 MCS0	3	2422	15.22	16.00	15.00
		6	2437	14.95	16.00	15.00
		9	2452	15.67	16.00	15.00

5GHz WLAN		Ant 4				
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	36	5180	17.29	18.00	17.50
		40	5200	17.20	18.00	17.50
		44	5220	17.13	18.00	17.50
		48	5240	17.02	18.00	17.50
	802.11n-HT20 MCS0	36	5180	15.58	16.00	15.00
		40	5200	14.35	16.00	15.00
		48	5240	14.14	16.00	15.00
	802.11n-HT40 MCS0	38	5190	11.61	13.00	13.00
		46	5230	11.44	13.00	13.00
	802.11ac-VHT20 MCS0	36	5180	13.19	14.00	14.50
		40	5200	13.38	14.00	14.50
		48	5240	13.14	14.00	14.50
	802.11ac-VHT40 MCS0	38	5190	11.14	12.00	12.50
		46	5230	10.82	12.00	12.50
	802.11ac-VHT80 MCS0	42	5210	11.58	12.00	12.50

5GHz WLAN		Ant 4				
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	52	5260	17.22	18.00	17.50
		56	5280	17.17	18.00	17.50
		60	5300	17.38	18.00	17.50
		64	5320	17.24	18.00	17.50
	802.11n-HT20 MCS0	52	5260	14.32	15.00	15.00
		60	5300	14.52	15.00	15.00
		64	5320	14.25	15.00	15.00
	802.11n-HT40 MCS0	54	5270	11.79	13.00	13.00
		62	5310	11.64	13.00	13.00
	802.11ac-VHT20 MCS0	52	5260	13.30	14.00	14.50
		60	5300	13.39	14.00	14.50
		64	5320	13.28	14.00	14.50
	802.11ac-VHT40 MCS0	54	5270	11.31	12.00	12.50
		62	5310	11.22	12.00	12.50
	802.11ac-VHT80 MCS0	58	5290	11.71	12.00	12.50

5GHz WLAN		Ant 4				
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	100	5500	16.80	18.00	17.50
		116	5580	16.66	18.00	17.50
		124	5620	16.88	18.00	17.50
		140	5700	17.27	18.00	17.50
	802.11n-HT20 MCS0	100	5500	13.70	15.00	15.00
		116	5580	13.70	15.00	15.00
		140	5700	14.30	15.00	15.00
	802.11n-HT40 MCS0	102	5510	11.41	13.00	13.00
		110	5550	11.44	13.00	13.00
		134	5670	12.04	13.00	13.00
	802.11ac-VHT20 MCS0	100	5500	12.73	14.00	14.50
		116	5580	12.75	14.00	14.50
		140	5700	13.29	14.00	14.50
	802.11ac-VHT40 MCS0	102	5510	10.99	12.00	12.50
		110	5550	10.97	12.00	12.50
		134	5670	11.64	12.00	12.50
	802.11ac-VHT80 MCS0	106	5530	11.14	12.00	12.50
		122	5610	11.35	12.00	12.50

5GHz WLAN		Ant 4				
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	149	5745	17.58	19.00	17.50
		157	5785	17.79	19.00	17.50
		165	5825	17.70	19.00	17.50
		149	5745	14.68	16.00	15.00
	802.11n-HT20 MCS0	157	5785	14.97	16.00	15.00
		165	5825	14.86	16.00	15.00
		151	5755	12.00	13.00	13.00
	802.11n-HT40 MCS0	159	5795	12.32	13.00	13.00
		149	5745	13.71	15.00	14.50
		157	5785	13.87	15.00	14.50
	802.11ac-VHT20 MCS0	151	5755	11.52	13.00	12.50
		159	5795	11.76	13.00	12.50
		155	5775	12.05	13.00	12.50

		Ant 4				
BT	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
BLE	1M	0	2402	2.00	3.50	6.00
		19	2440	2.93	3.50	6.00
		39	2480	2.13	3.50	6.00
	2M	0	2404	1.91	3.50	6.00
		19	2440	2.96	3.50	6.00
		38	2478	2.28	3.50	6.00
	S2	0	2402	1.97	3.50	6.00
		19	2440	2.91	3.50	6.00
		39	2480	2.11	3.50	6.00
	S8	0	2402	1.95	3.50	6.00
		19	2440	2.89	3.50	6.00
		39	2480	2.08	3.50	6.00
BREDR	GFSK	0	2402	9.05	10.00	7.00
		39	2441	9.08	10.00	7.00
		78	2480	9.09	10.00	7.00
	DPSK	0	2402	6.53	7.50	7.00
		39	2441	5.86	7.50	7.00
		78	2480	6.35	7.50	7.00
	8DPSK	0	2402	6.44	7.50	7.00
		39	2441	5.87	7.50	7.00
		78	2480	6.33	7.50	7.00

Reduce Power

2.4GHz WLAN		Ant 4				
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11b 1Mbps	1	2412	10.02	11.00	10.50
		6	2437	10.42	11.00	10.50
		11	2462	10.71	11.00	10.50
	802.11g 6Mbps	1	2412		10.50	
		6	2437		10.50	
		11	2462		10.50	
	802.11n-HT20 MCS0	1	2412		8.00	
		6	2437		8.00	
		11	2462		8.00	
	802.11n-HT40 MCS0	3	2422		8.00	
		6	2437		8.00	
		9	2452		8.00	

5GHz WLAN		Ant 4				
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	36	5180	6.25	7.00	6.50
		40	5200	6.16	7.00	6.50
		44	5220	6.19	7.00	6.50
		48	5240	6.04	7.00	6.50
	802.11n-HT20 MCS0	36	5180		5.00	
		40	5200		5.00	
		48	5240		5.00	
	802.11n-HT40 MCS0	38	5190		2.00	
		46	5230		2.00	
	802.11ac-VHT20 MCS0	36	5180		3.00	
		40	5200		3.00	
		48	5240		3.00	
	802.11ac-VHT40 MCS0	38	5190		1.00	
		46	5230		1.00	
	802.11ac-VHT80 MCS0	42	5210		1.00	

5GHz WLAN		Ant 4				
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	52	5260	6.75	7.50	7.00
		56	5280	6.69	7.50	7.00
		60	5300	6.91	7.50	7.00
		64	5320	6.78	7.50	7.00
	802.11n-HT20 MCS0	52	5260		4.50	
		60	5300		4.50	
		64	5320		4.50	
	802.11n-HT40 MCS0	54	5270		2.50	
		62	5310		2.50	
	802.11ac-VHT20 MCS0	52	5260		3.50	
		60	5300		3.50	
		64	5320		3.50	
	802.11ac-VHT40 MCS0	54	5270		1.50	
		62	5310		1.50	
	802.11ac-VHT80 MCS0	58	5290		1.50	

5GHz WLAN		Ant 4				
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	100	5500	6.36	7.50	7.00
		116	5580	6.21	7.50	7.00
		124	5620	6.42	7.50	7.00
		140	5700	6.75	7.50	7.00
	802.11n-HT20 MCS0	100	5500		15.00	
		116	5580		15.00	
		140	5700		15.00	
		102	5510		13.00	
	802.11n-HT40 MCS0	110	5550		13.00	
		134	5670		13.00	
	802.11ac-VHT20 MCS0	100	5500		14.00	
		116	5580		14.00	
		140	5700		14.00	
		102	5510		12.00	
	802.11ac-VHT40 MCS0	110	5550		12.00	
		134	5670		12.00	
	802.11ac-VHT80 MCS0	106	5530		12.00	
		122	5610		12.00	

5GHz WLAN		Ant 4				
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting
	802.11a 6Mbps	149	5745	6.25	7.50	6.00
		157	5785	6.41	7.50	6.00
		165	5825	6.34	7.50	6.00
	802.11n-HT20 MCS0	149	5745		4.50	
		157	5785		4.50	
		165	5825		4.50	
	802.11n-HT40 MCS0	151	5755		1.50	
		159	5795		1.50	
		149	5745		3.50	
	802.11ac-VHT20 MCS0	157	5785		3.50	
		165	5825		3.50	
	802.11ac-VHT40 MCS0	151	5755		1.50	
		159	5795		1.50	
		155	5775		1.50	