




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.18	74.0	24.82	37.57	54.0	16.43	13.54	V	265.1	2.0
2	7,320.000	54.79	74.0	19.21	42.87	54.0	11.13	18.9	V	265.1	2.0

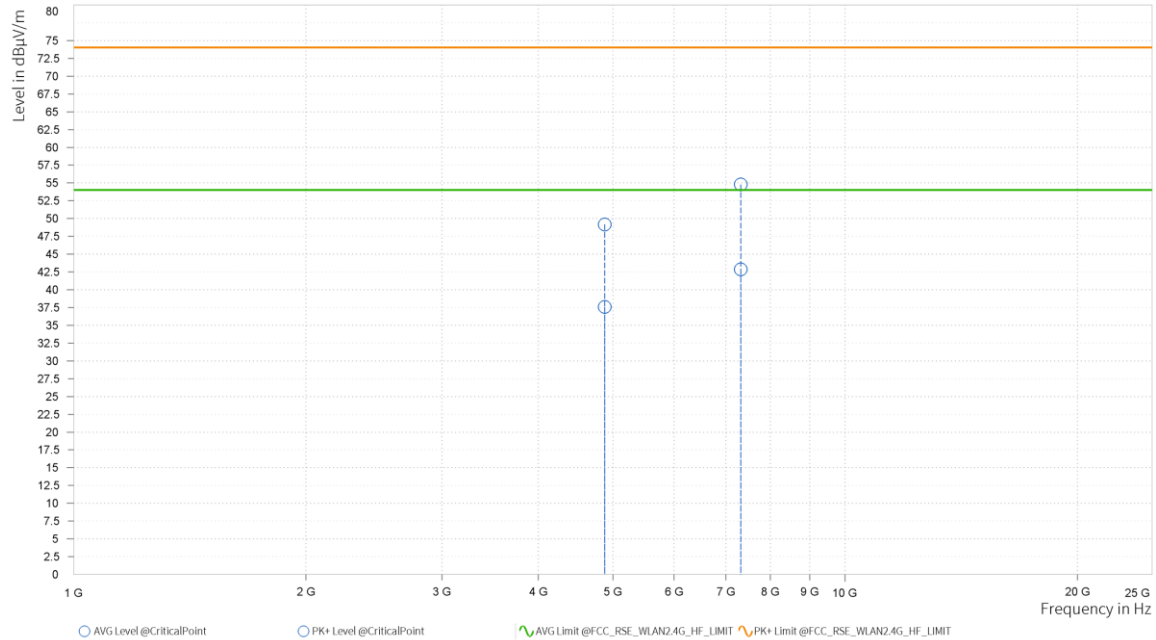

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value-Emission level.
2. 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.750	88.21			5.88	H	217.4	2.0
6	2,483.500	45.78	74.0	28.22	5.91	H	359.1	1.0
6	2,484.750	45.83	74.0	28.17	5.92	H	68.6	1.0

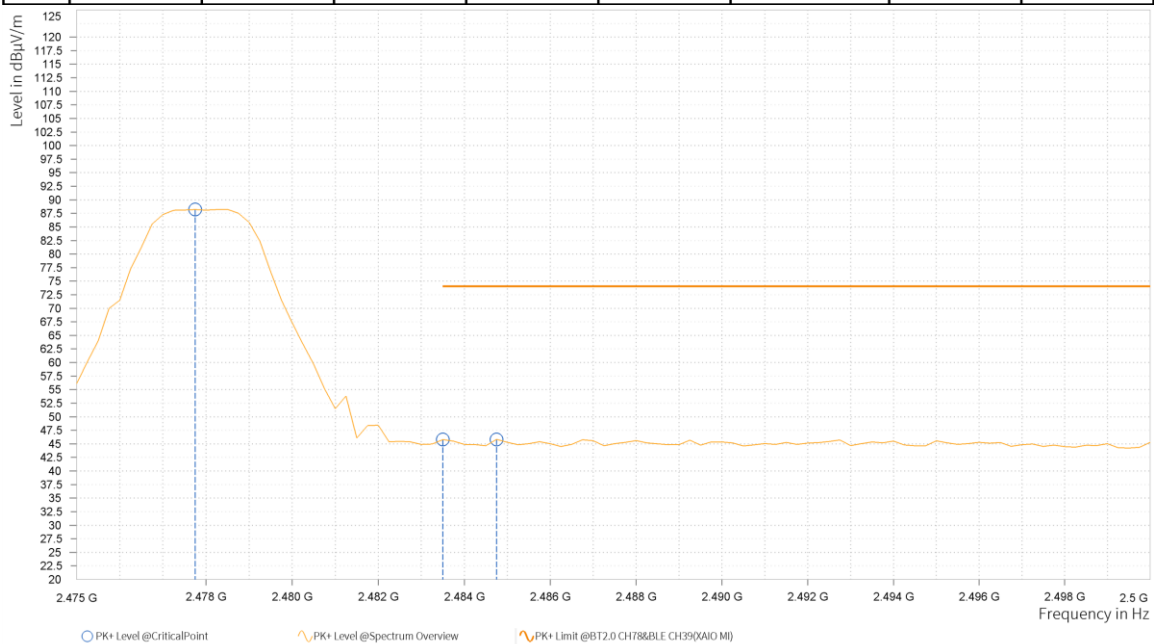



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	76.84			5.88	H	142.0	2.0
6	2,483.500	30.68	54.0	23.32	5.91	H	142.6	1.0
6	2,492.000	30.82	54.0	23.18	5.97	H	355.1	2.0

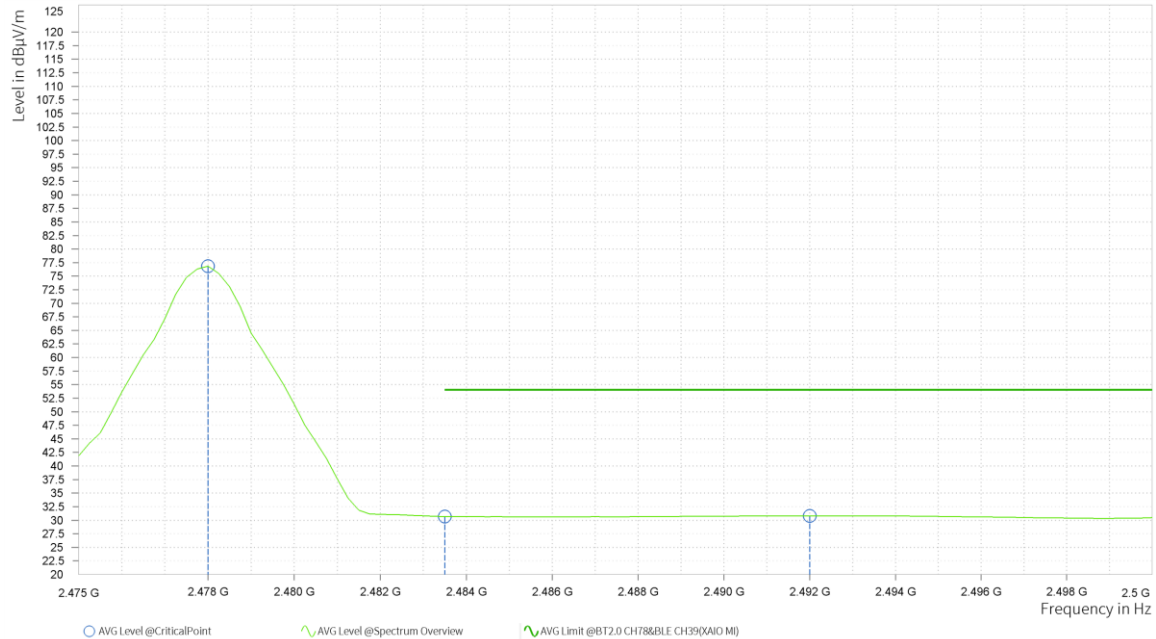



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.500	89.4			5.88	V	67.4	1.0
6	2,483.500	45.77	74.0	28.23	5.91	V	133.6	2.0
6	2,483.750	47.0	74.0	27.0	5.92	V	133.6	2.0

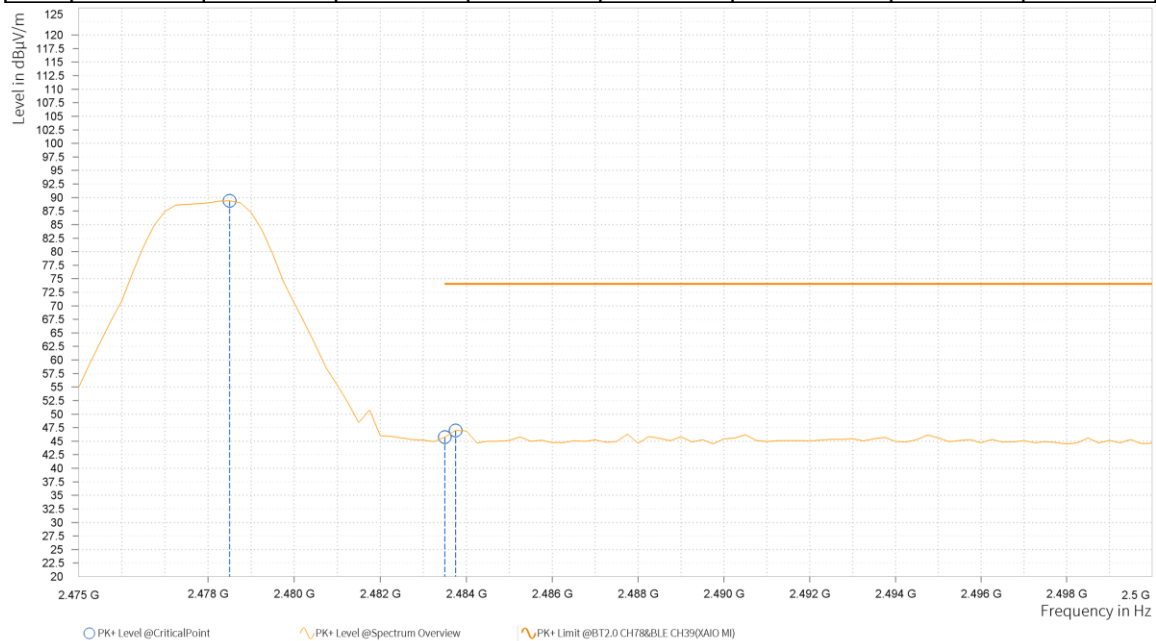



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	77.91			5.88	V	214.5	1.0
6	2,483.500	30.79	54.0	23.21	5.91	V	292.6	2.0
6	2,493.000	30.83	54.0	23.17	5.98	V	1.0	2.0

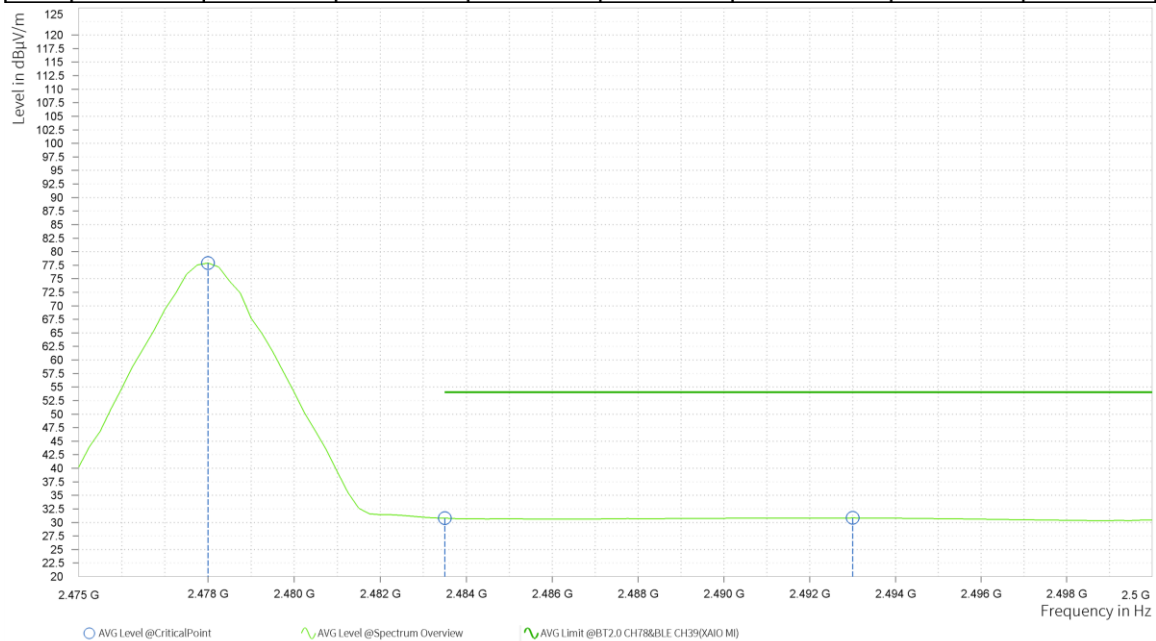

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2478MHz: Fundamental frequency.




BT-LE_S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	45.29	74.0	28.71	5.75	H	1.4	2.0
5	2,390.000	45.06	74.0	28.94	5.77	H	307.0	2.0
5	2,402.000	88.63			5.85	H	245.5	1.0

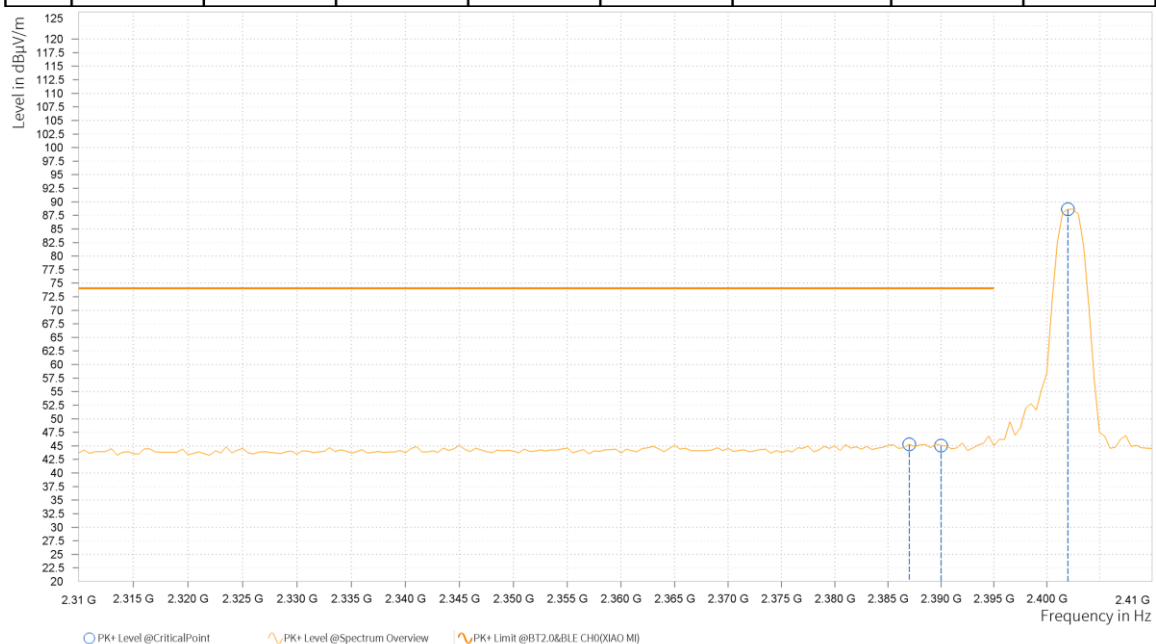



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,383.000	30.63	54.0	23.37	5.72	H	1.0	2.0
5	2,390.000	30.59	54.0	23.41	5.77	H	1.0	2.0
5	2,402.000	86.59			5.85	H	316.6	2.0





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.500	45.78	74.0	28.22	5.75	V	43.5	1.0
5	2,390.000	44.76	74.0	29.24	5.77	V	93.7	1.0
5	2,402.500	85.23			5.86	V	118.1	2.0

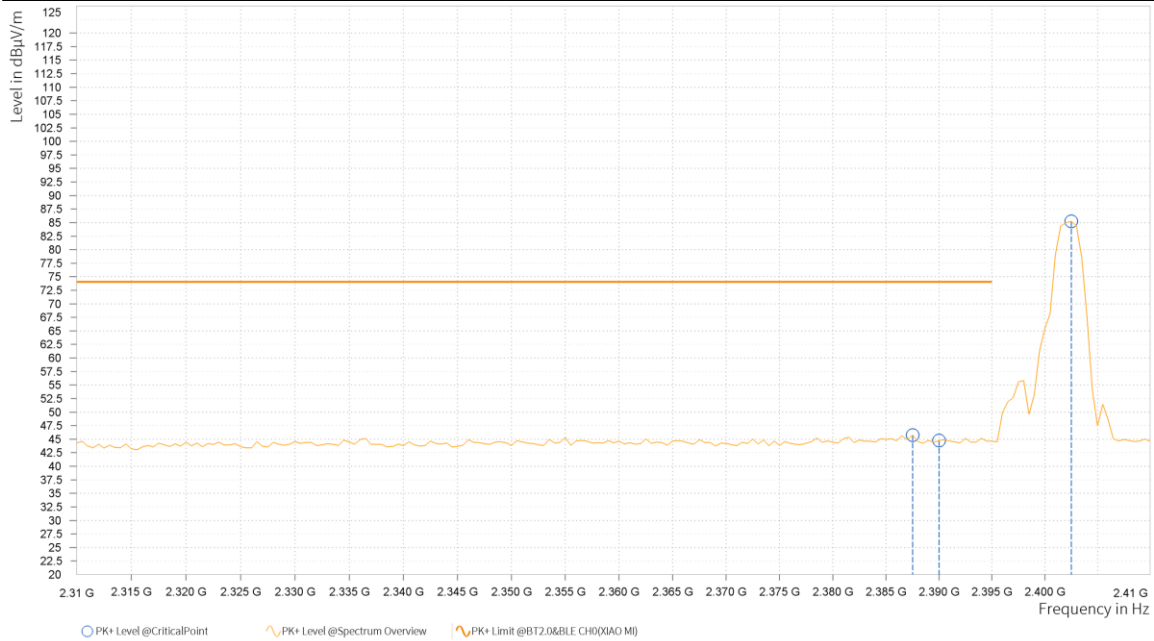



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,384.500	30.64	54.0	23.36	5.73	V	0.9	2.0
5	2,390.000	30.58	54.0	23.42	5.77	V	359.0	2.0
5	2,402.000	82.56			5.85	V	43.5	1.0




REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

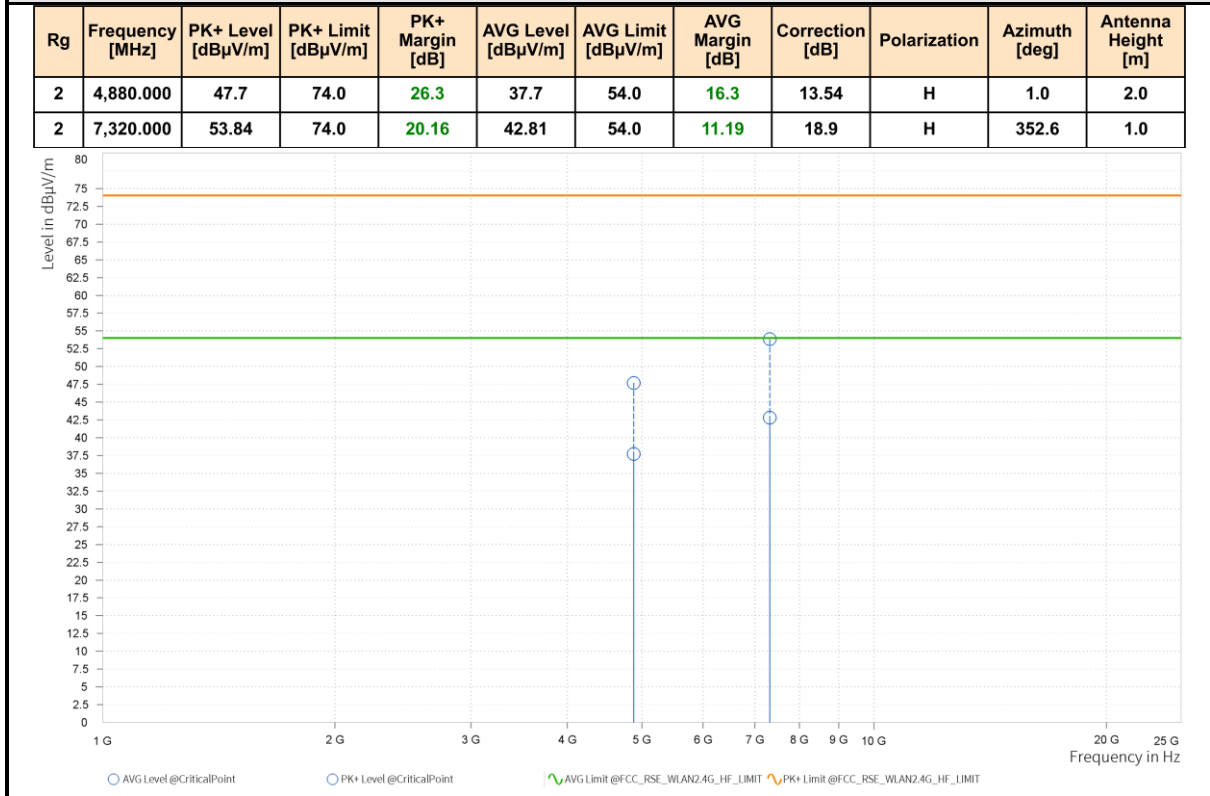



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.04	74.0	23.96	37.56	54.0	16.44	13.54	V	1.0	2.0
2	7,320.000	53.89	74.0	20.11	42.77	54.0	11.23	18.9	V	352.2	1.0

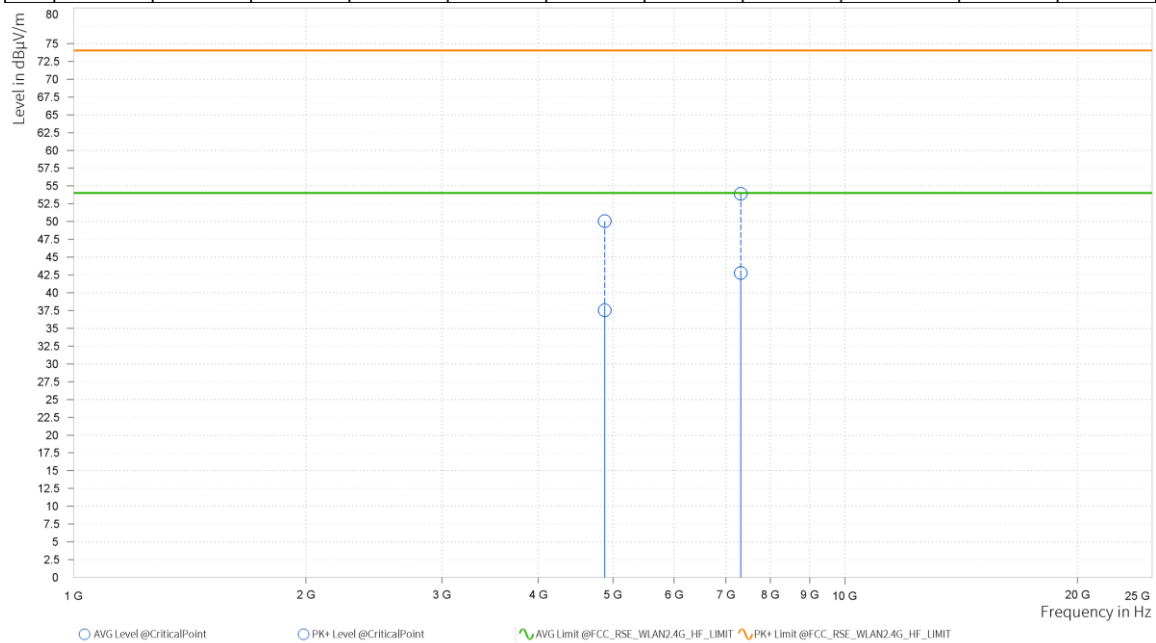

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.750	87.06			5.89	H	65.4	2.0
6	2,483.500	46.82	74.0	27.18	5.91	H	1.0	2.0
6	2,484.750	48.04	74.0	25.96	5.92	H	139.6	2.0

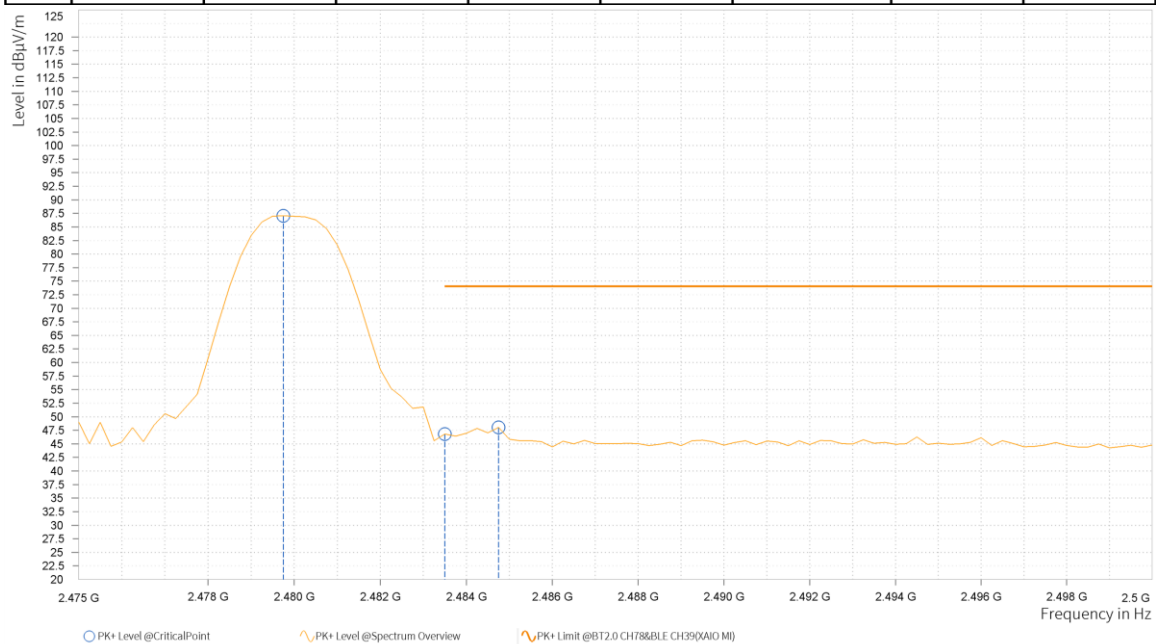



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	84.6			5.89	H	214.9	2.0
6	2,483.500	30.84	54.0	23.16	5.91	H	147.4	1.0
6	2,492.250	30.82	54.0	23.18	5.97	H	61.9	2.0

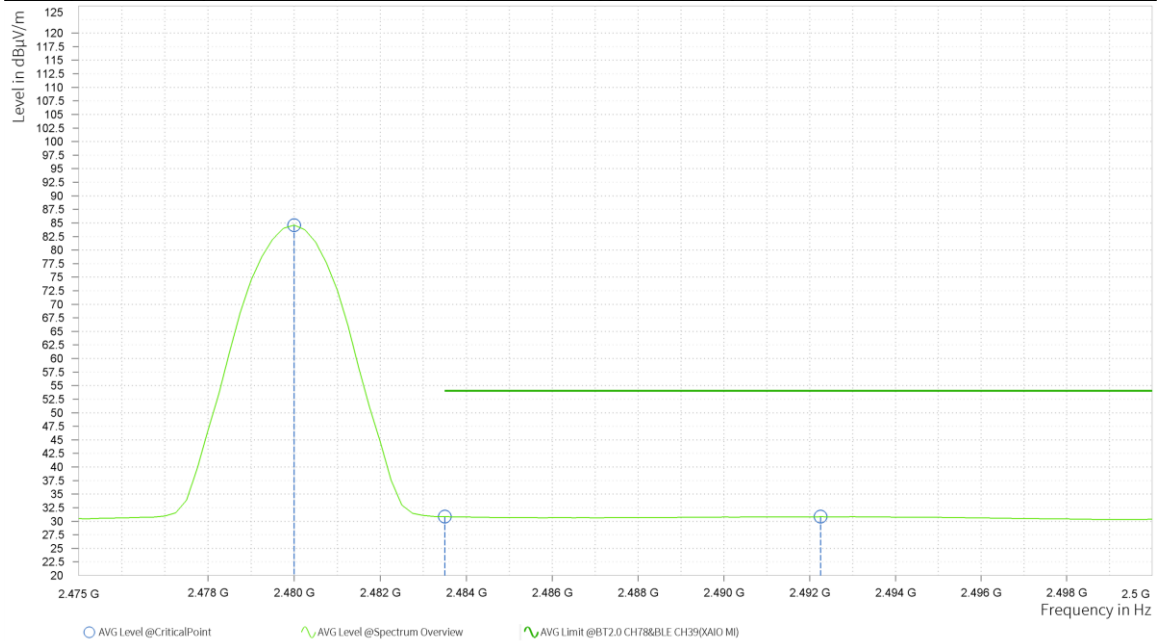



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.750	90.72			5.89	V	71	1.0
6	2,483.500	51.45	74.0	22.55	5.91	V	71	1.0
6	2,484.250	52.15	74.0	21.85	5.92	V	71	1.0

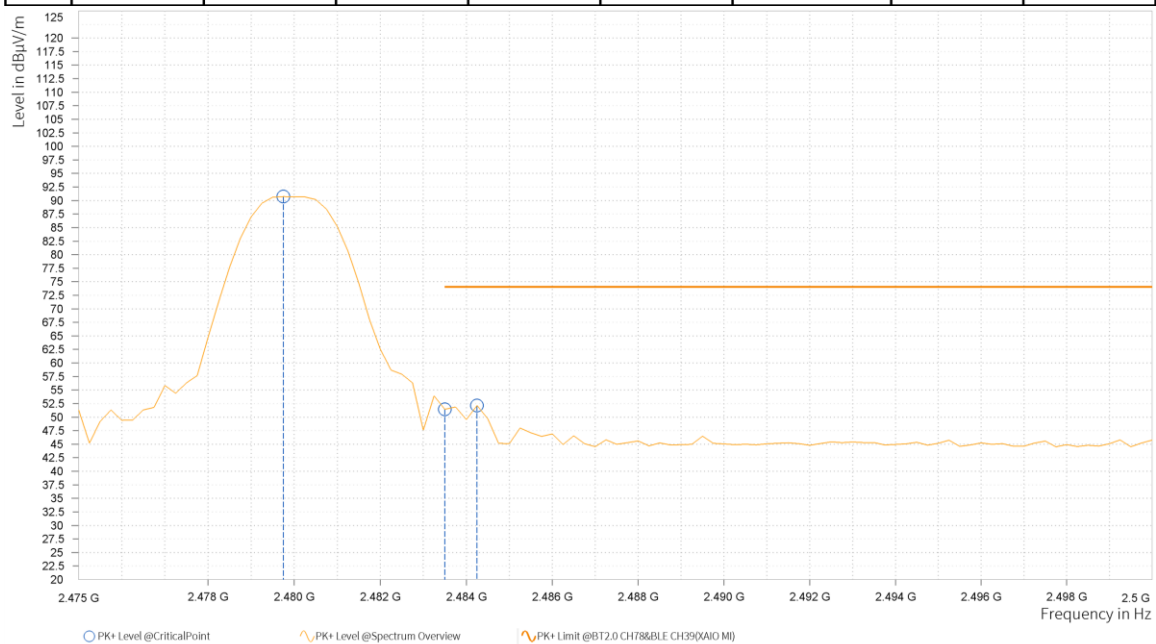



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	88.28			5.89	V	69.8	1.0
6	2,483.500	31.03	54.0	22.97	5.91	V	289.0	2.0
6	2,493.000	30.83	54.0	23.17	5.98	V	359.1	1.0

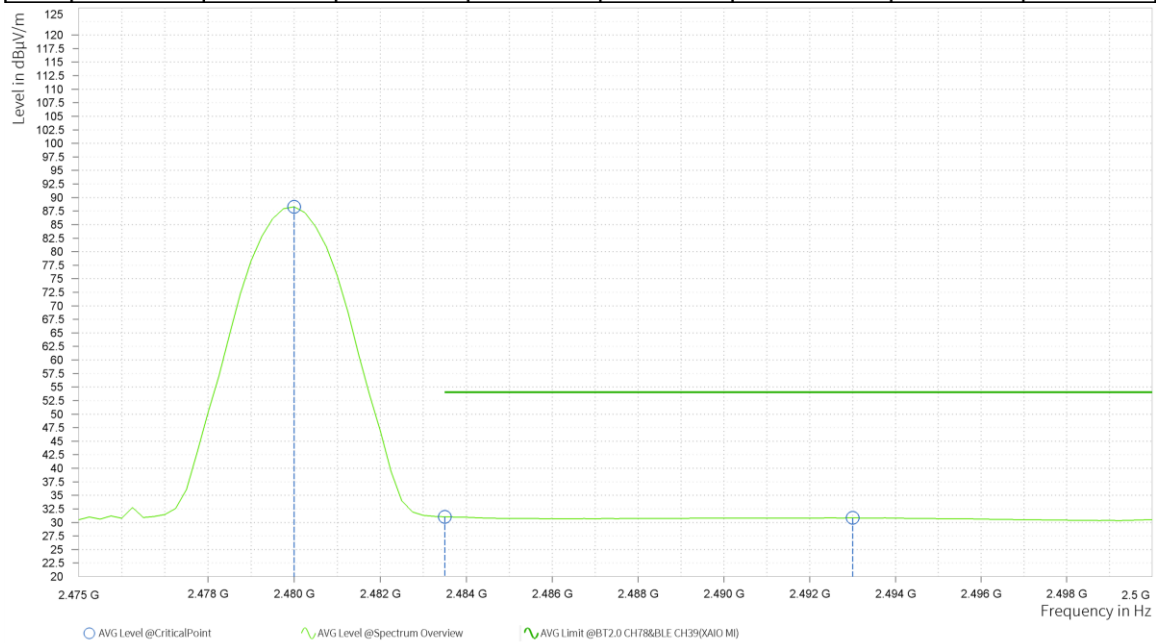

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.




BT-LE_S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,386.000	45.64	74.0	28.36	5.74	H	1.0	2.0
5	2,390.000	44.15	74.0	29.85	5.77	H	146.3	1.0
5	2,402.500	89.93			5.86	H	246.7	1.0

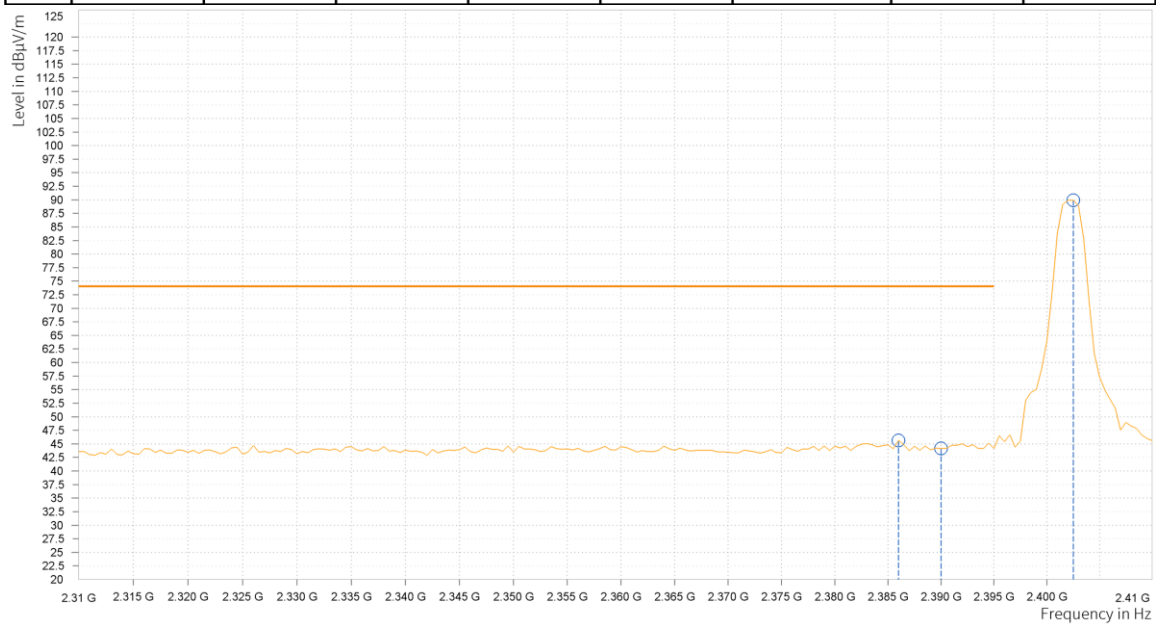



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,383.000	30.67	54.0	23.33	5.72	H	355.1	2.0
5	2,390.000	30.64	54.0	23.36	5.77	H	247.9	1.0
5	2,402.000	88.17			5.85	H	314.1	2.0

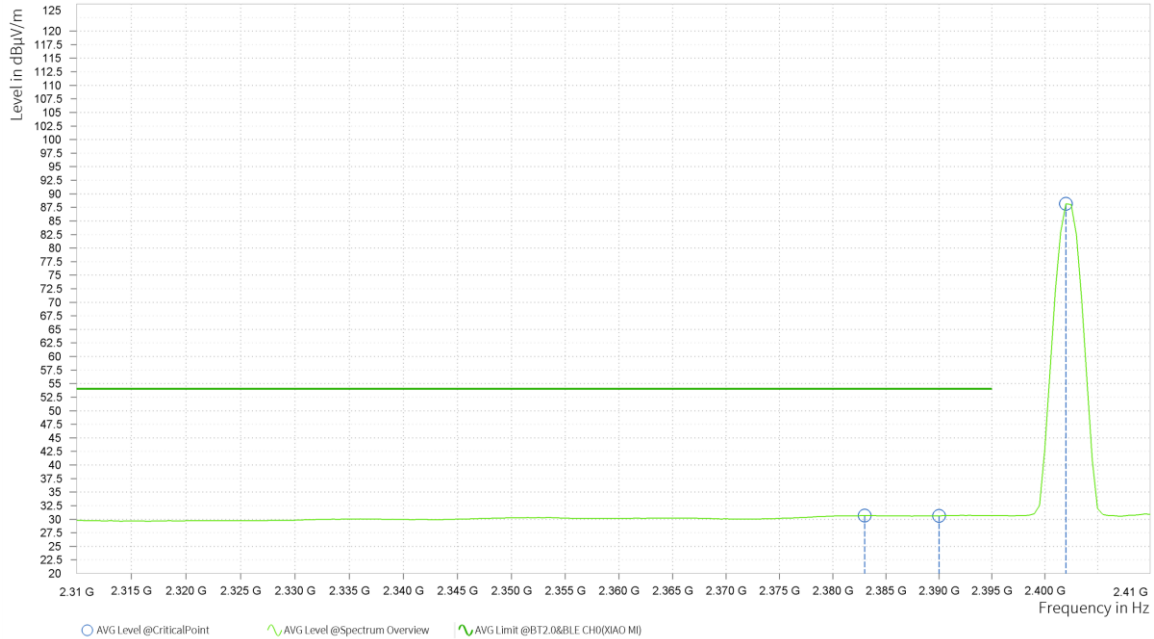



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,388.000	45.56	74.0	28.44	5.76	V	314.2	2.0
5	2,390.000	43.69	74.0	30.31	5.77	V	247.9	1.0
5	2,402.500	86.59			5.86	V	44.7	1.0

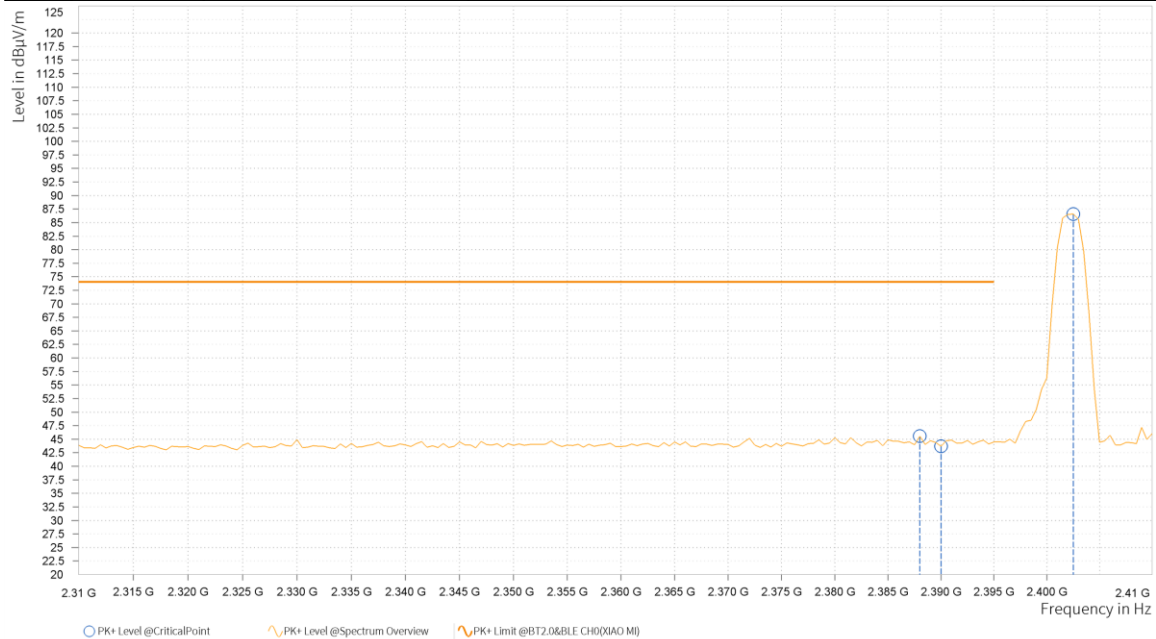



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,383.500	30.68	54.0	23.32	5.73	V	300.5	1.0
5	2,390.000	30.62	54.0	23.38	5.77	V	346.6	1.0
5	2,402.000	85.77			5.85	V	109.6	2.0




REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

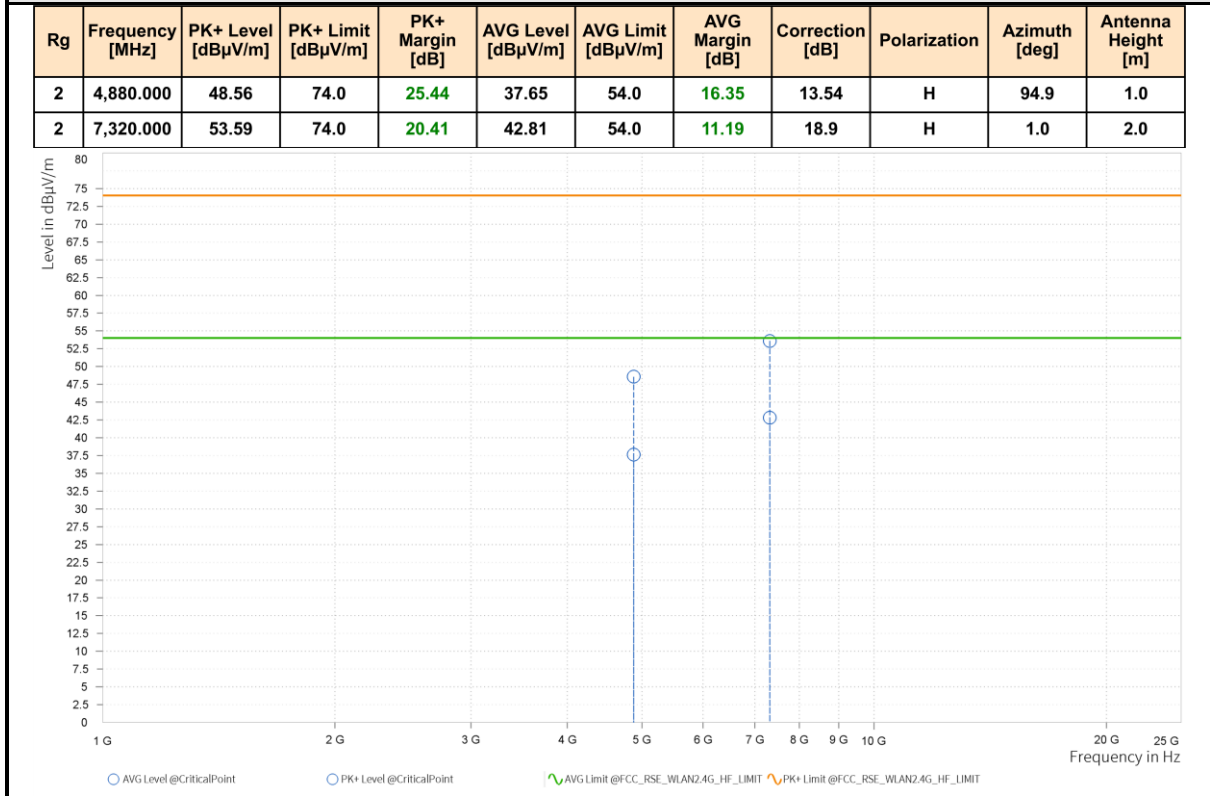



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.16	74.0	25.84	37.53	54.0	16.47	13.54	V	0.9	2.0
2	7,320.000	53.56	74.0	20.44	42.73	54.0	11.27	18.9	V	266.3	2.0

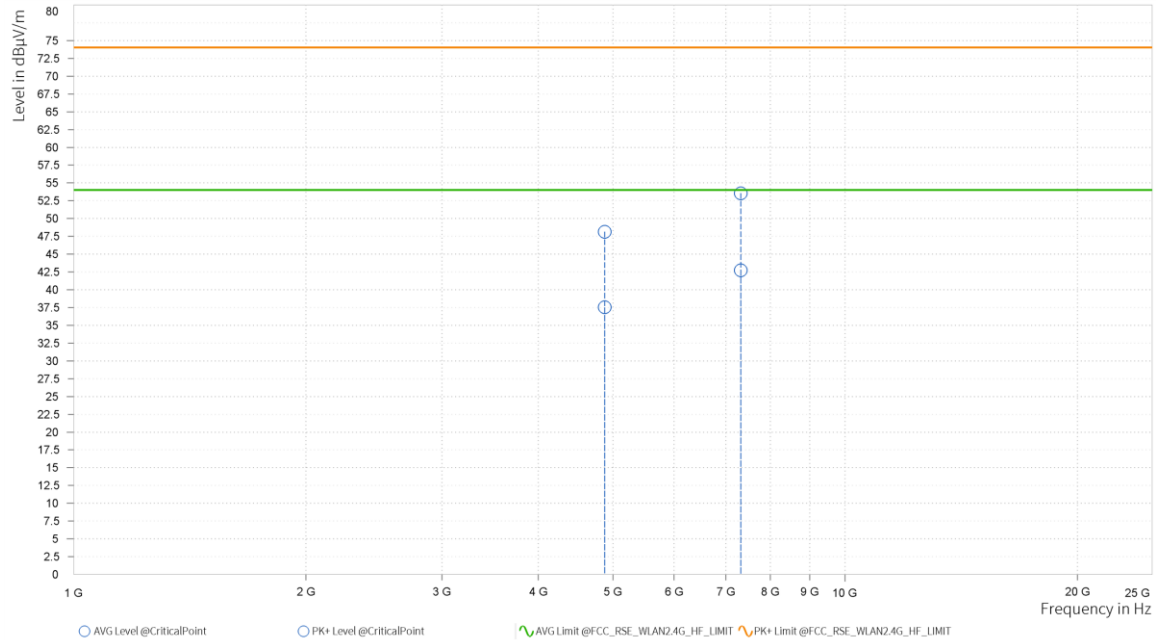

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.250	86.61			5.89	H	61.8	2.0
6	2,483.500	44.42	74.0	29.58	5.91	H	359.0	1.0
6	2,495.250	45.86	74.0	28.14	5.99	H	137.2	2.0

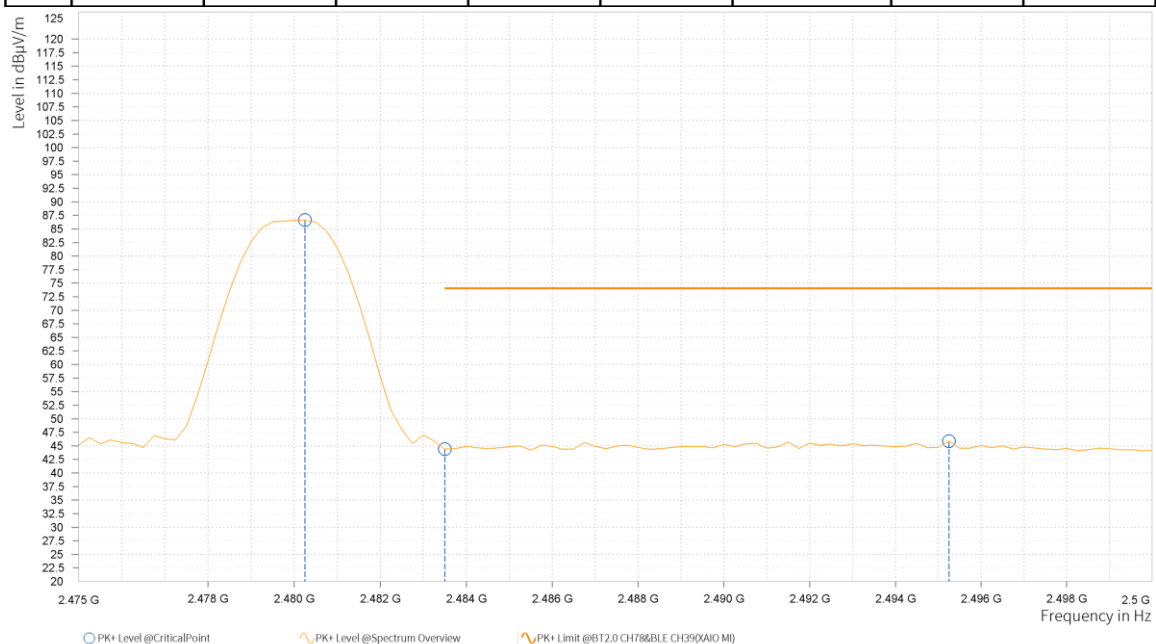



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	84.85			5.89	H	212.6	2.0
6	2,483.500	30.54	54.0	23.46	5.91	H	212.6	2.0
6	2,491.000	30.61	54.0	23.39	5.96	H	147.5	1.0

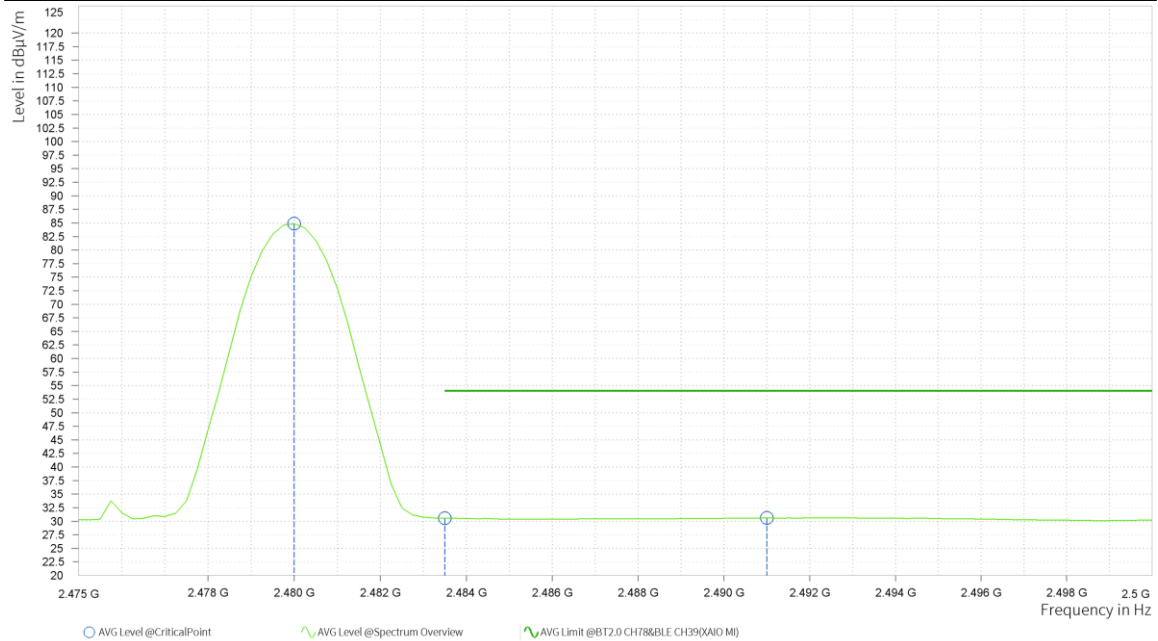



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.250	90.17			5.89	V	290.2	2.0
6	2,483.500	53.55	74.0	20.45	5.91	V	71.0	1.0
6	2,484.000	50.22	74.0	23.78	5.92	V	71.0	1.0

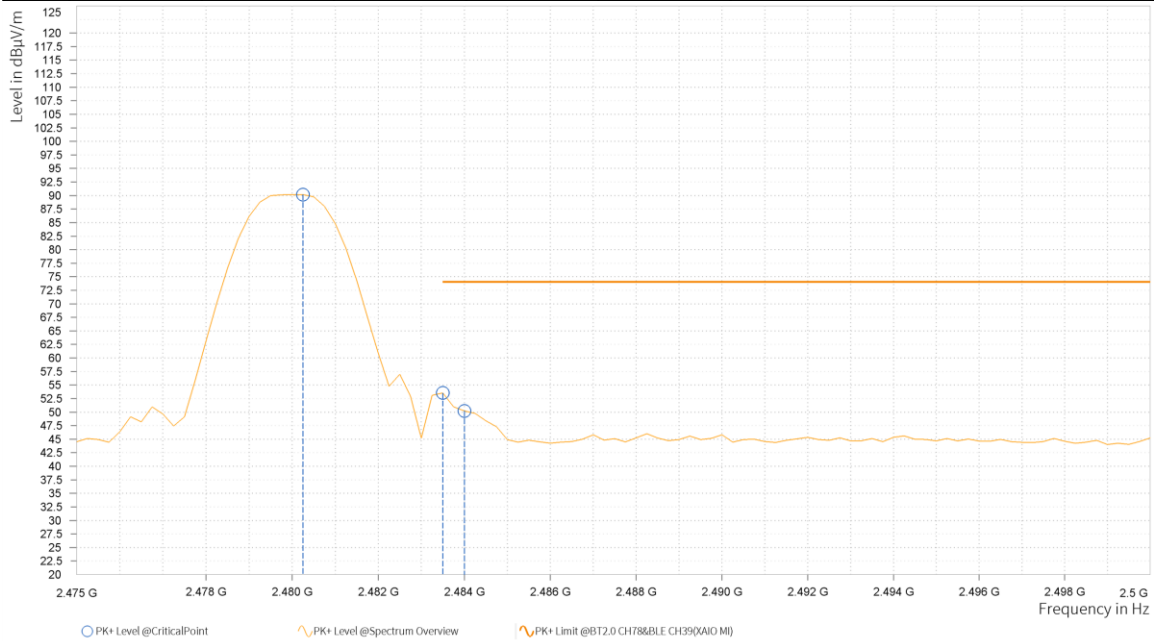



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	89.29			5.89	V	289	2.0
6	2,483.500	30.76	54.0	23.24	5.91	V	289	2.0
6	2,493.250	30.63	54.0	23.37	5.98	V	289	2.0

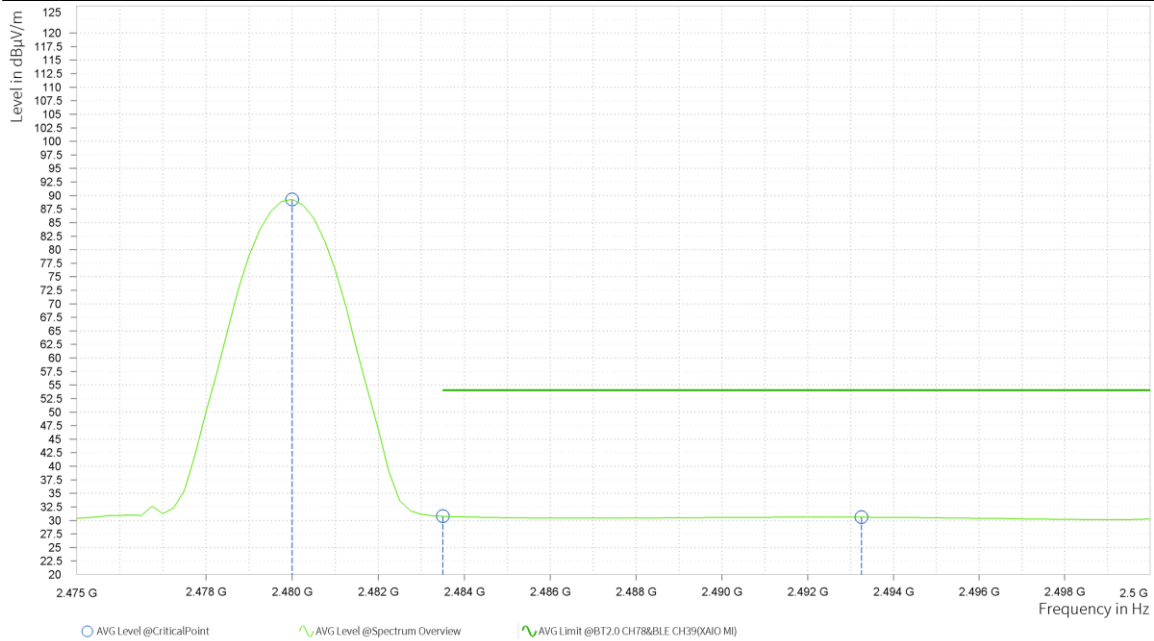

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.24,24	Feb.23,26
Open SwitCH and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A03	182185	Feb.15,24	Feb.14,26
Wideband Radio Communication	R&S	CMW500	169399	Jun.25,24	Jun.24,26
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
Hygrothermograph	DELI	20210528	SZ015	Sep.05,24	Sep.04,26
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsCH	VT4002	58566078100050	May.30,24	May.29,26
Temperature Chamber	votsCH	VT4002	58566078100050	May.30,24	May.29,26
Power Meter	R&S	NRX	102380	Feb.15,24	Feb.14,26
Power Meter probe	R&S	NRP6A	102942	Feb.15,24	Feb.14,26

NOTE:

1. The calibration interval of the above test instruments is 12/ 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

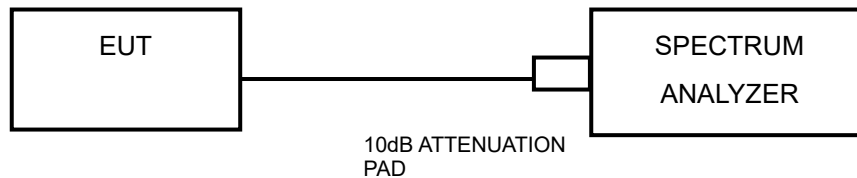

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest Channel frequencies individually.



BUREAU VERITAS Test Report No.: PSU-NQN2407300216RF09

3.3.7 TEST RESULTS

Please Refer to Appendix Of this test report..




3.4

CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

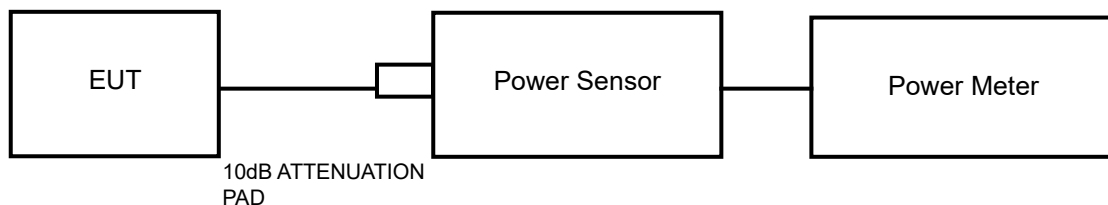

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest Channel frequencies individually.



3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report..




3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix Of this test report..

**3.5****POWER SPECTRAL DENSITY MEASUREMENT****3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT**

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP**3.5.3 TEST INSTRUMENTS**

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest Channel frequencies individually.



BUREAU VERITAS Test Report No.: PSU-NQN2407300216RF09

3.5.7 TEST RESULTS

Please Refer to Appendix Of this test report.




3.6

OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

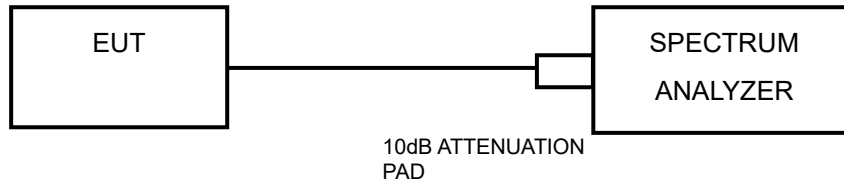

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest Channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are Attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report.

**3.7****ANTENNA REQUIREMENTS****3.7.1 STANDARD APPLICABLE**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit.

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the Attached file (Test Setup Photo).



5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX A:WLAN

DTS BANDWIDTH


TEST RESULT

TestMode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
11B	Ant4	2412	8.661	2407.920	2416.581	0.5	PASS
	Ant4	2437	8.160	2432.920	2441.080	0.5	PASS
	Ant4	2462	8.661	2457.419	2466.080	0.5	PASS
11G	Ant4	2412	15.820	2404.365	2420.185	0.5	PASS
	Ant4	2437	15.569	2429.015	2444.584	0.5	PASS
	Ant4	2462	15.569	2454.015	2469.584	0.5	PASS
11N20	Ant4	2412	16.471	2404.365	2420.836	0.5	PASS
	Ant4	2437	16.170	2428.414	2444.584	0.5	PASS
	Ant4	2462	16.170	2453.414	2469.584	0.5	PASS
11N40	Ant4	2422	28.968	2410.668	2410.668	0.5	PASS
	Ant4	2437	35.222	2419.414	2454.636	0.5	PASS
	Ant4	2452	35.172	2434.414	2469.586	0.5	PASS




TEST GRAPHS

11B_Ant0_2412

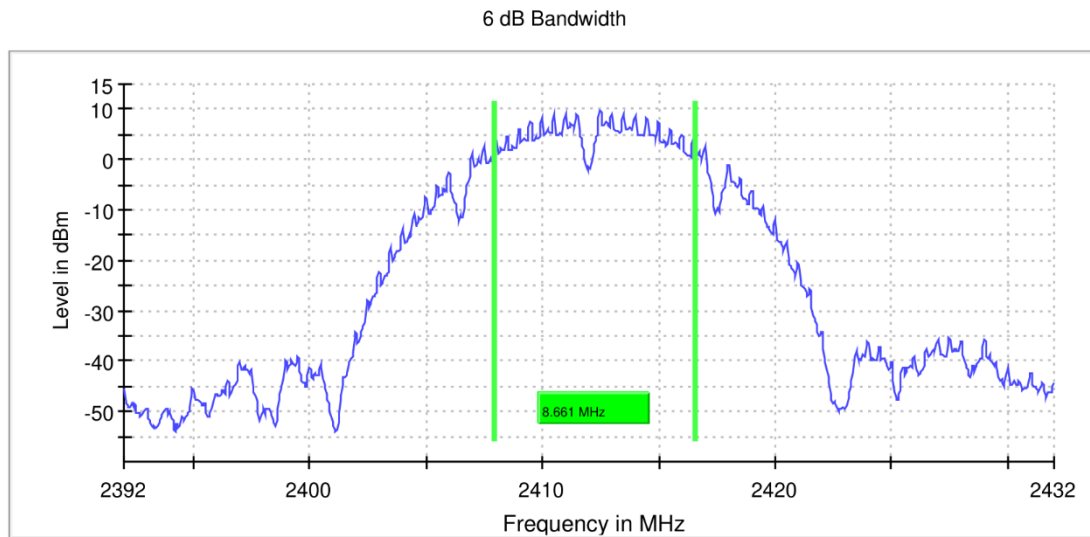


11B_Ant0_2437

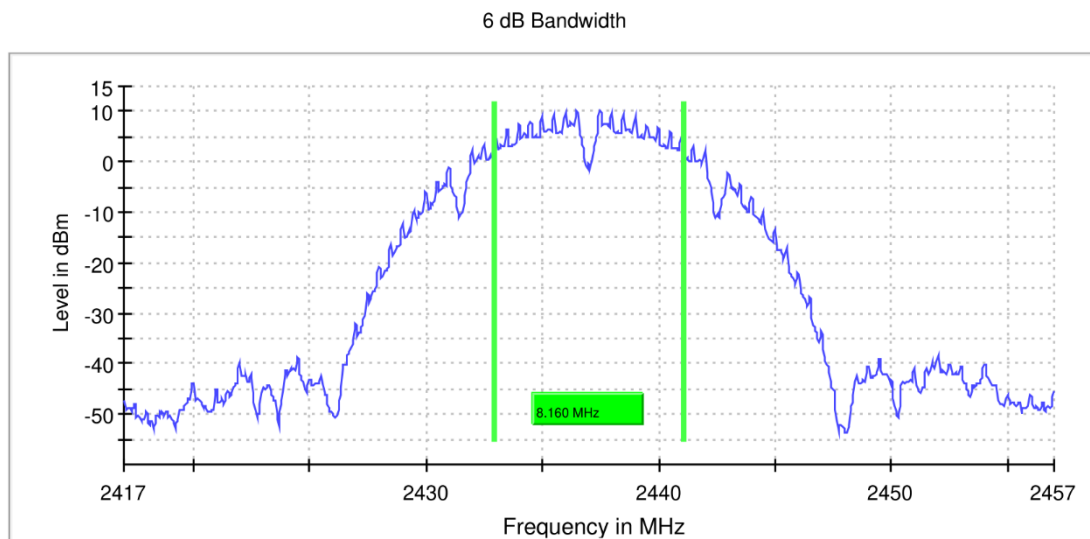

11B_Ant0_2462




6 dB Bandwidth

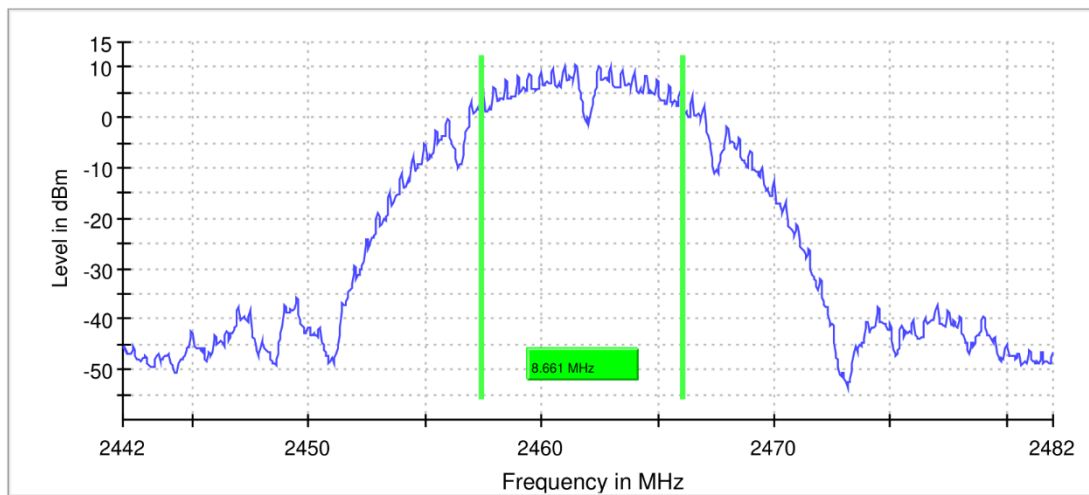

11G_Ant0_2412


6 dB Bandwidth

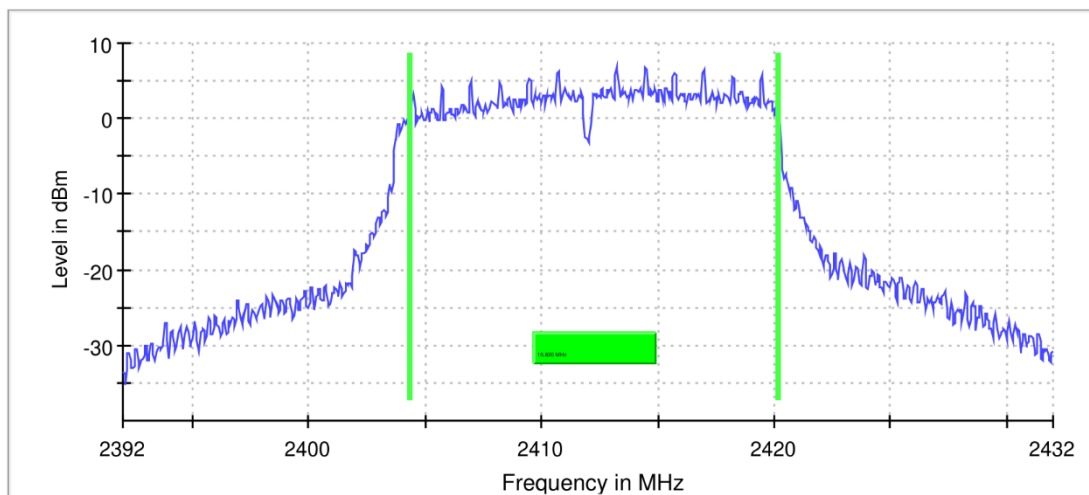

11G_Ant0_2437




6 dB Bandwidth

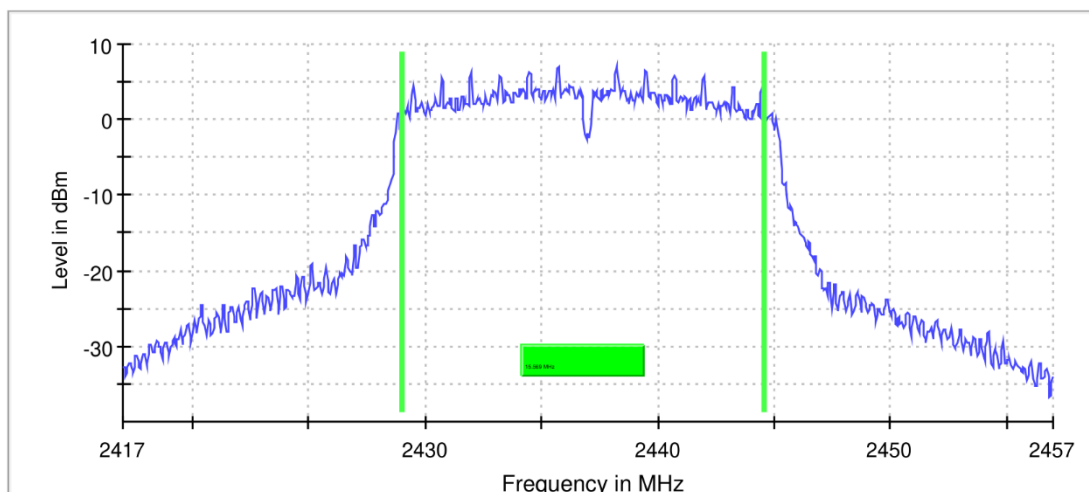

11G_Ant0_2462


6 dB Bandwidth

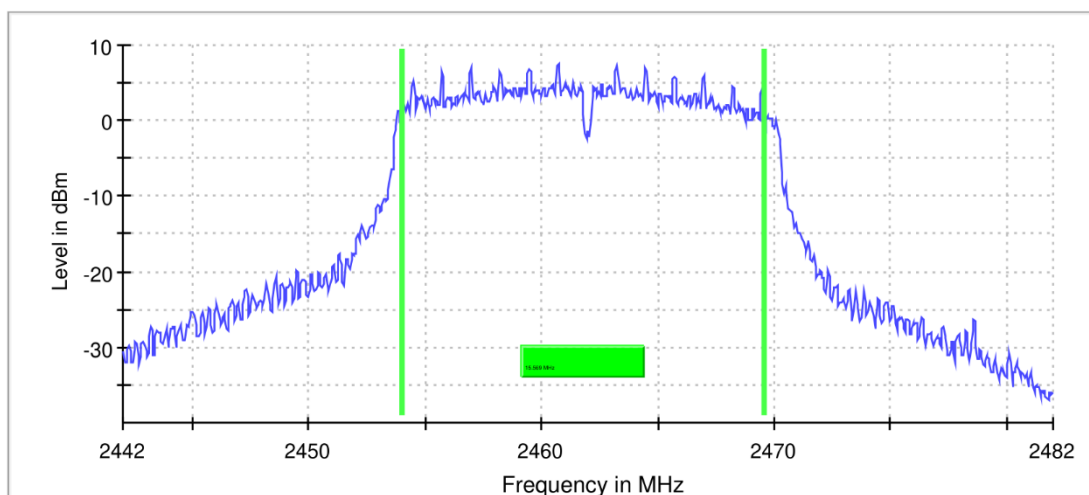

11N20_Ant0_2412




6 dB Bandwidth

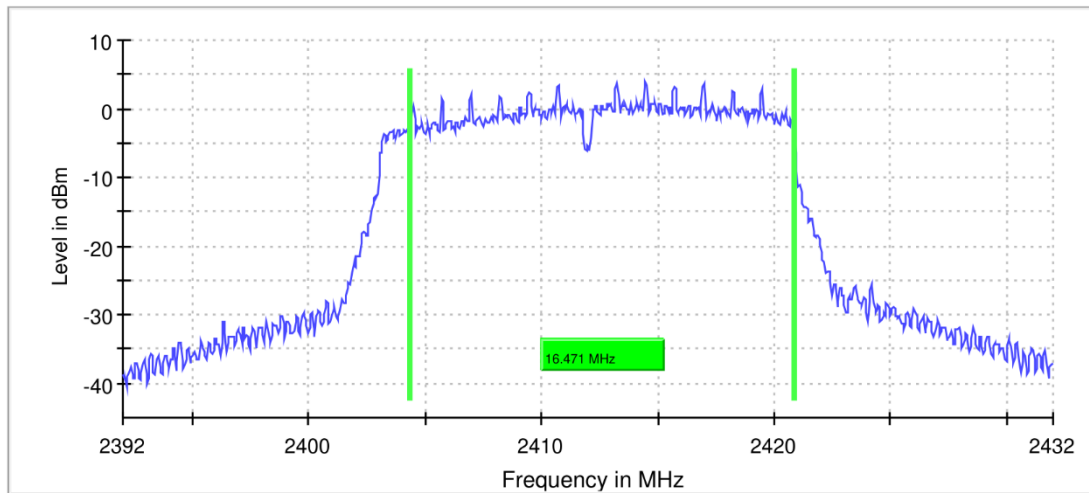

11N20_Ant0_2437


6 dB Bandwidth

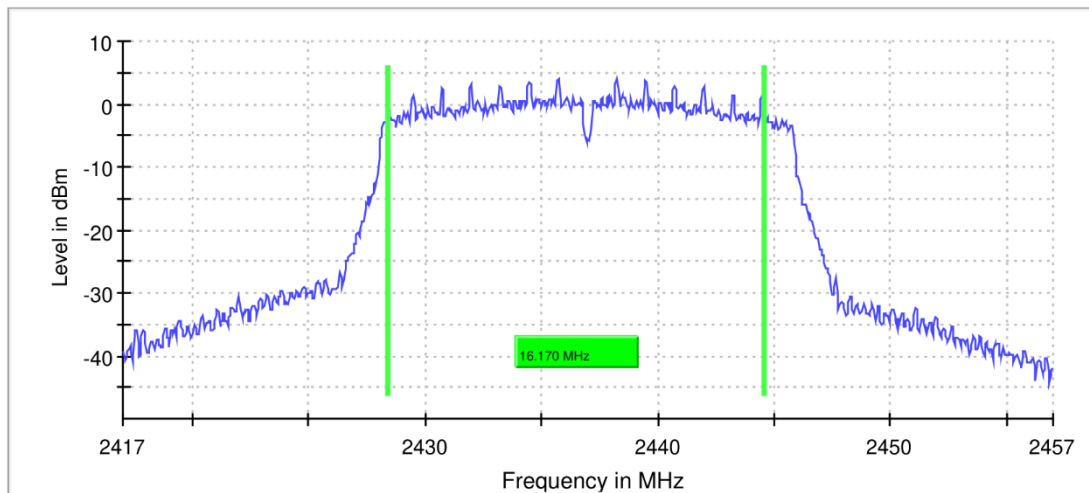

11N20_Ant0_2462




6 dB Bandwidth

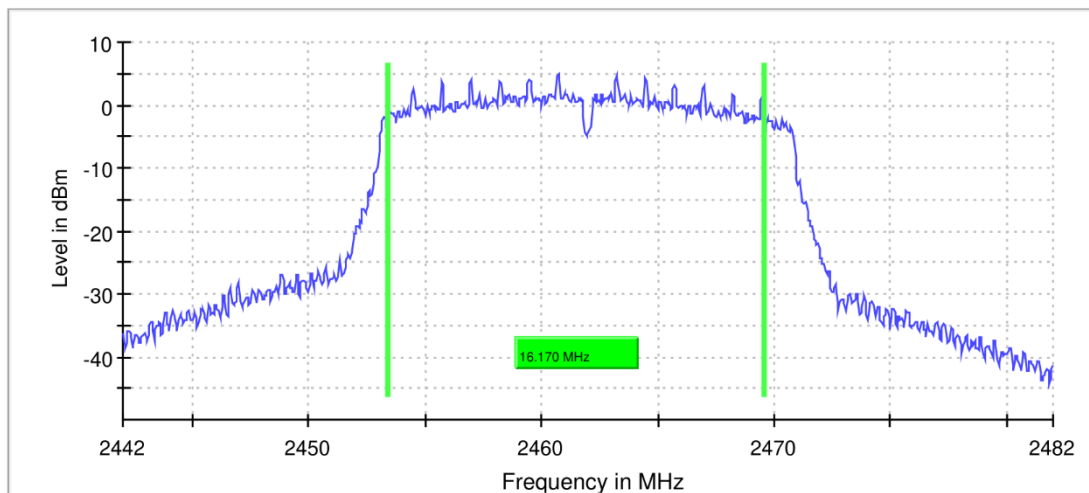

11N40_Ant0_2422


6 dB Bandwidth

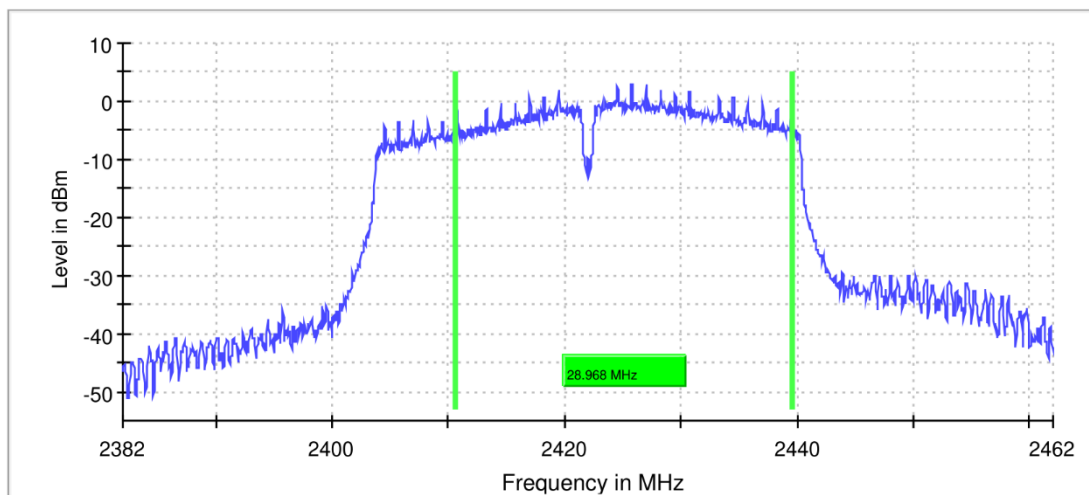

11N40_Ant0_2437




6 dB Bandwidth

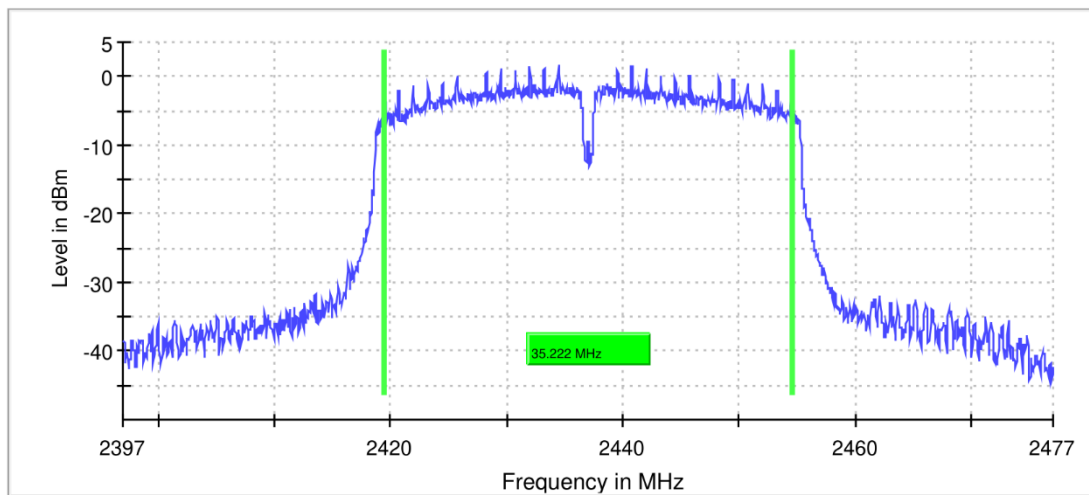

11N40_Ant0_2452

6 dB Bandwidth

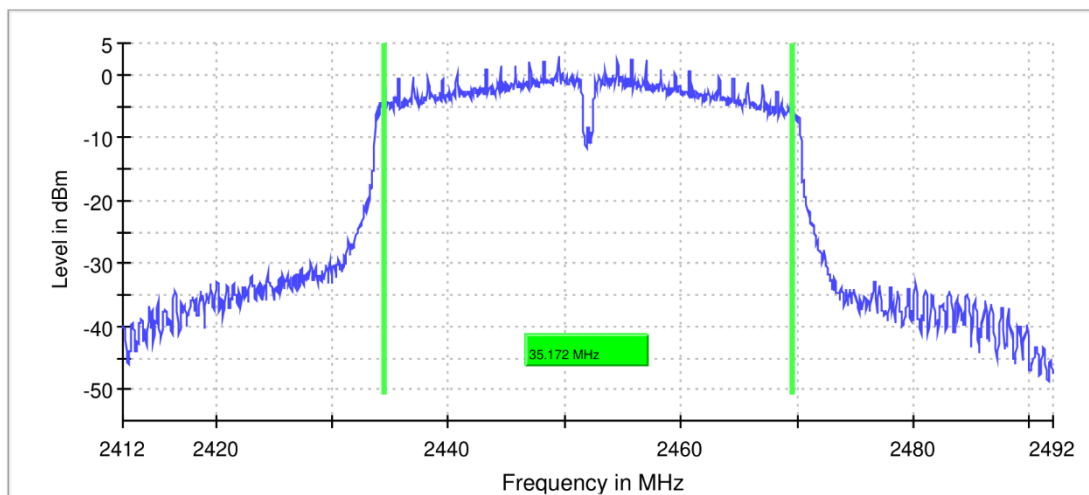

20M

RBW 100.000 kHz

VBW 300.000 kHz

40M

RBW 100.000 kHz

VBW 300.000 kHz